



Tx. Spurious 802.11n(HT20) 2442MHzRef

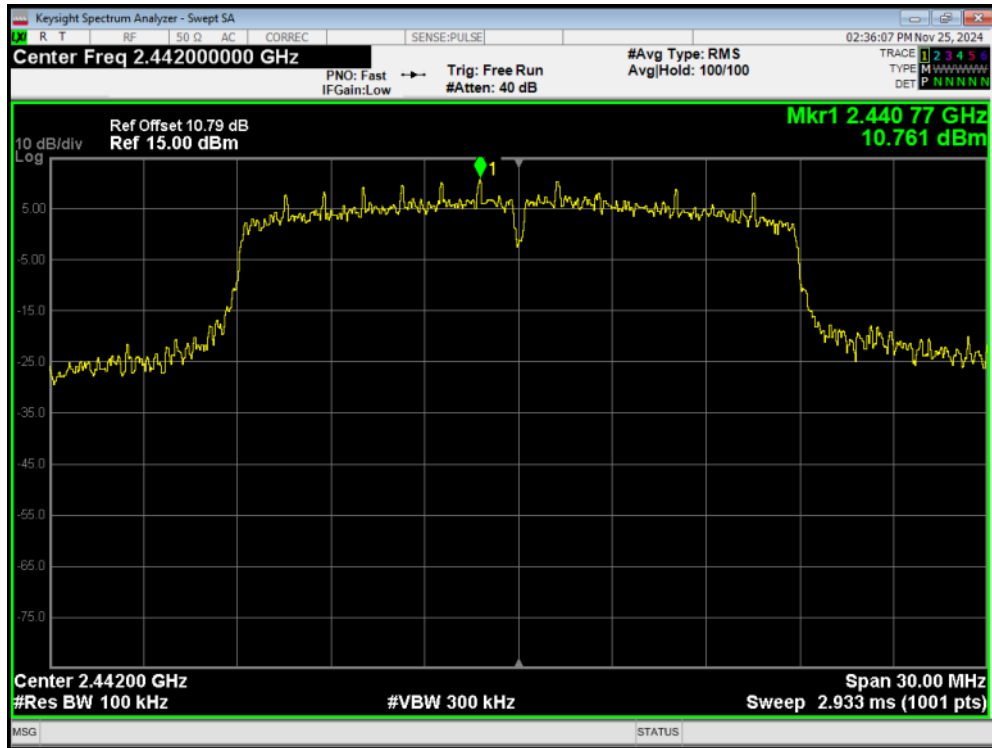


Tx. Spurious 802.11n(HT20) 2442MHzEmission

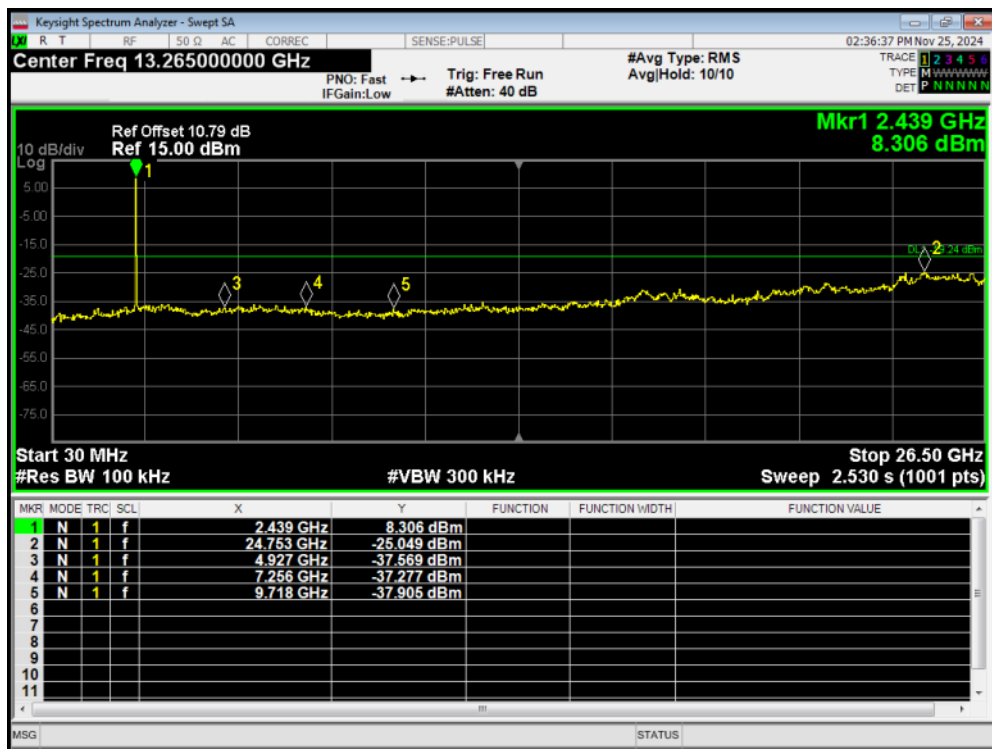


Tx. Spurious 802.11n(HT20) 2447MHzRef




Tx. Spurious 802.11n(HT20) 2447MHzEmission

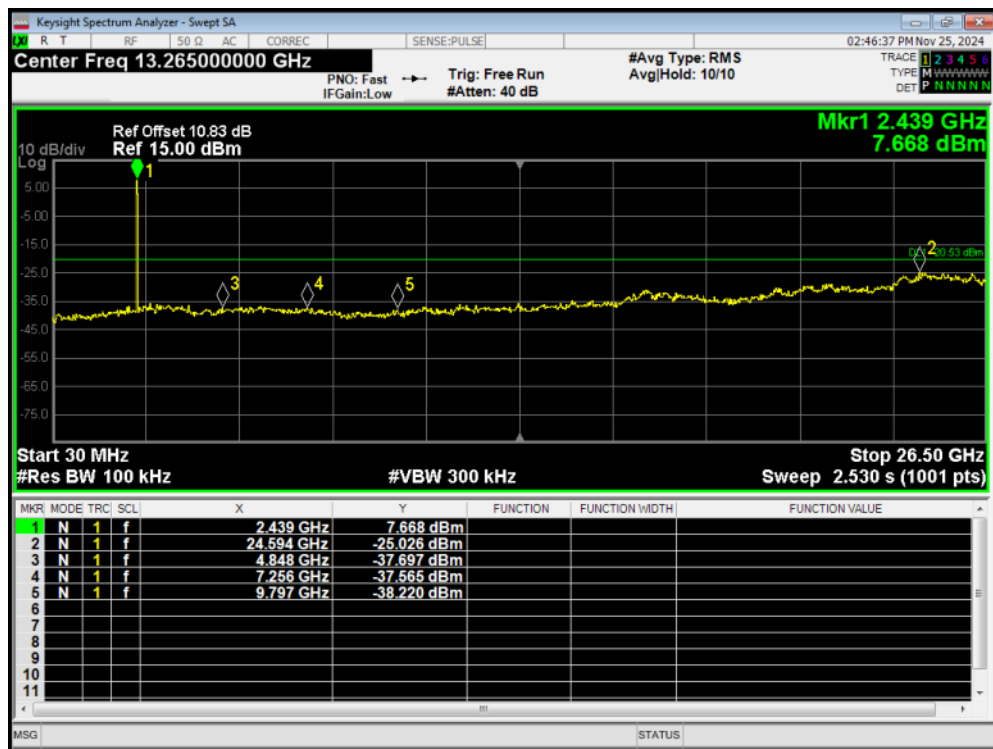


Tx. Spurious 802.11n(HT20) 2452MHzRef

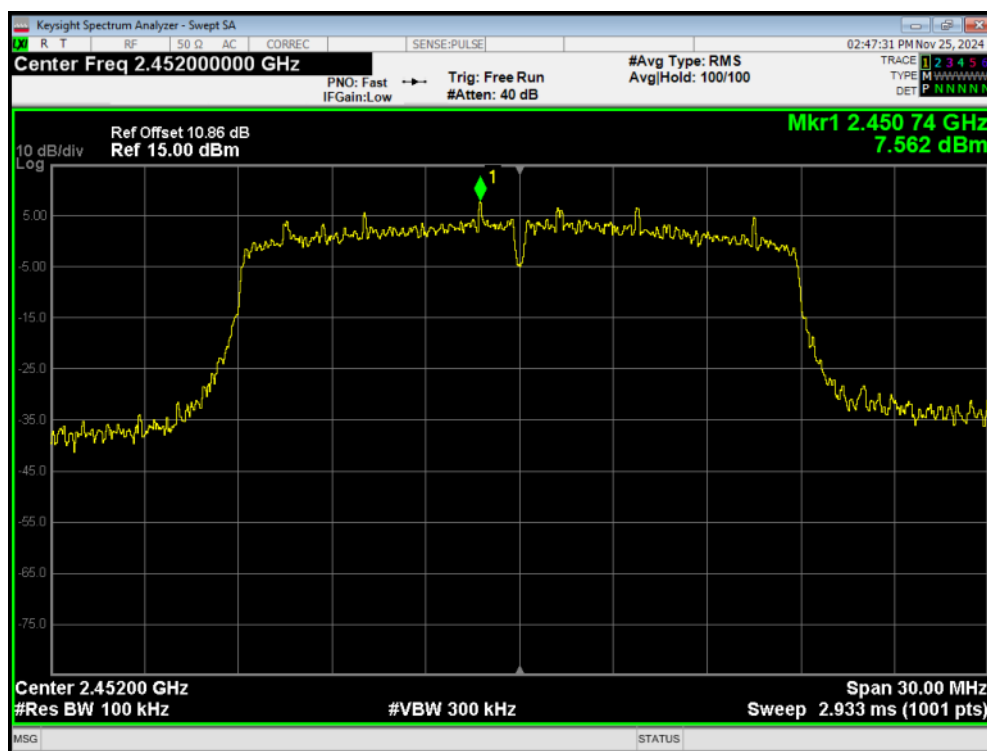


Tx. Spurious 802.11n(HT20) 2452MHzEmission

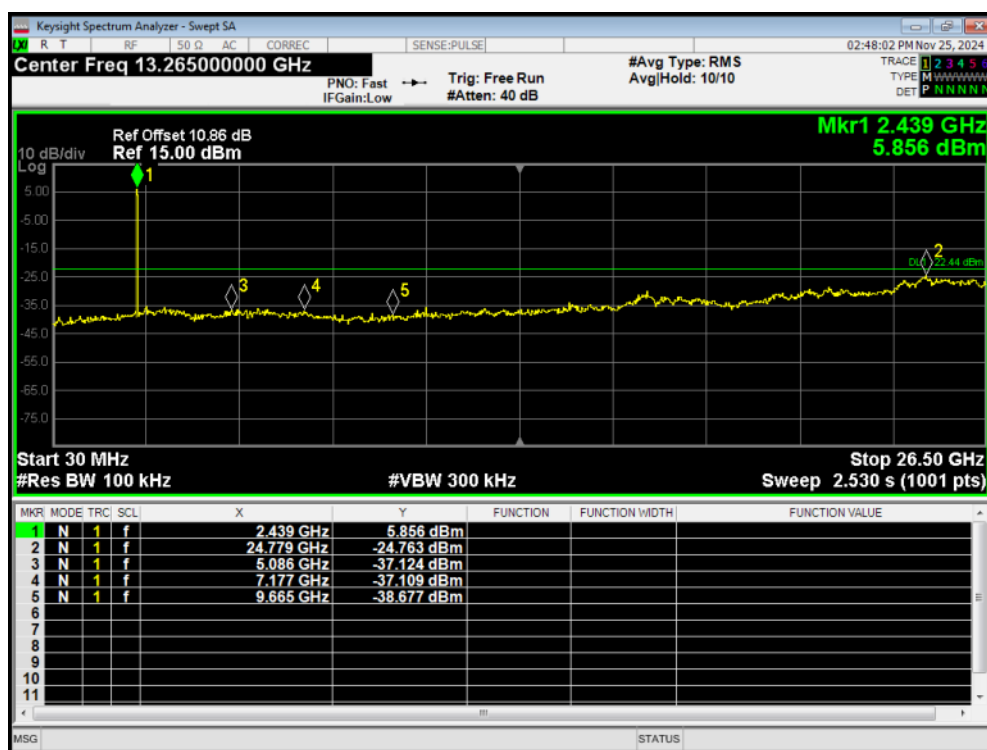


Tx. Spurious 802.11n(HT20) 2457MHzRef

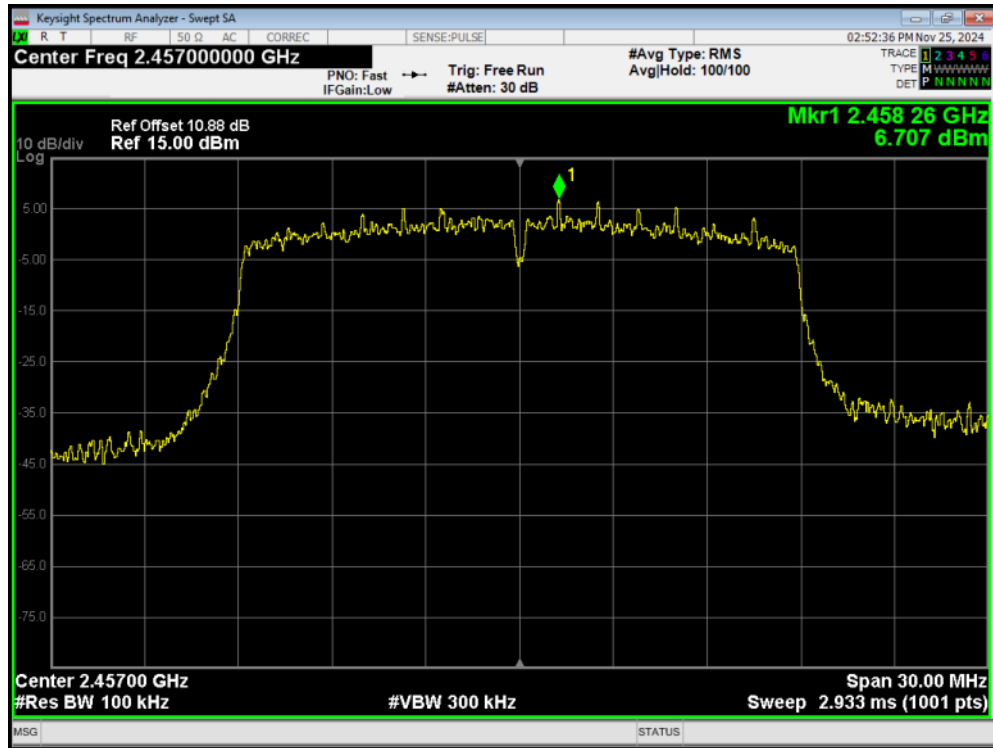


Tx. Spurious 802.11n(HT20) 2457MHzEmission

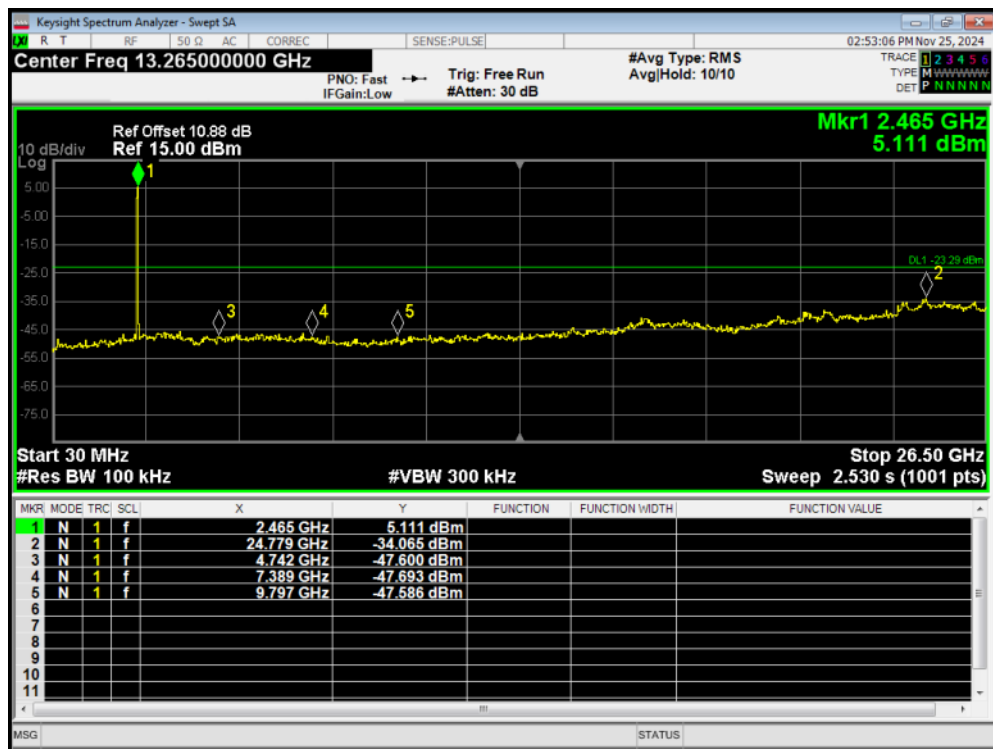


Tx. Spurious 802.11n(HT20) 2462MHzRef

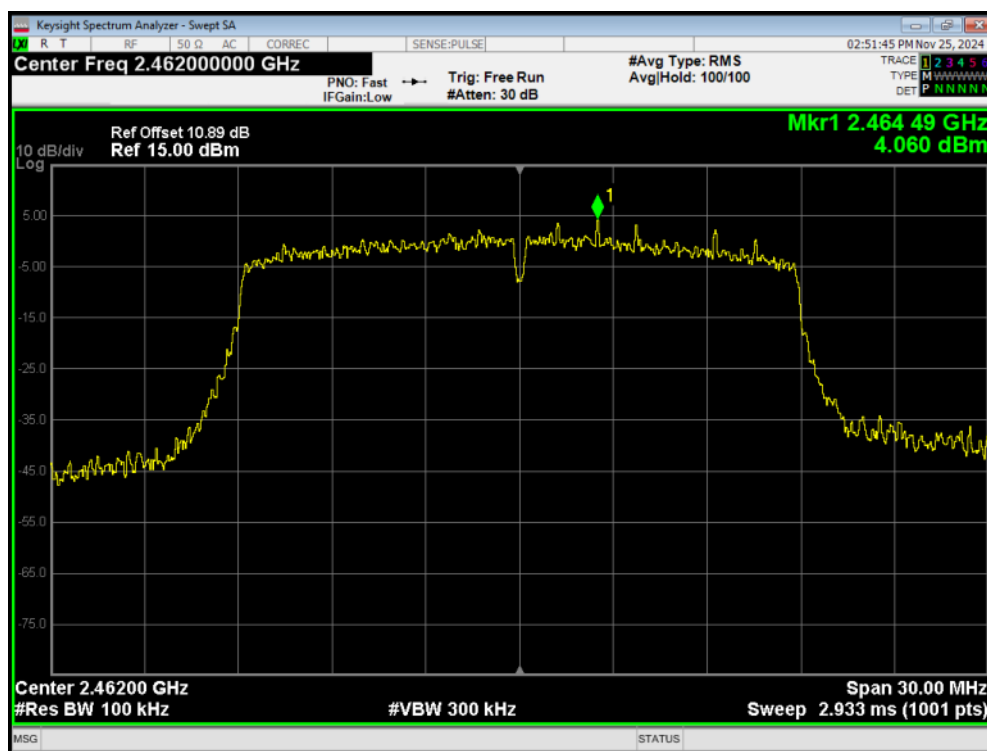


Tx. Spurious 802.11n(HT20) 2462MHzEmission

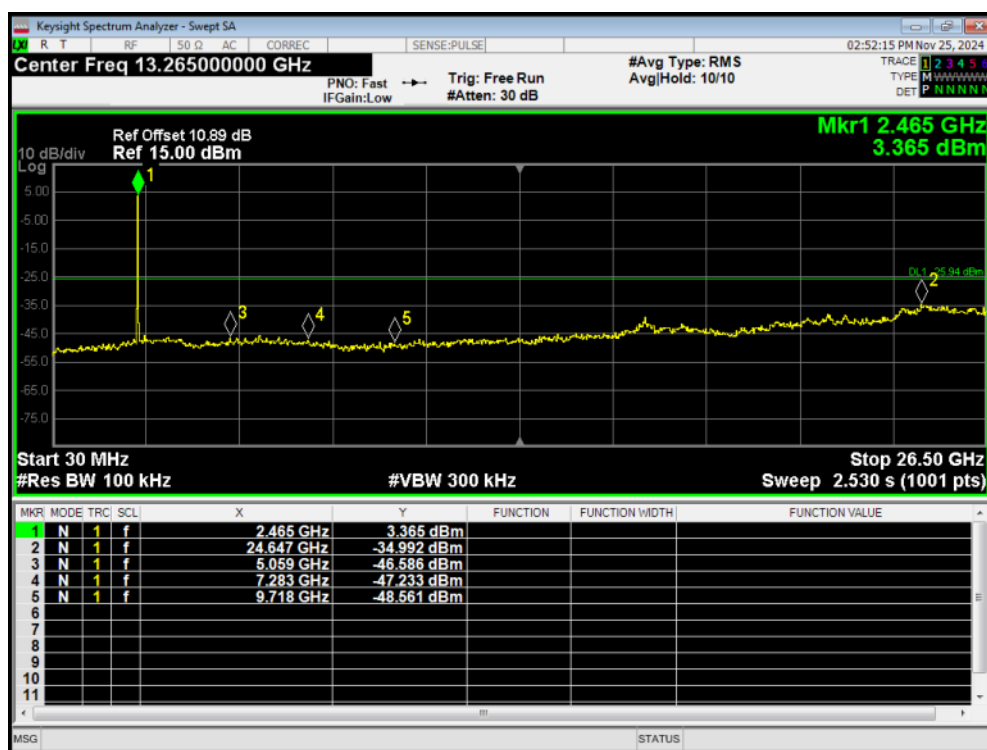


Tx. Spurious 802.11n(HT40) 2422MHzRef

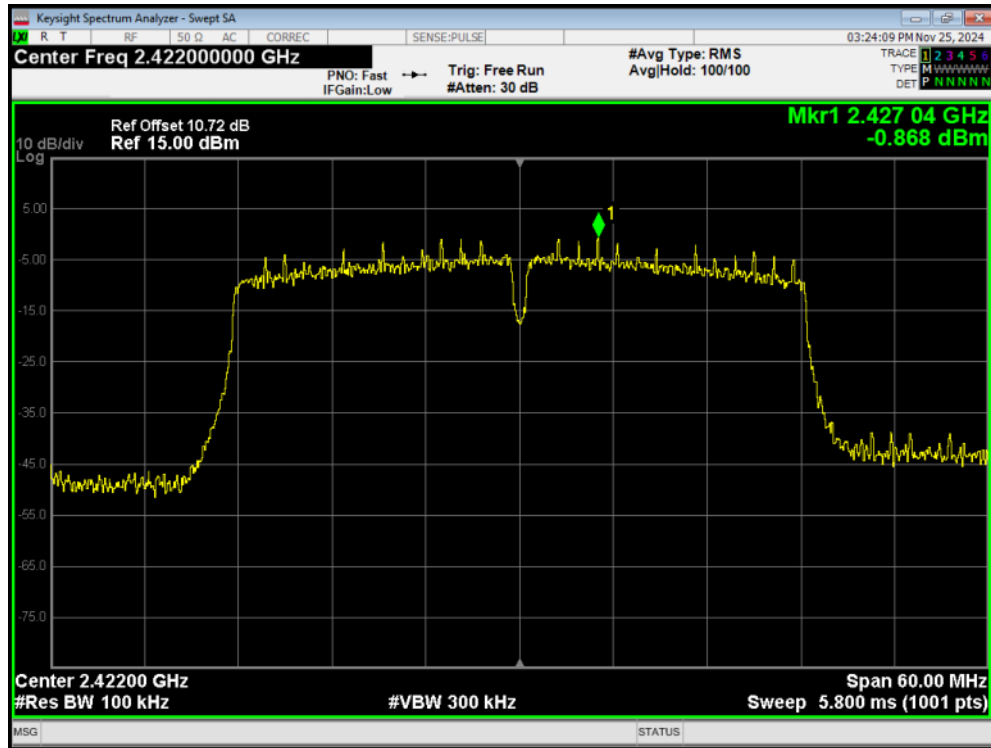


Tx. Spurious 802.11n(HT40) 2422MHzEmission

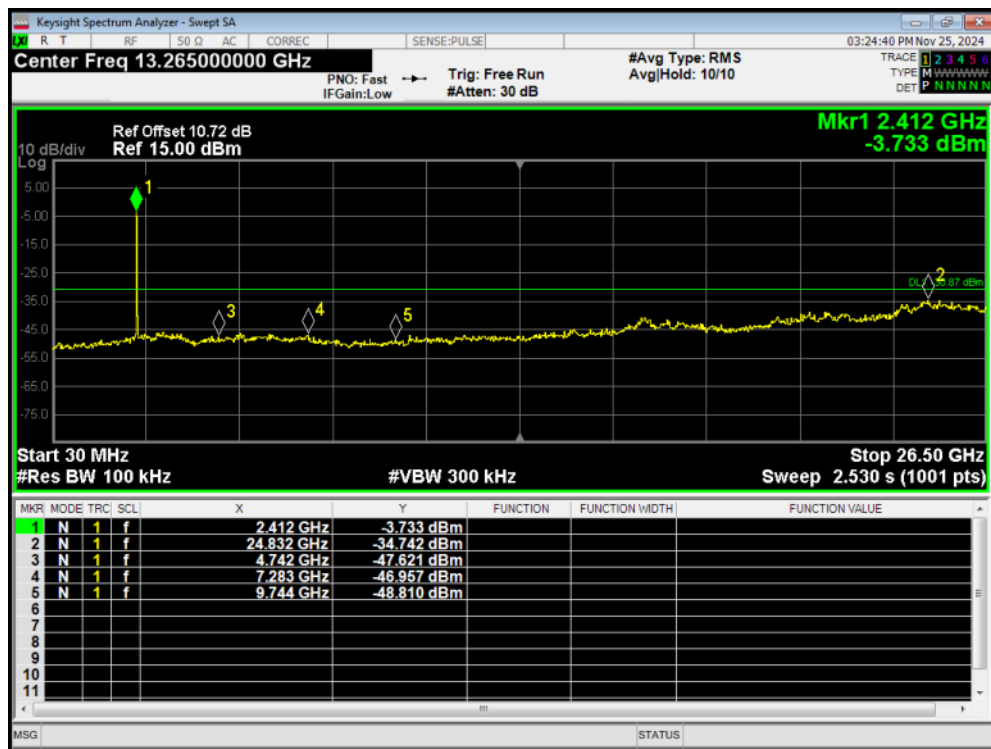


Tx. Spurious 802.11n(HT40) 2427MHzRef

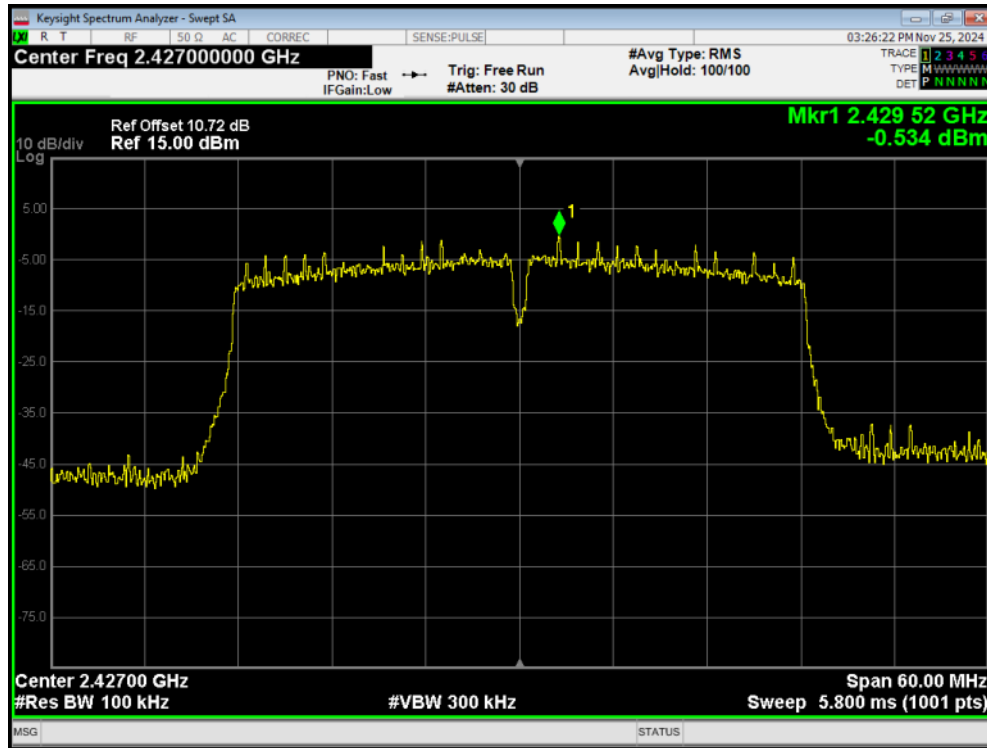


Tx. Spurious 802.11n(HT40) 2427MHzEmission

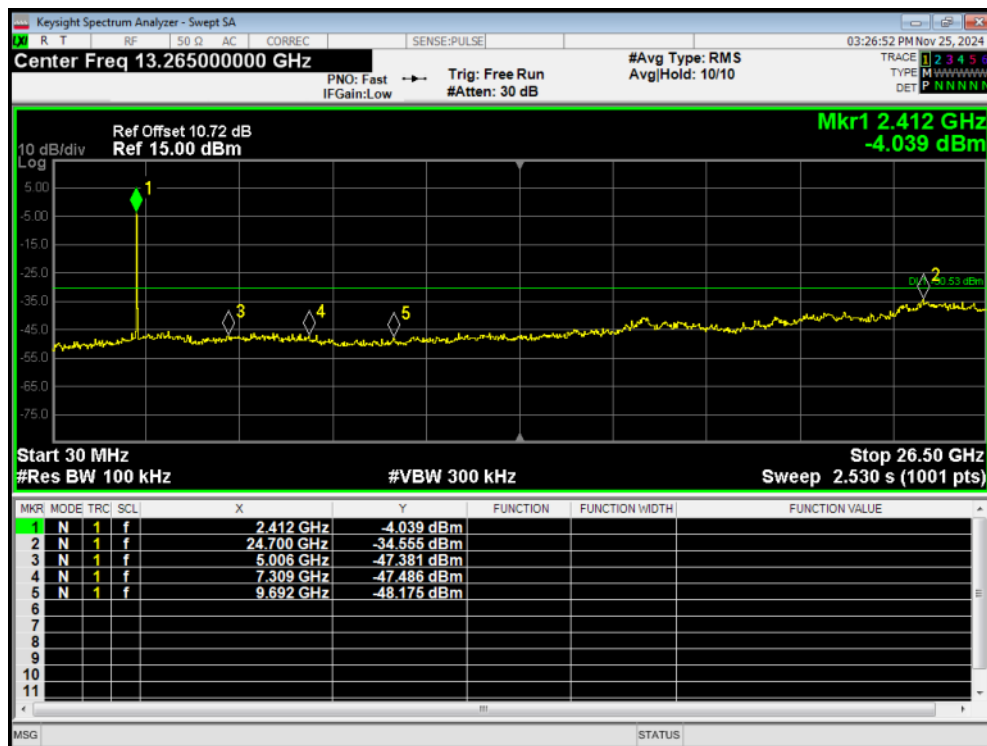


Tx. Spurious 802.11n(HT40) 2432MHzRef

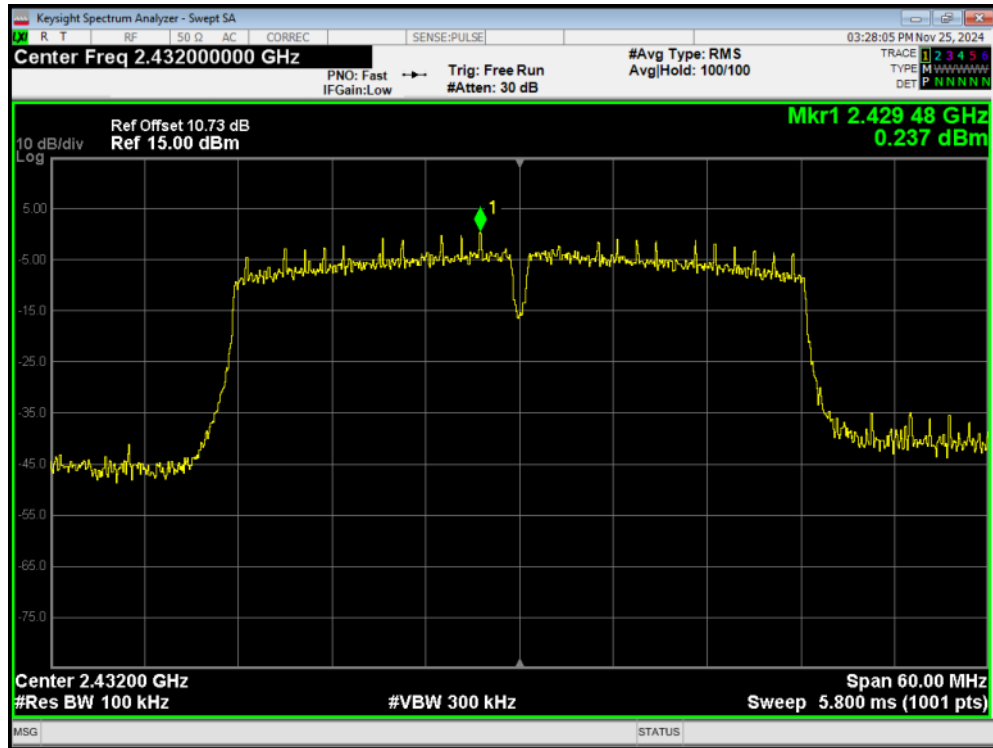


Tx. Spurious 802.11n(HT40) 2432MHzEmission

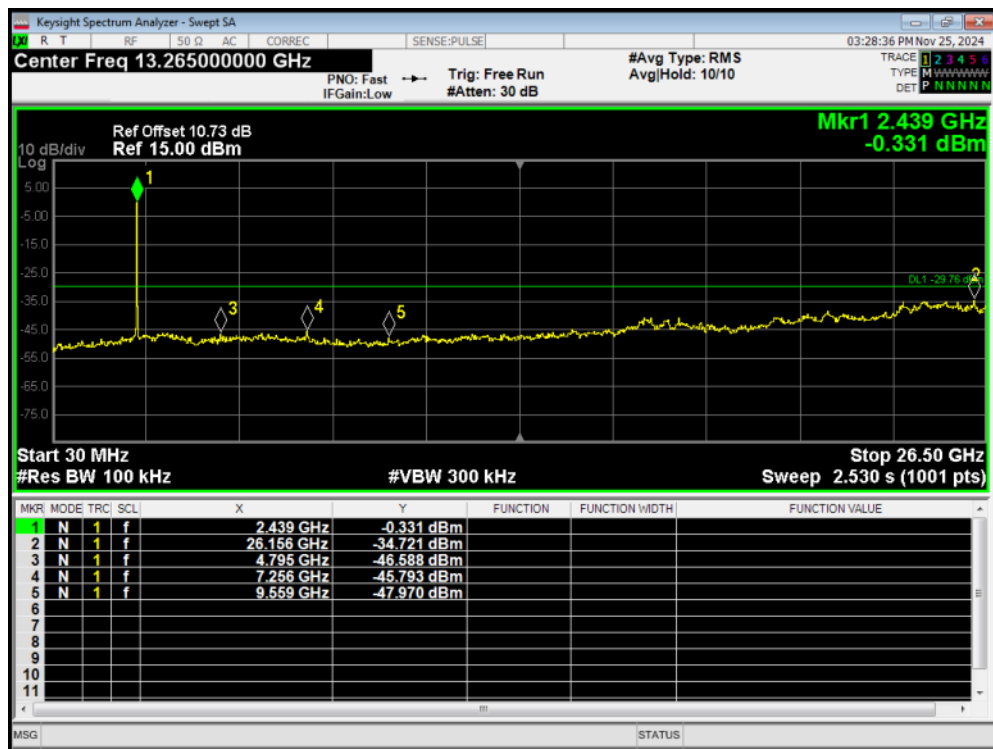


Tx. Spurious 802.11n(HT40) 2437MHzRef

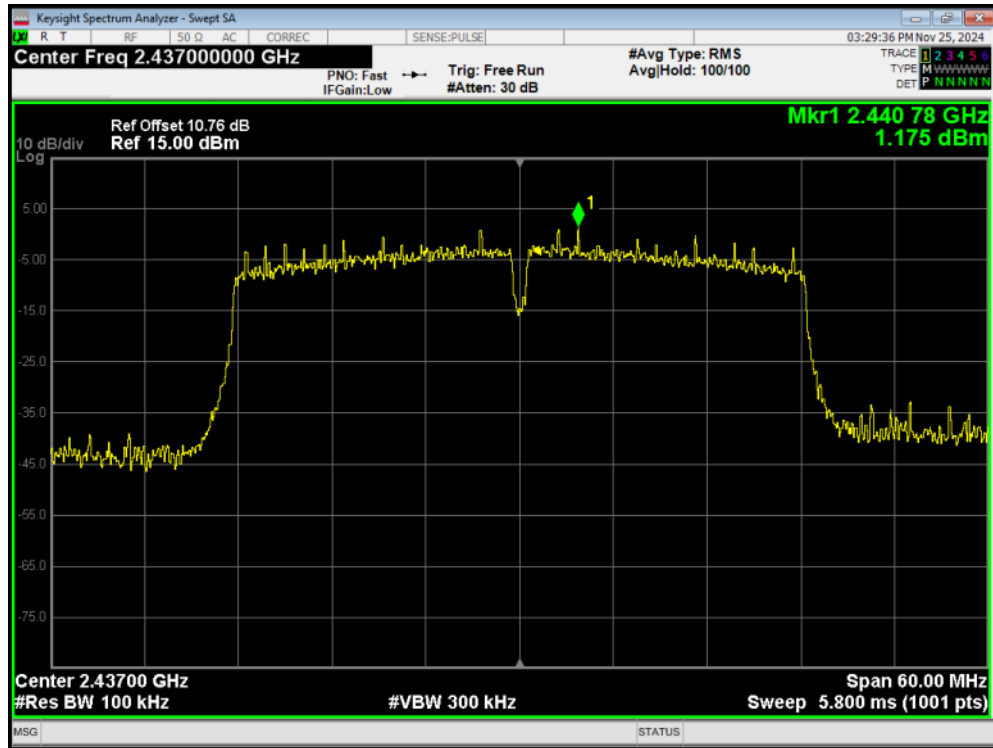


Tx. Spurious 802.11n(HT40) 2437MHzEmission

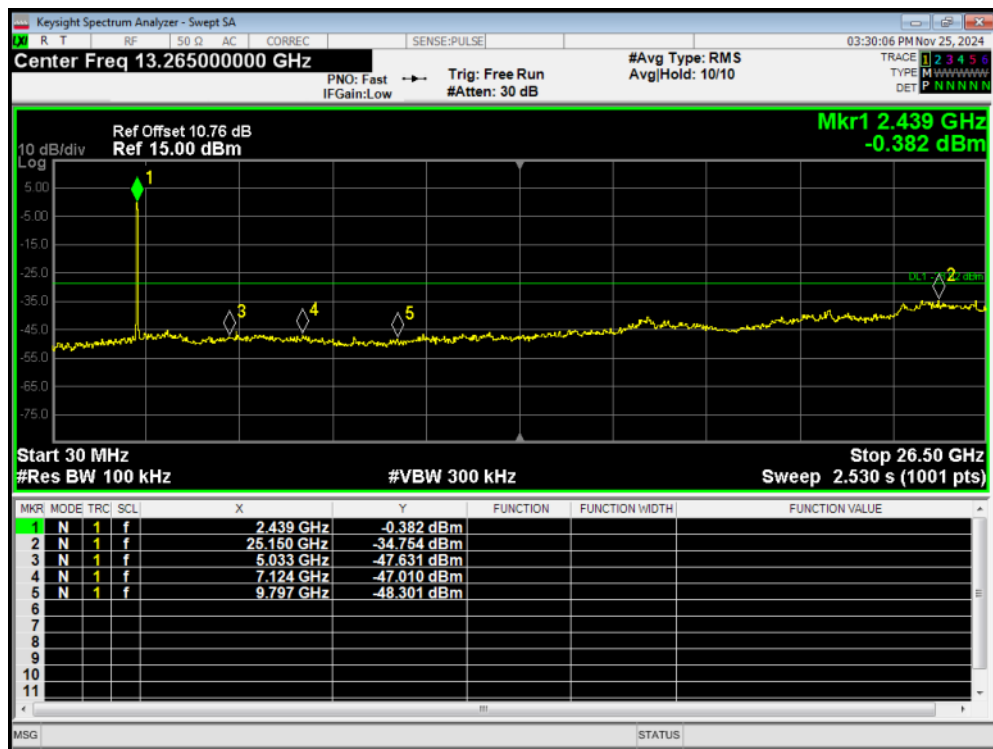


Tx. Spurious 802.11n(HT40) 2442MHzRef

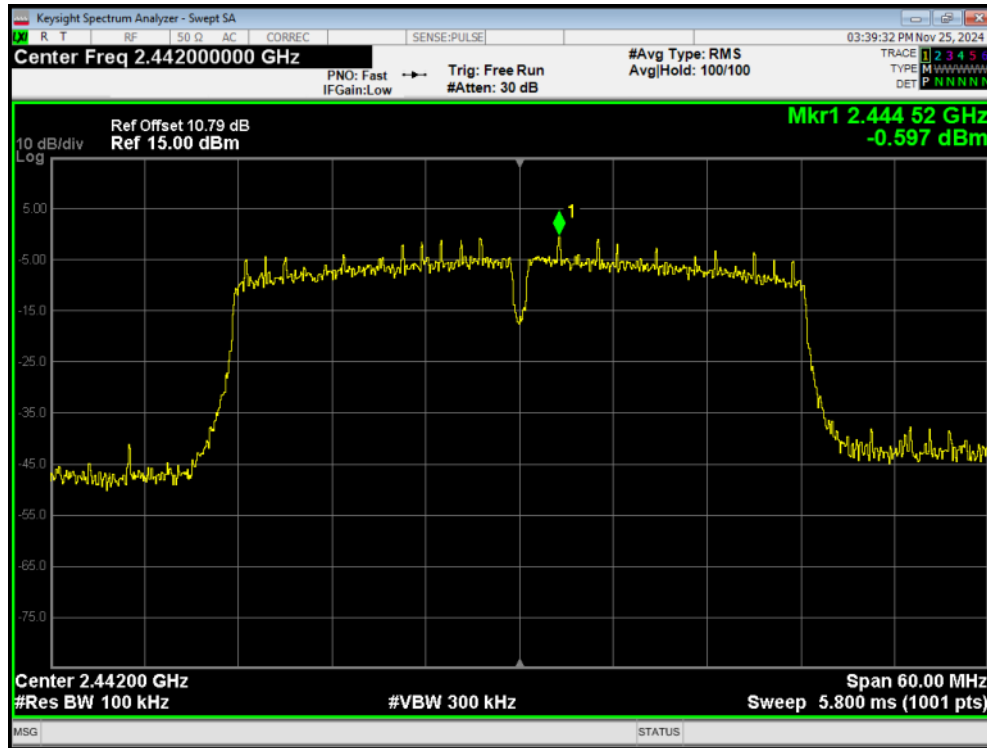


Tx. Spurious 802.11n(HT40) 2442MHzEmission

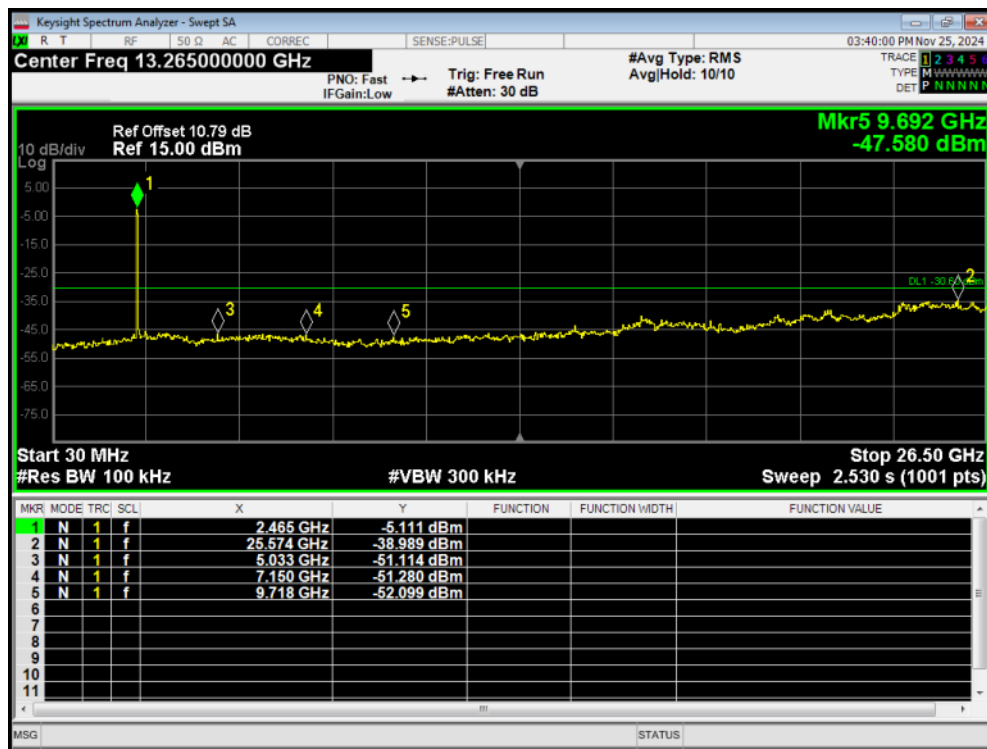


Tx. Spurious 802.11n(HT40) 2447MHzRef

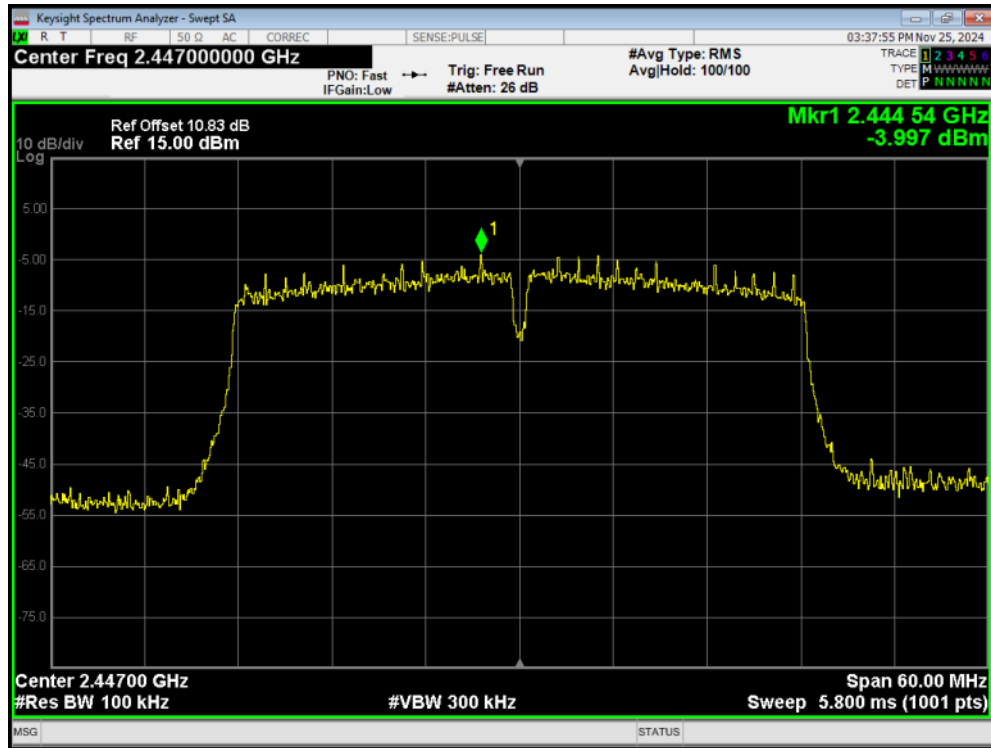


Tx. Spurious 802.11n(HT40) 2447MHzEmission

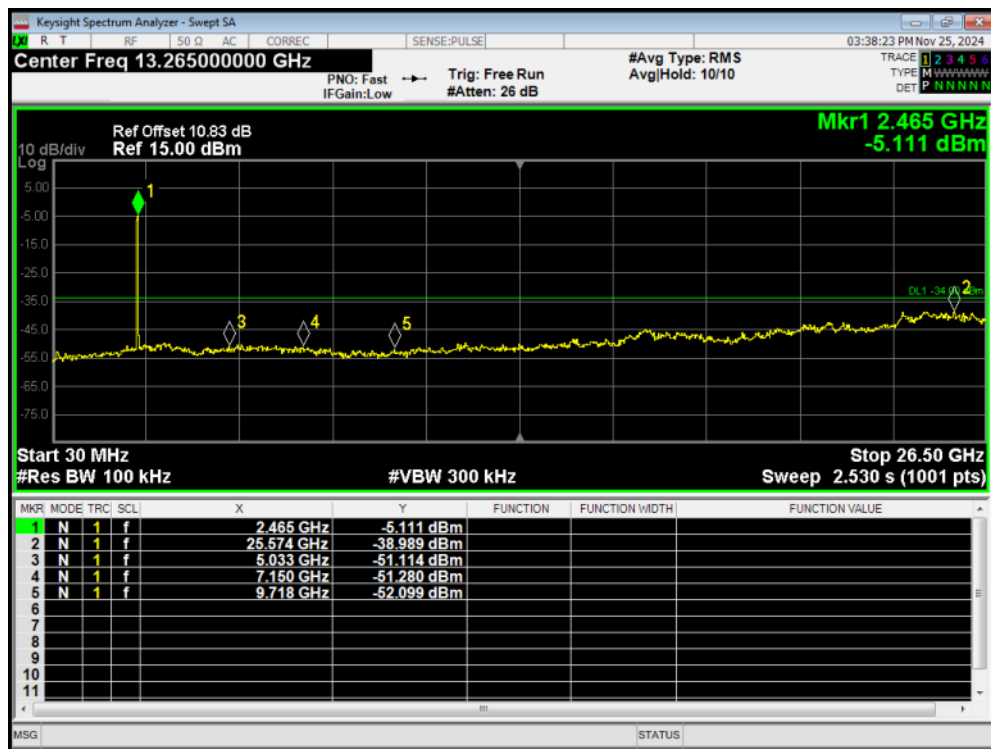

Tx. Spurious 802.11n(HT40) 2452MHzRef

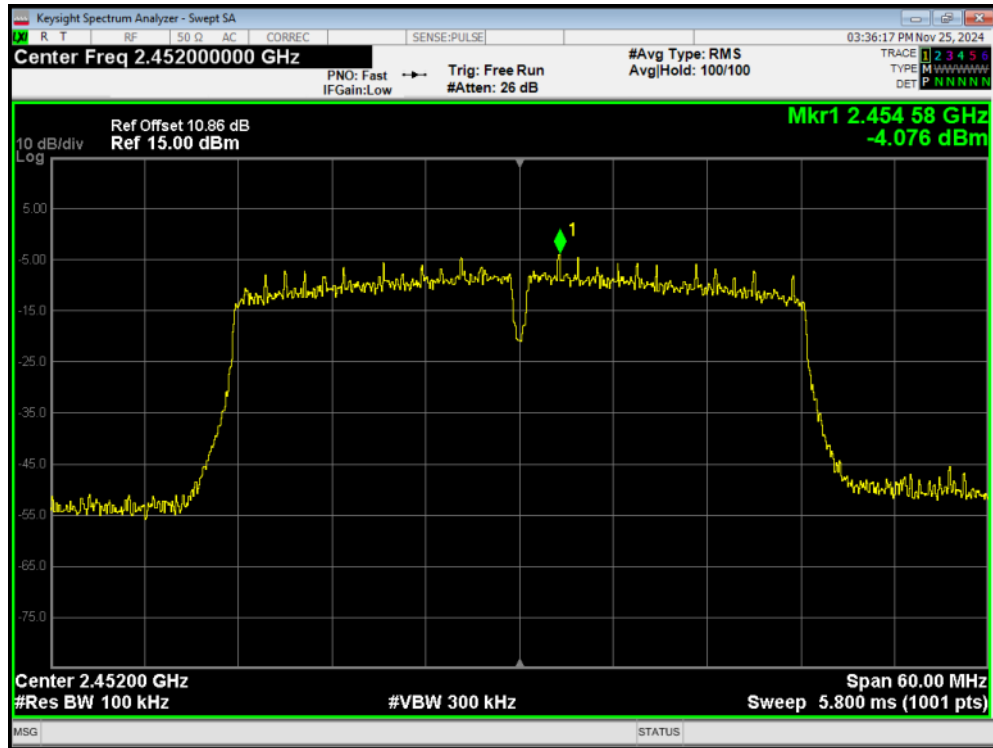

Tx. Spurious 802.11n(HT40) 2452MHzEmission

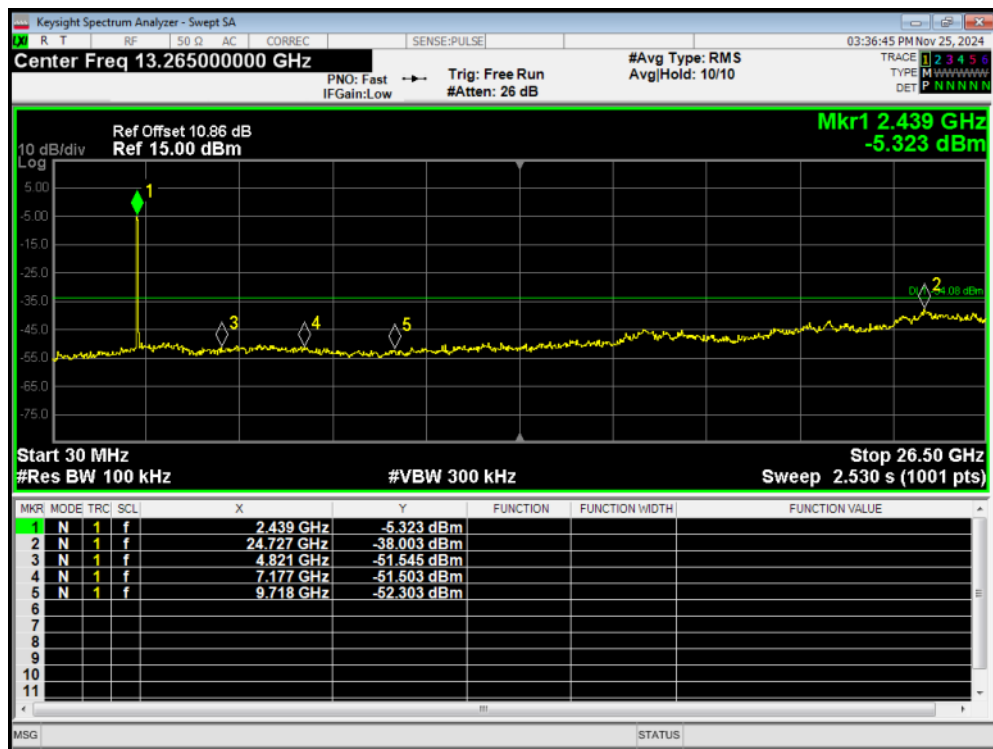

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test Setup


9kHz~ 30MHz

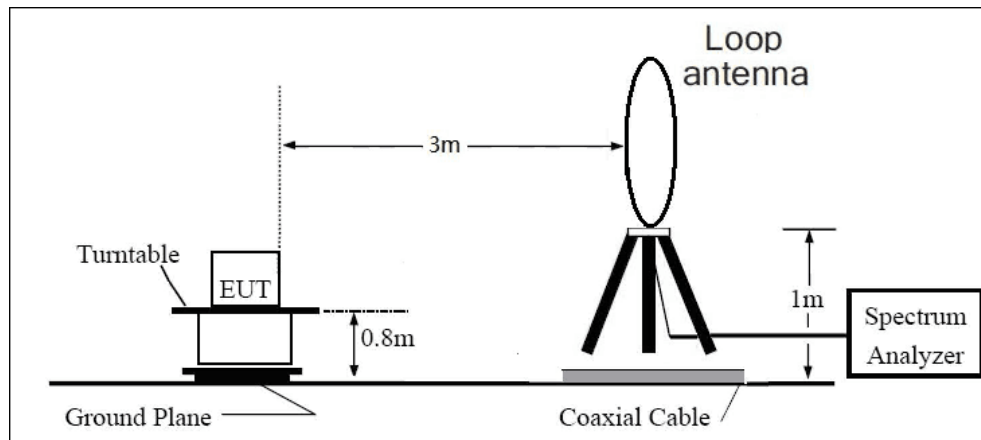

30MHz~ 1GHz

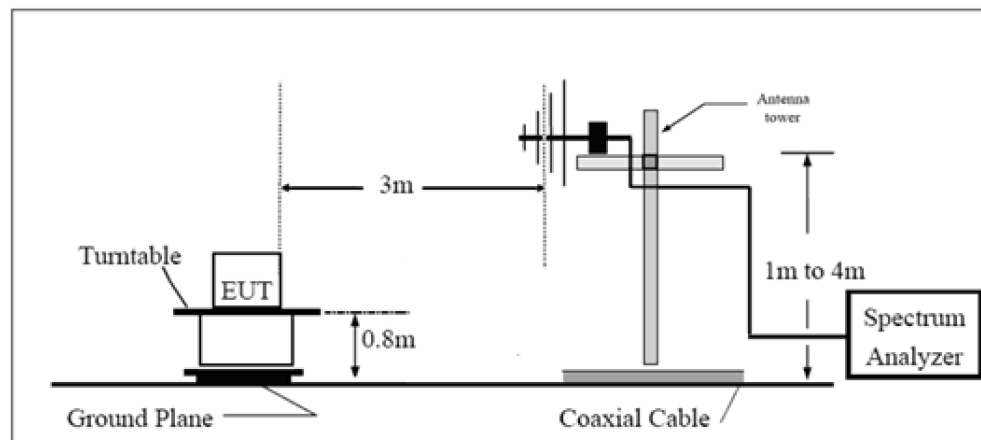

Above 1GHz

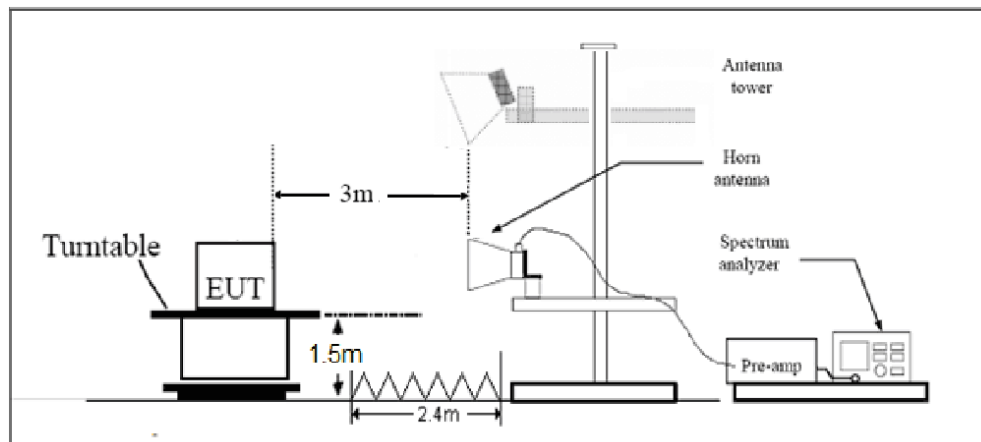

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dB μ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB μ V/m

Average Limit=54 dB μ V/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB


Test Results:

The following graphs display the maximum values of horizontal and vertical by software.
Blue trace uses the peak detection, Green trace uses the average detection.


A symbol ($\text{dB}\mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)

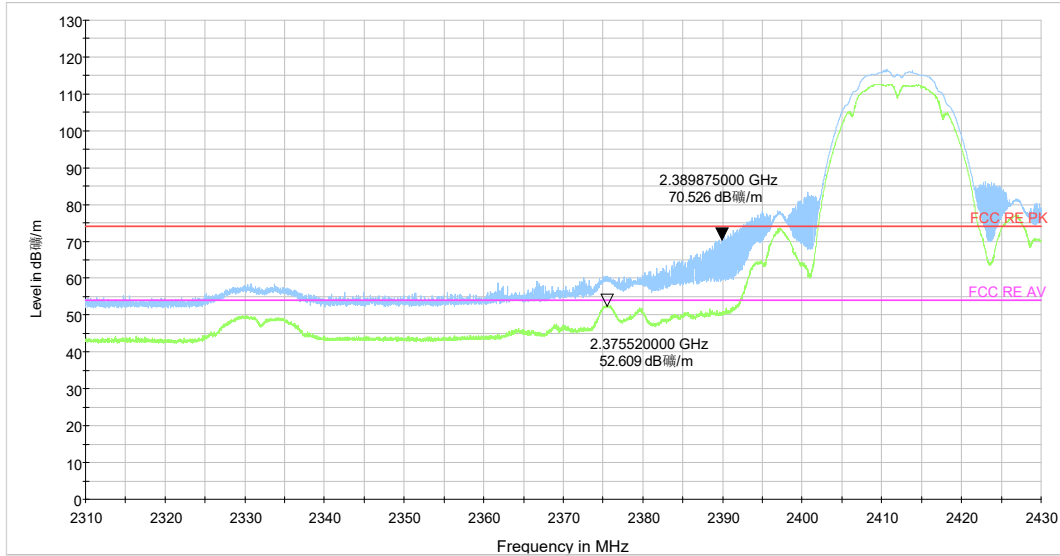


802.11b CH1

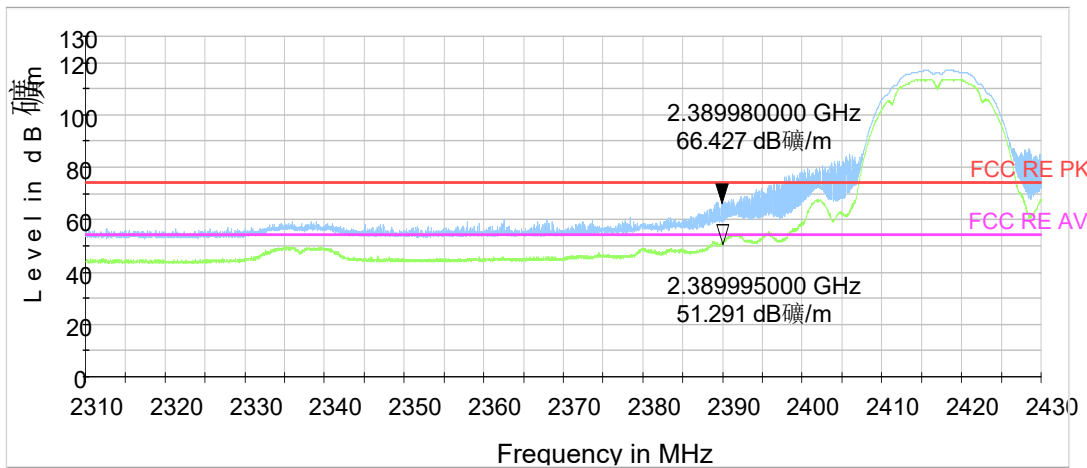


802.11b CH2

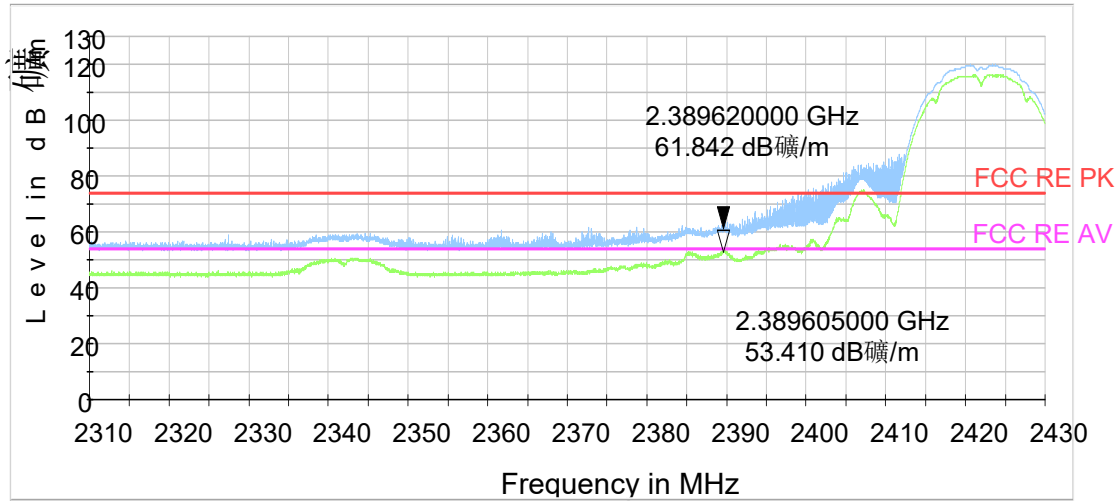


802.11b CH3

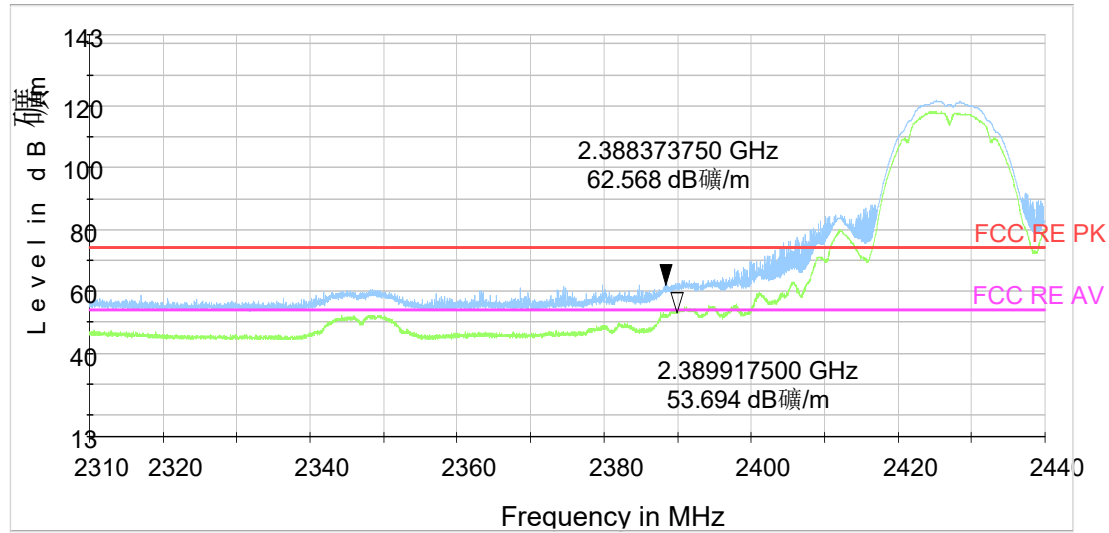


802.11b CH4

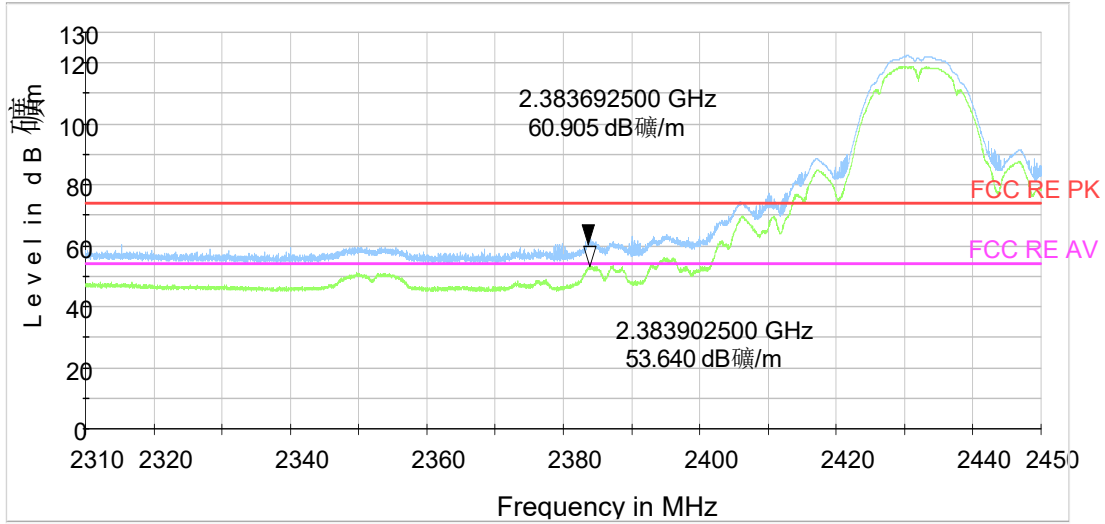


802.11b CH5

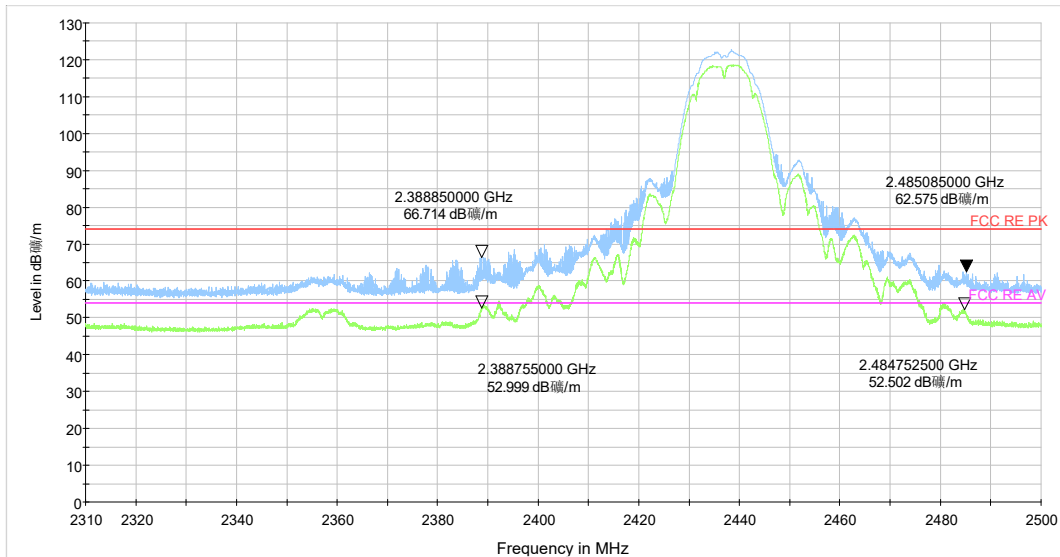


802.11b CH6

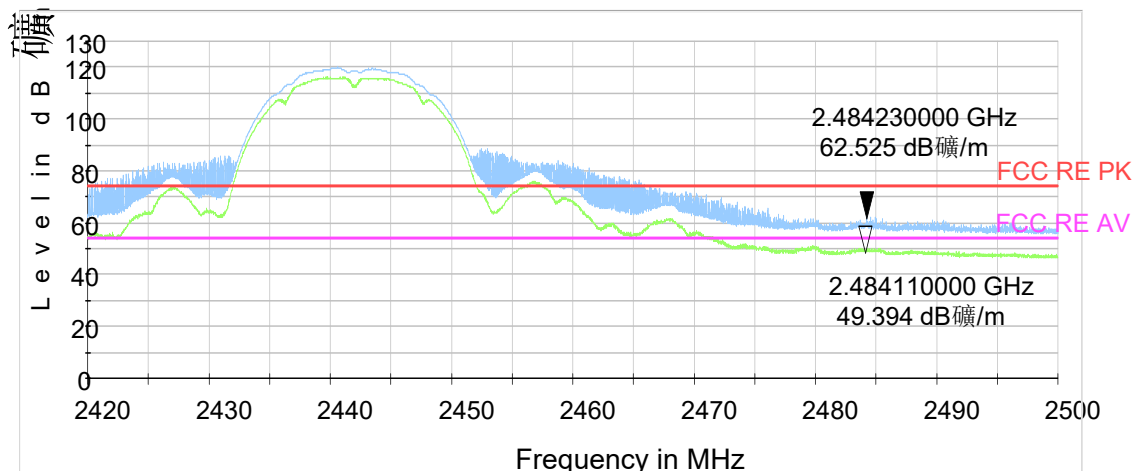


802.11b CH7

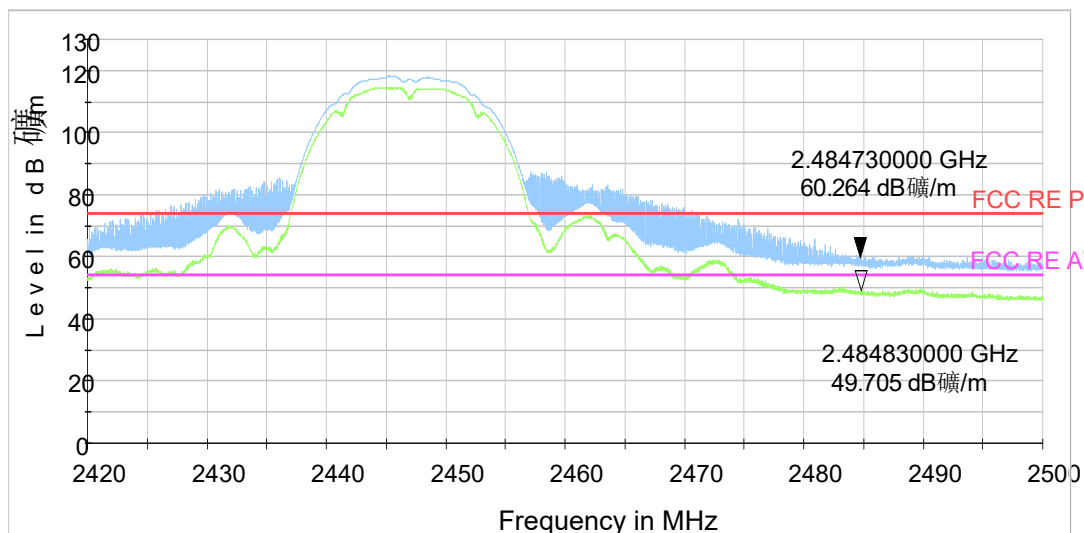


802.11b CH8

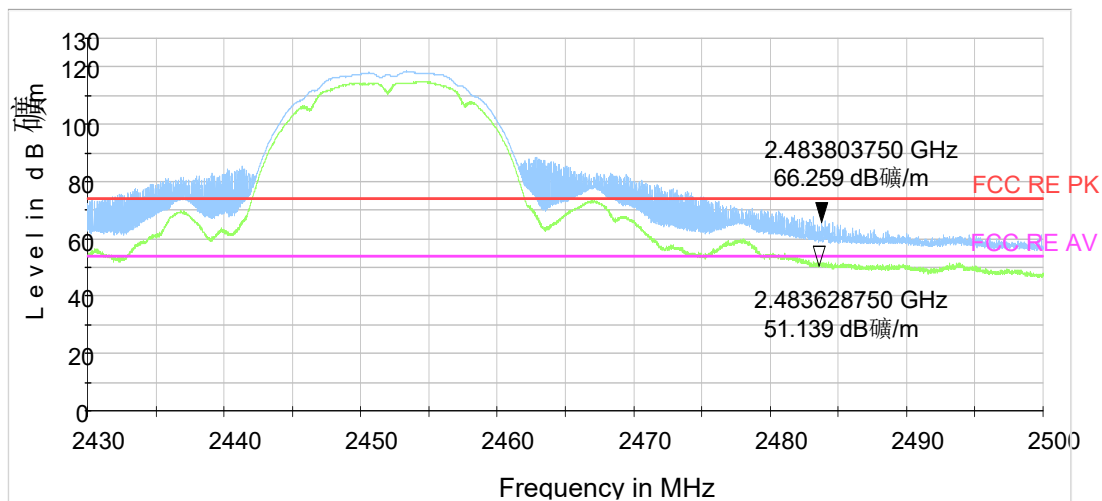


802.11b CH9

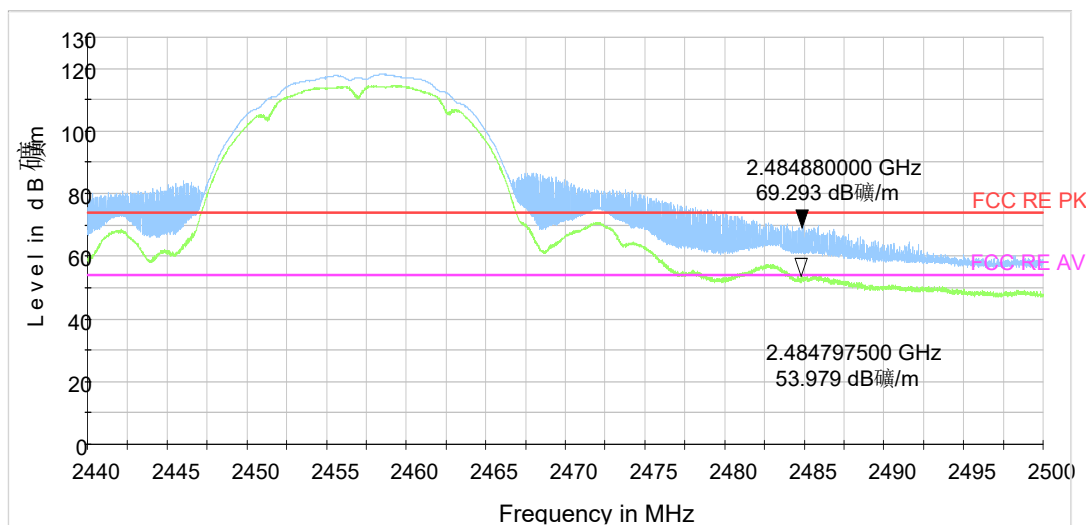


802.11b CH10

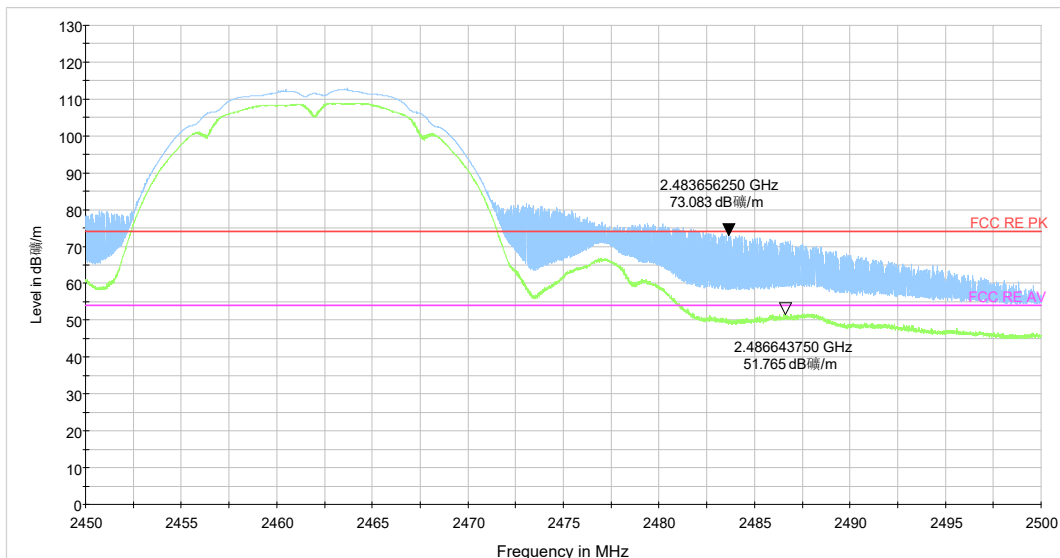


802.11b CH11

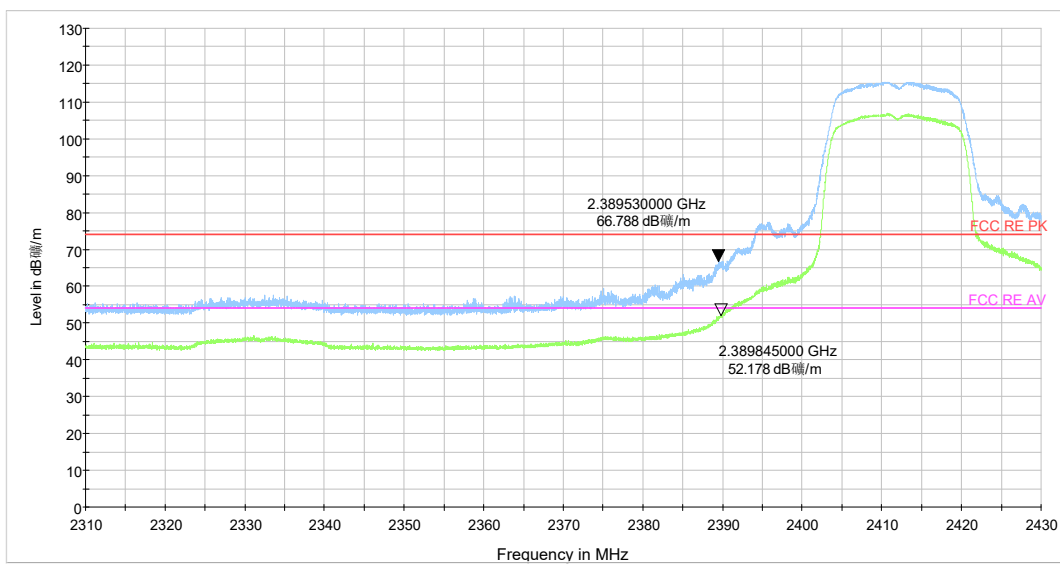


802.11g CH1

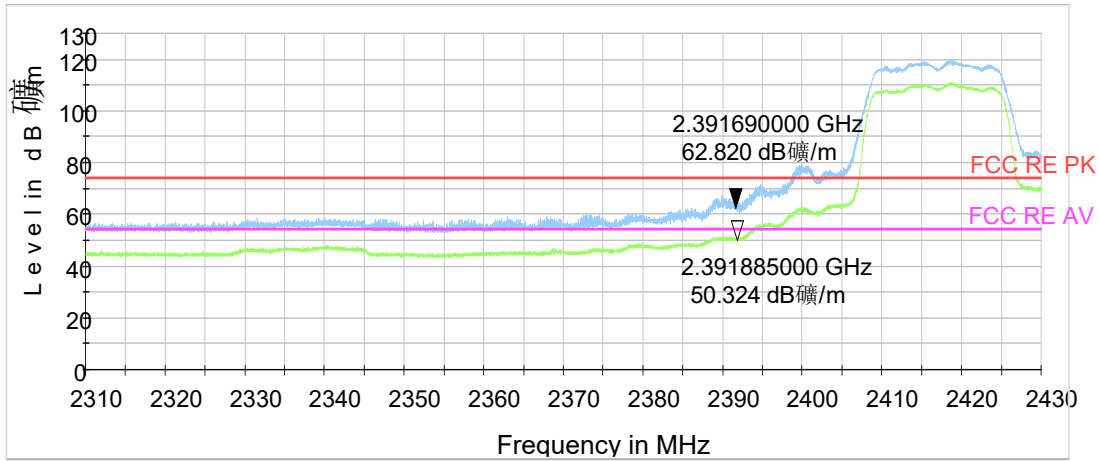


802.11g CH2

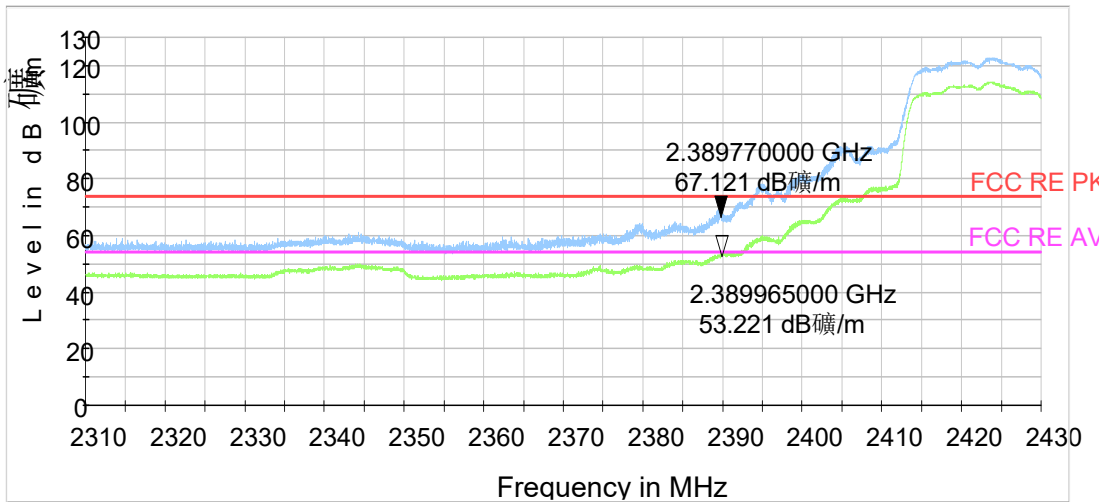


802.11g CH3

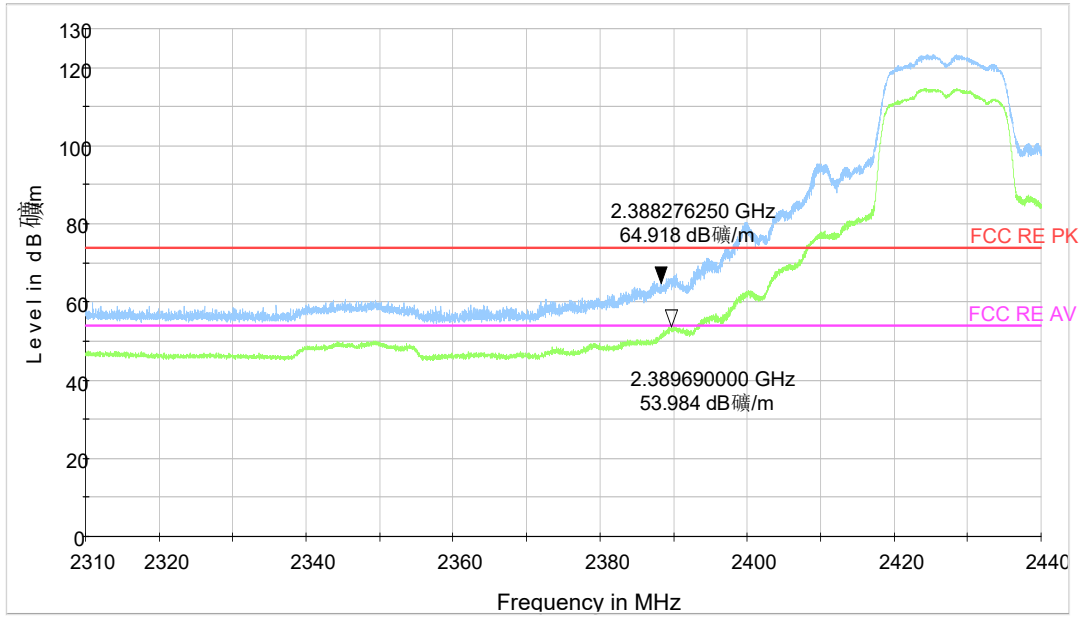


802.11g CH4

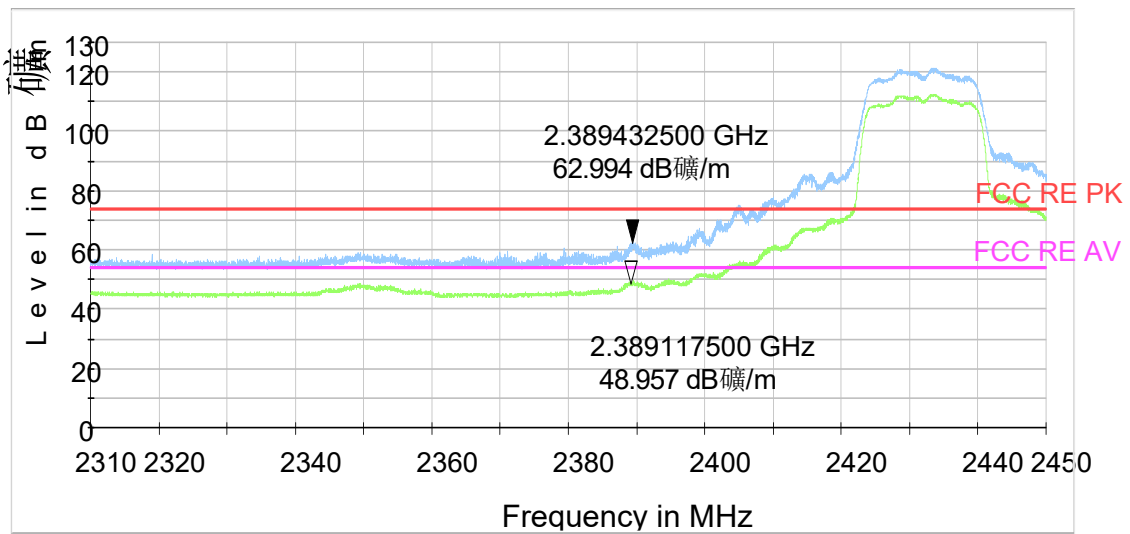


802.11g CH5

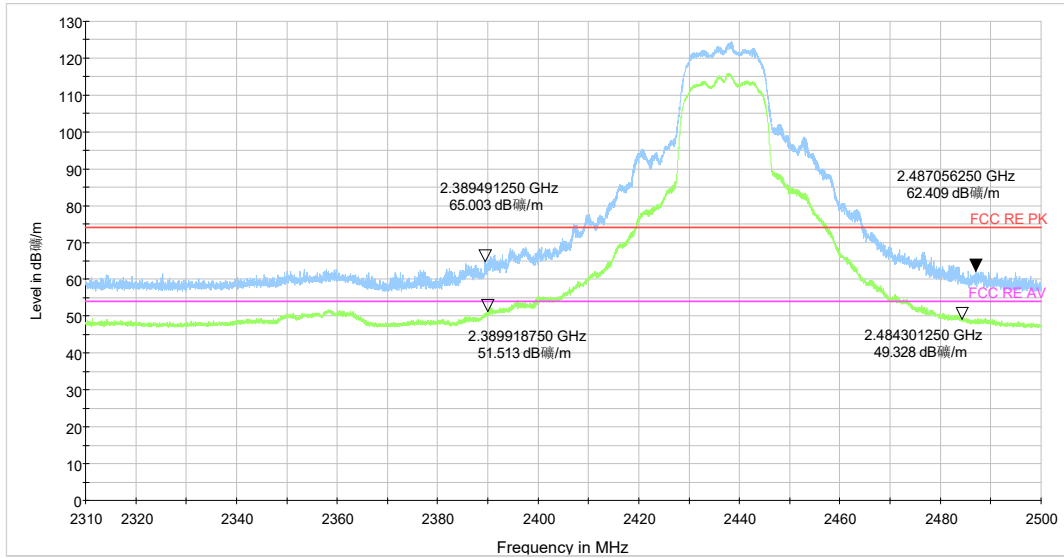


802.11g CH6

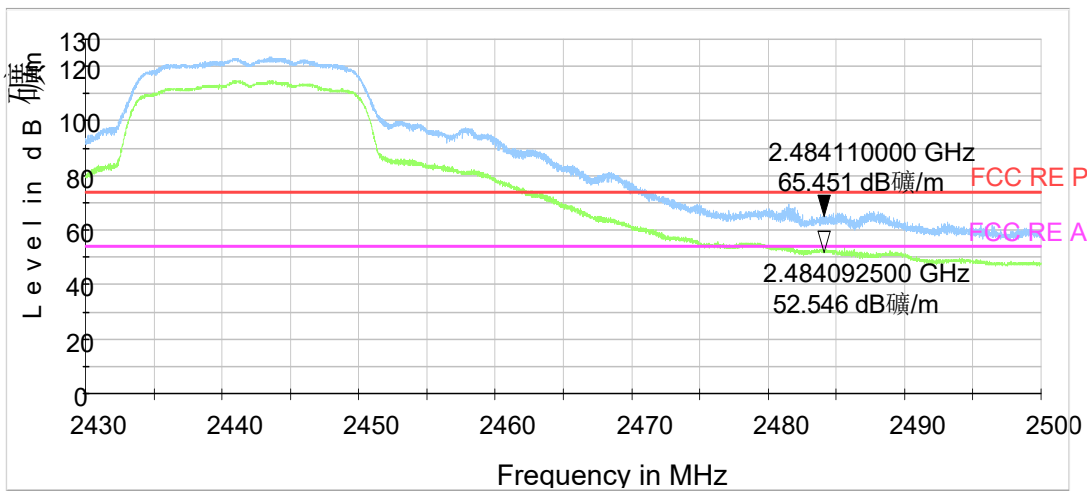


802.11g CH7

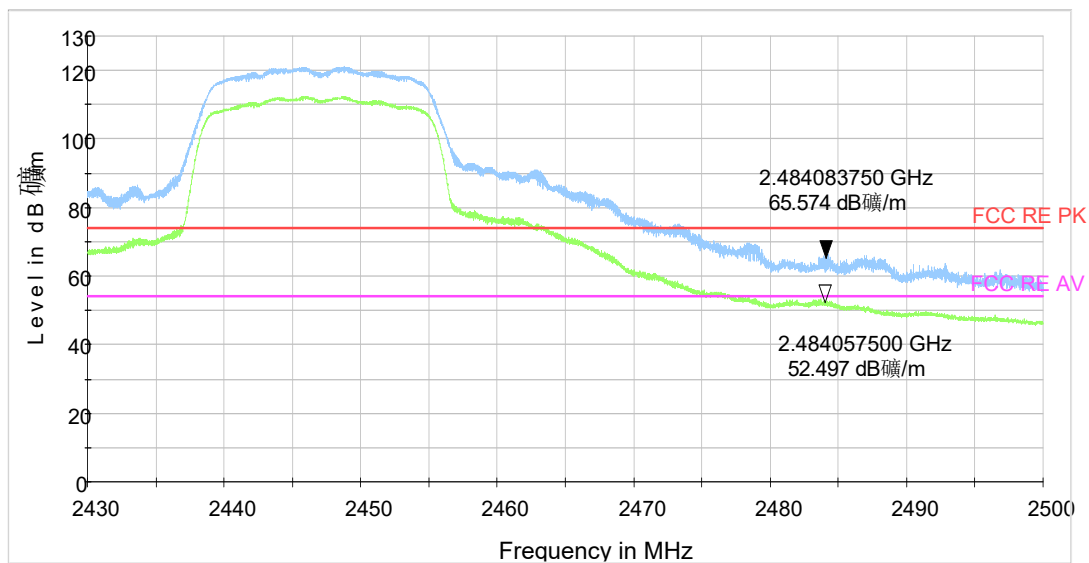


802.11g CH8

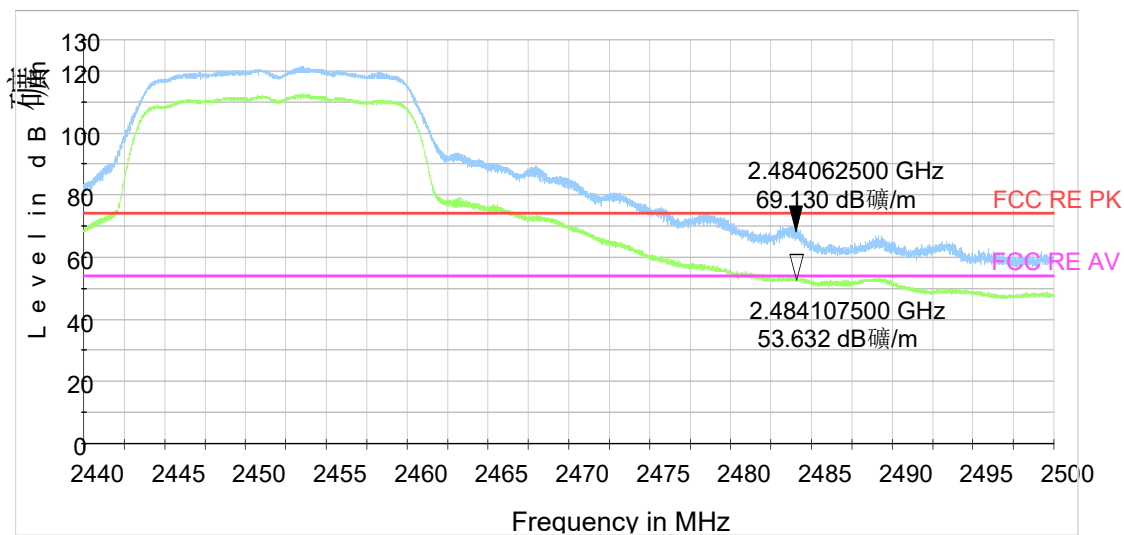


802.11g CH9

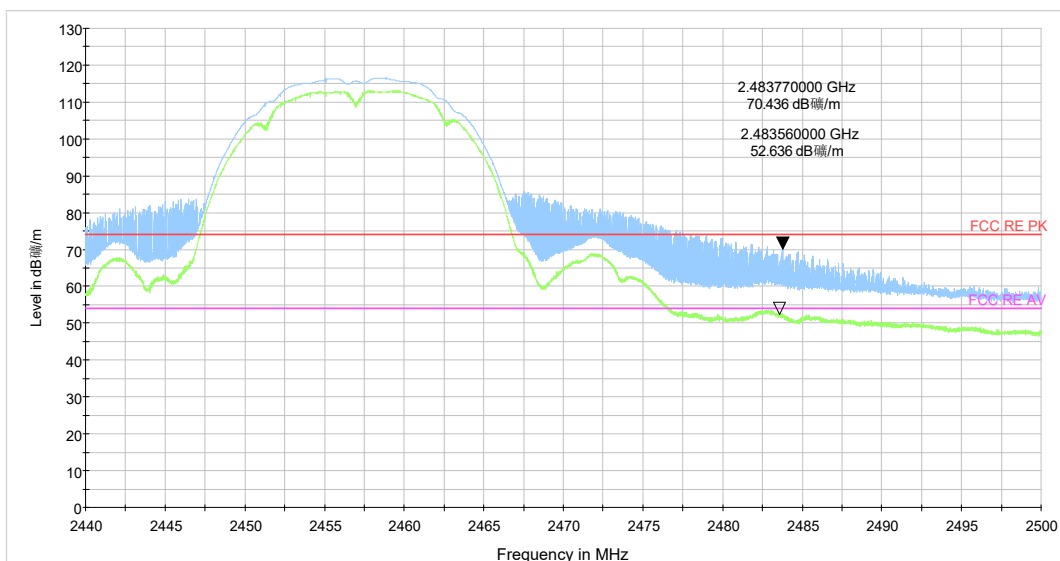


802.11g CH10

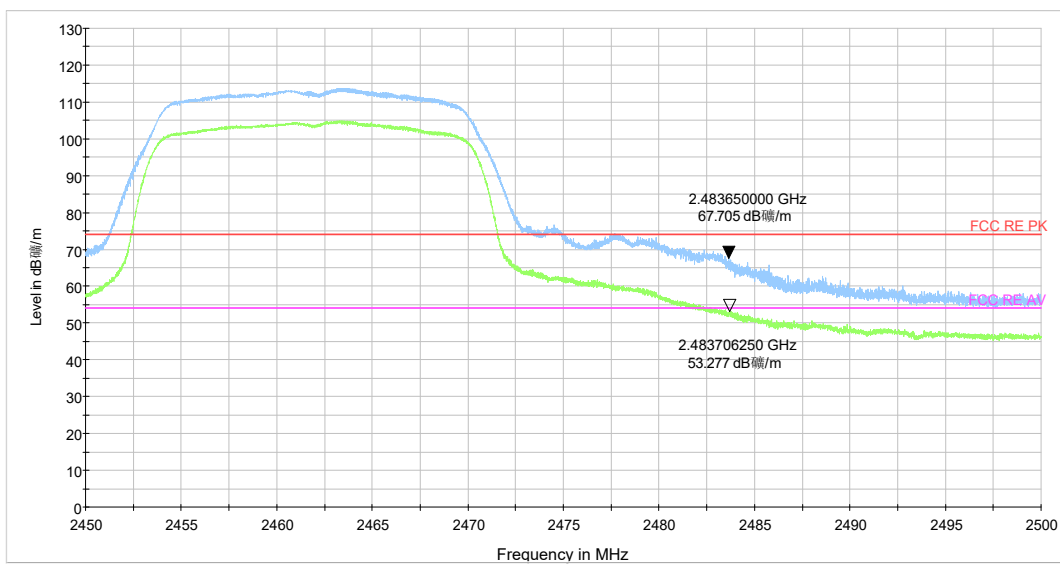


802.11g CH11

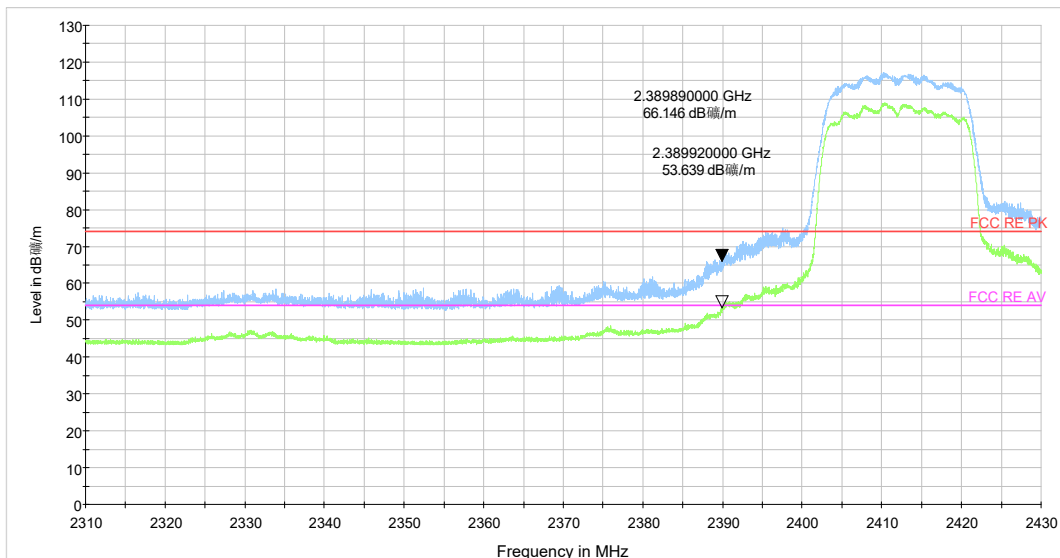


802.11n (HT20) CH1

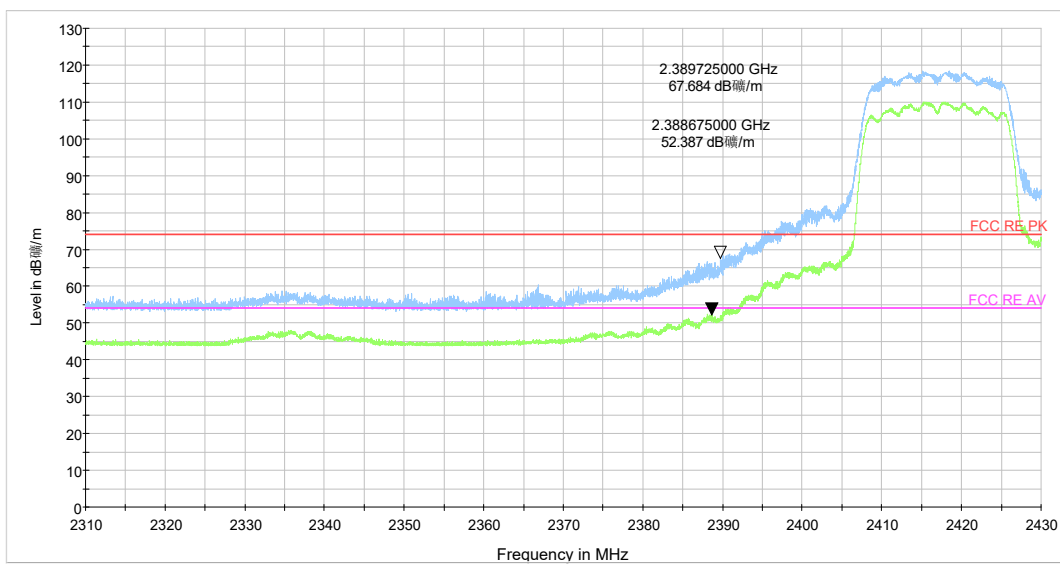


802.11n (HT20) CH2

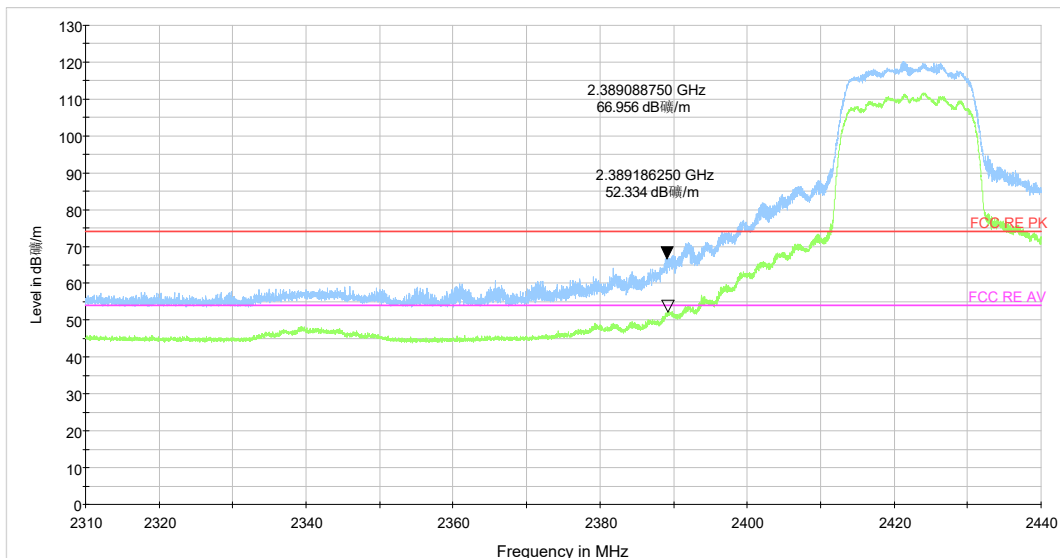


802.11n (HT20) CH3

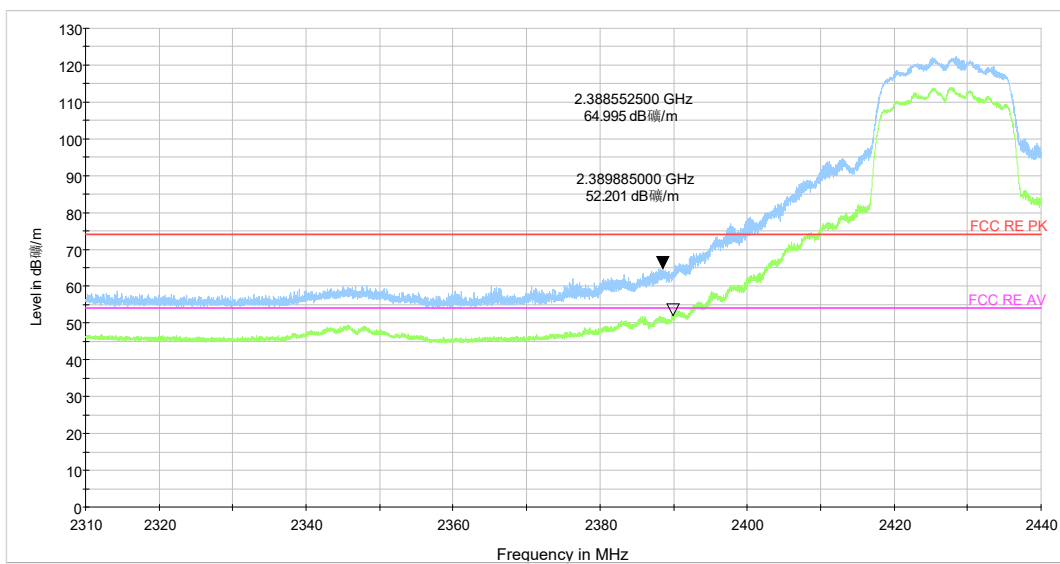


802.11n (HT20) CH4

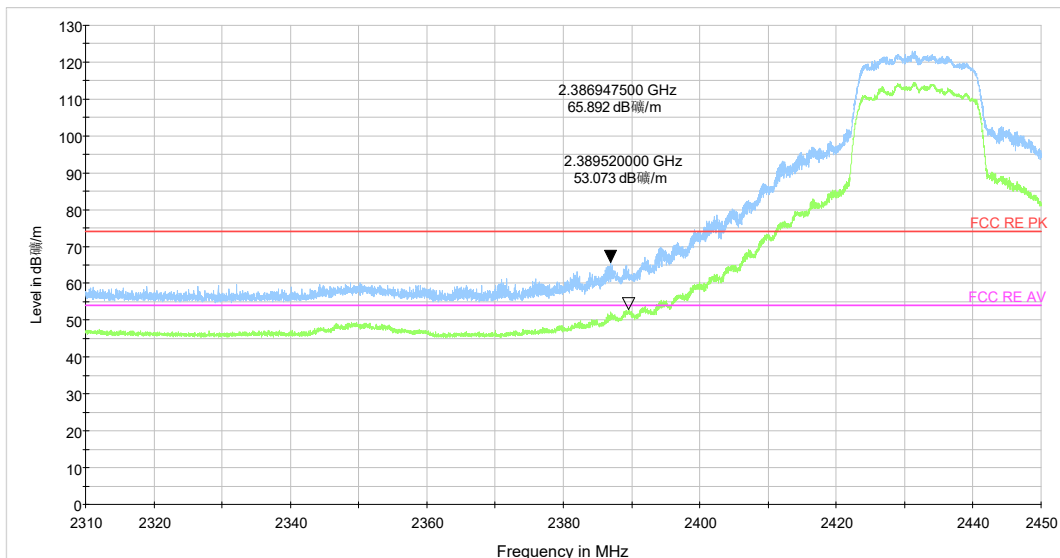


802.11n (HT20) CH5

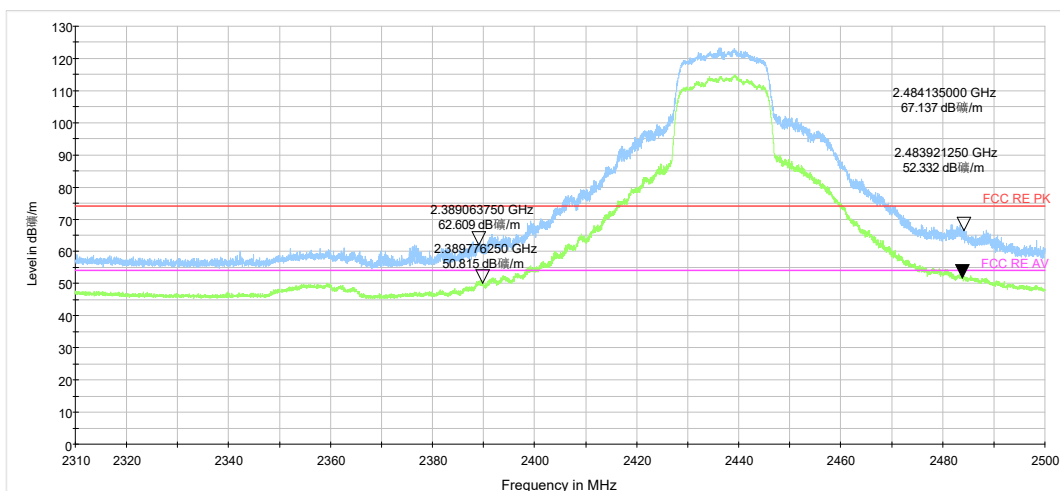


802.11n (HT20) CH6

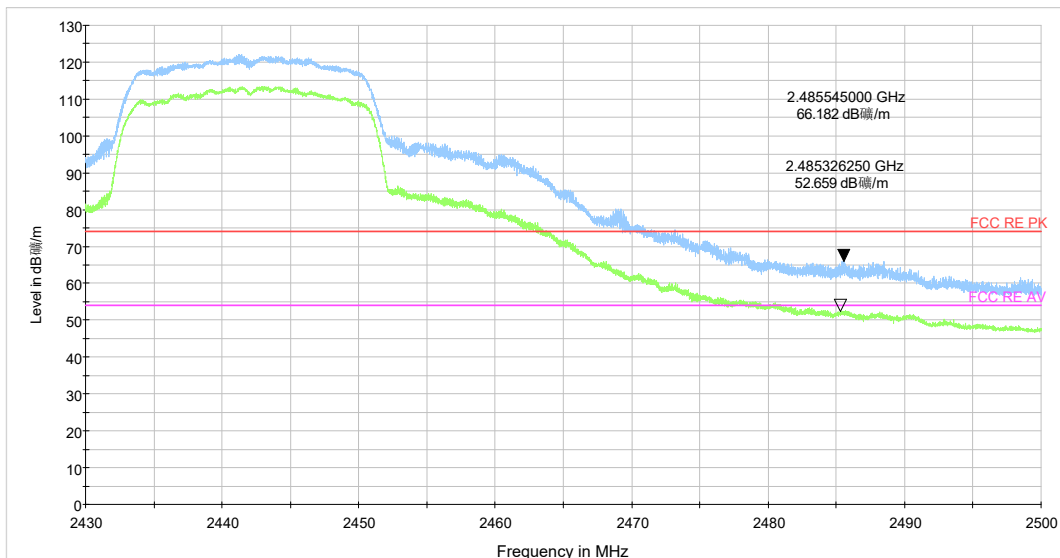


802.11n (HT20) CH7

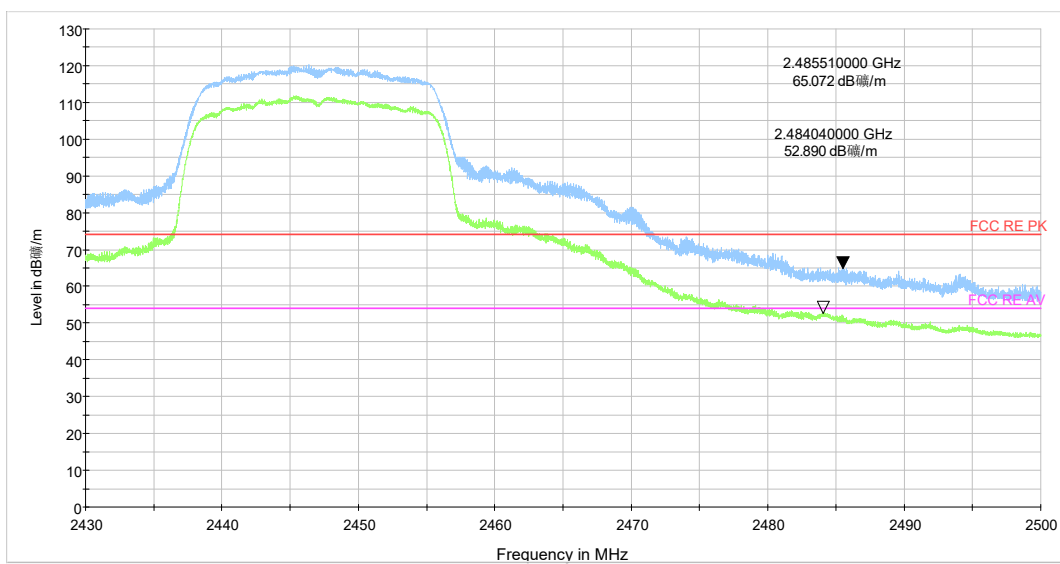


802.11n (HT20) CH8

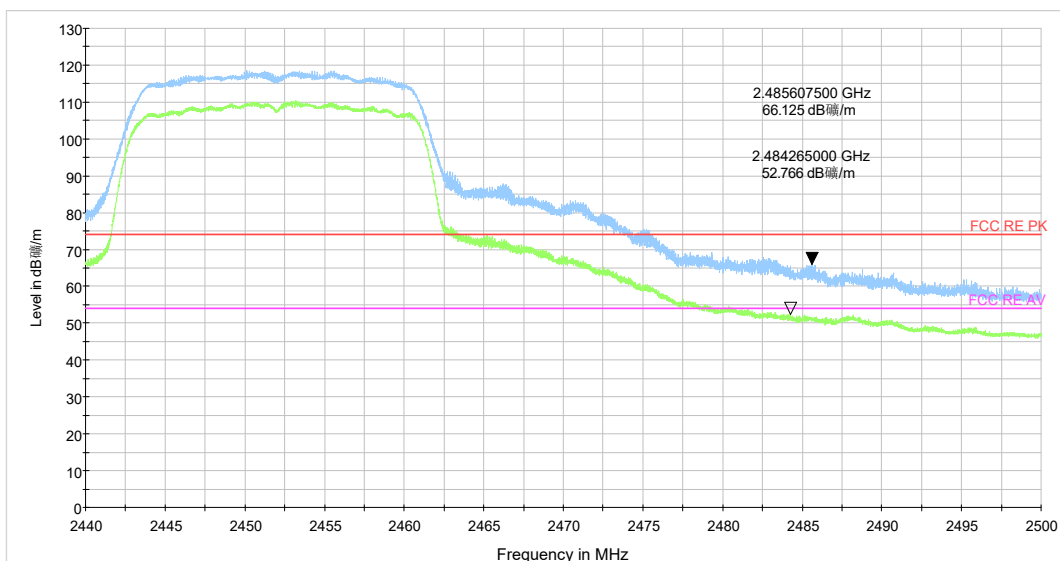


802.11n (HT20) CH9

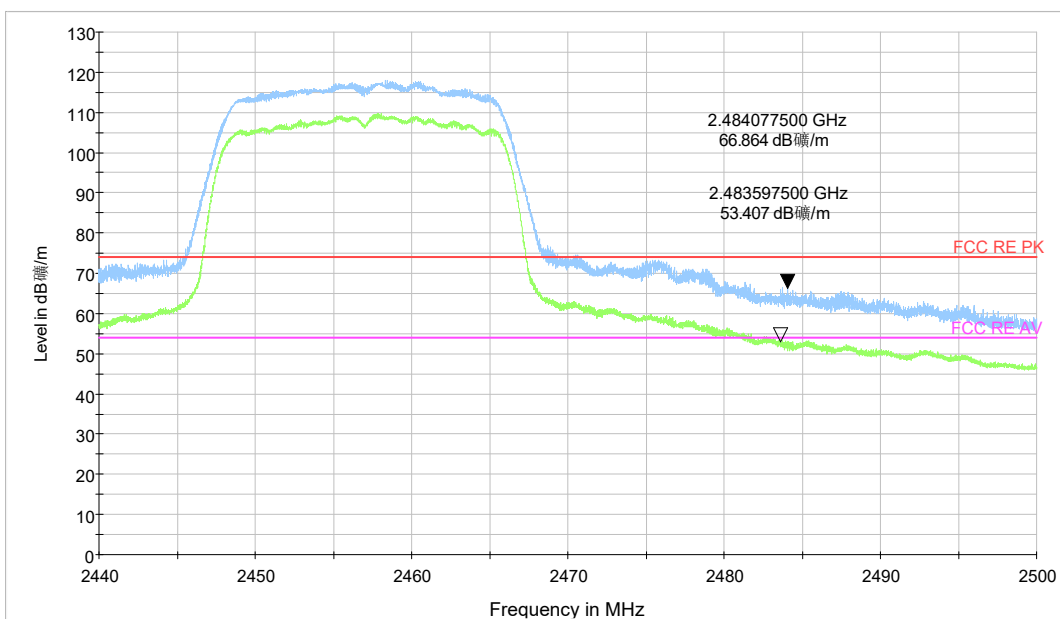


802.11n (HT20) CH10

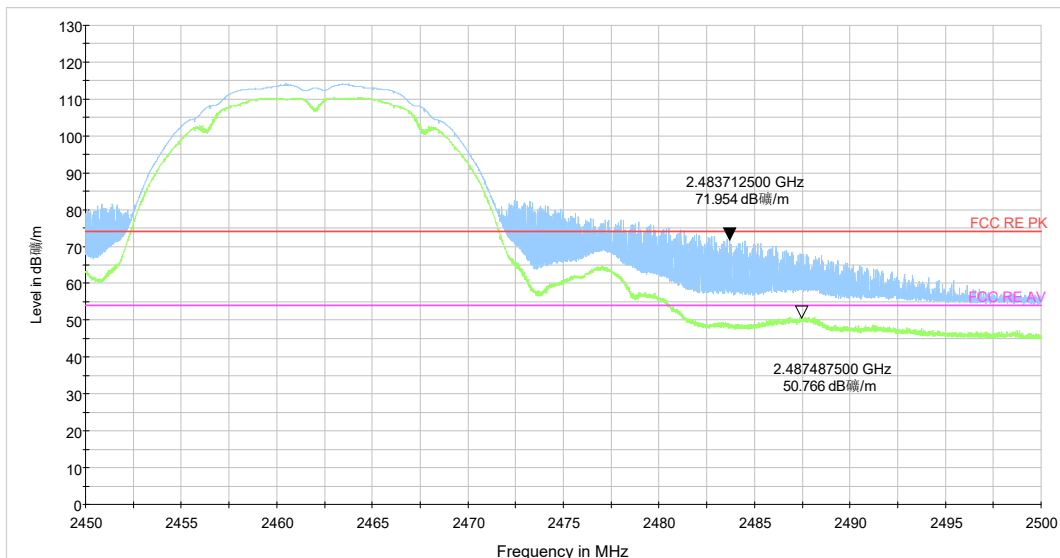


802.11n (HT20) CH11

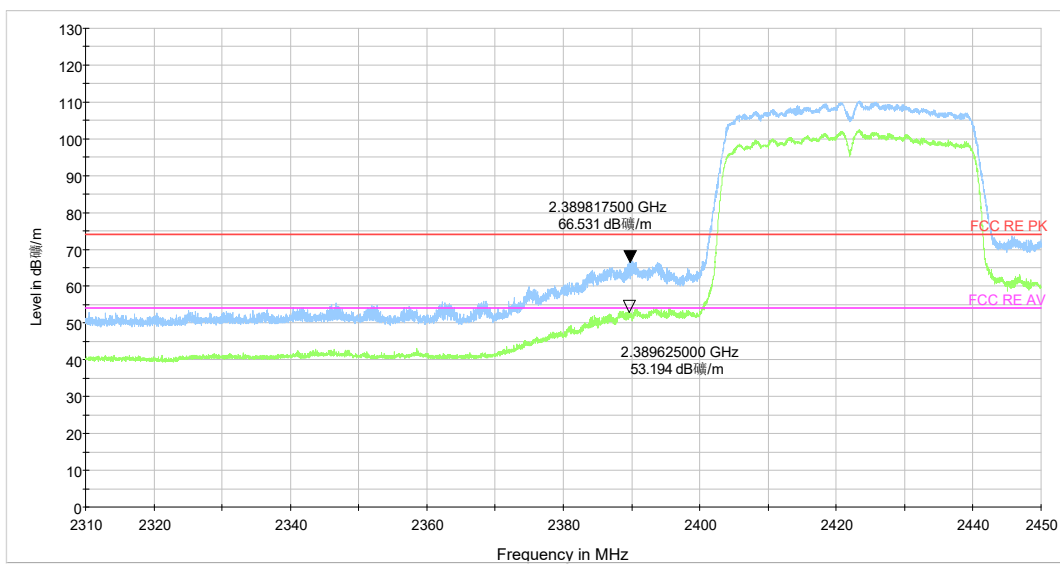


802.11n (HT40) CH3

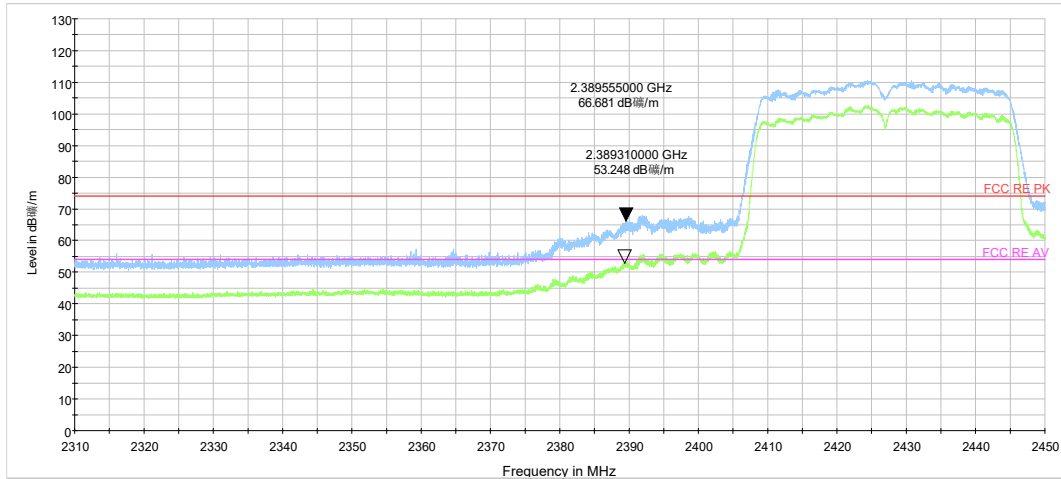


802.11n (HT40) CH4

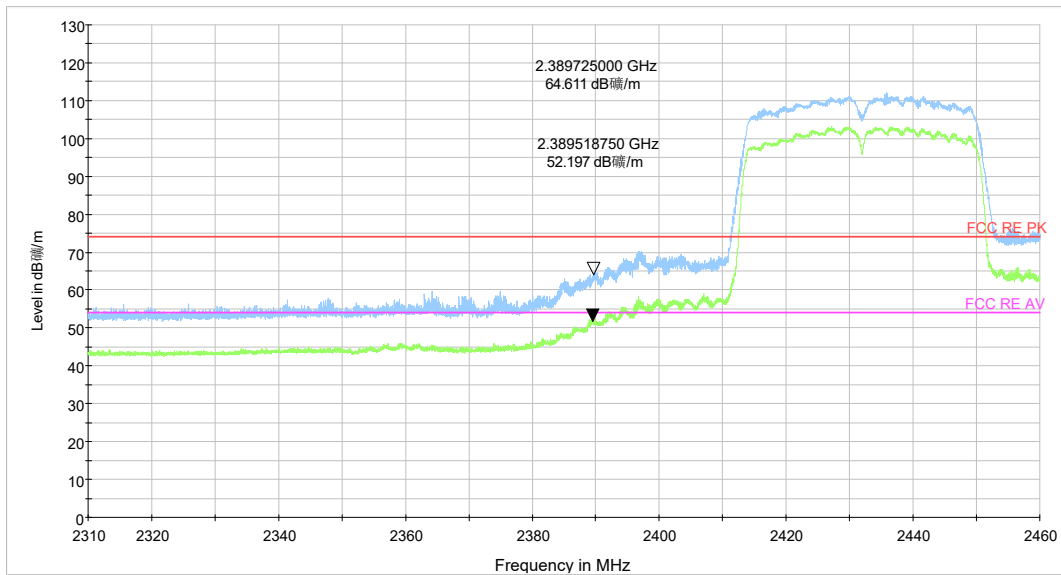


802.11n (HT40) CH5

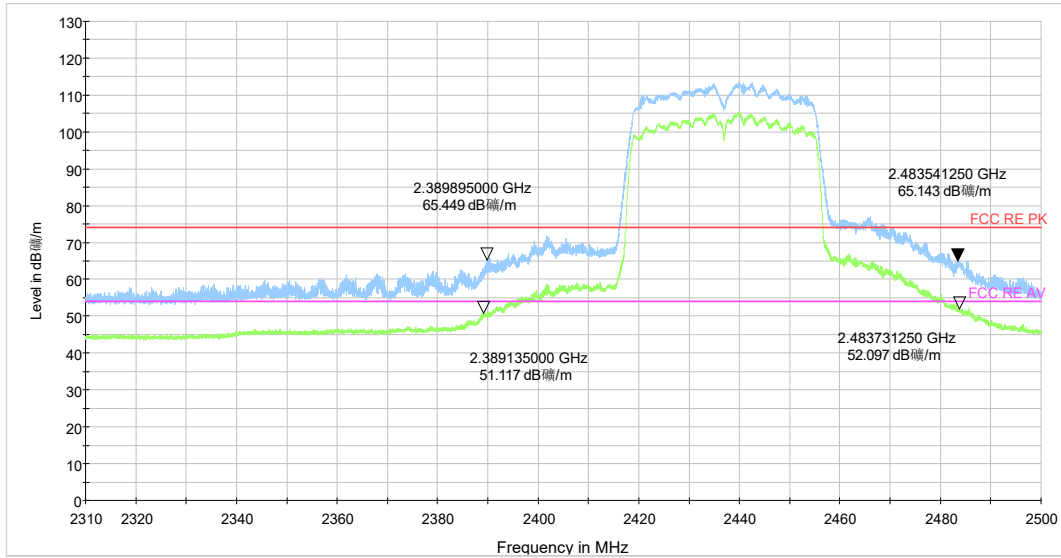


802.11n (HT40) CH6

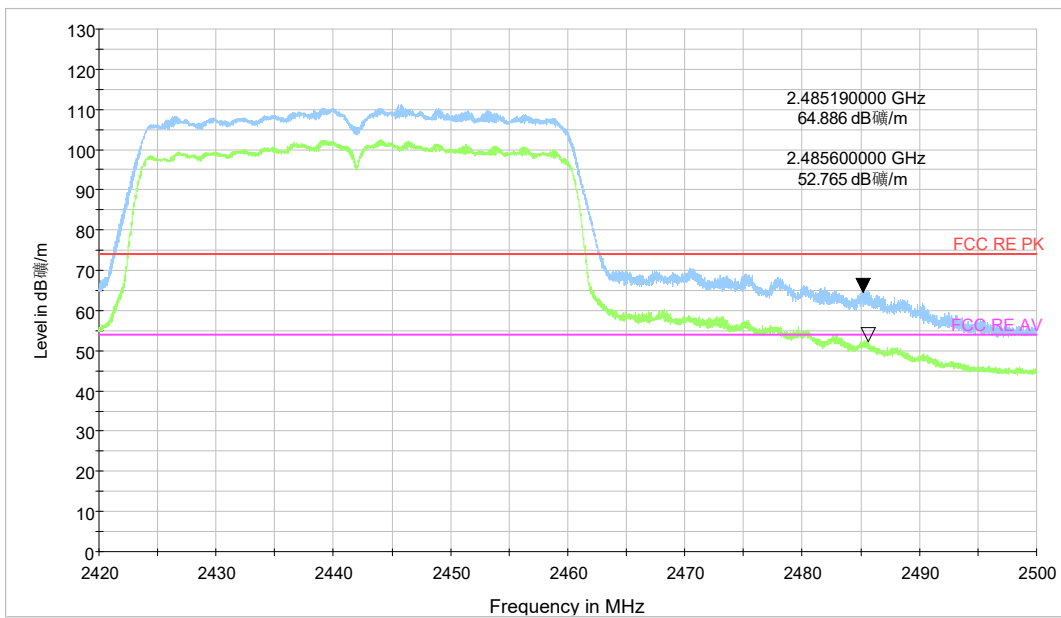


802.11n (HT40) CH7

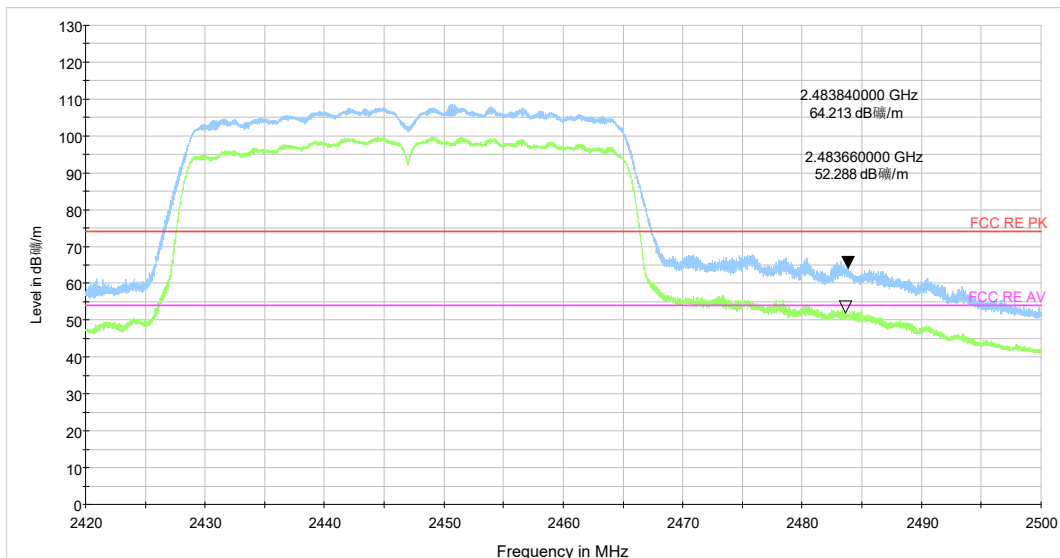


802.11n (HT40) CH8

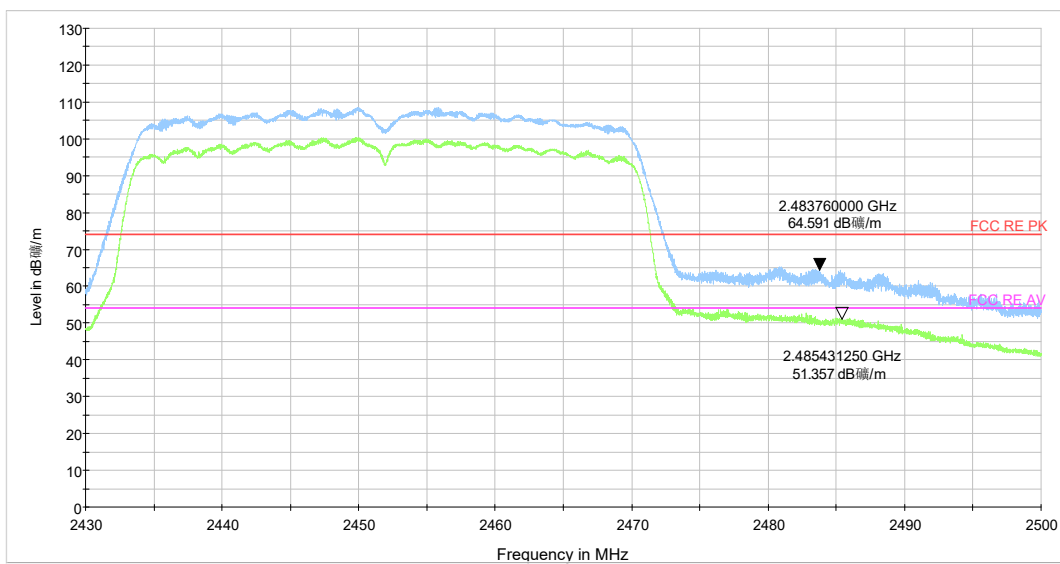


802.11n (HT40) CH9

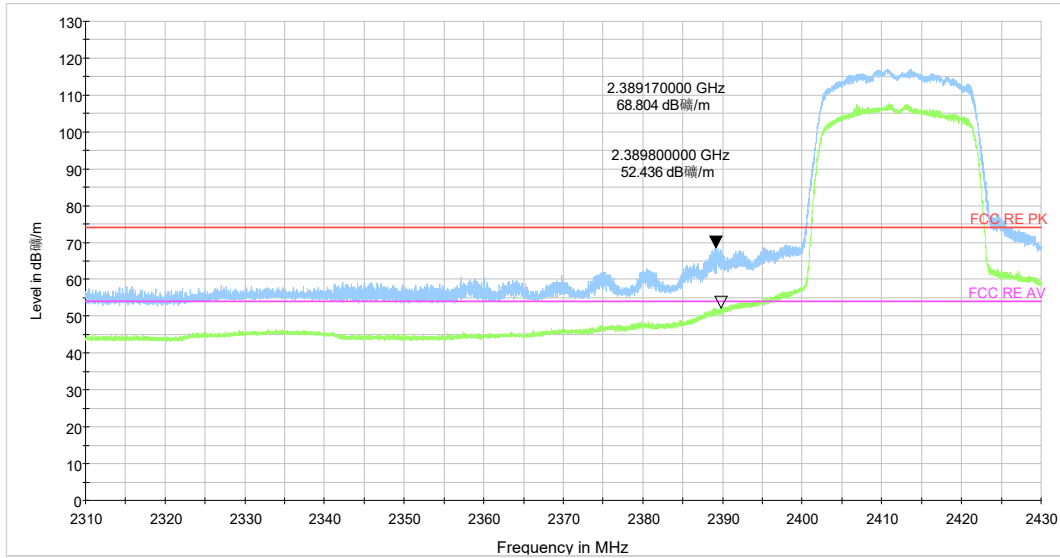


802.11ax HE 20 CH1

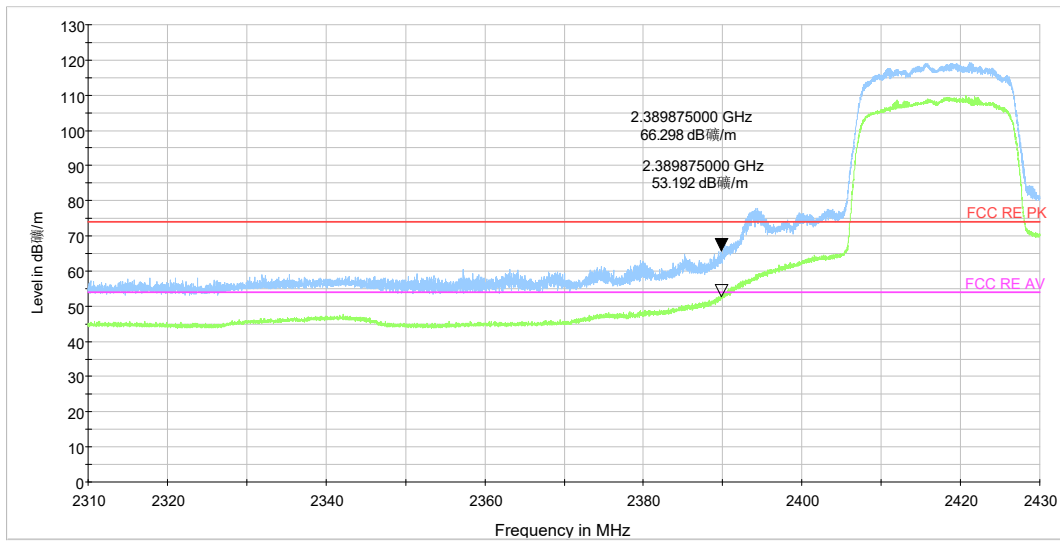


802.11ax HE 20 CH2

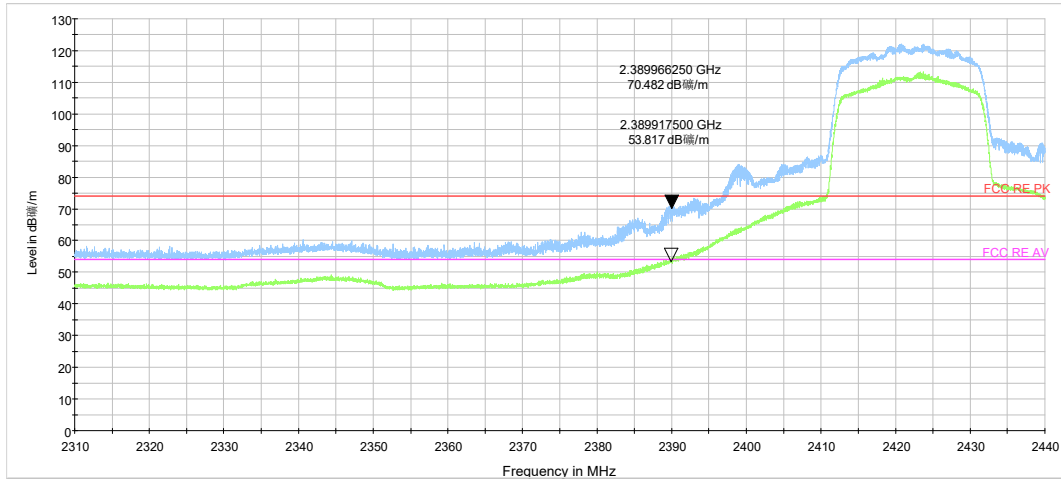


802.11ax HE 20 CH3

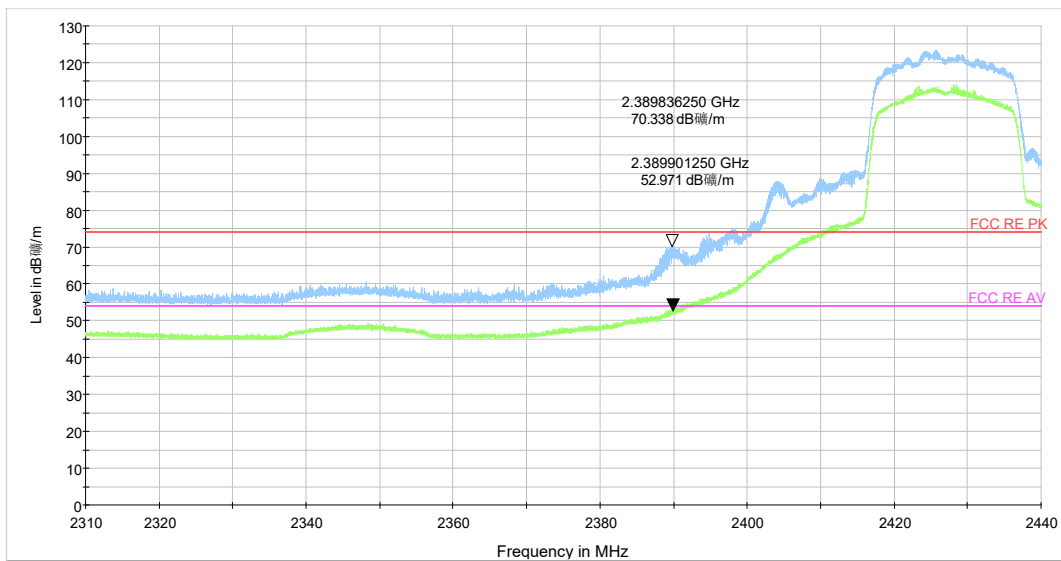


802.11ax HE 20 CH4

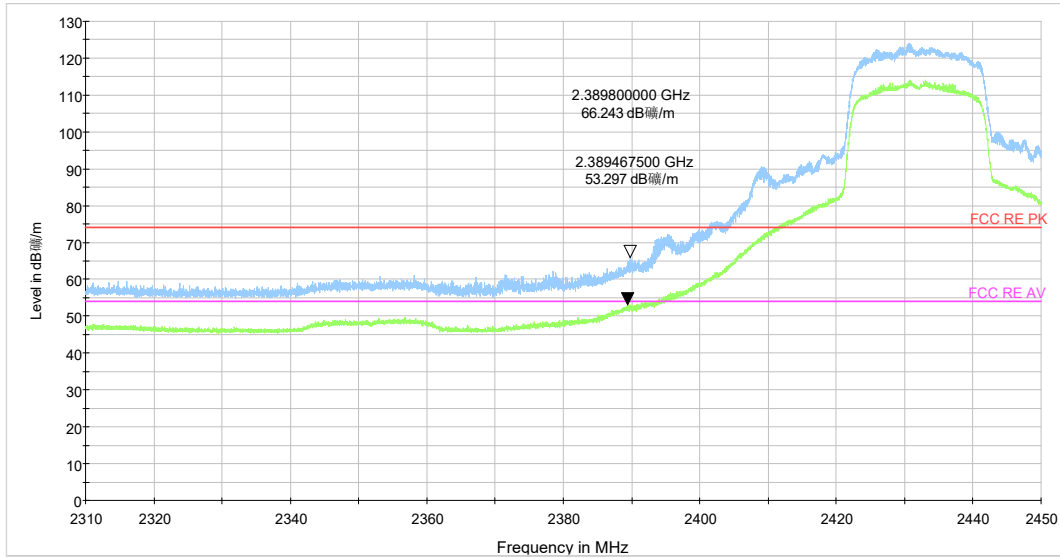


802.11ax HE 20 CH5

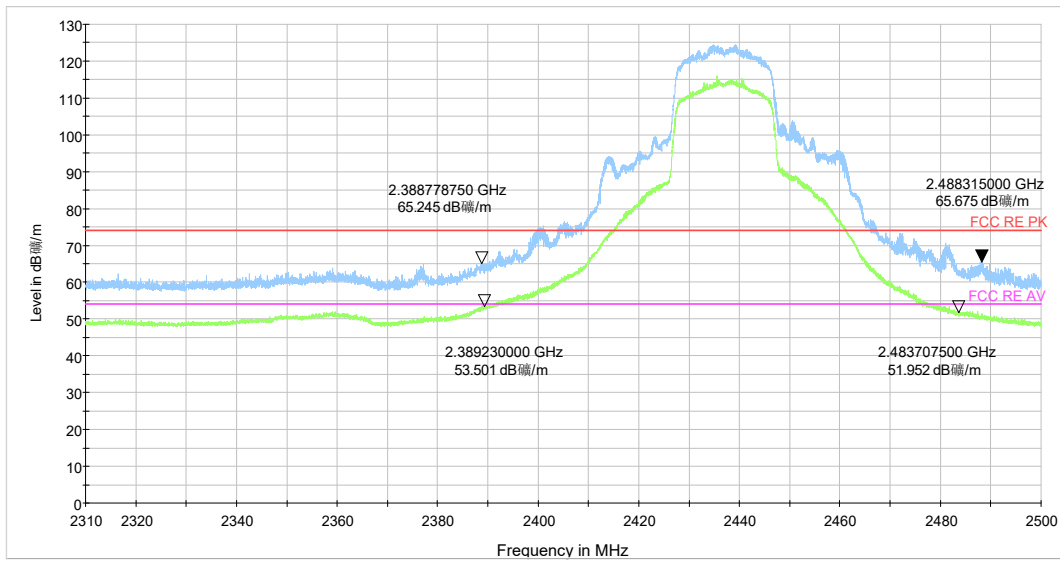


802.11ax HE 20 CH6

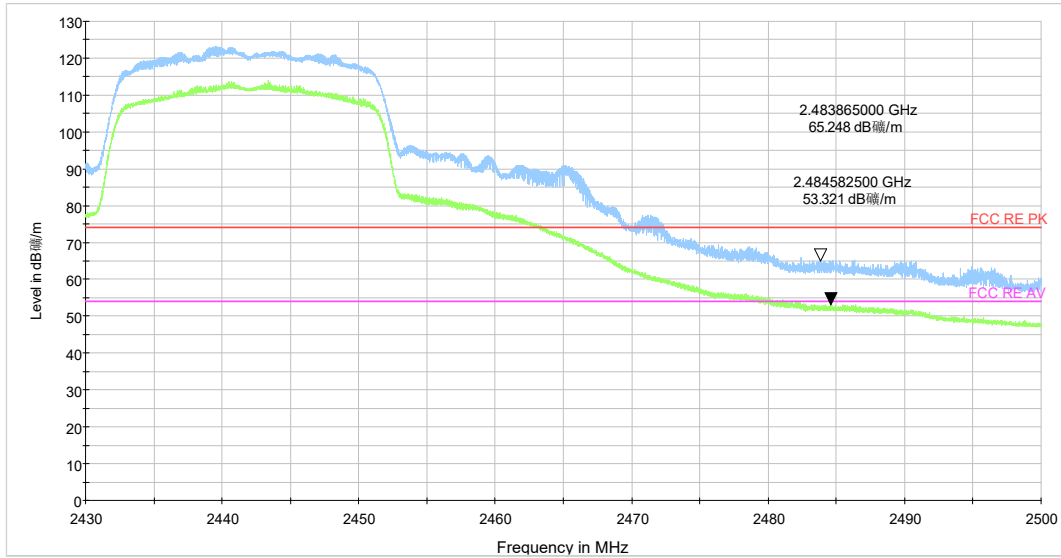


802.11ax HE 20 CH7

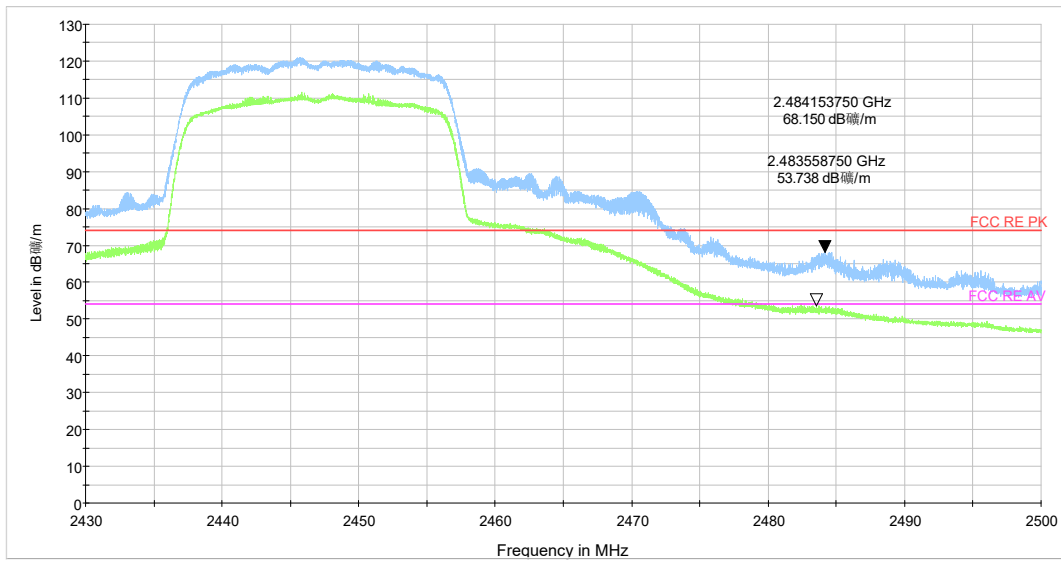


802.11ax HE 20 CH8

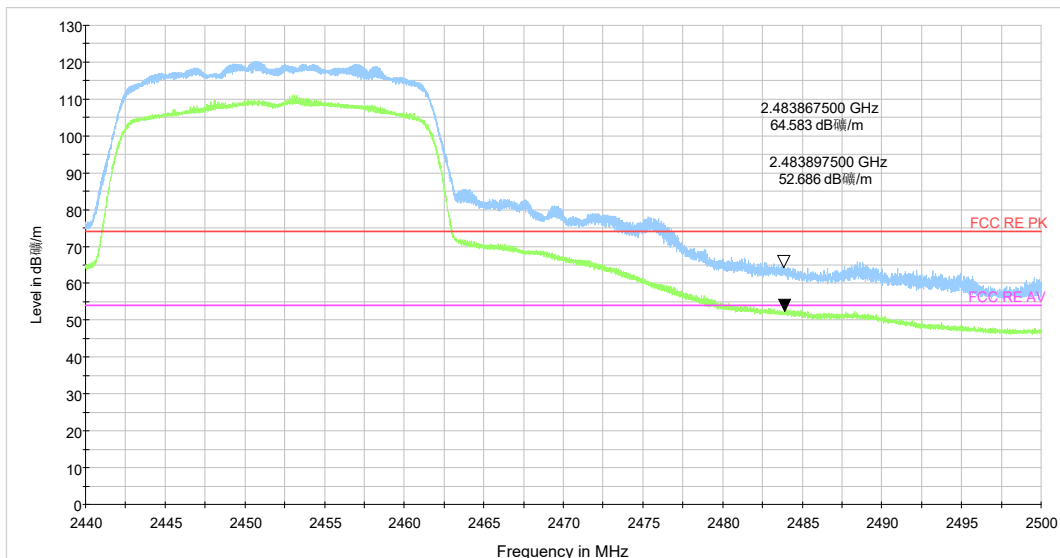


802.11ax HE 20 CH9

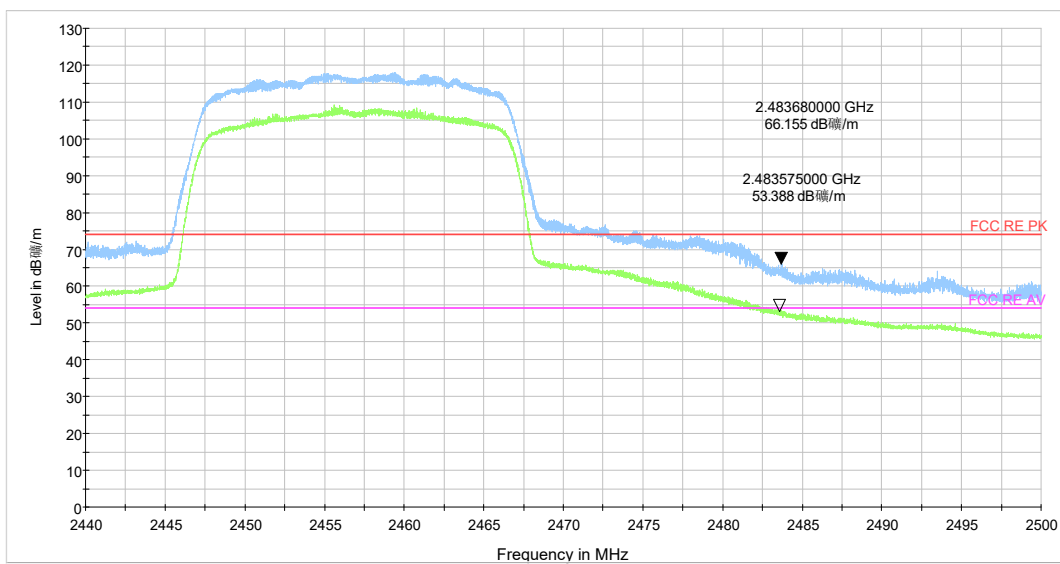


802.11ax HE 20 CH10

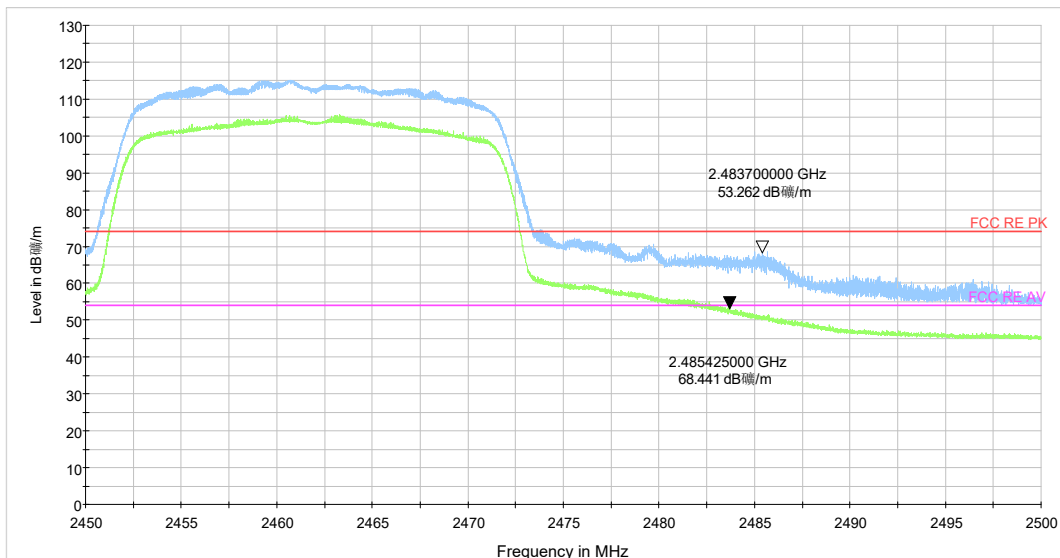


802.11ax HE 20 CH11

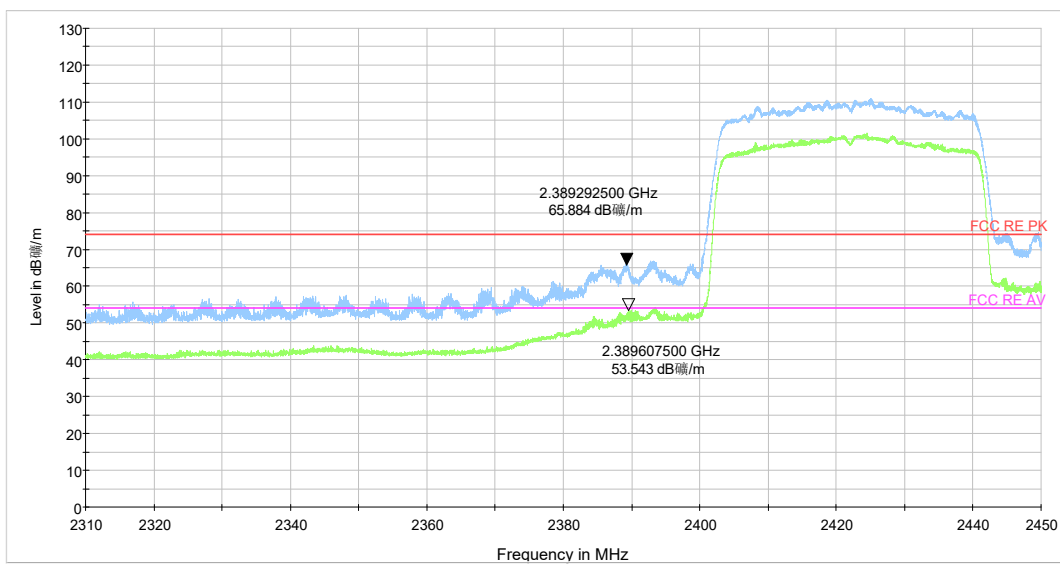


802.11ax HE 40 CH3

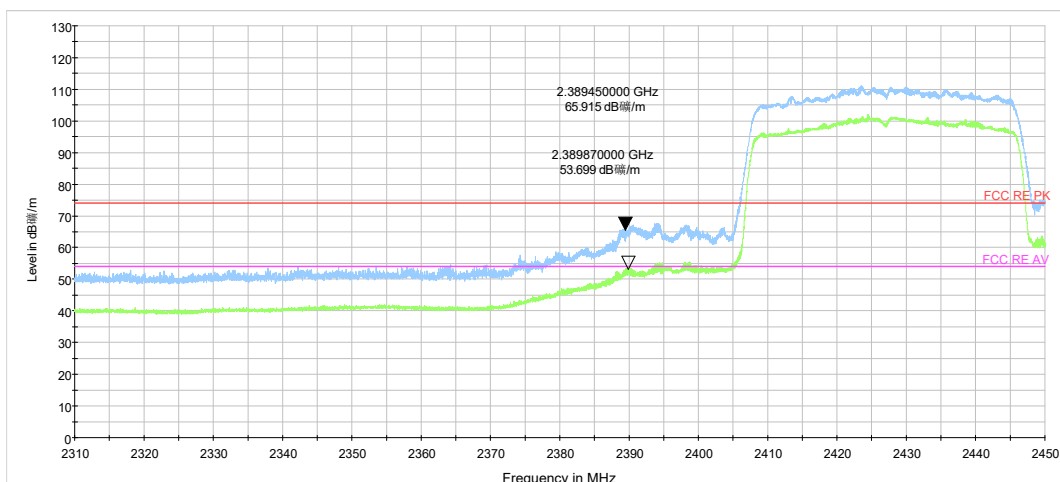


802.11ax HE 40 CH4

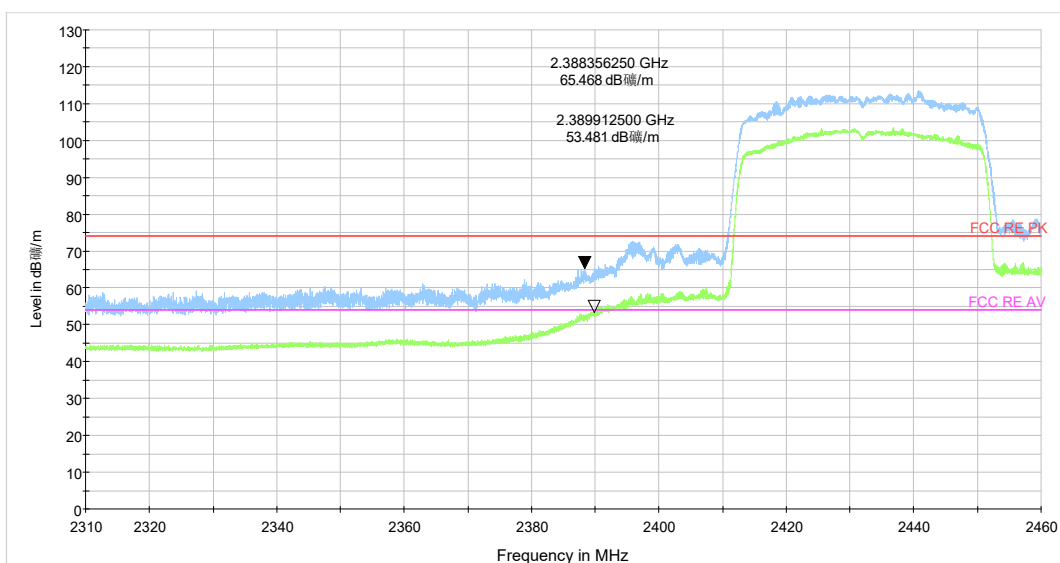


802.11ax HE 40 CH5

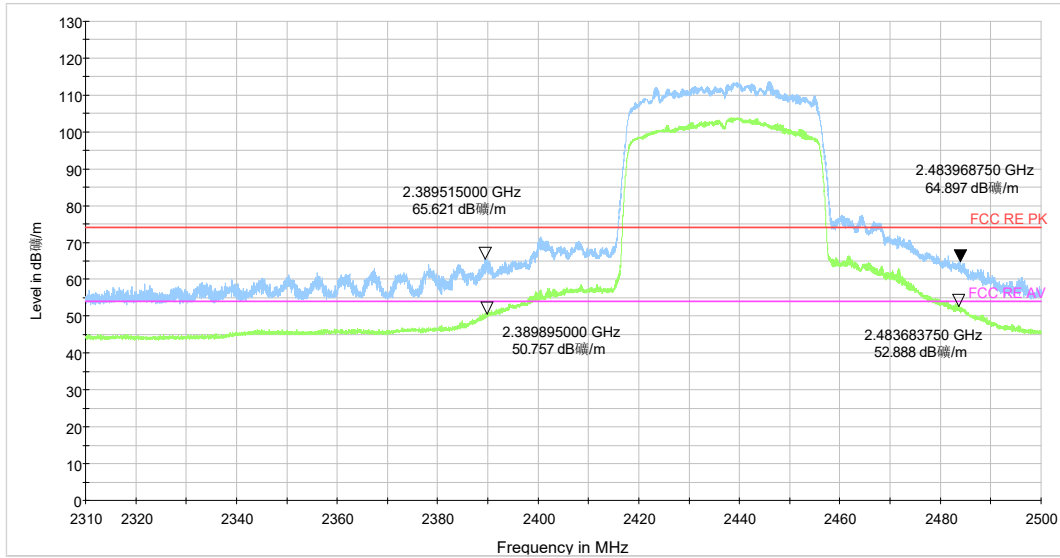


802.11ax HE 40 CH6

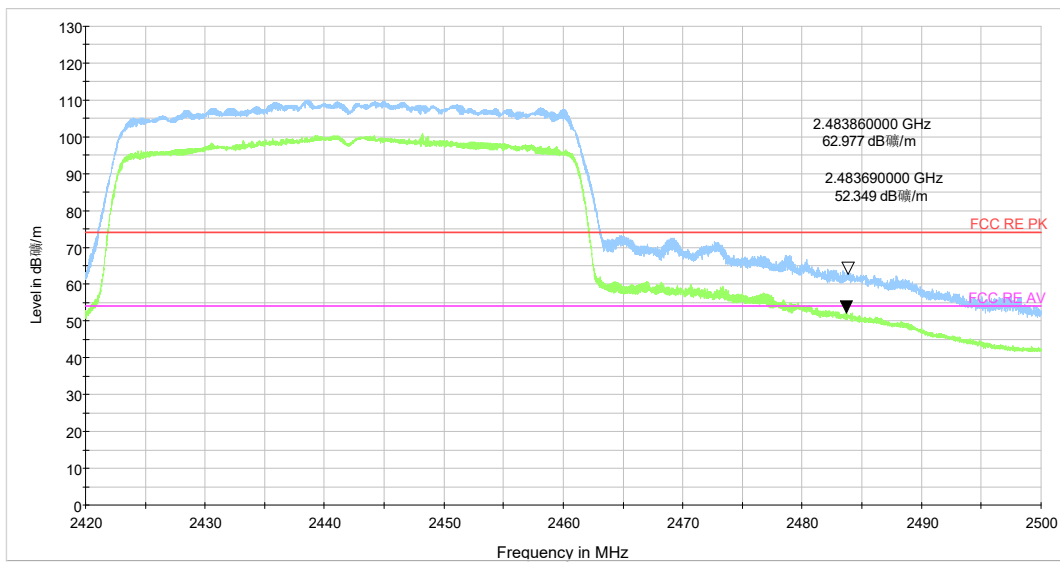

802.11ax HE 40 CH7

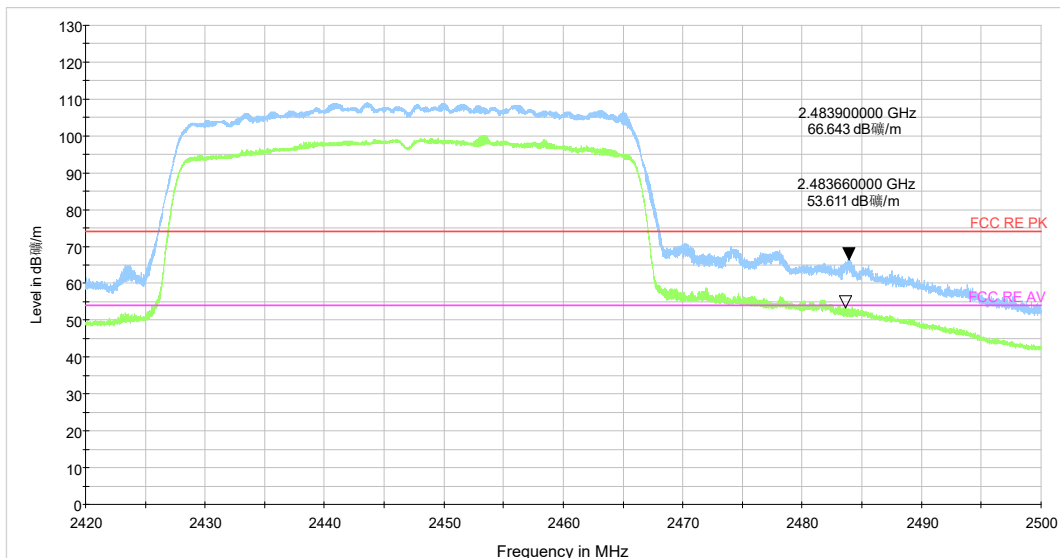

802.11ax HE 40 CH8

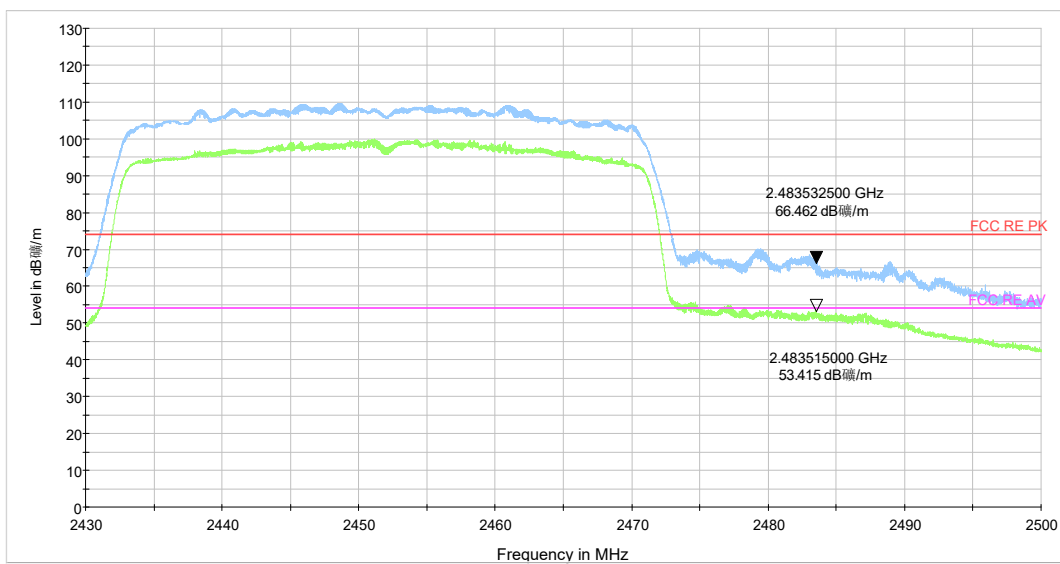

802.11ax HE 40 CH9

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier,

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

Remark:

1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit – Quasi-Peak/ MAX Peak/ Average
3. A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)
4. For below 1GHz

QP Level @Spectrum Overview H

QP Level @Spectrum Overview V

QP Level @Final Results

QP Limit

For above 1GHz

PK Level @Spectrum Overview H

PK Level @Spectrum Overview V

PK Level @Final Results

PK Limit

AVG Level @Spectrum Overview H

AVG Level @Spectrum Overview V


AVG Level @Final Results

AVG Limit


Wi-Fi 2.4G

During the test, the Radiates Emission from 9kHz to 1GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.


A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means ($\text{dB}\mu\text{V/m}$)

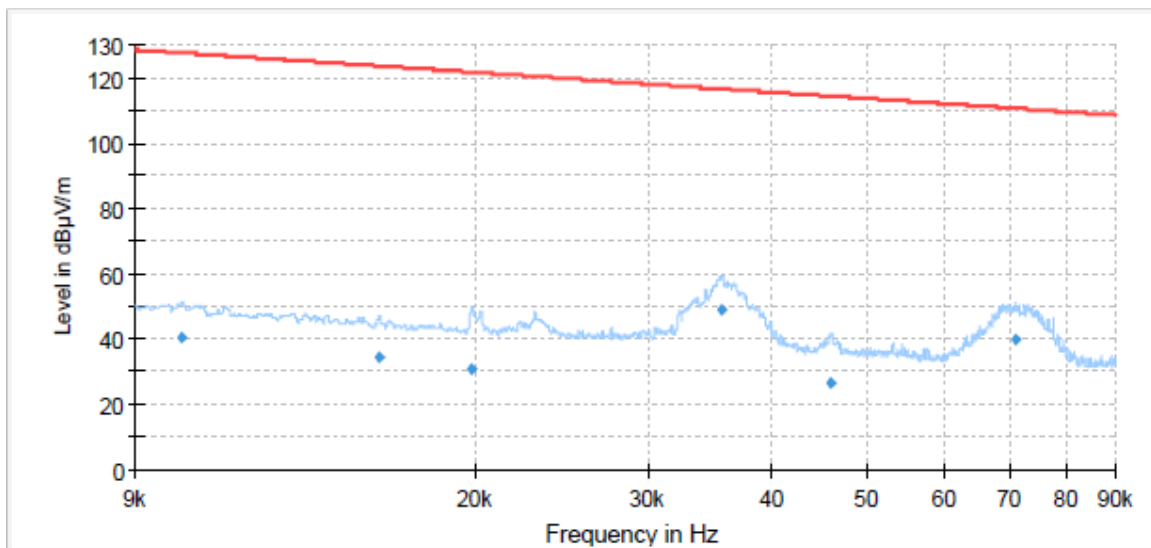


Radiates Emission from 9kHz to 90kHz

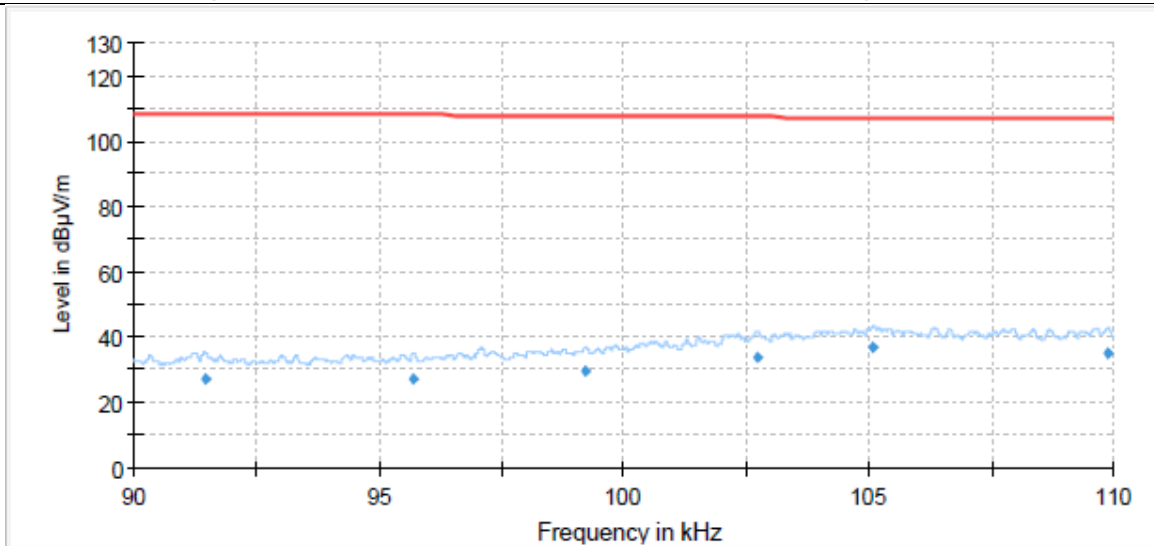


Radiates Emission from 90kHz to 110kHz

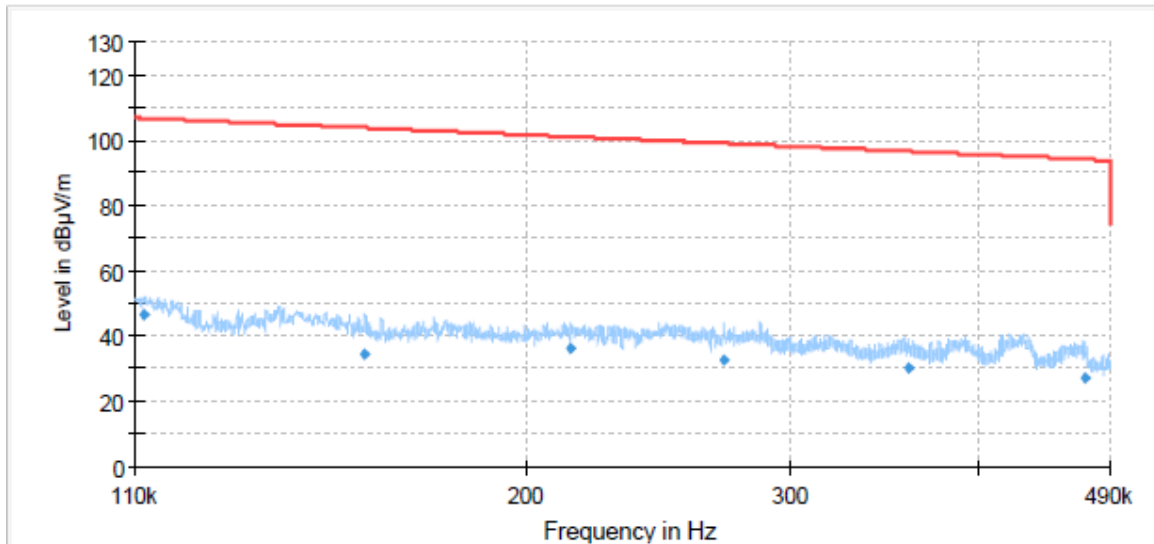

Radiates Emission from 110kHz to 490kHz

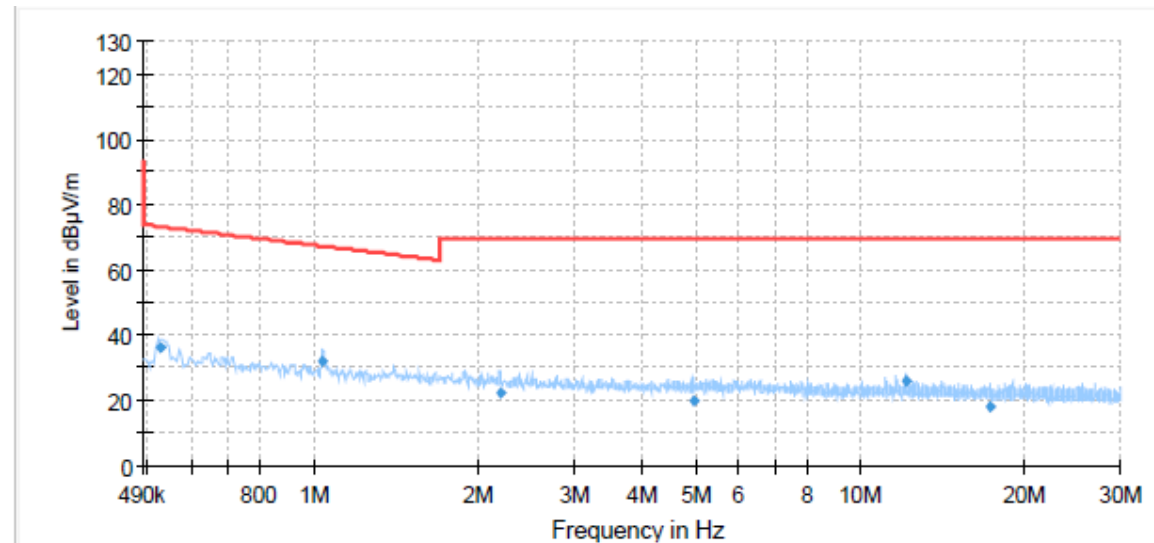


Radiates Emission from 490kHz to 30MHz

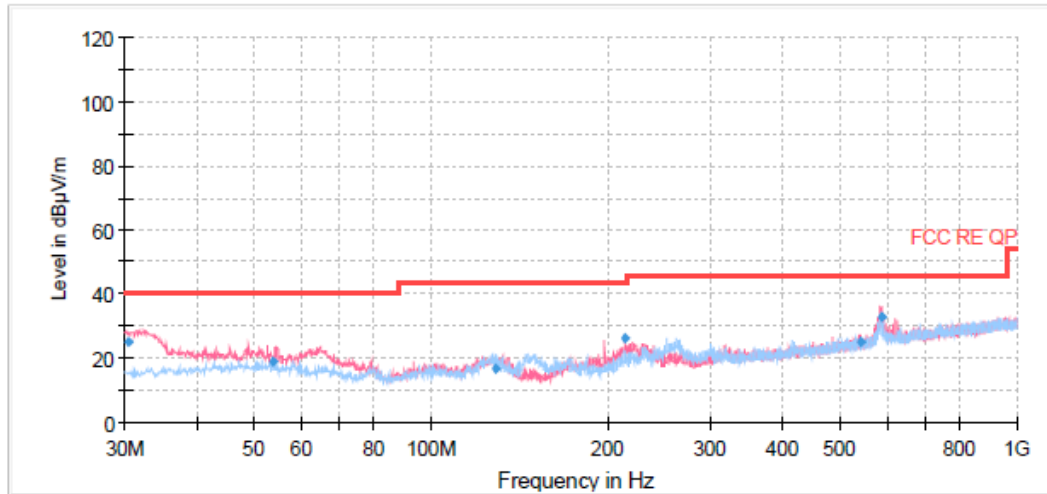

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.40	25.01	40.00	14.99	1000.00	100.0	V	230.00	17
53.85	18.81	40.00	21.19	1000.00	102.0	V	268.00	20
128.74	16.55	43.50	26.95	1000.00	222.0	H	269.00	16
214.50	25.97	43.50	17.53	1000.00	202.0	V	226.00	18
540.38	25.00	46.00	21.00	1000.00	198.0	V	212.00	26
586.74	32.82	46.00	13.18	1000.00	100.0	V	241.00	27

802.11b CH1

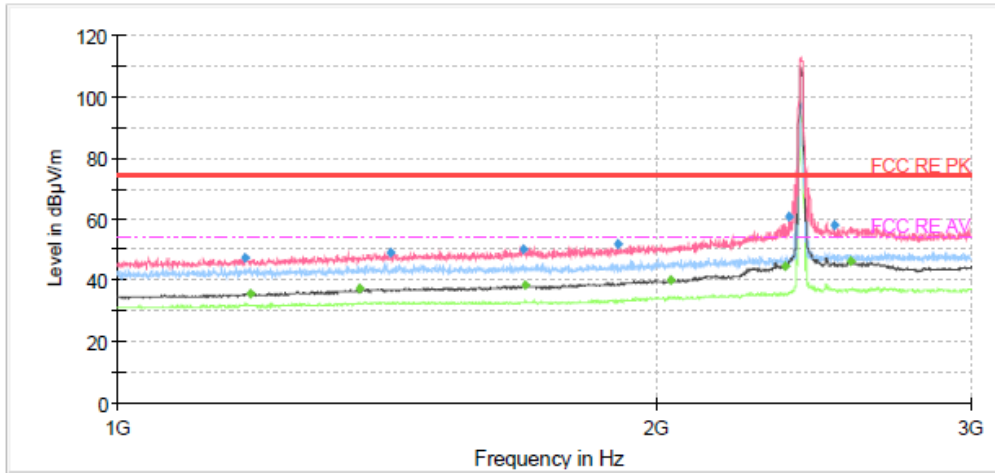

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1177.50	47.47	---	74.00	26.53	500.00	200.0	V	358.00	-4
1187.50	---	35.93	54.00	18.07	500.00	200.0	V	331.00	-4
1364.00	---	37.31	54.00	16.69	500.00	200.0	V	359.00	-3
1421.50	49.17	---	74.00	24.83	500.00	200.0	V	355.00	-3
1686.00	50.40	---	74.00	23.60	500.00	200.0	V	337.00	-2
1689.50	---	38.34	54.00	15.67	500.00	200.0	V	263.00	-2
1905.50	52.07	---	74.00	21.93	500.00	200.0	V	316.00	-1
2038.00	---	40.13	54.00	13.87	500.00	200.0	V	347.00	0
2362.50	---	44.85	54.00	9.15	500.00	200.0	V	331.00	1
2376.00	60.76	---	74.00	13.24	500.00	200.0	V	357.00	1
2515.00	58.16	---	74.00	15.84	500.00	200.0	V	170.00	2
2569.00	---	46.06	54.00	7.94	500.00	200.0	V	293.00	3

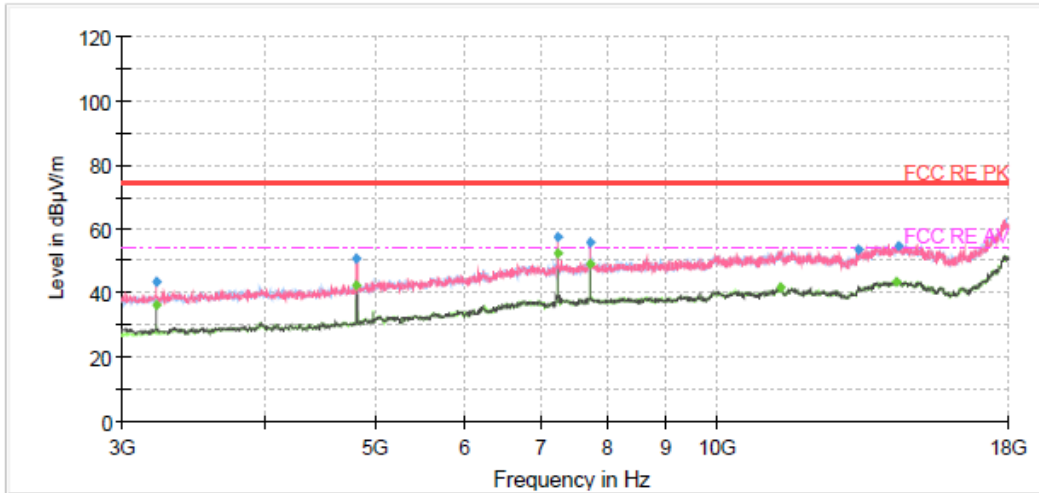

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3215.63	---	36.49	54.00	17.51	500.00	200.0	V	208.00	-6
3215.63	43.40	---	74.00	30.60	500.00	200.0	V	208.00	-6
4822.50	---	42.34	54.00	11.66	500.00	200.0	V	108.00	-2
4822.50	50.52	---	74.00	23.48	500.00	200.0	V	108.00	-2
7233.75	---	52.52	54.00	1.48	500.00	100.0	V	232.00	5
7237.50	57.45	---	74.00	16.55	500.00	100.0	V	256.00	5
7717.50	55.54	---	74.00	18.46	500.00	100.0	V	222.00	7
7717.50	---	49.11	54.00	4.89	500.00	100.0	V	222.00	7
11347.50	---	41.79	54.00	12.21	500.00	100.0	H	282.00	9
13265.63	53.33	---	74.00	20.67	500.00	200.0	H	2.00	9
14319.38	---	43.45	54.00	10.55	500.00	100.0	H	171.00	11
14422.50	54.93	---	74.00	19.07	500.00	200.0	H	1.00	11

802.11b CH6

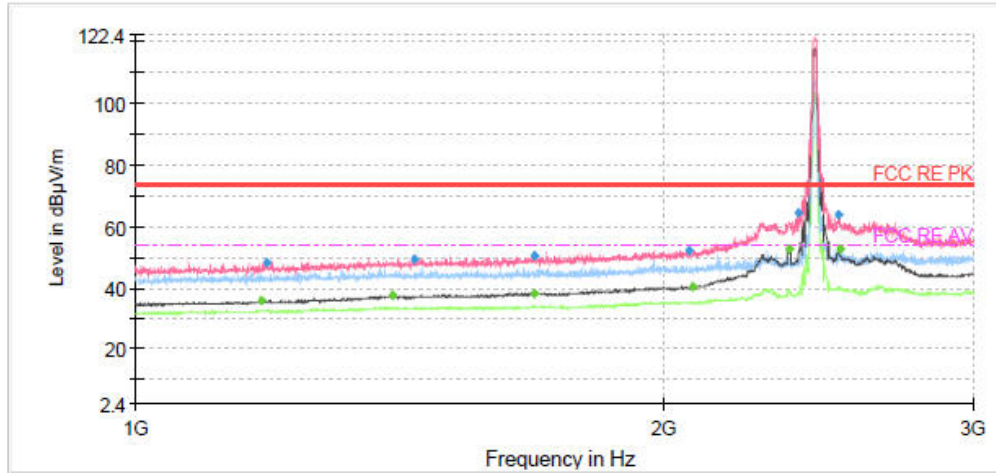

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1180.00	---	35.82	54.00	18.18	500.00	200.0	V	353.00	-4
1186.50	48.17	---	74.00	25.83	500.00	200.0	V	319.00	-4
1399.00	---	37.38	54.00	16.62	500.00	200.0	V	327.00	-3
1440.50	49.26	---	74.00	24.74	500.00	200.0	V	136.00	-3
1687.00	50.32	---	74.00	23.68	500.00	200.0	V	175.00	-2
1687.50	---	38.35	54.00	15.65	500.00	200.0	V	356.00	-2
2067.00	52.15	---	74.00	21.85	500.00	200.0	V	357.00	0
2079.00	---	40.37	54.00	13.63	500.00	200.0	V	265.00	0
2358.00	---	52.79	54.00	1.21	500.00	200.0	V	58.00	1
2383.00	64.32	---	74.00	9.68	500.00	200.0	V	288.00	2
2516.00	63.59	---	74.00	10.41	500.00	200.0	V	113.00	2
2519.00	---	52.90	54.00	1.10	500.00	200.0	V	113.00	2

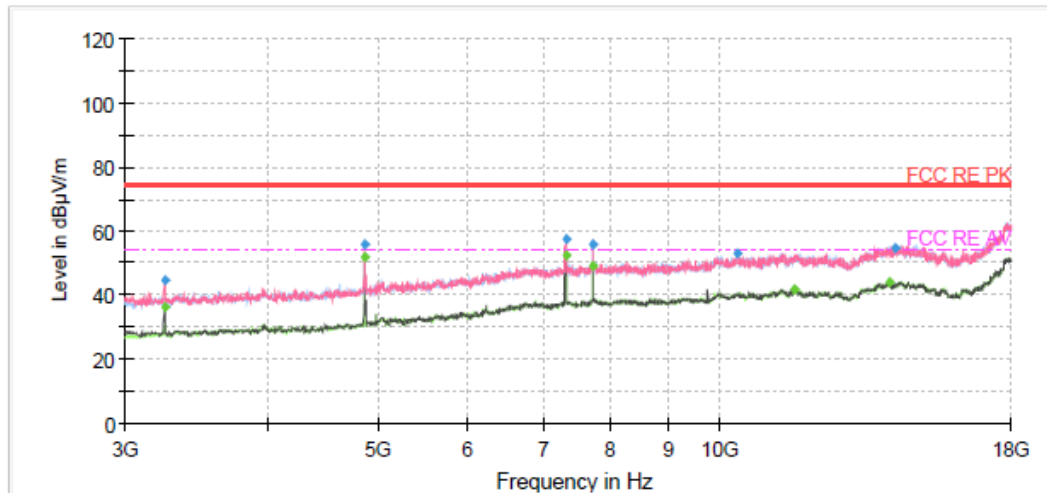

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3247.50	---	36.08	54.00	17.92	500.00	200.0	V	176.00	-6
3249.38	44.62	---	74.00	29.38	500.00	200.0	V	176.00	-6
4873.13	---	51.80	54.00	2.20	500.00	200.0	V	74.00	-1
4873.13	55.89	---	74.00	18.11	500.00	200.0	V	74.00	-1
7308.75	57.59	---	74.00	16.41	500.00	100.0	V	230.00	6
7312.50	---	52.47	54.00	1.53	500.00	100.0	V	230.00	6
7717.50	55.56	---	74.00	18.44	500.00	200.0	V	234.00	7
7717.50	---	49.26	54.00	4.74	500.00	200.0	V	234.00	7
10366.88	53.26	---	74.00	20.74	500.00	100.0	H	13.00	8
11621.25	---	41.94	54.00	12.06	500.00	100.0	V	358.00	9
14090.63	---	44.02	54.00	9.98	500.00	200.0	V	5.00	11
14212.50	54.85	---	74.00	19.15	500.00	100.0	H	36.00	11

802.11b CH11

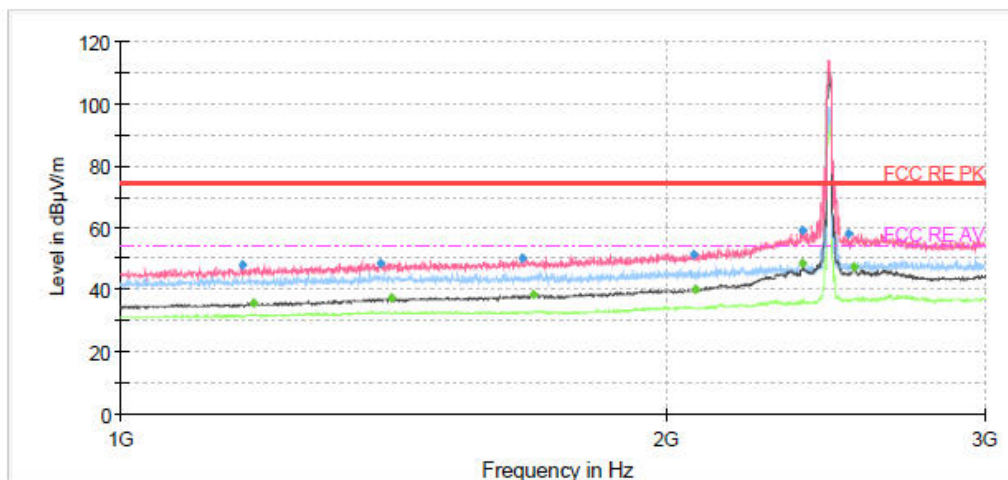

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1168.50	47.78	---	74.00	26.22	500.00	200.0	V	357.00	-5
1182.50	---	35.75	54.00	18.25	500.00	200.0	V	314.00	-4
1392.50	48.81	---	74.00	25.19	500.00	200.0	V	341.00	-3
1412.00	---	37.30	54.00	16.70	500.00	200.0	V	354.00	-3
1668.00	50.14	---	74.00	23.86	500.00	200.0	V	346.00	-2
1691.00	---	38.32	54.00	15.68	500.00	200.0	V	352.00	-2
2071.50	51.49	---	74.00	22.51	500.00	200.0	V	0.00	0
2075.00	---	40.18	54.00	13.82	500.00	200.0	V	322.00	0
2380.50	---	48.59	54.00	5.41	500.00	200.0	V	265.00	1
2381.50	59.05	---	74.00	14.95	500.00	200.0	V	0.00	1
2522.00	57.96	---	74.00	16.04	500.00	200.0	V	265.00	2
2540.50	---	47.55	54.00	6.45	500.00	200.0	V	265.00	2

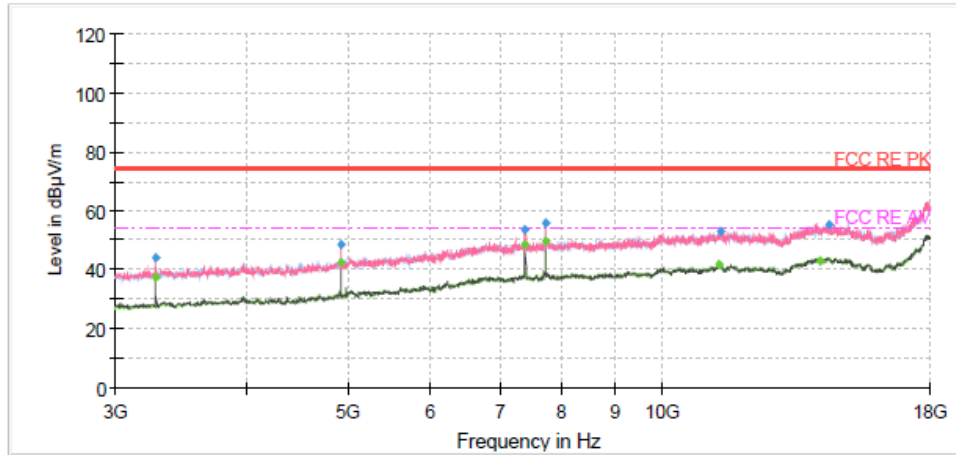

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3281.25	---	37.16	54.00	16.84	500.00	200.0	V	204.00	-7
3281.25	43.96	---	74.00	30.04	500.00	200.0	V	204.00	-7
4923.75	---	42.60	54.00	11.40	500.00	200.0	V	81.00	-1
4923.75	48.65	---	74.00	25.35	500.00	200.0	V	81.00	-1
7383.75	53.81	---	74.00	20.19	500.00	100.0	V	237.00	6
7383.75	---	48.48	54.00	5.52	500.00	100.0	V	237.00	6
7717.50	55.66	---	74.00	18.34	500.00	200.0	V	242.00	7
7717.50	---	49.58	54.00	4.42	500.00	100.0	V	218.00	7
11310.00	---	41.93	54.00	12.07	500.00	100.0	H	54.00	9
11362.50	53.02	---	74.00	20.98	500.00	200.0	V	10.00	9
14126.25	---	43.21	54.00	10.79	500.00	100.0	H	71.00	11
14396.25	55.16	---	74.00	18.84	500.00	100.0	H	36.00	11