



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	Linksys LLC
Applicant Address	121 Theory Drive, Irvine, CA 92617, USA
FCC ID	Q87-EA9500

Product Name	Linksys Tri-Band Wireless-AC Router
Brand Name	LINKSYS
Model No.	EA9500
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Aug. 05, 2015
Final Test Date	Sep. 03, 2015
Submission Type	Original Equipment

### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart E, KDB789033 D02 v01, KDB662911 D01 v02r01, KDB644545 D03 v01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes .....	6
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	10
3.10. Duty Cycle .....	11
3.11. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>16</b>
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement.....	20
4.3. Maximum Conducted Output Power Measurement.....	30
4.4. Power Spectral Density Measurement .....	34
4.5. Radiated Emissions Measurement .....	42
4.6. Band Edge Emissions Measurement .....	64
4.7. Frequency Stability Measurement .....	73
4.8. Antenna Requirements .....	77
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>78</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>79</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A33</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B5</b>
<b>APPENDIX C. RADIATED EMISSION CO-LOCATION REPORT .....</b>	<b>C1 ~ C3</b>


## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR581108AB	Rev. 01	Initial issue of report	Sep. 22, 2015

## 1. VERIFICATION OF COMPLIANCE

Product Name : Linksys Tri-Band Wireless-AC Router  
Brand Name : LINKSYS  
Model No. : EA9500  
Applicant : Linksys LLC  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Aug. 05, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

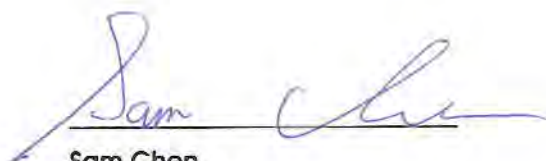

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	22.36 dB
4.2	15.407(a)	26dB Spectrum Bandwidth and 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	1.07 dB
4.4	15.407(a)	Power Spectral Density	Complies	0.04 dB
4.5	15.407(b)	Radiated Emissions	Complies	6.11 dB
4.6	15.407(b)	Band Edge Emissions	Complies	1.04 dB
4.7	15.407(g)	Frequency Stability	Complies	-
4.8	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11a: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11a/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM)
Data Rate (Mbps)	IEEE 802.11a: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	For Non-Beamforming Mode IEEE 802.11a: 18.49 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.15 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 36.18 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 74.10 MHz For Beamforming Mode IEEE 802.11ac MCS0/Nss1 (VHT20): 18.06 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT40): 36.76 MHz ; IEEE 802.11ac MCS0/Nss1 (VHT80): 75.54 MHz
Maximum Conducted Output Power	For Non-Beamforming Mode IEEE 802.11a: 28.48 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 28.50 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 28.70 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 25.61 dBm For Beamforming Mode IEEE 802.11ac MCS0/Nss1 (VHT20): 26.95 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT40): 26.80 dBm ; IEEE 802.11ac MCS0/Nss1 (VHT80): 24.04 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
Beamforming Function	<input checked="" type="checkbox"/> With beamforming	<input type="checkbox"/> Without beamforming
Operating Mode	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Mobile and portable client devices	

Note: The product has beamforming function for 802.11 n/ac in 2.4GHz/5GHz.

### Antenna and Band width

Antenna	Four (TX)		
Band width Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

### IEEE 11n/ac Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	4	MCS 0-31
802.11n (HT40)	4	MCS 0-31
802.11ac (VHT20)	4	MCS 0-11/Nss1-4
802.11ac (VHT40)	4	MCS 0-11/Nss1-4
802.11ac (VHT80)	4	MCS 0-11/Nss1-4

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 and VHT80.

Note 3: Modulation modes consist of below configuration:

HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac

## 3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	DA-60M12	Input: 100-240V ~ 50-60Hz 1.5A Max. Output: 12V, 5A
Other			
Power cable*1 Non-shielded, 3 m			

### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)		
					2.4GHz	5GHz Band 1	5GHz Band 4
1	ARISTOTLE	RFA-25-F90-1	Dipole Antenna	I-PEX	1.6	2	-
2	ARISTOTLE	RFA-25-F90-2	Dipole Antenna	I-PEX	2.25	1.74	-
3	ARISTOTLE	RFA-25-F90-3	Dipole Antenna	I-PEX	2.1	2.3	-
4	ARISTOTLE	RFA-25-F90-4	Dipole Antenna	I-PEX	2.22	1.77	-
5	ARISTOTLE	RFA-05-F90-1	Dipole Antenna	I-PEX	-	-	2.18
6	ARISTOTLE	RFA-05-F90-2	Dipole Antenna	I-PEX	-	-	2
7	ARISTOTLE	RFA-05-F90-3	Dipole Antenna	I-PEX	-	-	1.9
8	ARISTOTLE	RFA-05-F90-4	Dipole Antenna	I-PEX	-	-	1.9

Note: The EUT has eight antennas.

**For 2.4GHz / 5G Band 1 function:**

**For IEEE 802.11a/b/g/n/ac mode (4TX/4RX)**

Ant. 1, Ant. 2, Ant. 3 and Ant. 4 can be used as transmitting/receiving antenna.


Ant. 1, Ant. 2, Ant. 3 and Ant. 4 could transmit/receive simultaneously.

**For 5GHz Band 4 function:**

**For IEEE 802.11a/n/ac mode (4TX/4RX)**

Ant. 5, Ant. 6, Ant. 7 and Ant. 8 can be used as transmitting/receiving antenna.

Ant. 5, Ant. 6, Ant. 7 and Ant. 8 could transmit/receive simultaneously.

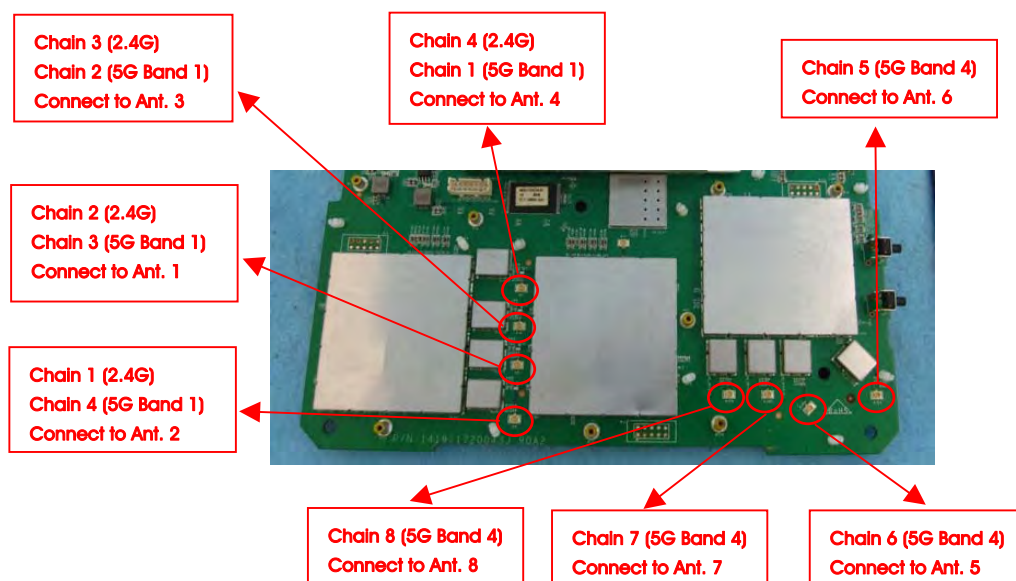



### 3.4. Table for Carrier Frequencies

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Link		-	-	-
Max. Conducted Output Power	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Power Spectral Density	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4

26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Radiated Emission Below 1GHz	Normal Link		-	-	-
Radiated Emission Above 1GHz	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Band Edge Emission	For non-beamforming mode				
	11a/BPSK	Band 1	6Mbps	36/40/48	1+2+3+4
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
	For beamforming mode				
	11ac VHT20	Band 1	MCS0/Nss1	36/40/48	1+2+3+4
	11ac VHT40	Band 1	MCS0/Nss1	38/46	1+2+3+4
	11ac VHT80	Band 1	MCS0/Nss1	42	1+2+3+4
Frequency Stability	20 MHz	Band 1	-	40	1
	40 MHz	Band 1	-	38	1
	80 MHz	Band 1	-	42	1

Note:

- There are two modes of EUT, one is beamforming mode, and the other is non-beamforming mode, Beamforming mode and non-beamforming mode has been test and record in this test report.
- VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link - Place EUT in Z axis

**For Radiated Emission test below 1GHz:**

Mode 1. Normal Link - Place EUT in Z axis

**For Radiated Emission test above 1GHz:**

Mode 1. CTX - Place EUT in Z axis

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function, 5GHz Band 1 WLAN function and 5G Band4 WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA: 581108) and Radiated Emission Co-location (please refer to Appendix C) tests are added for simultaneously transmit among 2.4GHz WLAN function and 5GHz Band 1 + Band4 WLAN function.

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

(Radiated Emission below 1GHz test)

Support Unit	Brand	Model	FCC ID
Notebook*5	DELL	E4300	DoC
Flash disk2.0	Transcend	JF700	DoC
Flash disk3.0	Transcend	JF700	DoC

(Radiated Emission above 1GHz test) (For Non-Beamforming mode)

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

**(Radiated Emission above 1GHz test) (For Beamforming mode)**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC
Notebook	DELL	E4300	DoC
RX Device	LINKSYS	EA9500	N/A

**For Test Site No: CO01-CB**

Support Unit	Brand	Model	FCC ID
Notebook*5	DELL	E6430	DoC
Flash disk2.0	Transcend	604108 8255	DoC
Flash disk3.0	ADATA	C103	DoC

**For Test Site No: TH01-CB**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

**3.8. Table for Parameters of Test Software Setting**

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For non-beamforming mode**

Test Software Version	Mtool 2.0.2.8		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11a	84	84	84
802.11ac MCS0/Nss1 VHT20	82	86	85
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	78	86	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	74		

#### For beamforming mode

Test Software Version	Mtool 2.0.2.8		
Mode	Test Frequency (MHz)		
	NCB: 20MHz		
	5180 MHz	5200 MHz	5240 MHz
802.11ac MCS0/Nss1 VHT20	79	79	79
Mode	NCB: 40MHz		
802.11ac MCS0/Nss1 VHT40	5190 MHz	5230 MHz	
	69	79	
Mode	NCB: 80MHz		
802.11ac MCS0/Nss1 VHT80	5210 MHz		
	68		

### 3.9. EUT Operation during Test

#### For non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

#### For beamforming mode:

For Conducted Mode:

The EUT was programmed to be in continuously transmitting mode.

For Radiated Mode:

During the test, the following programs under WIN XP were executed.

The program was executed as follows:

1. During the test, the EUT operation to normal function.
2. Executed command fixed test channel under DOS.
3. Executed "Lantest.exe " to link with the remote workstation to receive and transmit packet by RX Device and transmit duty cycle no less 98%

### 3.10. Duty Cycle

For non-beamforming mode:


Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.059	2.085	98.75%	0.05	0.01
802.11ac MCS0/Nss1 VHT20	1.922	1.954	98.36%	0.07	0.01
802.11ac MCS0/Nss1 VHT40	0.924	0.965	95.75%	0.19	1.08
802.11ac MCS0/Nss1 VHT80	0.427	0.486	87.86%	0.56	2.34

For beamforming mode:

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11ac MCS0/Nss1 VHT20	3.800	3.924	96.84%	0.14	0.26
802.11ac MCS0/Nss1 VHT40	4.560	4.704	96.94%	0.14	0.22
802.11ac MCS0/Nss1 VHT80	4.656	4.776	97.49%	0.11	0.21

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

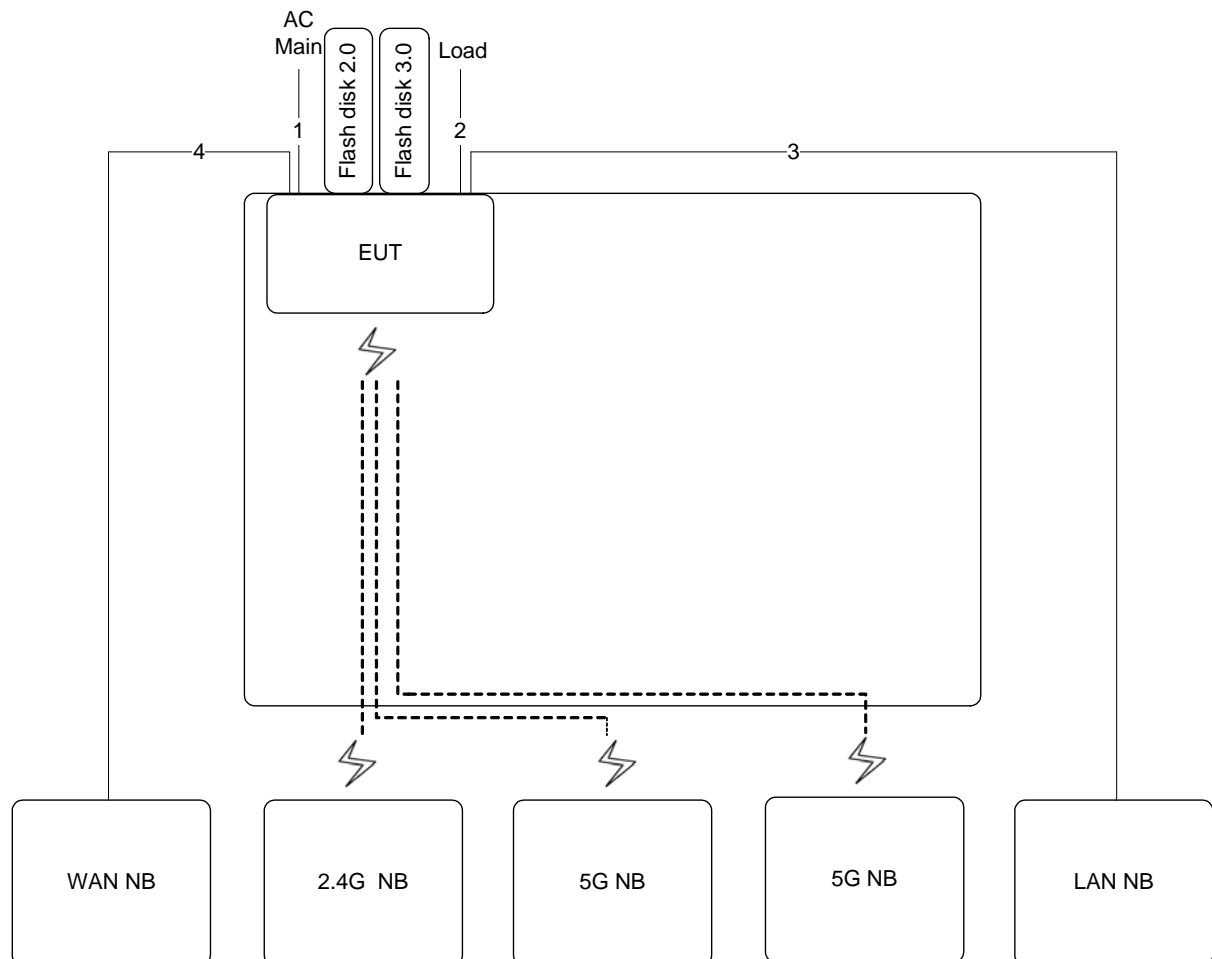

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable*7	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m

### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz ~1GHz

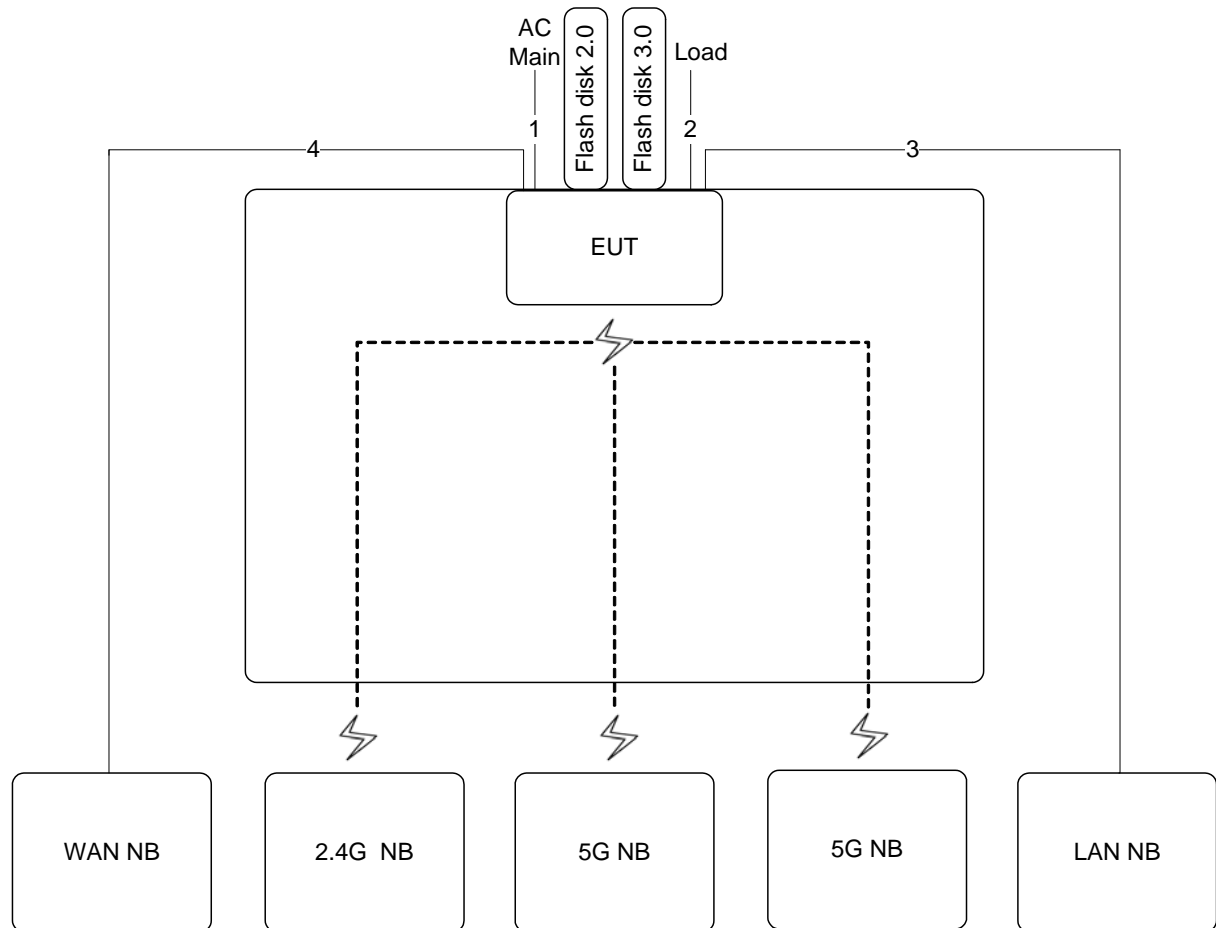


Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable*7	No	1.5m
3	RJ-45 cable	No	10m
4	RJ-45 cable	No	10m




Test Configuration: above 1GHz

For non-beamforming mode

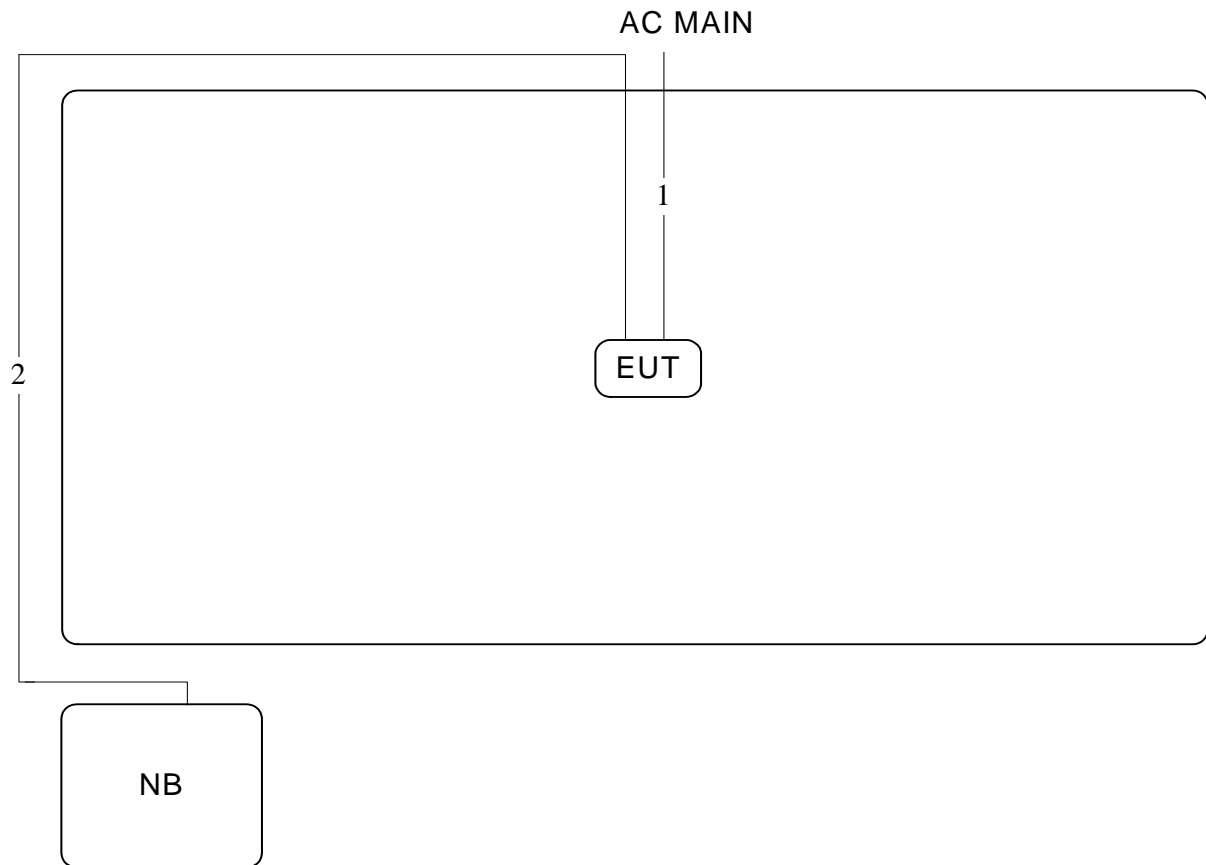

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m

For beamforming mode

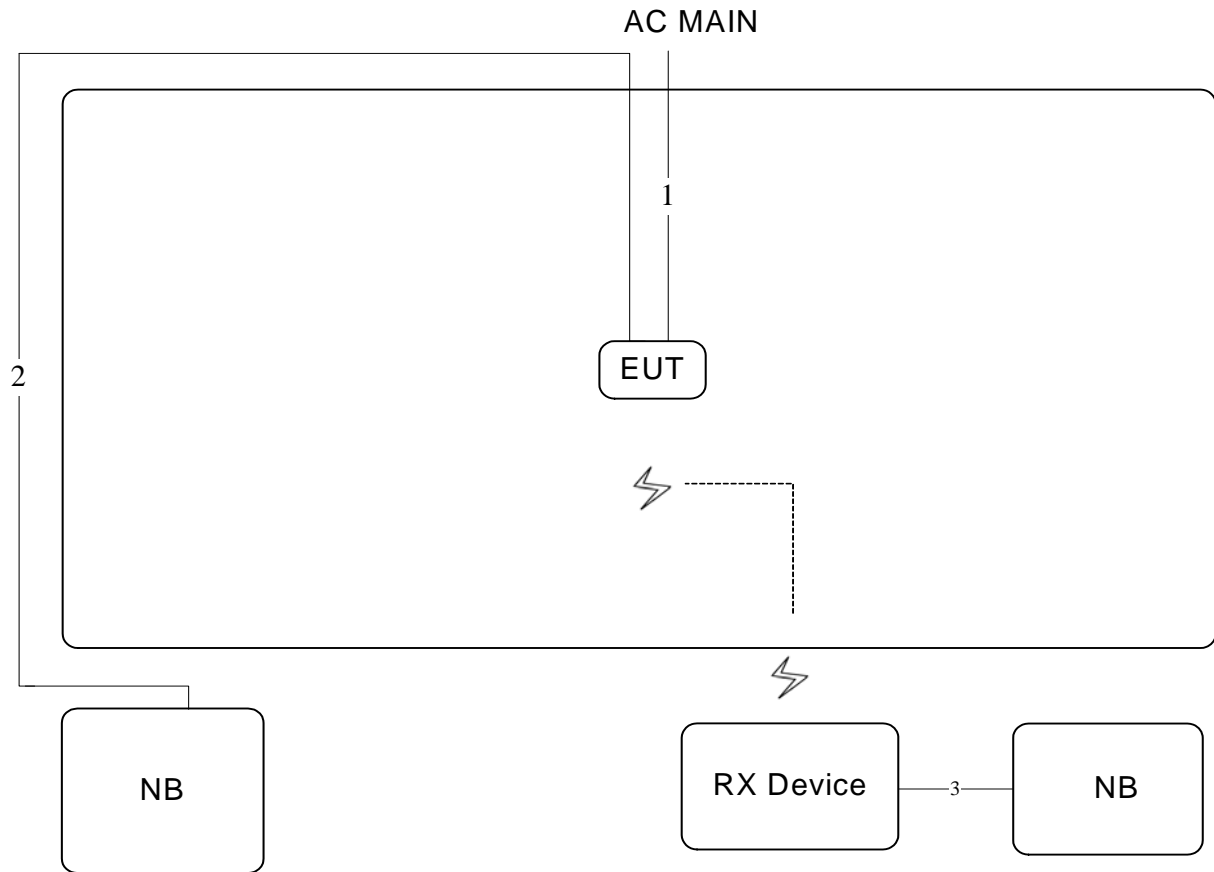

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

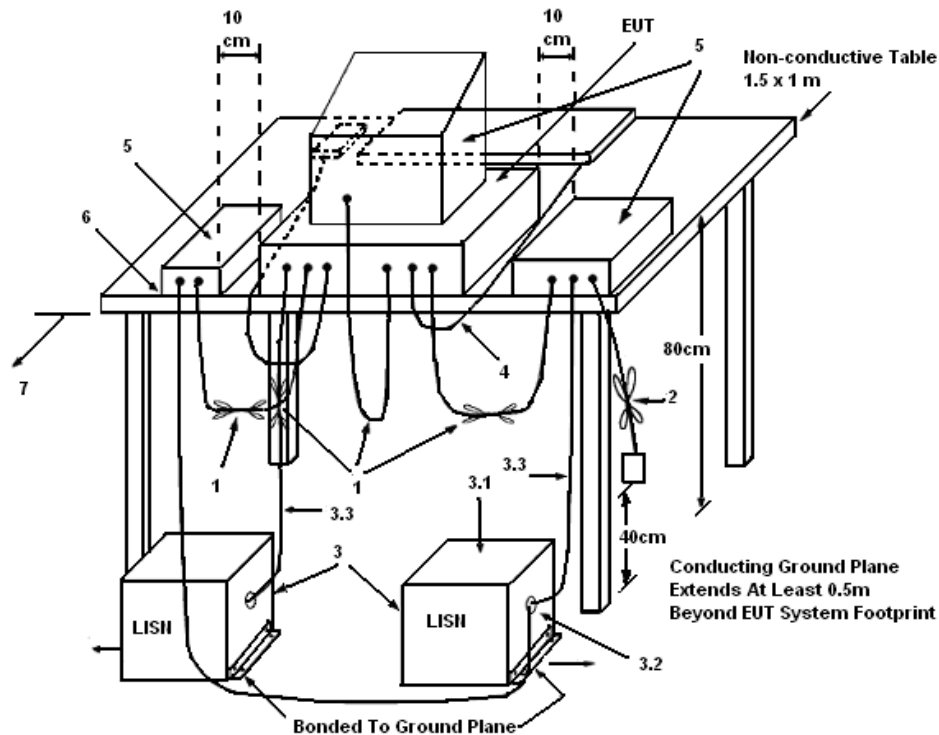

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	68%
Test Engineer	Sin Chang	Phase	Line
Configuration	Normal Link		

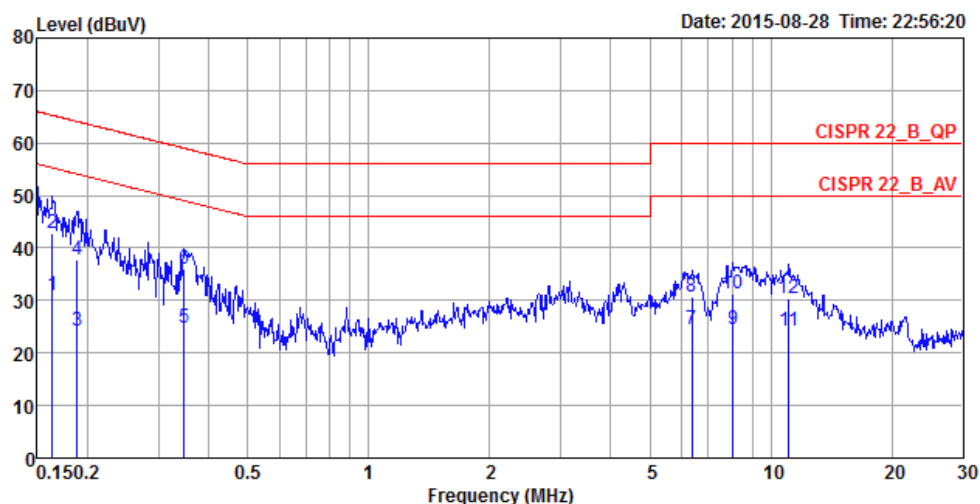

	Freq	Level	Over Limit	Limit Line	Read Level	LISM Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBUV	dB	dBUV	dBUV	dB	dB		
1	0.1633	31.05	-24.25	55.30	21.10	9.93	0.02	LINE	Average
2	0.1633	42.72	-22.58	65.30	32.77	9.93	0.02	LINE	QP
3	0.1884	24.23	-29.88	54.11	14.28	9.93	0.02	LINE	Average
4	0.1884	37.89	-26.22	64.11	27.94	9.93	0.02	LINE	QP
5	0.3483	24.93	-24.07	49.00	14.96	9.93	0.04	LINE	Average
6	0.3483	36.10	-22.90	59.00	26.13	9.93	0.04	LINE	QP
7	6.3521	24.43	-25.57	50.00	14.20	10.10	0.13	LINE	Average
8	6.3521	30.74	-29.26	60.00	20.51	10.10	0.13	LINE	QP
9	8.0624	24.48	-25.52	50.00	14.17	10.14	0.17	LINE	Average
10	8.0624	31.31	-28.69	60.00	21.00	10.14	0.17	LINE	QP
11	11.0797	24.25	-25.75	50.00	13.79	10.22	0.24	LINE	Average
12	11.0797	30.46	-29.54	60.00	20.00	10.22	0.24	LINE	QP

Temperature	24°C	Humidity	68%
Test Engineer	Sin Chang	Phase	Neutral
Configuration	Normal Link		

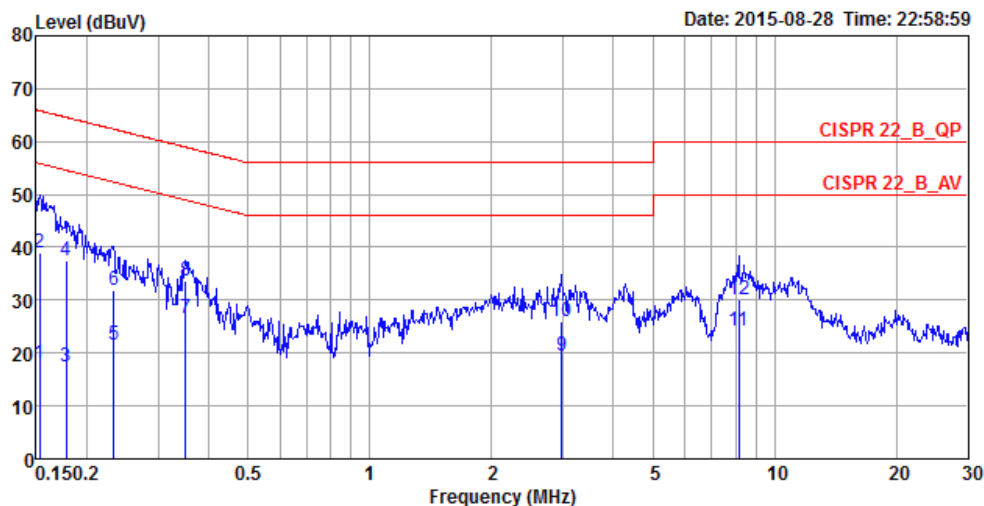

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1532	17.93	-37.89	55.82	8.13	9.78	0.02	NEUTRAL	Average
2	0.1532	38.98	-26.84	65.82	29.18	9.78	0.02	NEUTRAL	QP
3	0.1777	17.37	-37.22	54.59	7.56	9.79	0.02	NEUTRAL	Average
4	0.1777	37.53	-27.06	64.59	27.72	9.79	0.02	NEUTRAL	QP
5	0.2329	21.43	-30.92	52.35	11.61	9.79	0.03	NEUTRAL	Average
6	0.2329	31.95	-30.40	62.35	22.13	9.79	0.03	NEUTRAL	QP
7	0.3502	26.60	-22.36	48.96	16.77	9.79	0.04	NEUTRAL	Average
8	0.3502	33.71	-25.25	58.96	23.88	9.79	0.04	NEUTRAL	QP
9	2.9776	19.44	-26.56	46.00	9.53	9.86	0.05	NEUTRAL	Average
10	2.9776	25.96	-30.04	56.00	16.05	9.86	0.05	NEUTRAL	QP
11	8.1483	24.15	-25.85	50.00	13.99	9.98	0.18	NEUTRAL	Average
12	8.1483	30.04	-29.96	60.00	19.88	9.98	0.18	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. 26dB Bandwidth and 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.  
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

For Radiated 26dB Bandwidth and 99% Occupied Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 26dB Bandwidth and 99% Occupied Bandwidth

Temperature	25°C	Humidity	56%
Test Engineer	Eddie Weng		

##### For Non-beamforming mode

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180 MHz	21.48	18.32
	5200 MHz	21.30	18.06
	5240 MHz	21.57	18.49
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.48	18.06
	5200 MHz	21.39	18.15
	5240 MHz	21.22	18.15
802.11ac MCS0/Nss1 VHT40	5190 MHz	40.44	35.89
	5230 MHz	40.58	36.18
802.11ac MCS0/Nss1 VHT80	5210 MHz	80.29	74.10


##### For beamforming mode

Mode	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.57	18.06
	5200 MHz	21.48	18.06
	5240 MHz	21.65	17.97
802.11ac MCS0/Nss1 VHT40	5190 MHz	40.29	36.61
	5230 MHz	40.44	36.76
802.11ac MCS0/Nss1 VHT80	5210 MHz	80.58	75.54




For Non-beamforming mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5180 MHz

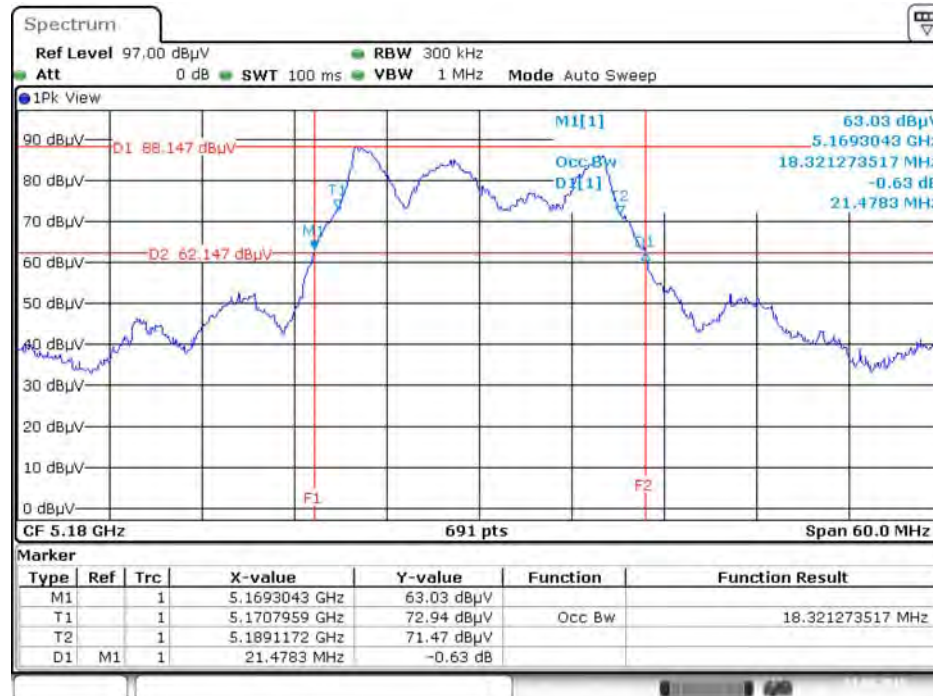


Date: 3.SEP.2015 15:19:25

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5200 MHz

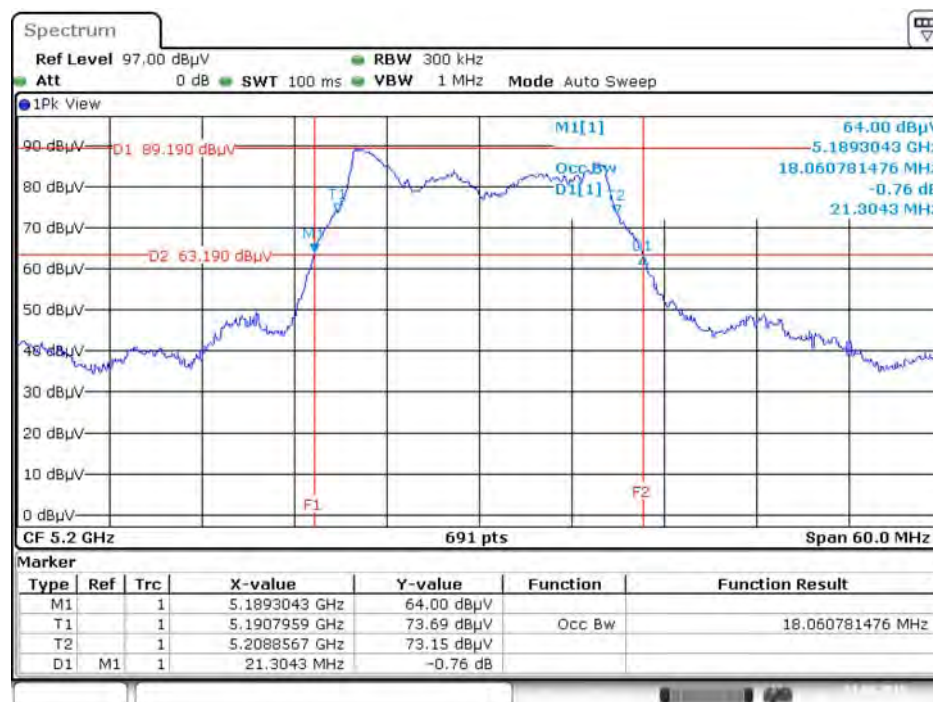


Date: 3.SEP.2015 15:19:56

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5240 MHz

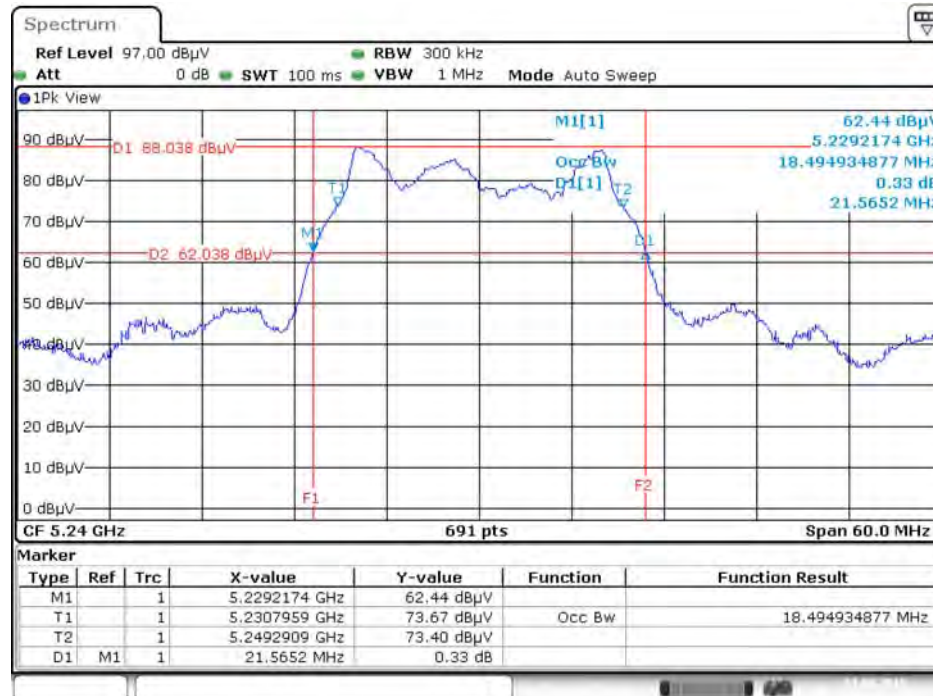


Date: 3.SEP.2015 15:20:29

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5180 MHz

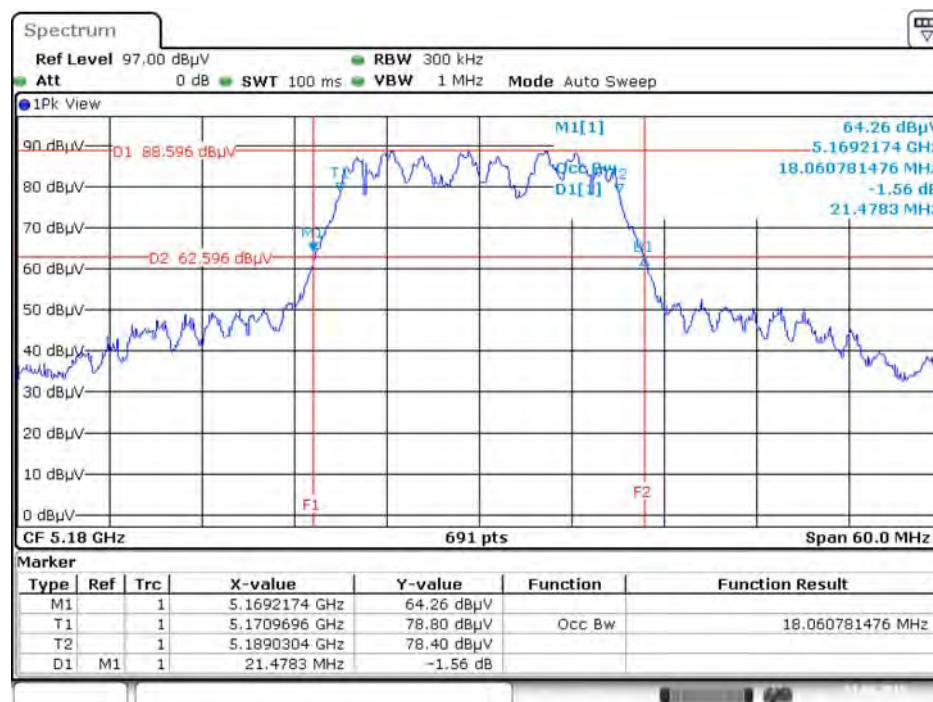


Date: 3.SEP.2015 15:21:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5200 MHz

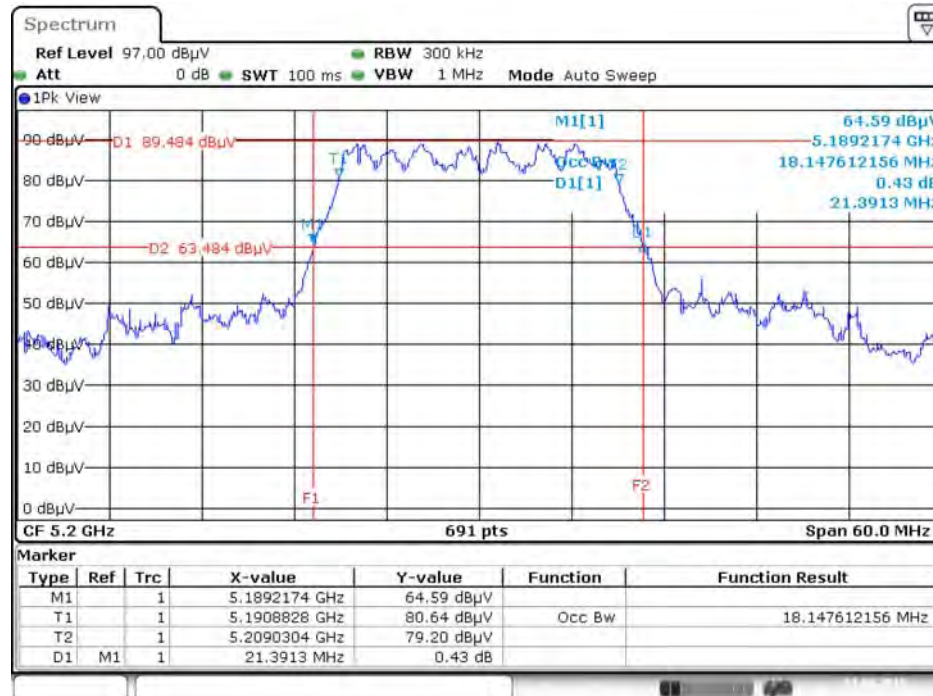

Date: 3.SEP.2015 15:21:58


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5240 MHz

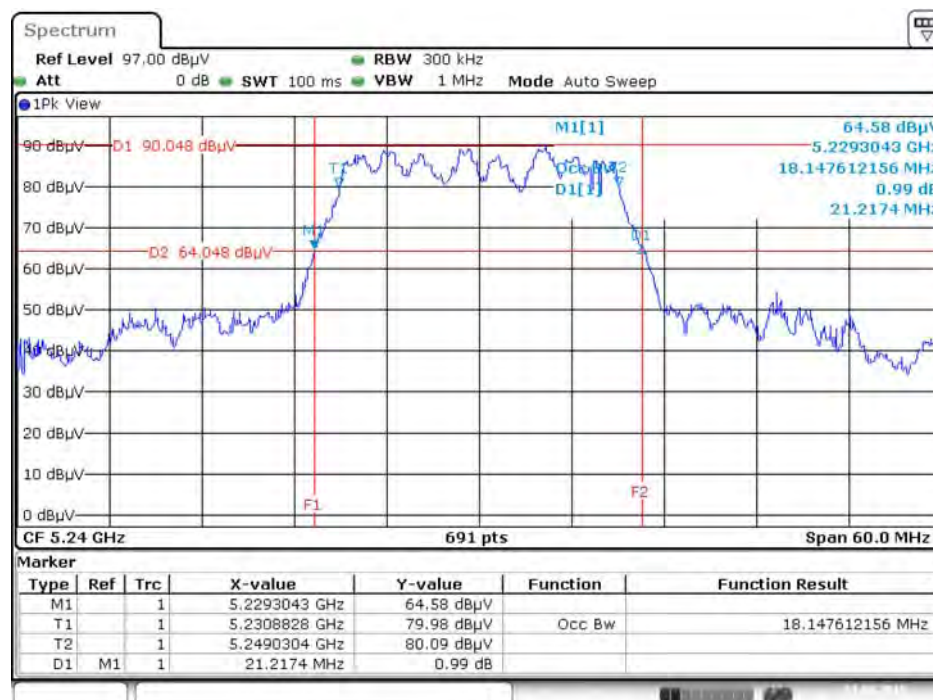

Date: 3.SEP.2015 15:22:36




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5190 MHz

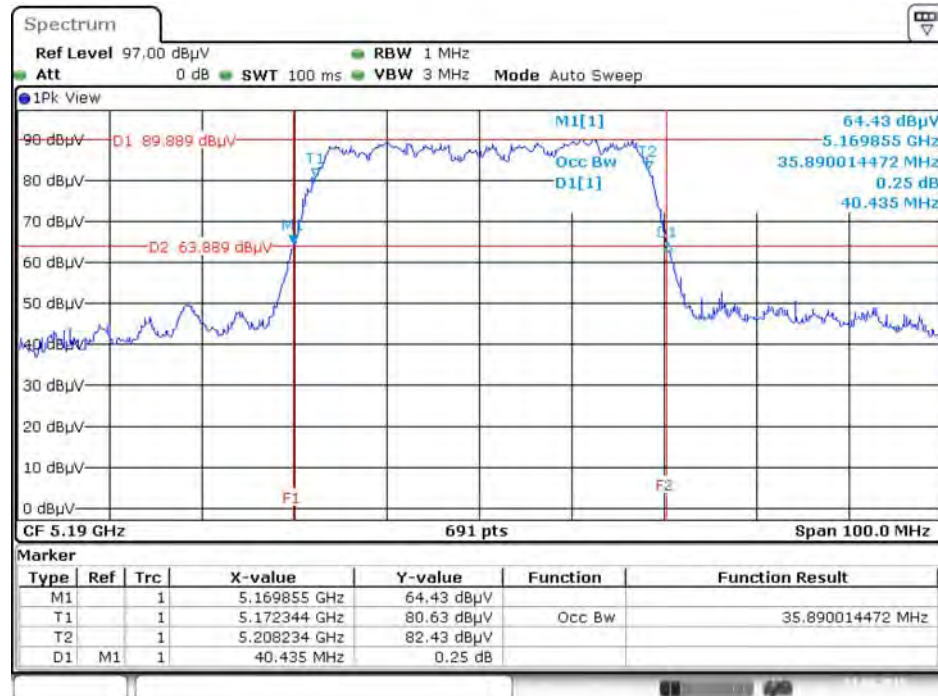


Date: 3.SEP.2015 15:23:27

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5230 MHz

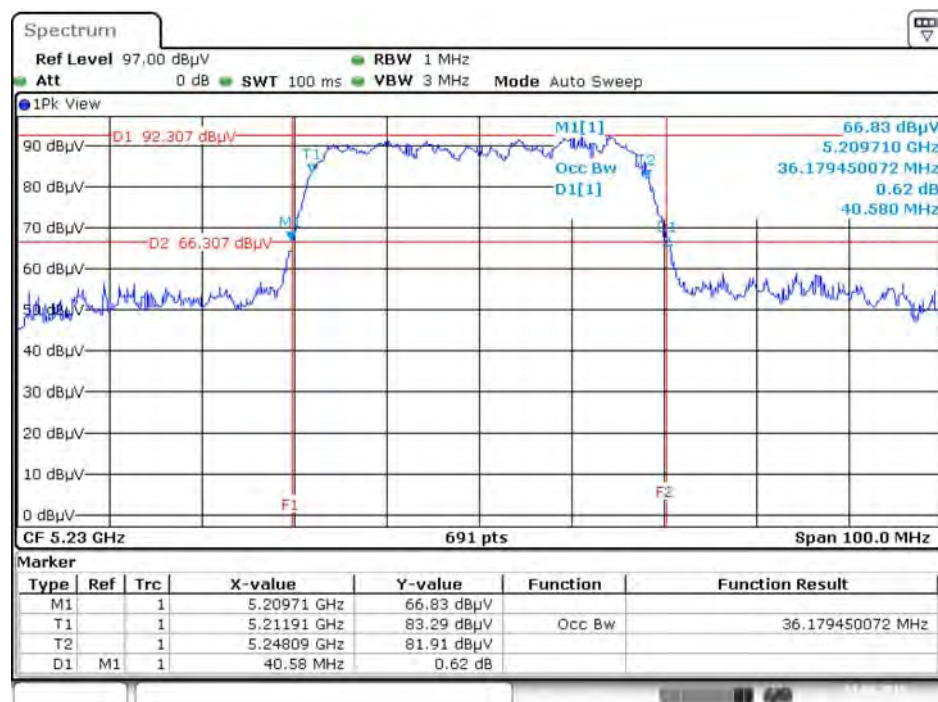

Date: 3.SEP.2015 15:23:57


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5210 MHz

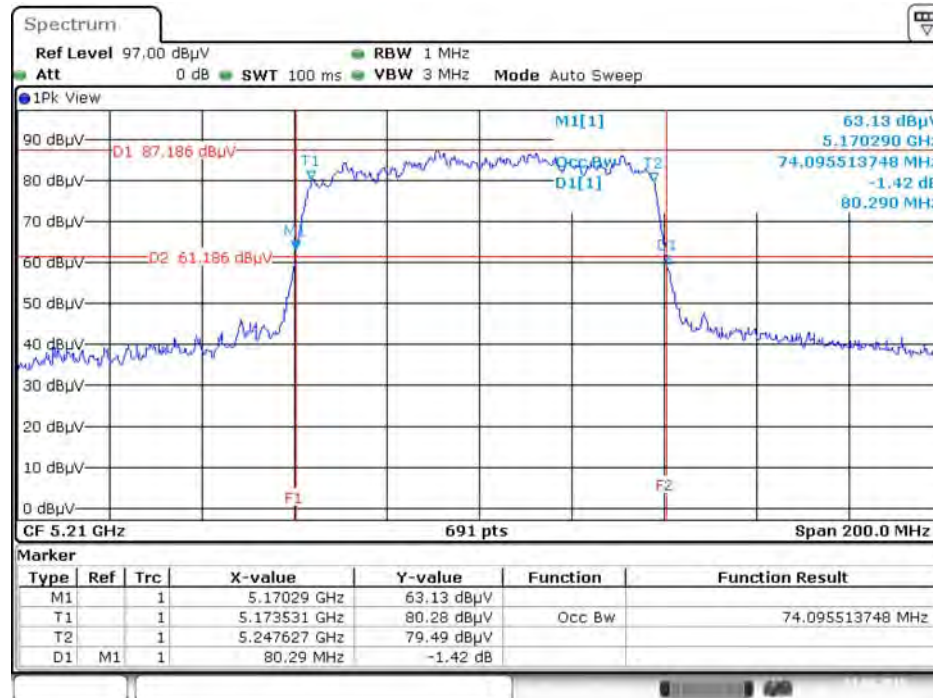

Date: 3.SEP.2015 15:25:01


For beamforming mode

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5180 MHz

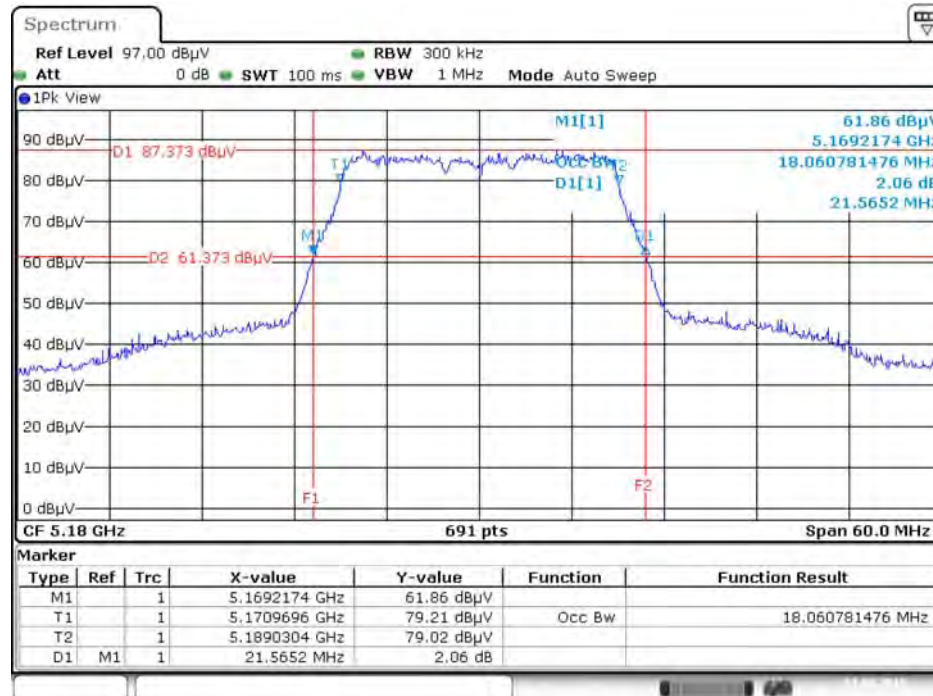


Date: 3.SEP.2015 15:28:13

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5200 MHz

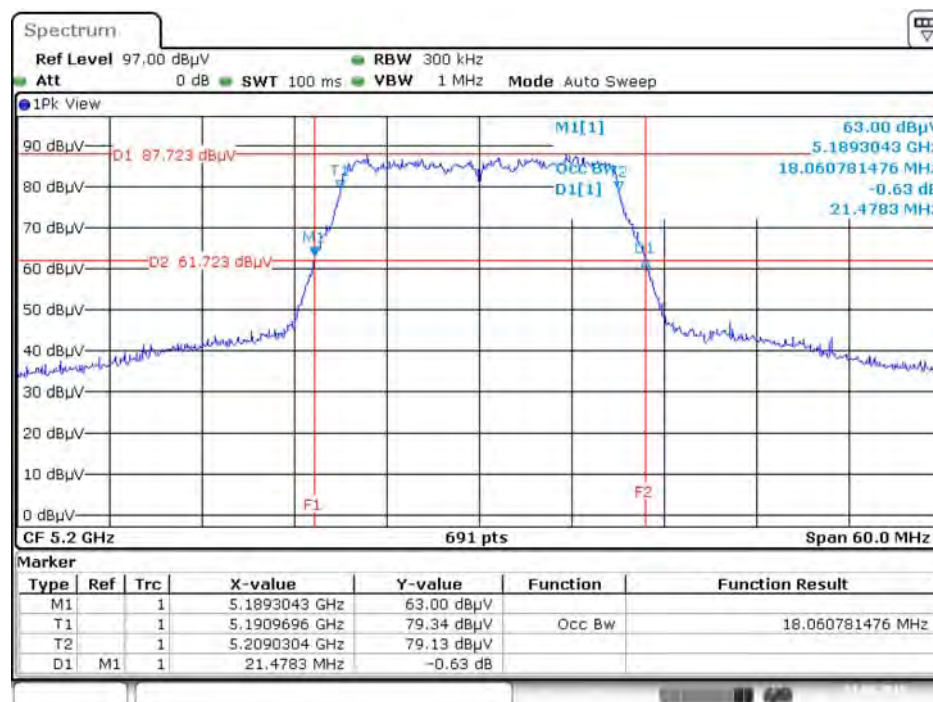


Date: 3.SEP.2015 15:28:41

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5240 MHz

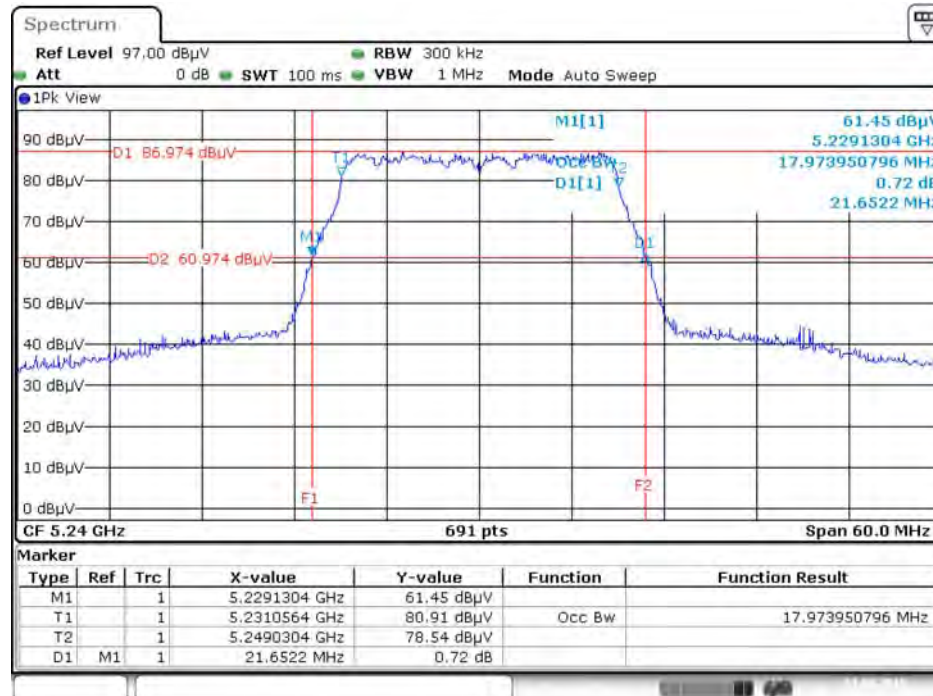

Date: 3.SEP.2015 15:29:10


26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5190 MHz

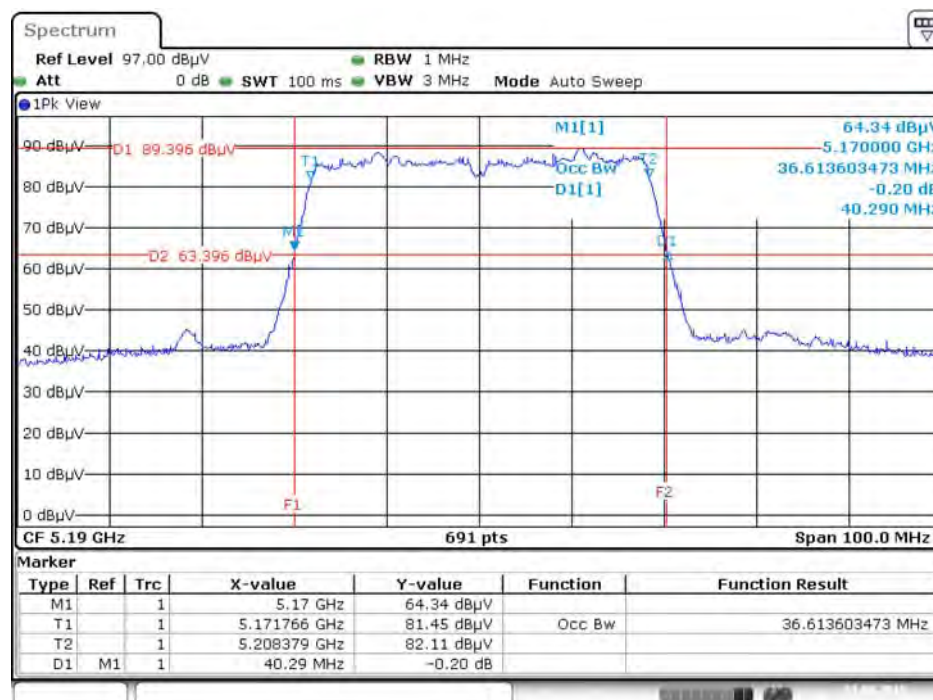

Date: 3.SEP.2015 15:30:04




26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5230 MHz

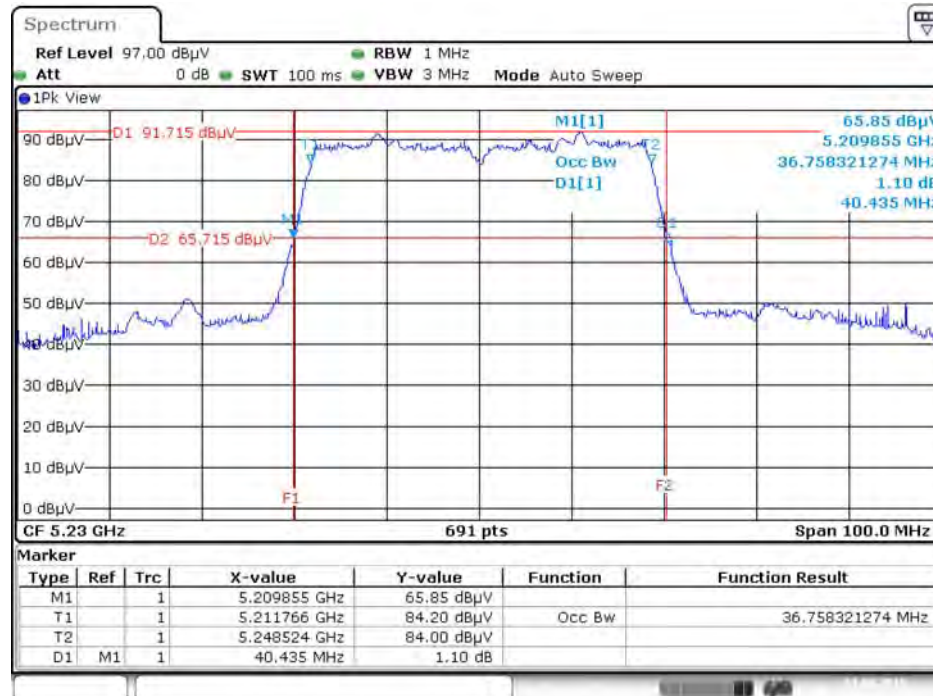

Date: 3.SEP.2015 15:30:39

26dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 /  
Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5210 MHz

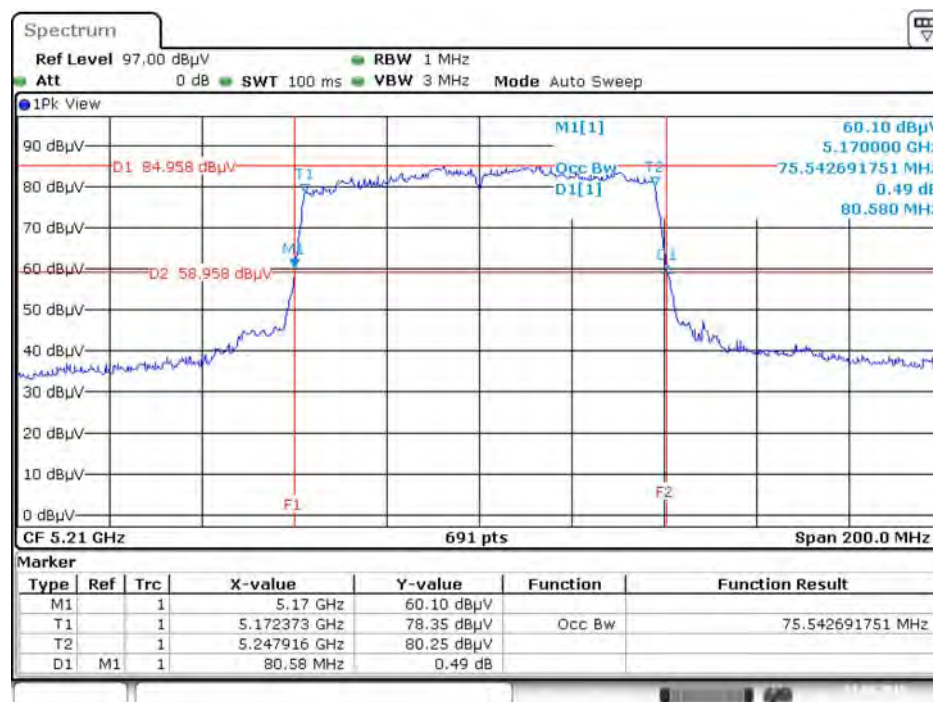

Date: 3.SEP.2015 15:32:41



### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
<input checked="" type="checkbox"/>	Indoor access point	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
<input type="checkbox"/>	Fixed point-to-point access points	The maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm). Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.
<input type="checkbox"/>	Mobile and portable client devices	The maximum conducted output power over the frequency band of operation shall not exceed 250 mW (24dBm) provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (E) Maximum conducted output power =>3. Measurement using a Power Meter (PM) =>b) Method PM-G (Measurement using a gated RF average power meter).
3. Multiple antenna systems was performed in accordance with KDB662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	56%
Test Engineer	Eddie Weng	Test Date	Aug. 26, 2015 ~ Sep. 03, 2015

For Non-beamforming mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 3	Antenna 4	Total		
802.11a	5180 MHz	22.25	21.84	21.68	21.99	27.97	30.00	Complies
	5200 MHz	22.28	22.26	21.97	21.37	28.01	30.00	Complies
	5240 MHz	23.69	22.84	22.11	20.66	28.48	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	22.12	21.65	21.04	21.67	27.66	30.00	Complies
	5200 MHz	23.06	22.48	22.51	21.78	28.50	30.00	Complies
	5240 MHz	23.62	22.71	22.12	20.88	28.46	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	21.32	20.25	20.04	20.34	26.54	30.00	Complies
	5230 MHz	23.76	22.95	22.26	21.41	28.70	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	20.07	20.13	19.11	18.90	25.61	30.00	Complies

Note: Gain = 2.30dBi < 6dBi, so the limit doesn't reduce.

## For beamforming mode

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Antenna 1	Antenna 2	Antenna 3	Antenna 4	Total		
802.11ac MCS0/Nss1 VHT20	5180 MHz	21.06	20.83	20.45	21.11	26.89	28.02	Complies
	5200 MHz	21.16	20.78	20.84	20.38	26.82	28.02	Complies
	5240 MHz	21.94	21.27	20.64	19.53	26.95	28.02	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	18.67	18.08	18.26	18.11	24.31	28.02	Complies
	5230 MHz	21.62	20.99	20.78	19.45	26.80	28.02	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	18.12	18.15	18.13	17.68	24.04	28.02	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ASK}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.98\text{dBi}$ , so limit=30-(7.98-6)=28.02dBm

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Band		Limit
5.15~5.25 GHz		
Operating Mode		
<input type="checkbox"/>	Outdoor access point	17 dBm/MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm/MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm/MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm/MHz

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB789033 D02 v01 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - section (F) Maximum Power Spectral Density (PSD).
3. Multiple antenna systems was performed in accordance KDB662911 D01 v02r01 in-Band Power Spectral Density (PSD) Measurements (a) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

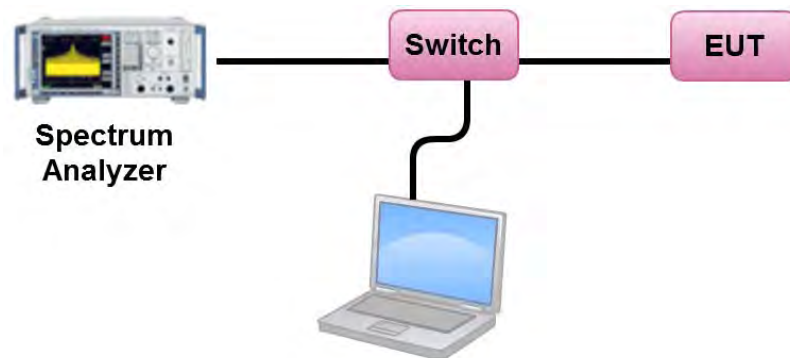

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	56%
Test Engineer	Eddie Weng	Test Date	Aug. 26, 2015 ~ Sep. 03, 2015

For Non-beamforming mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	5180 MHz	14.75	15.02	Complies
	5200 MHz	14.81	15.02	Complies
	5240 MHz	14.97	15.02	Complies
802.11ac MCS0/Nss1 VHT20	5180 MHz	14.27	15.02	Complies
	5200 MHz	14.97	15.02	Complies
	5240 MHz	14.98	15.02	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	10.20	15.02	Complies
	5230 MHz	12.29	15.02	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	6.30	15.02	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ANT}} \left\{ \sum_{k=1}^{N_{ASST}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 7.98\text{dBi}$ , so limit=17-(7.98-6)=15.02dBm/MHz.

### For beamforming mode

Mode	Frequency	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11ac MCS0/Nss1 VHT20	5180 MHz	13.54	15.02	Complies
	5200 MHz	13.58	15.02	Complies
	5240 MHz	13.49	15.02	Complies
802.11ac MCS0/Nss1 VHT40	5190 MHz	7.97	15.02	Complies
	5230 MHz	10.40	15.02	Complies
802.11ac MCS0/Nss1 VHT80	5210 MHz	4.84	15.02	Complies

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{ant}} \left\{ \sum_{k=1}^{N_{sub}} g_{j,k} \right\}^2}{N_{ant}} \right] = 7.98\text{dBi}$ , so limit=17-(7.98-6)=15.02dBm/MHz.


Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




For Non-beamforming mode


Power Density Plot on Configuration IEEE 802.11a / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4  
/ 5240MHz

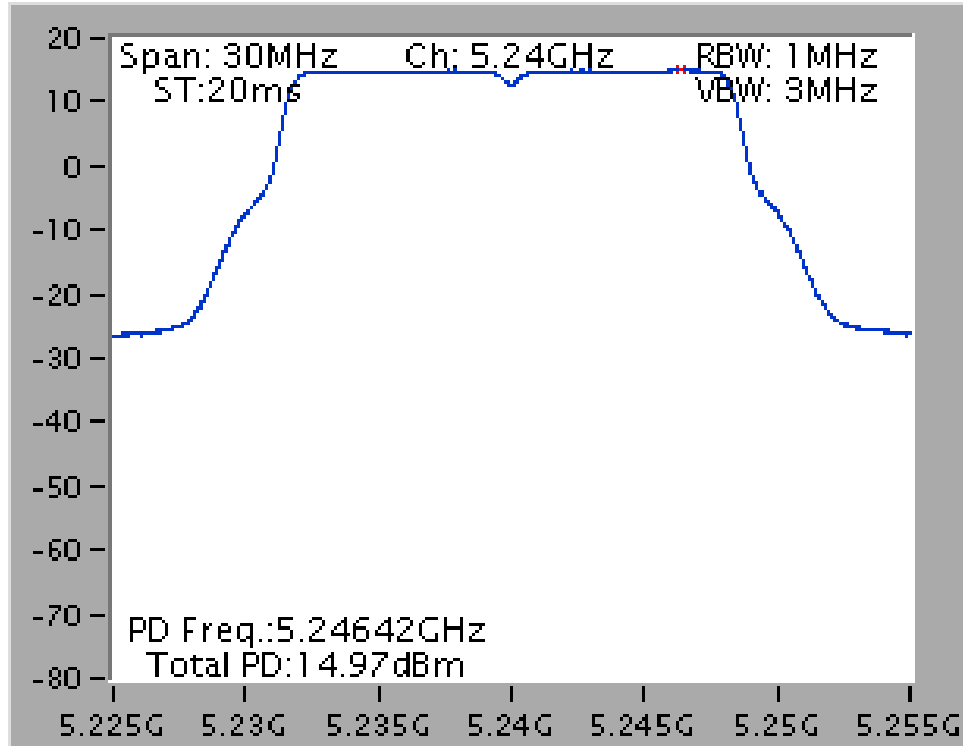


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Antenna 1 + Antenna 2 +  
Antenna 3 + Antenna 4 / 5240 MHz

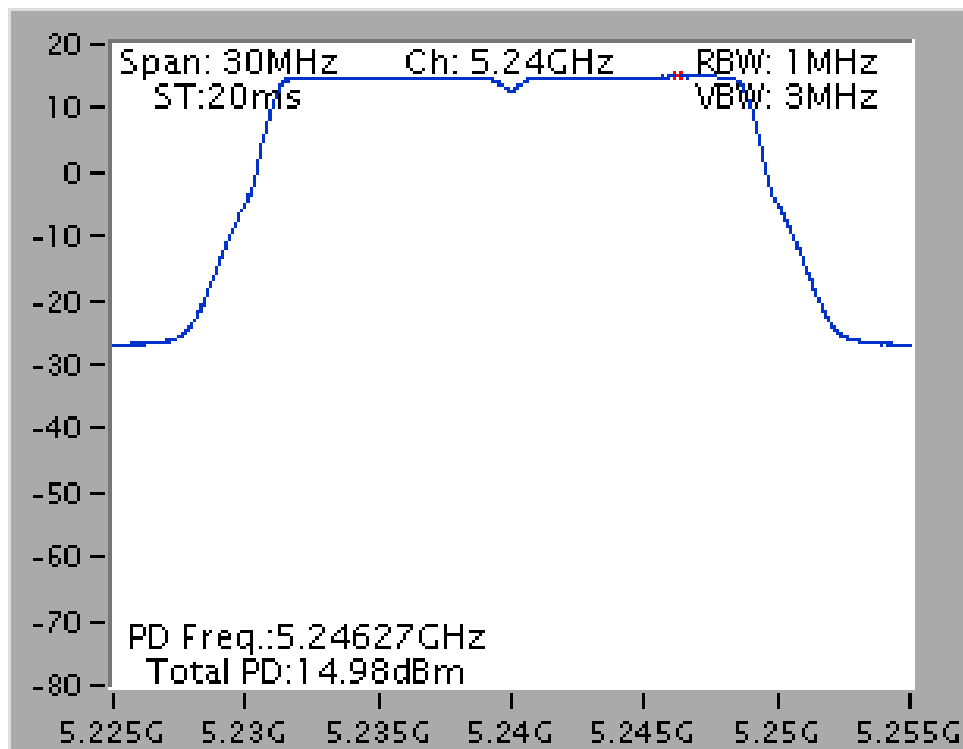

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5230 MHz

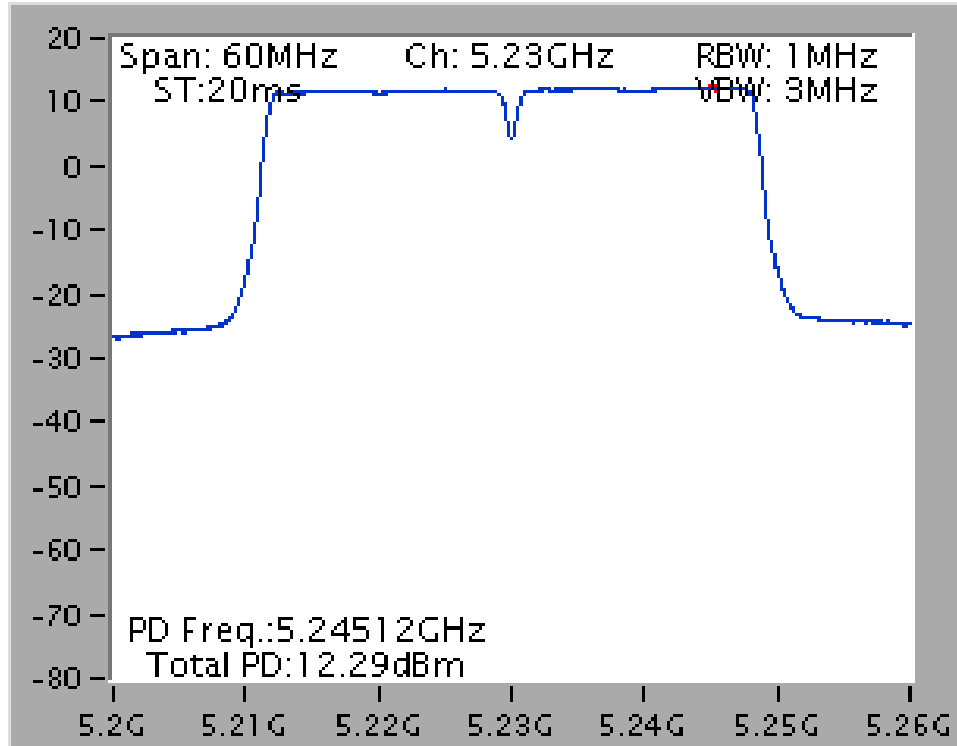


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5210 MHz

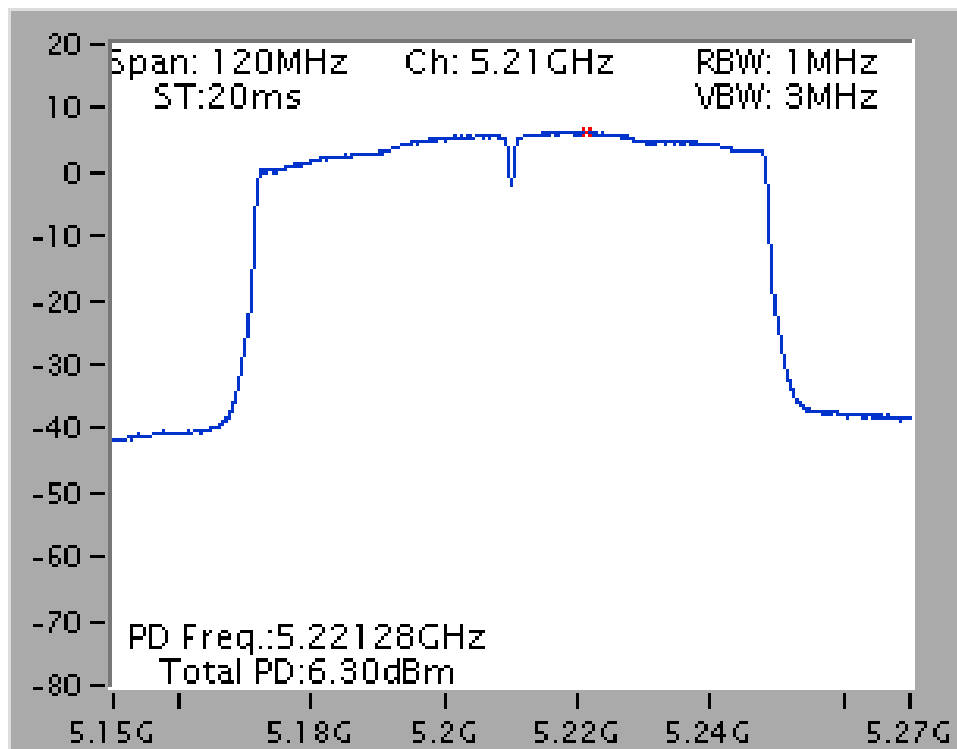


For beamforming mode


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5200 MHz

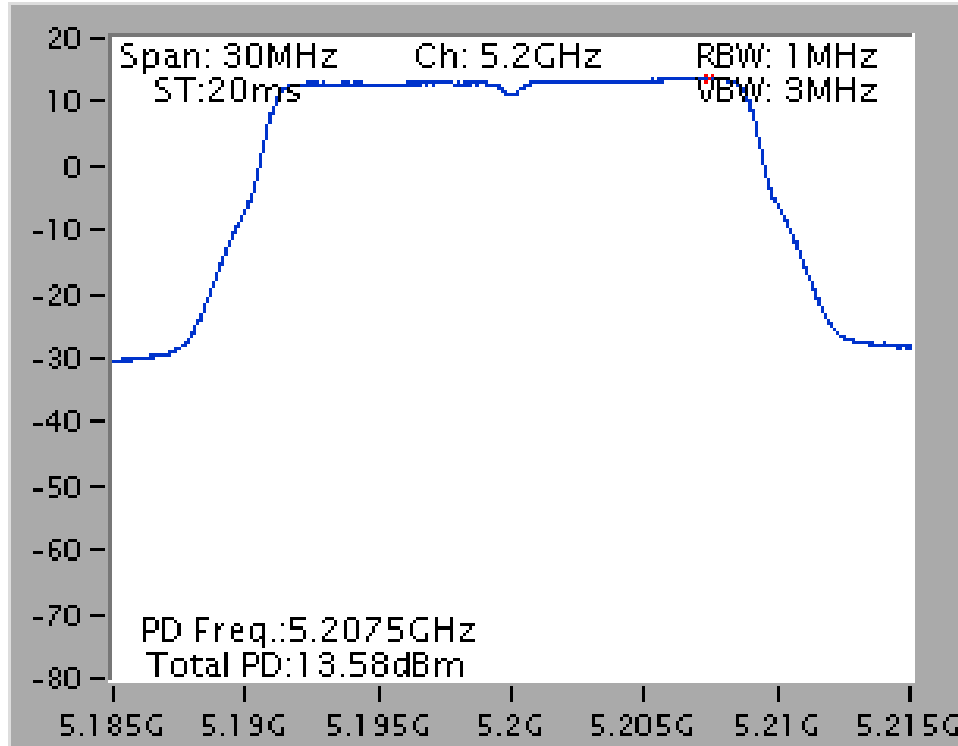

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4 / 5230 MHz

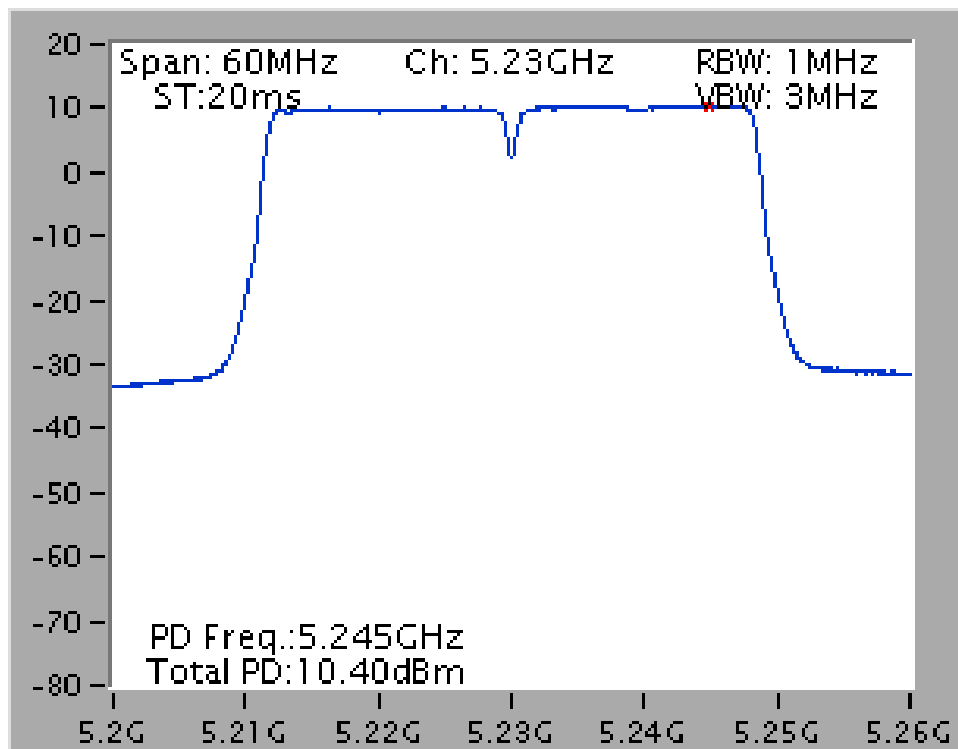

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Antenna 1 + Antenna 2 +  
Antenna 3 + Antenna 4 / 5210 MHz

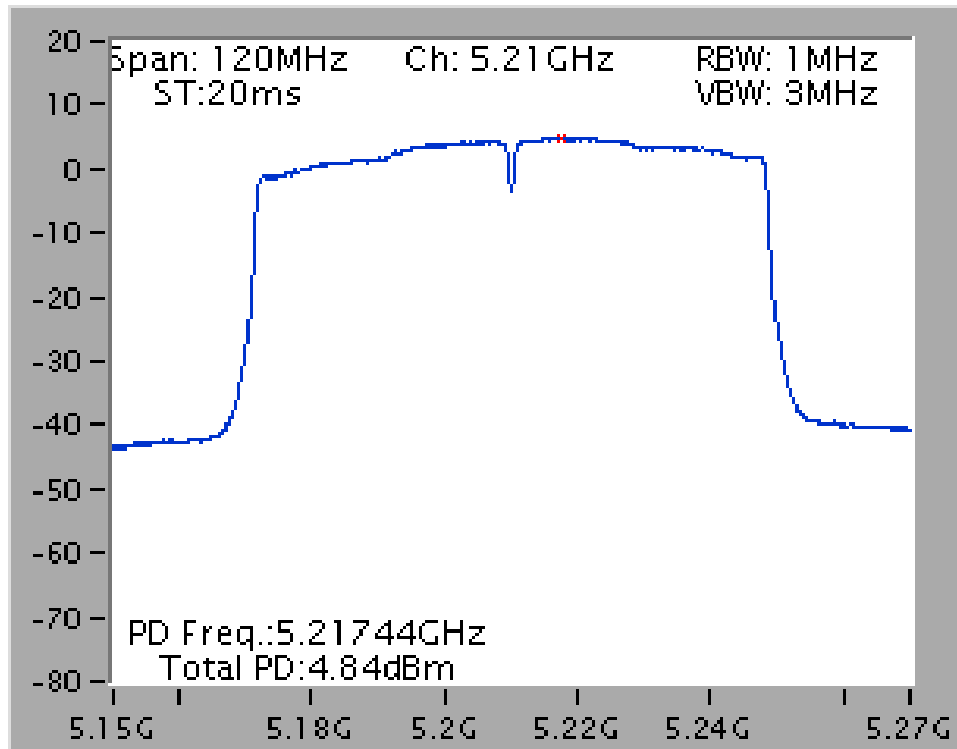

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

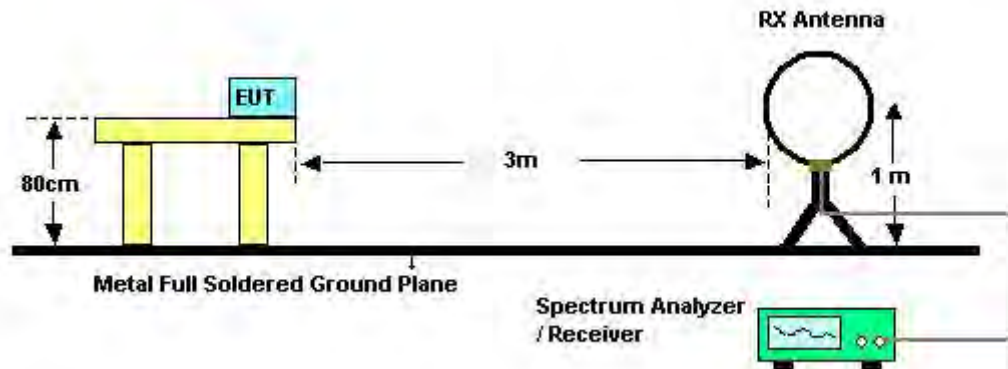

For Radiated Emissions: 30MHz~1GHz

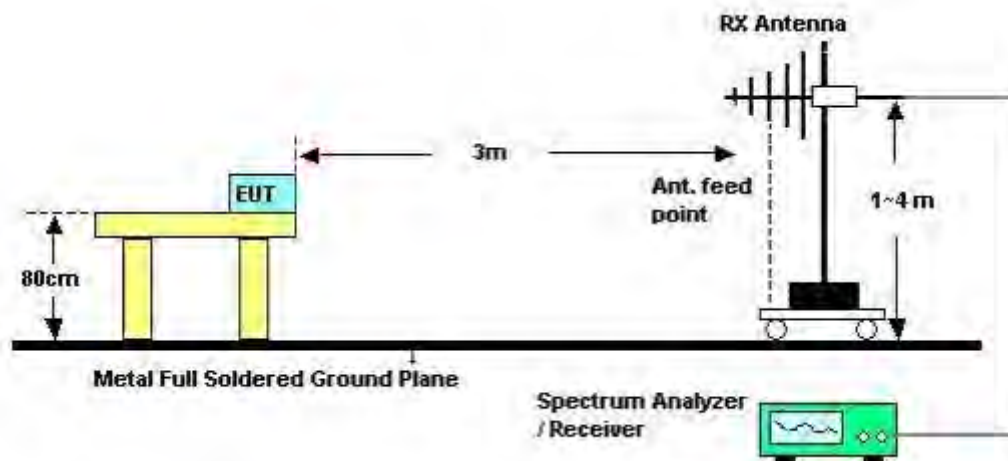

For Radiated Emissions: Above 1GHz

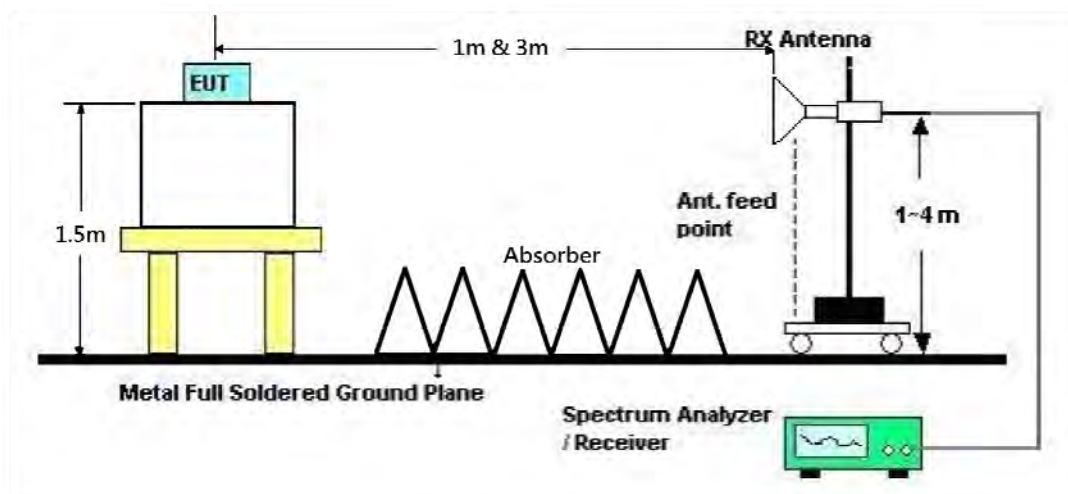

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.



#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	Normal Link
Test Date	Sep. 02, 2015		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	Normal Link

##### Horizontal

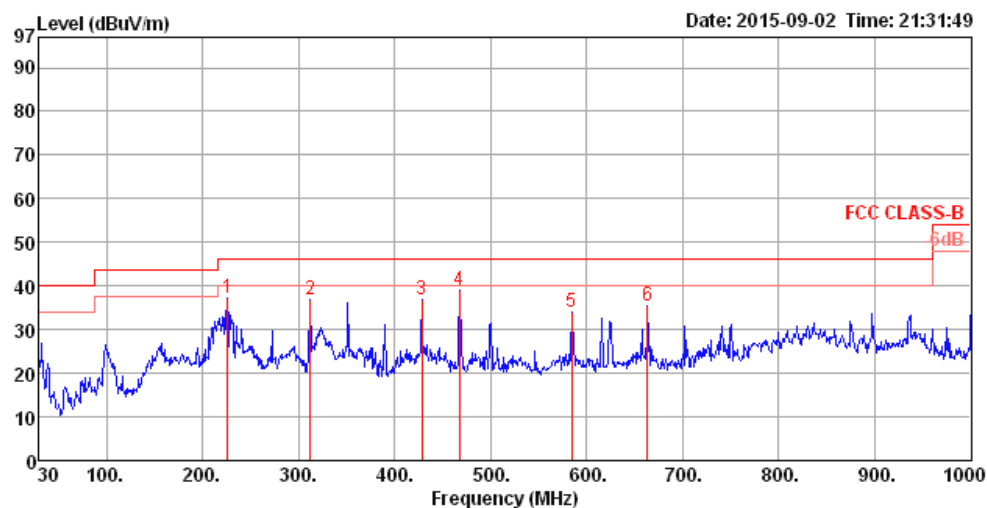

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	225.94	37.16	46.00	-8.84	54.69	1.82	10.87	30.22	100	0	HORIZONTAL	Peak
2	312.27	36.84	46.00	-9.16	49.93	2.16	14.15	29.40	100	0	HORIZONTAL	Peak
3	428.67	36.80	46.00	-9.20	45.30	2.58	16.85	27.93	100	0	HORIZONTAL	Peak
4	467.47	38.88	46.00	-7.12	46.18	2.70	17.39	27.39	100	0	HORIZONTAL	Peak
5	584.84	33.91	46.00	-12.09	39.75	3.07	18.91	27.82	100	0	HORIZONTAL	Peak
6	663.41	35.60	46.00	-10.40	40.69	3.30	19.53	27.92	100	0	HORIZONTAL	Peak

## Vertical

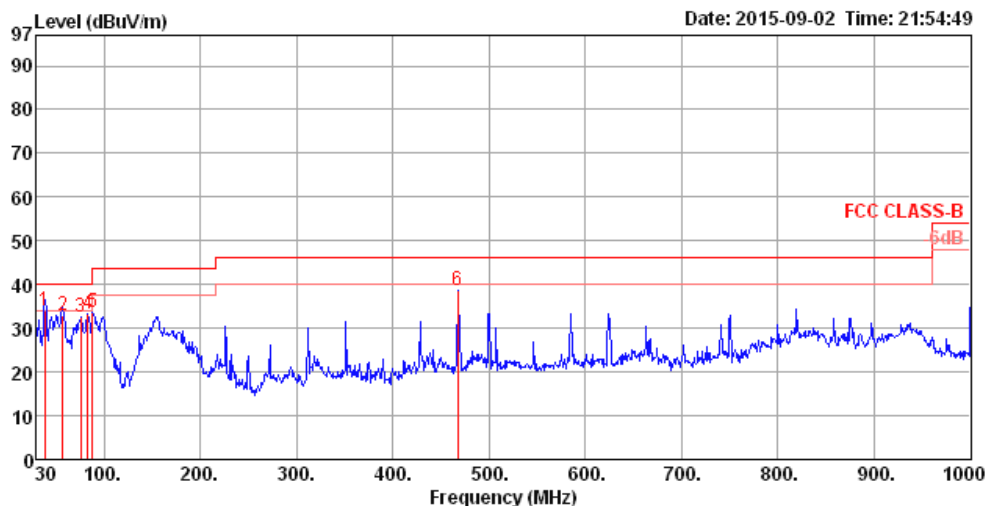

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	38.73	33.89	40.00	-6.11	42.56	0.73	14.61	24.01	150	286 VERTICAL	QP
2	57.16	32.75	40.00	-7.25	49.24	0.88	7.37	24.74	150	232 VERTICAL	QP
3	75.59	32.71	40.00	-7.29	49.94	1.02	7.16	25.41	200	0 VERTICAL	Peak
4	83.35	33.30	40.00	-6.70	49.79	1.07	8.07	25.63	200	0 VERTICAL	Peak
5	87.99	33.51	40.00	-6.49	49.27	1.11	8.89	25.76	200	0 VERTICAL	Peak
6	467.47	38.70	46.00	-7.30	46.00	2.70	17.39	27.39	200	0 VERTICAL	Peak

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~40GHz)

For non-beamforming mode

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 36 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.41	44.53	54.00	-9.47	30.71	10.77	38.25	35.20 Average	150	256	HORIZONTAL
2	15542.21	57.72	74.00	-16.28	43.90	10.77	38.25	35.20 Peak	150	256	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15538.04	44.99	54.00	-9.01	31.17	10.77	38.25	35.20 Average	150	261	VERTICAL
2	15541.23	57.95	74.00	-16.05	44.13	10.77	38.25	35.20 Peak	150	261	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 40 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15600.53	43.86	54.00	-10.14	30.16	10.78	38.16	35.24	Average	150	355 HORIZONTAL
2	15600.95	56.60	74.00	-17.40	42.90	10.78	38.16	35.24	Peak	150	355 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15600.35	43.75	54.00	-10.25	30.05	10.78	38.16	35.24	Average	150	331 VERTICAL
2	15600.54	56.18	74.00	-17.82	42.48	10.78	38.16	35.24	Peak	150	331 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15717.70	43.51	54.00	-10.49	30.01	10.79	37.99	35.28	Average	150	244 HORIZONTAL
2	15721.82	57.05	74.00	-16.95	43.55	10.79	37.99	35.28	Peak	150	244 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	Line	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
			dBuV/m	dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15719.03	43.65	54.00	-10.35	30.15	10.79	37.99	35.28	Average	150	204 VERTICAL
2	15721.57	56.55	74.00	-17.45	43.05	10.79	37.99	35.28	Peak	150	204 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.52	44.39	54.00	-9.61	30.57	10.77	38.25	35.20 Average	157	118	HORIZONTAL
2	15540.63	57.74	74.00	-16.26	43.92	10.77	38.25	35.20 Peak	157	118	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15539.87	44.22	54.00	-9.78	30.40	10.77	38.25	35.20 Average	157	178	VERTICAL
2	15541.17	57.85	74.00	-16.15	44.03	10.77	38.25	35.20 Peak	157	178	VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15598.64	57.01	74.00	-16.99	43.29	10.78	38.16	35.22	Peak	157	217 HORIZONTAL
2	15600.96	44.86	54.00	-9.14	31.16	10.78	38.16	35.24	Average	157	217 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			Pol/Phase
1	15601.27	44.29	54.00	-9.71	30.59	10.78	38.16	35.24	Average	157	178 VERTICAL
2	15601.46	57.49	74.00	-16.51	43.79	10.78	38.16	35.24	Peak	157	178 VERTICAL



Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15570.40	57.03	74.00	-16.97	43.26	10.78	38.20	35.21	Peak	154	236 HORIZONTAL
2	15571.23	43.99	54.00	-10.01	30.22	10.78	38.20	35.21	Average	154	236 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15718.77	56.51	74.00	-17.49	43.01	10.79	37.99	35.28	Peak	157	196 VERTICAL
2	15719.34	43.65	54.00	-10.35	30.15	10.79	37.99	35.28	Average	157	196 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15570.40	57.03	74.00	-16.97	43.26	10.78	38.20	35.21	Peak	154	236 HORIZONTAL
2	15571.23	43.99	54.00	-10.01	30.22	10.78	38.20	35.21	Average	154	236 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15570.20	43.98	54.00	-10.02	30.21	10.78	38.20	35.21	Average	154	210 VERTICAL
2	15572.49	57.20	74.00	-16.80	43.43	10.78	38.20	35.21	Peak	154	210 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15688.15	56.31	74.00	-17.69	42.76	10.79	38.03	35.27	Peak	154	305 HORIZONTAL
2	15690.28	43.74	54.00	-10.26	30.19	10.79	38.03	35.27	Average	154	305 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15688.04	43.50	54.00	-10.50	29.95	10.79	38.03	35.27	Average	154	165 VERTICAL
2	15690.74	57.22	74.00	-16.78	43.67	10.79	38.03	35.27	Peak	154	165 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15629.85	43.85	54.00	-10.15	30.21	10.78	38.11	35.25 Average	154	98	HORIZONTAL
2	15631.07	56.76	74.00	-17.24	43.12	10.78	38.11	35.25 Peak	154	98	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15627.59	44.72	54.00	-9.28	31.06	10.78	38.13	35.25 Average	154	182	VERTICAL
2	15631.81	57.23	74.00	-16.77	43.59	10.78	38.11	35.25 Peak	154	182	VERTICAL

## For beamforming mode

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

## Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15536.77	44.88	54.00	-9.12	31.06	10.77	38.25	35.20	Average	208	118 HORIZONTAL
2	15536.83	57.41	74.00	-16.59	43.59	10.77	38.25	35.20	Peak	208	118 HORIZONTAL

## Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15538.34	44.62	54.00	-9.38	30.80	10.77	38.25	35.20	Average	140	312 VERTICAL
2	15544.79	57.03	74.00	-16.97	43.22	10.78	38.23	35.20	Peak	140	312 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 40 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15599.02	44.10	54.00	-9.90	30.40	10.78	38.16	35.24	Average	177	192 HORIZONTAL
2	15603.58	56.53	74.00	-17.47	42.83	10.78	38.16	35.24	Peak	177	192 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15595.77	56.64	74.00	-17.36	42.92	10.78	38.16	35.22	Peak	134	85 VERTICAL
2	15604.99	43.89	54.00	-10.11	30.19	10.78	38.16	35.24	Average	134	85 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15720.20	44.04	54.00	-9.96	30.54	10.79	37.99	35.28	Average	192	328 HORIZONTAL
2	15724.08	57.15	74.00	-16.85	43.65	10.79	37.99	35.28	Peak	192	328 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
1	15719.19	44.72	54.00	-9.28	31.22	10.79	37.99	35.28	Average	163	202 VERTICAL
2	15723.21	57.21	74.00	-16.79	43.71	10.79	37.99	35.28	Peak	163	202 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15566.96	44.00	54.00	-10.00	30.23	10.78	38.20	35.21	Average	170	148 HORIZONTAL
2	15574.18	57.74	74.00	-16.26	43.98	10.78	38.20	35.22	Peak	170	148 HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg
				dB	dBuV	dB	dB/m	dB			
1	15565.05	44.31	54.00	-9.69	30.54	10.78	38.20	35.21	Average	184	113 VERTICAL
2	15566.76	57.80	74.00	-16.20	44.03	10.78	38.20	35.21	Peak	184	113 VERTICAL



Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 46 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

#### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15691.39	57.93	74.00	-16.07	44.38	10.79	38.03	35.27	Peak	140	140	HORIZONTAL
2	15692.43	44.13	54.00	-9.87	30.58	10.79	38.03	35.27	Average	140	140	HORIZONTAL

#### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	15689.81	57.25	74.00	-16.75	43.70	10.79	38.03	35.27	Peak	166	257 VERTICAL
2	15692.78	44.19	54.00	-9.81	30.64	10.79	38.03	35.27	Average	166	257 VERTICAL

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 25, 2015		

#### Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15631.03	43.81	54.00	-10.19	30.17	10.78	38.11	35.25	Average	149	238	HORIZONTAL
2	15632.63	56.62	74.00	-17.38	42.98	10.78	38.11	35.25	Peak	149	238	HORIZONTAL

#### Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Remark	cm	deg	Pol/Phase
1	15629.54	57.35	74.00	-16.65	43.71	10.78	38.11	35.25	Peak	171	74	VERTICAL
2	15633.71	43.66	54.00	-10.34	30.02	10.78	38.11	35.25	Average	171	74	VERTICAL

#### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Band Edge Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	1 MHz / 3MHz for Peak

### 4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3.

### 4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

For Non-beamforming mode:

The EUT was programmed to be in continuously transmitting mode.

For beamforming mode:

The EUT was programmed to be in beamforming transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

For non-beamforming mode

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11a CH 36, 40, 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 21, 2015		

##### Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5147.80	52.96	54.00	-1.04	47.79	6.13	34.04	35.00	Average	150	241	VERTICAL
2	5149.00	68.36	74.00	-5.64	63.19	6.13	34.04	35.00	Peak	150	241	VERTICAL
3	5186.80	117.73			112.49	6.15	34.09	35.00	Peak	150	241	VERTICAL
4	5187.20	107.28			102.04	6.15	34.09	35.00	Average	150	241	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

##### Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5127.20	49.16	54.00	-4.84	44.03	6.12	34.01	35.00	Average	193	242	VERTICAL
2	5149.60	63.04	74.00	-10.96	57.87	6.13	34.04	35.00	Peak	193	242	VERTICAL
3	5207.20	109.42			104.14	6.16	34.12	35.00	Average	193	242	VERTICAL
4	5207.20	119.31			114.03	6.16	34.12	35.00	Peak	193	242	VERTICAL
5	5362.40	51.02	54.00	-2.98	45.36	6.27	34.39	35.00	Average	193	242	VERTICAL
6	5362.40	61.70	74.00	-12.30	56.04	6.27	34.39	35.00	Peak	193	242	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

##### Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5074.40	60.26	74.00	-13.74	55.25	6.09	33.93	35.01	Peak	206	253	VERTICAL
2	5076.80	48.31	54.00	-5.69	43.30	6.09	33.93	35.01	Average	206	253	VERTICAL
3	5236.80	112.05			106.70	6.18	34.17	35.00	Average	206	253	VERTICAL
4	5237.60	122.16			116.81	6.18	34.17	35.00	Peak	206	253	VERTICAL
5	5350.00	47.13	54.00	-6.87	41.51	6.26	34.36	35.00	Average	206	253	VERTICAL
6	5355.20	59.17	74.00	-14.83	53.55	6.26	34.36	35.00	Peak	206	253	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Channel 36

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	5148.40	52.96	54.00	-1.04	47.79	6.13	34.04	35.00	Average	187	241	VERTICAL
2	5148.60	66.17	74.00	-7.83	61.00	6.13	34.04	35.00	Peak	187	241	VERTICAL
3	5178.80	117.02			111.78	6.15	34.09	35.00	Peak	187	241	VERTICAL
4	5183.60	105.66			100.42	6.15	34.09	35.00	Average	187	241	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

#### Channel 40

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	5148.00	65.55	74.00	-8.45	60.38	6.13	34.04	35.00	Peak	182	242	VERTICAL
2	5150.00	49.56	54.00	-4.44	44.39	6.13	34.04	35.00	Average	182	242	VERTICAL
3	5204.00	108.88			103.60	6.16	34.12	35.00	Average	182	242	VERTICAL
4	5204.00	120.44			115.16	6.16	34.12	35.00	Peak	182	242	VERTICAL
5	5352.80	50.62	54.00	-3.38	45.00	6.26	34.36	35.00	Average	182	242	VERTICAL
6	5354.40	61.45	74.00	-12.55	55.83	6.26	34.36	35.00	Peak	182	242	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

#### Channel 48

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg	
1	5087.20	48.27	54.00	-5.73	43.26	6.09	33.93	35.01	Average	198	257	VERTICAL
2	5087.20	60.56	74.00	-13.44	55.55	6.09	33.93	35.01	Peak	198	257	VERTICAL
3	5232.80	110.35			105.00	6.18	34.17	35.00	Average	198	257	VERTICAL
4	5232.80	120.18			114.83	6.18	34.17	35.00	Peak	198	257	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5146.80	52.85	54.00	-1.15	47.68	6.13	34.04	35.00	Average	150	186	VERTICAL
2	5147.20	65.61	74.00	-8.39	60.44	6.13	34.04	35.00	Peak	150	186	VERTICAL
3	5207.20	102.58			97.30	6.16	34.12	35.00	Average	150	186	VERTICAL
4	5207.60	112.25			106.93	6.17	34.15	35.00	Peak	150	186	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

#### Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5086.80	52.92	54.00	-1.08	47.91	6.09	33.93	35.01	Average	203	257	VERTICAL
2	5147.60	65.32	74.00	-8.68	60.15	6.13	34.04	35.00	Peak	203	257	VERTICAL
3	5227.60	117.47			112.12	6.18	34.17	35.00	Peak	203	257	VERTICAL
4	5232.40	107.32			101.97	6.18	34.17	35.00	Average	203	257	VERTICAL
5	5372.40	51.84	54.00	-2.16	46.18	6.27	34.39	35.00	Average	203	257	VERTICAL
6	5377.20	61.76	74.00	-12.24	56.09	6.27	34.39	34.99	Peak	203	257	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	5149.00	52.84	54.00	-1.16	47.67	6.13	34.04	35.00	Average	155	241	VERTICAL
2	5149.00	63.41	74.00	-10.59	58.24	6.13	34.04	35.00	Peak	155	241	VERTICAL
3	5209.00	101.43			96.11	6.17	34.15	35.00	Average	155	241	VERTICAL
4	5209.00	110.53			105.21	6.17	34.15	35.00	Peak	155	241	VERTICAL
5	5354.00	51.55	54.00	-2.45	45.93	6.26	34.36	35.00	Average	155	241	VERTICAL
6	5355.00	61.72	74.00	-12.28	56.10	6.26	34.36	35.00	Peak	155	241	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.



## For beamforming mode

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 36, 40, 48 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

## Channel 36

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5147.11	65.49	74.00	-8.51	60.32	6.13	34.04	35.00	Peak	201	0 VERTICAL
2	5148.84	52.83	54.00	-1.17	47.66	6.13	34.04	35.00	Average	201	0 VERTICAL
3	5177.40	107.66			102.42	6.15	34.09	35.00	Average	201	0 VERTICAL
4	5179.71	118.27			113.03	6.15	34.09	35.00	Peak	201	0 VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

## Channel 40

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5125.98	64.43	74.00	-9.57	59.30	6.12	34.01	35.00	Peak	186	360 VERTICAL
2	5143.92	51.94	54.00	-2.06	46.77	6.13	34.04	35.00	Average	186	360 VERTICAL
3	5191.90	111.33			106.05	6.16	34.12	35.00	Average	186	360 VERTICAL
4	5206.08	120.87			115.59	6.16	34.12	35.00	Peak	186	360 VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

## Channel 48

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5147.83	62.34	74.00	-11.66	57.17	6.13	34.04	35.00	Peak	203	0 VERTICAL
2	5149.57	49.54	54.00	-4.46	44.37	6.13	34.04	35.00	Average	203	0 VERTICAL
3	5234.36	111.56			106.21	6.18	34.17	35.00	Average	203	0 VERTICAL
4	5235.66	121.66			116.31	6.18	34.17	35.00	Peak	203	0 VERTICAL
5	5350.00	48.72	54.00	-5.28	43.10	6.26	34.36	35.00	Average	203	0 VERTICAL
6	5353.47	61.06	74.00	-12.94	55.44	6.26	34.36	35.00	Peak	203	0 VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 38, 46 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Channel 38

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5149.71	66.04	74.00	-7.96	60.87	6.13	34.04	35.00	Peak	199	0 VERTICAL
2	5150.00	52.89	54.00	-1.11	47.72	6.13	34.04	35.00	Average	199	0 VERTICAL
3	5178.71	101.87			96.63	6.15	34.09	35.00	Average	199	0 VERTICAL
4	5179.58	112.22			106.98	6.15	34.09	35.00	Peak	199	0 VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

#### Channel 46

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	Remark	cm	deg
1	5144.93	64.95	74.00	-9.05	59.78	6.13	34.04	35.00	Peak	194	360 VERTICAL
2	5149.28	52.63	54.00	-1.37	47.46	6.13	34.04	35.00	Average	194	360 VERTICAL
3	5234.34	106.49			101.14	6.18	34.17	35.00	Average	194	360 VERTICAL
4	5234.34	117.59			112.24	6.18	34.17	35.00	Peak	194	360 VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Temperature	25°C	Humidity	58%
Test Engineer	Alvin Li	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 42 / Antenna 1 + Antenna 2 + Antenna 3 + Antenna 4
Test Date	Aug. 22, 2015		

#### Channel 42

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	Remark	cm	deg	
1	5145.66	64.70	74.00	-9.30	59.53	6.13	34.04	35.00	Peak	190	360	VERTICAL
2	5147.83	52.78	54.00	-1.22	47.61	6.13	34.04	35.00	Average	190	360	VERTICAL
3	5205.66	99.96			94.68	6.16	34.12	35.00	Average	190	360	VERTICAL
4	5212.89	109.82			104.50	6.17	34.15	35.00	Peak	190	360	VERTICAL
5	5352.89	50.83	54.00	-3.17	45.21	6.26	34.36	35.00	Average	190	360	VERTICAL
6	5356.51	62.82	74.00	-11.18	57.20	6.26	34.36	35.00	Peak	190	360	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.7. Frequency Stability Measurement

### 4.7.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.7.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.7.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f)/f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
7. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
8. Extreme temperature is  $-20^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.7.4. Test Setup Layout

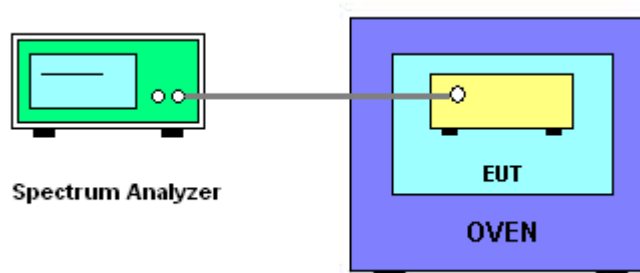

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.7.7. Test Result of Frequency Stability

Temperature	25°C	Humidity	56%
Test Engineer	Eddie Weng	Test Date	Aug. 26, 2015 ~ Sep. 03, 2015

Mode: 20 MHz / Antenna 1

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5199.9899	5199.9886	5199.9870	5199.9851
110.00	5199.9887	5199.9874	5199.9858	5199.9839
93.50	5199.9873	5199.9860	5199.9844	5199.9825
Max. Deviation (MHz)	0.0127	0.0140	0.0156	0.0175
Max. Deviation (ppm)	2.44	2.69	3.00	3.37
Result	Complies			

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5200 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5199.9941	5199.9928	5199.9911	5199.9890
-10	5199.9926	5199.9913	5199.9897	5199.9878
0	5199.9912	5199.9899	5199.9883	5199.9864
10	5199.9899	5199.9886	5199.9870	5199.9851
20	5199.9887	5199.9874	5199.9858	5199.9839
30	5199.9873	5199.9860	5199.9844	5199.9825
40	5199.9858	5199.9845	5199.9829	5199.9810
50	5199.9841	5199.9827	5199.9810	5199.9789
Max. Deviation (MHz)	0.0159	0.0173	0.0190	0.0211
Max. Deviation (ppm)	3.06	3.33	3.65	4.06
Result	Complies			

Mode: 40 MHz / Antenna 1

#### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5189.9874	5189.9861	5189.9845	5189.9826
110.00	5189.9862	5189.9849	5189.9833	5189.9814
93.50	5189.9848	5189.9835	5189.9819	5189.9800
Max. Deviation (MHz)	0.0152	0.0165	0.0181	0.0200
Max. Deviation (ppm)	2.93	3.18	3.49	3.85
Result	Complies			

#### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5190 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5189.9916	5189.9903	5189.9886	5189.9865
-10	5189.9901	5189.9888	5189.9872	5189.9853
0	5189.9887	5189.9874	5189.9858	5189.9839
10	5189.9874	5189.9861	5189.9845	5189.9826
20	5189.9862	5189.9849	5189.9833	5189.9814
30	5189.9848	5189.9835	5189.9819	5189.9800
40	5189.9833	5189.9820	5189.9804	5189.9785
50	5189.9816	5189.9802	5189.9785	5189.9764
Max. Deviation (MHz)	0.0184	0.0198	0.0215	0.0236
Max. Deviation (ppm)	3.55	3.82	4.14	4.55
Result	Complies			

Mode: 80 MHz / Antenna 1

#### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)			
(V)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
126.50	5209.9885	5209.9872	5209.9856	5209.9837
110.00	5209.9873	5209.9860	5209.9844	5209.9825
93.50	5209.9859	5209.9846	5209.9830	5209.9811
Max. Deviation (MHz)	0.0141	0.0154	0.0170	0.0189
Max. Deviation (ppm)	2.71	2.96	3.26	3.63
Result	Complies			

#### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)			
(°C)	5210 MHz			
	0 Minute	2 Minute	5 Minute	10 Minute
-20	5209.9946	5209.9933	5209.9916	5209.9895
-10	5209.9931	5209.9918	5209.9902	5209.9883
0	5209.9917	5209.9904	5209.9888	5209.9869
10	5209.9904	5209.9891	5209.9875	5209.9856
20	5209.9892	5209.9879	5209.9863	5209.9844
30	5209.9878	5209.9865	5209.9849	5209.9830
40	5209.9863	5209.9850	5209.9834	5209.9815
50	5209.9846	5209.9832	5209.9815	5209.9794
Max. Deviation (MHz)	0.0154	0.0168	0.0185	0.0206
Max. Deviation (ppm)	2.96	3.22	3.55	3.95
Result	Complies			

## **4.8. Antenna Requirements**

### **4.8.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.8.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.



## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 28, 2014	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Nov. 06, 2014	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.4 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%