

FCC Test Report

Report No.: RF160906E06A-1

FCC ID: PY316200351

Test Model: R7000P

Series Model: R6900P

Received Date: Sep. 07, 2016

Test Date: Oct. 06 to 25, 2016

Issued Date: Nov. 01, 2016

Applicant: NETGEAR, Inc.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standard	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedure	19
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	20
4.1.6 EUT Operating Condition	21
4.1.7 Test Results	22
4.2 Conducted Emission Measurement	41
4.2.1 Limits of Conducted Emission Measurement	41
4.2.2 Test Instruments	41
4.2.3 Test Procedure	42
4.2.4 Deviation from Test Standard	42
4.2.5 Test Setup.....	42
4.2.6 EUT Operating Condition	42
4.2.7 Test Results (Mode 1).....	43
4.2.8 Test Results (Mode 2).....	45
4.3 Transmit Power Measurement	47
4.3.1 Limits of Transmit Power Measurement	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments	47
4.3.4 Test Procedure	47
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Condition	47
4.3.7 Test Result.....	48
4.4 Occupied Bandwidth Measurement	50
4.4.1 Test Setup.....	50
4.4.2 Test Instruments	50
4.4.3 Test Procedure	50
4.4.4 Test Results	51
4.5 Peak Power Spectral Density Measurement	57
4.5.1 Limits of Peak Power Spectral Density Measurement	57
4.5.2 Test Setup.....	57
4.5.3 Test Instruments	57
4.5.4 Test Procedure	58
4.5.5 Deviation from Test Standard	58
4.5.6 EUT Operating Condition	58
4.5.7 Test Results	59
4.6 Frequency Stability Measurement.....	65

4.6.1	Limits of Frequency Stability Measurement	65
4.6.2	Test Setup.....	65
4.6.3	Test Instruments	65
4.6.4	Test Procedure	65
4.6.5	Deviation from Test Standard	65
4.6.6	EUT Operating Condition	65
4.6.7	Test Results	66
4.7	6dB Bandwidth Measurment	67
4.7.1	Limits of 6dB Bandwidth Measurement.....	67
4.7.2	Test Setup.....	67
4.7.3	Test Instruments	67
4.7.4	Test Procedure	67
4.7.5	Deviation from Test Standard	67
4.7.6	EUT Operating Condition	67
4.7.7	Test Results	68
5	Pictures of Test Arrangements.....	70
	Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	71
	Appendix – Information on the Testing Laboratories	74

Release Control Record

Issue No.	Description	Date Issued
RF160906E06A-1	Original release.	Nov. 01, 2016

1 Certificate of Conformity

Product: AC2300 Smart WiFi Router

Brand: NETGEAR

Test Model: R7000P

Series Model: R6900P

Sample Status: ENGINEERING SAMPLE

Applicant: NETGEAR, Inc.

Test Date: Oct. 06 to 25, 2016

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Nov. 01, 2016
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Nov. 01, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -13.90dB at 0.33750MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.1dB at 5150.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is Re-SMA not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.34 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.41 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	3.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC2300 Smart WiFi Router
Brand	NETGEAR
Test Model	R7000P
Series Model	R6900P
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz band
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode 780.197mW Beamforming Mode 776.8mW 5GHz: 5.18GHz ~ 5.24GHz: CDD Mode 852.705mW Beamforming Mode 859.026mW 5.745GHz ~ 5.825GHz: CDD Mode 863.244mW Beamforming Mode 857.957mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	RJ45 cable x 1 (shielded, 1.5m)

Note:

1. The EUT has below model names, which are identical to each other in all aspects except for the following:

Brand	Model No.	Different
NETGEAR	R7000P	-
	R6900P	Remove one USB 2.0 port.

From the above models, model: **R7000P** was selected as representative model for the test and its data was recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No	Brand Name	Model No.	P/N	Spec.	Plug
1	NETGEAR	MU42-3120350-A1	332-10762-01	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 3.5A DC output cable: 1.8m, unshielded	FCC/IC
2	NETGEAR	2ABN042F NA	332-10761-01	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12Vdc, 3.5A DC output cable: 1.8m, unshielded	FCC/IC

Note: From the above adapters, the radiated emission worse case was found in Adapter 1. Therefore only the test data of the mode was recorded in this report.

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Brand	Model	Ant. Gain(dBi)	Frequency range (GHz to GHz)	Antenna Type	Connector Type
1	NA	NA	0.5	2.4~2.4835	Dipole	Re-SMA
			1.8	5.15~5.85	Dipole	Re-SMA
2	NA	NA	0.5	2.4~2.4835	Dipole	Re-SMA
			1.8	5.15~5.85	Dipole	Re-SMA
3	NA	NA	0.5	2.4~2.4835	Dipole	Re-SMA
			1.8	5.15~5.85	Dipole	Re-SMA

5. The EUT incorporates a MIMO function.

For 2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	3TX	3RX
802.11g	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
VHT20	MCS0~8 Nss=1	3TX	3RX
	MCS0~8 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
VHT40	MCS0~9 Nss=1	3TX	3RX
	MCS0~9 Nss=2	3TX	3RX
	MCS0~9 Nss=3	3TX	3RX
For 5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	3RX
802.11n (HT20)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11n (HT40)	MCS 0~7	3TX	3RX
	MCS 8~15	3TX	3RX
	MCS 16~23	3TX	3RX
802.11ac (VHT20)	MCS 0~8, Nss=1	3TX	3RX
	MCS 0~8, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT40)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX
802.11ac (VHT80)	MCS 0~9, Nss=1	3TX	3RX
	MCS 0~9, Nss=2	3TX	3RX
	MCS 0~9, Nss=3	3TX	3RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
1	√	√	√	√	With adapter 1
2	-	-	√	-	With adapter 2

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE:

1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5745-5825	149 to 165	157	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5745-5825	149 to 165	157	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	23deg. C, 62%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	23deg. C, 62%RH	120Vac, 60Hz	Jyunchun Lin
PLC	25deg. C, 65%RH	120Vac, 60Hz	Bary Lee
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.06 \text{ ms} / 2.087 \text{ ms} = 0.987$

802.11ac (VHT20): Duty cycle = $1.919 \text{ ms} / 1.942 \text{ ms} = 0.988$

802.11ac (VHT40): Duty cycle = $0.947 \text{ ms} / 0.965 \text{ ms} = 0.981$

802.11ac (VHT80): Duty cycle = $0.458 \text{ ms} / 0.479 \text{ ms} = 0.956$, Duty factor = $10 * \log(1/0.956) = 0.19$

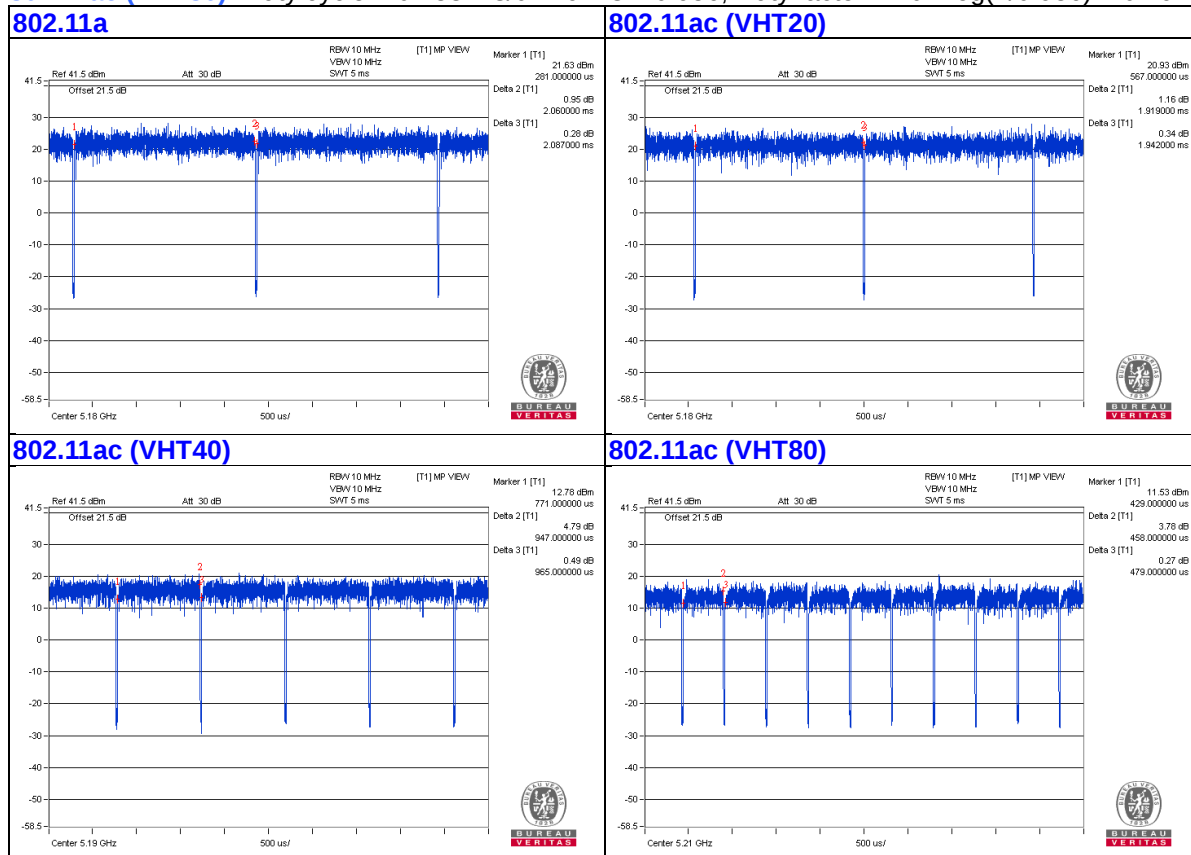

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC	Provided by Lab
D.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab
E.	USB Disk	Teanscend	16GB	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	RJ-45 Cable	3	10	No	0	Provided by Lab
5.	USB Cable	1	0.1	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

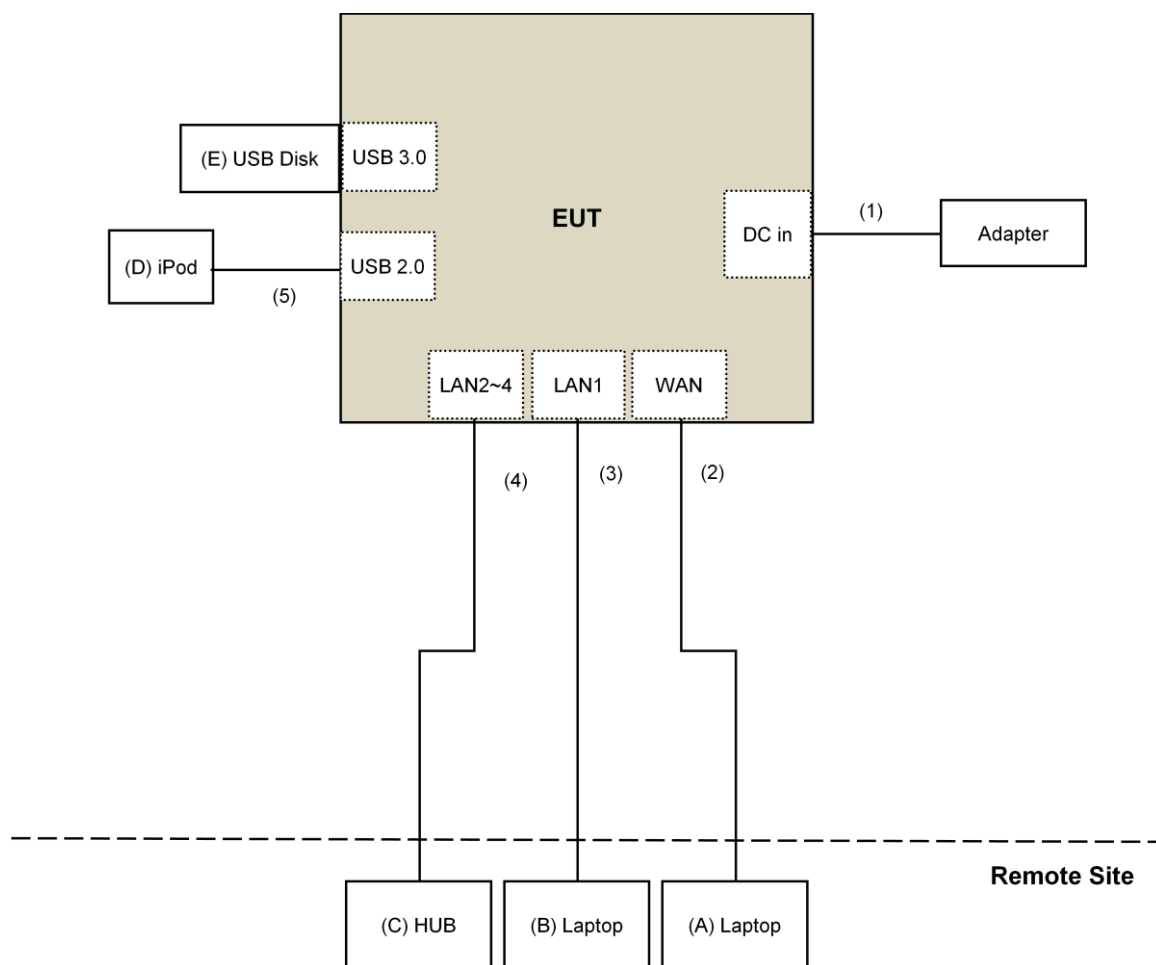

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v01r03

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v01r03			Field Strength at 3m	
			PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Nov. 11, 2015	Nov. 10, 2016
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 18, 2016	Sep. 17, 2017
RF Cable	EMC104-SM-SM-2000 EMC104-SM-SM-5000 EMC104-SM-SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSP40	100060	May 11, 2016	May 10, 2017
Power meter Anritsu	ML2495A	1014008	May 5, 2016	May 4, 2017
Power sensor Anritsu	MA2411B	0917122	May 5, 2016	May 4, 2017
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 15, 2016	Jan. 14, 2017
Digital Multimeter FLUKE	87III	73680266	Nov. 10, 2015	Nov. 09, 2016

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 4.
4. The FCC Site Registration No. is 292998
5. The CANADA Site Registration No. is 20331-2
- 6 Loop antenna was used for all emissions below 30 MHz.
7. Tested Date: Oct. 06 to 22, 2016

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

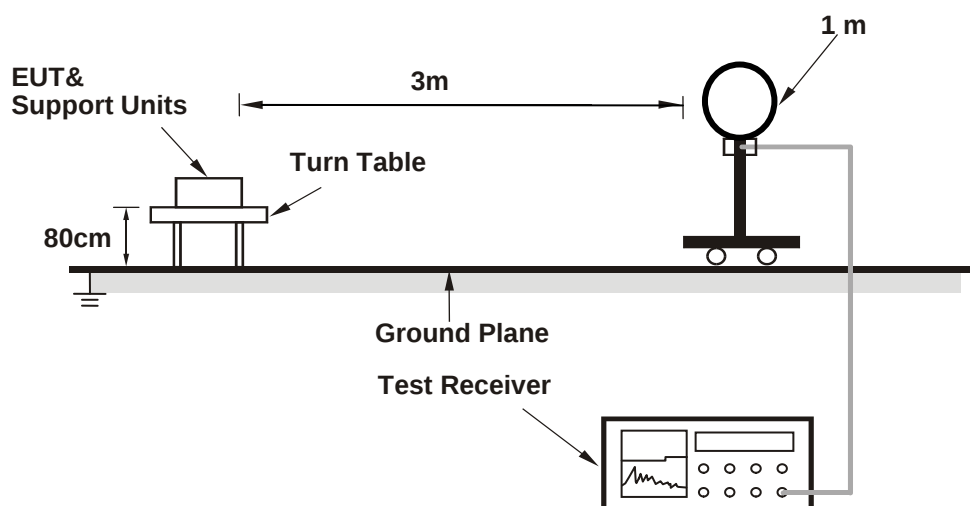

For Radiated emission 30MHz to 1GHz

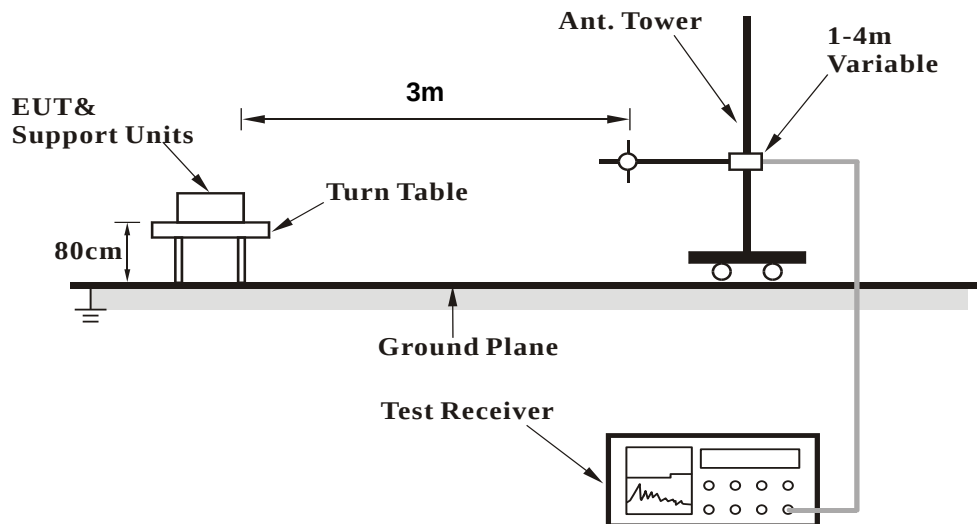

For Radiated emission above 1GHz



For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the laptop which is placed on remote site.
- Contorlling software (Mtool.exe V2.0.1.1) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.6 PK	74.0	-17.4	2.79 H	312	55.1	1.5
2	5150.00	44.3 AV	54.0	-9.7	2.79 H	312	42.8	1.5
3	*5180.00	111.2 PK			2.79 H	312	109.6	1.6
4	*5180.00	100.9 AV			2.79 H	312	99.3	1.6
5	#10360.00	48.8 PK	74.0	-25.2	2.01 H	152	37.3	11.5
6	#10360.00	37.6 AV	54.0	-16.4	2.01 H	152	26.1	11.5
7	15540.00	51.2 PK	74.0	-22.8	1.89 H	160	38.1	13.1
8	15540.00	43.0 AV	54.0	-11.0	1.89 H	160	29.9	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	69.1 PK	74.0	-4.9	2.11 V	189	67.6	1.5
2	5150.00	53.4 AV	54.0	-0.6	2.11 V	189	51.9	1.5
3	*5180.00	119.0 PK			2.11 V	189	117.4	1.6
4	*5180.00	109.2 AV			2.11 V	189	107.6	1.6
5	#10360.00	49.9 PK	74.0	-24.1	2.45 V	157	38.4	11.5
6	#10360.00	39.0 AV	54.0	-15.0	2.45 V	157	27.5	11.5
7	15540.00	50.8 PK	74.0	-23.2	1.94 V	164	37.7	13.1
8	15540.00	42.6 AV	54.0	-11.4	1.94 V	164	29.5	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	2.75 H	310	54.0	1.5
2	5150.00	43.4 AV	54.0	-10.6	2.75 H	310	41.9	1.5
3	*5200.00	116.0 PK			2.75 H	310	114.3	1.7
4	*5200.00	105.0 AV			2.75 H	310	103.3	1.7
5	5350.00	54.2 PK	74.0	-19.8	2.75 H	310	52.3	1.9
6	5350.00	42.2 AV	54.0	-11.8	2.75 H	310	40.3	1.9
7	#10400.00	49.0 PK	74.0	-25.0	2.00 H	165	37.4	11.6
8	#10400.00	38.0 AV	54.0	-16.0	2.00 H	165	26.4	11.6
9	15600.00	51.0 PK	74.0	-23.0	1.85 H	162	37.9	13.1
10	15600.00	42.9 AV	54.0	-11.1	1.85 H	162	29.8	13.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	65.1 PK	74.0	-8.9	2.37 V	185	63.6	1.5
2	5150.00	52.5 AV	54.0	-1.5	2.37 V	185	51.0	1.5
3	*5200.00	122.7 PK			2.37 V	185	121.0	1.7
4	*5200.00	113.3 AV			2.37 V	185	111.6	1.7
5	5350.00	60.9 PK	74.0	-13.1	2.37 V	185	59.0	1.9
6	5350.00	51.3 AV	54.0	-2.7	2.37 V	185	49.4	1.9
7	#10400.00	49.5 PK	74.0	-24.5	2.50 V	165	37.9	11.6
8	#10400.00	38.8 AV	54.0	-15.2	2.50 V	165	27.2	11.6
9	15600.00	50.2 PK	74.0	-23.8	1.92 V	166	37.1	13.1
10	15600.00	42.2 AV	54.0	-11.8	1.92 V	166	29.1	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.8 PK			2.73 H	297	114.2	1.6
2	*5240.00	104.6 AV			2.73 H	297	103.0	1.6
3	5350.00	62.4 PK	74.0	-11.6	2.73 H	297	60.5	1.9
4	5350.00	42.8 AV	54.0	-11.2	2.73 H	297	40.9	1.9
5	#10480.00	49.1 PK	74.0	-24.9	2.05 H	168	37.1	12.0
6	#10480.00	38.1 AV	54.0	-15.9	2.05 H	168	26.1	12.0
7	15720.00	51.2 PK	74.0	-22.8	1.84 H	152	38.0	13.2
8	15720.00	42.8 AV	54.0	-11.2	1.84 H	152	29.6	13.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	122.6 PK			2.38 V	180	121.0	1.6
2	*5240.00	112.9 AV			2.38 V	180	111.3	1.6
3	5350.00	68.4 PK	74.0	-5.6	2.38 V	180	66.5	1.9
4	5350.00	49.6 AV	54.0	-4.4	2.38 V	180	47.7	1.9
5	#10480.00	49.5 PK	74.0	-24.5	2.45 V	170	37.5	12.0
6	#10480.00	38.9 AV	54.0	-15.1	2.45 V	170	26.9	12.0
7	15720.00	50.6 PK	74.0	-23.4	1.98 V	160	37.4	13.2
8	15720.00	42.3 AV	54.0	-11.7	1.98 V	160	29.1	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5630.75	57.6 PK	68.2	-10.6	1.53 H	9	55.1	2.5
2	*5745.00	114.6 PK			1.53 H	9	111.9	2.7
3	*5745.00	103.5 AV			1.53 H	9	100.8	2.7
4	#5943.77	57.2 PK	68.2	-11.0	1.53 H	9	54.3	2.9
5	11490.00	51.0 PK	74.0	-23.0	2.08 H	173	37.6	13.4
6	11490.00	39.7 AV	54.0	-14.3	2.08 H	173	26.3	13.4
7	#17235.00	55.6 PK	74.0	-18.4	1.92 H	150	37.3	18.3
8	#17235.00	44.6 AV	54.0	-9.4	1.92 H	150	26.3	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5586.10	62.6 PK	68.2	-5.6	2.62 V	45	60.3	2.3
2	*5745.00	121.4 PK			2.62 V	45	118.7	2.7
3	*5745.00	111.8 AV			2.62 V	45	109.1	2.7
4	#5979.40	62.3 PK	68.2	-5.9	2.62 V	45	59.1	3.2
5	11490.00	50.9 PK	74.0	-23.1	2.56 V	176	37.5	13.4
6	11490.00	40.0 AV	54.0	-14.0	2.56 V	176	26.6	13.4
7	#17235.00	56.1 PK	74.0	-17.9	1.96 V	165	37.8	18.3
8	#17235.00	44.0 AV	54.0	-10.0	1.96 V	165	25.7	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5602.73	57.6 PK	68.2	-10.6	1.51 H	12	55.2	2.4
2	*5785.00	115.8 PK			1.51 H	12	113.1	2.7
3	*5785.00	104.5 AV			1.51 H	12	101.8	2.7
4	#5965.62	58.0 PK	68.2	-10.2	1.51 H	12	55.0	3.0
5	11570.00	50.6 PK	74.0	-23.4	2.03 H	157	37.5	13.1
6	11570.00	39.5 AV	54.0	-14.5	2.03 H	157	26.4	13.1
7	#17355.00	55.3 PK	74.0	-18.7	1.86 H	163	36.5	18.8
8	#17355.00	44.1 AV	54.0	-9.9	1.86 H	163	25.3	18.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5550.00	61.8 PK	68.2	-6.4	2.56 V	44	59.5	2.3
2	*5785.00	122.9 PK			2.56 V	44	120.2	2.7
3	*5785.00	112.8 AV			2.56 V	44	110.1	2.7
4	#5937.60	62.0 PK	68.2	-6.2	2.56 V	44	59.1	2.9
5	11570.00	50.9 PK	74.0	-23.1	2.54 V	174	37.8	13.1
6	11570.00	40.2 AV	54.0	-13.8	2.54 V	174	27.1	13.1
7	#17355.00	55.4 PK	74.0	-18.6	1.93 V	165	36.6	18.8
8	#17355.00	43.6 AV	54.0	-10.4	1.93 V	165	24.8	18.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5626.00	57.1 PK	68.2	-11.1	1.57 H	14	54.6	2.5
2	*5825.00	115.3 PK			1.57 H	14	112.6	2.7
3	*5825.00	104.2 AV			1.57 H	14	101.5	2.7
4	#5929.05	56.9 PK	68.2	-11.3	1.57 H	14	54.0	2.9
5	11650.00	50.4 PK	74.0	-23.6	2.04 H	150	37.3	13.1
6	11650.00	39.4 AV	54.0	-14.6	2.04 H	150	26.3	13.1
7	#17475.00	55.2 PK	74.0	-18.8	1.89 H	149	36.0	19.2
8	#17475.00	43.9 AV	54.0	-10.1	1.89 H	149	24.7	19.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5587.52	61.7 PK	68.2	-6.5	2.55 V	44	59.4	2.3
2	*5825.00	122.4 PK			2.55 V	44	119.7	2.7
3	*5825.00	112.5 AV			2.55 V	44	109.8	2.7
4	#5990.32	61.0 PK	68.2	-7.2	2.55 V	44	57.7	3.3
5	11650.00	51.5 PK	74.0	-22.5	2.52 V	177	38.4	13.1
6	11650.00	40.5 AV	54.0	-13.5	2.52 V	177	27.4	13.1
7	#17475.00	55.5 PK	74.0	-18.5	1.90 V	180	36.3	19.2
8	#17475.00	43.7 AV	54.0	-10.3	1.90 V	180	24.5	19.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	57.2 PK	74.0	-16.8	1.52 H	25	55.7	1.5
2	5150.00	45.2 AV	54.0	-8.8	1.52 H	25	43.7	1.5
3	*5180.00	112.5 PK			1.52 H	25	110.9	1.6
4	*5180.00	100.0 AV			1.52 H	25	98.4	1.6
5	#10360.00	49.2 PK	74.0	-24.8	2.02 H	152	37.7	11.5
6	#10360.00	38.3 AV	54.0	-15.7	2.02 H	152	26.8	11.5
7	15540.00	50.9 PK	74.0	-23.1	1.91 H	162	37.8	13.1
8	15540.00	42.7 AV	54.0	-11.3	1.91 H	162	29.6	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	70.4 PK	74.0	-3.6	2.35 V	182	68.9	1.5
2	5150.00	53.9 AV	54.0	-0.1	2.35 V	182	52.4	1.5
3	*5180.00	119.6 PK			2.35 V	182	118.0	1.6
4	*5180.00	108.3 AV			2.35 V	182	106.7	1.6
5	#10360.00	50.1 PK	74.0	-23.9	2.44 V	156	38.6	11.5
6	#10360.00	39.2 AV	54.0	-14.8	2.44 V	156	27.7	11.5
7	15540.00	50.5 PK	74.0	-23.5	1.92 V	152	37.4	13.1
8	15540.00	42.3 AV	54.0	-11.7	1.92 V	152	29.2	13.1

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.0 PK	74.0	-19.0	1.48 H	21	53.5	1.5
2	5150.00	43.1 AV	54.0	-10.9	1.48 H	21	41.6	1.5
3	*5200.00	115.1 PK			1.48 H	21	113.4	1.7
4	*5200.00	102.4 AV			1.48 H	21	100.7	1.7
5	5350.00	54.4 PK	74.0	-19.6	1.48 H	21	52.5	1.9
6	5350.00	42.2 AV	54.0	-11.8	1.48 H	21	40.3	1.9
7	#10400.00	48.8 PK	74.0	-25.2	2.02 H	158	37.2	11.6
8	#10400.00	37.9 AV	54.0	-16.1	2.02 H	158	26.3	11.6
9	15600.00	50.8 PK	74.0	-23.2	1.82 H	154	37.7	13.1
10	15600.00	42.5 AV	54.0	-11.5	1.82 H	154	29.4	13.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.1 PK	74.0	-9.9	2.34 V	182	62.6	1.5
2	5150.00	53.1 AV	54.0	-0.9	2.34 V	182	51.6	1.5
3	*5200.00	122.2 PK			2.34 V	182	120.5	1.7
4	*5200.00	112.7 AV			2.34 V	182	111.0	1.7
5	5350.00	62.1 PK	74.0	-11.9	2.34 V	182	60.2	1.9
6	5350.00	50.5 AV	54.0	-3.5	2.34 V	182	48.6	1.9
7	#10400.00	49.2 PK	74.0	-24.8	2.46 V	161	37.6	11.6
8	#10400.00	38.6 AV	54.0	-15.4	2.46 V	161	27.0	11.6
9	15600.00	49.8 PK	74.0	-24.2	1.97 V	172	36.7	13.1
10	15600.00	41.8 AV	54.0	-12.2	1.97 V	172	28.7	13.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	115.2 PK			1.51 H	13	113.6	1.6
2	*5240.00	102.2 AV			1.51 H	13	100.6	1.6
3	5350.00	55.2 PK	74.0	-18.8	1.51 H	13	53.3	1.9
4	5350.00	43.2 AV	54.0	-10.8	1.51 H	13	41.3	1.9
5	5393.00	55.6 PK	74.0	-18.4	1.51 H	13	53.5	2.1
6	5393.00	43.3 AV	54.0	-10.7	1.51 H	13	41.2	2.1
7	#10480.00	48.4 PK	74.0	-25.6	2.03 H	156	36.4	12.0
8	#10480.00	37.5 AV	54.0	-16.5	2.03 H	156	25.5	12.0
9	15720.00	50.7 PK	74.0	-23.3	1.83 H	177	37.5	13.2
10	15720.00	42.6 AV	54.0	-11.4	1.83 H	177	29.4	13.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	122.2 PK			2.14 V	182	120.6	1.6
2	*5240.00	112.5 AV			2.14 V	182	110.9	1.6
3	5350.00	60.5 PK	74.0	-13.5	2.14 V	182	58.6	1.9
4	5350.00	49.4 AV	54.0	-4.6	2.14 V	182	47.5	1.9
5	5393.00	61.3 PK	74.0	-12.7	1.98 V	176	59.2	2.1
6	5393.00	49.4 AV	54.0	-4.6	1.98 V	176	47.3	2.1
7	#10480.00	49.5 PK	74.0	-24.5	2.55 V	169	37.5	12.0
8	#10480.00	38.8 AV	54.0	-15.2	2.55 V	169	26.8	12.0
9	15720.00	49.6 PK	74.0	-24.4	1.93 V	173	36.4	13.2
10	15720.00	41.7 AV	54.0	-12.3	1.93 V	173	28.5	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5622.20	57.1 PK	68.2	-11.1	1.65 H	22	54.6	2.5
2	*5745.00	115.5 PK			1.65 H	22	112.8	2.7
3	*5745.00	102.4 AV			1.65 H	22	99.7	2.7
4	#5960.40	58.0 PK	68.2	-10.2	1.65 H	22	55.0	3.0
5	11490.00	50.2 PK	74.0	-23.8	2.00 H	158	36.8	13.4
6	11490.00	39.4 AV	54.0	-14.6	2.00 H	158	26.0	13.4
7	#17235.00	55.1 PK	74.0	-18.9	1.91 H	140	36.8	18.3
8	#17235.00	43.7 AV	54.0	-10.3	1.91 H	140	25.4	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5592.27	61.5 PK	68.2	-6.7	1.81 V	187	59.2	2.3
2	*5745.00	122.7 PK			1.80 V	187	120.0	2.7
3	*5745.00	112.7 AV			1.80 V	187	110.0	2.7
4	#5978.45	63.2 PK	68.2	-5.0	1.81 V	187	60.0	3.2
5	11490.00	50.8 PK	74.0	-23.2	2.51 V	179	37.4	13.4
6	11490.00	40.0 AV	54.0	-14.0	2.51 V	179	26.6	13.4
7	#17235.00	55.6 PK	74.0	-18.4	1.92 V	189	37.3	18.3
8	#17235.00	43.6 AV	54.0	-10.4	1.92 V	189	25.3	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5624.57	58.3 PK	68.2	-9.9	1.56 H	23	55.8	2.5
2	*5785.00	116.2 PK			1.56 H	23	113.5	2.7
3	*5785.00	102.8 AV			1.56 H	23	100.1	2.7
4	#6003.15	57.5 PK	68.2	-10.7	1.56 H	23	54.2	3.3
5	11570.00	50.0 PK	74.0	-24.0	2.03 H	150	36.9	13.1
6	11570.00	38.9 AV	54.0	-15.1	2.03 H	150	25.8	13.1
7	#17355.00	55.1 PK	74.0	-18.9	1.90 H	165	36.3	18.8
8	#17355.00	43.8 AV	54.0	-10.2	1.90 H	165	25.0	18.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5550.95	63.0 PK	68.2	-5.2	1.83 V	190	60.7	2.3
2	*5785.00	123.4 PK			1.83 V	190	120.7	2.7
3	*5785.00	113.1 AV			1.83 V	190	110.4	2.7
4	#6020.73	62.7 PK	68.2	-5.5	1.83 V	190	59.4	3.3
5	11570.00	51.4 PK	74.0	-22.6	2.52 V	168	38.3	13.1
6	11570.00	40.4 AV	54.0	-13.6	2.52 V	168	27.3	13.1
7	#17355.00	54.7 PK	74.0	-19.3	1.88 V	173	35.9	18.8
8	#17355.00	43.2 AV	54.0	-10.8	1.88 V	173	24.4	18.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5641.68	57.7 PK	68.2	-10.5	1.59 H	10	55.2	2.5
2	*5825.00	115.8 PK			1.59 H	10	113.1	2.7
3	*5825.00	102.6 AV			1.59 H	10	99.9	2.7
4	#5952.80	57.0 PK	68.2	-11.2	1.59 H	10	54.0	3.0
5	11650.00	50.3 PK	74.0	-23.7	2.04 H	138	37.2	13.1
6	11650.00	39.1 AV	54.0	-14.9	2.04 H	138	26.0	13.1
7	#17475.00	55.0 PK	74.0	-19.0	1.94 H	163	35.8	19.2
8	#17475.00	43.7 AV	54.0	-10.3	1.94 H	163	24.5	19.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5589.43	64.4 PK	68.2	-3.8	1.81 V	181	62.1	2.3
2	*5825.00	122.8 PK			1.81 V	181	120.1	2.7
3	*5825.00	112.9 AV			1.81 V	181	110.2	2.7
4	#5985.10	61.3 PK	68.2	-6.9	1.81 V	181	58.1	3.2
5	11650.00	51.5 PK	74.0	-22.5	2.58 V	192	38.4	13.1
6	11650.00	40.8 AV	54.0	-13.2	2.58 V	192	27.7	13.1
7	#17475.00	55.4 PK	74.0	-18.6	1.91 V	193	36.2	19.2
8	#17475.00	43.7 AV	54.0	-10.3	1.91 V	193	24.5	19.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.56 H	3	54.7	1.5
2	5150.00	43.4 AV	54.0	-10.6	1.56 H	3	41.9	1.5
3	*5190.00	107.1 PK			1.56 H	3	105.4	1.7
4	*5190.00	92.9 AV			1.56 H	3	91.2	1.7
5	5350.00	53.3 PK	74.0	-20.7	1.56 H	3	51.4	1.9
6	5350.00	40.8 AV	54.0	-13.2	1.56 H	3	38.9	1.9
7	#10380.00	48.4 PK	74.0	-25.6	2.04 H	170	36.9	11.5
8	#10380.00	37.3 AV	54.0	-16.7	2.04 H	170	25.8	11.5
9	15570.00	49.9 PK	74.0	-24.1	1.84 H	190	36.8	13.1
10	15570.00	42.1 AV	54.0	-11.9	1.84 H	190	29.0	13.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.7 PK	74.0	-9.3	2.31 V	182	63.2	1.5
2	5150.00	53.6 AV	54.0	-0.4	2.31 V	182	52.1	1.5
3	*5190.00	114.1 PK			2.31 V	182	112.4	1.7
4	*5190.00	103.2 AV			2.31 V	182	101.5	1.7
5	5350.00	60.3 PK	74.0	-13.7	2.31 V	182	58.4	1.9
6	5350.00	50.4 AV	54.0	-3.6	2.31 V	182	48.5	1.9
7	#10380.00	49.4 PK	74.0	-24.6	2.60 V	155	37.9	11.5
8	#10380.00	38.8 AV	54.0	-15.2	2.60 V	155	27.3	11.5
9	15570.00	49.0 PK	74.0	-25.0	1.96 V	186	35.9	13.1
10	15570.00	41.2 AV	54.0	-12.8	1.96 V	186	28.1	13.1

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	111.2 PK			1.61 H	25	109.6	1.6
2	*5230.00	96.5 AV			1.61 H	25	94.9	1.6
3	5383.10	54.8 PK	74.0	-19.2	1.61 H	25	52.7	2.1
4	5383.10	43.1 AV	54.0	-10.9	1.61 H	25	41.0	2.1
5	#10460.00	48.2 PK	74.0	-25.8	2.04 H	158	36.3	11.9
6	#10460.00	37.5 AV	54.0	-16.5	2.04 H	158	25.6	11.9
7	15690.00	50.8 PK	74.0	-23.2	1.79 H	178	37.5	13.3
8	15690.00	42.7 AV	54.0	-11.3	1.79 H	178	29.4	13.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	118.2 PK			2.27 V	181	116.6	1.6
2	*5230.00	106.8 AV			2.27 V	181	105.2	1.6
3	5383.10	63.1 PK	74.0	-10.9	2.19 V	175	61.0	2.1
4	5383.10	53.6 AV	54.0	-0.4	2.19 V	175	51.5	2.1
5	#10460.00	49.0 PK	74.0	-25.0	2.55 V	161	37.1	11.9
6	#10460.00	38.6 AV	54.0	-15.4	2.55 V	161	26.7	11.9
7	15690.00	49.8 PK	74.0	-24.2	1.92 V	187	36.5	13.3
8	15690.00	41.9 AV	54.0	-12.1	1.92 V	187	28.6	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5603.68	57.6 PK	68.2	-10.6	1.46 H	20	55.2	2.4
2	*5755.00	114.5 PK			1.46 H	20	111.8	2.7
3	*5755.00	99.8 AV			1.46 H	20	97.1	2.7
4	#5949.95	57.9 PK	68.2	-10.3	1.46 H	20	54.9	3.0
5	11510.00	50.5 PK	74.0	-23.5	2.08 H	137	37.1	13.4
6	11510.00	39.4 AV	54.0	-14.6	2.08 H	137	26.0	13.4
7	#17265.00	55.5 PK	74.0	-18.5	1.94 H	163	37.2	18.3
8	#17265.00	43.9 AV	54.0	-10.1	1.94 H	163	25.6	18.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5650.70	68.1 PK	68.7	-0.6	1.94 V	186	65.6	2.5
2	*5755.00	121.5 PK			1.94 V	186	118.8	2.7
3	*5755.00	110.0 AV			1.94 V	186	107.3	2.7
4	#5928.10	64.1 PK	68.2	-4.1	1.94 V	186	61.2	2.9
5	11510.00	51.1 PK	74.0	-22.9	2.63 V	194	37.7	13.4
6	11510.00	40.5 AV	54.0	-13.5	2.63 V	194	27.1	13.4
7	#17265.00	55.2 PK	74.0	-18.8	1.92 V	195	36.9	18.3
8	#17265.00	43.4 AV	54.0	-10.6	1.92 V	195	25.1	18.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5618.40	57.1 PK	68.2	-11.1	1.50 H	10	54.6	2.5
2	*5795.00	114.3 PK			1.50 H	10	111.6	2.7
3	*5795.00	100.0 AV			1.50 H	10	97.3	2.7
4	#5958.98	57.2 PK	68.2	-11.0	1.50 H	10	54.2	3.0
5	11590.00	50.7 PK	74.0	-23.3	2.09 H	152	37.7	13.0
6	11590.00	39.7 AV	54.0	-14.3	2.09 H	152	26.7	13.0
7	#17385.00	55.2 PK	74.0	-18.8	1.90 H	161	36.2	19.0
8	#17385.00	43.7 AV	54.0	-10.3	1.90 H	161	24.7	19.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5629.80	62.6 PK	68.2	-5.6	1.89 V	176	60.1	2.5
2	*5795.00	121.2 PK			1.89 V	176	118.5	2.7
3	*5795.00	110.2 AV			1.89 V	176	107.5	2.7
4	#5936.65	67.8 PK	68.2	-0.4	1.89 V	176	64.9	2.9
5	11590.00	51.3 PK	74.0	-22.7	2.59 V	179	38.3	13.0
6	11590.00	40.8 AV	54.0	-13.2	2.59 V	179	27.8	13.0
7	#17385.00	55.6 PK	74.0	-18.4	1.96 V	179	36.6	19.0
8	#17385.00	44.0 AV	54.0	-10.0	1.96 V	179	25.0	19.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.6 PK	74.0	-18.4	1.49 H	15	54.1	1.5
2	5150.00	44.0 AV	54.0	-10.0	1.49 H	15	42.5	1.5
3	*5210.00	106.1 PK			1.49 H	15	104.4	1.7
4	*5210.00	96.4 AV			1.49 H	15	94.7	1.7
5	5350.00	54.7 PK	74.0	-19.3	1.49 H	15	52.8	1.9
6	5350.00	52.3 AV	54.0	-1.7	1.49 H	15	50.4	1.9
7	#10420.00	47.7 PK	74.0	-26.3	2.08 H	157	36.0	11.7
8	#10420.00	37.0 AV	54.0	-17.0	2.08 H	157	25.3	11.7
9	15630.00	50.0 PK	74.0	-24.0	1.81 H	182	36.8	13.2
10	15630.00	42.2 AV	54.0	-11.8	1.81 H	182	29.0	13.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	3.21 V	359	61.9	1.5
2	5150.00	53.5 AV	54.0	-0.5	3.21 V	359	52.0	1.5
3	*5210.00	113.0 PK			3.21 V	359	111.3	1.7
4	*5210.00	103.6 AV			3.21 V	359	101.9	1.7
5	5350.00	60.1 PK	74.0	-13.9	3.21 V	359	58.2	1.9
6	5350.00	50.0 AV	54.0	-4.0	3.21 V	359	48.1	1.9
7	#10420.00	50.0 PK	74.0	-24.0	2.49 V	167	38.3	11.7
8	#10420.00	39.1 AV	54.0	-14.9	2.49 V	167	27.4	11.7
9	15630.00	49.1 PK	74.0	-24.9	1.88 V	172	35.9	13.2
10	15630.00	41.3 AV	54.0	-12.7	1.88 V	172	28.1	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5637.40	58.2 PK	68.2	-10.0	1.52 H	9	55.7	2.5
2	*5775.00	109.7 PK			1.52 H	9	107.0	2.7
3	*5775.00	99.3 AV			1.52 H	9	96.6	2.7
4	#5997.93	58.5 PK	68.2	-9.7	1.52 H	9	55.2	3.3
5	11550.00	50.9 PK	74.0	-23.1	2.04 H	136	37.7	13.2
6	11550.00	39.6 AV	54.0	-14.4	2.04 H	136	26.4	13.2
7	#17325.00	55.0 PK	74.0	-19.0	1.90 H	156	36.4	18.6
8	#17325.00	43.7 AV	54.0	-10.3	1.90 H	156	25.1	18.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5633.60	67.6 PK	68.2	-0.6	1.96 V	173	65.1	2.5
2	*5775.00	116.6 PK			1.96 V	173	113.9	2.7
3	*5775.00	106.5 AV			1.96 V	173	103.8	2.7
4	#5930.95	64.7 PK	68.2	-3.5	1.96 V	173	61.8	2.9
5	11550.00	51.9 PK	74.0	-22.1	2.63 V	204	38.7	13.2
6	11550.00	40.9 AV	54.0	-13.1	2.63 V	204	27.7	13.2
7	#17325.00	55.2 PK	74.0	-18.8	1.96 V	185	36.6	18.6
8	#17325.00	43.4 AV	54.0	-10.6	1.96 V	185	24.8	18.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:

802.11a

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.42	29.2 QP	40.0	-10.8	2.50 H	220	39.0	-9.8
2	51.32	30.5 QP	40.0	-9.5	2.00 H	292	39.4	-8.9
3	96.30	29.9 QP	43.5	-13.6	2.50 H	46	43.6	-13.7
4	164.51	32.3 QP	43.5	-11.2	1.50 H	83	41.1	-8.8
5	384.46	34.2 QP	46.0	-11.8	1.00 H	339	40.0	-5.8
6	434.15	34.2 QP	46.0	-11.8	2.50 H	164	38.3	-4.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	64.36	36.4 QP	40.0	-3.6	1.00 V	286	46.1	-9.7
2	91.74	34.7 QP	43.5	-8.8	1.50 V	0	49.1	-14.4
3	163.13	32.9 QP	43.5	-10.6	1.50 V	0	41.6	-8.7
4	384.41	33.0 QP	46.0	-13.0	1.00 V	104	38.8	-5.8
5	500.01	27.9 QP	46.0	-18.1	2.00 V	360	30.6	-2.7
6	866.29	29.2 QP	46.0	-16.8	1.50 V	79	25.9	3.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	100375	May 09, 2016	May 08, 2017
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK-8127	8127-522	Aug. 31, 2016	Aug. 30, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-003	Sep. 13, 2016	Sep. 12, 2017
50 ohms Terminator	N/A	EMC-03	Sep. 29, 2016	Sep. 28, 2017
50 ohms Terminator	N/A	EMC-02	Sep. 29, 2016	Sep. 28, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
- 3 The VCCI Con C Registration No. is C-3611.
- 4 Tested Date: Oct. 25, 2016

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

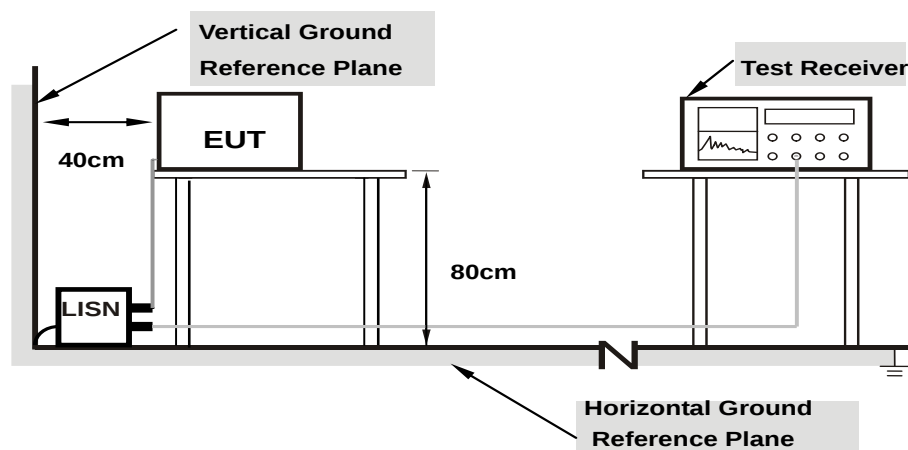

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	10.24	30.62	16.70	40.86	26.94	64.98	54.98	-24.12	-28.04
2	0.35381	10.24	26.55	21.69	36.79	31.93	58.87	48.87	-22.08	-16.94
3	0.86094	10.27	12.29	6.99	22.56	17.26	56.00	46.00	-33.44	-28.74
4	1.84766	10.42	15.39	9.96	25.81	20.38	56.00	46.00	-30.19	-25.62
5	10.51563	10.83	16.15	11.16	26.98	21.99	60.00	50.00	-33.02	-28.01
6	15.49609	11.13	23.55	19.00	34.68	30.13	60.00	50.00	-25.32	-19.87

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

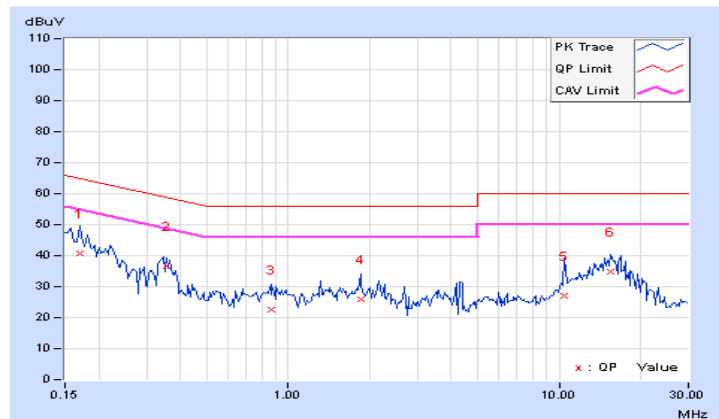


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17344	10.25	30.32	18.91	40.57	29.16	64.79	54.79	-24.22	-25.63
2	0.33750	10.27	27.99	25.09	38.26	35.36	59.26	49.26	-21.00	-13.90
3	0.75938	10.38	11.59	6.48	21.97	16.86	56.00	46.00	-34.03	-29.14
4	1.86719	10.40	15.63	10.30	26.03	20.70	56.00	46.00	-29.97	-25.30
5	4.20703	10.61	13.64	-1.39	24.25	9.22	56.00	46.00	-31.75	-36.78
6	15.46094	11.16	24.43	19.77	35.59	30.93	60.00	50.00	-24.41	-19.07

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

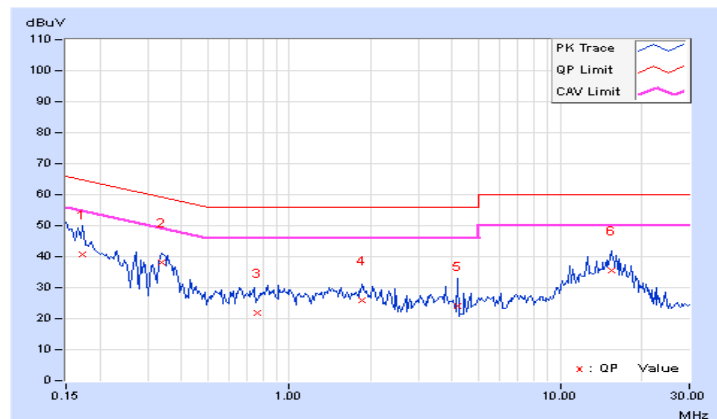


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15822	10.24	38.25	22.16	48.49	32.40	65.56	55.56	-17.07	-23.16
2	0.21250	10.25	29.56	12.92	39.81	23.17	63.11	53.11	-23.30	-29.94
3	0.34141	10.24	30.05	22.52	40.29	32.76	59.17	49.17	-18.88	-16.41
4	0.93125	10.28	14.86	5.14	25.14	15.42	56.00	46.00	-30.86	-30.58
5	1.66797	10.39	15.00	6.90	25.39	17.29	56.00	46.00	-30.61	-28.71
6	4.49609	10.53	12.75	7.48	23.28	18.01	56.00	46.00	-32.72	-27.99

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

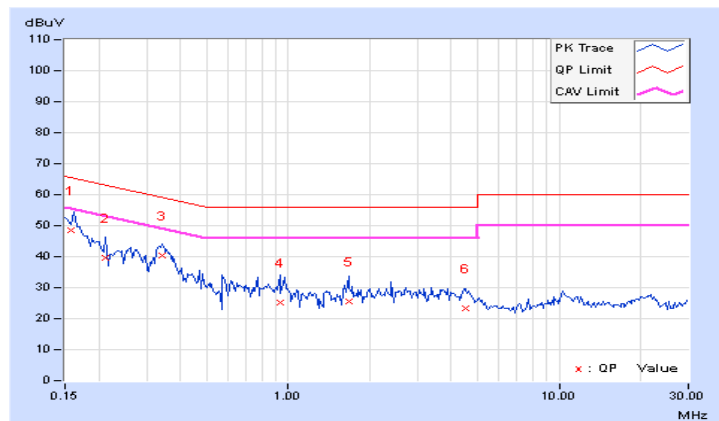


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.28	39.76	25.63	50.04	35.91	65.79	55.79	-15.75	-19.88
2	0.18906	10.23	31.61	15.35	41.84	25.58	64.08	54.08	-22.24	-28.50
3	0.33750	10.27	28.52	21.37	38.79	31.64	59.26	49.26	-20.47	-17.62
4	0.81797	10.39	17.01	10.26	27.40	20.65	56.00	46.00	-28.60	-25.35
5	2.16016	10.42	14.86	7.60	25.28	18.02	56.00	46.00	-30.72	-27.98
6	10.42188	10.90	4.10	-0.39	15.00	10.51	60.00	50.00	-45.00	-39.49

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

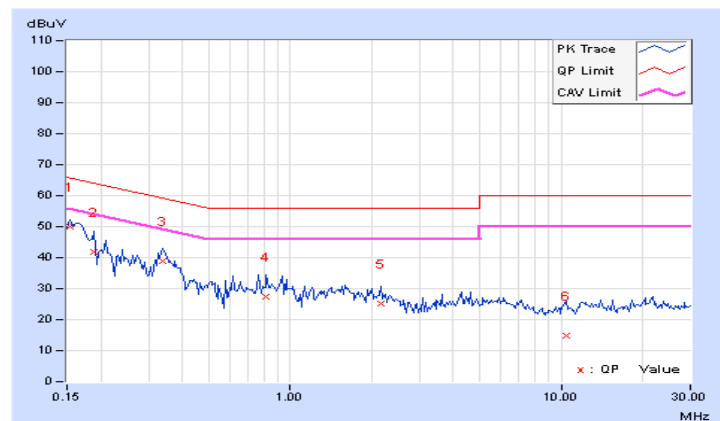

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	√	Indoor Access Point	1 Watt (30 dBm)
		Mobile and Portable client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	22.13	22.08	20.60	439.556	26.43	30	Pass
40	5200	24.75	24.25	24.02	816.959	29.12	30	Pass
48	5240	24.52	24.51	24.58	852.705	29.31	30	Pass
149	5745	24.56	24.99	23.65	832.998	29.21	30	Pass
157	5785	24.78	25.14	23.73	863.244	29.36	30	Pass
165	5825	24.68	25.13	23.72	855.107	29.32	30	Pass

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
36	5180	21.35	21.70	20.07	385.994	25.87	29.43	Pass
40	5200	24.61	24.38	24.71	859.026	29.34	29.43	Pass
48	5240	24.26	24.58	24.51	836.252	29.22	29.43	Pass
149	5745	24.59	25.04	23.65	838.633	29.24	29.43	Pass
157	5785	24.44	24.95	23.61	820.194	29.14	29.43	Pass
165	5825	24.40	24.61	24.33	835.51	29.22	29.43	Pass

NOTE: Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.57 - 6) = 29.43\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
38	5190	18.54	18.91	18.38	218.119	23.39	29.43	Pass
46	5230	22.33	22.78	22.27	529.328	27.24	29.43	Pass
151	5755	24.79	24.22	24.66	857.957	29.33	29.43	Pass
159	5795	24.55	24.43	23.97	811.893	29.09	29.43	Pass

NOTE: Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.57 - 6) = 29.43\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	18.98	18.84	19.05	235.981	23.73	29.43	Pass
155	5775	21.47	21.70	22.04	448.148	26.51	29.43	Pass

NOTE: Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (6.57 - 6) = 29.43\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Results

CDD Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	16.92	16.92	16.80
40	5200	17.04	16.92	16.92
48	5240	17.16	16.92	17.04
149	5745	17.28	17.16	16.92
157	5785	17.52	17.28	17.04
165	5825	17.64	17.88	17.16

Beamforming Mode

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
36	5180	18.24	18.12	18.00
40	5200	18.12	18.12	17.88
48	5240	18.00	18.12	18.12
149	5745	18.36	18.36	18.24
157	5785	18.48	18.60	18.24
165	5825	18.60	18.60	18.36

802.11ac (VHT40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
38	5190	36.72	36.72	36.72
46	5230	36.96	36.96	36.72
151	5755	37.44	38.40	37.20
159	5795	38.16	38.64	37.20

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)		
		Chain 0	Chain 1	Chain 2
42	5210	74.88	74.88	75.36
155	5775	76.32	76.32	76.32

Spectrum Plot of Worst Value


802.11a_Chain1 / CH165

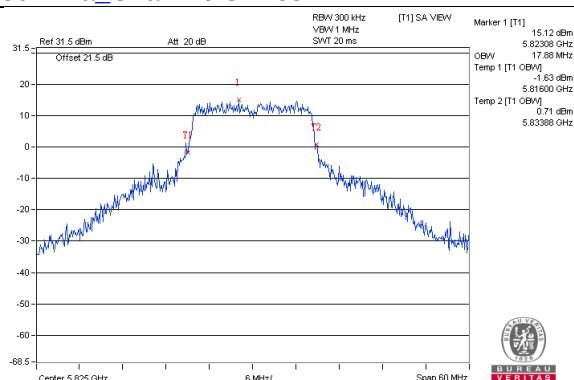


802.11ac (VHT20)_Chain0 / CH165

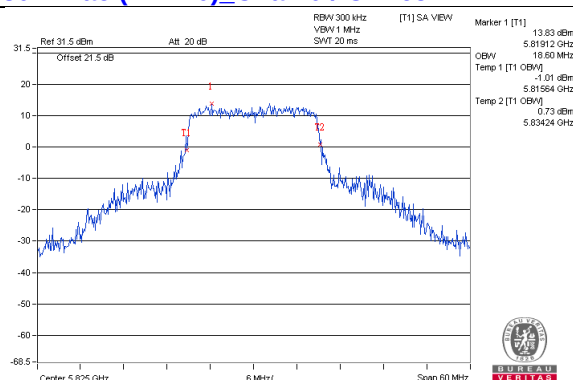

802.11ac (VHT40)_Chain1 / CH159

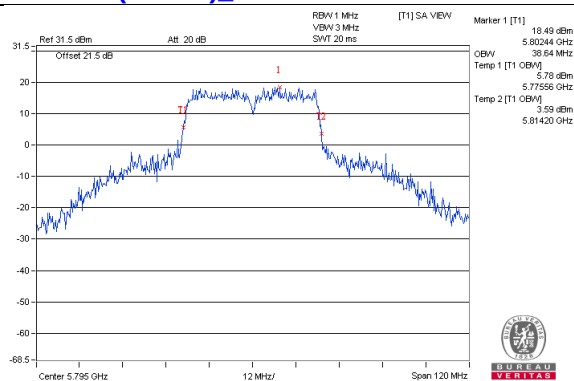


802.11ac (VHT80)_Chain0 / CH155

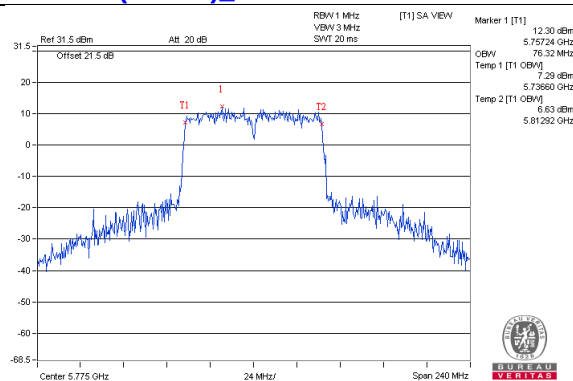


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain0 / CH48

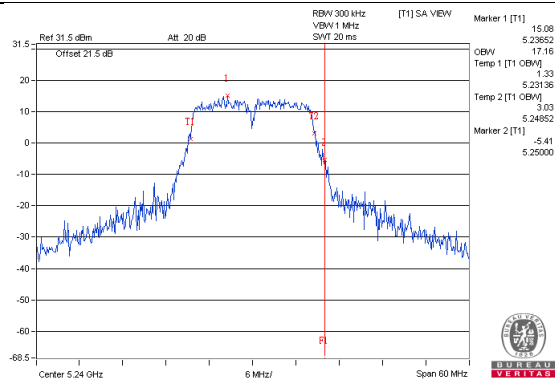


802.11a_Chain1 / CH48

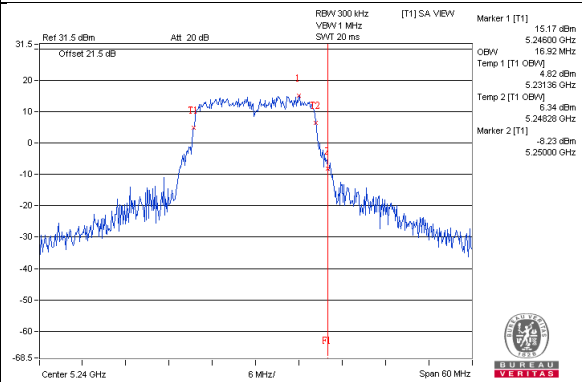


802.11a_Chain2 / CH48

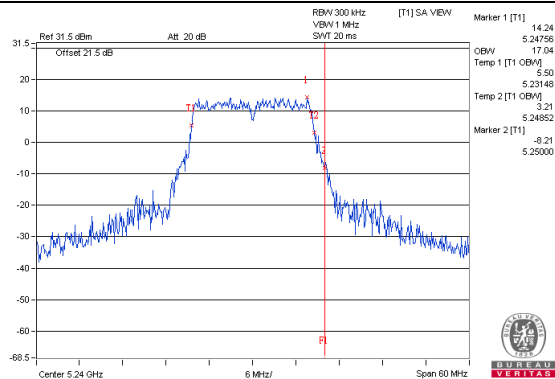


802.11ac(VHT20)_Chain0 / CH48

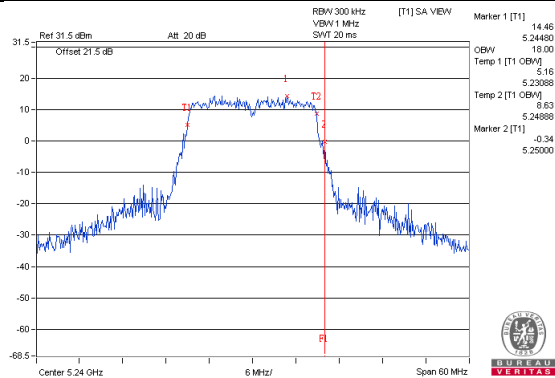

802.11ac(VHT20)_Chain1 / CH48

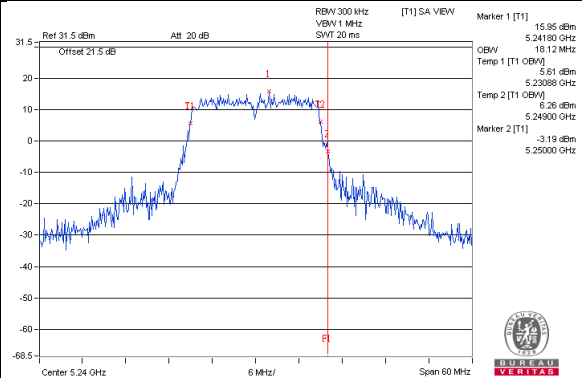


802.11ac(VHT20)_Chain2 / CH48

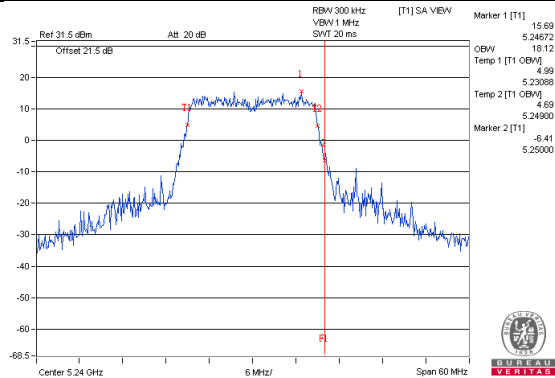


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11ac(VHT40)_Chain0 / CH46

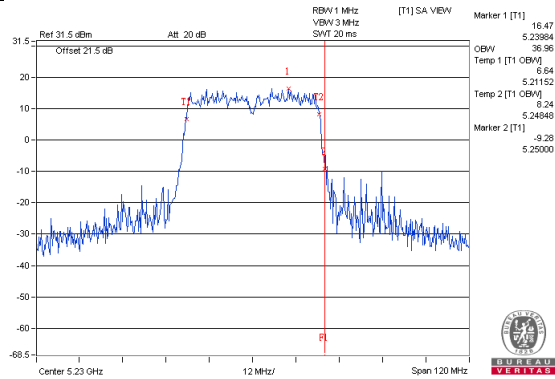


802.11ac(VHT40)_Chain1 / CH46

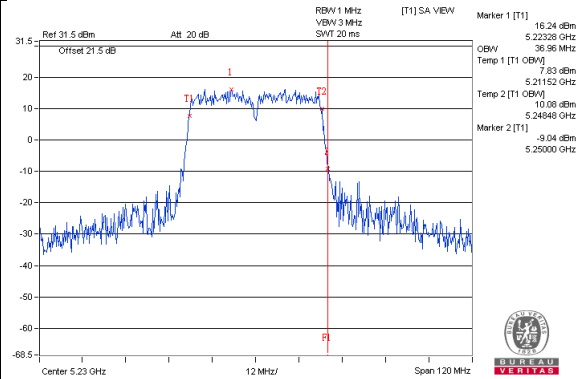


802.11ac(VHT40)_Chain2 / CH46

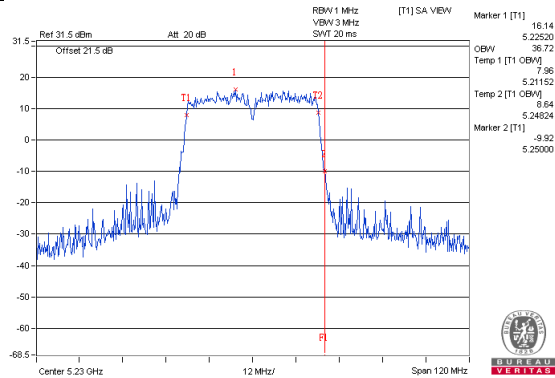


802.11ac(VHT80)_Chain0 / CH42

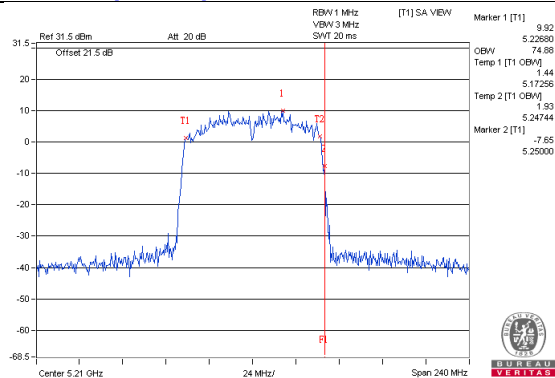

802.11ac(VHT80)_Chain1 / CH42

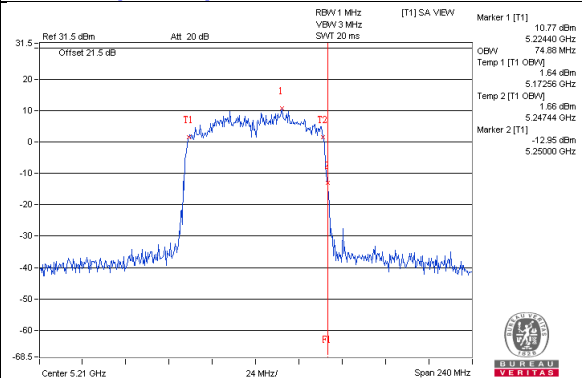


802.11ac(VHT80)_Chain2 / CH42

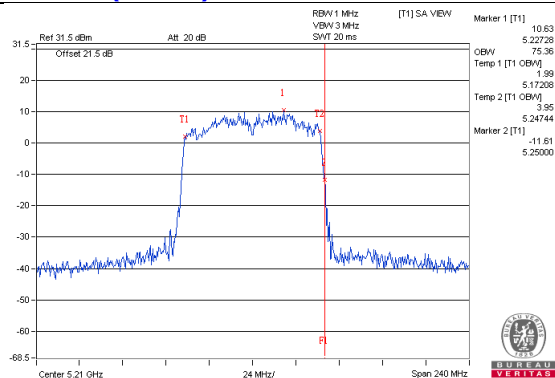


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain0 / CH149

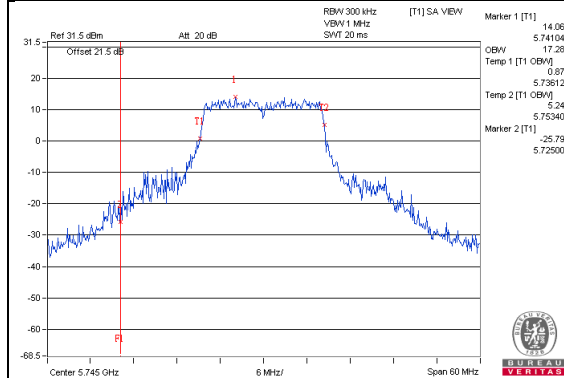


802.11a_Chain1 / CH149

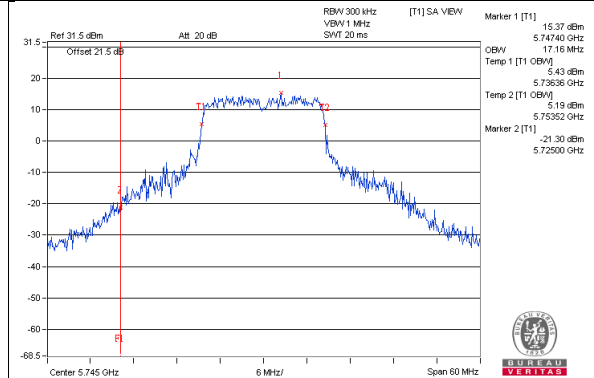


802.11a_Chain2 / CH149

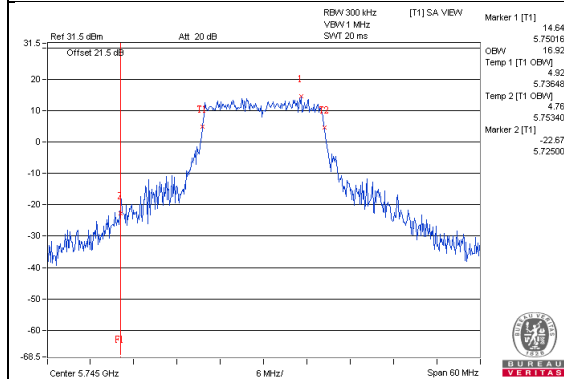


802.11ac(VHT20)_Chain0 / CH149

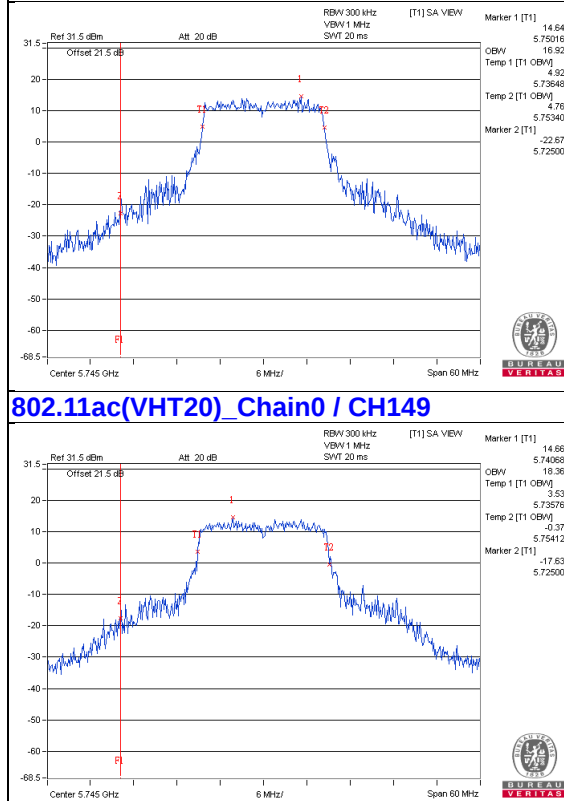

802.11ac(VHT20)_Chain1 / CH149

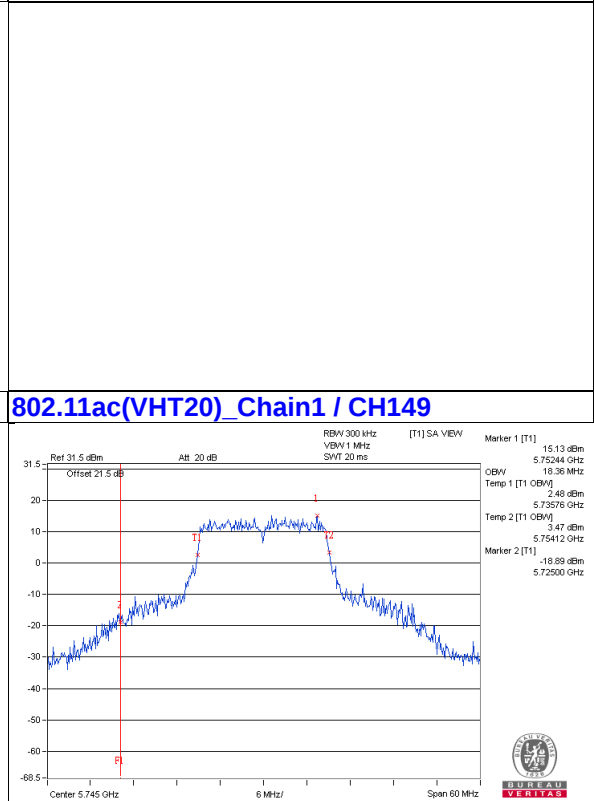

802.11ac(VHT20)_Chain2 / CH149

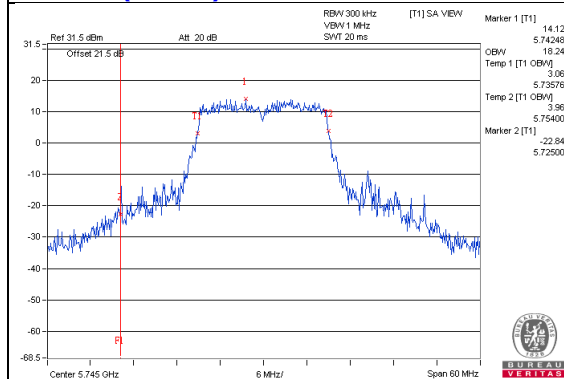


802.11ac(VHT20)_Chain3 / CH149




Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ac(VHT40)_Chain0 / CH151

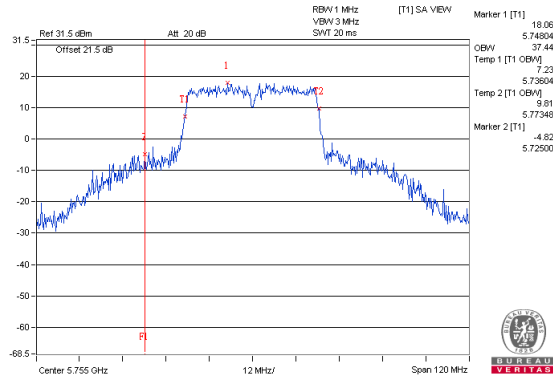


802.11ac(VHT40)_Chain1 / CH151

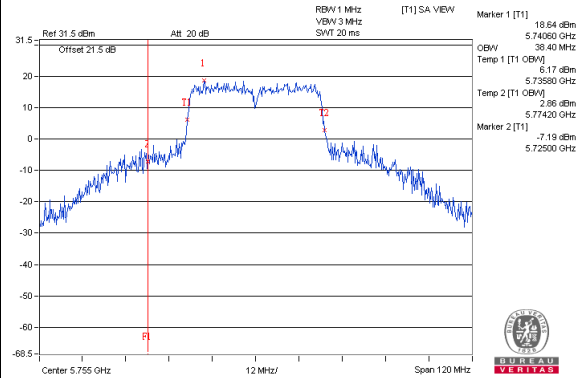


802.11ac(VHT40)_Chain2 / CH151

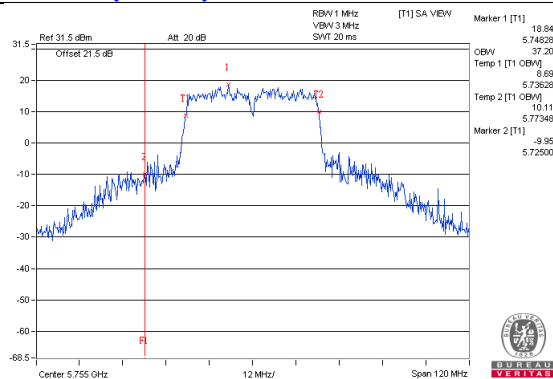


802.11ac(VHT80)_Chain0 / CH155

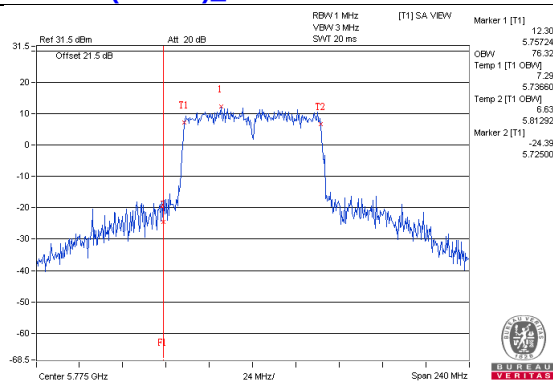

802.11ac(VHT80)_Chain1 / CH155

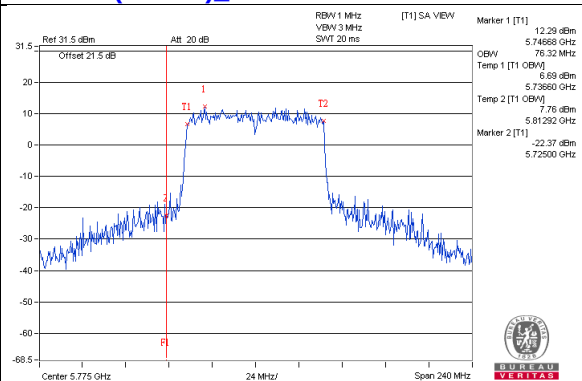

802.11ac(VHT80)_Chain2 / CH155

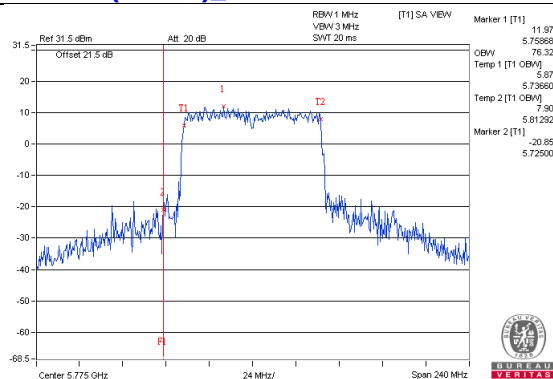


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
	√	Indoor Access Point	
		Mobile and Portable client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

For U-NII-1:

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

802.11ac (VHT80)

For U-NII-1:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add $10 \log (1/\text{duty cycle})$

For U-NII-3:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500 \text{ kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add $10 \log (1/\text{duty cycle})$

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-1:

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
36	5180	7.48	8.19	7.25	12.43	16.43	Pass
40	5200	10.63	11.03	10.85	15.61	16.43	Pass
48	5240	10.66	11.09	10.51	15.53	16.43	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(6.57-6) = 16.43\text{dBm}$.

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
36	5180	7.11	7.66	6.46	11.88	16.43	Pass
40	5200	10.36	11.09	10.29	15.37	16.43	Pass
48	5240	10.40	10.92	10.63	15.43	16.43	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(6.57-6) = 16.43\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)			Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2			
38	5190	2.08	2.25	1.77	6.81	16.43	Pass
46	5230	5.92	5.89	5.66	10.60	16.43	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(6.57-6) = 16.43\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)			Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2				
42	5210	0.33	0.27	0.94	0.19	5.49	16.43	Pass


- Note:**
1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 2. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17 - (6.57 - 6) = 16.43\text{dBm}$.
 3. Refer to section 3.3 for duty cycle spectrum plot

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH48

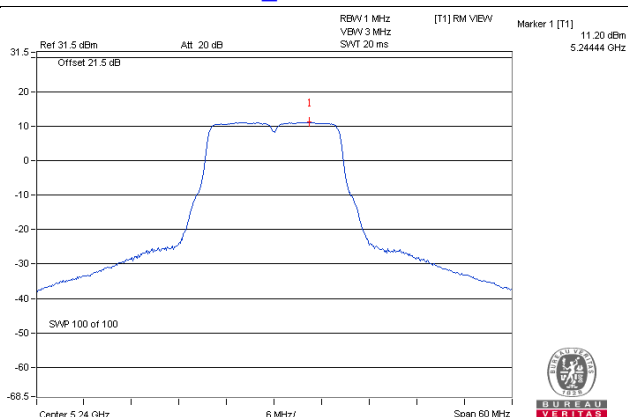


802.11ac (VHT20)_Chain 1 / CH40

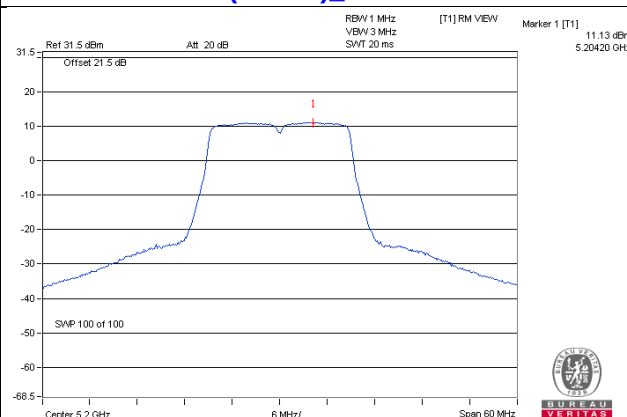

802.11ac (VHT40)_Chain 0 / CH46

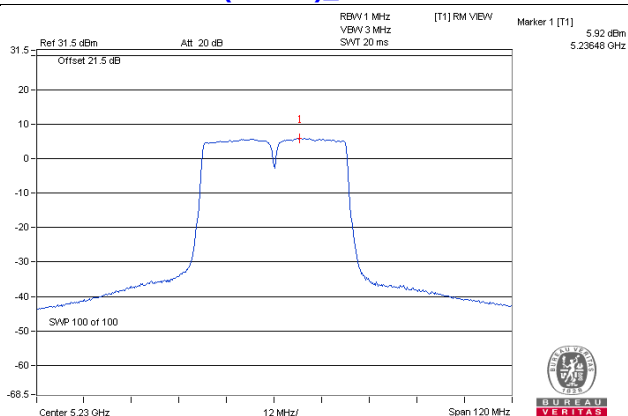

802.11ac (VHT80)_Chain 2 / CH42

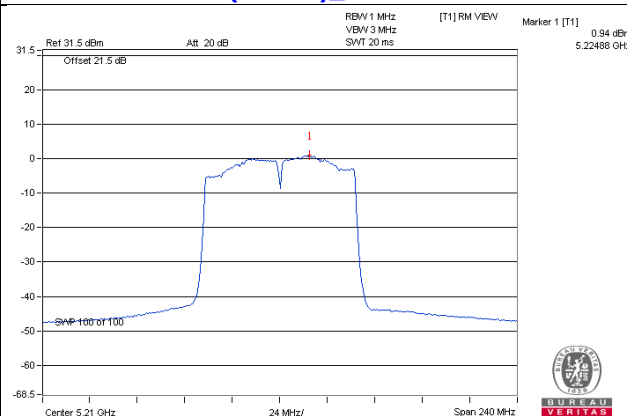

For U-NII-3:

CDD Mode

802.11a

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	2.13	4.35	4.77	9.12	29.43	Pass
	157	5785	1.98	4.20	4.77	8.97	29.43	Pass
	165	5825	2.00	4.22	4.77	8.99	29.43	Pass
1	149	5745	2.90	5.12	4.77	9.89	29.43	Pass
	157	5785	2.61	4.83	4.77	9.60	29.43	Pass
	165	5825	2.51	4.73	4.77	9.50	29.43	Pass
2	149	5745	1.84	4.06	4.77	8.83	29.43	Pass
	157	5785	1.88	4.10	4.77	8.87	29.43	Pass
	165	5825	1.83	4.05	4.77	8.82	29.43	Pass

Note: 1. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(6.57-6) = 29.43\text{dBm}$.

Beamforming Mode

802.11ac (VHT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	149	5745	1.94	4.16	4.77	8.93	29.43	Pass
	157	5785	1.86	4.08	4.77	8.85	29.43	Pass
	165	5825	1.93	4.15	4.77	8.92	29.43	Pass
1	149	5745	2.22	4.44	4.77	9.21	29.43	Pass
	157	5785	1.93	4.15	4.77	8.92	29.43	Pass
	165	5825	2.22	4.44	4.77	9.21	29.43	Pass
2	149	5745	1.47	3.69	4.77	8.46	29.43	Pass
	157	5785	1.75	3.97	4.77	8.74	29.43	Pass
	165	5825	1.51	3.73	4.77	8.50	29.43	Pass

Note: 1. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30-(6.57-6) = 29.43\text{dBm}$.

802.11ac (VHT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/300kHz)	PSD (dBm/500kHz)	10 log (N=3) dB	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
0	151	5755	-0.44	1.78	4.77	6.55	29.43	Pass
	159	5795	-0.45	1.77	4.77	6.54	29.43	Pass
1	151	5755	0.06	2.28	4.77	7.05	29.43	Pass
	159	5795	-0.49	1.73	4.77	6.50	29.43	Pass
2	151	5755	-0.43	1.79	4.77	6.56	29.43	Pass
	159	5795	-1.42	0.80	4.77	5.57	29.43	Pass

Note: 1. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (6.57 - 6) = 29.43\text{dBm}$.

802.11ac (VHT80)


TX chain	Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor		10 log (N=3) dB	Duty Factor (dB)	Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/500kHz)	Pass /Fail
			(dBm/300kHz)	(dBm/500kHz)					
0	155	5775	-6.43	-4.21	4.77	0.19	0.75	29.43	Pass
1	155	5775	-6.74	-4.52	4.77	0.19	0.44	29.43	Pass
2	155	5775	-6.52	-4.30	4.77	0.19	0.66	29.43	Pass

Note: 1. Directional gain = $1.8\text{dBi} + 10\log(3) = 6.57\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (6.57 - 6) = 29.43\text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a – Chain 1: CH 149

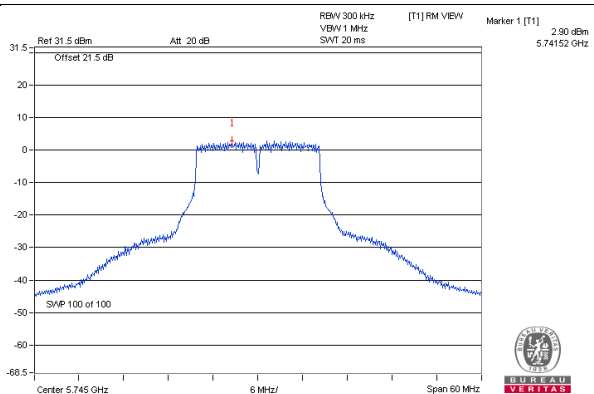


802.11ac (VHT20) – Chain 1: CH 149

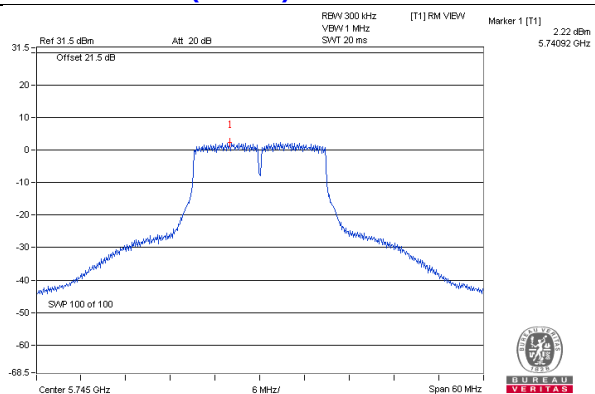

802.11ac (VHT40) – Chain 1: CH 151

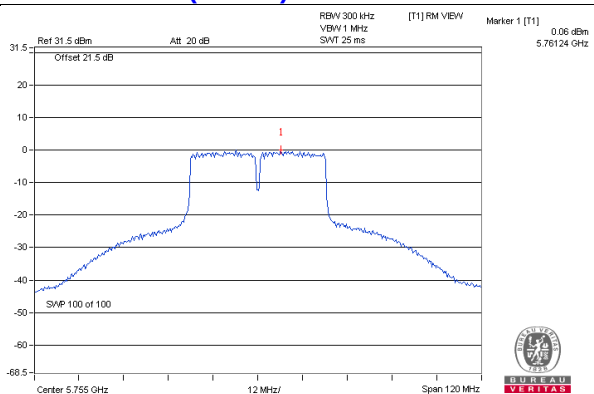

802.11ac (VHT80) – Chain 0: CH 155

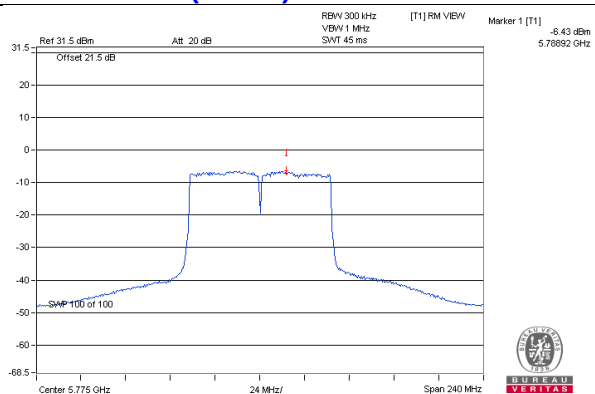


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

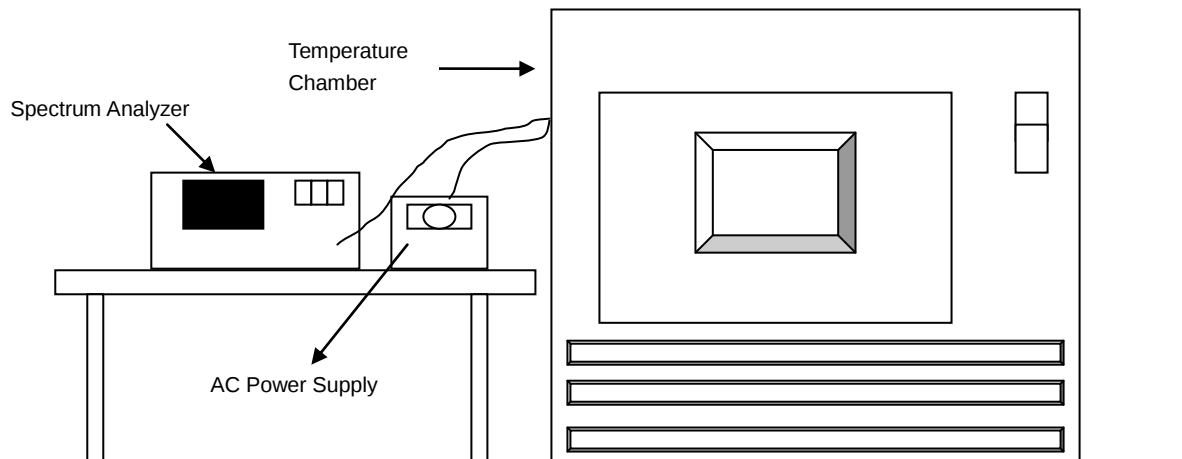

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0168	Pass	5180.0164	Pass	5180.0186	Pass	5180.0181	Pass
40	120	5179.9969	Pass	5179.9953	Pass	5179.9967	Pass	5179.997	Pass
30	120	5179.9858	Pass	5179.9875	Pass	5179.9829	Pass	5179.986	Pass
20	120	5180.0042	Pass	5180.0024	Pass	5180.0025	Pass	5180.0045	Pass
10	120	5180.0249	Pass	5180.0247	Pass	5180.0236	Pass	5180.0246	Pass
0	120	5179.9822	Pass	5179.9846	Pass	5179.9815	Pass	5179.9839	Pass
-10	120	5179.9995	Pass	5180.0026	Pass	5180.0011	Pass	5179.9988	Pass
-20	120	5180.0171	Pass	5180.0169	Pass	5180.0209	Pass	5180.0214	Pass
-30	120	5179.9818	Pass	5179.9806	Pass	5179.9826	Pass	5179.98	Pass


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minute		5 Minute		10 Minute	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5180.0052	Pass	5180.0029	Pass	5180.0018	Pass	5180.0036	Pass
	120	5180.0042	Pass	5180.0024	Pass	5180.0025	Pass	5180.0045	Pass
	102	5180.0044	Pass	5180.0014	Pass	5180.0031	Pass	5180.0045	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

CDD Mode

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	16.43	16.41	16.44	0.5	PASS
157	5785	16.45	16.43	16.43	0.5	PASS
165	5825	16.44	16.41	16.45	0.5	PASS

Beamforming Mode

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
149	5745	17.66	17.68	17.67	0.5	PASS
157	5785	17.65	17.66	17.69	0.5	PASS
165	5825	17.66	17.67	17.67	0.5	PASS

802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
151	5755	36.49	36.48	36.47	0.5	PASS
159	5795	36.46	36.48	36.46	0.5	PASS

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2		
155	5775	76.45	76.55	76.49	0.5	PASS

Spectrum Plot of Worst Value


802.11a_Chain 1 / CH149

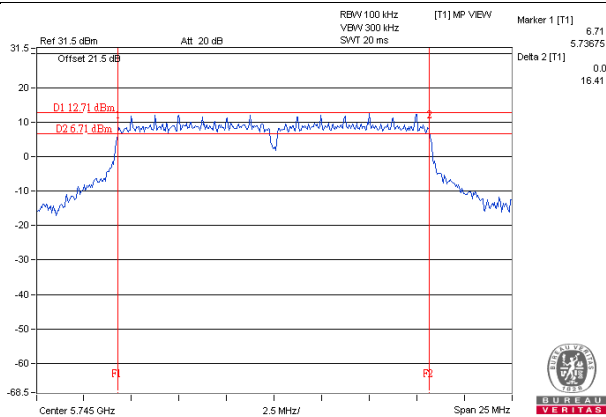


802.11ac (VHT20)_Chain 0 / CH157

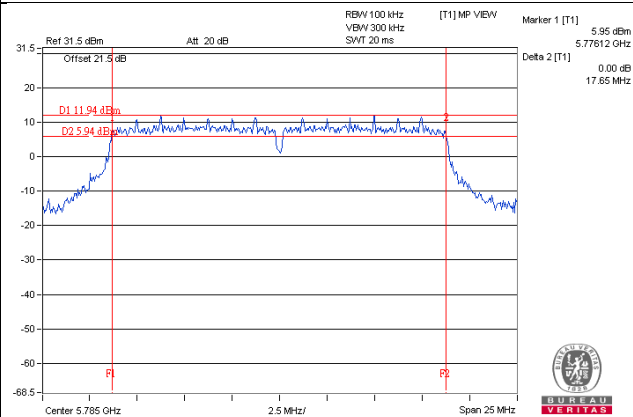

802.11ac (VHT40)_Chain 0 / CH159

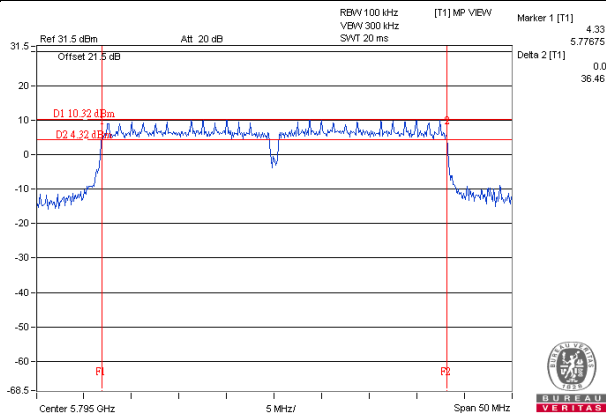

802.11ac (VHT80)_Chain 0 / CH155

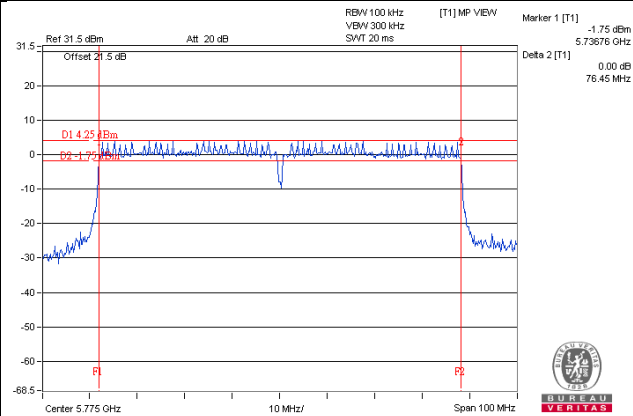

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

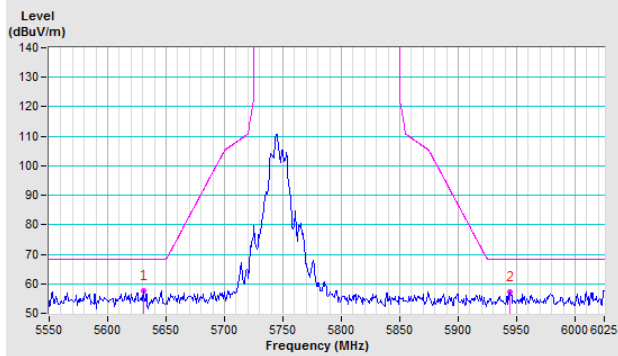


Vertical

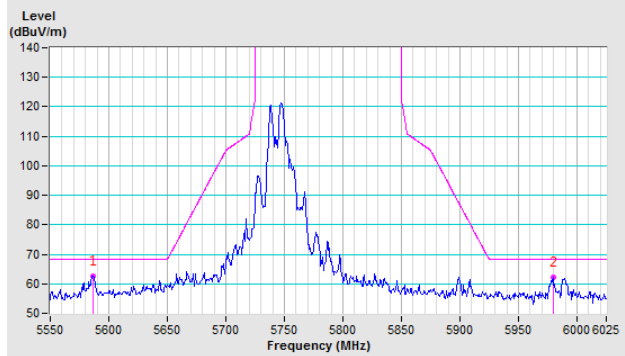


CH 157 5785 MHz

Horizontal

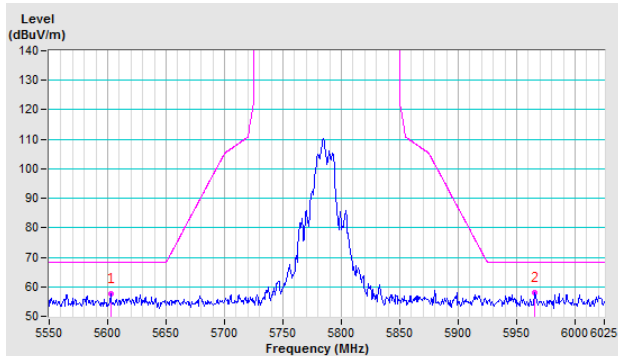


Vertical

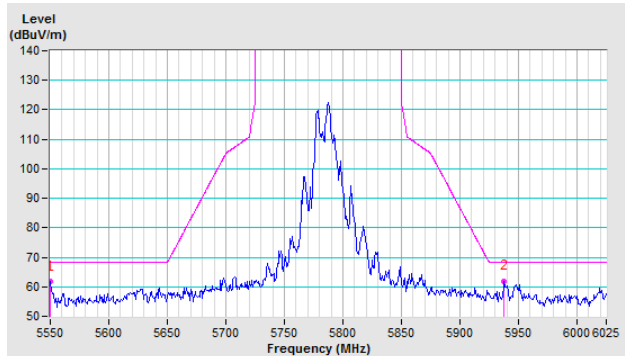


CH 165 5825 MHz

Horizontal

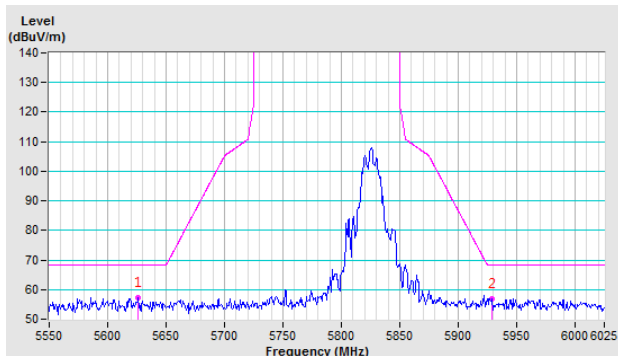


Vertical

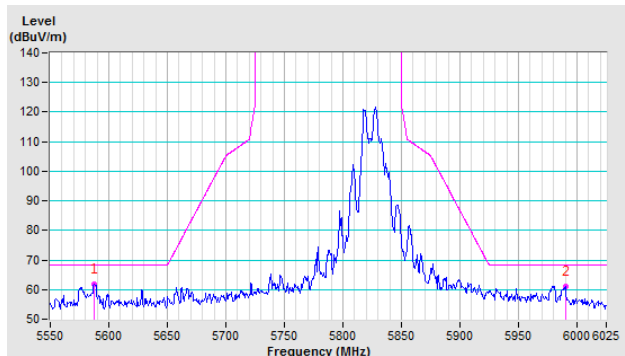


802.11ac (VHT20)

CH 149 5745 MHz

Horizontal

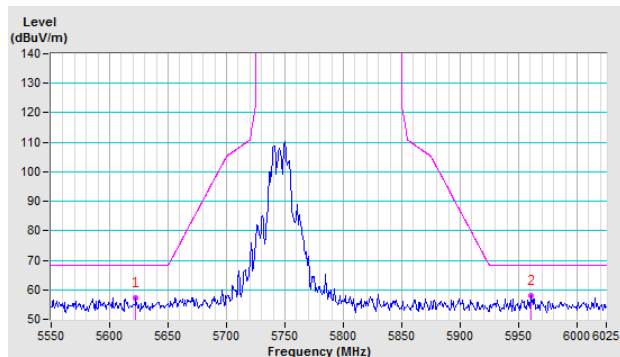


Vertical

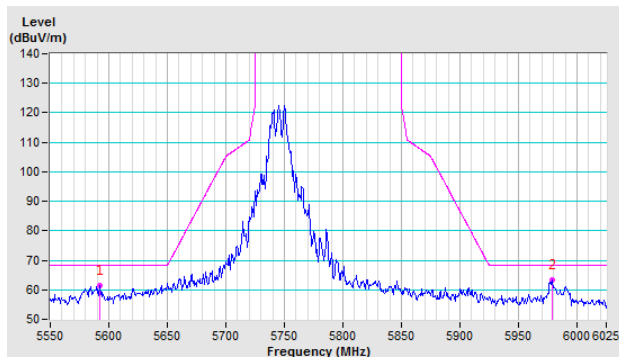


CH 157 5785 MHz

Horizontal

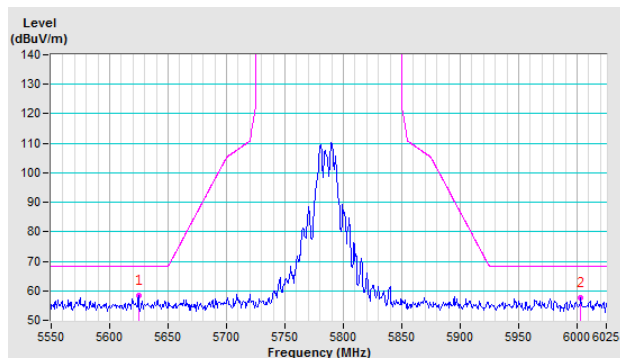


Vertical

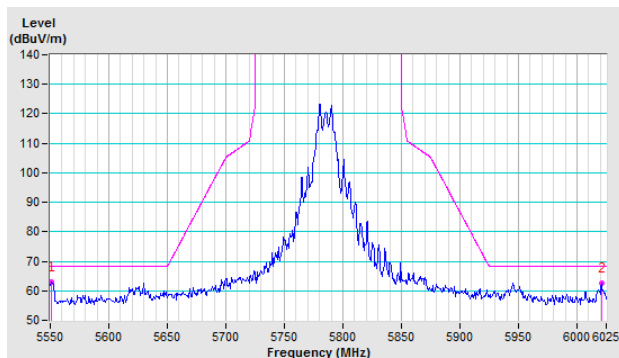


CH 165 5825 MHz

Horizontal

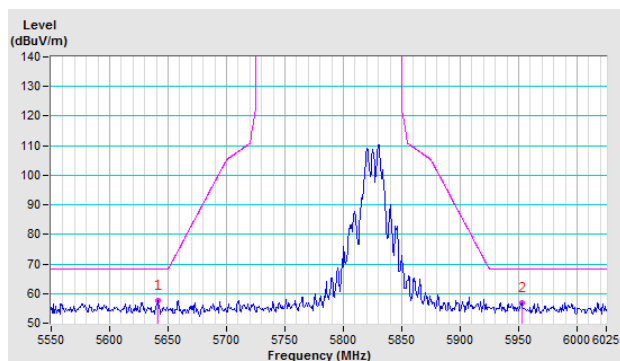


Vertical

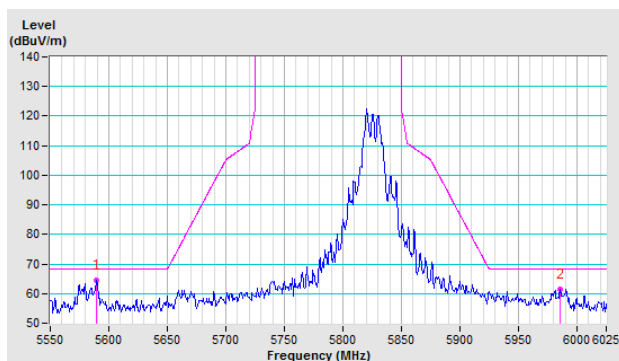


802.11ac (VHT40)

CH 151 5755 MHz

Horizontal

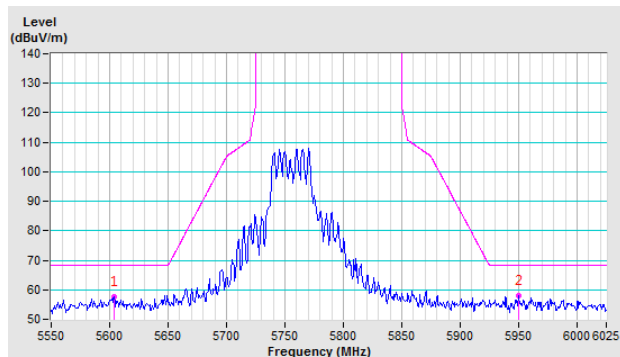


Vertical

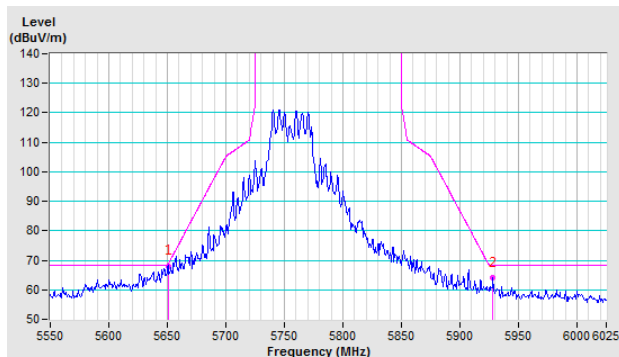


CH 159 5795 MHz

Horizontal

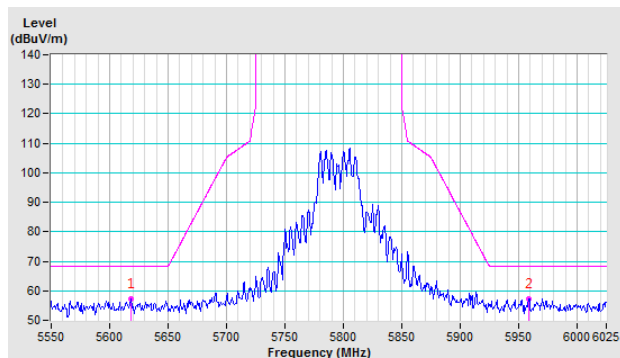


Vertical

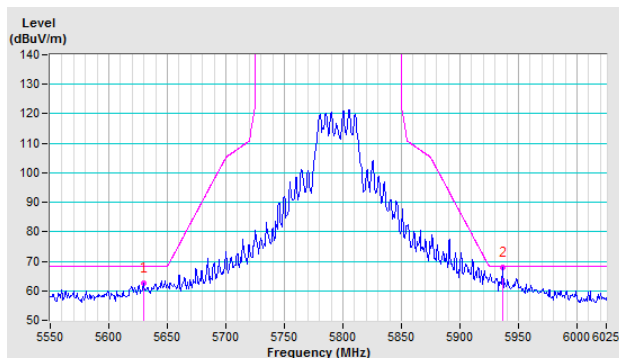


802.11ac (VHT80)

CH 155 5775 MHz

Horizontal

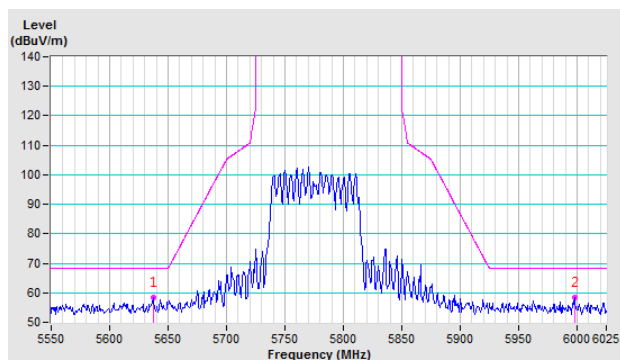

Vertical

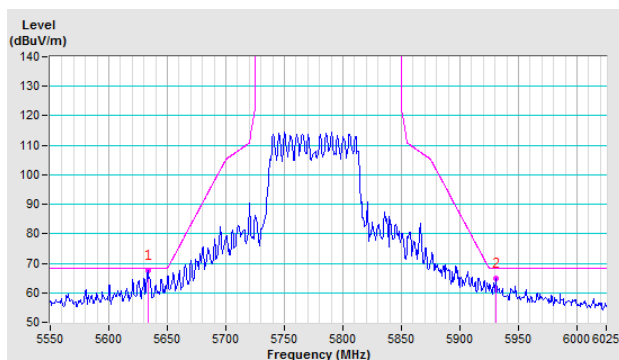

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---