




FCC RADIO TEST REPORT

FCC ID : UZ7FXR9000
Equipment : Industrial Fixed RFID Reader
Brand Name : ZEBRA
Model Name : FXR9000
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Aug. 16, 2023 and testing was started from Sep. 13, 2023 to Oct. 14, 2023. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	7
1.3 Modification of EUT	8
1.4 Testing Location	9
1.5 Applicable Standards.....	9
2 Test Configuration of Equipment Under Test.....	10
2.1 Carrier Frequency Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	12
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 Test Result.....	15
3.1 Number of Channel Measurement	15
3.2 Hopping Channel Separation Measurement	18
3.3 Dwell Time Measurement.....	21
3.4 20dB and 99% Bandwidth Measurement	24
3.5 Output Power Measurement.....	29
3.6 Conducted Band Edges Measurement.....	31
3.7 Conducted Spurious Emission Measurement	34
3.8 Radiated Band Edges and Spurious Emission Measurement	37
3.9 AC Power Line Conducted Emissions Measurement.....	41
3.10 Antenna Requirements.....	43
4 List of Measuring Equipment	44
5 Measurement Uncertainty	46
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR381616-01	01	Initial issue of report	Nov. 23, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.5	15.247(b)(1)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	6.38 dB under the limit at 30.00 MHz
3.9	15.207	AC Conducted Emission	Pass	24.15 dB under the limit at 0.18 MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Wei Chen

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Industrial Fixed RFID Reader
Brand Name	ZEBRA
Model Name	FXR9000
FCC ID	UZ7FXR9000
Sample 1	FXR90000-400000-WR 4-Port Ethernet
Sample 2	FXR90011-400000-WR 4+1 Port & Bolt-on: BT, WLAN
EUT supports Radios application	UHF RFID
HW Version	EV2
SW Version	0.4.11
MFD	01AUG23
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Supported Unit Used in Test Configuration and System				
Cable, 3-way USB Splitter	Brand Name	ZEBRA	Model Name	ADP-USB0010-M12
Cable, USB-C Host, 5ft.	Brand Name	ZEBRA	Model Name	CBL-USBCHST015-M12
Cable, USB-C Host, 15ft.	Brand Name	ZEBRA	Model Name	CBL-USBCHST035-M12
Cable, USB-C Client, 5ft.	Brand Name	ZEBRA	Model Name	CBL-USBCCLT015-M12
Cable, USB-C Client, 15ft.	Brand Name	ZEBRA	Model Name	CBL-USBCCLT035-M12
Cable, USB-A Client, 5ft.	Brand Name	ZEBRA	Model Name	CBL-USBACLT015-M12
Cable, USB-A Client, 15ft.	Brand Name	ZEBRA	Model Name	CBL-USBACLT035-M12
Cable, GPIO	Brand Name	ZEBRA	Model Name	CBL-GP0050-M12M12A
Cable, 12V (Cigarette Lighter) Power Adapter, 3.5 meter	Brand Name	ZEBRA	Model Name	CBL-PWRD035-M12CL
Cable, DC Power Cord (Flying Leads), 3.5m	Brand Name	ZEBRA	Model Name	CBL-PWRD035-M1200
Cable, DC Power Cord (Flying Leads), 10m	Brand Name	ZEBRA	Model Name	CBL-PWRD100-M1200
Cable, Power Supply Output Adapter, 3.5m	Brand Name	ZEBRA	Model Name	CBL-PWRD035-M12M12
Cable, Power Supply Output Adapter, 10m	Brand Name	ZEBRA	Model Name	CBL-PWRD100-M12M12
Cable, DC-DC Power Supply Input	Brand Name	ZEBRA	Model Name	CBL-PWRD150-M12M00
Cable, AC-DC Power Supply Input (Flying Leads)	Brand Name	ZEBRA	Model Name	CBL-PWRA150-M1200
Cable, AC-DC Power Supply Input (IEC plug)	Brand Name	ZEBRA	Model Name	CBL-PWRA035-M12IEC



Supported Unit Used in Test Configuration and System				
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4000680R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4001800R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4002400R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-3B4003600R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 68", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4000680R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 180", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4001800R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 240", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4002400R
CBL: RF, N STR PLUG TO RP-TNC STR PLUG ON LMR-240, 360", IP67 Sealed	Brand Name	ZEBRA	Model Name	CBLRD-1B4003600R
CHIMERA ETHERNET CABLE 5M	Brand Name	ZEBRA	Model Name	CBL-ENT00500-M1200
CHIMERA ETHERNET CABLE 15M	Brand Name	ZEBRA	Model Name	CBL-ENT01500-M1200
Outdoor AC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V90W0WW (Spec PD-007875-01)
Forklift DC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V90W1WW (Spec PD-007876-01)
Indoor AC-DC PSU	Brand Name	ZEBRA	Model Name	PWR-BGA24V78W3WW (Spec PD-007877-01)
PoE adaptor	Brand Name	ZEBRA	Model Name	PD-9001GR/AT/AC
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN480
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN650
External RFID Antenna	Brand Name	ZEBRA	Model Name	SR5502
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN510
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN520
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN610
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN620
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN720
External RFID Antenna	Brand Name	ZEBRA	Model Name	AN440
External RFID Antenna	Brand Name	ZEBRA	Model Name	SP5504

Supported Unit Used in Test Configuration and System				
AN650 Antenna cable(5ft/1524mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4000600R
AN650 Antenna cable(20ft/6096mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4002400R
AN650 Antenna cable(15ft/4572mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001800R
AN650 Antenna cable(30ft/9144mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4003600R
AN650 Antenna cable(10ft/3048mm)	Brand Name	ZEBRA	Model Name	CBLRD-1C4001200R

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	50
Maximum Output Power to Antenna	<Internal Antenna> 29.25 dBm (0.8414 W) <External Antenna> 29.29 dBm (0.8492 W)
20dB Bandwidth	<Internal Antenna> 0.096 MHz <External Antenna> 0.096 MHz
99% Occupied Bandwidth	<Internal Antenna> 0.082 MHz <External Antenna> 0.082 MHz

Product Specification is subject to this standard	
Antenna Type / Gain	<Internal Antenna> <L000213-01> Patch Antenna with gain 7.2 dBi <External Antenna> <AN650> Patch Antenna with gain 6.0 dBi <AN480> Patch Antenna with gain 6.0 dBi <SR5502> Patch Antenna with gain 6.7 dBi <AN510> Patch Antenna with gain 5.5 dBi <AN520> Patch Antenna with gain 2.5 dBi <AN610> Patch Antenna with gain 2.0 dBi <AN620> Patch Antenna with gain 4.0 dBi <AN720> Patch Antenna with gain 3.0 dBi <AN440> Patch Antenna with gain 6.0 dBi <SP5504> Patch Antenna with gain 4.9 dBi
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	1	902.75	28	916.25
	2	903.25	29	916.75
	3	903.75	30	917.25
	4	904.25	31	917.75
	5	904.75	32	918.25
	6	905.25	33	918.75
	7	905.75	34	919.25
	8	906.25	35	919.75
	9	906.75	36	920.25
	10	907.25	37	920.75
	11	907.75	38	921.25
	12	908.25	39	921.75
	13	908.75	40	922.25
	14	909.25	41	922.75
	15	909.75	42	923.25
	16	910.25	43	923.75
	17	910.75	44	924.25
	18	911.25	45	924.75
	19	911.75	46	925.25
	20	912.25	47	925.75
	21	912.75	48	926.25
	22	913.25	49	926.75
	23	913.75	50	927.25
	24	914.25		
	25	914.75		
	26	915.25		
	27	915.75		

2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	<Internal Antenna and External Antenna>
	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
	Mode 3: UHF RFID Tx 927.25 MHz
Radiated Test Cases	<Internal Antenna>
	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
	Mode 3: UHF RFID Tx 927.25 MHz
	<External Antenna>
	Mode 1: UHF RFID Tx 902.75 MHz
	Mode 2: UHF RFID Tx 914.75 MHz
	Mode 3: UHF RFID Tx 927.25 MHz


Summary table of Test Cases	
Test Item	UHF RFID
AC Conducted Emission	Mode 1: RFID link + ADP-USB0010-M12 (3-way USB Splitter) (2) + CBL-GP0050-M12M12A, 5m (GPIO Extension) (7) + CBL-PWRD035-M12M12, 3.5 meter (16) + PWR-BGA24V90W0WW (Outdoor AC-DC PSU) (28) + CBL-PWRA035-M12IEC (22) + CBL-USBCHST015-M12, 1.5m (3) load with USB Flash Drive + CBL-ENT01500-M1200,15M (27) (Data Link with Notebook) + CBL-USBCHST035-M12, 3.5m (23) load with USB Flash Drive + CBL-USBACLT035-M12, 3.5m (24) load with Notebook for Sample 1
Remark: 1. Data Link with Notebook means data application transferred mode between EUT and Notebook. 2. For Radiated Test Cases, the tests were performed Sample 1.	

2.3 Connection Diagram of Test System


<AC Conducted Emission Mode>

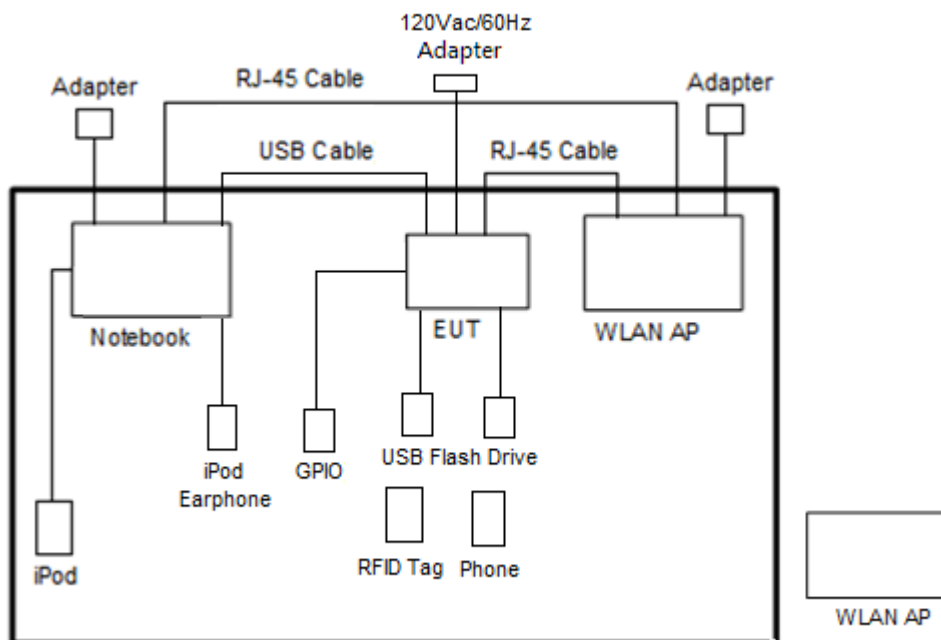

<Radiated Spurious Emission Mode for Internal Antenna>

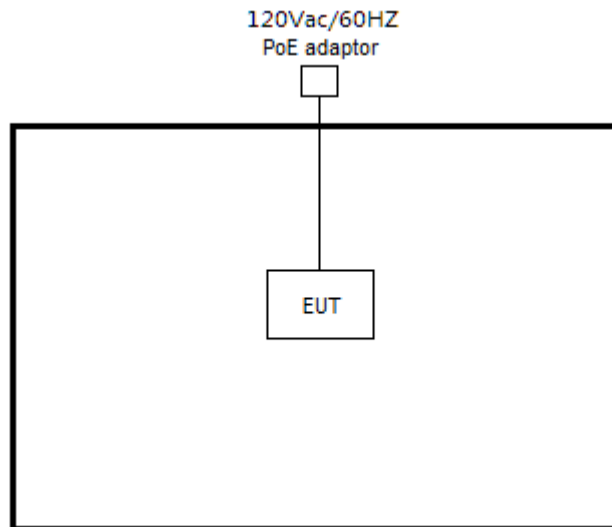

<Radiated Spurious Emission Mode for External Antenna>

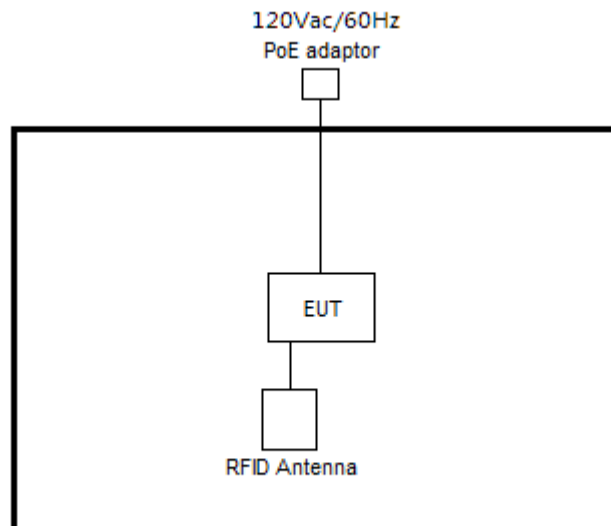

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded, 1.8 m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	iPod	Apple	A1285	FCC DoC	Shielded, 1.0m	N/A
4.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
5.	USB Flash Drive	SanDisk	E8BOC	N/A	N/A	N/A
6.	Phone	ZEBRA	TC26	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.65” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 902.75-927.25 MHz band shall use at least 25 channels.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup

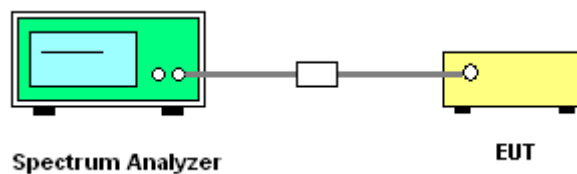




3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%
Number of Hopping (Channel)		Limits (Channel)	
50		> 25	
		Pass/Fail	
		Pass	

<Internal Antenna>

Number of Hopping Channel Plot on Channel 00 - 4950

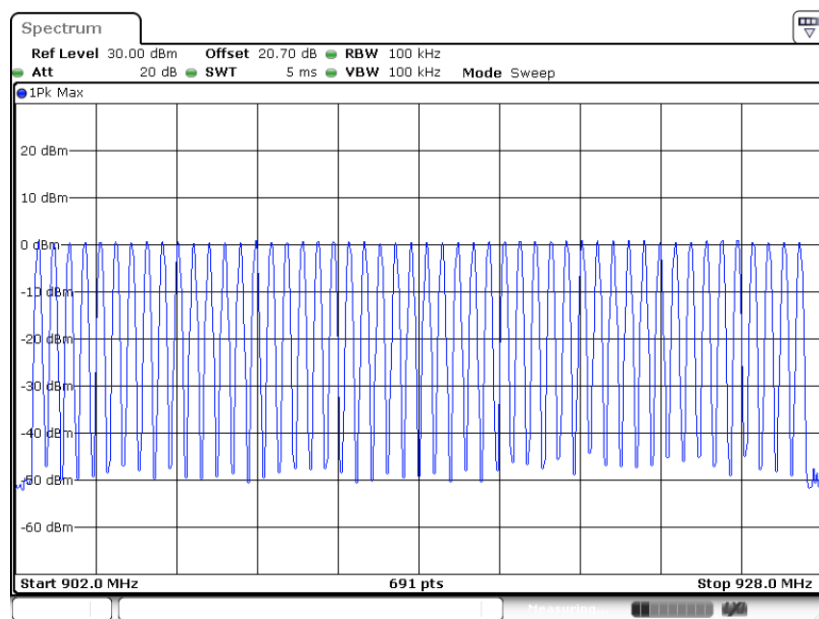


Date: 12.OCT.2023 20:18:25



<External Antenna>

Number of Hopping Channel Plot on Channel 00 - 49

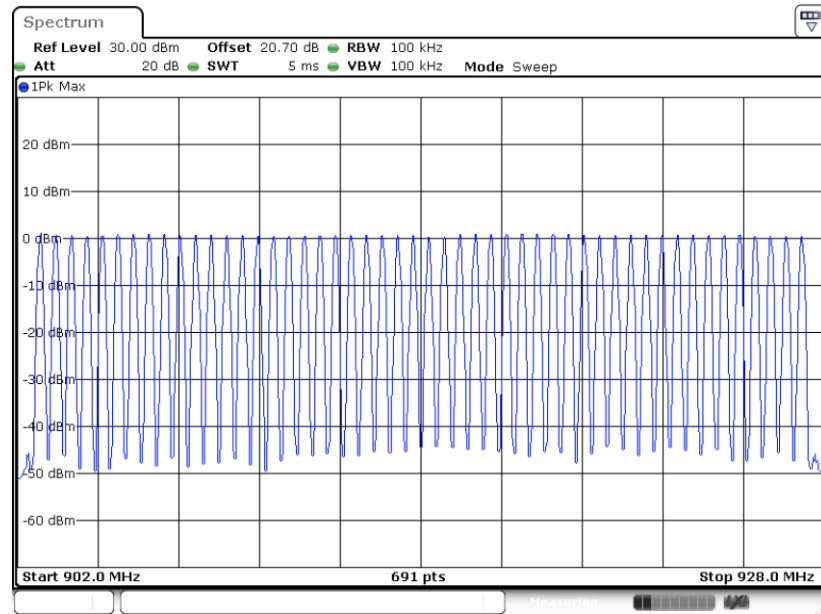

Date: 12.OCT.2023 01:10:24

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902.75-927.25 MHz band may have hopping channel carrier frequencies that are 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 100 kHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.2.4 Test Setup

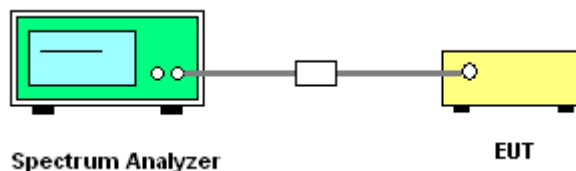




3.2.5 Test Result of Hopping Channel Separation

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>


Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.501	0.0957	Pass
UHF RFID	1	914.75	0.498	0.0942	Pass
UHF RFID	1	927.25	0.501	0.0942	Pass

Channel Separation Plot on 902.75 MHz

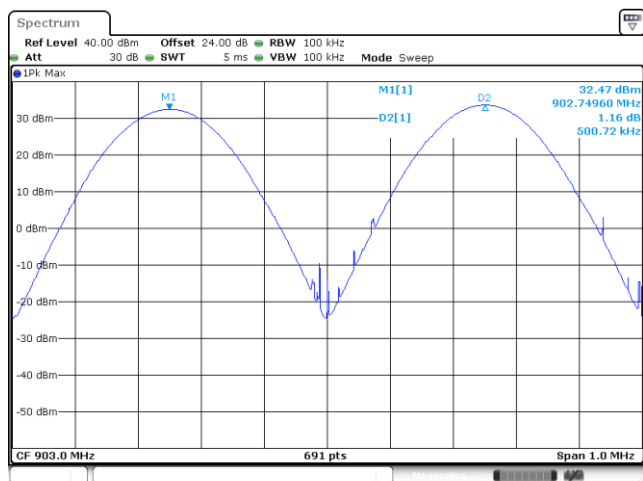


Date: 2.OCT.2023 20:45:49

Channel Separation Plot on 914.75 MHz

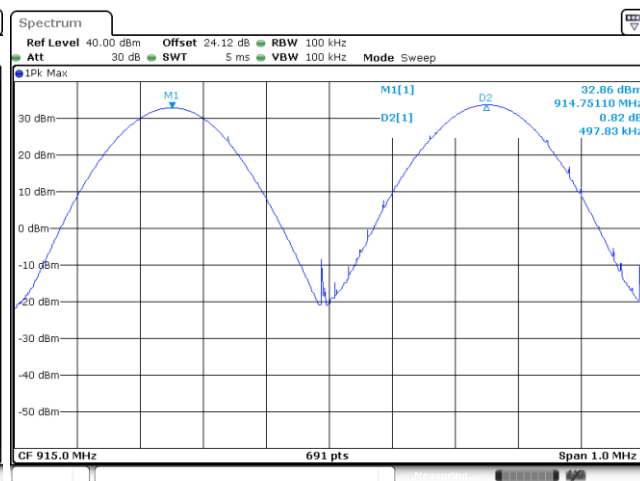

Date: 2.OCT.2023 20:49:27


Channel Separation Plot on 927.25 MHz

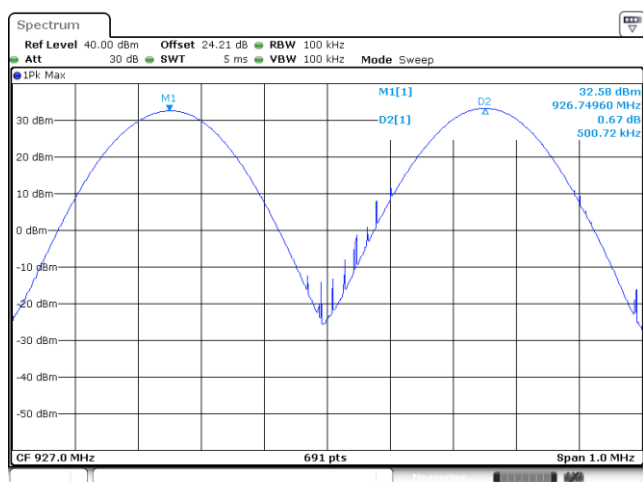


Date: 2.OCT.2023 20:53:04

**<External Antenna>**


Mod.	NTX	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	902.75	0.501	0.0957	Pass
UHF RFID	1	914.75	0.499	0.0942	Pass
UHF RFID	1	927.25	0.499	0.0942	Pass

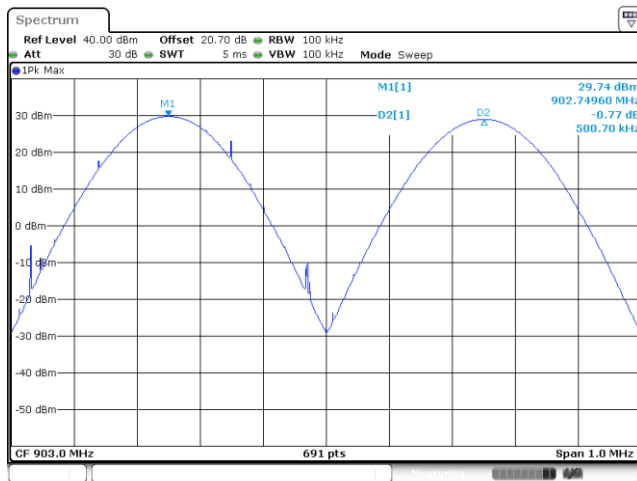Channel Separation Plot on 902.75 MHz

Date: 29.SEP.2023 01:29:10

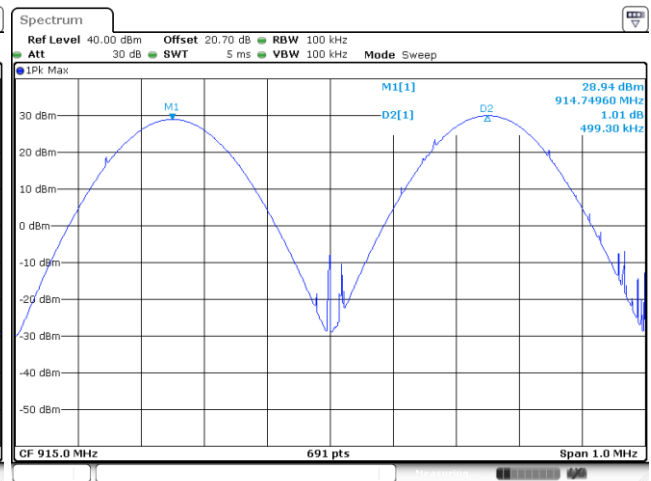Channel Separation Plot on 914.75 MHz

Date: 29.SEP.2023 01:32:00

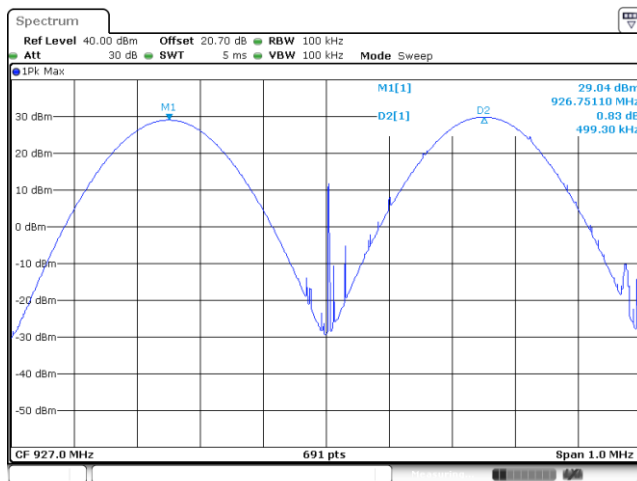Channel Separation Plot on 927.25 MHz

Date: 29.SEP.2023 01:33:45

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW $\geq$ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup






3.3.5 Test Result of Dwell Time

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>


Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	3.48	77.00	0.268	0.4	Pass

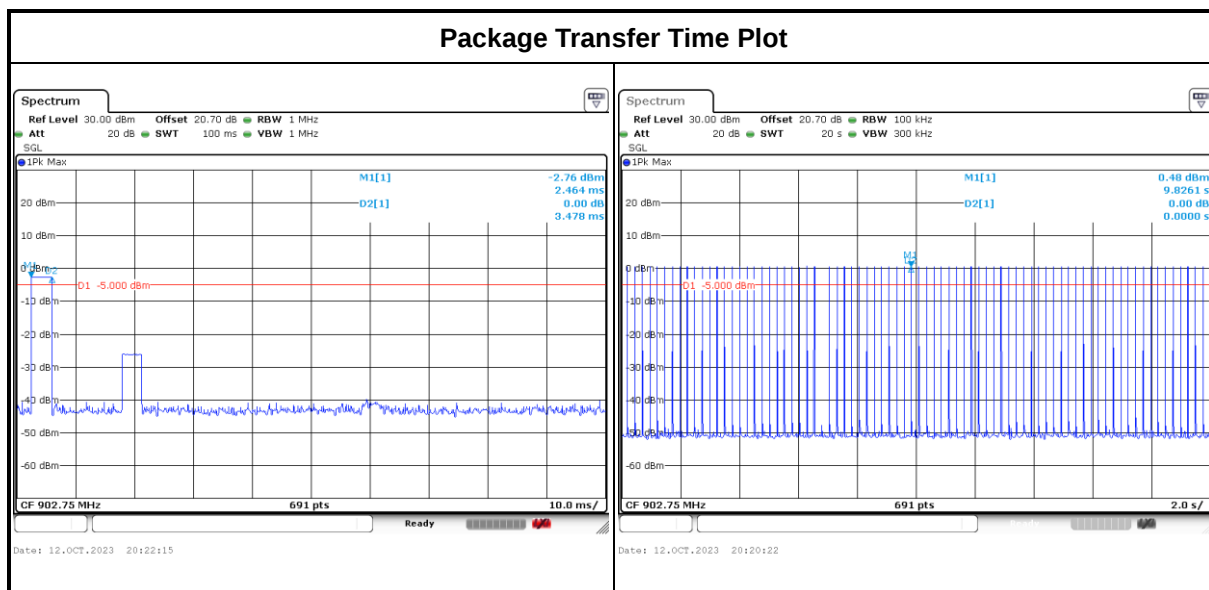

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time



Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	3.48	80.00	0.278	0.4	Pass

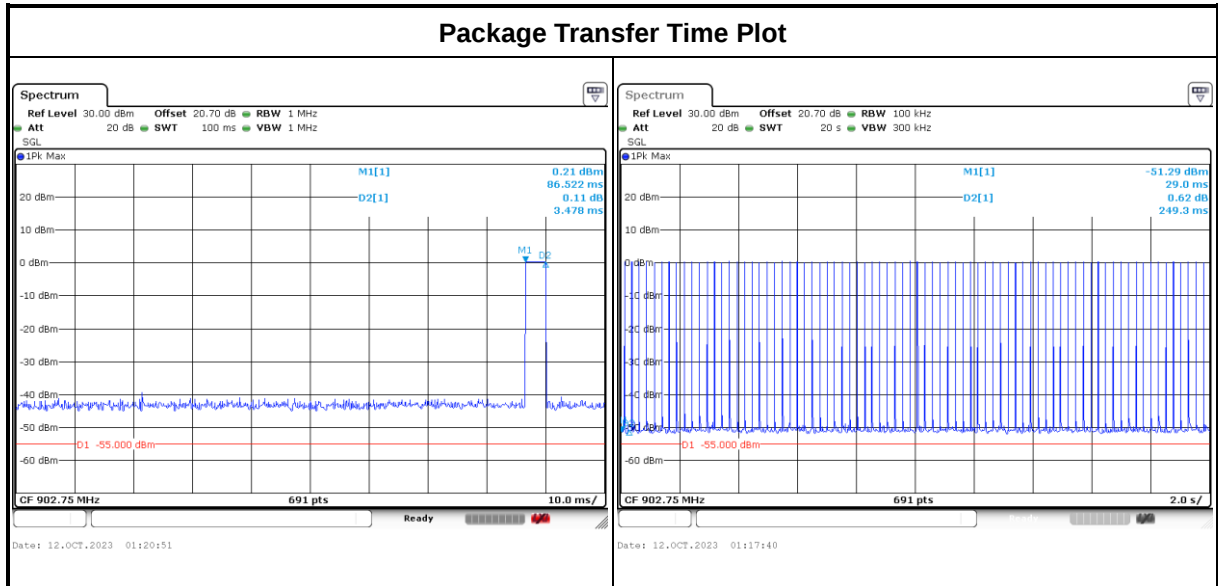

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW $\geq 1\%$ of the 20 dB bandwidth; VBW $\geq$ RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW $\geq 1\text{-}5\%$ of the 99% bandwidth; VBW $\geq 3 * \text{RBW}$; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

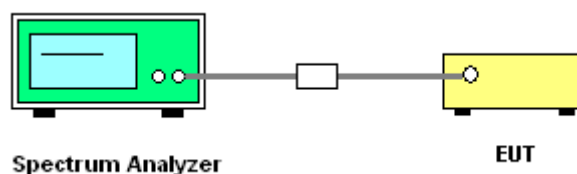




3.4.5 Test Result of 20dB Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


<Internal Antenna>

Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.096	Pass
UHF RFID	1	914.75	0.094	Pass
UHF RFID	1	927.25	0.094	Pass


20 dB Bandwidth Plot on 902.75 MHz

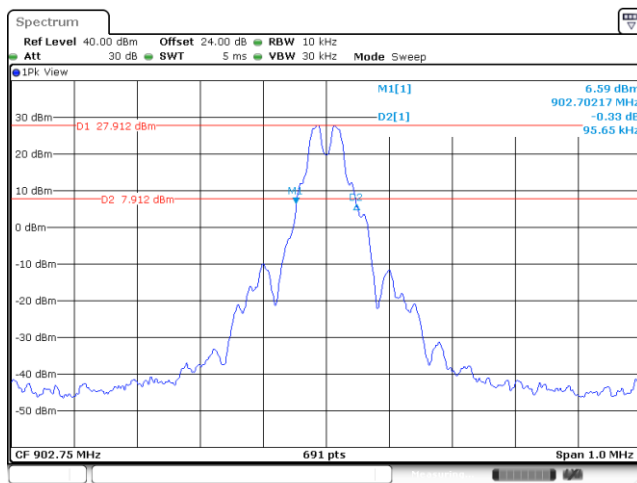

20 dB Bandwidth Plot on 914.75 MHz

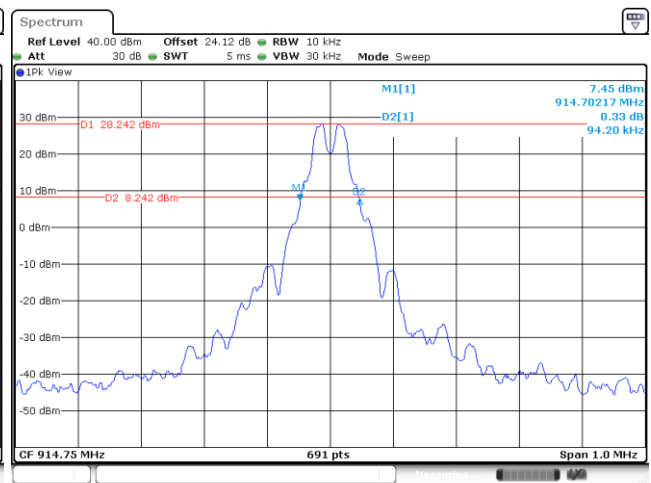


20 dB Bandwidth Plot on 927.25 MHz

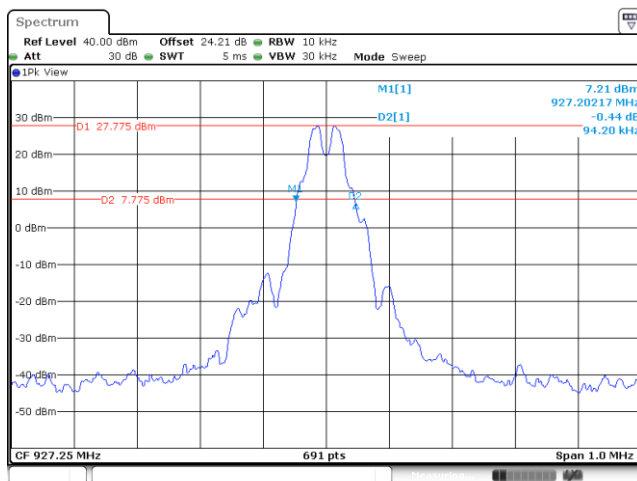


**<External Antenna>**


Mod.	NTX	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	902.75	0.096	Pass
UHF RFID	1	914.75	0.094	Pass
UHF RFID	1	927.25	0.094	Pass

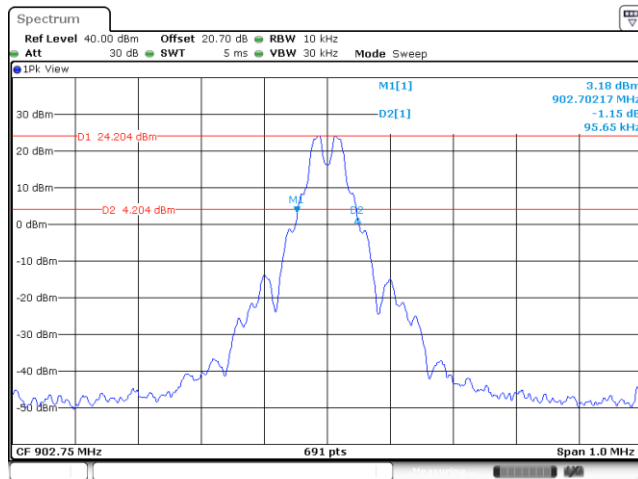20 dB Bandwidth Plot on 902.75 MHz

Date: 29.SEP.2023 01:25:03

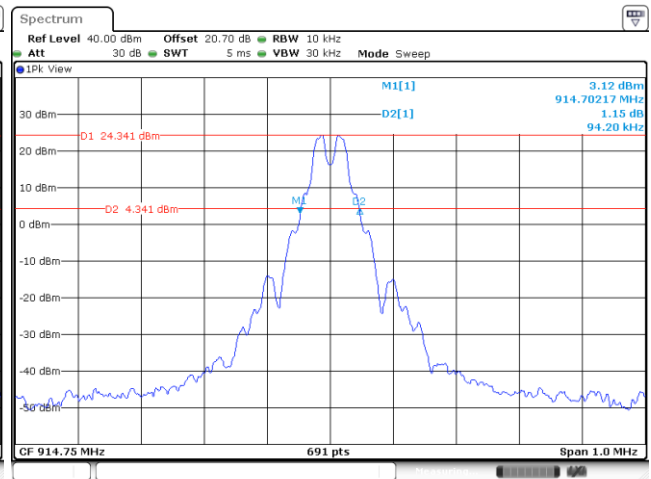20 dB Bandwidth Plot on 914.75 MHz

Date: 29.SEP.2023 01:30:16

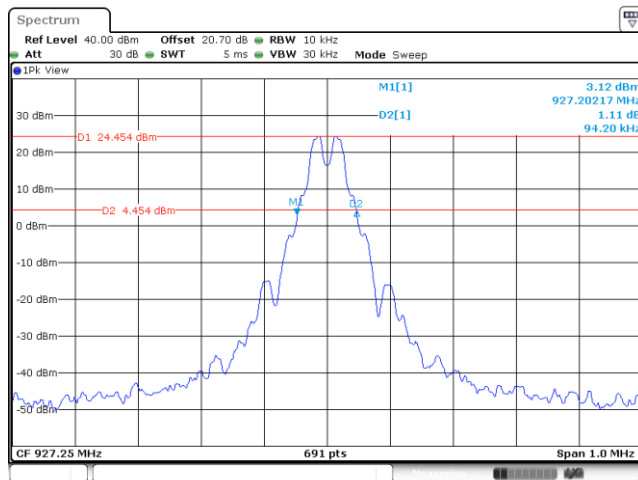20 dB Bandwidth Plot on 927.25 MHz

Date: 29.SEP.2023 01:34:44




3.4.6 Test Result of 99% Occupied Bandwidth

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.082	Reporting Only
UHF RFID	1	914.75	0.081	Reporting Only
UHF RFID	1	927.25	0.080	Reporting Only

99% Occupied Bandwidth Plot on 902.75 MHz

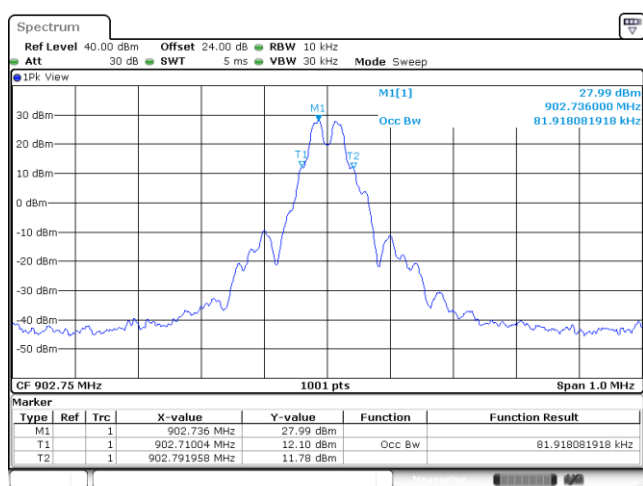


Date: 2.OCT.2023 20:41:53

99% Occupied Bandwidth Plot on 914.75 MHz

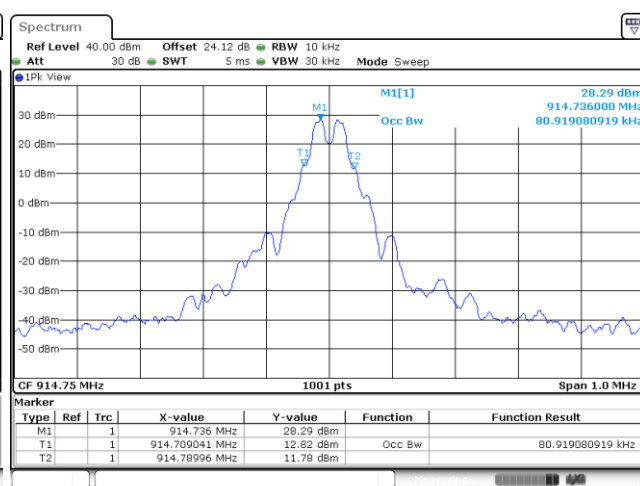

Date: 2.OCT.2023 20:47:22

99% Occupied Bandwidth Plot on 927.25 MHz

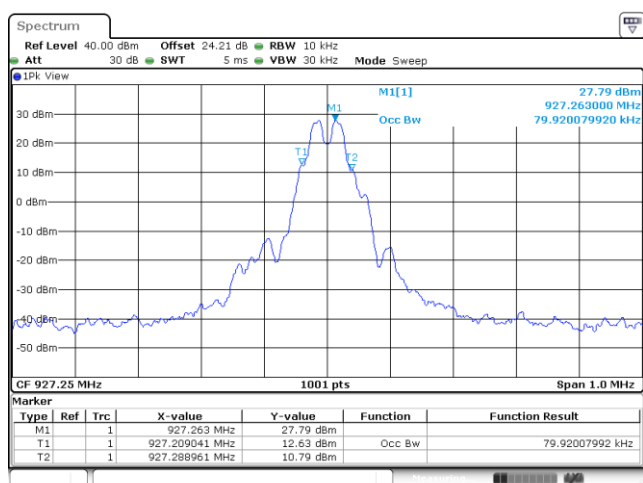


Date: 2.OCT.2023 20:53:48


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**<External Antenna>**


Mod.	NTX	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	902.75	0.082	Reporting Only
UHF RFID	1	914.75	0.081	Reporting Only
UHF RFID	1	927.25	0.081	Reporting Only

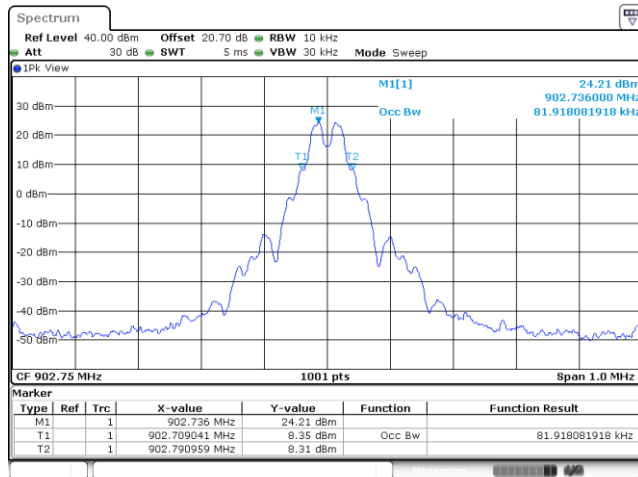99% Occupied Bandwidth Plot on 902.75 MHz

Date: 29.SEP.2023 01:24:28

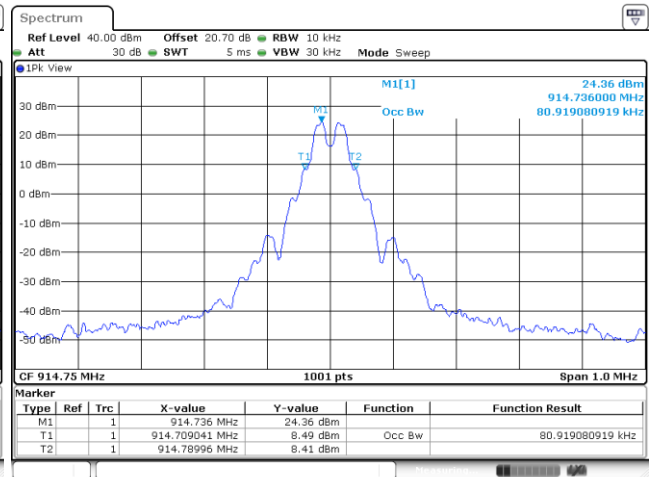99% Occupied Bandwidth Plot on 914.75 MHz

Date: 29.SEP.2023 01:30:02

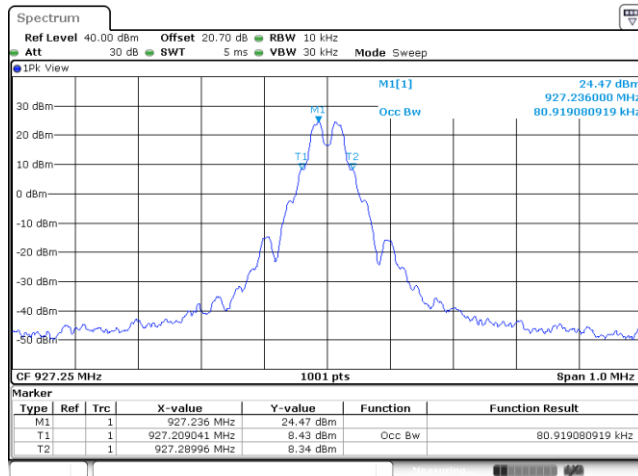99% Occupied Bandwidth Plot on 927.25 MHz

Date: 29.SEP.2023 01:34:02

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

Section 15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

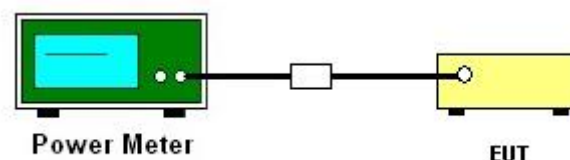

3.5.5 Test Result of Output Power

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	29.17	30.00	Pass
914.75	29.24	30.00	Pass
927.25	29.25	30.00	Pass

<External Antenna>

Frequency (MHz)	RF Power (dBm)		
	UHF	Max. Limits (dBm)	Pass/Fail
902.75	29.18	30.00	Pass
914.75	29.26	30.00	Pass
927.25	29.29	30.00	Pass

3.5.6 Test Result of Average Power (Reporting Only)

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>

Frequency (MHz)	RF Power (dBm)	
	UHF	
902.75	27.18	
914.75	27.15	
927.25	27.19	

<External Antenna>

Frequency (MHz)	RF Power (dBm)	
	UHF	
902.75	27.17	
914.75	27.23	
927.25	27.23	

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.

3.6.4 Test Setup

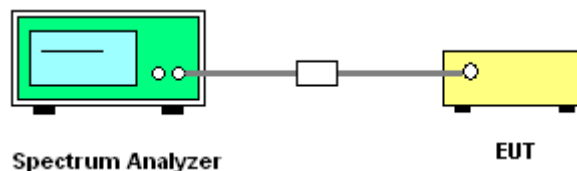




3.6.5 Test Result of Conducted Band Edges


Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>

Low Band Edge Plot on 902.75 MHz

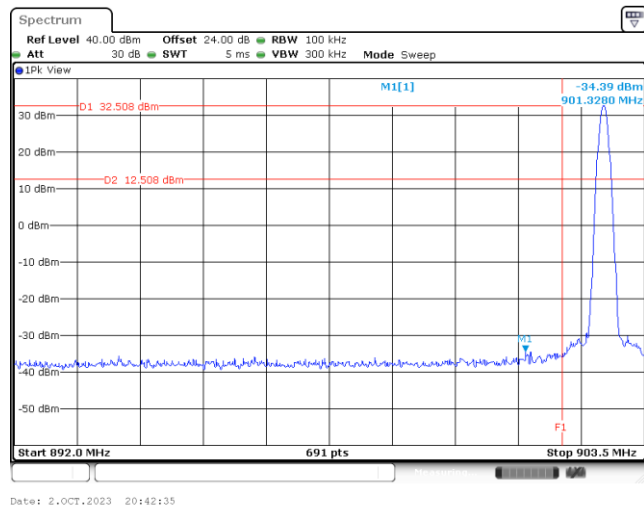


High Band Edge Plot on 927.25 MHz

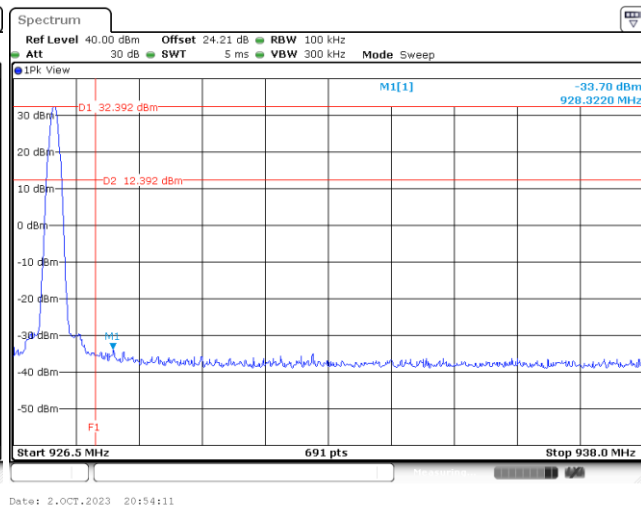


<External Antenna>

Low Band Edge Plot on 902.75 MHz

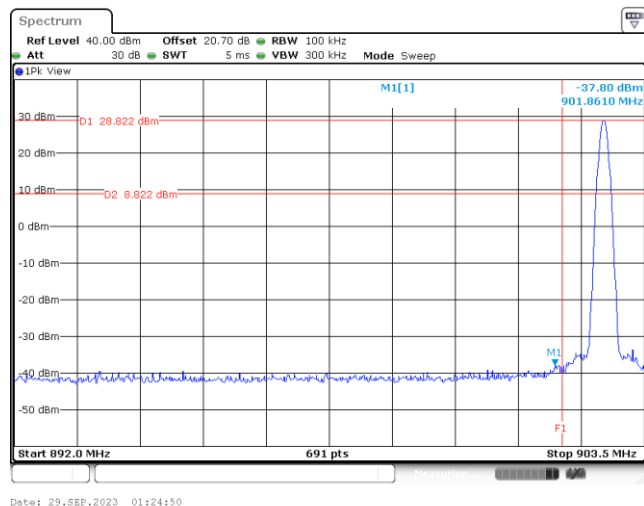

High Band Edge Plot on 927.25 MHz

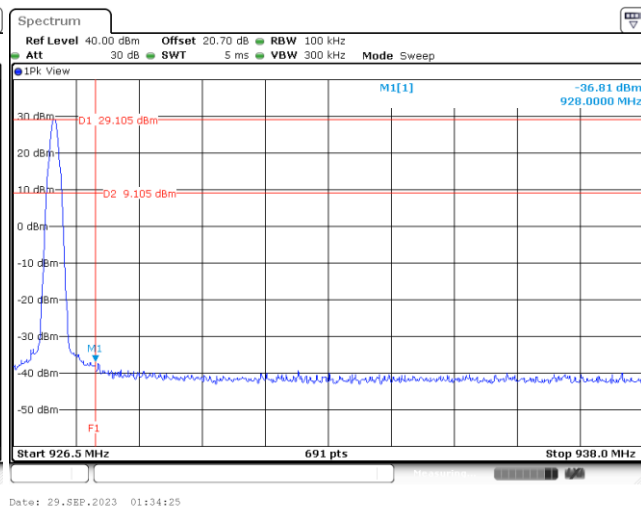




3.6.6 Test Result of Conducted Mode Band Edges

Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%


<Internal Antenna>

Hopping Mode Low Band Edge Plot on 902.75 MHz Hopping Mode High Band Edge Plot on 927.25 MHz

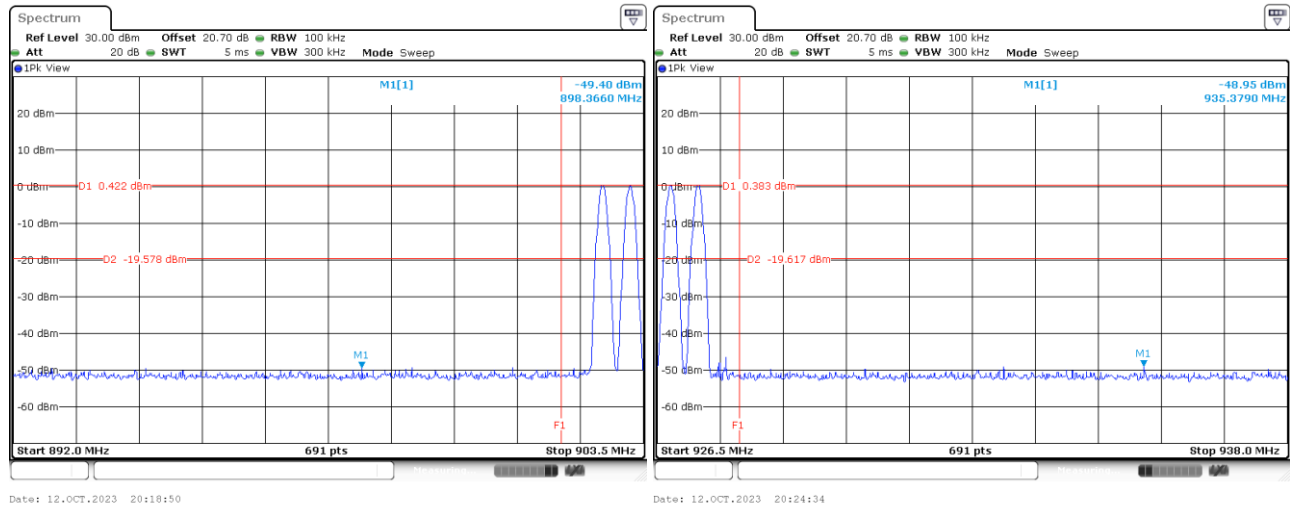

<External Antenna>

Hopping Mode Low Band Edge Plot on 902.75 MHz Hopping Mode High Band Edge Plot on 927.25 MHz

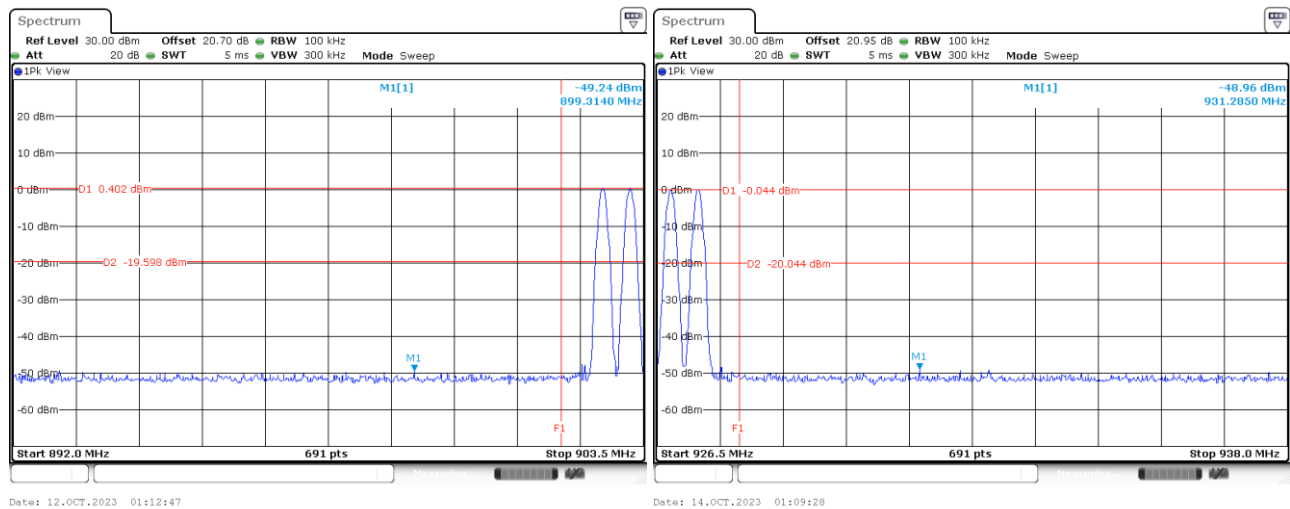

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.7.4 Test Setup

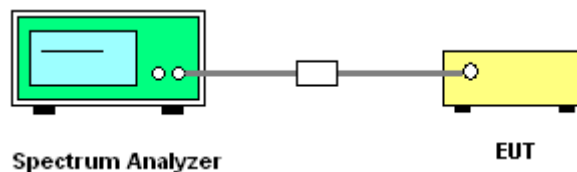





3.7.5 Test Result of Conducted Spurious Emission


Test Mode :	UHF RFID	Temperature :	20~25°C
Test Engineer :	Willy Chang	Relative Humidity :	50~56%

<Internal Antenna>

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

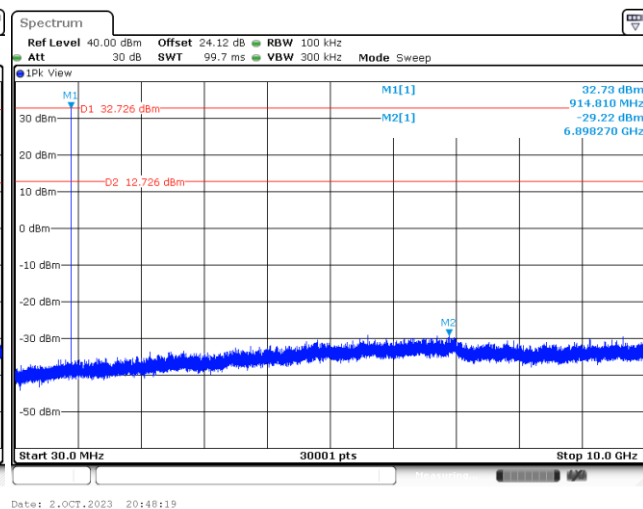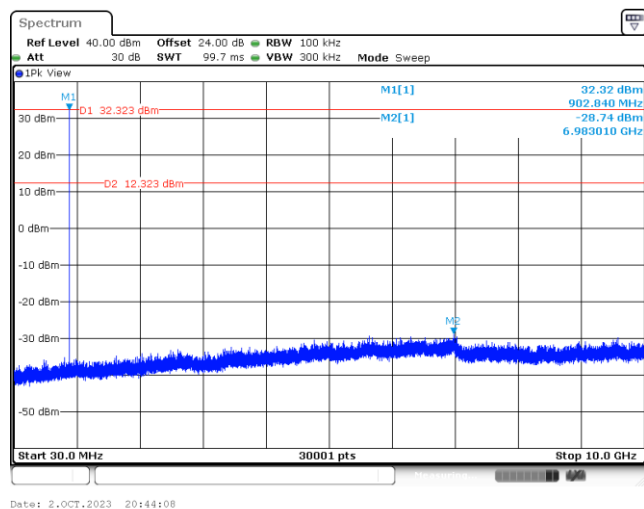


CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

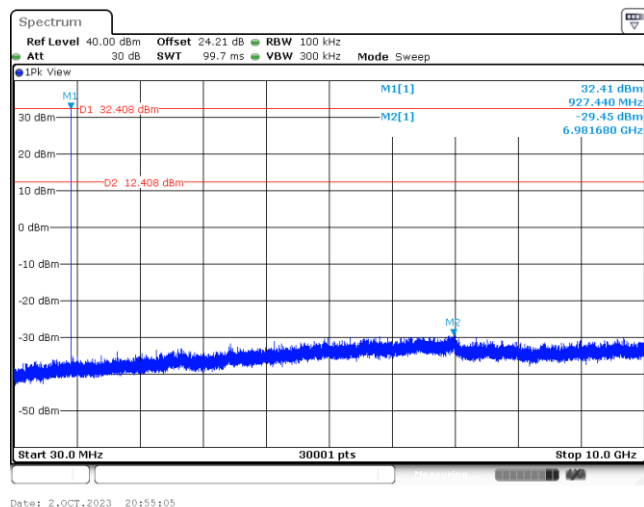




<External Antenna>

CSE Plot on 902.75 MHz between 30MHz ~ 10 GHz CSE Plot on 914.75 MHz between 30MHz ~ 10 GHz

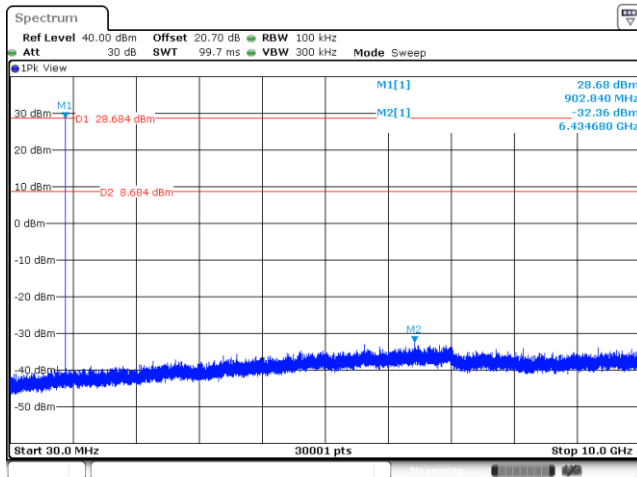


Date: 29.SEP.2023 01:25:40

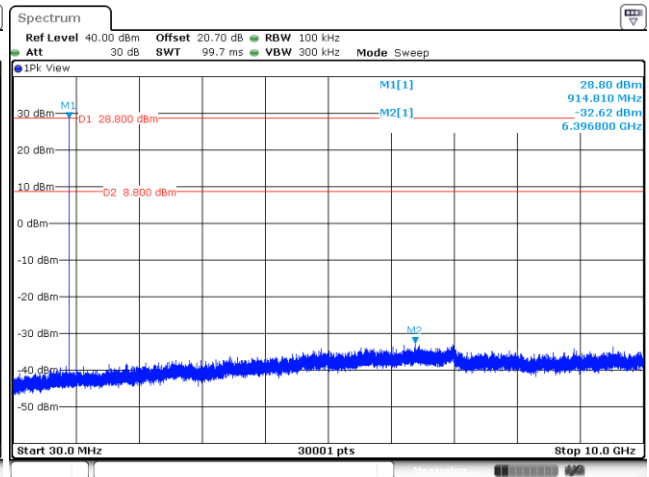

Date: 29.SEP.2023 01:30:47

CSE Plot on 927.25 MHz between 30MHz ~ 10 GHz

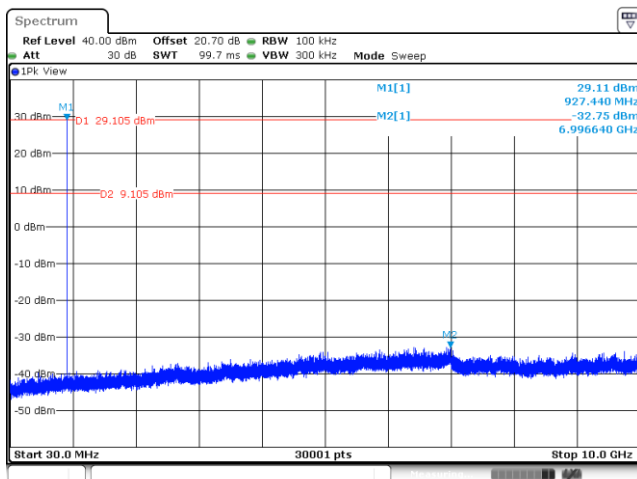

Date: 29.SEP.2023 01:35:13

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.8.3 Test Procedures


1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.8.4 Test Setup


For radiated emissions below 30MHz

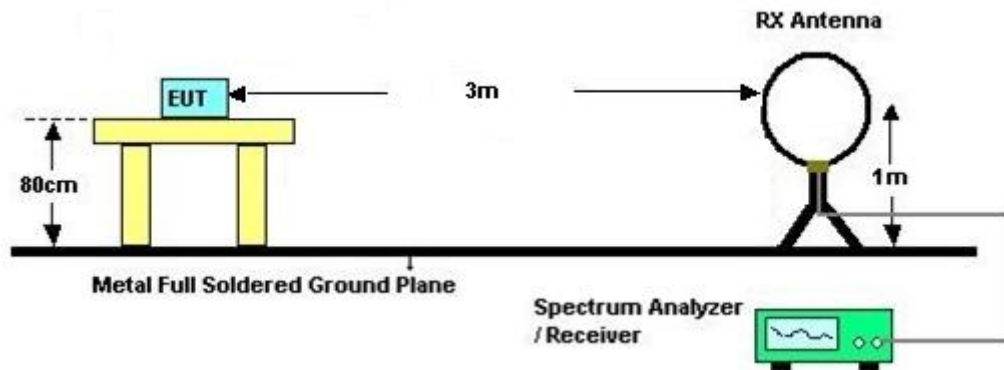

For radiated emissions from 30MHz to 1GHz

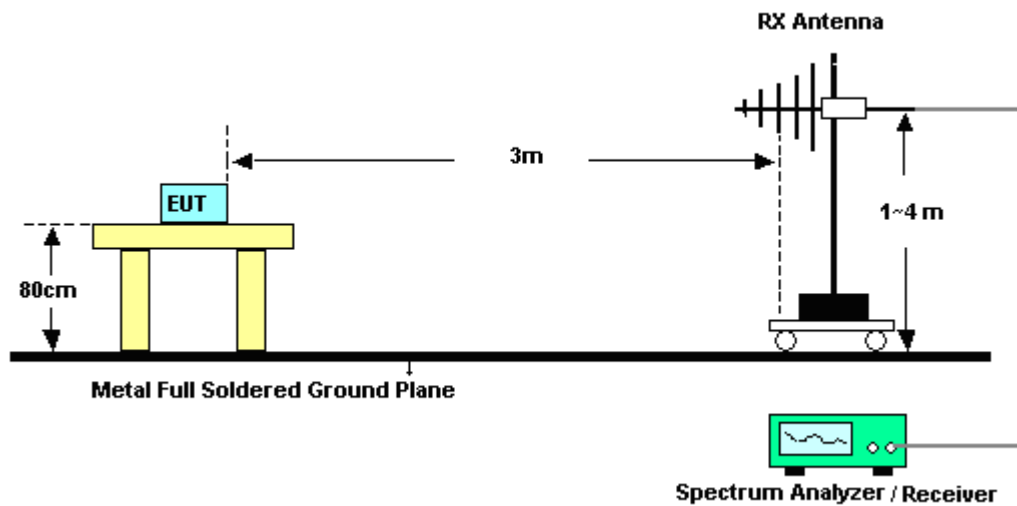

For radiated emissions above 1GHz

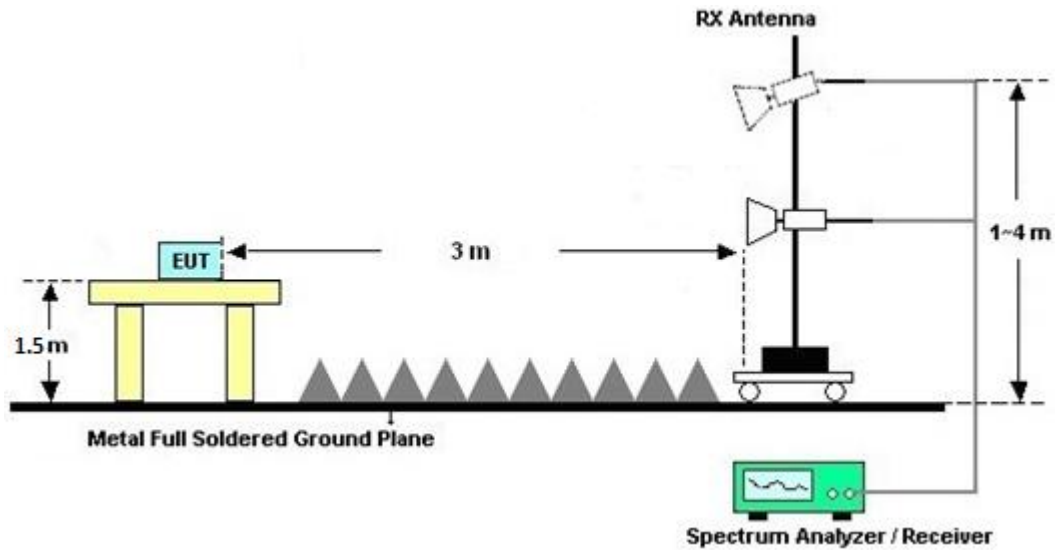

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.

3.9 AC Power Line Conducted Emissions Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test setup

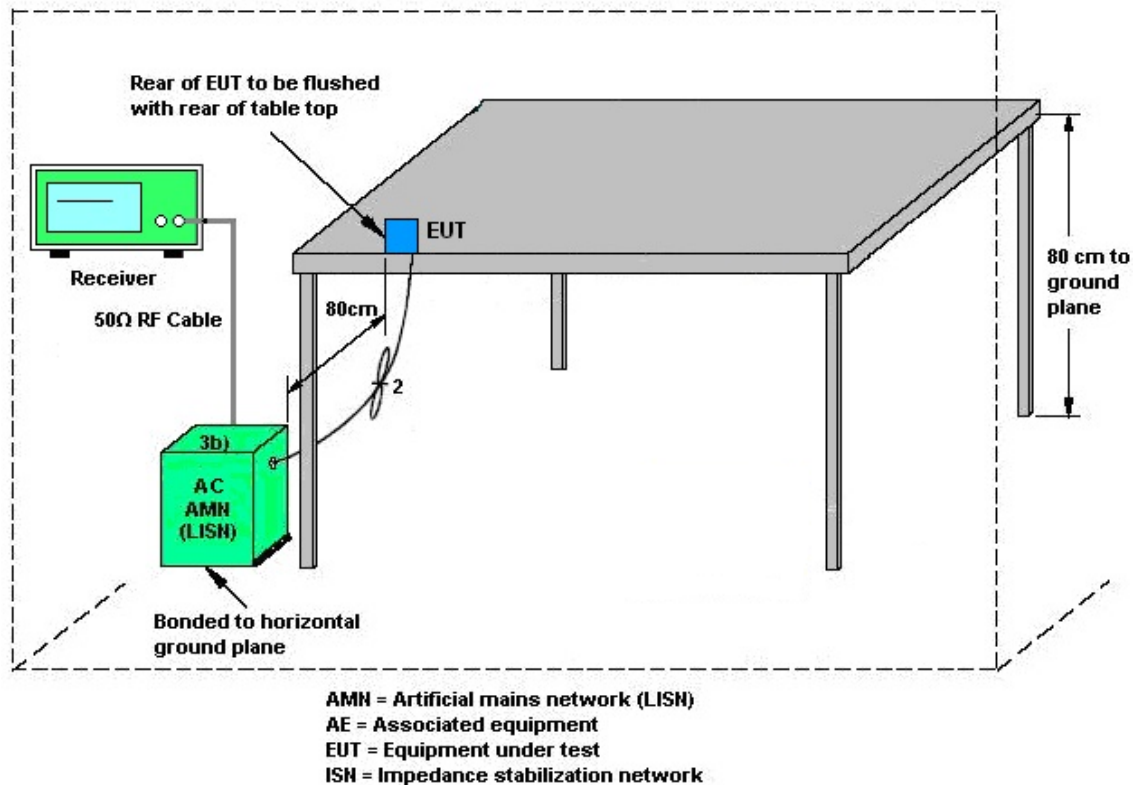

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 13, 2023	Sep. 21, 2023~ Sep. 22, 2023	Feb. 12, 2024	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N -06	35419 & 03	30MHz~1GHz	Apr. 23, 2023	Sep. 21, 2023~ Sep. 22, 2023	Apr. 22, 2024	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 01, 2022	Sep. 21, 2023~ Sep. 22, 2023	Nov. 30, 2023	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Feb. 28, 2023	Sep. 21, 2023~ Sep. 22, 2023	Feb. 27, 2024	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 20, 2023	Sep. 21, 2023~ Sep. 22, 2023	Apr. 19, 2024	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 03, 2022	Sep. 21, 2023~ Sep. 22, 2023	Oct. 02, 2023	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 28, 2023	Sep. 21, 2023~ Sep. 22, 2023	Mar. 27, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023~ Sep. 22, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023~ Sep. 22, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 22, 2023	Sep. 21, 2023~ Sep. 22, 2023	Feb. 21, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 20, 2023	Sep. 21, 2023~ Sep. 22, 2023	Apr. 19, 2024	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Sep. 21, 2023~ Sep. 22, 2023	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Sep. 21, 2023~ Sep. 22, 2023	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Sep. 21, 2023~ Sep. 22, 2023	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Sep. 21, 2023~ Sep. 22, 2023	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Sep. 21, 2023~ Sep. 22, 2023	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 14, 2023	Sep. 21, 2023~ Sep. 22, 2023	Mar. 13, 2024	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Sep. 14, 2023	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2022	Sep. 14, 2023	Nov. 30, 2023	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2022	Sep. 14, 2023	Nov. 16, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 01, 2022	Sep. 14, 2023	Nov. 30, 2023	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 17, 2022	Sep. 14, 2023	Nov. 16, 2023	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Sep. 14, 2023	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	9kHz-200MHz	Jul. 28, 2023	Sep. 14, 2023	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 29, 2022	Sep. 14, 2023	Dec. 28, 2023	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Sep. 13, 2023~Oct. 14, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Sep. 13, 2023~Oct. 14, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101565	10Hz ~ 40GHz	Dec. 26, 2022	Sep. 13, 2023~Oct. 14, 2023	Dec. 25, 2023	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	0932001	N/A	Sep. 08, 2023	Sep. 13, 2023~Oct. 14, 2023	Sep. 07, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	0846202	300MHz~40GHz	Sep. 08, 2023	Sep. 13, 2023~Oct. 14, 2023	Sep. 07, 2024	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
--	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 381616-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

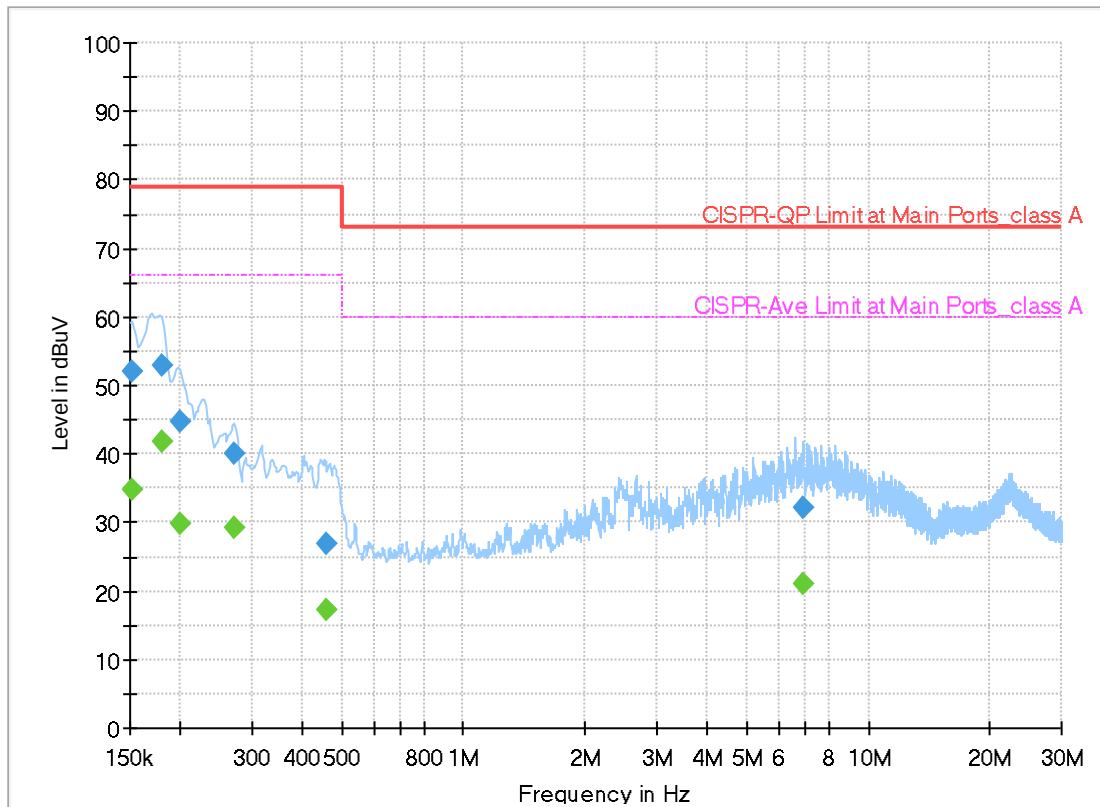


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	34.79	66.00	31.21	L1	OFF	19.8
0.152250	52.02	---	79.00	26.98	L1	OFF	19.8
0.179250	---	41.85	66.00	24.15	L1	OFF	19.8
0.179250	52.80	---	79.00	26.20	L1	OFF	19.8
0.199500	---	29.83	66.00	36.17	L1	OFF	19.8
0.199500	44.64	---	79.00	34.36	L1	OFF	19.8
0.271500	---	29.23	66.00	36.77	L1	OFF	19.8
0.271500	40.04	---	79.00	38.96	L1	OFF	19.8
0.456000	---	17.17	66.00	48.83	L1	OFF	19.8
0.456000	26.78	---	79.00	52.22	L1	OFF	19.8
6.870750	---	21.19	60.00	38.81	L1	OFF	19.9
6.870750	32.18	---	73.00	40.82	L1	OFF	19.9

EUT Information

Report NO : 381616-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

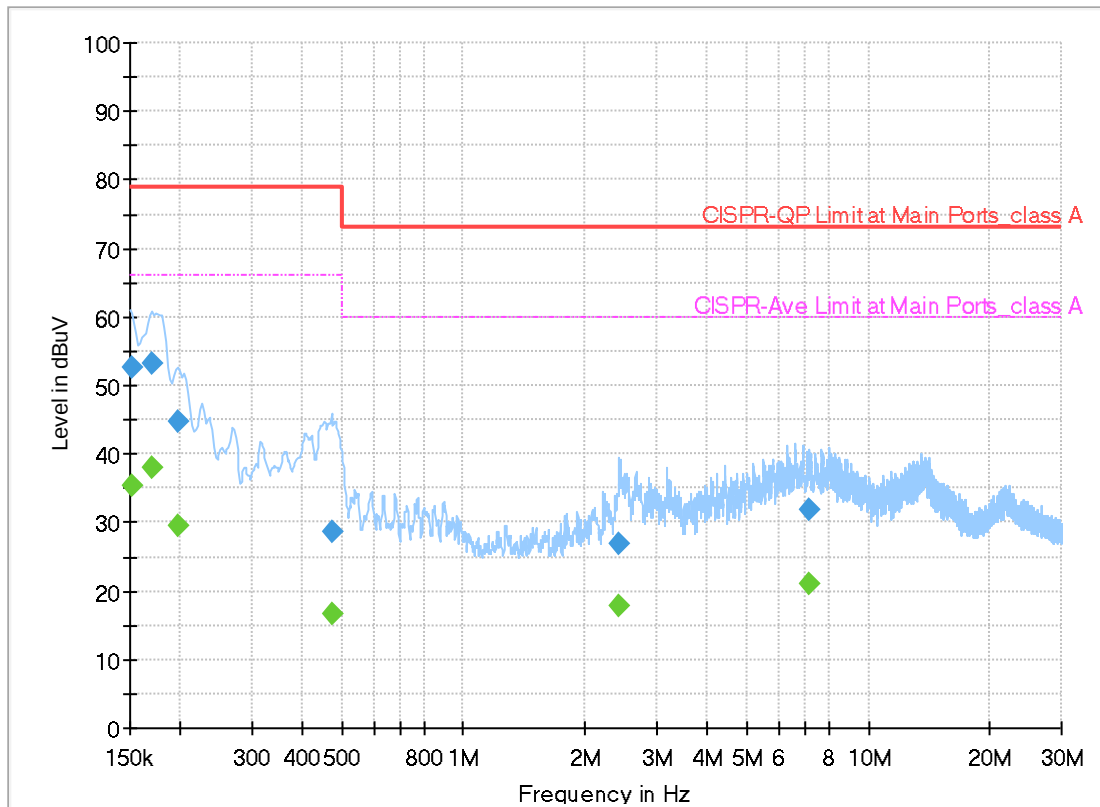

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	35.46	66.00	30.54	N	OFF	19.8
0.152250	52.52	---	79.00	26.48	N	OFF	19.8
0.170250	---	38.06	66.00	27.94	N	OFF	19.8
0.170250	53.22	---	79.00	25.78	N	OFF	19.8
0.197250	---	29.50	66.00	36.50	N	OFF	19.8
0.197250	44.65	---	79.00	34.35	N	OFF	19.8
0.471750	---	16.61	66.00	49.39	N	OFF	19.8
0.471750	28.52	---	79.00	50.48	N	OFF	19.8
2.413500	---	17.84	60.00	42.16	N	OFF	19.8
2.413500	27.03	---	73.00	45.97	N	OFF	19.8
7.174500	---	20.96	60.00	39.04	N	OFF	19.9
7.174500	31.83	---	73.00	41.17	N	OFF	19.9



Appendix B. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.6~25.9°C
		Relative Humidity :	46.7~50.8%

<Internal Antenna>

UHF RFID

UHF RFID (Band Edge @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID 902.75MHz		30.54	30.2	-9.8	40	35.27	23.98	1.02	30.07	-	-	P	H
		157.98	28.52	-14.98	43.5	39.83	16.59	2.07	29.97	-	-	P	H
		198.21	30.59	-12.91	43.5	43.35	15.02	2.27	30.05	-	-	P	H
		498.1	31.49	-14.51	46	34	23.81	3.64	29.96	-	-	P	H
		719.3	29.93	-16.07	46	28.51	26.62	4.47	29.67	-	-	P	H
	*	902.75	117.27	71.27	46	112.65	28.59	5.04	29.01	100	176	P	H
		969.9	34.04	-19.96	54	26.68	30.89	5.2	28.73	-	-	P	H
													H
													H
													H
													H
													H
		30.81	33.31	-6.69	40	38.44	23.91	1.03	30.07	-	-	P	V
		60.51	27.52	-12.48	40	44.4	11.63	1.37	29.88	-	-	P	V
		194.97	27.55	-15.95	43.5	40.42	14.92	2.25	30.04	-	-	P	V
		532.4	31.44	-14.56	46	33.9	23.75	3.78	29.99	-	-	P	V
		701.8	28.97	-17.03	46	27.94	26.23	4.42	29.62	-	-	P	V
	*	902.75	117.46	71.46	46	112.84	28.59	5.04	29.01	100	166	P	V
		963.6	35.74	-18.26	54	28.45	30.87	5.18	28.76	-	-	P	V
													V
													V
													V
													V
													V



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		30	31.07	-8.93	40	36.03	24.11	1.01	30.08	-	-	P	H
		45.93	25.47	-14.53	40	37.83	16.4	1.24	30	-	-	P	H
		194.7	27.24	-16.26	43.5	40.1	14.93	2.25	30.04	-	-	P	H
		736.8	29	-17	46	26.8	27.4	4.52	29.72	-	-	P	H
		841.1	31.56	-14.44	46	27.53	28.53	4.84	29.34	-	-	P	H
	*	914.75	116.15	70.15	46	111.28	28.77	5.06	28.96	227	240	P	H
		993	33.95	-20.05	54	27.01	30.28	5.27	28.61	-	-	P	H
													H
													H
													H
													H
													H
		30	31.57	-8.43	40	36.53	24.11	1.01	30.08	-	-	P	V
		34.59	25.53	-14.47	40	32.24	22.18	1.11	30	-	-	P	V
		94.8	26.49	-17.01	43.5	39.58	15.32	1.61	30.02	-	-	P	V
		727.7	29.58	-16.42	46	27.85	26.93	4.49	29.69	-	-	P	V
		846	32.08	-13.92	46	27.75	28.79	4.85	29.31	-	-	P	V
	*	914.75	118.83	72.83	46	113.96	28.77	5.06	28.96	100	196	P	V
		982.5	34.62	-19.38	54	27.46	30.59	5.24	28.67	-	-	P	V
													V
													V
													V
													V
													V

[illegible]

**UHF RFID (Harmonic @ 3m)**

UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 902.75MHz		2708.25	47.8	-26.2	74	64.9	32.62	9.24	58.96	389	150	P	H
		2708.25	41.73	-12.27	54	58.83	32.62	9.24	58.96	389	150	A	H
		3611	42.16	-31.84	74	56.26	32.92	12.41	59.43	-	-	P	H
		4513.75	51.83	-22.17	74	65.29	34.06	12.01	59.53	281	236	P	H
		4513.75	45.79	-8.21	54	59.25	34.06	12.01	59.53	281	236	A	H
		5416.5	39.74	-34.26	74	49.54	34.5	12.9	57.2	-	-	P	H
		8124.75	40.86	-33.14	74	46.96	35.8	15.59	57.49	-	-	P	H
		9027.5	41.44	-32.56	74	47.6	35.94	16.53	58.63	-	-	P	H
		2708.25	47.37	-26.63	74	64.47	32.62	9.24	58.96	271	224	P	V
		2708.25	40.4	-13.6	54	57.5	32.62	9.24	58.96	271	224	A	V
		3611	41.92	-32.08	74	56.02	32.92	12.41	59.43	-	-	P	V
		4513.75	46.94	-27.06	74	60.4	34.06	12.01	59.53	380	182	P	V
		4513.75	39.37	-14.63	54	52.83	34.06	12.01	59.53	380	182	A	V
		5416.5	39.72	-34.28	74	49.52	34.5	12.9	57.2	-	-	P	V
		8124.75	41.71	-32.29	74	47.81	35.8	15.59	57.49	-	-	P	V
		9027.5	41.88	-32.12	74	48.04	35.94	16.53	58.63	-	-	P	V



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		2744.25	47.6	-26.4	74	64.55	32.69	9.31	58.95	310	152	P	H
		2744.25	40.99	-13.01	54	57.94	32.69	9.31	58.95	310	152	A	H
		3659	41.81	-32.19	74	55.97	33.02	12.27	59.45	-	-	P	H
		4573.75	50.2	-23.8	74	63.41	34.15	12.07	59.43	262	237	P	H
		4573.75	44.04	-9.96	54	57.25	34.15	12.07	59.43	262	237	A	H
		7318	42.89	-31.11	74	49.55	35.7	15.21	57.57	-	-	P	H
		8232.75	40.96	-33.04	74	47.02	35.83	15.62	57.51	-	-	P	H
		9147.5	42.54	-31.46	74	48.8	36.09	16.49	58.84	-	-	P	H
		2744.25	46.25	-27.75	74	63.2	32.69	9.31	58.95	231	144	P	V
		2744.25	39.15	-14.85	54	56.1	32.69	9.31	58.95	231	144	A	V
		3659	42.61	-31.39	74	56.77	33.02	12.27	59.45	-	-	P	V
		4573.75	41.55	-32.45	74	54.76	34.15	12.07	59.43	-	-	P	V
		7318	42.29	-31.71	74	48.95	35.7	15.21	57.57	-	-	P	V
		8232.75	41.46	-32.54	74	47.52	35.83	15.62	57.51	-	-	P	V
		9147.5	42.04	-31.96	74	48.3	36.09	16.49	58.84	-	-	P	V



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 927.25MHz		2781.75	46.49	-27.51	74	63.34	32.7	9.39	58.94	301	145	P	H
		2781.75	40.13	-13.87	54	56.98	32.7	9.39	58.94	301	145	A	H
		3709	41.4	-32.6	74	55.67	33.1	12.1	59.47	-	-	P	H
		4636.25	42.98	-31.02	74	56.01	34.17	12.12	59.32	-	-	P	H
		7418	41.67	-32.33	74	48.38	35.6	15.36	57.67	-	-	P	H
		8345.25	42.18	-31.82	74	48.18	35.7	15.83	57.53	-	-	P	H
		2781.75	45.2	-28.8	74	62.05	32.7	9.39	58.94	224	142	P	V
		2781.75	37.55	-16.45	54	54.4	32.7	9.39	58.94	224	142	A	V
		3709	40.8	-33.2	74	55.07	33.1	12.1	59.47	-	-	P	V
		4636.25	40.31	-33.69	74	53.34	34.17	12.12	59.32	-	-	P	V
		7418	41.89	-32.11	74	48.6	35.6	15.36	57.67	-	-	P	V
		8345.25	42.16	-31.84	74	48.16	35.7	15.83	57.53	-	-	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												
	3. Non restricted band limit is radio frequency level down 20db.												
	4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<External Antenna>

UHF RFID

UHF RFID (Band Edge @ 3m)

UHF RFID	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF RFID 902.75MHz		45.66	26.46	-13.54	40	38.68	16.53	1.24	29.99	-	-	P	H
		184.98	30.03	-13.47	43.5	43.01	14.84	2.2	30.02	-	-	P	H
		195.51	30.03	-13.47	43.5	42.85	14.96	2.26	30.04	-	-	P	H
		499.5	30.48	-15.52	46	32.95	23.84	3.65	29.96	-	-	P	H
		706	29.35	-16.65	46	28.32	26.24	4.43	29.64	-	-	P	H
	*	902.75	118.85	72.85	46	114.23	28.59	5.04	29.01	200	309	P	H
		977.6	34.76	-19.24	54	27.53	30.7	5.22	28.69	-	-	P	H
													H
													H
													H
													H
													H
		30	33.62	-6.38	40	38.58	24.11	1.01	30.08	-	-	P	V
		64.56	26.68	-13.32	40	43.43	11.76	1.43	29.94	-	-	P	V
		200.91	29.13	-14.37	43.5	41.86	15.04	2.28	30.05	-	-	P	V
		498.1	29.38	-16.62	46	31.89	23.81	3.64	29.96	-	-	P	V
		690.6	30.91	-15.09	46	29.94	26.28	4.36	29.67	-	-	P	V
	*	902.75	119.08	73.08	46	114.46	28.59	5.04	29.01	100	298	P	V
		972	35.5	-18.5	54	28.11	30.9	5.21	28.72	-	-	P	V
													V
													V
													V
													V
													V



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 914.75MHz		30	25.54	-14.46	40	30.5	24.11	1.01	30.08	-	-	P	H
		63.21	24.85	-15.15	40	41.71	11.65	1.41	29.92	-	-	P	H
		212.52	31.72	-11.78	43.5	44.33	15.05	2.35	30.01	-	-	P	H
		499.5	29.96	-16.04	46	32.43	23.84	3.65	29.96	-	-	P	H
		683.6	32.97	-13.03	46	32.02	26.33	4.33	29.71	-	-	P	H
	*	914.75	119.05	73.05	46	114.18	28.77	5.06	28.96	200	311	P	H
		980.4	35.13	-18.87	54	27.91	30.67	5.23	28.68	-	-	P	H
													H
													H
													H
													H
													H
		30	33.58	-6.42	40	38.54	24.11	1.01	30.08	-	-	P	V
		64.29	27.6	-12.4	40	44.37	11.74	1.43	29.94	-	-	P	V
		198.75	28.3	-15.2	43.5	41.08	15	2.27	30.05	-	-	P	V
		533.1	29.25	-16.75	46	31.7	23.76	3.78	29.99	-	-	P	V
		724.9	30.91	-15.09	46	29.29	26.82	4.48	29.68	-	-	P	V
	*	914.75	119.3	73.3	46	114.43	28.77	5.06	28.96	100	304	P	V
		971.3	35.14	-18.86	54	27.76	30.9	5.2	28.72	-	-	P	V
													V
													V
													V
													V
													V

[illegible]



UHF RFID (Harmonic @ 3m)

UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 902.75MHz		2708.25	39.99	-34.01	74	57.09	32.62	9.24	58.96	-	-	P	H
		3611	40.21	-33.79	74	54.31	32.92	12.41	59.43	-	-	P	H
		4513.75	40.63	-33.37	74	54.09	34.06	12.01	59.53	-	-	P	H
		5416.5	40.1	-33.9	74	49.9	34.5	12.9	57.2	-	-	P	H
		8124.75	40.74	-33.26	74	46.84	35.8	15.59	57.49	-	-	P	H
		9027.5	41.55	-32.45	74	47.71	35.94	16.53	58.63	-	-	P	H
		2708.25	39.22	-34.78	74	56.32	32.62	9.24	58.96	-	-	P	V
		3611	40.33	-33.67	74	54.43	32.92	12.41	59.43	-	-	P	V
		4513.75	42.52	-31.48	74	55.98	34.06	12.01	59.53	-	-	P	V
		5416.5	40.73	-33.27	74	50.53	34.5	12.9	57.2	-	-	P	V
		8124.75	40.22	-33.78	74	46.32	35.8	15.59	57.49	-	-	P	V
		9027.5	41.78	-32.22	74	47.94	35.94	16.53	58.63	-	-	P	V
UHF RFID 914.75MHz		2744.25	39.5	-34.5	74	56.45	32.69	9.31	58.95	-	-	P	H
		3659	40.46	-33.54	74	54.62	33.02	12.27	59.45	-	-	P	H
		4573.75	41.25	-32.75	74	54.46	34.15	12.07	59.43	-	-	P	H
		7318	42.09	-31.91	74	48.75	35.7	15.21	57.57	-	-	P	H
		8232.75	40.62	-33.38	74	46.68	35.83	15.62	57.51	-	-	P	H
		9147.5	41.27	-32.73	74	47.53	36.09	16.49	58.84	-	-	P	H
		2744.25	39	-35	74	55.95	32.69	9.31	58.95	-	-	P	V
		3659	42.29	-31.71	74	56.45	33.02	12.27	59.45	-	-	P	V
		4573.75	41.34	-32.66	74	54.55	34.15	12.07	59.43	-	-	P	V
		7318	42.05	-31.95	74	48.71	35.7	15.21	57.57	-	-	P	V
		8232.75	40.48	-33.52	74	46.54	35.83	15.62	57.51	-	-	P	V
		9147.5	41.69	-32.31	74	47.95	36.09	16.49	58.84	-	-	P	V



UHF RFID	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF RFID 927.25MHz		2781.75	39.95	-34.05	74	56.8	32.7	9.39	58.94	-	-	P	H
		3709	41.6	-32.4	74	55.87	33.1	12.1	59.47	-	-	P	H
		4636.25	39.73	-34.27	74	52.76	34.17	12.12	59.32	-	-	P	H
		7418	40.77	-33.23	74	47.48	35.6	15.36	57.67	-	-	P	H
		8345.25	41.57	-32.43	74	47.57	35.7	15.83	57.53	-	-	P	H
		2781.75	40.81	-33.19	74	57.66	32.7	9.39	58.94	-	-	P	V
		3709	42.14	-31.86	74	56.41	33.1	12.1	59.47	-	-	P	V
		4636.25	39.47	-34.53	74	52.5	34.17	12.12	59.32	-	-	P	V
		7418	41.22	-32.78	74	47.93	35.6	15.36	57.67	-	-	P	V
		8345.25	41.92	-32.08	74	47.92	35.7	15.83	57.53	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non restricted band limit is radio frequency level down 20db. 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

UHF UHF RFID	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF UHF RFID 913.25MHz		2739.75	38.54	-35.46	74	55.12	32.46	9.82	58.86	103	308	P	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2739.75MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.46(dB/m) + 9.82(dB) + 55.12(dBμV) – 58.86 (dB)
= 38.54 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 38.54(dBμV/m) – 74(dBμV/m)
= -35.46(dB)

Peak measured complies with the limit line, so test result is “PASS”.





Appendix C. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	24.6~25.9°C
		Relative Humidity :	46.7~50.8%





<Internal Antenna>



RFID (Band Edge @ 3m)

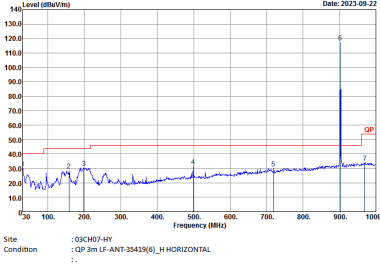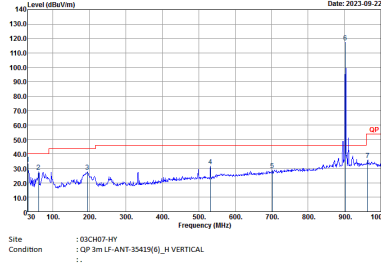RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H HORIZONTAL	 Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H VERTICAL

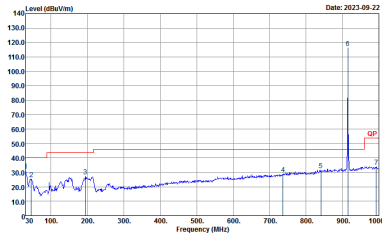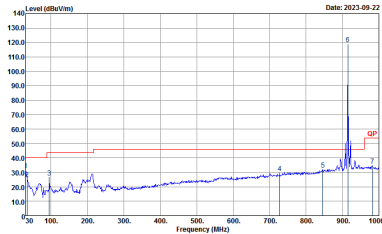

RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H VERTICAL :

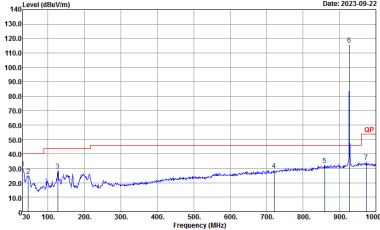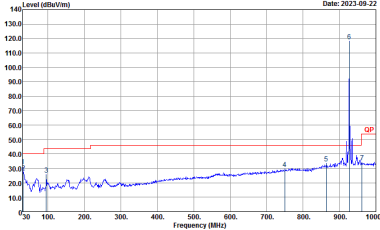

RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H VERTICAL :



RFID (Harmonic @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) 140 130.0 120.0 110.0 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20.0 10.0 0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Frequency (MHz) Date: 2023-09-22 PEAK_74 AVG_54 1 2 3 4 5 7 8 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL .	Level (dBuV/m) 140 130.0 120.0 110.0 100.0 90.0 80.0 70.0 60.0 50.0 40.0 30.0 20.0 10.0 0 1000 2000 3000 4000 5000 6000 7000 8000 9000 10000 Frequency (MHz) Date: 2023-09-22 PEAK_74 AVG_54 1 2 3 4 5 7 8 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL .

RFID		RFID	
		RFID 914.75MHz	
		Horizontal	Vertical
Peak Avg.	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :	




RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-4H Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-4H Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :





<External Antenna>



RFID (Band Edge @ 3m)

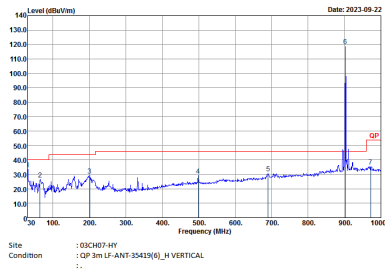RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H HORIZONTAL	 Site : 03CH07-HY Condition : GP 3m LF-ANT-35419(6)_H VERTICAL

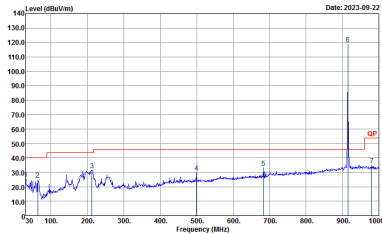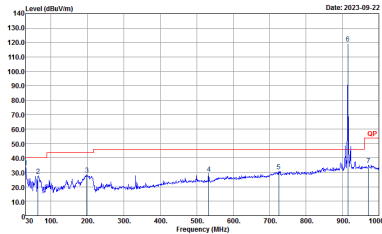

RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
QP / Peak	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H VERTICAL :

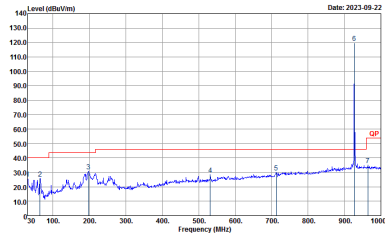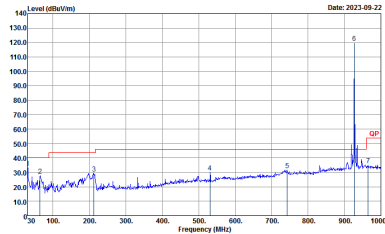

RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
Peak Avg.	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H HORIZONTAL :	 Site : 03CH07-HY Condition : QP 3m LP-ANT-35415(6)_H VERTICAL :



RFID (Harmonic @ 3m)

RFID	RFID	
	RFID 902.75MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :



RFID	RFID	
	RFID 914.75MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-4H Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Level (dBuV/m) Date: 2023-09-22 Site : 03CH07-4H Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :



RFID	RFID	
	RFID 927.25MHz	
	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-09-21 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL :	Level (dBuV/m) Date: 2023-09-21 Site : 03CH07-4V Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL :



Appendix D. Duty Cycle Plots

<Internal Antenna and External Antenna>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
UHF RFID	100	-	-	3kHz

