



TEST REPORT

FCC ID: 2AXYP-OTW-340-L

Product: True Wireless Earbuds

Model No.: OTW-340

Trade Mark: oraimo

Report No.: WSCT-A2LA-R&E231200024A-BT

Issued Date: 28 December 2023

Issued for:

ORAIMO TECHNOLOGY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group(Shenzhen) Co.,Ltd.
Building A-B, Baoshi Science & Technology Park, Baoshi Road,
Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755-26996192
FAX: +86-755-86376605



Note: The results contained in this report pertain only to the tested sample. This report shall not be reproduced, except in full, without written approval of World Standardization Certification & Testing Group(Shenzhen) Co., Ltd. This report must not be used by the client to claim product certification, approval, or any agency of the U.S. Government.





TABLE OF CONTENTS

| | |
|--|-----------|
| 1. Test Certification..... | 3 |
| 2. Test Result Summary | 4 |
| 3. EUT Description | 5 |
| 4. Genera Information..... | 7 |
| 4.1. TEST ENVIRONMENT AND MODE | 7 |
| 4.2. DESCRIPTION OF SUPPORT UNITS | 7 |
| 5. Facilities and Accreditations | 8 |
| 5.1. FACILITIES | 8 |
| 5.2. ACCREDITATIONS | 8 |
| 5.3. MEASUREMENT UNCERTAINTY | 9 |
| 5.4. MEASUREMENT INSTRUMENTS | 10 |
| 6. Test Results and Measurement Data | 11 |
| 6.1. ANTENNA REQUIREMENT | 11 |
| 6.2. CONDUCTED EMISSION | 12 |
| 6.3. CONDUCTED OUTPUT POWER | 14 |
| 6.4. 20dB OCCUPY BANDWIDTH | 21 |
| 6.5. CARRIER FREQUENCIES SEPARATION | 28 |
| 6.6. HOPPING CHANNEL NUMBER | 35 |
| 6.7. DWELL TIME..... | 38 |
| 6.8. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 49 |
| 6.9. CONDUCTED BAND EDGE MEASUREMENT | 50 |
| 6.10. CONDUCTED SPURIOUS EMISSION MEASUREMENT..... | 53 |
| 6.11. RADIATED SPURIOUS EMISSION MEASUREMENT | 63 |



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate Number 5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

1. Test Certification

Product: True Wireless Earbuds

Model No.: OTW-340

Additional
Model: oraimo

Applicant: ORAIMO TECHNOLOGY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG

Manufacturer: ORAIMO TECHNOLOGY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25
SHAN MEI STREET FOTAN NT HONGKONG

Date of Test: 15 December 2023 to 27 December 2023

Applicable
Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

The above equipment has been tested by World Standardization Certification & Testing Group(Shenzhen)Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Wang Xiang

(Wang Xiang)

Checked By:

Qin Shuiquan

(Qin Shuiquan)

Approved By:

Liu Fuxin

(Liu Fuxin)

Date:

28 December 2023



世标检测认证股份

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.

ADD: Building A-B Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China
TEL: 86-755-26996192 26992305 FAX: 86-755-86376605 E-mail: Fengbing.Wang@wsct-cert.com Http: www.wsct-cert.com



2. Test Result Summary

| Requirement | CFR 47 Section | Result |
|----------------------------------|-------------------------------------|--------|
| Antenna Requirement | §15.203/§15.247 (c) | PASS |
| AC Power Line Conducted Emission | §15.207 | N/A |
| Conducted Peak Output Power | §15.247 (b)(1) §2.1046 | PASS |
| 20dB Occupied Bandwidth | §15.247 (a)(1) §2.1049 | PASS |
| Carrier Frequencies Separation | §15.247 (a)(1) | PASS |
| Hopping Channel Number | §15.247 (a)(1) | PASS |
| Dwell Time | §15.247 (a)(1) | PASS |
| Radiated Emission | §15.205/§15.209 §2.1053, §2.1057 | PASS |
| Band Edge | §15.247(d) §2.1051, §2.1057 | PASS |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



3. EUT Description

| | |
|-----------------------------|--|
| Product Name: | True Wireless Earbuds |
| Model : | OTW-340 |
| Trade Mark: | oraimo |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel Separation: | 1MHz |
| Number of Channel: | 79 |
| Modulation Type: | GFSK, $\pi/4$ -DQPSK, 8-DPSK |
| Antenna Type: | FPC Antenna |
| Antenna Gain: | 1.81dBi |
| Operating Voltage | Li-ion Battery: 501012 Voltage: 3.7V Rated Capacity: 40mAh Limited Charge Voltage: 4.2V Charging Box : 802035 Input: 5V $\overline{\text{---}}$ 0.5A Output: 5V $\overline{\text{---}}$ 150mA*2 Capacity:500mAh 3.7V 1.85Wh |
| Remark: | N/A. |



Operation Frequency each of channel for GFSK, $\pi/4$ -DQPSK, 8DPSK

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|--|-----------|---------|-----------|---------|-----------|---------|-----------|
| 0 | 2402MHz | 20 | 2422MHz | 40 | 2442MHz | 60 | 2462MHz |
| 1 | 2403MHz | 21 | 2423MHz | 41 | 2443MHz | 61 | 2463MHz |
| ... | ... | ... | ... | ... | ... | ... | ... |
| 10 | 2412MHz | 30 | 2432MHz | 50 | 2452MHz | 70 | 2472MHz |
| 11 | 2413MHz | 31 | 2433MHz | 51 | 2453MHz | 71 | 2473MHz |
| ... | ... | ... | ... | ... | ... | ... | ... |
| 18 | 2420MHz | 38 | 2440MHz | 58 | 2460MHz | 78 | 2480MHz |
| 19 | 2421MHz | 39 | 2441MHz | 59 | 2461MHz | - | - |
| Remark: Channel 0, 39 & 78 have been tested for GFSK, $\pi/4$ -DQPSK, 8DPSK modulation mode. | | | | | | | |



4. Genera Information

4.1. Test environment and mode

| Operating Environment: | |
|---|--|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Mode: | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations with Fully-charged battery |
| The sample was placed 0.8m & 1.5m for the measurement below & above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. | |

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| / | / | / | / | / |

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 20dB Occupied Bandwidth, Carrier Frequencies Separation, Hopping Channel Number, Dwell Time, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



5. Facilities and Accreditations

5.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoshi Science & Technology Park, Baoshi Road, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group(Shenzhen) CO., LTD**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

A2LA - Certificate Number: 5768.01

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number: 5768.01



5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|-----|---|---------------------------|
| 1 | Duty Cycle and Tx-Sequence and Tx-Gap | $\pm 1\%$ |
| 2 | Dwell Time and Minimum Frequency Occupation | $\pm 1.2\%$ |
| 3 | Medium Utilisation Factor | $\pm 1.3\%$ |
| 4 | Occupied Channel Bandwidth | $\pm 2.4\%$ |
| 5 | Transmitter Unwanted Emission in the out-of Band | $\pm 1.3\%$ |
| 6 | Transmitter Unwanted Emissions in the Spurious Domain | $\pm 2.5\%$ |
| 7 | Receiver Spurious Emissions | $\pm 2.5\%$ |
| 8 | Conducted Emission Test | $\pm 3.2\text{dB}$ |
| 9 | RF power, conducted | $\pm 0.16\text{dB}$ |
| 10 | Spurious emissions, conducted | $\pm 0.21\text{dB}$ |
| 11 | All emissions, radiated(<1GHz) | $\pm 4.7\text{dB}$ |
| 12 | All emissions, radiated(>1GHz) | $\pm 4.7\text{dB}$ |
| 13 | Temperature | $\pm 0.5^{\circ}\text{C}$ |
| 14 | Humidity | $\pm 2.0\%$ |



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


5.4. MEASUREMENT INSTRUMENTS

| NAME OF EQUIPMENT | MANUFACTURER | MODEL | SERIAL NUMBER | Calibration Date | Calibration Due. |
|--------------------------------------|------------------------|--------------|---------------|------------------|------------------|
| Test software | -- | EZ-EMC | CON-03A | - | - |
| Test software | -- | MTS8310 | - | - | - |
| EMI Test Receiver | R&S | ESCI | 100005 | 11/05/2023 | 11/04/2024 |
| LISN | AFJ | LS16 | 16010222119 | 11/05/2023 | 11/04/2024 |
| LISN(EUT) | Mestec | AN3016 | 04/10040 | 11/05/2023 | 11/04/2024 |
| Universal Radio Communication Tester | R&S | CMU 200 | 1100.0008.02 | 11/05/2023 | 11/04/2024 |
| Coaxial cable | Megalon | LMR400 | N/A | 11/05/2023 | 11/04/2024 |
| GPIO cable | Megalon | GPIO | N/A | 11/05/2023 | 11/04/2024 |
| Spectrum Analyzer | R&S | FSU | 100114 | 11/05/2023 | 11/04/2024 |
| Pre Amplifier | H.P. | HP8447E | 2945A02715 | 11/05/2023 | 11/04/2024 |
| Pre-Amplifier | CDSI | PAP-1G18-38 | -- | 11/05/2023 | 11/04/2024 |
| Bi-log Antenna | SCHWARZBECK | VULB9168 | 01488 | 7/29/2023 | 7/28/2024 |
| 9*6*6 Anechoic | -- | -- | -- | 11/05/2023 | 11/04/2024 |
| Horn Antenna | COMPLIANCE ENGINEERING | CE18000 | -- | 11/05/2023 | 11/04/2024 |
| Horn Antenna | SCHWARZBECK | BBHA9120D | 9120D-631 | 11/05/2023 | 11/04/2024 |
| Cable | TIME MICROWAVE | LMR-400 | N-TYPE04 | 11/05/2023 | 11/04/2024 |
| System-Controller | CCS | N/A | N/A | N.C.R | N.C.R |
| Turn Table | CCS | N/A | N/A | N.C.R | N.C.R |
| Antenna Tower | CCS | N/A | N/A | N.C.R | N.C.R |
| RF cable | Murata | MXHQ87WA3000 | - | 11/05/2023 | 11/04/2024 |
| Loop Antenna | EMCO | 6502 | 00042960 | 11/05/2023 | 11/04/2024 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | 1123 | 11/05/2023 | 11/04/2024 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 11/05/2023 | 11/04/2024 |
| Power sensor | Anritsu | MX248XD | -- | 11/05/2023 | 11/04/2024 |
| Spectrum Analyzer | Keysight | N9010B | MY60241089 | 11/05/2023 | 11/04/2024 |



6. Test Results and Measurement Data

6.1. Antenna requirement
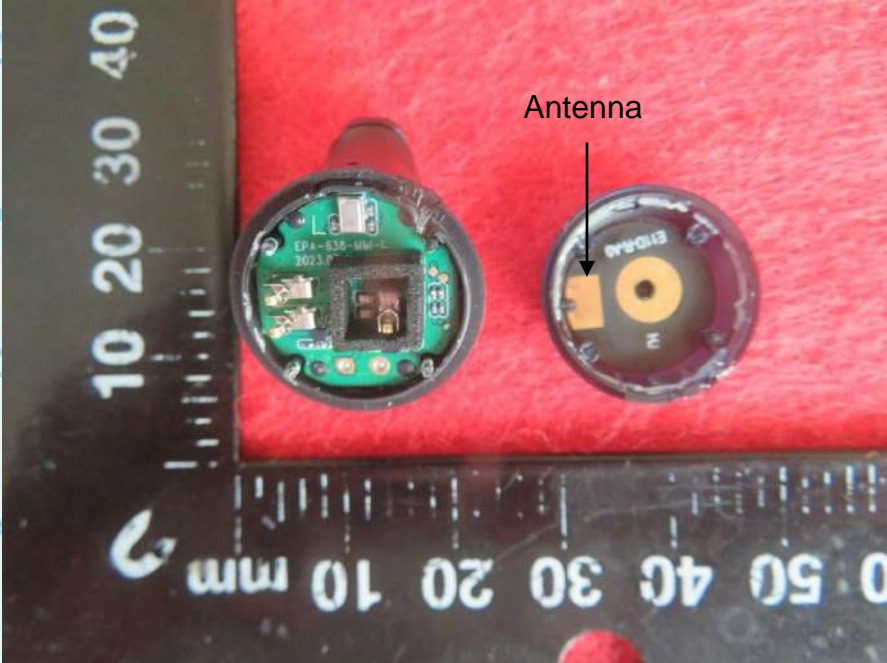
| | |
|--|-------------------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> | |
| E.U.T Antenna: | |
| <p>The Bluetooth antenna is a Integral Antenna. it meets the standards, and the best case gain of the antenna is 1.81dBi.</p> | |
|  | |



6.2. Conducted Emission

6.2.1. Test Specification

| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|-----------------------|--|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2014 | | | | | | | | | | | | | | |
| Frequency Range: | 150 kHz to 30 MHz | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limits: | <table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test Setup: | <div><p>Reference Plane</p><p>40cm</p><p>80cm</p><p>E.U.T.</p><p>AC power</p><p>LISN</p><p>Filter</p><p>AC power</p><p>EMI Receiver</p><p>Test table/Insulation plane</p><p>Remark: E.U.T.: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p></div> | | | | | | | | | | | | | | |
| Test Mode: | Refer to item 4.1 | | | | | | | | | | | | | | |
| Test Procedure: | <div><div>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</div><div>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</div><div>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2014 on conducted measurement.</div></div> | | | | | | | | | | | | | | |
| Test Result: | N/A | | | | | | | | | | | | | | |



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

6.2.2. Test data


Note: EUT powered by battery not applicable





6.3. Conducted Output Power

6.3.1. Test Specification
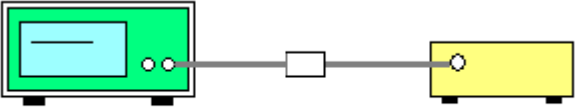
| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts. |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <p>Use the following spectrum analyzer settings:</p> <p>Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</p> <p>RBW > the 20 dB bandwidth of the emission being measured</p> <p>VBW ≥ RBW</p> <p>Sweep = auto</p> <p>Detector function = peak</p> <p>Trace = max hold</p> <p>Allow the trace to stabilize.</p> <p>Use the marker-to-peak function to set the marker to the peak of the emission.</p> |
| Test Result: | PASS |



6.3.2. Test Data

| GFSK mode | | | |
|--------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | -0.36 | 20.97 | PASS |
| Middle | 0.40 | 20.97 | PASS |
| Highest | 0.53 | 20.97 | PASS |

| Pi/4DQPSK mode | | | |
|----------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 0.39 | 20.97 | PASS |
| Middle | 1.14 | 20.97 | PASS |
| Highest | 1.21 | 20.97 | PASS |

| 8DPSK mode | | | |
|--------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | -0.53 | 20.97 | PASS |
| Middle | 0.33 | 20.97 | PASS |
| Highest | 0.45 | 20.97 | PASS |


Test plots as follows:



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


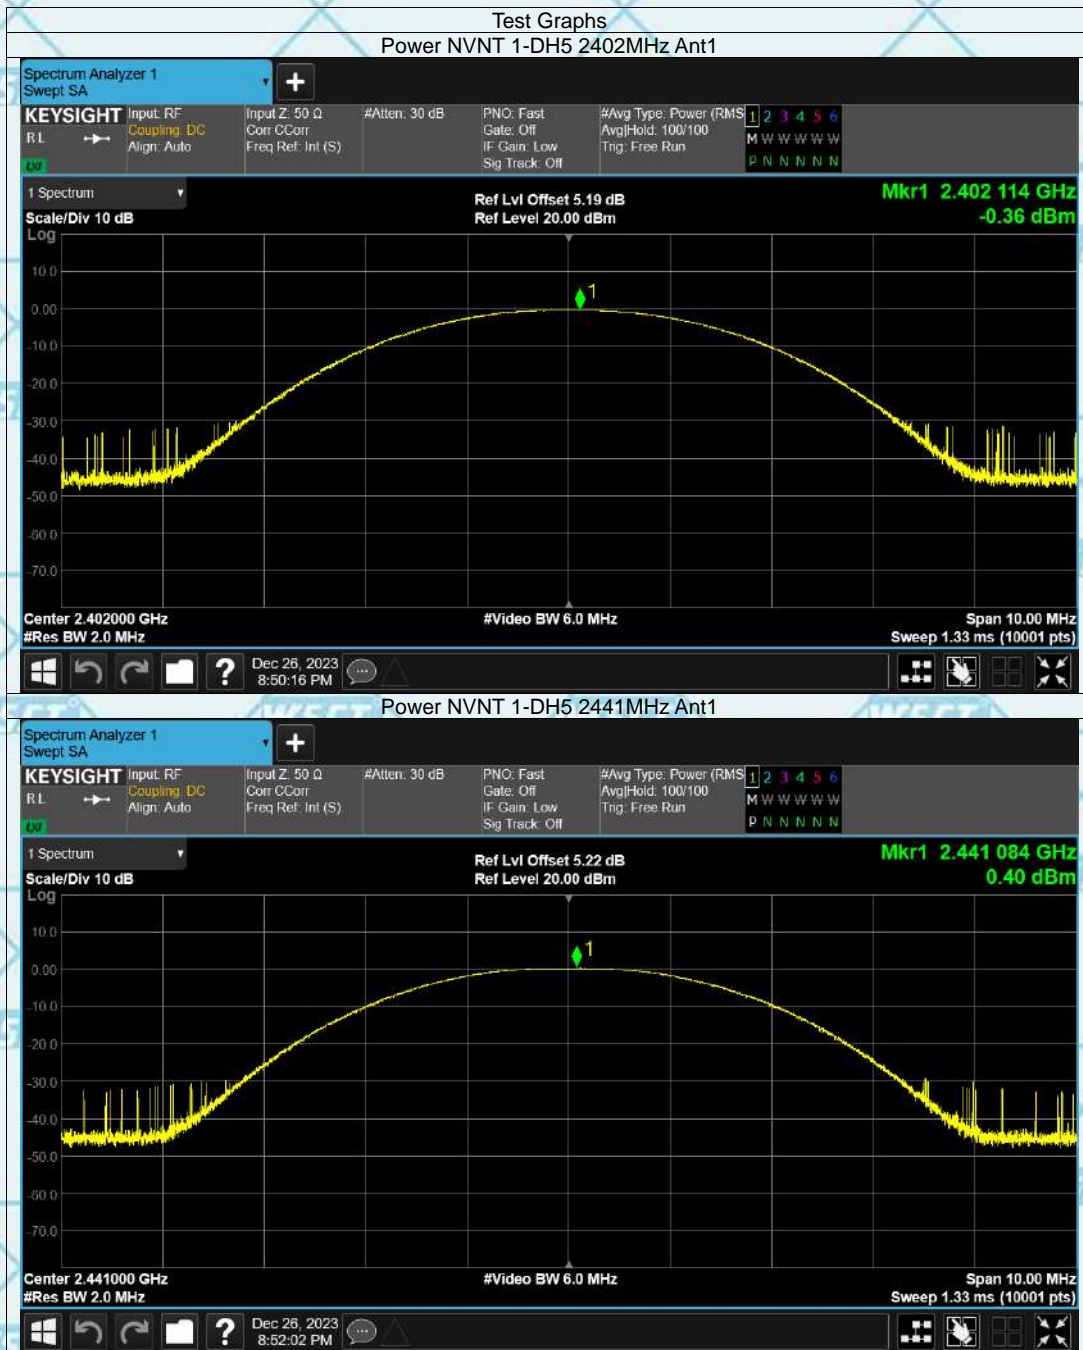




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

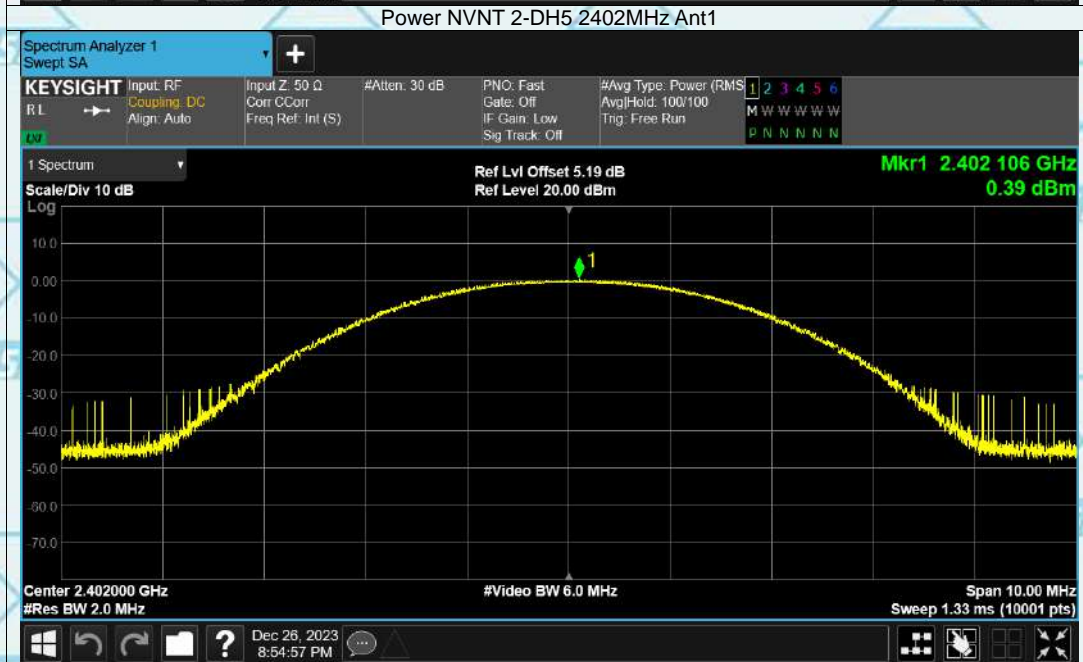
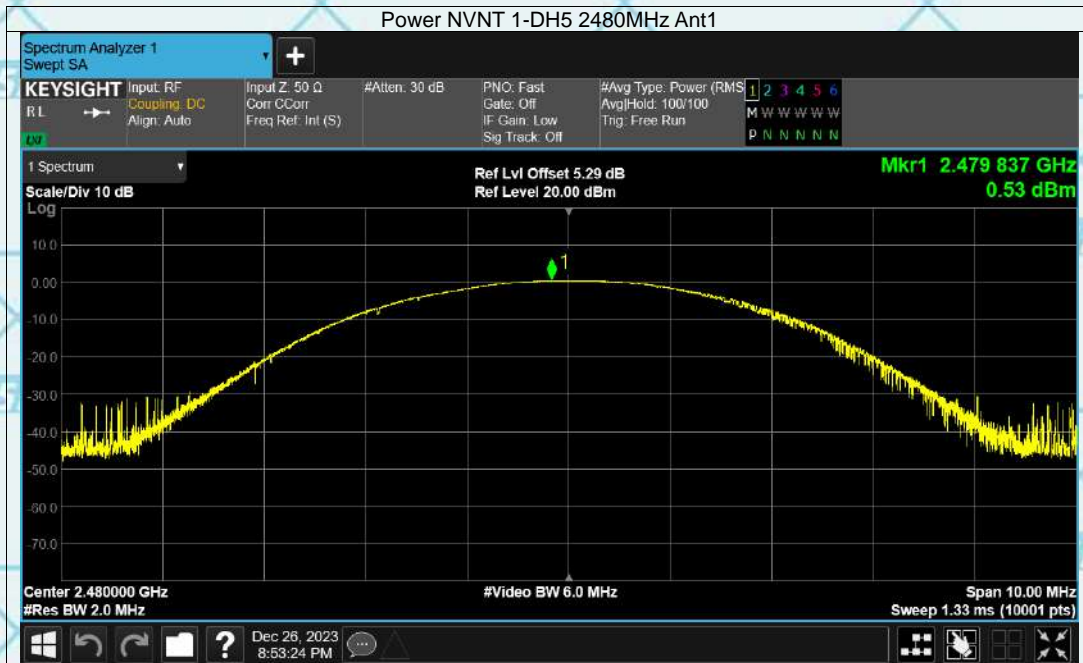




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

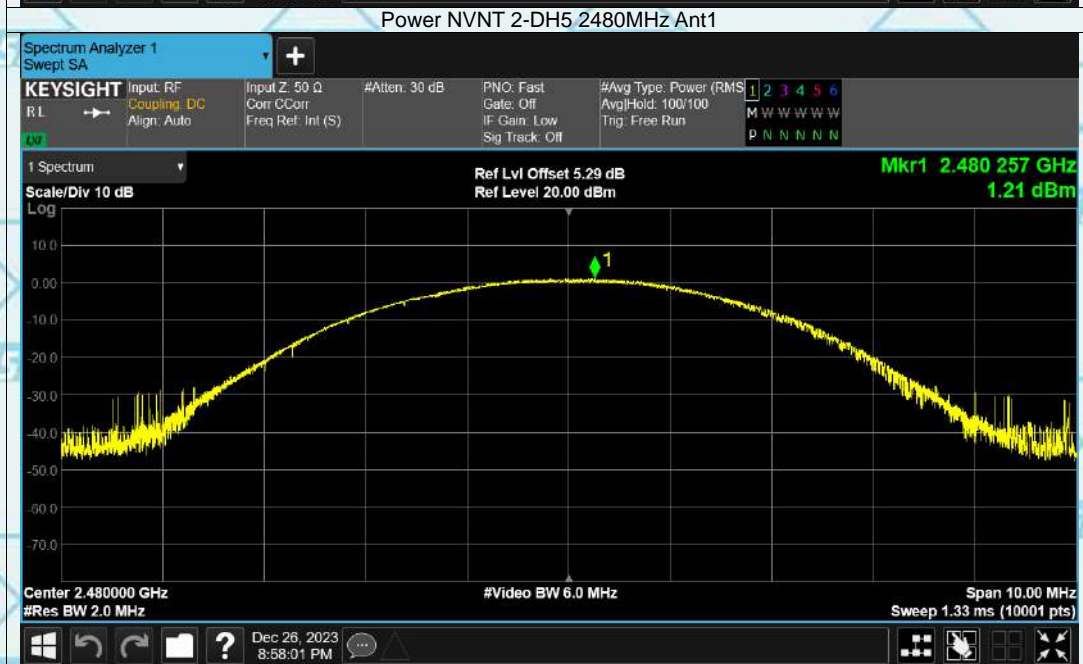
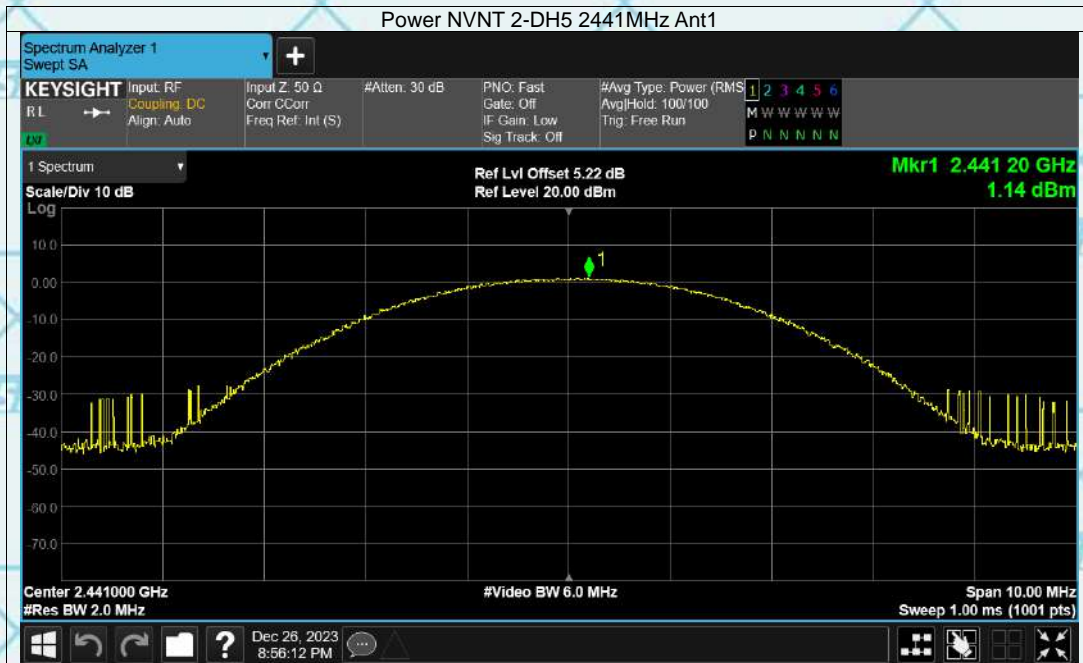




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

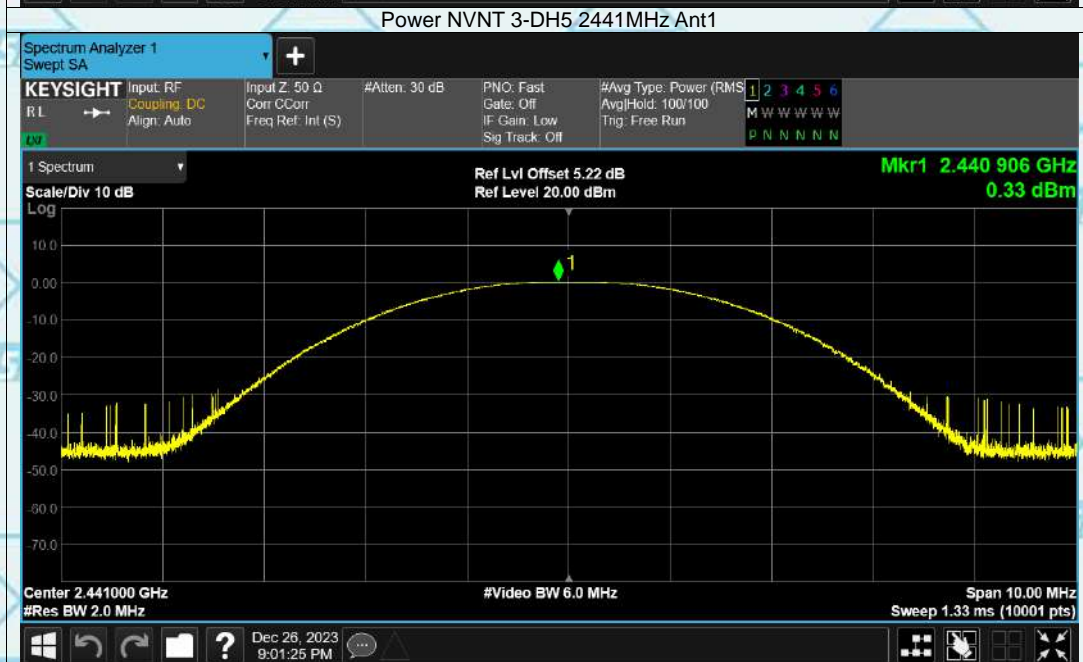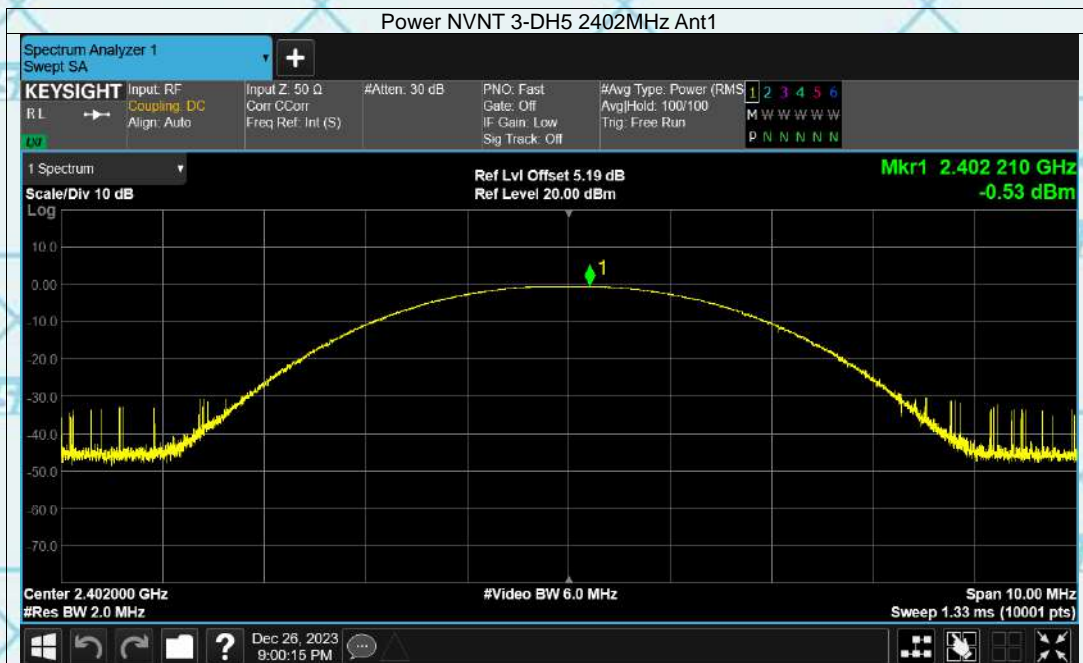




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

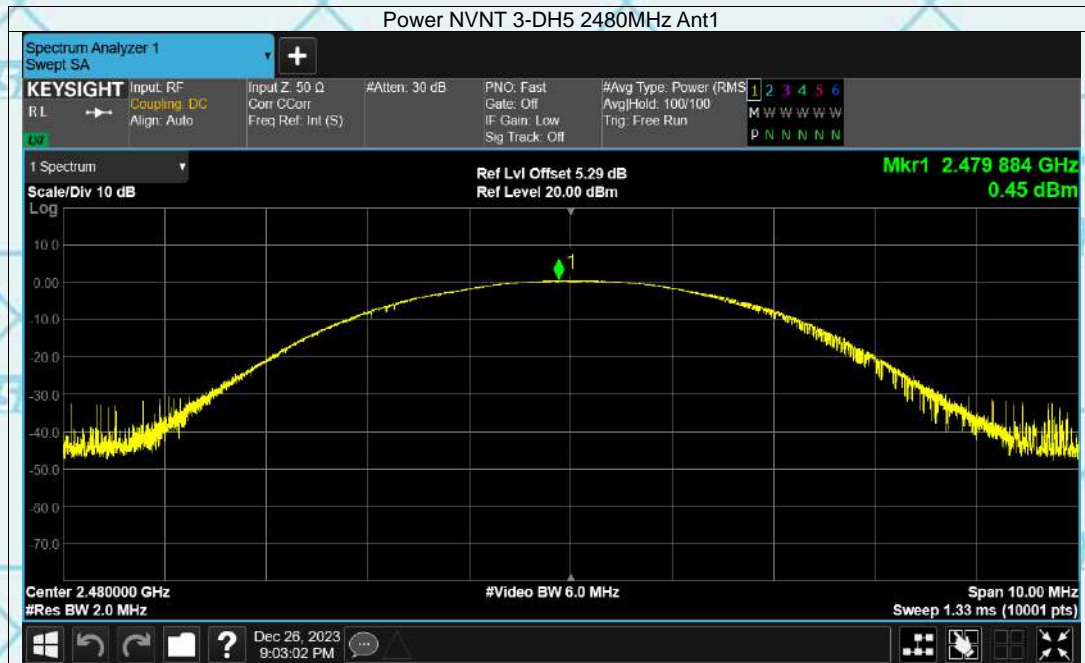



6.4. 20dB Occupy Bandwidth

6.4.1. Test Specification
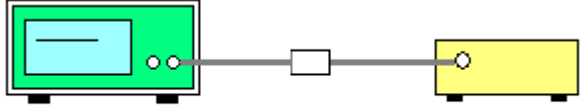
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | N/A |
| Test Setup: |  <p>Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel; $1\% \leq RBW \leq 5\%$ of the 20 dB bandwidth; $VBW \geq 3RBW$; Sweep = auto; Detector function = peak; Trace = max hold. 5. Measure and record the results in the test report. |
| Test Result: | PASS |



6.4.2. Test data

| Test channel | 20dB Occupy Bandwidth (MHz) | | | |
|--------------|-----------------------------|----------------|--------|------------|
| | GFSK | $\pi/4$ -DQPSK | 8DPSK | Conclusion |
| Lowest | 0.8692 | 1.276 | 0.9613 | PASS |
| Middle | 0.8636 | 1.275 | 1.000 | PASS |
| Highest | 0.9564 | 1.313 | 1.024 | PASS |

Test plots as follows:



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

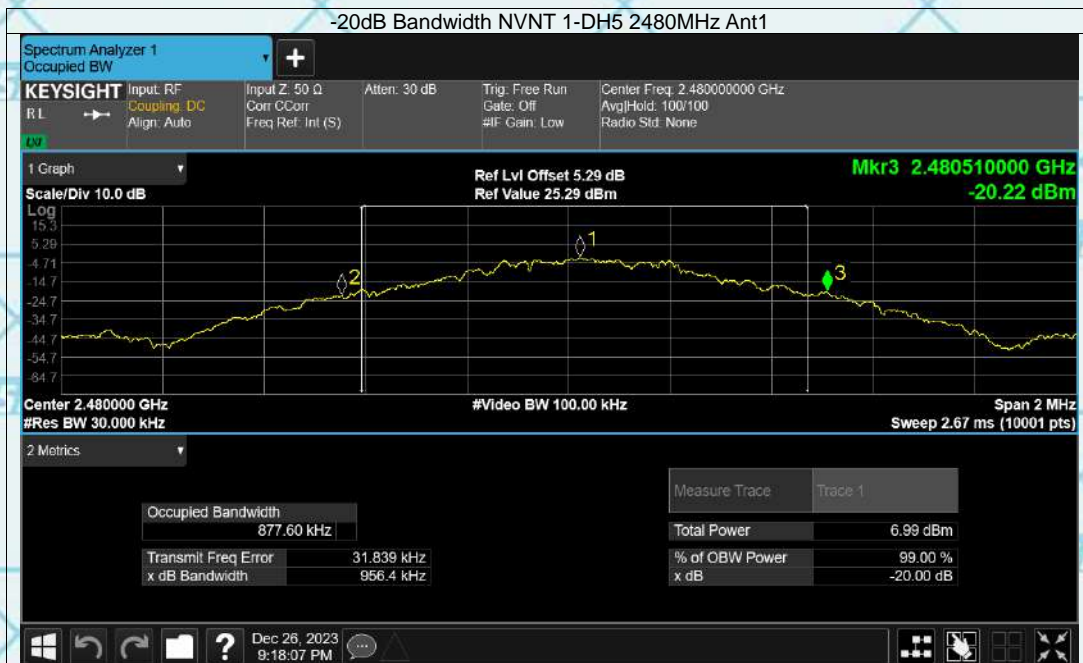




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

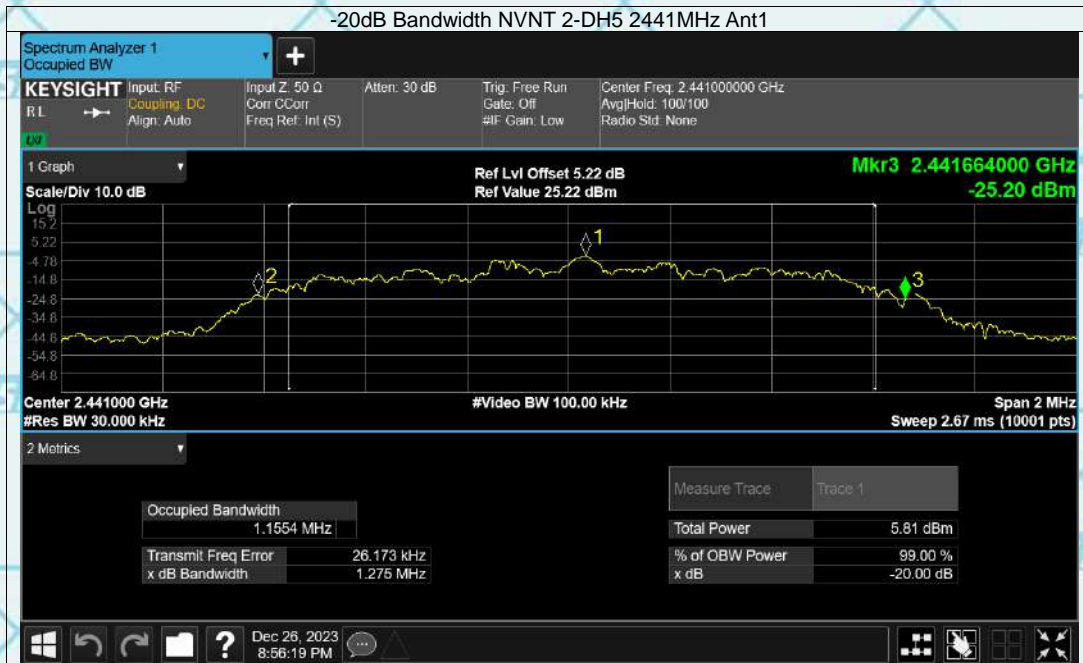



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com






Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

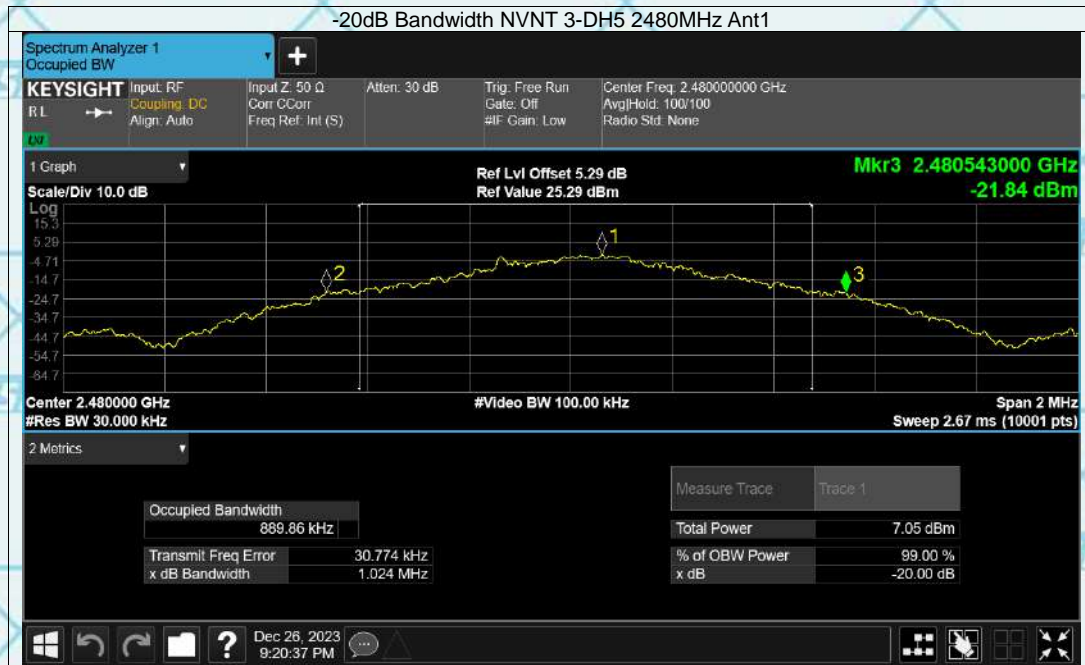



6.5. Carrier Frequencies Separation

6.5.1. Test Specification
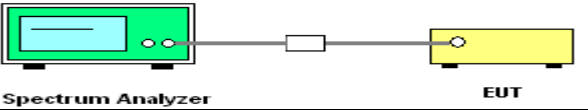
| | |
|--------------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater. |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Hopping mode |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW is set to approximately 30% of the channel spacing, adjust as necessary to best identify the center of each individual channel; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Record the value in report. |
| Test Result: | PASS |



6.5.2. Test data

| GFSK mode | | | |
|--------------|--------------------------------------|-------------|--------|
| Test channel | Carrier Frequencies Separation (MHz) | Limit (MHz) | Result |
| Lowest | 0.998 | 2/3*20dB BW | PASS |
| Middle | 1.002 | 2/3*20dB BW | PASS |
| Highest | 0.99 | 2/3*20dB BW | PASS |

| Pi/4 DQPSK mode | | | |
|-----------------|--------------------------------------|-------------|--------|
| Test channel | Carrier Frequencies Separation (MHz) | Limit (MHz) | Result |
| Lowest | 0.998 | 2/3*20dB BW | PASS |
| Middle | 1.002 | 2/3*20dB BW | PASS |
| Highest | 1.000 | 2/3*20dB BW | PASS |


| 8DPSK mode | | | |
|--------------|--------------------------------------|-------------|--------|
| Test channel | Carrier Frequencies Separation (MHz) | Limit (MHz) | Result |
| Lowest | 1.004 | 2/3*20dB BW | PASS |
| Middle | 1.004 | 2/3*20dB BW | PASS |
| Highest | 1.006 | 2/3*20dB BW | PASS |

Test plots as follows:



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


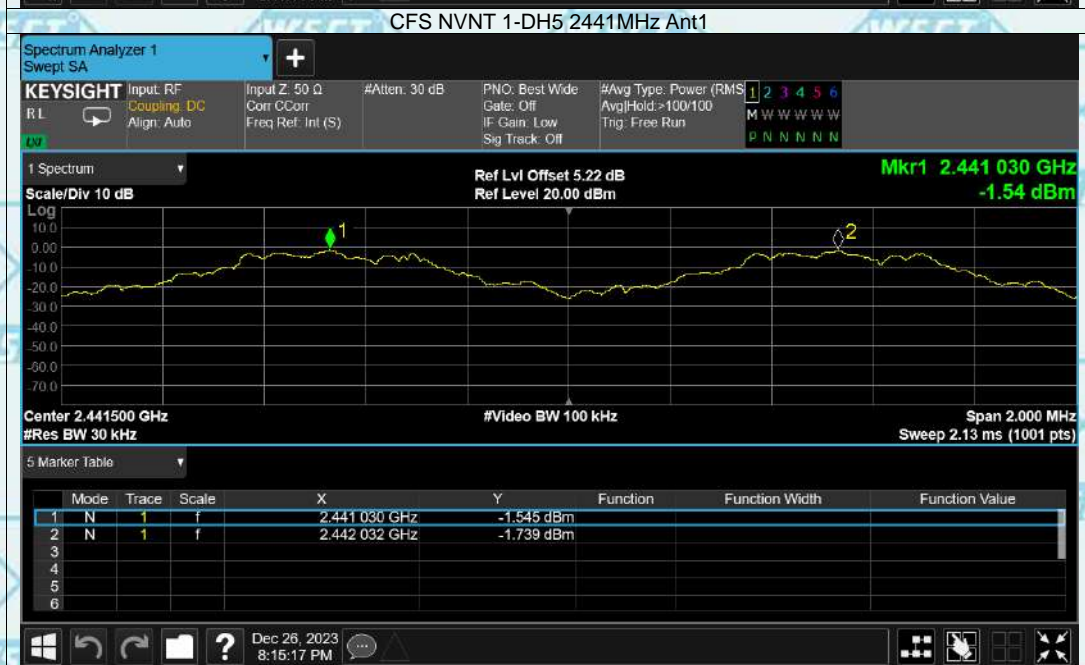
For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

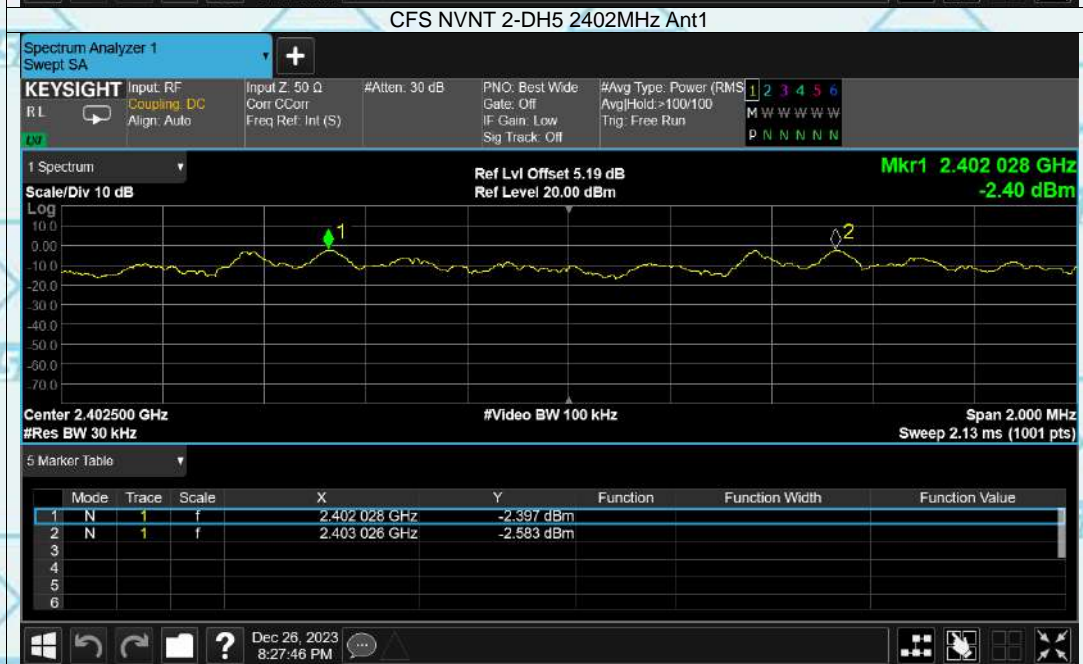
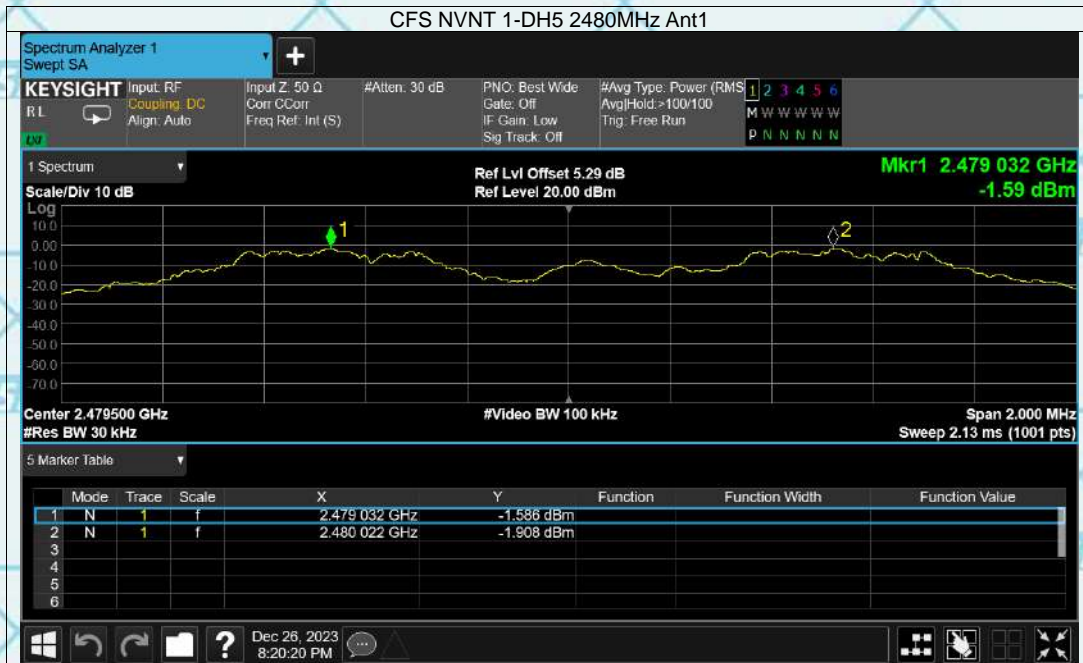




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

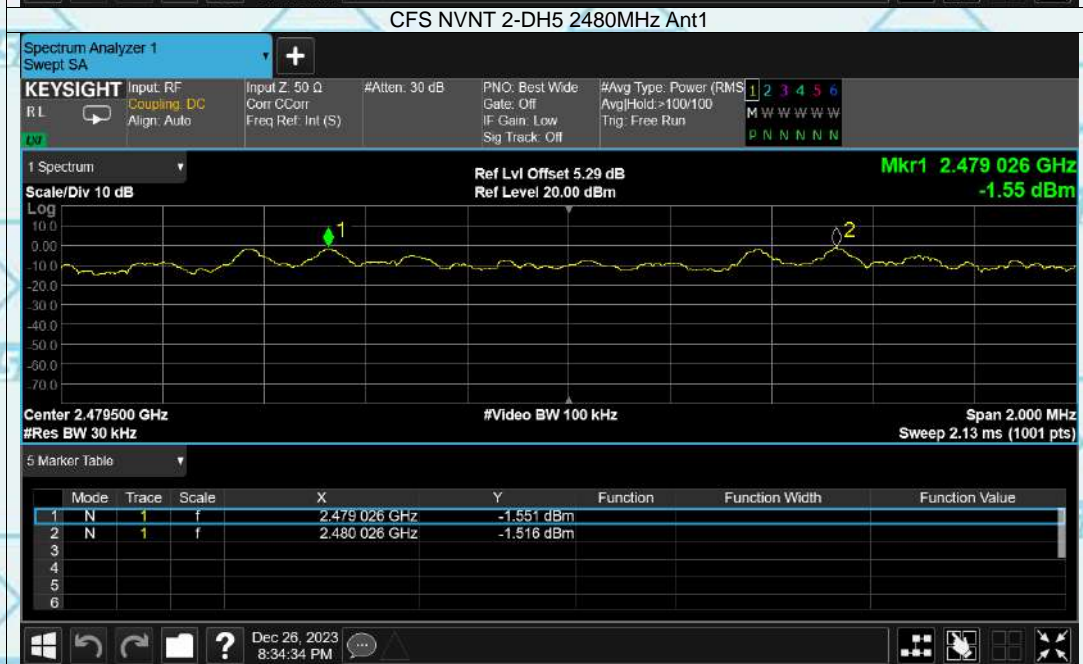
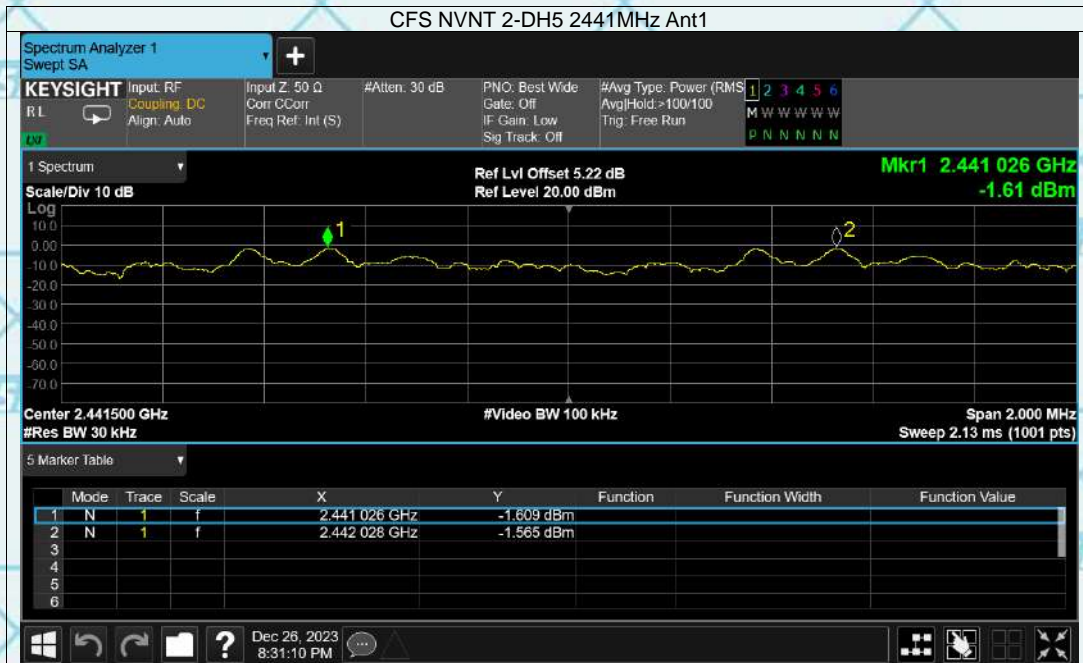




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

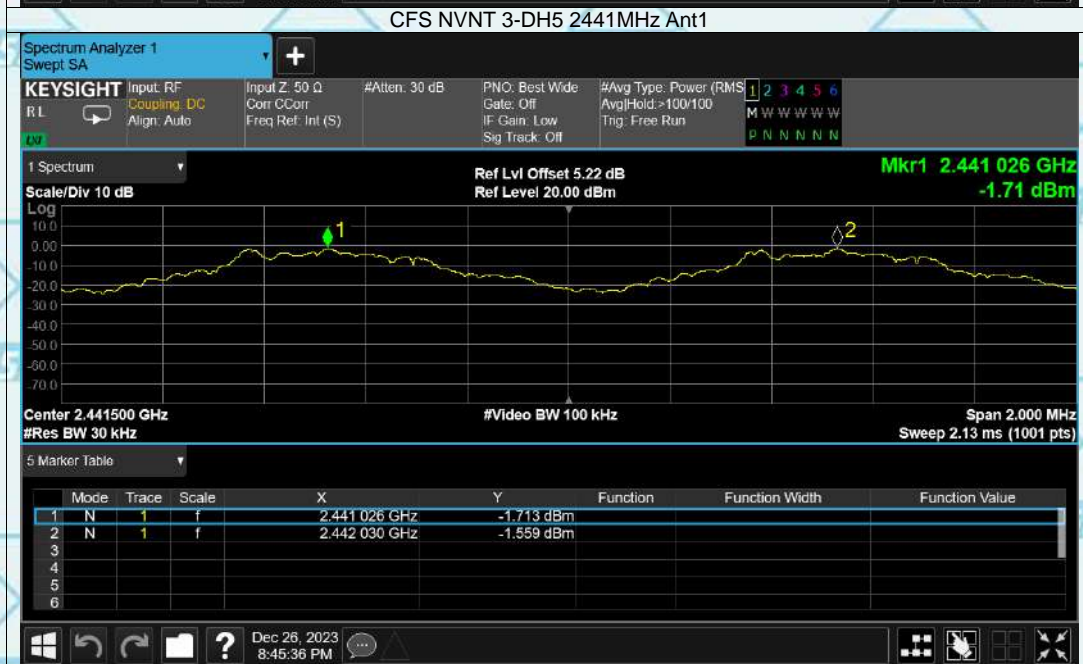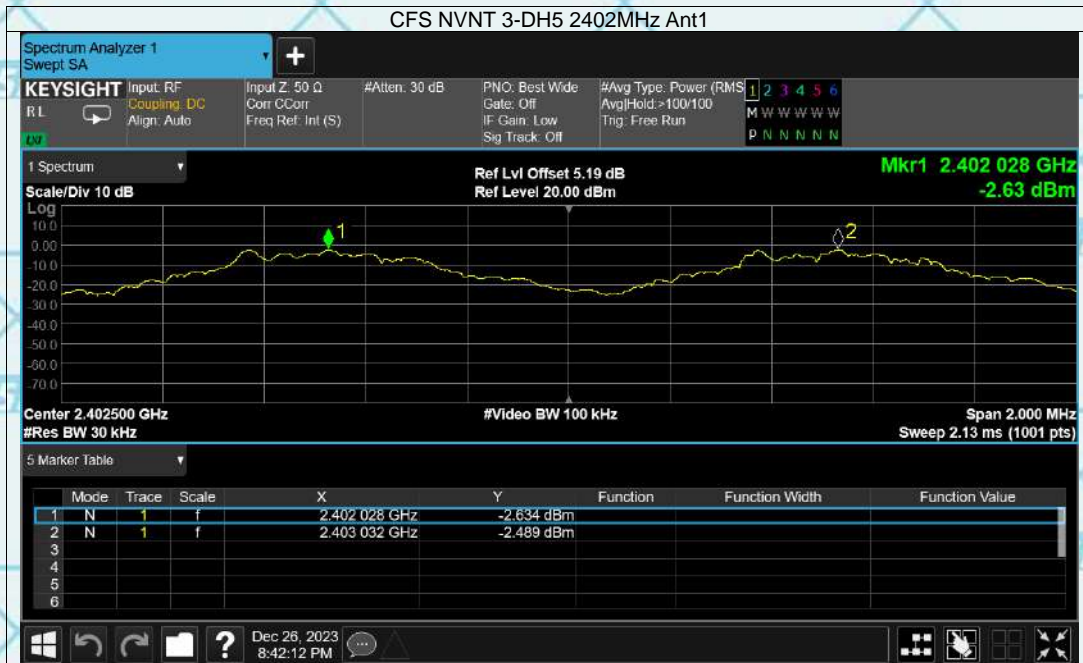




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

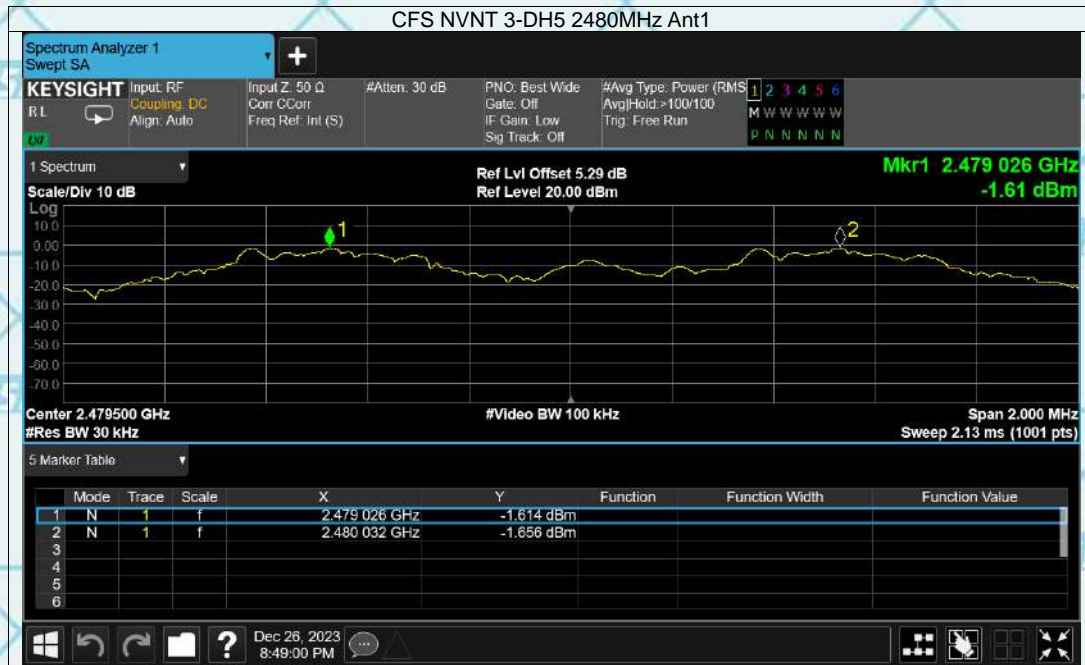



6.6. Hopping Channel Number

6.6.1. Test Specification
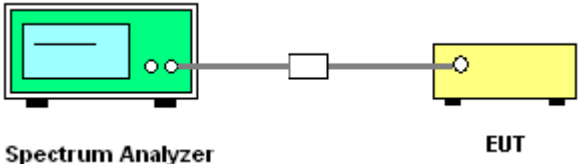
| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. |
| Test Setup: |  <p>Spectrum Analyzer EUT</p> |
| Test Mode: | Hopping mode |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = the frequency band of operation; set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold. 6. The number of hopping frequency used is defined as the number of total channel. 7. Record the measurement data in report. |
| Test Result: | PASS |



Report No.: WSCT-A2LA-R&E231200024A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

6.6.2. Test data

| Mode | Hopping channel numbers | Limit | Result |
|------------------------|-------------------------|-------|--------|
| GFSK, P/4-DQPSK, 8DPSK | 79 | 15 | PASS |

Test plots as follows:

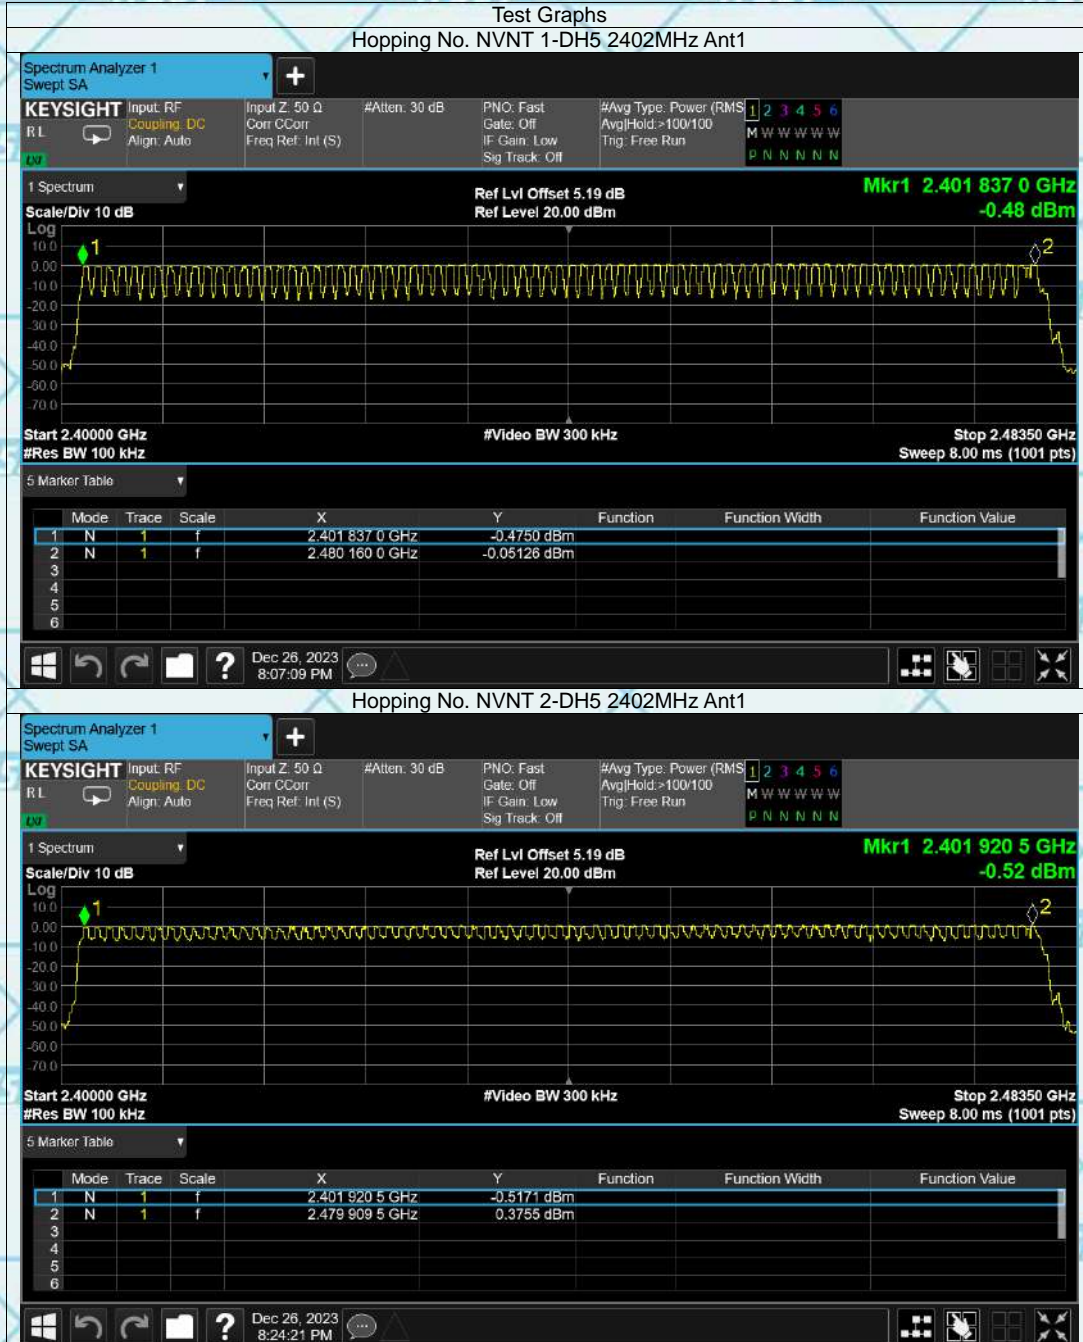




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

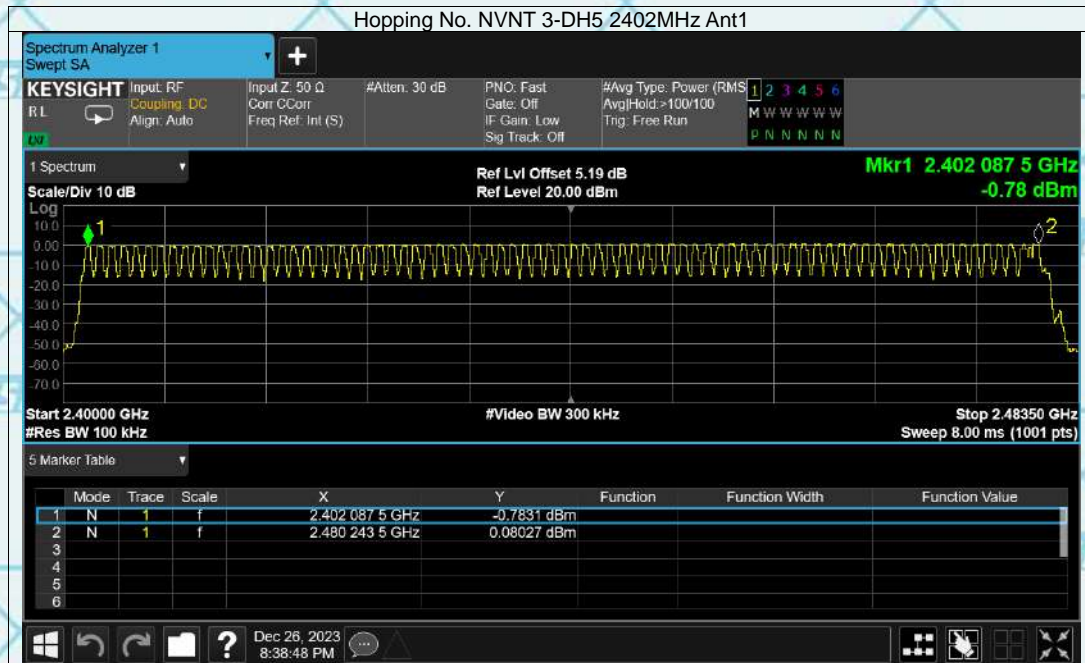



6.7. Dwell Time

6.7.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. |
| Test Setup: |  <p>Spectrum Analyzer EUT</p> |
| Test Mode: | Hopping mode |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows ANSI C63.10:2014 Measurement Guidelines. 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Enable the EUT hopping function. 5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold. 6. Measure and record the results in the test report. |
| Test Result: | PASS |



6.7.2. Test Data

| Mode | Frequency (MHz) | Pulse Time (ms) | Total Dwell Time (ms) | Burst Count | Period Time (ms) | Limit (ms) | Verdict |
|-------|-----------------|-----------------|-----------------------|-------------|------------------|------------|---------|
| 1-DH1 | 2402 | 0.316 | 100.488 | 318 | 31600 | 400 | Pass |
| 1-DH1 | 2441 | 0.316 | 99.224 | 314 | 31600 | 400 | Pass |
| 1-DH1 | 2480 | 0.383 | 121.411 | 317 | 31600 | 400 | Pass |
| 1-DH3 | 2402 | 1.64 | 255.84 | 156 | 31600 | 400 | Pass |
| 1-DH3 | 2441 | 1.639 | 249.128 | 152 | 31600 | 400 | Pass |
| 1-DH3 | 2480 | 1.639 | 254.045 | 155 | 31600 | 400 | Pass |
| 1-DH5 | 2402 | 2.887 | 294.474 | 102 | 31600 | 400 | Pass |
| 1-DH5 | 2441 | 2.886 | 311.688 | 108 | 31600 | 400 | Pass |
| 1-DH5 | 2480 | 2.887 | 306.022 | 106 | 31600 | 400 | Pass |

Note: 1. In normal mode, hopping rate is 1600 hops/s with 6 slots in 79 hopping channels.

For DH1, With channel hopping rate $(1600 / 2 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 2 / 79) \times (0.4 \times 79) = 320$ hops

For DH3, With channel hopping rate $(1600 / 4 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 4 / 79) \times (0.4 \times 79) = 160$ hops

For DH5, With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops



2. Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

Test plots as follows:



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

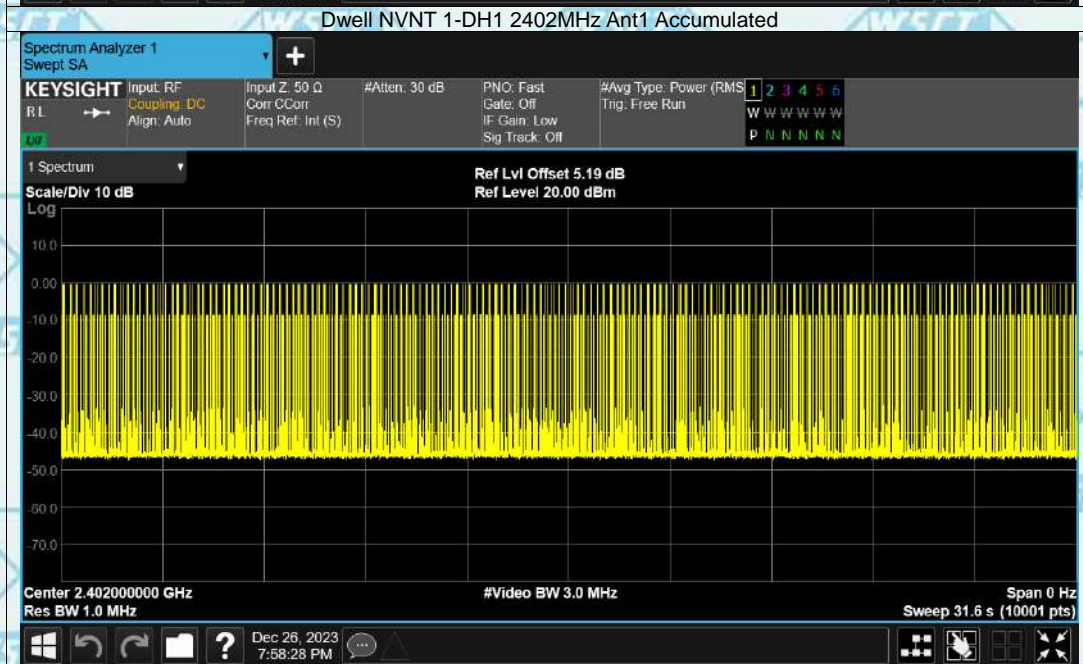
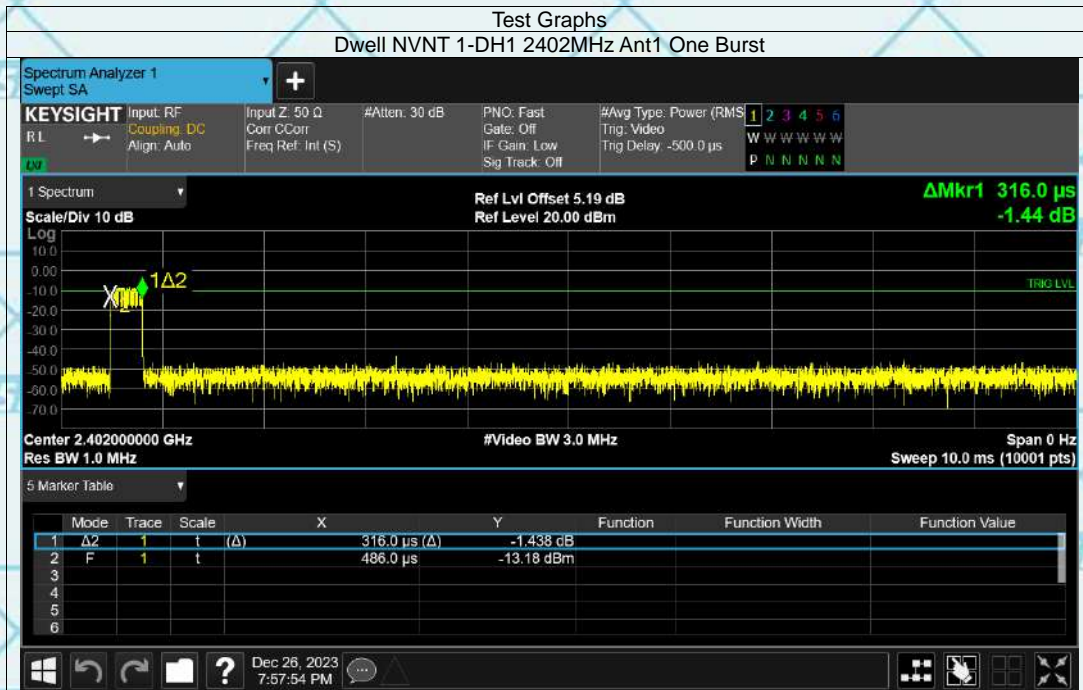
For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

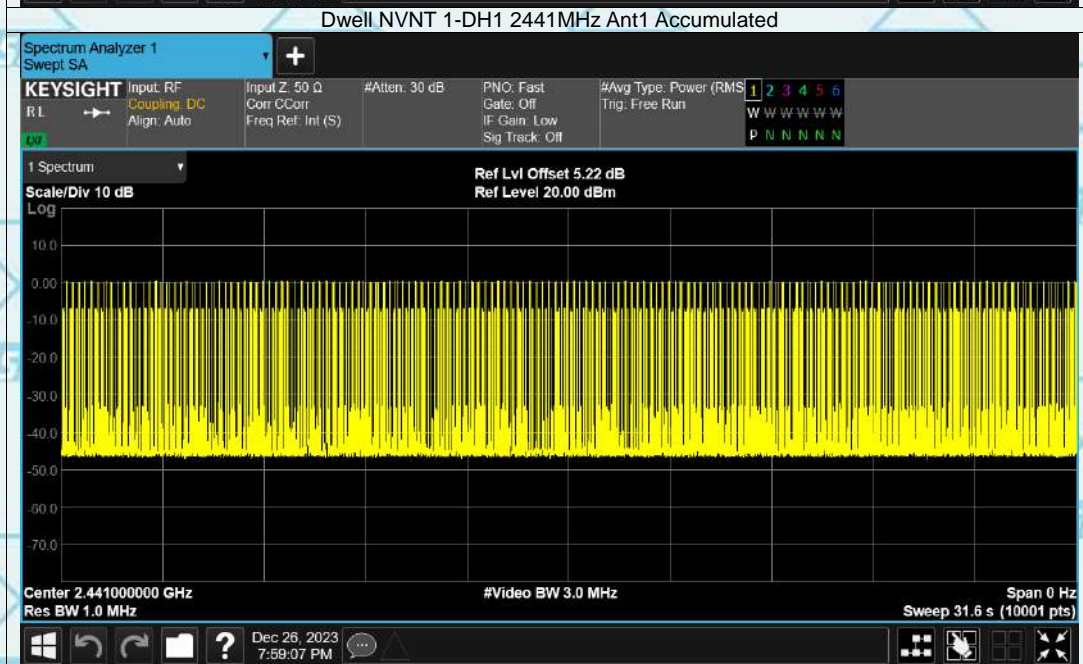
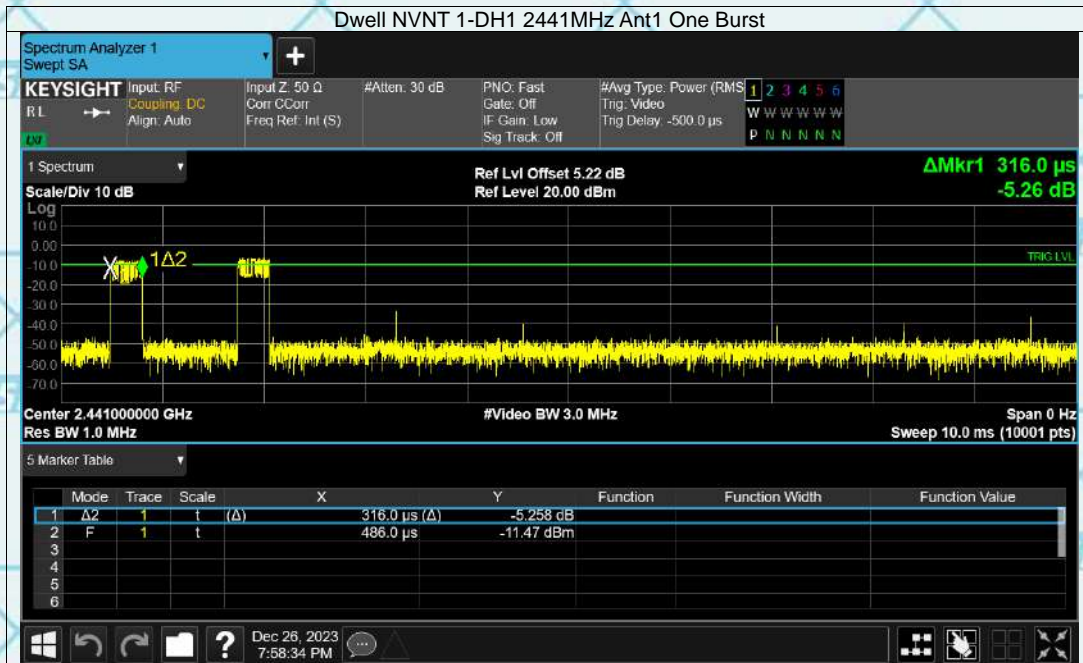




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

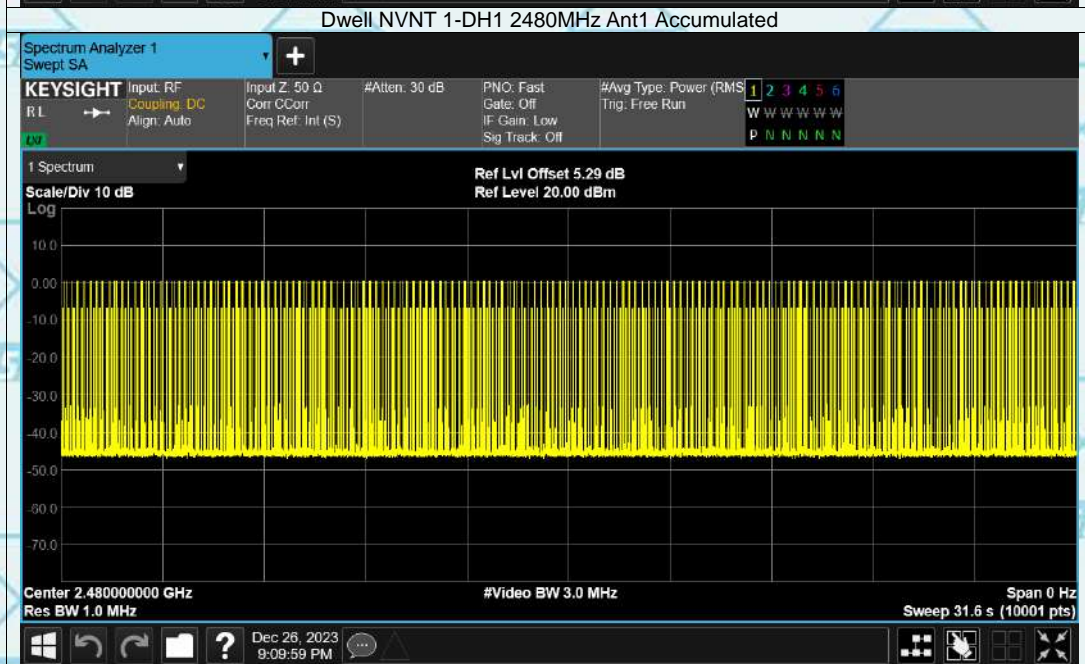
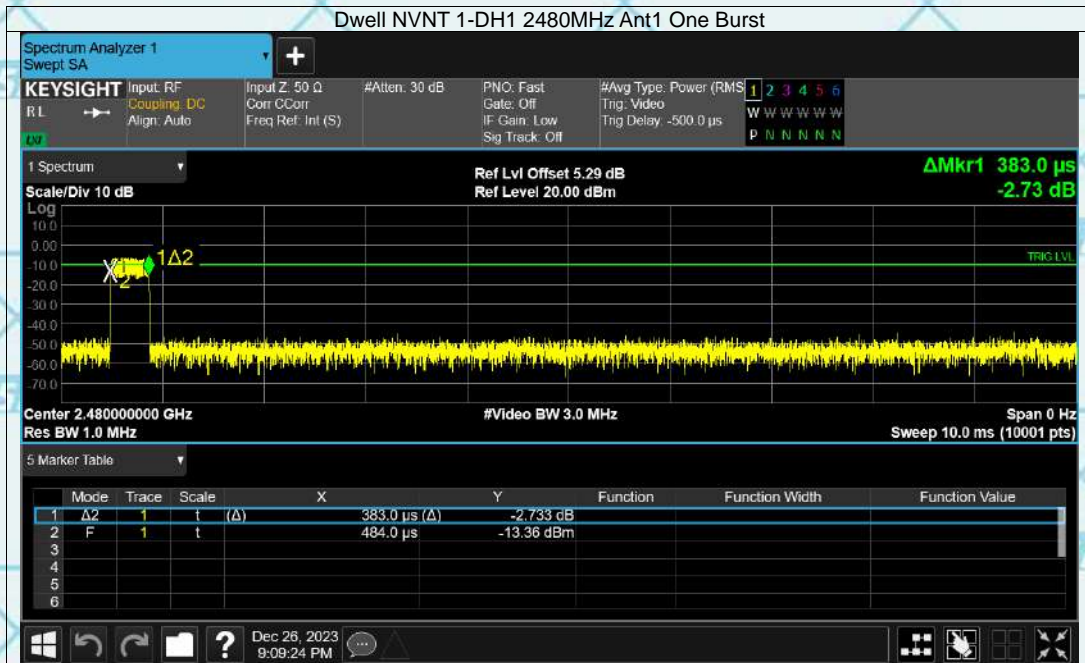




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

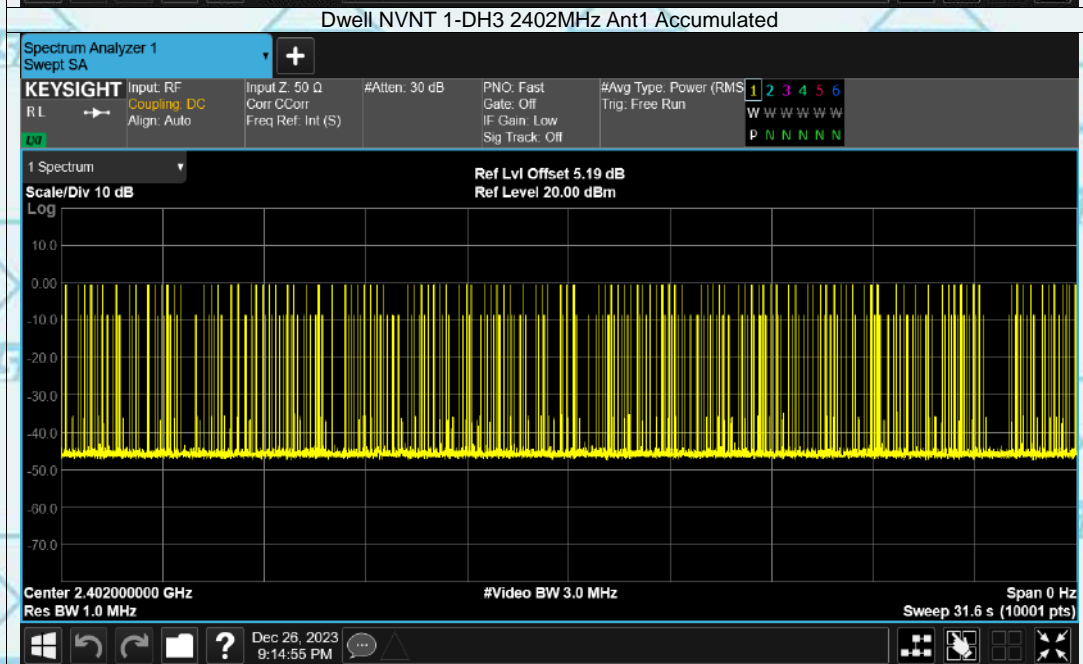
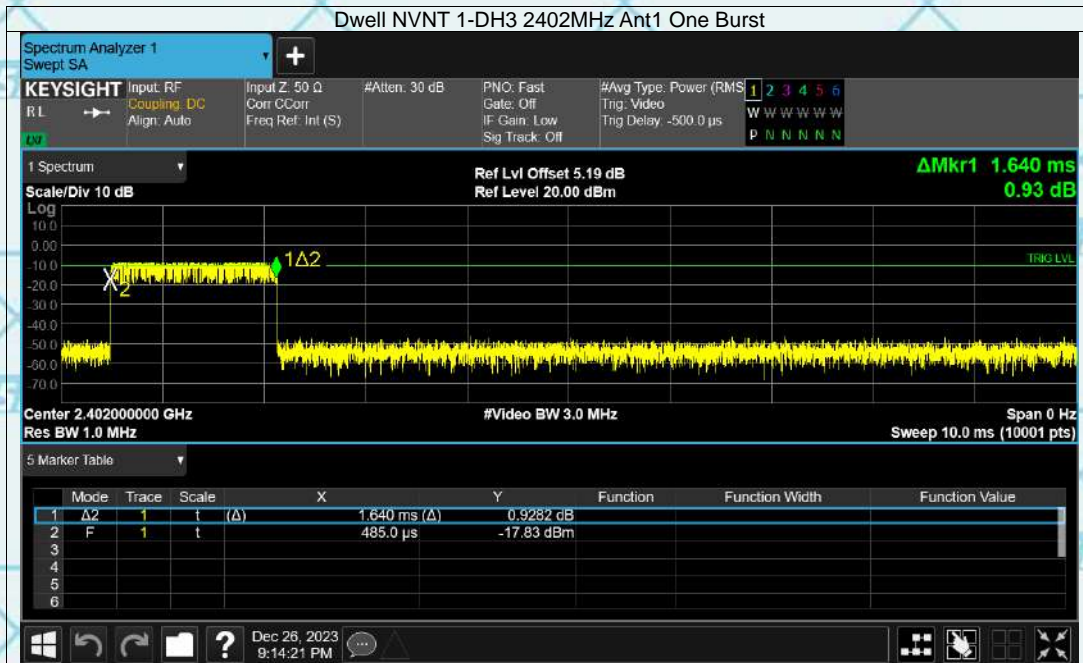




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

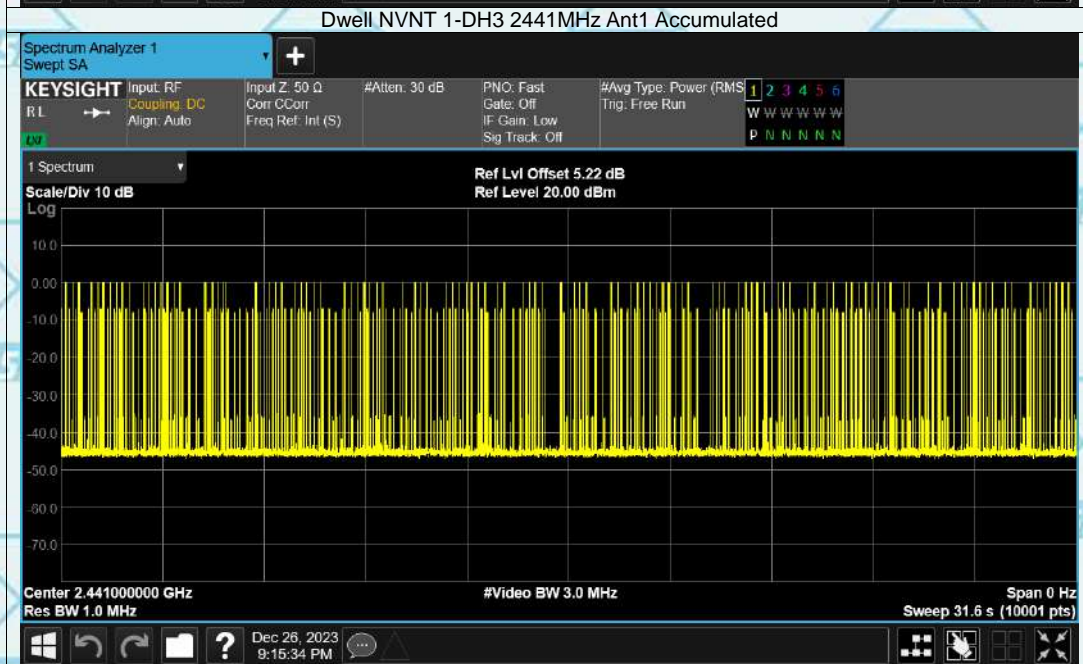
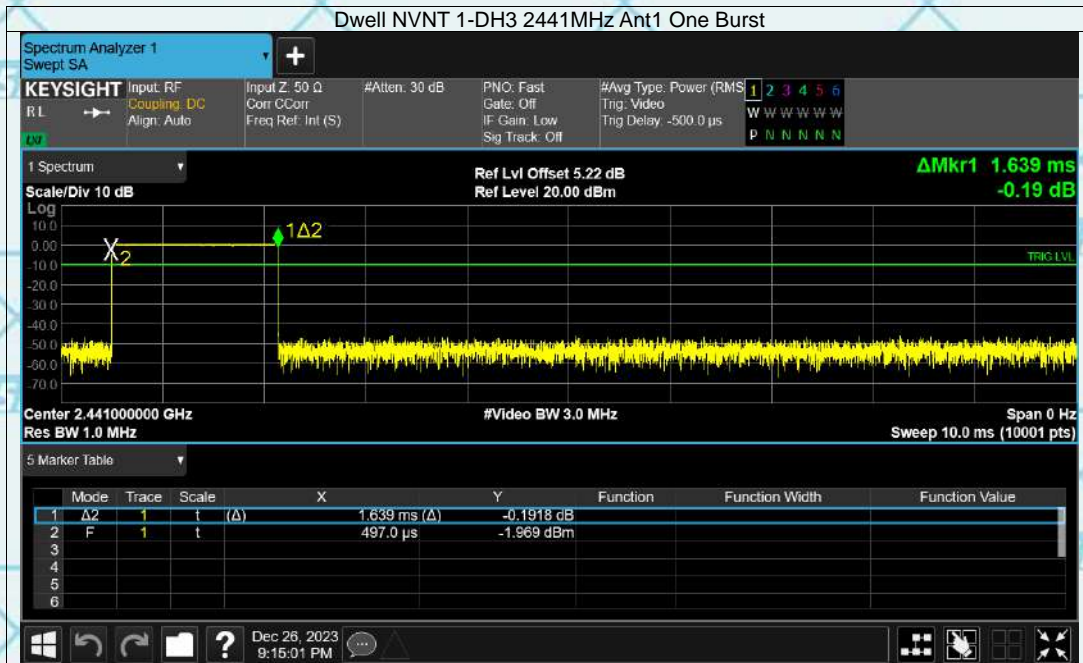




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

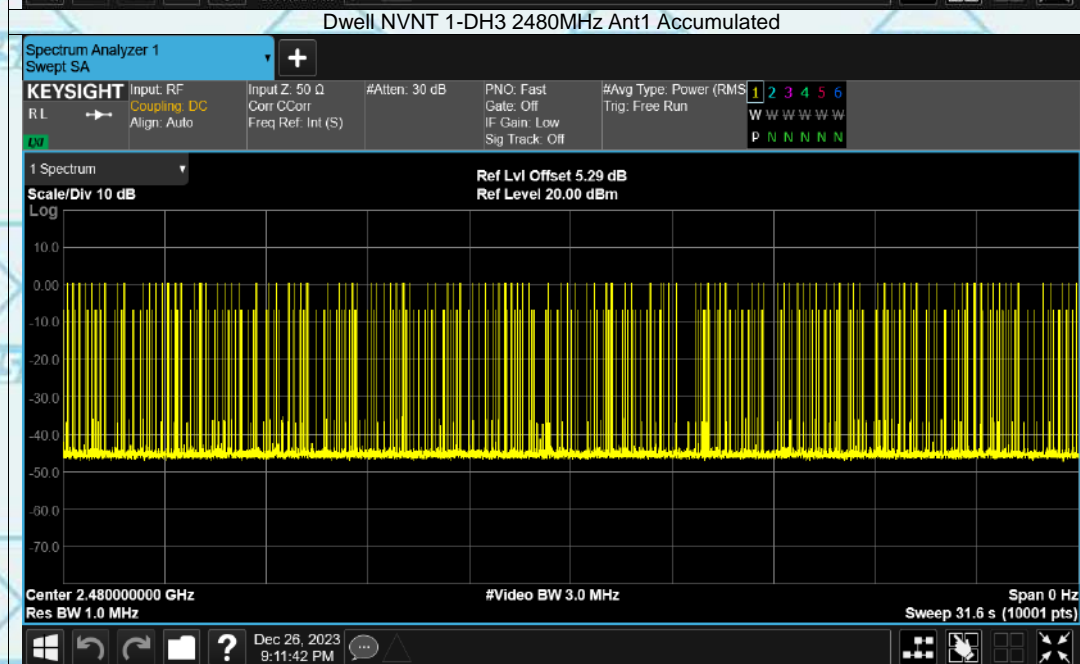
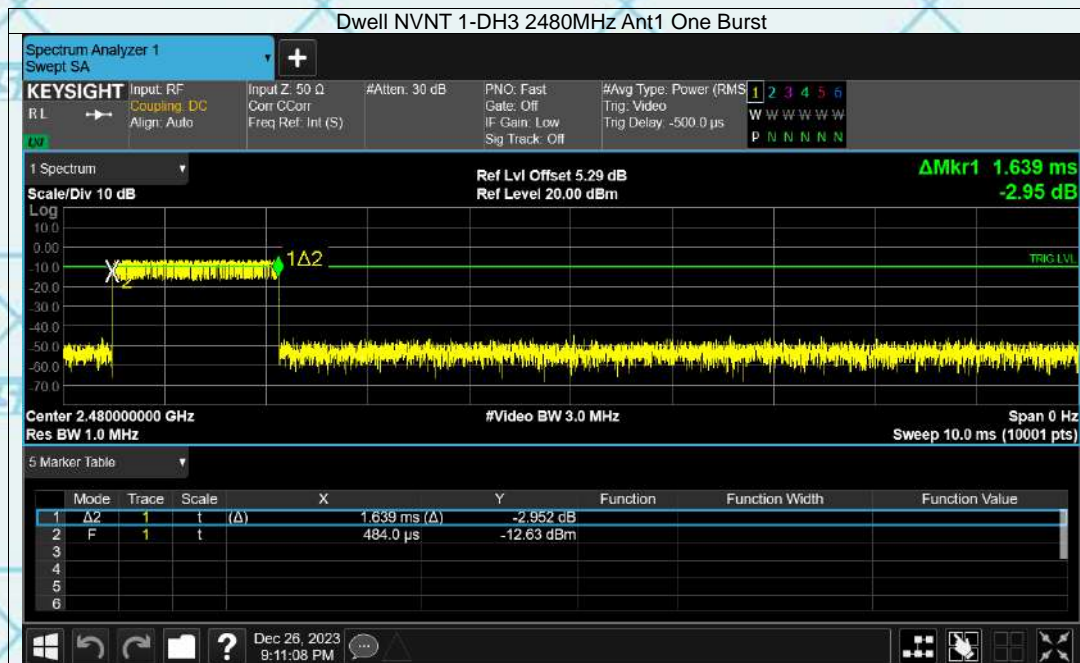




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

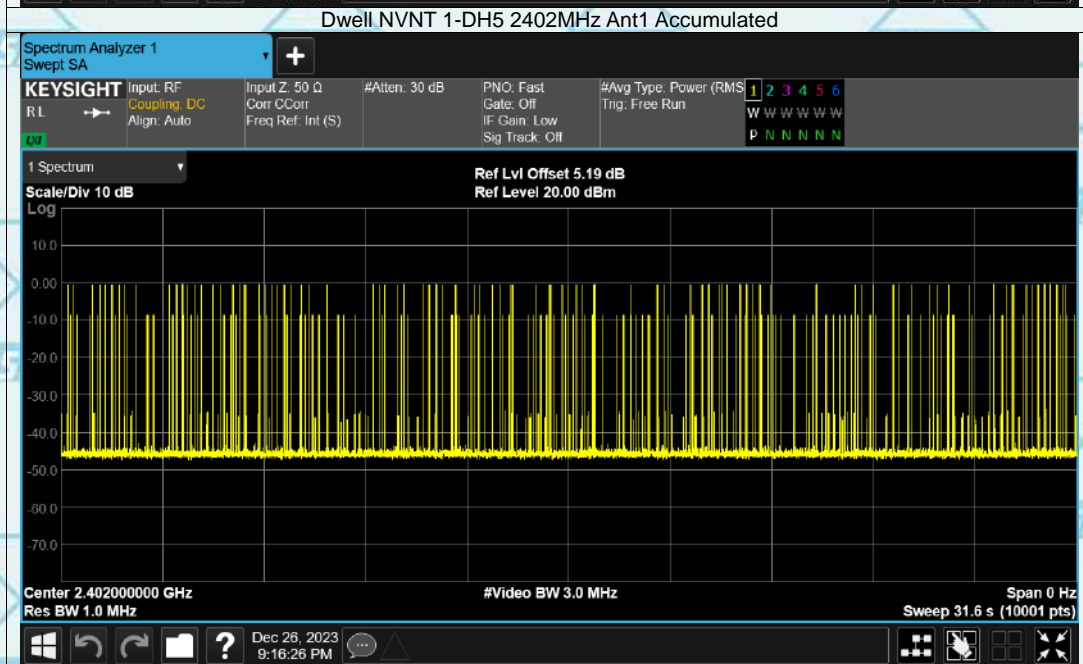
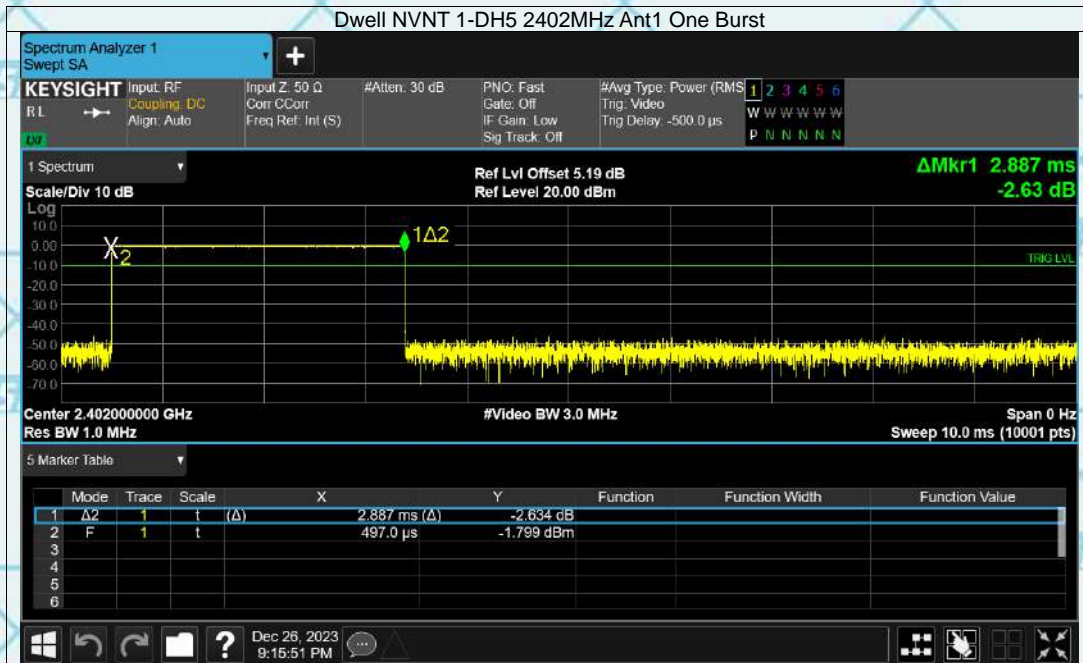




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

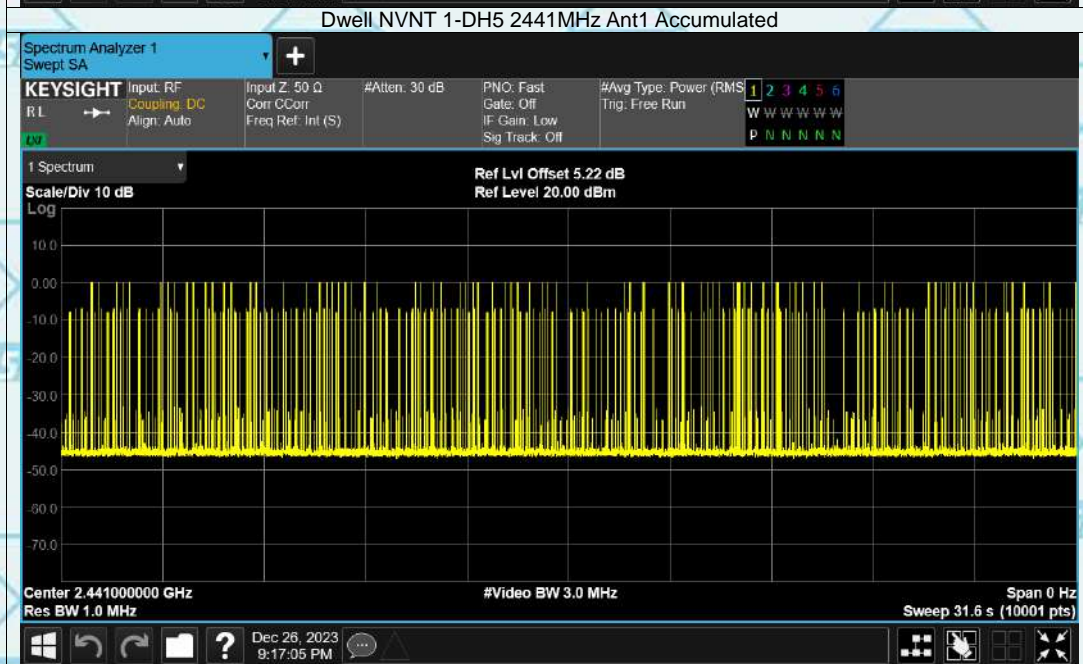
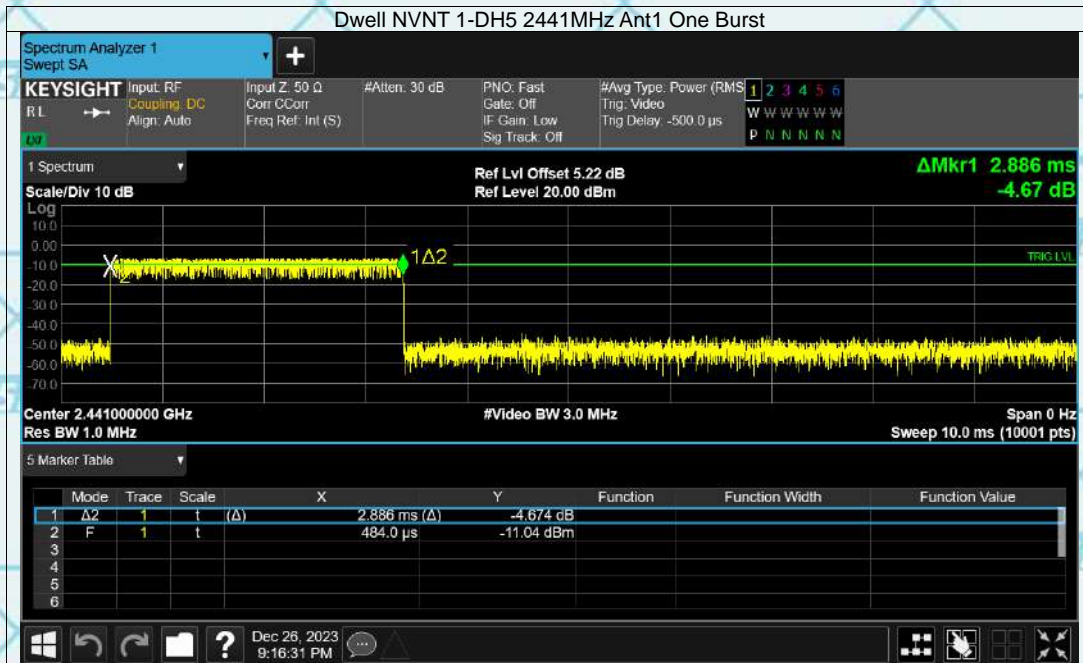




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

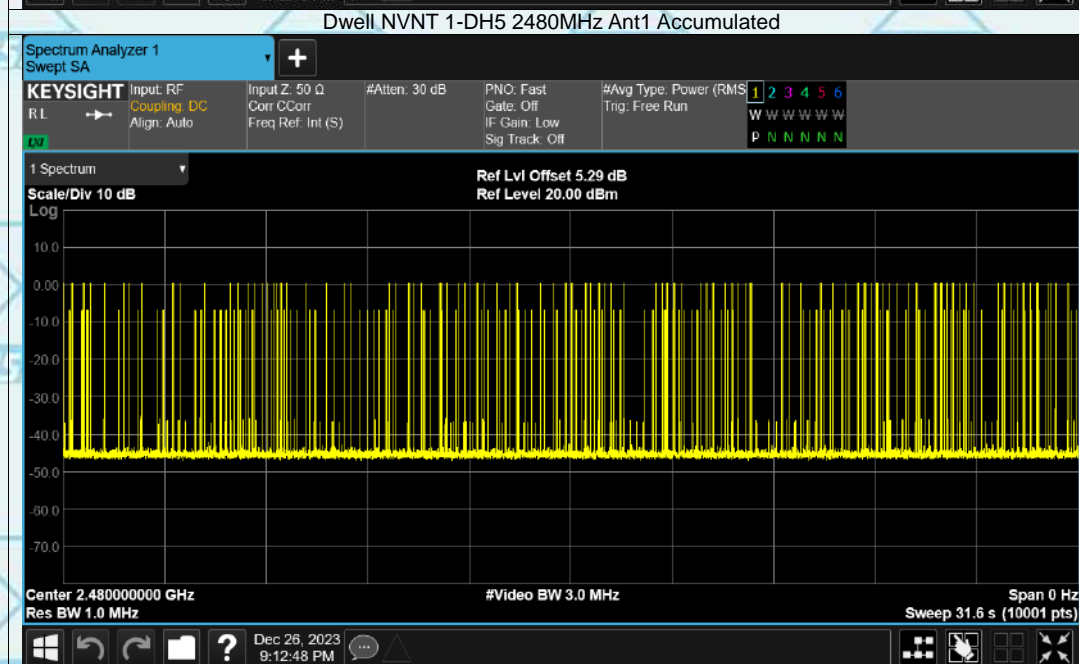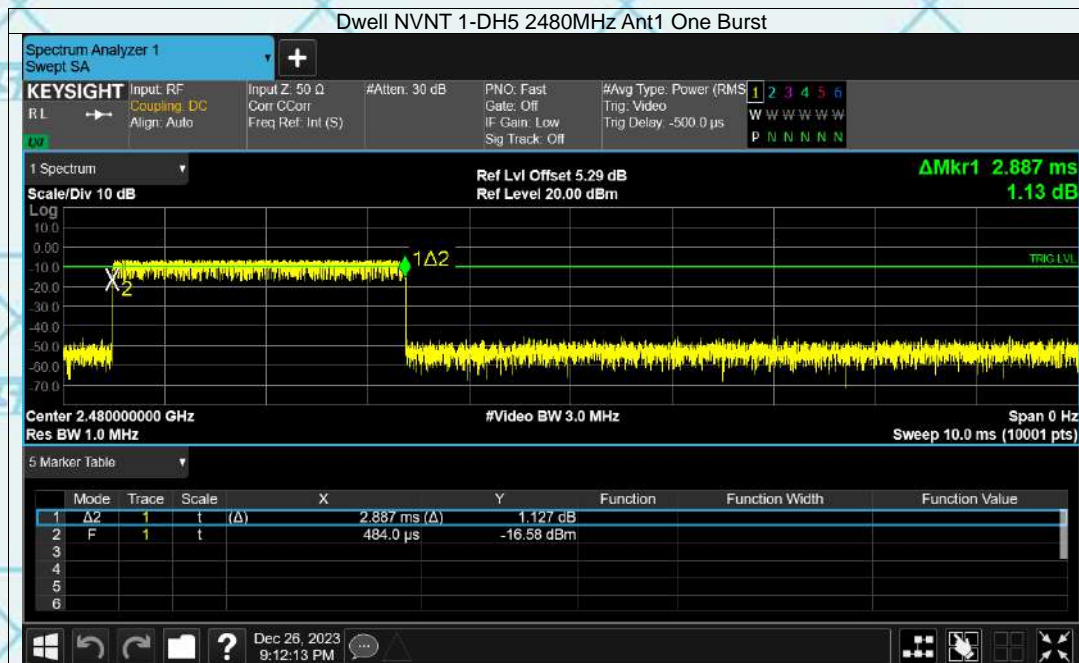



6.8. Pseudorandom Frequency Hopping Sequence

Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

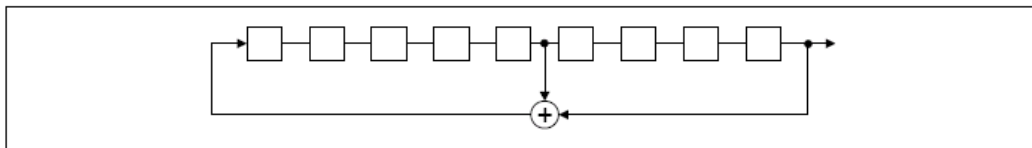

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

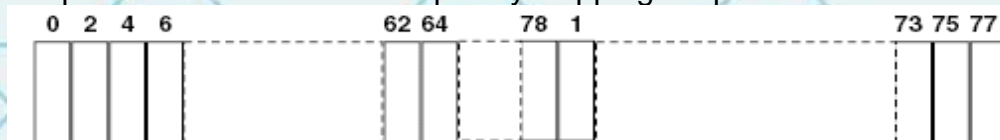


Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



6.9. Conducted Band Edge Measurement

6.9.1. Test Specification

| | |
|--------------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits. |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows the guidelines in Band-edge Compliance of RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Set RBW = 100 kHz ($\geq 1\%$ span=10MHz), VBW = 300 kHz (\geqRBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used. 4. Enable hopping function of the EUT and then repeat step 2 and 3. 5. Measure and record the results in the test report. |
| Test Result: | PASS |



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Test Data


GFSK Modulation (the worst case)





Report No.: WSCT-A2LA-R&E231200024A-BT


Certificate #5768.01

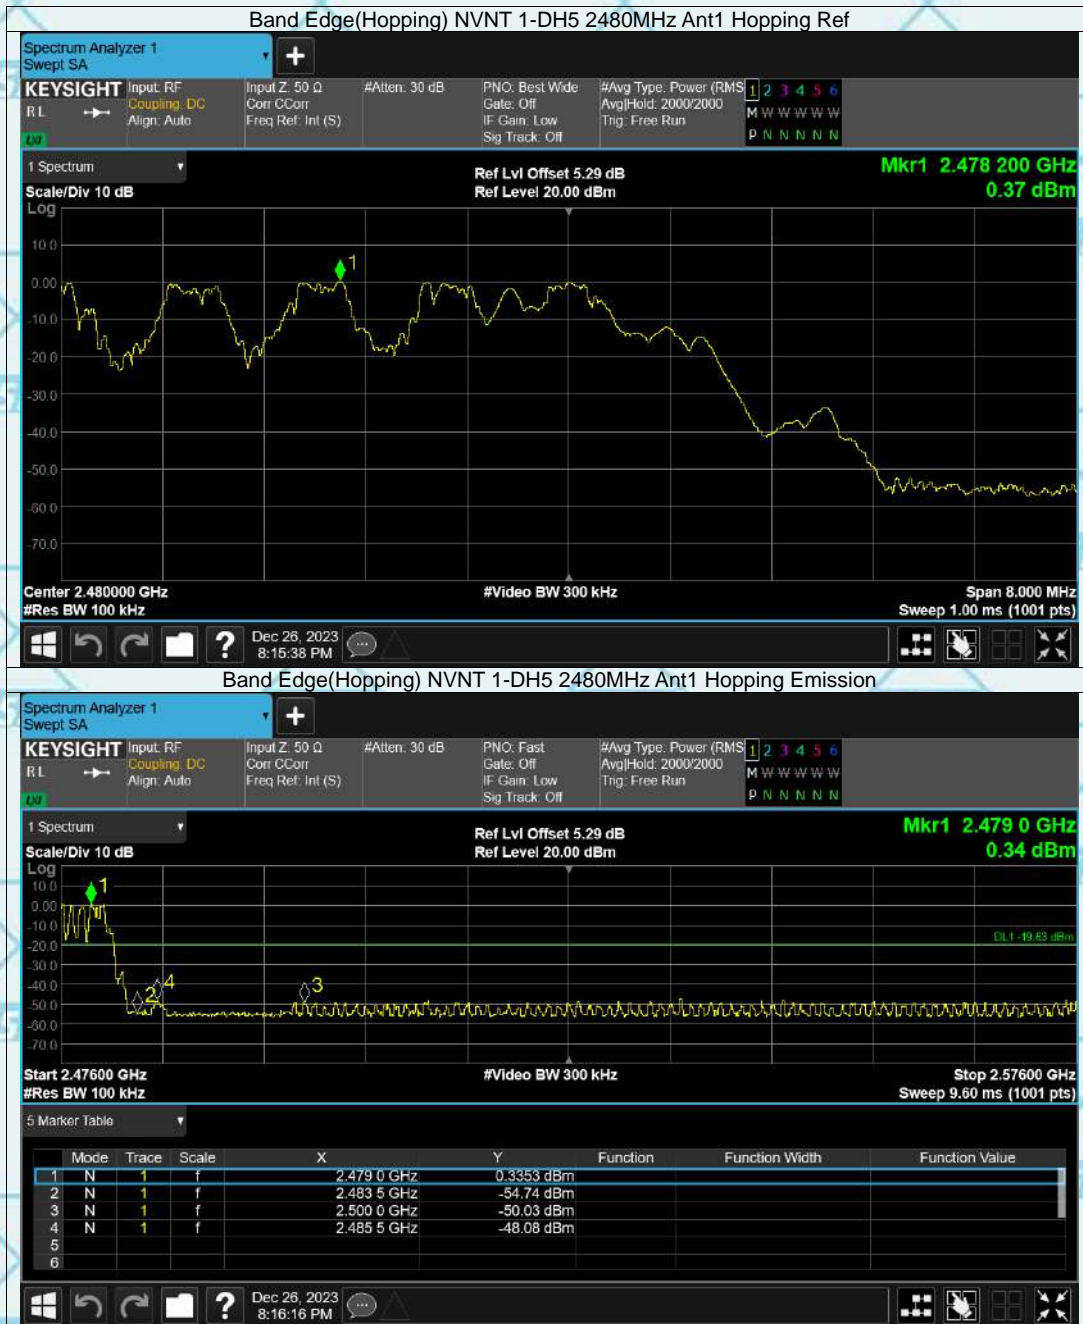For Question,
Please Contact with WSCT
www.wsct-cert.com



6.10. Conducted Spurious Emission Measurement

6.10.1. Test Specification

| | |
|--------------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2014 |
| Limit: | In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits. |
| Test Setup: |  <p>Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows the guidelines in Spurious RF Conducted Emissions of ANSI C63.10:2014 Measurement Guidelines 2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 4. Set RBW = 100 kHz, VBW = 300kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. 5. Measure and record the results in the test report. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. |
| Test Result: | PASS |



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

Test Data






Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01



For Question,
Please Contact with WSCT
www.wsct-cert.com

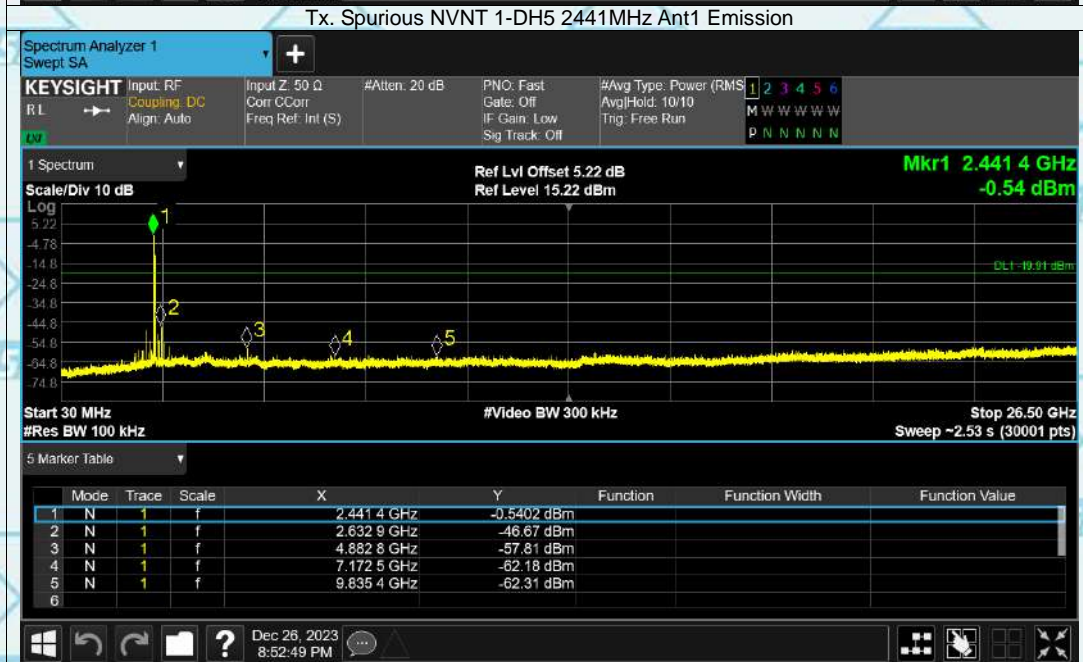



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

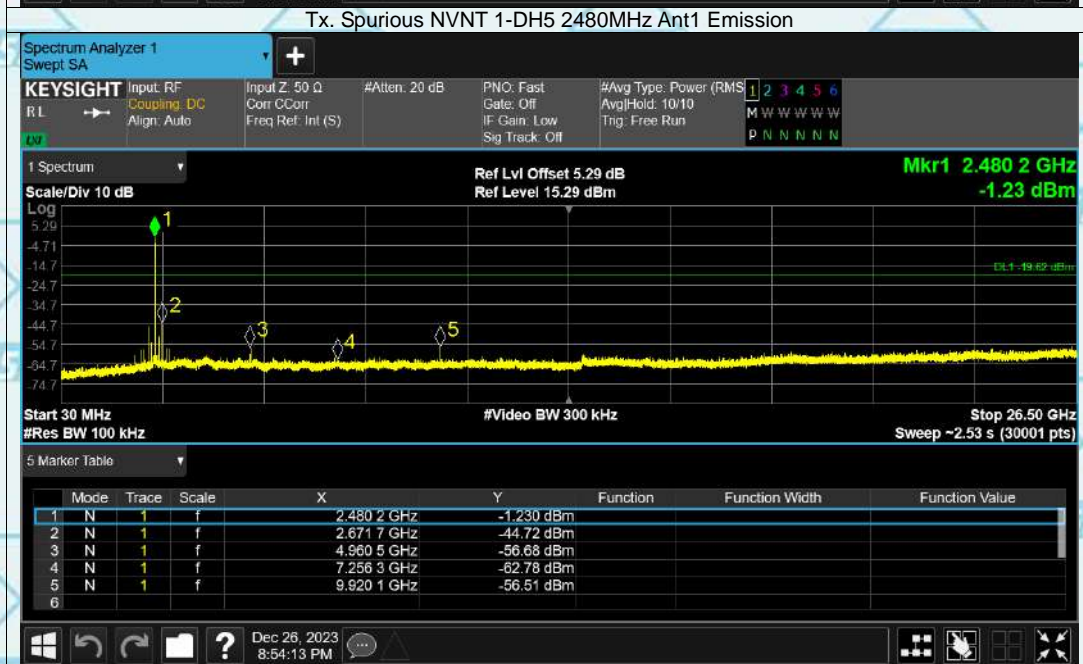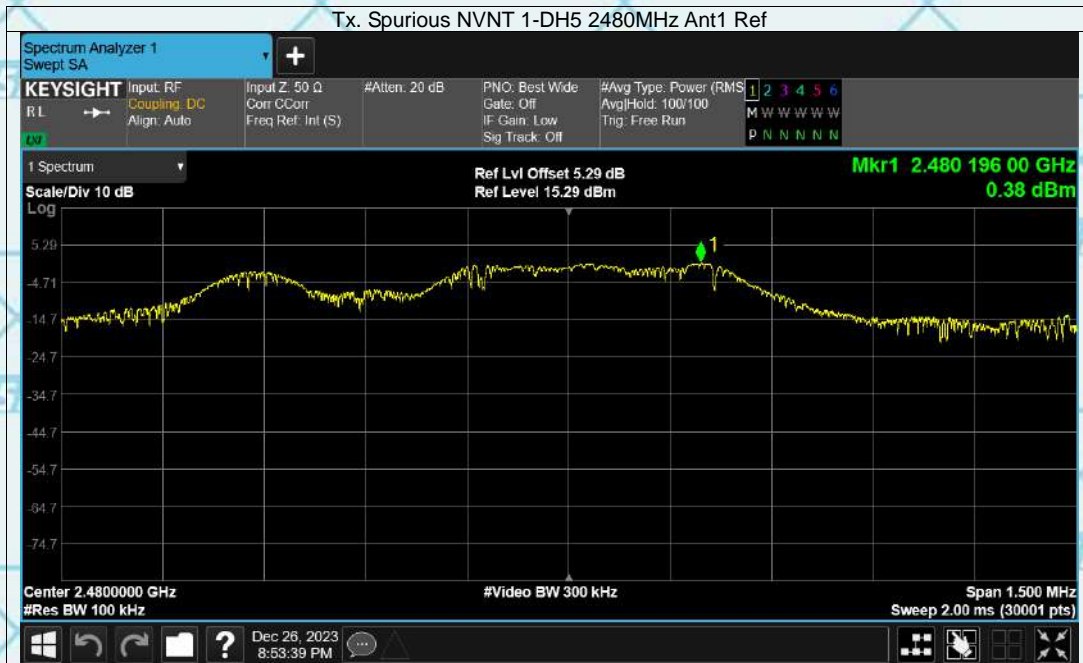
For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com


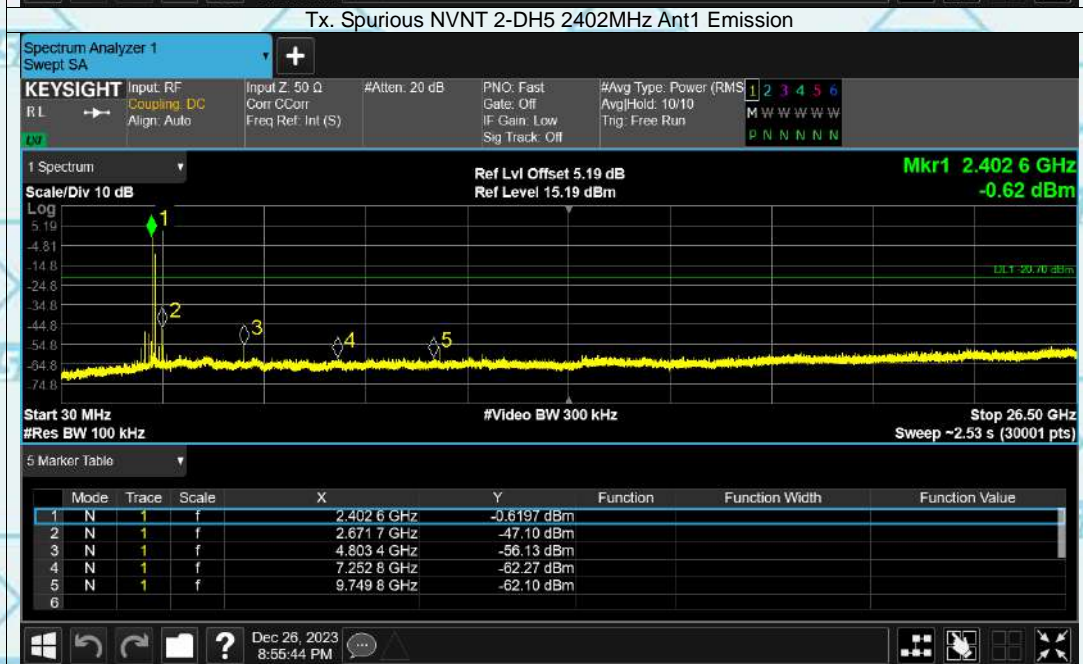




Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01



For Question,
Please Contact with WSCT
www.wsct-cert.com

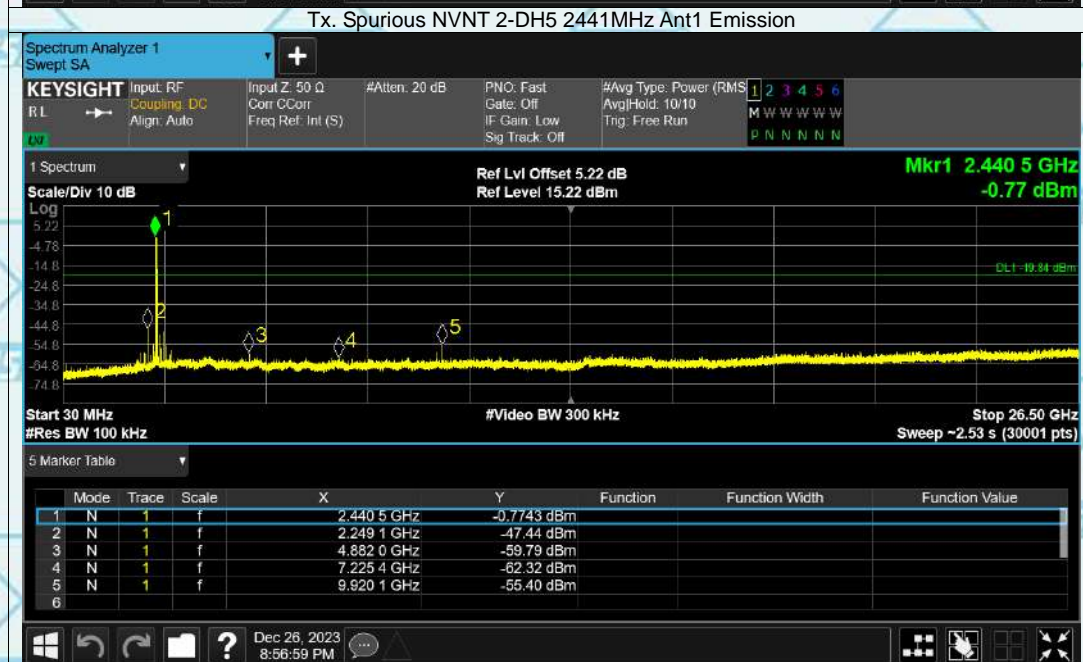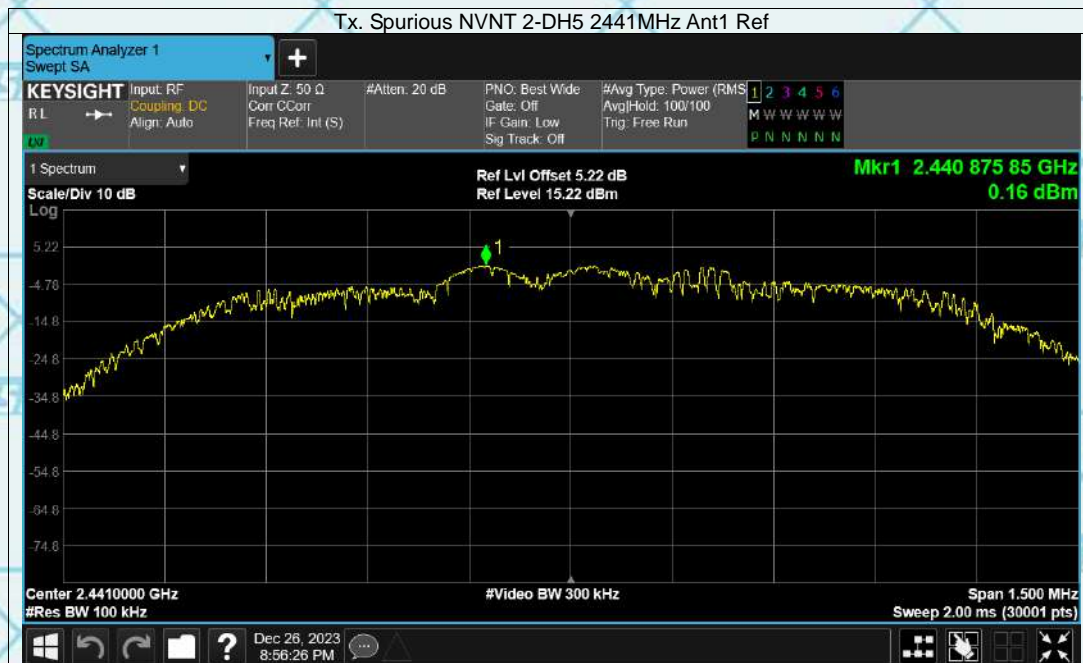



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

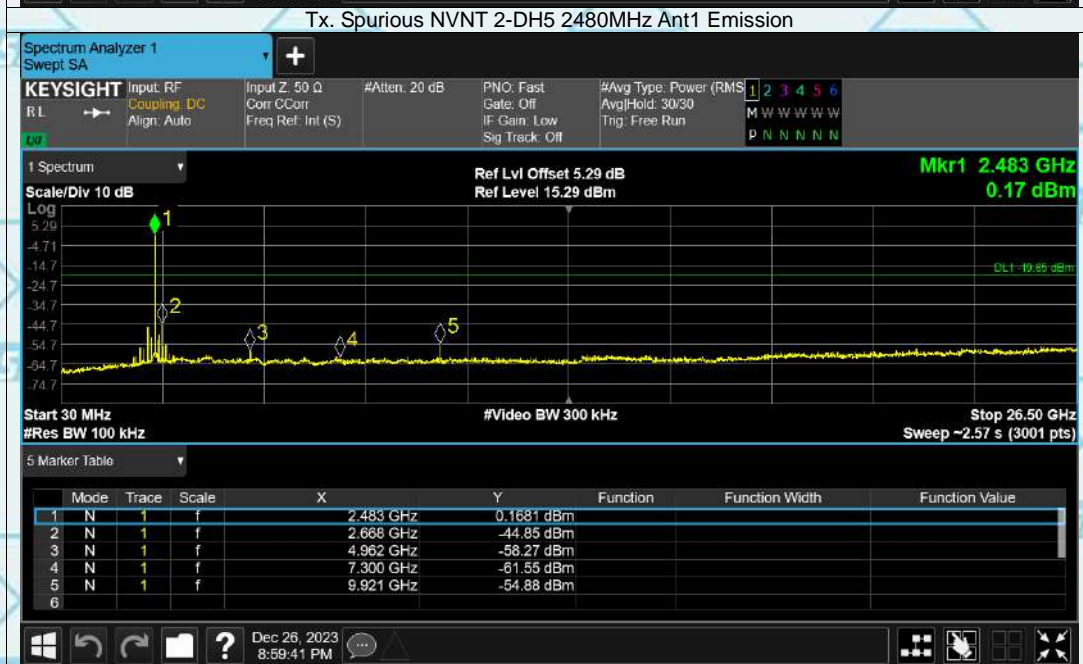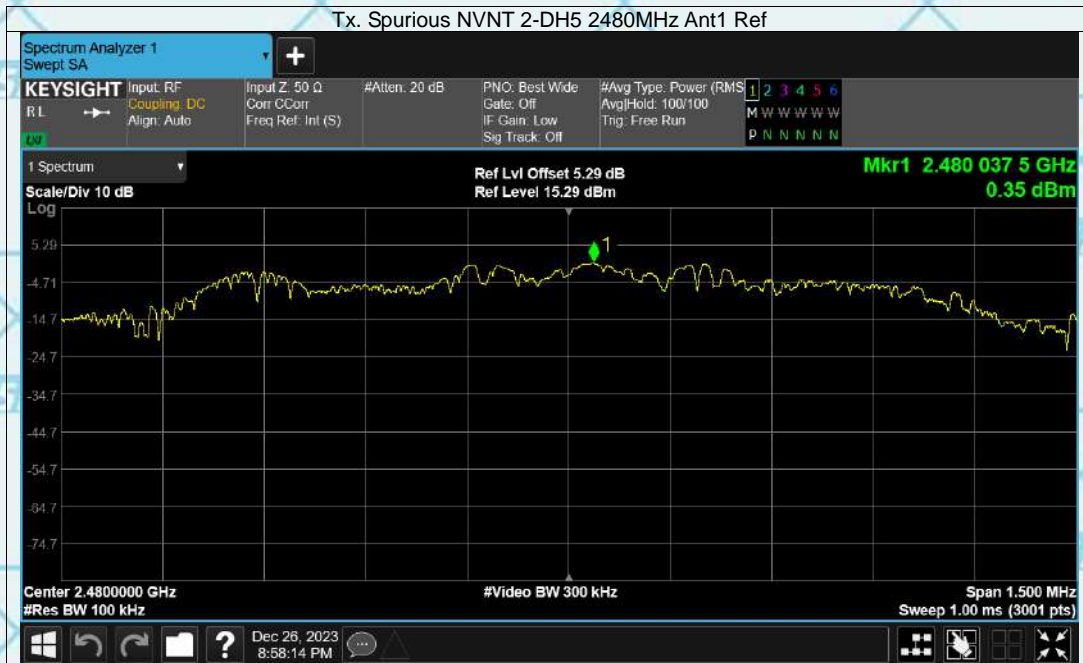
For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01


For Question,
Please Contact with WSCT
www.wsct-cert.com

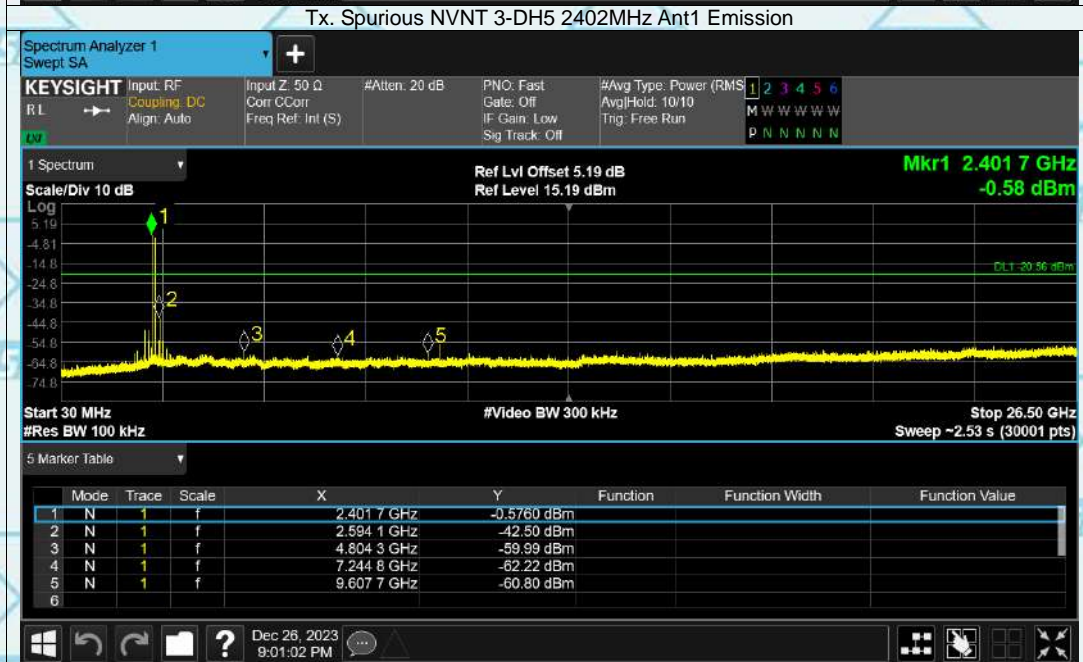



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

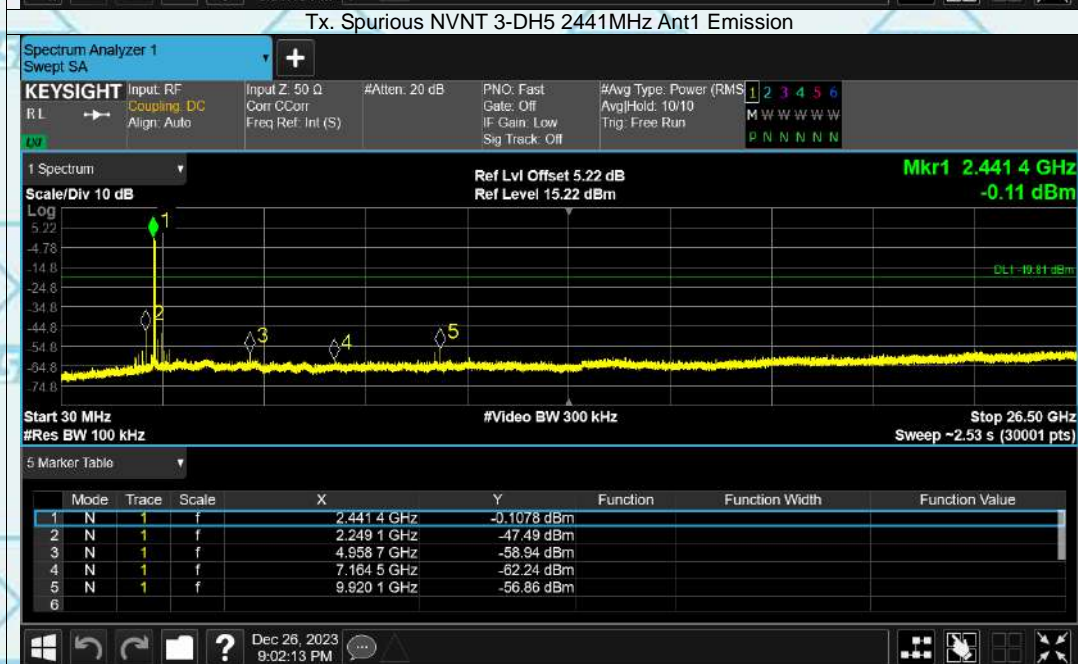
For Question,
Please Contact with WSCT
www.wsct-cert.com



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com

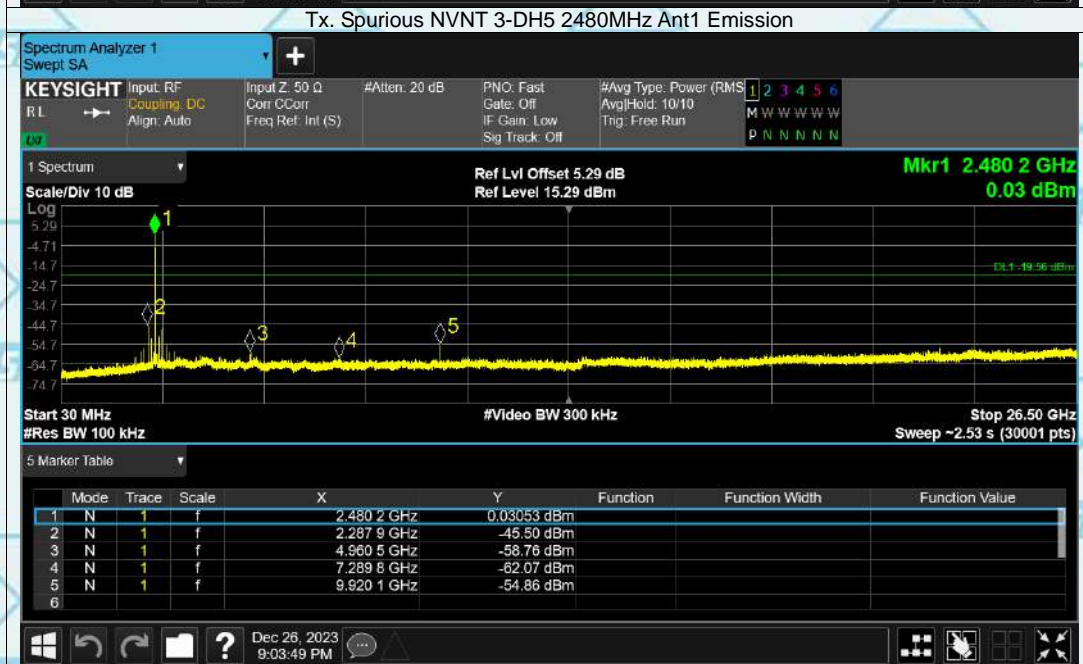





6.11. Radiated Spurious Emission Measurement

6.11.1. Test Specification

| | | | | |
|--|-----------------------------|-----------------------------------|-------------------------------|------------------|
| Test Requirement: | FCC Part15 C Section 15.209 | | | |
| Test Method: | ANSI C63.10:2014 | | | |
| Frequency Range: | 9 kHz to 25 GHz | | | |
| Measurement Distance: | 3 m | | | |
| Antenna Polarization: | Horizontal & Vertical | | | |
| Receiver Setup: | Frequency | Detector | RBW | VBW |
| | 9kHz- 150kHz | Quasi-peak | 200Hz | 1kHz |
| | 150kHz- 30MHz | Quasi-peak | 9kHz | 30kHz |
| | 30MHz-1GHz | Quasi-peak | 100KHz | 300KHz |
| | Above 1GHz | Peak | 1MHz | 3MHz |
| Limit: | Frequency | Field Strength (microvolts/meter) | Measurement Distance (meters) | Remark |
| | 0.009-0.490 | 2400/F(KHz) | 300 | Quasi-peak Value |
| | 0.490-1.705 | 24000/F(KHz) | 30 | Quasi-peak Value |
| | 1.705-30 | 30 | 30 | Quasi-peak Value |
| | 30-88 | 100 | 3 | Peak Value |
| Test setup: | 88-216 | 150 | 3 | Average Value |
| | 216-960 | 200 | 3 | |
| | Above 960 | 500 | 3 | |
| | Frequency | Field Strength (microvolts/meter) | Measurement Distance (meters) | Detector |
| | Above 1GHz | 500 | 3 | Average |
| | | 5000 | 3 | Peak |
| For radiated emissions below 30MHz | | | | |
| <p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre-Amplifier</p> <p>Receiver</p> | | | | |
| 30MHz to 1GHz | | | | |

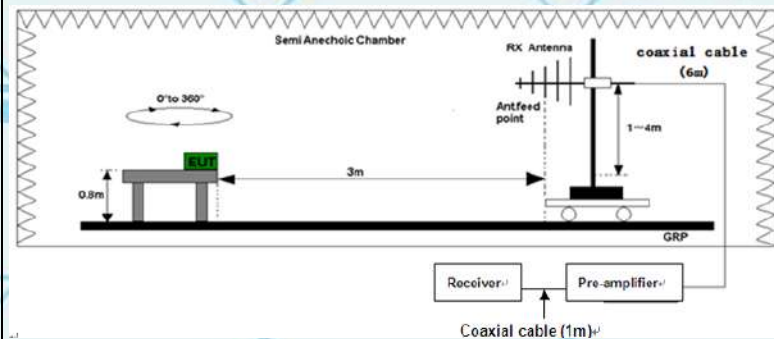

Above 1GHz

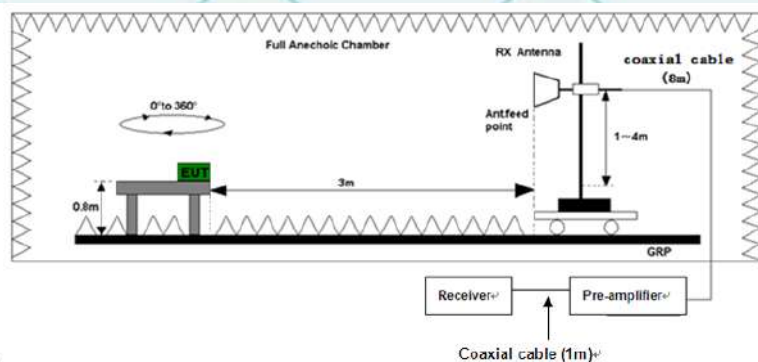**Test Mode:**

Transmitting mode with modulation

Test Procedure:

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10:2014 Measurement Guidelines.
2. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
For the radiated emission test above 1GHz:
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final



| | |
|---------------|--|
| | <p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <ol style="list-style-type: none"> Set to the maximum power setting and enable the EUT transmit continuously. Use the following spectrum analyzer settings: <ol style="list-style-type: none"> Span shall wide enough to fully capture the emission being measured; Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$GHz ; VBW\geqRBW; Sweep = auto; Detector function = peak; Trace = max hold for peak For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$ Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$ Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level |
| Test results: | PASS |



Report No.: WSCT-A2LA-R&E231200024A-BT


Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com**6.11.2. Test Data**

Please refer to following diagram for individual

Below 1GHz

Horizontal:

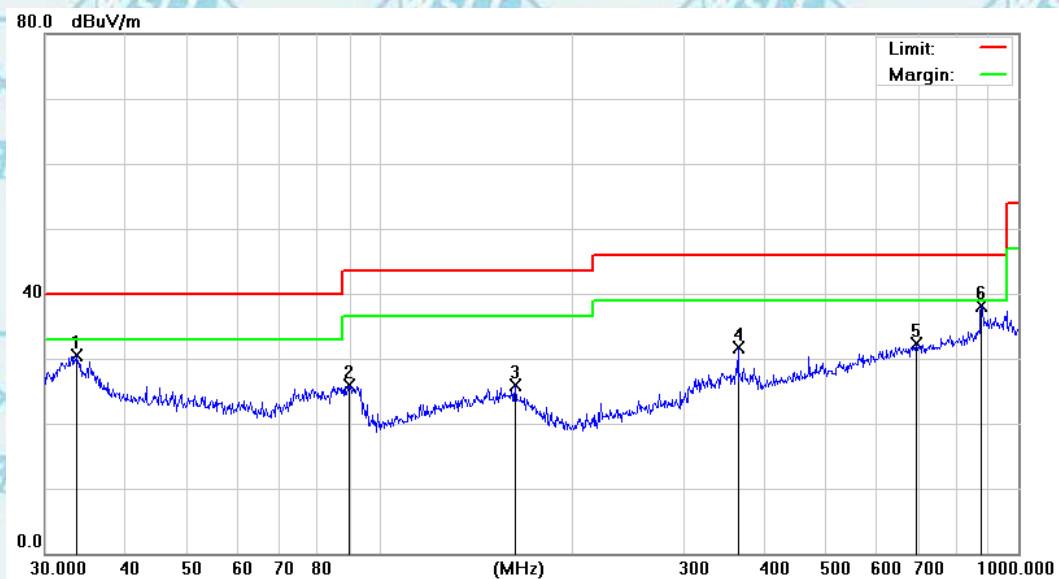

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 33.6802 | 33.44 | -2.96 | 30.48 | 40.00 | -9.52 | QP |
| 2 | | 89.5899 | 32.66 | -6.74 | 25.92 | 43.50 | -17.58 | QP |
| 3 | | 163.1818 | 28.17 | -2.30 | 25.87 | 43.50 | -17.63 | QP |
| 4 | | 364.2595 | 32.92 | -1.31 | 31.61 | 46.00 | -14.39 | QP |
| 5 | | 691.9867 | 27.45 | 4.76 | 32.21 | 46.00 | -13.79 | QP |
| 6 | * | 875.2470 | 31.46 | 6.70 | 38.16 | 46.00 | -7.84 | QP |



Report No.: WSCT-A2LA-R&E231200024A-BT

Vertical:

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com



| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 33.5624 | 34.02 | -2.99 | 31.03 | 40.00 | -8.97 | QP |
| 2 | | 71.5806 | 34.99 | -5.67 | 29.32 | 40.00 | -10.68 | QP |
| 3 | | 158.1123 | 27.83 | -2.00 | 25.83 | 43.50 | -17.67 | QP |
| 4 | | 364.2595 | 33.22 | -1.31 | 31.91 | 46.00 | -14.09 | QP |
| 5 | | 656.5300 | 27.42 | 4.50 | 31.92 | 46.00 | -14.08 | QP |
| 6 | * | 958.7943 | 30.49 | 7.48 | 37.97 | 46.00 | -8.03 | QP |

Note1:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss - Amplifier factor.

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) - Limits (dBuV)





Above 1GHz

GFSK

| Freq. (MHz) | Low channel: 2402MHz | | | | | | |
|----------------|----------------------|----------------------|-------|------------------|----|----------|--------|
| | Ant.Pol | Emission Level(dBuV) | | Limit 3m(dBuV/m) | | Over(dB) | |
| | H/V | PK | AV | PK | AV | PK | AV |
| 4804 | V | 60.59 | 40.78 | 74 | 54 | -13.41 | -13.22 |
| 7206 | V | 58.70 | 39.14 | 74 | 54 | -15.30 | -14.86 |
| 4804 | H | 59.48 | 40.22 | 74 | 54 | -14.52 | -13.78 |
| 7206 | H | 59.38 | 40.38 | 74 | 54 | -14.62 | -13.62 |

| Freq. (MHz) | Middle channel: 2441MHz | | | | | | |
|----------------|-------------------------|----------------------|-------|------------------|----|----------|--------|
| | Ant.Pol | Emission Level(dBuV) | | Limit 3m(dBuV/m) | | Over(dB) | |
| | H/V | PK | AV | PK | AV | PK | AV |
| 4882 | V | 59.82 | 41.05 | 74 | 54 | -14.18 | -12.95 |
| 7323 | V | 58.30 | 39.28 | 74 | 54 | -15.70 | -14.72 |
| 4882 | H | 59.92 | 40.55 | 74 | 54 | -14.08 | -13.45 |
| 7323 | H | 58.83 | 39.83 | 74 | 54 | -15.17 | -14.17 |

| Freq. (MHz) | High channel: 2480MHz | | | | | | |
|----------------|-----------------------|----------------------|-------|------------------|----|----------|--------|
| | Ant.Pol | Emission Level(dBuV) | | Limit 3m(dBuV/m) | | Over(dB) | |
| | H/V | PK | AV | PK | AV | PK | AV |
| 4960 | V | 59.84 | 39.83 | 74 | 54 | -14.16 | -14.17 |
| 7440 | V | 59.82 | 40.59 | 74 | 54 | -14.18 | -13.41 |
| 4960 | H | 59.02 | 40.46 | 74 | 54 | -14.98 | -13.54 |
| 7440 | H | 58.89 | 39.89 | 74 | 54 | -15.11 | -14.11 |

Note:

1. The emission levels of other frequencies are very lower than the limit and not show in test report.
2. Measurements were conducted from 1 GHz to the 10th harmonic of highest fundamental frequency.
3. Data of measurement shown "---" in the above table mean that the reading of emissions is attenuated more than 20 dB below the limits or the field strength is too small to be measured.
4. Measurements were conducted in all three modulation (GFSK, Pi/4 DQPSK, 8DPSK), and the worst case Mode (GFSK) was submitted only.



Report No.: WSCT-A2LA-R&E231200024A-BT

Certificate #5768.01

For Question,
Please Contact with WSCT
www.wsct-cert.com**Restricted Bands Requirements**

Test result for GFSK Mode (the worst case)

| Frequency | Reading | Correct Factor | Emission Level | Limit | Margin | Polar | Detector |
|--------------|----------|----------------|----------------|----------|--------|-------|----------|
| (MHz) | (dBuV/m) | dB/m | (dBuV/m) | (dBuV/m) | (dB) | H/V | |
| Low Channel | | | | | | | |
| 2390 | 63.75 | -8.76 | 54.99 | 74 | 19.01 | H | PK |
| 2390 | 55.25 | -8.76 | 46.49 | 54 | 7.51 | H | AV |
| 2390 | 63.15 | -8.73 | 54.42 | 74 | 19.58 | V | PK |
| 2390 | 55.73 | -8.73 | 47.00 | 54 | 7.00 | V | AV |
| High Channel | | | | | | | |
| 2483.5 | 64.40 | -8.76 | 55.64 | 74 | 18.36 | H | PK |
| 2483.5 | 53.28 | -8.76 | 44.52 | 54 | 9.48 | H | AV |
| 2483.5 | 63.77 | -8.73 | 55.04 | 74 | 18.96 | V | PK |
| 2483.5 | 57.90 | -8.73 | 49.17 | 54 | 4.83 | V | AV |

Note: Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = Attenuation factor + Cable loss

Level (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Level (dBuV) - Limits (dBuV)

*******END OF REPORT*******