

Appendix C for KSCR221200236501

Calibration Certificate

Object	Apply	No	Model	SN	Calibration Date
Dipole	☐	1	CLA150	4025	2021/04/26
	☐	2	D450V3	1103	2021/04/21
	☐	3	D750V3	1188	2022/03/29
	☒	4	D835V2	4d114	2022/03/31
	☐	5	D900V2	1d079	2022/06/07
	☒	6	D1800V2	2d170	2022/03/31
	☒	7	D1900V2	5d136	2022/06/07
	☐	8	D2000V2	1041	2022/06/06
	☐	9	D2300V2	1096	2022/03/31
	☒	10	D2450V2	817	2022/04/01
	☒	11	D2600V2	1158	2022/03/31
	☒	12	D5GHzV2	1095	2022/06/01
DAE	☒	13	DAE4	1245	2022/05/30
Probe	☒	14	EX3DV4	7346	2022/03/30



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn
 中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

1 Dipole

1.1 CLA150 - SN 4025

Calibration Laboratory of Schmid & Partner Engineering AG Zughausstrasse 43, 8004 Zurich, Switzerland		S Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service	
Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates		Accreditation No.: SCS 0108	
Client: SGS-CN (Auden)		Certificate No: CLA150-4025_Apr21	
CALIBRATION CERTIFICATE			
Object: CLA150 - SN: 4025			
Calibration procedure(s): QA CAL-15-v9 Calibration Procedure for SAR Validation Sources below 700 MHz			
Calibration date: April 26, 2021			
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.			
Calibration Equipment used (M&E critical for calibration)			
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 10476	09-Apr-21 (No. 217-03201/03202)	Apr-22
Power sensor NRP Z91	SN: 10344	09-Apr-21 (No. 217-03201)	Apr-22
Power sensor NRP Z91	SN: 10345	09-Apr-21 (No. 217-03202)	Apr-22
Reference 20 dB Attenuator	SN: C22862 (203)	09-Apr-21 (No. 217-03343)	Apr-22
Type-N mismatch combination	SN: 310952 / 00357	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe EX30N4	SN: 3877	30-Dec-20 (No. C3X3077_Dec20)	Dec-21
ENEA	SN: 684	26-Jan-20 (No. D458-EN-1_Jan20)	Jun-21
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter S44185	SN: G841203074	06-Apr-19 (in house check Jun-20)	In house check Jun-22
Power sensor E4113A	SN: MY41490807	06-Apr-19 (in house check Jun-20)	In house check Jun-22
Power sensor E4113A	SN: 000100210	06-Apr-19 (in house check Jun-20)	In house check Jun-22
RF generator HP 8440D	SN: US4040107109	04-Aug-19 (in house check Jun-20)	In house check Jun-22
Network Analyser Agilent E8363A	SN: US41000477	31-Mar-14 (in house check Oct-19)	In house check Oct-21
Calibrated by:	Name: Jeffrey Katsman	Function: Laboratory Technician	Signature:
Approved by:	Name: Kaja Polovic	Function: Technical Manager	Signature:
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Issued: April 26, 2021			
Certificate No: CLA150-4025_Apr21		Page 1 of 6	

Measurement Conditions	
DASY system configuration, as far as not given on page 1.	
DASY Version	V52.10.4
Extrapolation	Advanced Extrapolation
Phantom	ELIA Flat Phantom
EUT Positioning	Touch Position
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm
Frequency	150 MHz ± 1 MHz
Graded Ratio	1.4 (Z direction)

Head TSL parameters	
The following parameters and calculations were applied.	
Nominal Head TSL parameters	22.0 °C
Measured Head TSL parameters	(22.0 ± 0.2) °C
Head TSL temperature change during test	< 0.5 °C
Permittivity	52.3
Conductivity	0.75 mho/m
Permittivity	51.1 ± 6 %
Conductivity	0.75 mho/m ± 6 %

SAR result with Head TSL	
SAR averaged over 1 cm³ (1 g) of Head TSL	Condition
SAR measured	1 W input power
SAR for nominal Head TSL parameters	normalized to 1W
SAR measured	3.90 W/kg
SAR for nominal Head TSL parameters	3.88 W/kg ± 13.4 % (k=2)
SAR averaged over 10 cm³ (10 g) of Head TSL	condition
SAR measured	1 W input power
SAR for nominal Head TSL parameters	normalized to 1W
SAR measured	2.60 W/kg
SAR for nominal Head TSL parameters	2.59 W/kg ± 18.0 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)	
Antenna Parameters with Head TSL	
Impedance, transformed to feed point	47.9 Ω ± 1.5 Ω
Return Loss	-31.4 dB
Additional EUT Data	
Manufactured by	SPEAG

Certificate No: CLA150-4025_Apr21	
Page 2 of 6	

Certificate No: CLA150-4025_Apr21	
Page 3 of 6	

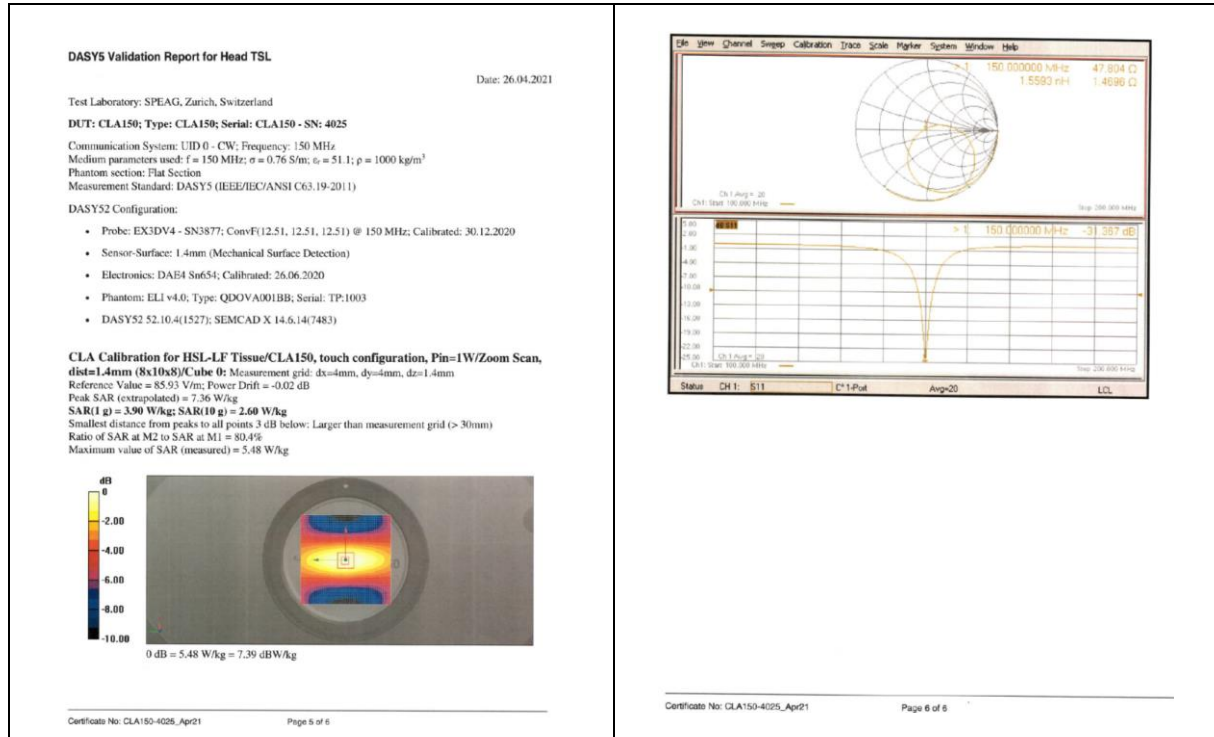
Certificate No: CLA150-4025_Apr21	
Page 4 of 6	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com



1.2 D450V3 - SN 1103

Calibration Laboratory of Schmid & Partner Engineering AG
Zweigmassstrasse 43, 8604 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **SGS-CN (Aude)** Certificate No: **D450V3-1103_Apr21**

CALIBRATION CERTIFICATE

Object: **D450V3 - SN: 1103**

Calibration procedure(s): **QA CAL-15_v9**
Calibration Procedure for SAR Validation Sources below 700 MHz

Calibration date: **April 21, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (20 ± 2) °C and humidity < 70%.

Calibration Equipment used (MTE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	09-Apr-21 (No. 217-03201/03202)	Apr-22
Power sensor MHP-291	SN: 102344	09-Apr-21 (No. 217-03201)	Apr-22
Power sensor MHP-291	SN: 102345	09-Apr-21 (No. 217-03202)	Apr-22
Reference 20 dB Attenuator	SN: CG282 (200)	09-Apr-21 (No. 217-03345)	Apr-22
Type-N mismatch combination	SN: 310827 / 06327	09-Apr-21 (No. 217-03344)	Apr-22
Reference Probe E30309	SN: 3877	30-Dec-20 (No. E30-3877, Dec20)	Dec-21
DAEA	SN: 654	26-Jun-20 (No. D454-654, Jun20)	Jun-21

Secondary Standards

ID #	Cal Date (in house)	Scheduled Check	
SN: GB41200274	09-Apr-21 (in house check Jun-20)	In house check: Jun-22	
SN: MY41496027	09-Apr-21 (in house check Jun-20)	In house check: Jun-22	
Power sensor E4412A	SN: 00010010	09-Apr-21 (in house check Jun-20)	In house check: Jun-22
RF generator HP 8548C	SN: U53460.01700	09-Aug-19 (in house check Jun-20)	In house check: Jun-22
Network Analyzer Agilent E8358A	SN: U841080477	31-Mar-14 (in house check Oct-20)	In house check: Oct-21

Calibrated by: **Christoph Leubner** Function: **Laboratory Technician**

Approved by: **Kristin Polovic** Technical Manager

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D450V3-1103_Apr21 Page 1 of 6

Calibration Laboratory of Schmid & Partner Engineering AG
Zweigmassstrasse 43, 8604 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0106**

Glossary:

TSL: Issue simulating liquid sensitivity in TSL / NORM x,y,z

ConvF: not applicable or not measured

N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D450V3-1103_Apr21 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 57355888 f(86-512) 57370818 www.sgsgroup.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V62.10.4
Extrapolation	Advanced Extrapolation	
Phantom	ELJ4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.57 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	43.1 ± 6 %	0.07 mho/m ± 8 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.56 W/kg ± 18.1 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	0.757 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg ± 17.6 % (k=2)

Certificate No: D450V3-1103_Apr21

Page 5 of 6

DASY5 Validation Report for Head TSL

Test Laboratory: SPEAG, Zurich, Switzerland

Date: 21.04.2021

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1103

Communication System: UTD 0 - CW; Frequency: 450 MHz

Medium parameters used: f = 450 MHz; α = 0.87 S/m; ε = 43.1; ρ = 1000 kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(10.64, 10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 26.06.2020
- Phantom: ELJ v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue(d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.18 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.767 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 1.53 W/kg

Certificate No: D450V3-1103_Apr21

Appendix (Additional assessments outside the scope of SCS 0106)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	57.1 Ω - 2.8 jΩ
Return Loss	-23.0 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.346 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard overnight coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

Certificate No: D450V3-1103_Apr21

Page 4 of 6

Certificate No: D450V3-1103_Apr21

Page 4 of 6

1.3 D750V3 - SN 1188

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504 E-mail: cti@chinaetl.com http://www.chinaetl.cn		中国认可 国家认证 校准 CAICT CNAS L0570	
Client	SGS-CN	Certificate No.	Z22-60103
CALIBRATION CERTIFICATE			
Object	D750V3 - SN: 1188		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	March 28, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	104277	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Power sensor NRP88	104291	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Reference Probe EX30V4	SN 7307	26-May-21(SPEAG.No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG.No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator S4438C	MY48071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00409)	Jan-23
Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyan	SAR Project Leader	
Issued: April 3, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60103	Page 1 of 6		

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaetl.com http://www.chinaetl.cn		中国认可 国家认证 校准 CAICT CNAS L0570	
Measurement Conditions DASY system configuration, as far as not given on page 1:			
DASY Version	DASY52	VS2.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	15 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	750 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.4 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	2.07 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	8.27 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	1.37 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	5.48 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60103	Page 3 of 6		

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaetl.com http://www.chinaetl.cn		中国认可 国家认证 校准 CAICT CNAS L0570	
Glossary:			
TSL	tissue simulating liquid		
ConvF	sensitivity in TSL / NORMx.y.z		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020			
b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
c) DASY4/5 System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.			
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.			
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• MY for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-60103	Page 2 of 6		

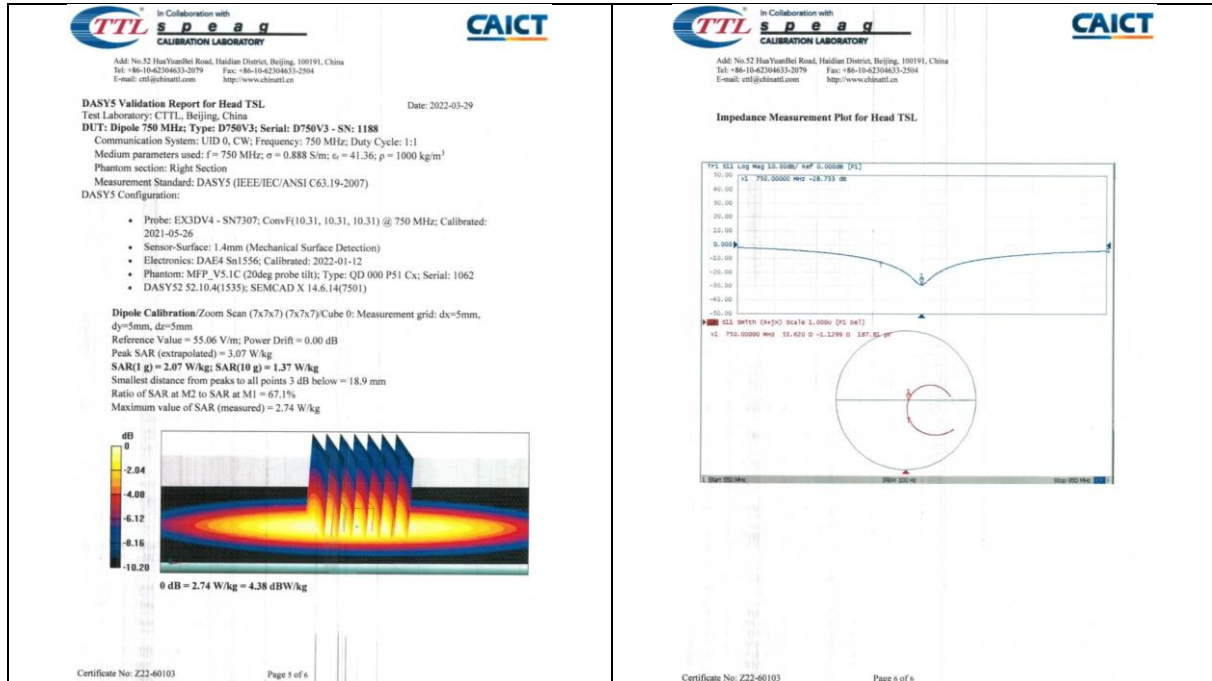
TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaetl.com http://www.chinaetl.cn		中国认可 国家认证 校准 CAICT CNAS L0570	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	53.60- 1.13jΩ		
Return Loss	-28.7dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	0.947 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60103	Page 4 of 6		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com



1.4 D835V2 - SN 4d114

TTL Speaq
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504
E-mail: cti@china.ttl.com http://www.chinatitl.cn

CAICT

Client: **SGS-CN** Certificate No: **Z22-60104**

CALIBRATION CERTIFICATE

Object: **D835V2 - SN: 4d114**

Calibration Procedure(s): **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **March 31, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRPBS	104261	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG, No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG, No.Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00409)	Jan-23

Calibrated by: **Zhao Jing** SAR Test Engineer

Reviewed by: **Lin Hao** SAR Test Engineer

Approved by: **Qi Diqian** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60104 Page 1 of 6

TTL Speaq
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504
E-mail: cti@china.ttl.com http://www.chinatitl.cn

CAICT

Glossary:

TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORMx.y.z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 665864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60104 Page 2 of 6

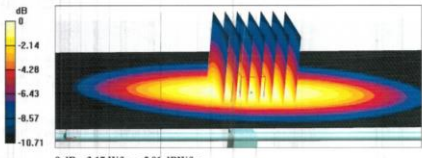


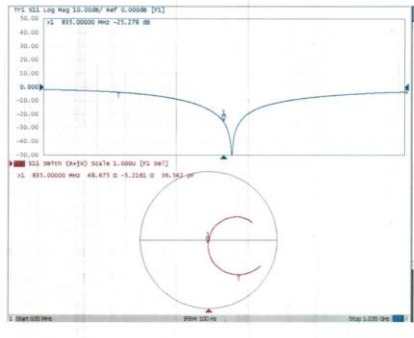
Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Measurement Conditions DASY system configuration, as far as not given on page 1.			
DASY Version	DASY52	VS2 10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	15 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	835 MHz $\pm$ 1 MHz		
Head TSL parameters The following parameters and calculations were applied.			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.0 $\pm$ 5 %	0.91 mho/m $\pm$ 5 %
Head TSL temperature change during test	<1.0 °C	---	---
SAR result with Head TSL			
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	2.37 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	9.40 W/kg $\pm$ 18.8 % (k=2)	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	1.54 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	6.12 W/kg $\pm$ 18.7 % (k=2)	
Certificate No: Z22-60104 Page 3 of 6			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	48.70 - j22jQ		
Return Loss	-25.3dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.307 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60104 Page 4 of 6			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China Date: 2022-03-31			
DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 40114 Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium parameters used: f = 835 MHz; σ = 0.907 S/m; ϵ_r = 40.98; ρ = 1000 kg/m ³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration:			
- Probe: EX3DV4 - SN7307; ConvF(10.13, 10.13, 10.13) @ 835 MHz; Calibrated: 2021-05-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn1556; Calibrated: 2022-01-12 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)			
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 57.88 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 3.56 W/kg SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg Smallest distance from peaks to all points 3 dB below = 15.8 mm Ratio of SAR at M2 to SAR at M1 = 66.2% Maximum value of SAR (measured) = 3.17 W/kg			
			
Certificate No: Z22-60104 Page 5 of 6			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Impedance Measurement Plot for Head TSL			
			
Certificate No: Z22-60104 Page 6 of 6			

1.5 D900V2 - SN 1d079

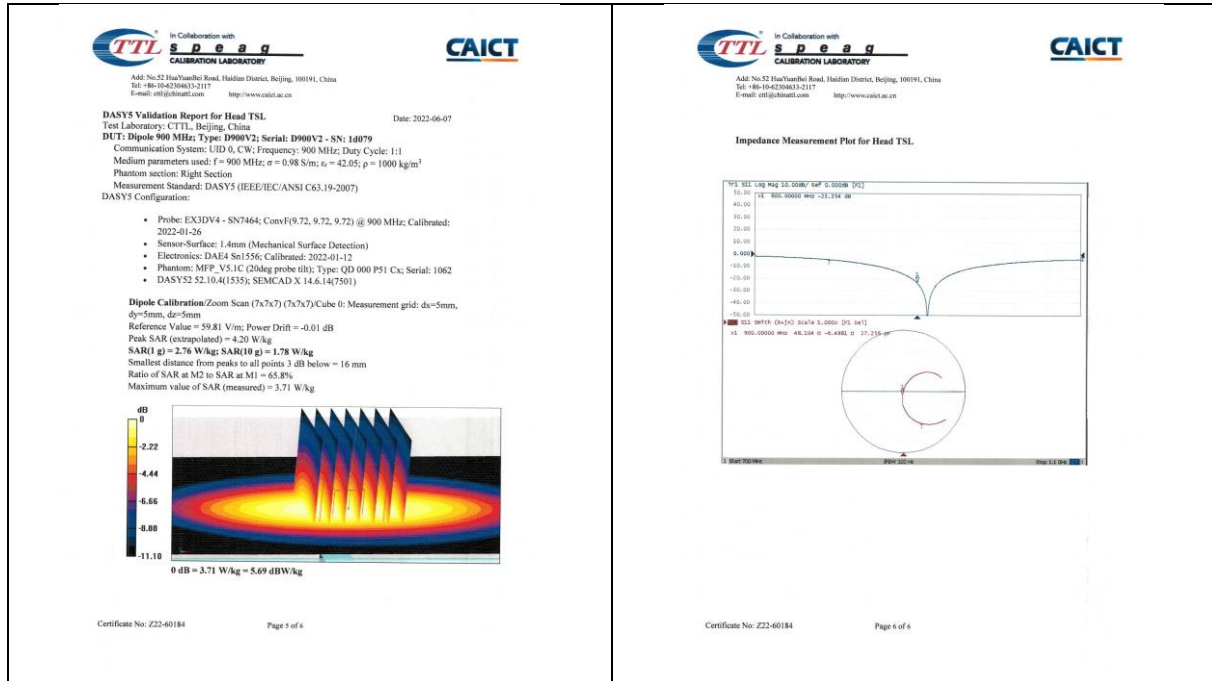
In Collaboration with TTL Speag CALIBRATION LABORATORY		In Collaboration with CAICT CALIBRATION LAB																					
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@speag.com http://www.speag.com		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn																					
Client: SGS-CN		Certificate No: Z22-60184																					
CALIBRATION CERTIFICATE																							
Object: D900V2 - SN: 1d079																							
Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits																							
Calibration date: June 7, 2022																							
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																							
All calibrations have been conducted in the closed laboratory facility: environment temperature (23±1)°C and humidity <70%.																							
Calibration Equipment used (MATE critical for calibration)																							
<table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>106277</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor NRP8S</td><td>104291</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN 7464</td><td>28-Jan-22 (SPEAG No EX3-7464_Jan22)</td><td>Jan-23</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22 (CTTL-SPEAG No Z22-60007)</td><td>Jan-23</td></tr></tbody></table>				Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22	Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22	Reference Probe EX3DV4	SN 7464	28-Jan-22 (SPEAG No EX3-7464_Jan22)	Jan-23	DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																				
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22																				
Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22																				
Reference Probe EX3DV4	SN 7464	28-Jan-22 (SPEAG No EX3-7464_Jan22)	Jan-23																				
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23																				
<table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Signal Generator E4438C</td><td>MY48071430</td><td>13-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY48110673</td><td>14-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr></tbody></table>				Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00409)	Jan-23								
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																				
Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23																				
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00409)	Jan-23																				
Calibrated by: Zhao Jing SAR Test Engineer																							
Reviewed by: Lin Hao SAR Test Engineer																							
Approved by: Qi Danyuan SAR Project Leader																							
Issued: June 13, 2022																							
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																							
Certificate No: Z22-60184		Page 1 of 6																					

In Collaboration with TTL Speag CALIBRATION LABORATORY		In Collaboration with CAICT CALIBRATION LAB																			
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@speag.com http://www.speag.com		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn																			
Measurement Conditions DASY system configuration, as far as not given on page 1.																					
<table border="1"><thead><tr><th>DASY Version</th><th>DASY2</th><th>52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dk, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>900 MHz ± 1 MHz</td><td></td></tr></tbody></table>				DASY Version	DASY2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	dk, dy, dz = 5 mm		Frequency	900 MHz ± 1 MHz	
DASY Version	DASY2	52.10.4																			
Extrapolation	Advanced Extrapolation																				
Phantom	Triple Flat Phantom 5.1C																				
Distance Dipole Center - TSL	15 mm	with Spacer																			
Zoom Scan Resolution	dk, dy, dz = 5 mm																				
Frequency	900 MHz ± 1 MHz																				
Head TSL parameters The following parameters and calculations were applied.																					
<table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>41.5</td><td>0.97 nholm</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>42.1 ± 6 %</td><td>0.98 nholm ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>+1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>					Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	41.5	0.97 nholm	Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 nholm ± 6 %	Head TSL temperature change during test	+1.0 °C	---	---		
	Temperature	Permittivity	Conductivity																		
Nominal Head TSL parameters	22.0 °C	41.5	0.97 nholm																		
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 nholm ± 6 %																		
Head TSL temperature change during test	+1.0 °C	---	---																		
SAR result with Head TSL																					
<table border="1"><thead><tr><th>SAR averaged over 1 cm³ (1 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>2.70 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>11.0 W/kg ± 18.8 % (k=2)</td></tr></tbody></table>				SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	2.70 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)									
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition																				
SAR measured	250 mW input power	2.70 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)																			
<table border="1"><thead><tr><th>SAR averaged over 10 cm³ (10 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>1.73 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>7.09 W/kg ± 18.7 % (k=2)</td></tr></tbody></table>				SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	1.73 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)									
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition																				
SAR measured	250 mW input power	1.73 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)																			

In Collaboration with TTL Speag CALIBRATION LABORATORY		In Collaboration with CAICT CALIBRATION LAB	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@speag.com http://www.speag.com		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn	
Glossary: TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORMx,y,z N/A: not applicable or not measured			
Calibration is Performed According to the Following Standards: a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz" c) DASY4/5 System Handbook			
Additional Documentation: c) DASY4/5 System Handbook			
Methods Applied and Interpretation of Parameters: • Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. • Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis. • Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • SAR measured: SAR measured at the stated antenna input power. • SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector. • SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-60184		Page 2 of 6	

In Collaboration with TTL Speag CALIBRATION LABORATORY		In Collaboration with CAICT CALIBRATION LAB																			
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@speag.com http://www.speag.com		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn																			
Measurement Conditions DASY system configuration, as far as not given on page 1.																					
<table border="1"><thead><tr><th>DASY Version</th><th>DASY2</th><th>52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dk, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>900 MHz ± 1 MHz</td><td></td></tr></tbody></table>				DASY Version	DASY2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	dk, dy, dz = 5 mm		Frequency	900 MHz ± 1 MHz	
DASY Version	DASY2	52.10.4																			
Extrapolation	Advanced Extrapolation																				
Phantom	Triple Flat Phantom 5.1C																				
Distance Dipole Center - TSL	15 mm	with Spacer																			
Zoom Scan Resolution	dk, dy, dz = 5 mm																				
Frequency	900 MHz ± 1 MHz																				
Head TSL parameters The following parameters and calculations were applied.																					
<table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>41.5</td><td>0.97 nholm</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>42.1 ± 6 %</td><td>0.98 nholm ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>+1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>					Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	41.5	0.97 nholm	Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 nholm ± 6 %	Head TSL temperature change during test	+1.0 °C	---	---		
	Temperature	Permittivity	Conductivity																		
Nominal Head TSL parameters	22.0 °C	41.5	0.97 nholm																		
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 nholm ± 6 %																		
Head TSL temperature change during test	+1.0 °C	---	---																		
SAR result with Head TSL																					
<table border="1"><thead><tr><th>SAR averaged over 1 cm³ (1 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>2.70 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>11.0 W/kg ± 18.8 % (k=2)</td></tr></tbody></table>				SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	2.70 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)									
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition																				
SAR measured	250 mW input power	2.70 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)																			
<table border="1"><thead><tr><th>SAR averaged over 10 cm³ (10 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>1.73 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>7.09 W/kg ± 18.7 % (k=2)</td></tr></tbody></table>				SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	1.73 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)									
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition																				
SAR measured	250 mW input power	1.73 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)																			

In Collaboration with TTL Speag CALIBRATION LABORATORY		In Collaboration with CAICT CALIBRATION LAB					
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@speag.com http://www.speag.com		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6259633-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn					
Appendix (Additional assessments outside the scope of CNAS L0570)							
Antenna Parameters with Head TSL							
<table border="1"><thead><tr><th>Impedance, transformed to feed point</th><th>48.10 - 8.49jΩ</th></tr><tr><th>Return Loss</th><th>-23.3 dB</th></tr></thead></table>				Impedance, transformed to feed point	48.10 - 8.49jΩ	Return Loss	-23.3 dB
Impedance, transformed to feed point	48.10 - 8.49jΩ						
Return Loss	-23.3 dB						
General Antenna Parameters and Design							
<table border="1"><thead><tr><th>Electrical Delay (one direction)</th><th>1.312 ns</th></tr></thead></table>				Electrical Delay (one direction)	1.312 ns		
Electrical Delay (one direction)	1.312 ns						
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.							
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.							
Additional EUT Data							
<table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead></table>				Manufactured by	SPEAG		
Manufactured by	SPEAG						
Certificate No: Z22-60184		Page 4 of 6					



1.6 D1800V2 - SN 2d170

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42306033-2117 Fax: +86-10-42306033-2118
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60105**

CALIBRATION CERTIFICATE

Object: **D1800V2 - SN: 2d170**

Calibration Procedure(s): **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **March 31, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110573	14-Jan-22 (CTTL No.J22X00409)	Jan-23

Calibrated by: **Zhao Jing** SAR Test Engineer

Reviewed by: **Lin Hao** SAR Test Engineer

Approved by: **Qi Diqian** SAR Project Leader

Issued April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60105 Page 1 of 6

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42306033-2079 Fax: +86-10-42306033-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Glossary:

TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORMx,y,z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

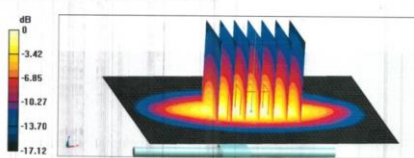
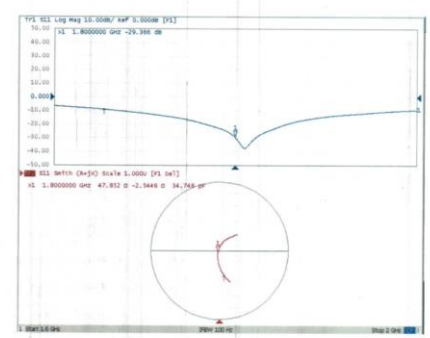
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60105 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

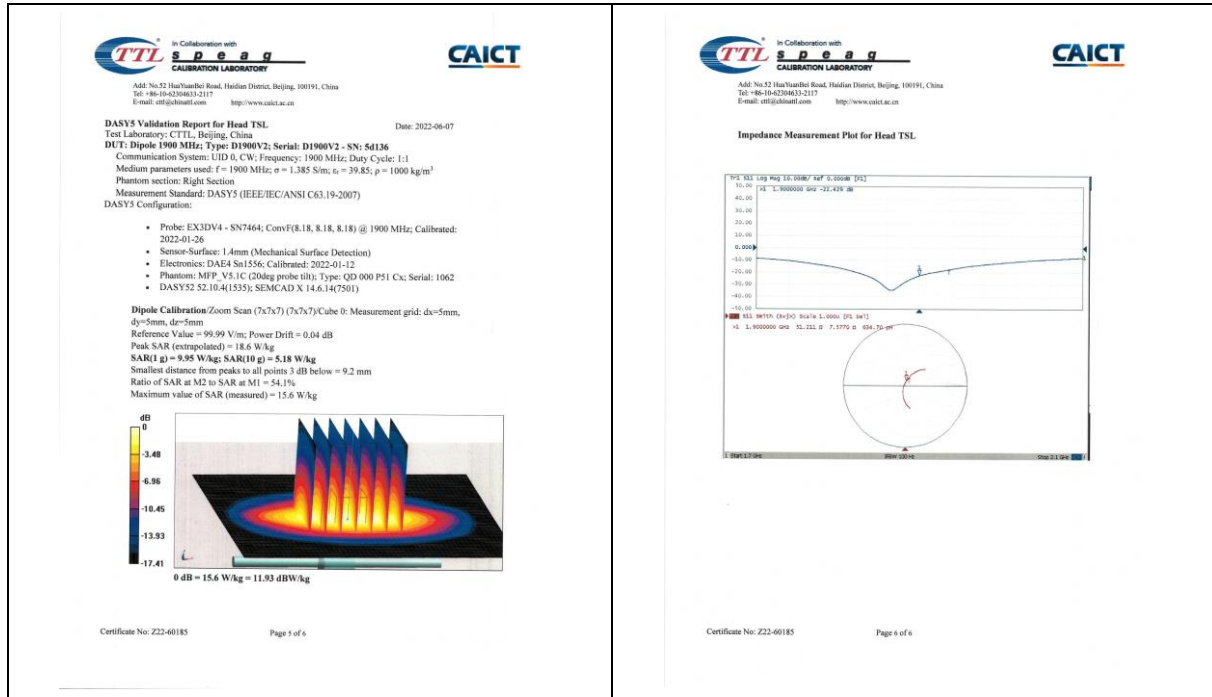
TTL Speaq Calibration Laboratory		CAICT																			
Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinatest.com http://www.chinatest.cn																					
Measurement Conditions DASY system configuration, as far as not given on page 1. <table border="1"> <tr> <td>DASY Version</td> <td>DASY52</td> <td>52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>1800 MHz ± 1 MHz</td> <td></td> </tr> </table>				DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	1800 MHz ± 1 MHz	
DASY Version	DASY52	52.10.4																			
Extrapolation	Advanced Extrapolation																				
Phantom	Triple Flat Phantom 5.1C																				
Distance Dipole Center - TSL	10 mm	with Spacer																			
Zoom Scan Resolution	dx, dy, dz = 5 mm																				
Frequency	1800 MHz ± 1 MHz																				
Head TSL parameters The following parameters and calculations were applied. <table border="1"> <tr> <td></td> <td>Temperature</td> <td>Permittivity</td> <td>Conductivity</td> </tr> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>40.0</td> <td>1.40 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>40.8 ± 6 %</td> <td>1.41 mho/m ± 6 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td><1.0 °C</td> <td>---</td> <td>---</td> </tr> </table>					Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	40.8 ± 6 %	1.41 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	---	---		
	Temperature	Permittivity	Conductivity																		
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m																		
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.8 ± 6 %	1.41 mho/m ± 6 %																		
Head TSL temperature change during test	<1.0 °C	---	---																		
SAR result with Head TSL <table border="1"> <tr> <td>SAR averaged over 1 cm³ (1 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>9.73 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>38.9 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm³ (10 g) of Head TSL</td> <td>Condition</td> <td></td> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>5.11 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>20.4 W/kg ± 18.7 % (k=2)</td> </tr> </table>				SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	9.73 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	38.9 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	5.11 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	20.4 W/kg ± 18.7 % (k=2)
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition																				
SAR measured	250 mW input power	9.73 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	38.9 W/kg ± 18.8 % (k=2)																			
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition																				
SAR measured	250 mW input power	5.11 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	20.4 W/kg ± 18.7 % (k=2)																			
Certificate No: Z22-60105 Page 3 of 6																					
TTL Speaq Calibration Laboratory		CAICT																			
Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinatest.com http://www.chinatest.cn																					
DASY5 Validation Report for Head TSL Test Laboratory: TTL, Beijing, China Date: 2022-03-31 DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 2d170 Communication System: UID 0, CW; Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1800 MHz; σ = 1.411 S/m; ε = 40.62; ρ = 1000 kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7307; ConvF(8.34, 8.34, 8.34) @ 1800 MHz; Calibrated: 2021-05-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn1556; Calibrated: 2022-01-12 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501) Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 98.14 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 18.2 W/kg SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.11 W/kg Smallest distance from peaks to all points 3 dB below = 10 mm Ratio of SAR at M2 to SAR at M1 = 54% Maximum value of SAR (measured) = 15.2 W/kg  0 dB = 15.2 W/kg = 11.82 dBW/kg																					
Certificate No: Z22-60105 Page 3 of 6																					
TTL Speaq Calibration Laboratory		CAICT																			
Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinatest.com http://www.chinatest.cn																					
Appendix (Additional assessments outside the scope of CNAS L0570) Antenna Parameters with Head TSL <table border="1"> <tr> <td>Impedance, transformed to feed point</td> <td>47.90 - 2.54jΩ</td> </tr> <tr> <td>Return Loss</td> <td>-29.4dB</td> </tr> </table> General Antenna Parameters and Design <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>1.116 ns</td> </tr> </table> After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. Additional EUT Data <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table>				Impedance, transformed to feed point	47.90 - 2.54jΩ	Return Loss	-29.4dB	Electrical Delay (one direction)	1.116 ns	Manufactured by	SPEAG										
Impedance, transformed to feed point	47.90 - 2.54jΩ																				
Return Loss	-29.4dB																				
Electrical Delay (one direction)	1.116 ns																				
Manufactured by	SPEAG																				
Certificate No: Z22-60105 Page 4 of 6																					
TTL Speaq Calibration Laboratory		CAICT																			
Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinatest.com http://www.chinatest.cn																					
Impedance Measurement Plot for Head TSL 																					
Certificate No: Z22-60105 Page 6 of 6																					

1.7 D1900V2 - SN 5d136

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn		Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn	
Client: SGS-CN		Certificate No: Z22-60185	
CALIBRATION CERTIFICATE			
Object	D1900V2 - SN: 5d136		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	June 7, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (23±1)°C and humidity <70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Power sensor NRP6S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Reference Probe EXSDV4	SN 7464	28-Jan-22 (SPEAG No EX3-7464_Jan22)	Jan-23
DAE4	SN 1656	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23
Network Analyzer E5071C	MY48110073	14-Jan-22 (CTTL No.J22X00409)	Jan-23
Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyan	SAR Project Leader	
Issued: June 13, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60185		Page 1 of 6	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn		Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn	
Measurement Conditions DASY system configuration, as far as not given on page 1.			
DASY Version	DAEY52	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	1900 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	40.0	1.40 nH/m
Measured Head TSL parameters	(22.0 ± 0.3) °C	39.9 ± 6 %	1.39 nH/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	9.65 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	5.18 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60185		Page 3 of 6	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn		Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42204633-2117 E-mail: cti@china.com.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	51.02 ± 7.58Ω		
Return Loss	-22.4dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.109 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60185		Page 4 of 6	



1.8 D2000V2 - SN 1041

TTLSPEAG Calibration Laboratory
CAICT

Address: No.52 Huaiyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62586317
E-mail: cti@ttspeag.com

Client: SGS-CN Certificate No: Z22-60186

CALIBRATION CERTIFICATE

Object: D2000V2 - SN: 1041

Calibration Procedure(s): FF-Z11-003-01
Calibration Procedures for dipole validation kits

Calibration date: June 8, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (B). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRPZ	106277	24-Sep-21 (CCTL No. J21X08328)	Sep-22
Power sensor NRPBS	104291	24-Sep-21 (CCTL No. J21X08328)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22 (SPEAG No. EX3-7464-Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22 (CCTL-SPEAG No. Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CCTL No. J22X00409)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CCTL No. J22X00409)	Jan-23

Calibrated by: Zhao Jing SAR Test Engineer

Reviewed by: Lin Hao SAR Test Engineer

Approved by: Qi Danyuan SAR Project Leader

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60186 Page 1 of 6

TTLSPEAG Calibration Laboratory
CAICT

Address: No.52 Huaiyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62586317
E-mail: cti@ttspeag.com

Glossary:

TSL: Issue simulating liquid

ConF: sensitivity in TSL, NORMx.y.z

N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020

b) KDS 865964, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

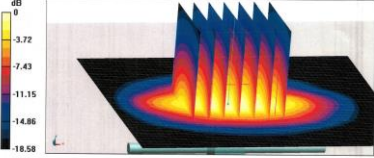
- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

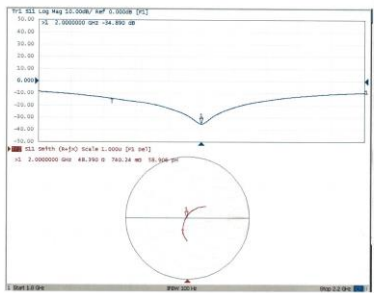
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60186 Page 2 of 6

In Collaboration with TTL CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306833-2117 E-mail: cti@china.ttl.com http://www.caict.ac.cn			
Measurement Conditions DASY system configuration, as far as not given on page 1.			
DASY Version	DASY52	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	2000 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	1.39 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	10.4 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	41.8 W/kg ± 16.8 % (n=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	5.30 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg ± 18.7 % (n=2)	
Certificate No: Z22-60186 Page 3 of 6			

In Collaboration with TTL CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306833-2117 E-mail: cti@china.ttl.com http://www.caict.ac.cn			
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	48.4Ω ± 0.74Ω		
Return Loss	-34.9dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.088 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60186 Page 4 of 6			

In Collaboration with TTL CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306833-2117 E-mail: cti@china.ttl.com http://www.caict.ac.cn			
DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China Date: 2022-06-06 DUT: Dipole 2000 MHz; Type: D2000V2; Serial: D2000V2 - SN: 1041 Communication System: UTD 0, CW; Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2000 MHz; σ = 1.392 S/m; ε _r = 40.21; ρ = 1000 kg/m ³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7464; ConvF(8.2, 8.2, 8.2) @ 2000 MHz; Calibrated: 2022-01-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DA64 Sn1556; Calibrated: 2022-01-12 - Phantom: MPP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52: 52.10.4(1555); SEMCAD X 14.6.14(7501)			
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 103.4 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 19.6 W/kg SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.3 W/kg Smallest distance from peaks to all points 3 dB below = 9.1 mm Ratio of SAR at M2 to SAR at M1 = 53.6% Maximum value of SAR (measured) = 16.3 W/kg			
			
Certificate No: Z22-60186 Page 5 of 6			

In Collaboration with TTL CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62306833-2117 E-mail: cti@china.ttl.com http://www.caict.ac.cn			
Impedance Measurement Plot for Head TSL			
			
Certificate No: Z22-60186 Page 6 of 6			

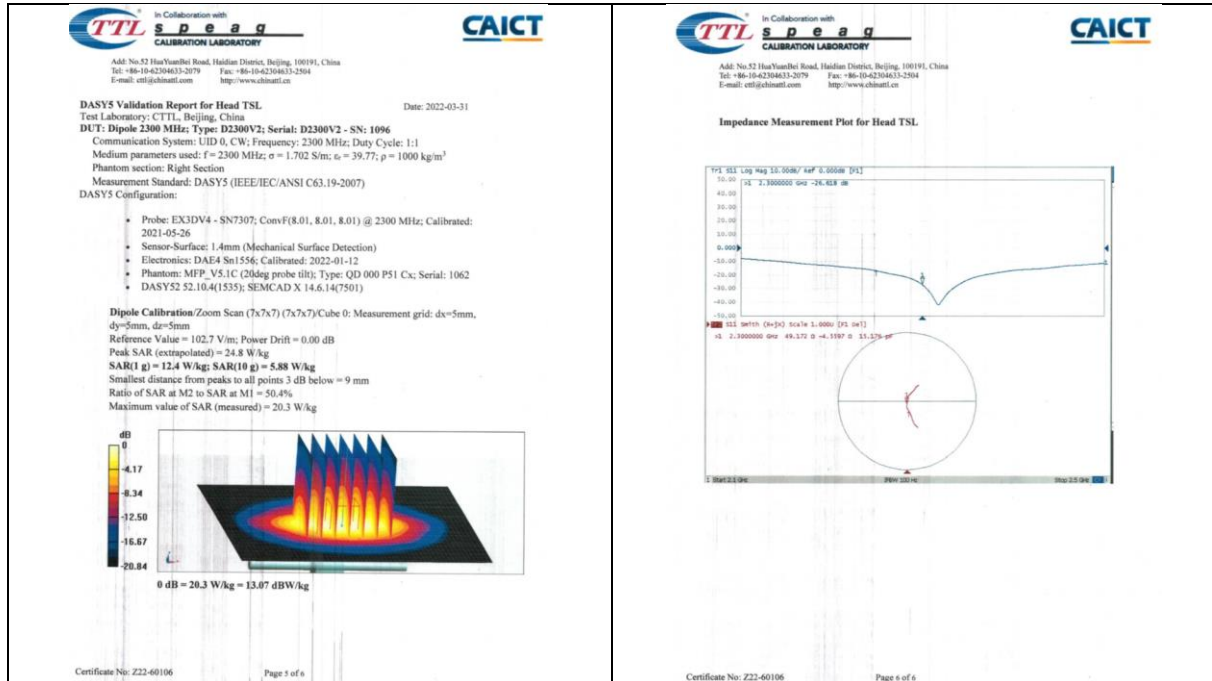
1.9 D2300V2 - SN 1096

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191 Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Client: SGS-CN		Certificate No: Z22-60106	
CALIBRATION CERTIFICATE			
Object	D2300V2 - SN: 1096		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	March 31, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given in the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	108277	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Reference Probe EX30V4	SN 7307	26-May-21 (SPEAG No.EK3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00406)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23
Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyan	SAR Project Leader	
Issued: April 6, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60106		Page 1 of 6	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Measurement Conditions DASY system configuration, as far as not given on page 1:			
DASY Version	DASY2	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	2300 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 6 %	1.70 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	12.4 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	49.2 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	5.88 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60106		Page 3 of 6	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	49.20 - 4.56jΩ		
Return Loss	-26.6dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.083 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60106		Page 4 of 6	





1.10 D2450V2 - SN 817

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60107**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 817**

Calibration Procedure(s): **FF-Z11-003-01**
Calibration Procedures for dipole validation kits

Calibration date: **April 1, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter: NRP2	106277	24-Sep-21 (CTTL No.J21X08320)	Sep-22
Power sensor: NRP8S	104291	24-Sep-21 (CTTL No.J21X08320)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21(SPEAG.No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG.No.Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00406)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23

Calibrated by: **Zhao Jing** SAR Test Engineer
Reviewed by: **Lin Hao** SAR Test Engineer
Approved by: **Qi Dianyan** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60107 Page 1 of 6

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Glossary:
TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORMx.y.z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 656664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:
c) DASY4/5 System Handbook

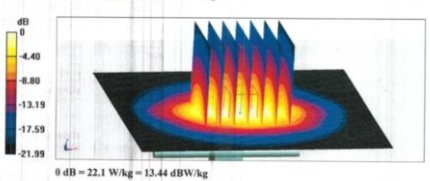
Methods Applied and Interpretation of Parameters:

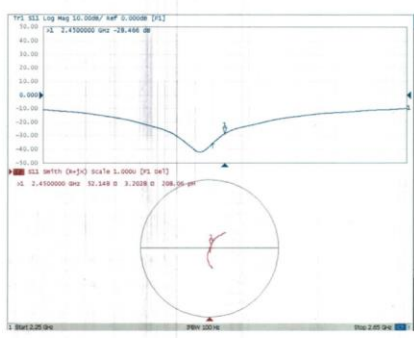
- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60107 Page 2 of 6

TTL Speaq CALIBRATION LABORATORY		CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn		
Measurement Conditions DASY system configuration, as far as not given on page 1.		
DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	
Head TSL parameters The following parameters and calculations were applied.		
	Temperature	Permittivity Conductivity
Nominal Head TSL parameters	22.0 °C	39.2 1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 % 1.79 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---
SAR result with Head TSL		
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	53.0 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)
Appendix (Additional assessments outside the scope of CNAS L0570)		
Antenna Parameters with Head TSL		
Impedance, transformed to feed point	52.10 ± 3.20jΩ	
Return Loss	~28.5dB	
General Antenna Parameters and Design		
Electrical Delay (one direction)	1.066 ns	
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.		
The dipole is made of standard serringrid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.		
Additional EUT Data		
Manufactured by	SPEAG	
Certificate No: Z22-60107 Page 3 of 6		

TTL Speaq CALIBRATION LABORATORY		CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn		
DASY5 Validation Report for Head TSL Date: 2022-04-01		
Test Laboratory: CTTL, Beijing, China DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817 Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz; σ = 1.79 S/m; ε _r = 39.52; ρ = 1000 kg/m ³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7307; ConvF(7.75, 7.75, 7.75) @ 2450 MHz; Calibrated: 2021-05-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DA154 SN1556; Calibrated: 2022-01-12 - Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)		
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.6 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 27.0 W/kg SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = -49.2% Maximum value of SAR (measured) = 22.1 W/kg		
		
Certificate No: Z22-60107 Page 1 of 6		

TTL Speaq CALIBRATION LABORATORY		CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn		
Impedance Measurement Plot for Head TSL		
		
Certificate No: Z22-60107 Page 6 of 6		

1.11 D2600V2 - SN 1158

TTL S p e a g CALIBRATION LABORATORY		CAICT																																	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn																																	
Client: SGS-CN		Certificate No: Z22-40108																																	
CALIBRATION CERTIFICATE																																			
Object: D2600V2 - SN: 1158																																			
Calibration Procedure(s): FF-Z11-003-01 Calibration Procedures for dipole validation kits																																			
Calibration date: March 31, 2022																																			
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																																			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.																																			
Calibration Equipment used (M&TE critical for calibration)																																			
<table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter: NRP2</td><td>106277</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor: NRPBS</td><td>104291</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX3DVA</td><td>SN 7307</td><td>26-May-21 (SPEAG No EX3-7307_May21)</td><td>May-22</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22 (CTTL-SPEAG No Z22-60007)</td><td>Jan-23</td></tr><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr><tr><td>Signal Generator E4438C</td><td>MY49071430</td><td>13-Jan-22 (CTTL No.J22X00406)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY48110673</td><td>14-Jan-22 (CTTL No.J22X00406)</td><td>Jan-23</td></tr></tbody></table>				Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Power Meter: NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22	Power sensor: NRPBS	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22	Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No EX3-7307_May21)	May-22	DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23	Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00406)	Jan-23	Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																																
Power Meter: NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22																																
Power sensor: NRPBS	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22																																
Reference Probe EX3DVA	SN 7307	26-May-21 (SPEAG No EX3-7307_May21)	May-22																																
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23																																
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																																
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00406)	Jan-23																																
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23																																
Calibrated by: Zhao Jing SAR Test Engineer																																			
Reviewed by: Lin Hao SAR Test Engineer																																			
Approved by: Qi Dianyuan SAR Project Leader																																			
Issued: April 6, 2022																																			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																																			
Certificate No: Z22-40108		Page 1 of 6																																	

TTL S p e a g CALIBRATION LABORATORY		CAICT																						
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn																						
Measurement Conditions DASY system configuration, as far as not given on page 1:																								
<table border="1"><thead><tr><th>DASY Version</th><th>DASYV2</th><th>52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>10 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>2600 MHz ± 1 MHz</td><td></td></tr></tbody></table>				DASY Version	DASYV2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2600 MHz ± 1 MHz				
DASY Version	DASYV2	52.10.4																						
Extrapolation	Advanced Extrapolation																							
Phantom	Triple Flat Phantom 5.1C																							
Distance Dipole Center - TSL	10 mm	with Spacer																						
Zoom Scan Resolution	dx, dy, dz = 5 mm																							
Frequency	2600 MHz ± 1 MHz																							
Head TSL parameters The following parameters and calculations were applied:																								
<table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>39.0</td><td>1.96 mho/m</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>36.7 ± 6 %</td><td>1.96 mho/m ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td><1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>					Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	36.7 ± 6 %	1.96 mho/m ± 6 %	Head TSL temperature change during test	<1.0 °C	---	---					
	Temperature	Permittivity	Conductivity																					
Nominal Head TSL parameters	22.0 °C	39.0	1.96 mho/m																					
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.7 ± 6 %	1.96 mho/m ± 6 %																					
Head TSL temperature change during test	<1.0 °C	---	---																					
SAR result with Head TSL																								
<table border="1"><thead><tr><th></th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR averaged over 1 cm² (1 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>13.7 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>54.8 W/kg ± 18.8 % (k=2)</td></tr><tr><td>SAR averaged over 10 cm² (10 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>6.12 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>24.6 W/kg ± 18.7 % (k=2)</td></tr></tbody></table>					Condition		SAR averaged over 1 cm ² (1 g) of Head TSL			SAR measured	250 mW input power	13.7 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	54.8 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm ² (10 g) of Head TSL			SAR measured	250 mW input power	6.12 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.6 W/kg ± 18.7 % (k=2)
	Condition																							
SAR averaged over 1 cm ² (1 g) of Head TSL																								
SAR measured	250 mW input power	13.7 W/kg																						
SAR for nominal Head TSL parameters	normalized to 1W	54.8 W/kg ± 18.8 % (k=2)																						
SAR averaged over 10 cm ² (10 g) of Head TSL																								
SAR measured	250 mW input power	6.12 W/kg																						
SAR for nominal Head TSL parameters	normalized to 1W	24.6 W/kg ± 18.7 % (k=2)																						
Certificate No: Z22-40108		Page 3 of 6																						

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn	
Glossary: TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORMx.y.z N/A: not applicable or not measured			
Calibration is Performed According to the Following Standards: a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices - Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation: c) DASY4/S System Handbook			
Methods Applied and Interpretation of Parameters: • Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. • Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis. • Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • SAR measured: SAR measured at the stated antenna input power. • SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector. • SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-40108		Page 2 of 6	

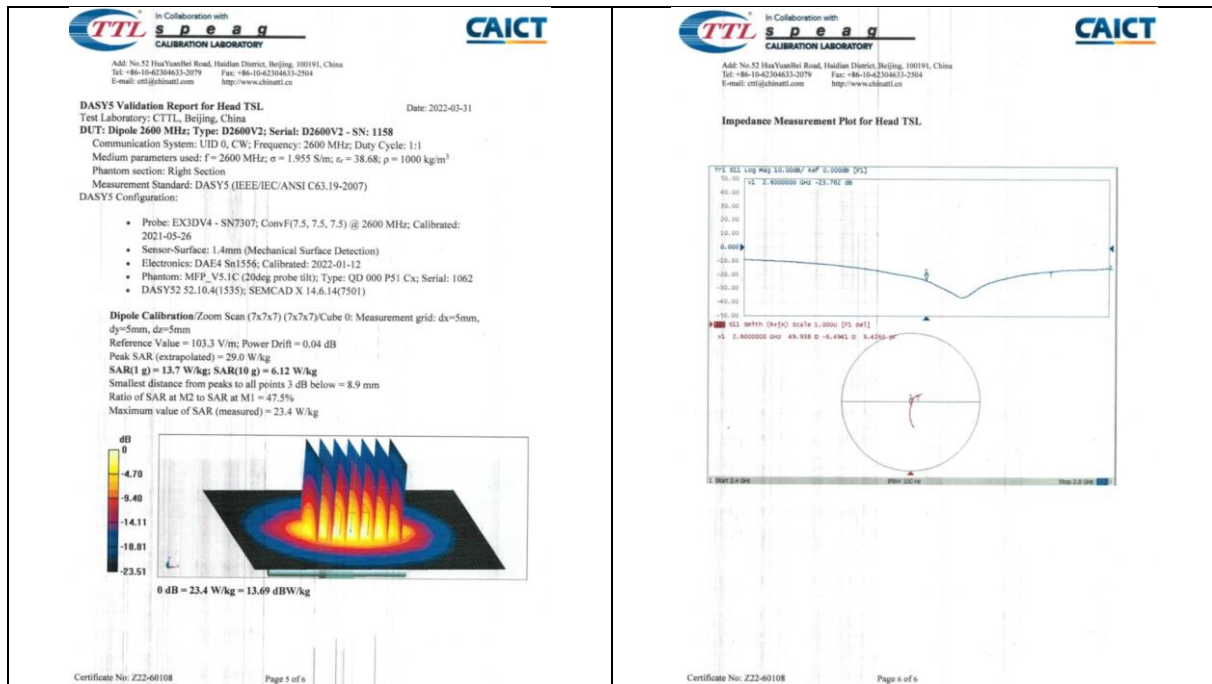
TTL S p e a g CALIBRATION LABORATORY		CAICT					
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@chinaatl.com http://www.chinaatl.cn					
Appendix (Additional assessments outside the scope of CNAS L0570)							
Antenna Parameters with Head TSL							
<table border="1"><thead><tr><th>Impedance, transformed to feed point</th><th>49.90-6.49jΩ</th></tr></thead><tbody><tr><td>Return Loss</td><td>-23.8dB</td></tr></tbody></table>				Impedance, transformed to feed point	49.90-6.49jΩ	Return Loss	-23.8dB
Impedance, transformed to feed point	49.90-6.49jΩ						
Return Loss	-23.8dB						
General Antenna Parameters and Design							
<table border="1"><thead><tr><th>Electrical Delay (one direction)</th><th>1.053 ns</th></tr></thead></table>				Electrical Delay (one direction)	1.053 ns		
Electrical Delay (one direction)	1.053 ns						
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.							
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.							
Additional EUT Data							
<table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead></table>				Manufactured by	SPEAG		
Manufactured by	SPEAG						
Certificate No: Z22-40108		Page 4 of 6					



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 5737 0818 www.sgs.com
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 5735 5888 f(86-512) 5737 0818 sgs.china@sgs.com



1.12 D5GHZV2 - SN 1095

Left Page (Page 1 of 10):

TTL Speaq Calibration Laboratory
In Collaboration with CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: SGS-CN Certificate No: Z22-60187

CALIBRATION CERTIFICATE

Object: D5GHZV2 - SN: 1095
Calibration Procedure(s): FF-Z11-003-01
Calibration Procedures for dipole validation kits
Calibration date: June 1, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21008328)	Sep-22
Power sensor NRP8	104291	24-Sep-21 (CTTL No.J21008328)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG No EX3-7464, Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG No.Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No.J22004009)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22004006)	Jan-23

Calibrated by: Zhao Jing SAR Test Engineer
Reviewed by: Lin Hao SAR Test Engineer
Approved by: Qi Dianyan SAR Project Leader

Issued: June 6, 2022
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Right Page (Page 2 of 10):

TTL Speaq Calibration Laboratory
In Collaboration with CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Glossary:
TSL: Issue simulating liquid
ConF: sensitivity in TSL / NORMx,y,z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:
c) DA5Y45 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgs.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

TTL In Collaboration with
s p e a q
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62302117
E-mail: cslg@speaq.com http://www.caict.ac.cn

CAICT

Measurement Conditions

DAISY system configuration, as far as not given on page 1.

DAISY Version	DAISY2	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	5200 MHz ± 1 MHz 5300 MHz ± 1 MHz 5500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz	

Head TSL parameters at 5200MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.4 ± 6 %	4.62 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL at 5200MHz

	Condition	
SAR averaged over 1 cm ³ (1 g) of Head TSL	250 mW input power	7.79 W/kg
SAR measured	250 mW input power	77.4 W/kg ± 24.4 % (k=2)
SAR for nominal Head TSL parameters	normalized to 1W	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.22 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.1 W/kg ± 24.2 % (k=2)

Certificate No: Z22-60187

Page 3 of 10

TTL In Collaboration with
s p e a q
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62302117
E-mail: cslg@speaq.com http://www.caict.ac.cn

CAICT

Head TSL parameters at 5300MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 6 %	4.73 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL at 5300MHz

	Condition	
SAR averaged over 1 cm ³ (1 g) of Head TSL	100 mW input power	7.94 W/kg
SAR measured	100 mW input power	79.1 W/kg ± 24.4 % (k=2)
SAR for nominal Head TSL parameters	normalized to 1W	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.27 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg ± 24.2 % (k=2)

Head TSL parameters at 5500MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.8	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	4.94 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL at 5500MHz

	Condition	
SAR averaged over 1 cm ³ (1 g) of Head TSL	100 mW input power	6.29 W/kg
SAR measured	100 mW input power	62.5 W/kg ± 24.4 % (k=2)
SAR for nominal Head TSL parameters	normalized to 1W	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.34 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 24.2 % (k=2)

Certificate No: Z22-60187

Page 4 of 10

TTL In Collaboration with
s p e a q
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62302117
E-mail: cslg@speaq.com http://www.caict.ac.cn

CAICT

Head TSL parameters at 5600MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 6 %	5.05 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL at 5600MHz

	Condition	
SAR averaged over 1 cm ³ (1 g) of Head TSL	100 mW input power	8.12 W/kg
SAR measured	100 mW input power	80.8 W/kg ± 24.4 % (k=2)
SAR for nominal Head TSL parameters	normalized to 1W	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.30 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	22.9 W/kg ± 24.2 % (k=2)

Head TSL parameters at 5800MHz

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 6 %	5.25 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	---	---

SAR result with Head TSL at 5800MHz

	Condition	
SAR averaged over 1 cm ³ (1 g) of Head TSL	100 mW input power	7.71 W/kg
SAR measured	100 mW input power	76.7 W/kg ± 24.4 % (k=2)
SAR for nominal Head TSL parameters	normalized to 1W	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	100 mW input power	2.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	21.8 W/kg ± 24.2 % (k=2)

Certificate No: Z22-60187

Page 5 of 10

TTL In Collaboration with
s p e a q
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62302117
E-mail: cslg@speaq.com http://www.caict.ac.cn

CAICT

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL at 5200MHz

Impedance, transformed to feed point	48.1D-5.03jΩ
Return Loss	-23.6dB

Antenna Parameters with Head TSL at 5300MHz

Impedance, transformed to feed point	47.8D-2.42jΩ
Return Loss	-28.5dB

Antenna Parameters with Head TSL at 5500MHz

Impedance, transformed to feed point	50.3D-4.26jΩ
Return Loss	-27.4dB

Antenna Parameters with Head TSL at 5600MHz

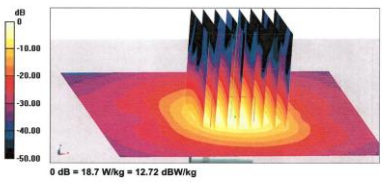
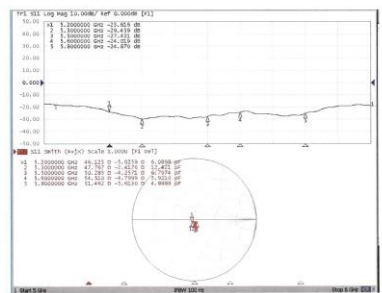
Impedance, transformed to feed point	54.5D-4.80jΩ
Return Loss	-24.0dB

Antenna Parameters with Head TSL at 5800MHz

Impedance, transformed to feed point	51.5D-5.61jΩ
Return Loss	-24.9dB

Certificate No: Z22-60187

Page 6 of 10

In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@chinaetl.com http://www.caict.ac.cn General Antenna Parameters and Design <table border="1"> <tr> <td>Electrical Delay (one direction)</td> <td>1.101 ns</td> </tr> </table> After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured. The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. Additional EUT Data <table border="1"> <tr> <td>Manufactured by</td> <td>SPEAG</td> </tr> </table> Certificate No: Z22-60187 Page 7 of 10	Electrical Delay (one direction)	1.101 ns	Manufactured by	SPEAG	In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@chinaetl.com http://www.caict.ac.cn DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China Date: 2022-06-01 DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095 Communication System: CW; Frequency: 5200 MHz; Frequency: 5300 MHz; Frequency: 5500 MHz; Frequency: 5600 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.62 \text{ S/m}$; $\epsilon_r = 35.19$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.73 \text{ S/m}$; $\epsilon_r = 35.19$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 5500 \text{ MHz}$; $\sigma = 4.939 \text{ S/m}$; $\epsilon_r = 34.83$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.051 \text{ S/m}$; $\epsilon_r = 34.89$; $\rho = 1000 \text{ kg/m}^3$ Medium parameters used: $f = 5800 \text{ MHz}$; $\sigma = 5.247 \text{ S/m}$; $\epsilon_r = 34.42$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7484; ConvF(5.6, 5.6, 5.6) @ 5200 MHz; ConvF(5.32, 5.32, 5.32) @ 5300 MHz; ConvF(5.11, 5.11, 5.11) @ 5500 MHz; ConvF(4.91, 4.91, 4.91) @ 5600 MHz; ConvF(5, 5, 5) @ 5800 MHz; Calibrated: 2022-01-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DA64 Sn1556; Calibrated: 2022-01-12 - Phantom: MPF_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501) Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 60.80 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 29.8 W/kg SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.22 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 66.8% Maximum value of SAR (measured) = 18.3 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 61.08 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 31.5 W/kg SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 65.5% Maximum value of SAR (measured) = 19.0 W/kg Certificate No: Z22-60187 Page 8 of 10
Electrical Delay (one direction)	1.101 ns				
Manufactured by	SPEAG				
In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@chinaetl.com http://www.caict.ac.cn Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 61.92 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 34.7 W/kg SAR(1 g) = 8.20 W/kg; SAR(10 g) = 2.34 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 63.9% Maximum value of SAR (measured) = 20.2 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 65.08 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 35.2 W/kg SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 62.5% Maximum value of SAR (measured) = 19.1 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 62.13 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 34.8 W/kg SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.16 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 61.6% Maximum value of SAR (measured) = 18.7 W/kg  Certificate No: Z22-60187 Page 9 of 10	In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@chinaetl.com http://www.caict.ac.cn Impedance Measurement Plot for Head TSL  Certificate No: Z22-60187 Page 10 of 10				

2 DAE4 - SN 1245

Schmid & Partner Engineering AG Zugstrasse 10, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9770 www.sgs.ch, info@sgs.ch s p e a g IMPORTANT NOTICE USAGE OF THE DAE4 The DAE4 unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE4. Special attention shall be given to the following points: Battery Exchange: The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE4 to wear out. Shipping of the DAE4: Before shipping the DAE4 to SPEAG for calibration, remove the batteries and pack the DAE4 in an anti-static bag. This anti-static bag shall then be packed into a larger box or container which protects the DAE4 from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside. E-stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE4 carefully and keep the DAE4 unit in a non-dusty environment if not used for measurements. Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect. DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE4 unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file. Important Note: Warranty and calibration is void if the DAE4 unit is disassembled partly or fully by the Customer. Important Note: Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure. Important Note: To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE. TN_EH100306AE DAE4.docx 07.03.2019	Calibration Laboratory of Schmid & Partner Engineering AG Zugstrasse 10, 8004 Zurich, Switzerland Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108 Client: SGS-CN (Auden) Certificate No.: DAE4-1245_May22 CALIBRATION CERTIFICATE Object: DAE4 - SD 000 D04 BM - SN: 1245 Calibration procedure(s): QA CAL-06 v30 Calibration procedure for the data acquisition electronics (DAE) Calibration date: May 30, 2022 This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3) °C and humidity < 70%. Calibration Equipment used (MATE critical for calibration) <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Ketley Multimeter Type 2001</td><td>SN: 0810276</td><td>31-Aug-21 (No.31368)</td><td>Aug-22</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Auto DAE Calibration Unit</td><td>SE LWS 003 AA 1001</td><td>24-Jan-22 (in house check)</td><td>In house check: Jan-23</td></tr><tr><td>Calibrator Blue V2.1</td><td>SE LWS 006 AA 1002</td><td>24-Jan-22 (in house check)</td><td>In house check: Jan-23</td></tr></tbody></table> Calibrated by: Dominique Stettin Laboratory Technician Approved by: Sven Kuhn Technical Manager This calibration certificate shall not be reproduced except in full without written approval of the laboratory. Certificate No: DAE4-1245_May22 Page 1 of 5	Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration	Ketley Multimeter Type 2001	SN: 0810276	31-Aug-21 (No.31368)	Aug-22	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Auto DAE Calibration Unit	SE LWS 003 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23	Calibrator Blue V2.1	SE LWS 006 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23
Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration																		
Ketley Multimeter Type 2001	SN: 0810276	31-Aug-21 (No.31368)	Aug-22																		
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																		
Auto DAE Calibration Unit	SE LWS 003 AA 1001	24-Jan-22 (in house check)	In house check: Jan-23																		
Calibrator Blue V2.1	SE LWS 006 AA 1002	24-Jan-22 (in house check)	In house check: Jan-23																		
Calibration Laboratory of Schmid & Partner Engineering AG Zugstrasse 10, 8004 Zurich, Switzerland Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108 Glossary DAE data acquisition electronics Connector angle information used in DASY system to align probe sensor X to the robot coordinate system. Methods Applied and Interpretation of Parameters • DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range. • Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required. • The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty. • DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement. • Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement. • Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage. • AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage. • Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements. • Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance. • Input resistance: Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement. • Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated. • Power consumption: Typical value for information. Supply currents in various operating modes. Certificate No: DAE4-1245_May22 Page 2 of 5	DC Voltage Measurement AD - Converter Resolution nominal <table border="1"><thead><tr><th>High Range</th><th>Low Range</th></tr></thead><tbody><tr><td>1LSB = 6.1 μV</td><td>1LSB = 6.1 μV</td></tr></tbody></table> Full range = -190...+320 mV Full range = -1...+3mV DASY measurement parameters: Auto Zero-Time: 3 sec; Measuring time: 3 sec <table border="1"><thead><tr><th>Calibration Factors</th><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>High Range</td><td>405.265 ± 0.02% (k=2)</td><td>403.974 ± 0.02% (k=2)</td><td>406.092 ± 0.02% (k=2)</td></tr><tr><td>Low Range</td><td>3.99534 ± 1.50% (k=2)</td><td>3.99508 ± 1.50% (k=2)</td><td>4.01015 ± 1.50% (k=2)</td></tr></tbody></table> Connector Angle <table border="1"><thead><tr><th>Connector Angle to be used in DASY system</th></tr></thead><tbody><tr><td>30.0° ± 1°</td></tr></tbody></table> Certificate No: DAE4-1245_May22 Page 3 of 5	High Range	Low Range	1LSB = 6.1 μV	1LSB = 6.1 μV	Calibration Factors	X	Y	Z	High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)	Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)	Connector Angle to be used in DASY system	30.0° ± 1°		
High Range	Low Range																				
1LSB = 6.1 μV	1LSB = 6.1 μV																				
Calibration Factors	X	Y	Z																		
High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)																		
Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)																		
Connector Angle to be used in DASY system																					
30.0° ± 1°																					

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	19994.45	1.52	0.00
Channel X - Input	20004.58	2.22	0.01
Channel X + Input	-20000.14	1.12	-0.01
Channel Y + Input	19994.72	1.58	0.00
Channel Y - Input	20001.22	-1.00	-0.00
Channel Y + Input	-20003.05	-1.57	0.01
Channel Z + Input	19992.44	0.19	0.00
Channel Z - Input	20003.09	0.58	0.00
Channel Z + Input	-20001.73	-0.27	0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.91	0.41	0.02
Channel X - Input	202.54	0.65	0.32
Channel X + Input	-197.86	0.07	-0.04
Channel Y + Input	2002.05	0.58	0.03
Channel Y - Input	201.27	-0.57	-0.28
Channel Y + Input	-196.23	-0.06	0.03
Channel Z + Input	2001.96	0.08	0.00
Channel Z - Input	200.09	-1.53	-0.76
Channel Z + Input	-199.85	-1.57	0.79

2. Common mode sensitivity

Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X 200	-5.87	-7.69
-200	9.12	7.79
Channel Y 200	-8.68	-9.28
-200	8.52	6.36
Channel Z 200	-5.36	-5.60
-200	3.58	3.06

3. Channel separation

Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X 200	-	4.07	-3.14
Channel Y 200	9.36	-	4.07
Channel Z 200	10.11	7.14	-

Certificate No: DAE4-1245_May22

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15984	17040
Channel Y	16562	16768
Channel Z	16035	15958

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.00	-0.15	1.93	0.45
Channel Y	-0.18	-1.28	0.94	0.45
Channel Z	-0.58	-2.61	0.58	0.60

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25nA

7. Input Resistance (Typical values for information)

	Zeroing (ΩOhm)	Measuring (MΩhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	-8	+14
Supply (- Vcc)	-0.01	-8	-8

Certificate No: DAE4-1245_May22

Page 5 of 5

3 EX3DV4 - SN 7346

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zugstrasse 6, 8684 Zurich, SwitzerlandS Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Service svizzero d'attestazione
Swiss Calibration ServiceAccredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: Auden

Certificate No: EX3-7346_Mar22

CALIBRATION CERTIFICATE

Object: EX3DV4 - SN 7346

Calibration procedure(s): QA CAL-01 v8; QA CAL-14 v6; QA CAL-23 v5; QA CAL-25 v7
Calibration procedure for dosimetric E-field probes

Calibration date: March 30, 2022

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.

Calibration Equipment used (MATE critical for calibration):

Primary Standards	ISI	Cal Date (Certificate No.)	Scheduled Calibration
Power meter MHP	SR 10478	09-Apr-21 No. 217-0501-03202	Apr-22
Power sensor MHP-Z91	SR 10324	09-Apr-21 No. 217-0501-03201	Apr-22
Power sensor MHP-Z91	SR 10324	09-Apr-21 No. 217-0502-03202	Apr-22
Reference DUT attenuator	SR C22632 (20k)	09-Apr-21 No. 217-0503-03203	Apr-22
DASY	SR 460	13-Dec-21 No. DAE4-1245_04211	Dec-22
Reference Probe ES3002	SR 3013	27-Dec-21 No. ES3-3013 Dec21	Dec-22

Secondary Standards	ISI	Check Date (in house)	Scheduled Calibration
Power meter E4415B	SR G841230974	06-Apr-18 (in house check Jun-20)	In house check Jun-22
Power sensor E4412A	SR MY4149897	06-Apr-18 (in house check Jun-20)	In house check Jun-22
Power sensor E4412A	SR 30011015	06-Apr-18 (in house check Jun-20)	In house check Jun-22
RF generator HP 8646C	SR US340101709	04-Aug-18 (in house check Jun-20)	In house check Jun-22
Network Analyzer E8309A	SR US41030477	31-Mar-14 (in house check Dec-20)	In house check Dec-22

Calibrated by: Name: Sven Kuhn, Function: Laboratory Technician, Signature: [Signature]

Approved by: Sven Kuhn, Deputy Manager, Signature: [Signature]

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-7346_Mar22

Page 1 of 24

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zugstrasse 6, 8684 Zurich, SwitzerlandS Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Service svizzero d'attestazione
Swiss Calibration ServiceAccredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	Issue simulating light
NORM _{M,y,z}	sensitivity in free space
Conf _F	sensitivity in TSL / NORM _{M,y,z}
DCP	diode compression point
CF	crest factor (10µs ₁ cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62208-1:2018, "Measurement Procedure For the Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1:351: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020
- b) KOB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{M,y,z}: Assessed for E-field polarization $\theta = 0$ (i.e. 100 MHz in TEM-cell; f > 100 MHz: R22 waveguide). NORM_{M,y,z} are only intermediate values, i.e., the uncertainties of NORM_{M,y,z} do not affect the E-field uncertainty inside TSL (see below Conf_F).
- NORM_{M,y,z} = NORM_{M,y,z} * Frequency response (see Frequency Response Chart). This linearization is implemented in DASY4 software version later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of Conf_F.
- Conf_F and Boundary Effect Parameters: Assessed in far phantom using E-field (or Temperature Transfer Standard for f < 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same values are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to correct the field distribution close to the boundary. The sensitivity in TSL corresponds to NORM_{M,y,z} * Conf_F whereby the uncertainty corresponds to that given for Conf_F. A frequency dependent Conf_F is used in DASY version 4.4 and higher which allows extending the validity from 50 MHz to 2 100 MHz.
- Spherical isotropy (SD deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_M (no uncertainty required).

Certificate No: EX3-7346_Mar22

Page 2 of 24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgsgroup.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com

EX3DV4-SN:7346

March 30, 2022

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm $\mu V/(V/m)^2$	0.45	0.47	0.61	$\pm 10.1\%$
DCP (mV) ²	101.4	106.0	106.9	

Calibration Results for Modulation Response

UID	Communication System Name	A dB	B dB- μV	C	D dB	VR mV	Max dev.	Max Unc ² (k=2)
0	CW	X: 0.00 Y: 0.00 Z: 0.00	0.00 0.00 0.00	1.00 1.00 1.00	0.00 0.00 0.00	143.5 135.3 139.0	$\pm 3.5\%$	$\pm 4.1\%$
10035-AAA	Pulse Waveform (200Hz, 10%)	X: 3.33 Y: 4.03 Z: 1.63	68.90 70.70 61.25	11.66 12.35 6.76	10.00 65.0 65.0	60.0 60.0 60.0	$\pm 3.5\%$	$\pm 9.6\%$
10035-AAA	Pulse Waveform (200Hz, 20%)	X: 3.30 Y: 11.31 Z: 5.83	70.65 81.32 69.90	11.31 14.72 5.11	6.99 86.0 86.0	85.0 85.0 85.0	$\pm 2.4\%$	$\pm 9.6\%$
10035-AAA	Pulse Waveform (200Hz, 40%)	X: 7.41 Y: 26.03 Z: 0.18	79.85 81.42 138.38	12.51 15.51 0.01	3.88 95.0 95.0	95.0 95.0 95.0	$\pm 2.7\%$	$\pm 9.6\%$
10035-AAA	Pulse Waveform (200Hz, 60%)	X: 2.27 Y: 20.90 Z: 7.84	71.13 81.58 138.51	9.52 16.29 16.67	2.32 120.0 120.0	120.0 120.0 120.0	$\pm 1.7\%$	$\pm 9.6\%$
10035-AAA	GRSK Waveform, 1 MHz	X: 1.47 Y: 0.86 Z: 0.43	64.88 66.27 67.88	13.82 14.65 11.05	1.00 0.00 150.0	150.0 150.0 150.0	$\pm 4.2\%$	$\pm 9.6\%$
10035-AAA	GRSK Waveform, 10 MHz	X: 2.08 Y: 2.08 Z: 2.08	67.33 67.33 67.33	13.38 13.38 13.38	0.00 150.0 150.0	150.0 150.0 150.0	$\pm 1.1\%$	$\pm 9.6\%$
10036-AAA	64-QAM Waveform, 100 MHz	X: 2.43 Y: 2.43 Z: 1.70	68.51 68.51 64.72	18.25 18.25 15.99	3.01 0.00 0.00	150.0 150.0 150.0	$\pm 1.0\%$	$\pm 9.6\%$
10036-AAA	64-QAM Waveform, 40 MHz	X: 3.38 Y: 3.38 Z: 2.70	66.82 66.82 65.72	15.96 15.96 14.74	0.00 150.0 150.0	150.0 150.0 150.0	$\pm 2.0\%$	$\pm 9.6\%$
10041-AAA	WLAN CCK4, 64-QAM, 40MHz	X: 4.70 Y: 4.70 Z: 3.83	65.54 65.54 66.16	15.41 15.41 15.28	0.00 150.0 150.0	150.0 150.0 150.0	$\pm 3.6\%$	$\pm 9.6\%$

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

* The uncertainties of Norm X, Y, Z do not affect the E₁ field uncertainty within T10 (see Pages 5 and 6).
* Numerical indication parameter: uncertainty not required.
* Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: EX3-7346_Mar22

Page 3 of 34

EX3DV4-SN:7346

March 30, 2022

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Sensor Model Parameters

	T1	T2	T3	T4	T5	T6
X	59.2	291.80	35.10	5.63	5.02	1.42
Y	37.1	270.84	34.12	6.29	5.01	1.82
Z	9.7	69.74	35.37	4.96	0.00	0.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-166.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	237 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

Certificate No: EX3-7346_Mar22

Page 4 of 34

EX3DV4-SN:7346

March 30, 2022

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz)	Relative Permittivity ¹	Conductivity (S/m) ²	ConvF X	ConvF Y	ConvF Z	Alpha ³	Depth ⁴ (mm)	Unc (k=2)
750	41.9	0.09	10.56	10.56	10.56	0.55	0.85	$\pm 12.0\%$
835	41.5	0.90	10.12	10.12	10.12	0.42	0.96	$\pm 12.0\%$
900	41.5	0.97	10.10	10.10	10.10	0.53	0.80	$\pm 12.0\%$
1430	40.5	1.20	9.26	9.26	9.26	0.50	0.80	$\pm 12.0\%$
1750	40.1	1.37	8.63	8.63	8.63	0.34	0.86	$\pm 12.0\%$
1900	40.0	1.40	8.48	8.48	8.48	0.35	0.86	$\pm 12.0\%$
2000	40.0	1.40	8.35	8.35	8.35	0.34	0.86	$\pm 12.0\%$
2300	39.5	1.67	7.86	7.86	7.86	0.39	0.90	$\pm 12.0\%$
2450	39.2	1.80	7.63	7.63	7.63	0.41	0.90	$\pm 12.0\%$
2600	39.0	1.96	7.33	7.33	7.33	0.44	0.90	$\pm 12.0\%$
3300	38.2	2.71	7.15	7.15	7.15	0.30	1.35	$\pm 13.1\%$
3500	37.8	2.81	7.14	7.14	7.14	0.30	1.35	$\pm 13.1\%$
3750	37.7	3.12	6.85	6.85	6.85	0.30	1.35	$\pm 13.1\%$
3900	37.5	3.32	6.71	6.71	6.71	0.40	1.60	$\pm 13.1\%$
4100	37.2	3.53	6.58	6.58	6.58	0.40	1.60	$\pm 13.1\%$
4200	37.1	3.63	6.30	6.30	6.30	0.40	1.70	$\pm 13.1\%$
4400	36.9	3.64	6.24	6.24	6.24	0.40	1.70	$\pm 13.1\%$
4600	36.7	4.04	6.11	6.11	6.11	0.40	1.70	$\pm 13.1\%$
4800	36.4	4.25	6.08	6.08	6.08	0.40	1.80	$\pm 13.1\%$
4900	36.3	4.40	5.84	5.84	5.84	0.40	1.80	$\pm 13.1\%$
5200	36.0	4.66	5.25	5.25	5.25	0.40	1.80	$\pm 13.1\%$
5300	35.9	4.78	5.12	5.12	5.12	0.40	1.80	$\pm 13.1\%$
5500	35.6	4.96	4.85	4.85	4.85	0.40	1.80	$\pm 13.1\%$
5600	35.5	5.07	4.70	4.70	4.70	0.40	1.80	$\pm 13.1\%$
5800	35.3	5.27	4.75	4.75	4.75	0.40	1.80	$\pm 13.1\%$

¹ Frequency validity above 300 MHz to 100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
² At frequencies 5-10 GHz, the validity of tissue parameters (i) and (ii) can be related to $\pm 10\%$ liquid compensation formula is applied to measured S₁₁ values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
³ Alpha/Depth are determined during calibration. SP-CAO warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz and below $\pm 2\%$ for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.
⁴ Alpha/Depth are determined during calibration. SP-CAO warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz and below $\pm 2\%$ for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-7346_Mar22

Page 5 of 34

EX3DV4-SN:7346

March 30, 2022

DASY/EASY - Parameters of Probe: EX3DV4 - SN:7346

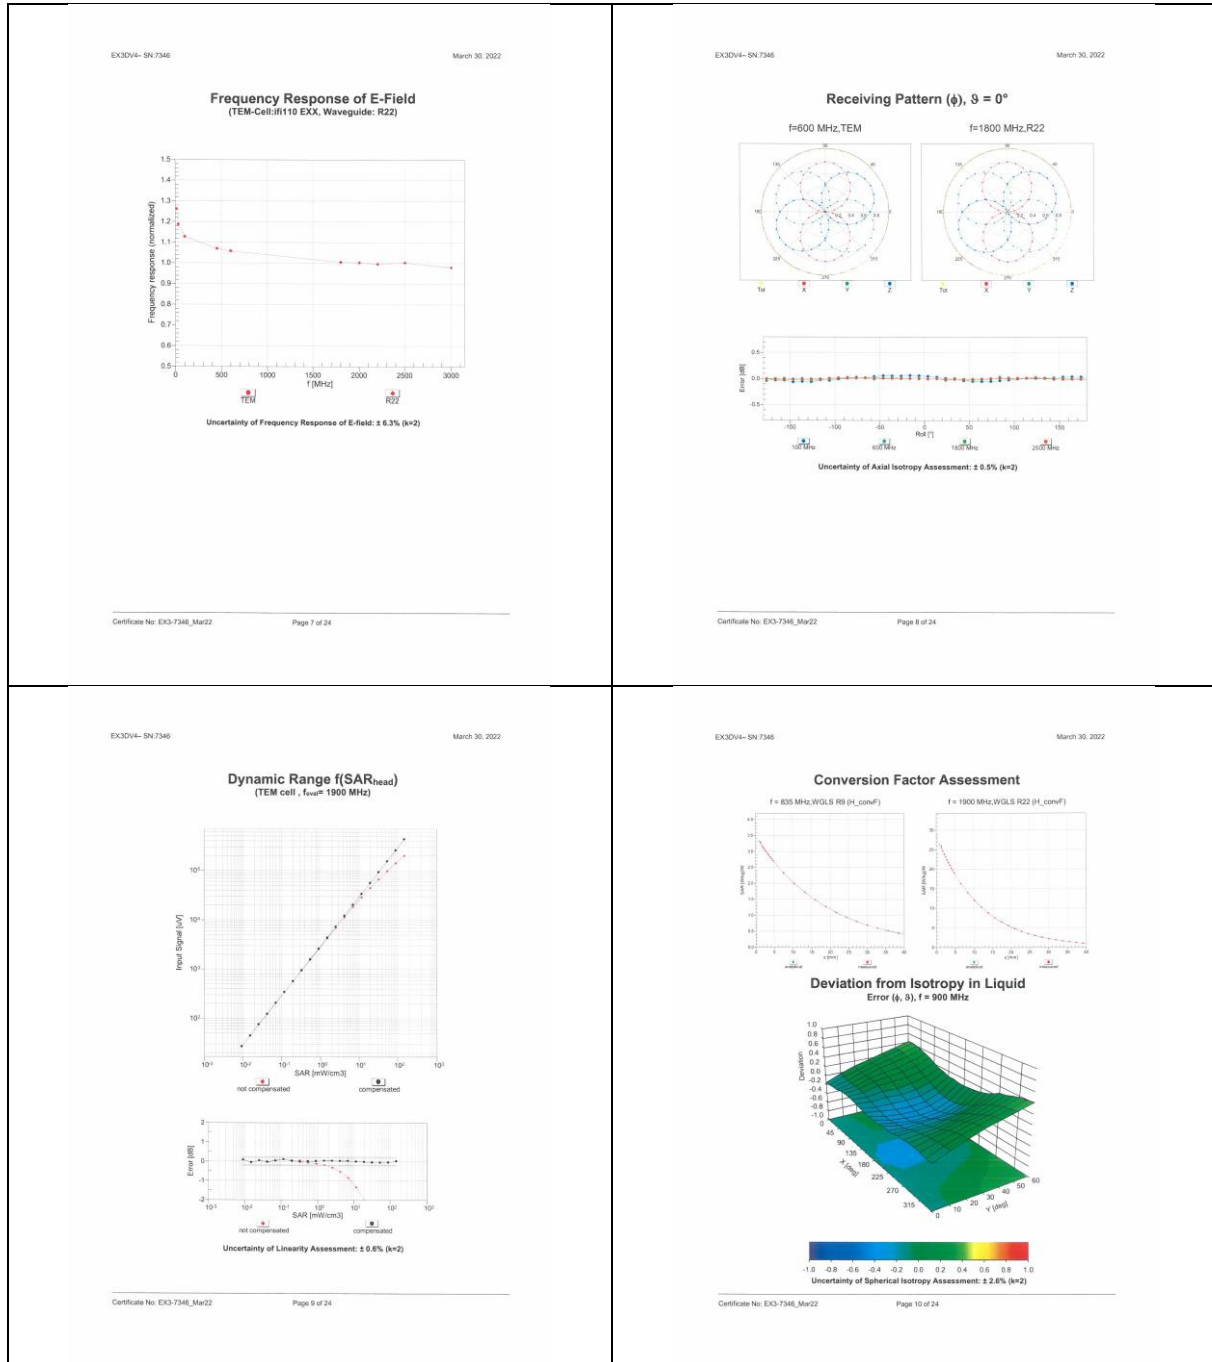
Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz)	Relative Permittivity ¹	Conductivity (S/m) ²	ConvF X	ConvF Y	ConvF Z	Alpha ³	Depth ⁴ (mm)	Unc (k=2)
6500	34.5	6.07	5.30	5.30	5.30	0.20	2.50	$\pm 18.0\%$

¹ Frequency validity above 6 GHz is ± 700 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
² At frequencies 5-10 GHz, the validity of tissue parameters (i) and (ii) can be related to $\pm 10\%$ liquid compensation formula is applied to measured S₁₁ values. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.
³ Alpha/Depth are determined during calibration. SP-CAO warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz and below $\pm 2\%$ for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.
⁴ Alpha/Depth are determined during calibration. SP-CAO warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz and below $\pm 2\%$ for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: EX3-7346_Mar22

Page 6 of 34



EX3034-SN-7346 March 30, 2022 <table><tr><td>10414</td><td>AAA</td><td>WLAN</td><td>CDP: 64-QAM, 40MHz</td><td>Generic</td><td>8.54</td><td>± 0.6 %</td></tr><tr><td>10415</td><td>AAA</td><td>IEEE 802.11b WFI</td><td>2.4 GHz (DSSS, 1 Mbps, R90cc)</td><td>WLAN</td><td>1.54</td><td>± 0.6 %</td></tr><tr><td>10416</td><td>AAA</td><td>IEEE 802.11g WFI</td><td>2.4 GHz (DSSS, 5.5 Mbps, R90cc)</td><td>WLAN</td><td>8.23</td><td>± 0.6 %</td></tr><tr><td>10417</td><td>AAC</td><td>IEEE 802.11n WFI</td><td>5 GHz (OFDM, 6 Mbps, R90cc)</td><td>WLAN</td><td>8.23</td><td>± 0.6 %</td></tr><tr><td>10418</td><td>AAA</td><td>IEEE 802.11g WFI</td><td>2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Long)</td><td>WLAN</td><td>8.14</td><td>± 0.6 %</td></tr><tr><td>10419</td><td>AAA</td><td>IEEE 802.11g WFI</td><td>2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Short)</td><td>WLAN</td><td>8.19</td><td>± 0.6 %</td></tr><tr><td>10420</td><td>AAC</td><td>IEEE 802.11n HT Overhead</td><td>7.2 Mbps, R90cc</td><td>WLAN</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10421</td><td>AAC</td><td>IEEE 802.11n HT Overhead</td><td>6.3 Mbps, 16-QAM</td><td>WLAN</td><td>8.47</td><td>± 0.6 %</td></tr><tr><td>10424</td><td>AAD</td><td>IEEE 802.11n HT Overhead</td><td>7.2 Mbps, 64-QAM</td><td>WLAN</td><td>8.40</td><td>± 0.6 %</td></tr><tr><td>10425</td><td>AAC</td><td>IEEE 802.11n HT Overhead</td><td>15 Mbps, R90cc</td><td>WLAN</td><td>5.9</td><td>± 0.6 %</td></tr><tr><td>10428</td><td>AAC</td><td>IEEE 802.11n HT Overhead</td><td>30 Mbps, 16-QAM</td><td>WLAN</td><td>6.45</td><td>± 0.6 %</td></tr><tr><td>10427</td><td>AAC</td><td>IEEE 802.11n HT Overhead</td><td>150 Mbps, 64-QAM</td><td>WLAN</td><td>8.41</td><td>± 0.6 %</td></tr><tr><td>10429</td><td>AAD</td><td>LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1)</td><td>LTE-FDD</td><td>8.38</td><td>± 0.6 %</td></tr><tr><td>10431</td><td>AAD</td><td>LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1)</td><td>LTE-FDD</td><td>8.38</td><td>± 0.6 %</td></tr><tr><td>10432</td><td>AAC</td><td>LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1)</td><td>LTE-FDD</td><td>8.34</td><td>± 0.6 %</td></tr><tr><td>10433</td><td>AAC</td><td>LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1)</td><td>LTE-FDD</td><td>8.34</td><td>± 0.6 %</td></tr><tr><td>10434</td><td>AAA</td><td>WCDMA (BS Test Model 1, 64 QPSK)</td><td>WCDMA</td><td>8.80</td><td>± 0.6 %</td></tr><tr><td>10435</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10447</td><td>AAD</td><td>LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1, Clipping 44%)</td><td>LTE-FDD</td><td>7.86</td><td>± 0.6 %</td></tr><tr><td>10448</td><td>AAD</td><td>LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1, Clipping 44%)</td><td>LTE-FDD</td><td>7.93</td><td>± 0.6 %</td></tr><tr><td>10449</td><td>AAC</td><td>LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1, Clipping 44%)</td><td>LTE-FDD</td><td>7.91</td><td>± 0.6 %</td></tr><tr><td>10450</td><td>AAC</td><td>LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1, Clipping 44%)</td><td>LTE-FDD</td><td>7.88</td><td>± 0.6 %</td></tr><tr><td>10451</td><td>AAA</td><td>WCDMA (BS Test Model 1, 64 QPSK, Clipping 44%)</td><td>WCDMA</td><td>7.89</td><td>± 0.6 %</td></tr><tr><td>10452</td><td>AAD</td><td>Validation (Spurs, 10ms, 1ms)</td><td>Test</td><td>10.00</td><td>± 0.6 %</td></tr><tr><td>10458</td><td>AAA</td><td>IEEE 802.11ac WFI (160MHz, 64-QAM, R90cc)</td><td>WLAN</td><td>8.63</td><td>± 0.6 %</td></tr><tr><td>10457</td><td>AAA</td><td>UMTS-FDD (SC-SDMA)</td><td>WCDMA</td><td>6.62</td><td>± 0.6 %</td></tr><tr><td>10459</td><td>AAA</td><td>CDMA2000 (1xEV-DO, Rev. B, 3 carriers)</td><td>CDMA2000</td><td>8.25</td><td>± 0.6 %</td></tr><tr><td>10459</td><td>AAA</td><td>CDMA2000 (1xEV-DO, Rev. B, 3 carriers)</td><td>CDMA2000</td><td>8.25</td><td>± 0.6 %</td></tr><tr><td>10462</td><td>AAA</td><td>UMTS-FDD (HSPA, R90cc)</td><td>WCDMA</td><td>2.39</td><td>± 0.6 %</td></tr><tr><td>10461</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10462</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.30</td><td>± 0.6 %</td></tr><tr><td>10463</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.30</td><td>± 0.6 %</td></tr><tr><td>10464</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10465</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10466</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10467</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10468</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10469</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10470</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10471</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10472</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10473</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10474</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10475</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10476</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10477</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10478</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10479</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10480</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10481</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10482</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10483</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10484</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10485</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr><tr><td>10486</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10487</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10488</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.82</td><td>± 0.6 %</td></tr></table>	10414	AAA	WLAN	CDP: 64-QAM, 40MHz	Generic	8.54	± 0.6 %	10415	AAA	IEEE 802.11b WFI	2.4 GHz (DSSS, 1 Mbps, R90cc)	WLAN	1.54	± 0.6 %	10416	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS, 5.5 Mbps, R90cc)	WLAN	8.23	± 0.6 %	10417	AAC	IEEE 802.11n WFI	5 GHz (OFDM, 6 Mbps, R90cc)	WLAN	8.23	± 0.6 %	10418	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Long)	WLAN	8.14	± 0.6 %	10419	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Short)	WLAN	8.19	± 0.6 %	10420	AAC	IEEE 802.11n HT Overhead	7.2 Mbps, R90cc	WLAN	8.32	± 0.6 %	10421	AAC	IEEE 802.11n HT Overhead	6.3 Mbps, 16-QAM	WLAN	8.47	± 0.6 %	10424	AAD	IEEE 802.11n HT Overhead	7.2 Mbps, 64-QAM	WLAN	8.40	± 0.6 %	10425	AAC	IEEE 802.11n HT Overhead	15 Mbps, R90cc	WLAN	5.9	± 0.6 %	10428	AAC	IEEE 802.11n HT Overhead	30 Mbps, 16-QAM	WLAN	6.45	± 0.6 %	10427	AAC	IEEE 802.11n HT Overhead	150 Mbps, 64-QAM	WLAN	8.41	± 0.6 %	10429	AAD	LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1)	LTE-FDD	8.38	± 0.6 %	10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1)	LTE-FDD	8.38	± 0.6 %	10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1)	LTE-FDD	8.34	± 0.6 %	10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1)	LTE-FDD	8.34	± 0.6 %	10434	AAA	WCDMA (BS Test Model 1, 64 QPSK)	WCDMA	8.80	± 0.6 %	10435	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10447	AAD	LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.86	± 0.6 %	10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.93	± 0.6 %	10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.91	± 0.6 %	10450	AAC	LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.88	± 0.6 %	10451	AAA	WCDMA (BS Test Model 1, 64 QPSK, Clipping 44%)	WCDMA	7.89	± 0.6 %	10452	AAD	Validation (Spurs, 10ms, 1ms)	Test	10.00	± 0.6 %	10458	AAA	IEEE 802.11ac WFI (160MHz, 64-QAM, R90cc)	WLAN	8.63	± 0.6 %	10457	AAA	UMTS-FDD (SC-SDMA)	WCDMA	6.62	± 0.6 %	10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 0.6 %	10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 0.6 %	10462	AAA	UMTS-FDD (HSPA, R90cc)	WCDMA	2.39	± 0.6 %	10461	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10462	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %	10463	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %	10464	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10467	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10469	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10470	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10471	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10472	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10473	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10474	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10475	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10476	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10479	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10480	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10481	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10482	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10483	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10484	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10485	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	10486	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10487	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %	10488	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %	EX3034-SN-7346 March 30, 2022 <table><tr><td>10489</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>8.31</td><td>± 0.6 %</td></tr><tr><td>10490</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.31</td><td>± 0.6 %</td></tr><tr><td>10491</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.31</td><td>± 0.6 %</td></tr><tr><td>10492</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.74</td><td>± 0.6 %</td></tr><tr><td>10493</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.41</td><td>± 0.6 %</td></tr><tr><td>10494</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.74</td><td>± 0.6 %</td></tr><tr><td>10495</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.37</td><td>± 0.6 %</td></tr><tr><td>10496</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.37</td><td>± 0.6 %</td></tr><tr><td>10497</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.87</td><td>± 0.6 %</td></tr><tr><td>10498</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.40</td><td>± 0.6 %</td></tr><tr><td>10499</td><td>AAB</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.68</td><td>± 0.6 %</td></tr><tr><td>10500</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.87</td><td>± 0.6 %</td></tr><tr><td>10501</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.44</td><td>± 0.6 %</td></tr><tr><td>10502</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.82</td><td>± 0.6 %</td></tr><tr><td>10503</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.72</td><td>± 0.6 %</td></tr><tr><td>10504</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.31</td><td>± 0.6 %</td></tr><tr><td>10505</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.54</td><td>± 0.6 %</td></tr><tr><td>10506</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.74</td><td>± 0.6 %</td></tr><tr><td>10507</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.36</td><td>± 0.6 %</td></tr><tr><td>10508</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.95</td><td>± 0.6 %</td></tr><tr><td>10509</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.99</td><td>± 0.6 %</td></tr><tr><td>10510</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.49</td><td>± 0.6 %</td></tr><tr><td>10511</td><td>AAC</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.51</td><td>± 0.6 %</td></tr><tr><td>10512</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)</td><td>LTE-TDD</td><td>7.74</td><td>± 0.6 %</td></tr><tr><td>10513</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.42</td><td>± 0.6 %</td></tr><tr><td>10514</td><td>AAF</td><td>LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)</td><td>LTE-TDD</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10515</td><td>AAA</td><td>IEEE 802.11ac WFI (2.4 GHz DSSS, 2 Mbps, R90cc)</td><td>WLAN</td><td>1.58</td><td>± 0.6 %</td></tr><tr><td>10516</td><td>AAA</td><td>IEEE 802.11ac WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)</td><td>WLAN</td><td>1.57</td><td>± 0.6 %</td></tr><tr><td>10517</td><td>AAA</td><td>IEEE 802.11ac WFI (2.4 GHz DSSS, 11 Mbps, R90cc)</td><td>WLAN</td><td>1.58</td><td>± 0.6 %</td></tr><tr><td>10518</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)</td><td>WLAN</td><td>8.33</td><td>± 0.6 %</td></tr><tr><td>10519</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)</td><td>WLAN</td><td>8.39</td><td>± 0.6 %</td></tr><tr><td>10520</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)</td><td>WLAN</td><td>8.12</td><td>± 0.6 %</td></tr><tr><td>10521</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)</td><td>WLAN</td><td>7.97</td><td>± 0.6 %</td></tr><tr><td>10522</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10523</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 48 Mbps, R90cc)</td><td>WLAN</td><td>8.48</td><td>± 0.6 %</td></tr><tr><td>10524</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 54 Mbps, R90cc)</td><td>WLAN</td><td>8.27</td><td>± 0.6 %</td></tr><tr><td>10525</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>2.36</td><td>± 0.6 %</td></tr><tr><td>10526</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.42</td><td>± 0.6 %</td></tr><tr><td>10527</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.21</td><td>± 0.6 %</td></tr><tr><td>10528</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.39</td><td>± 0.6 %</td></tr><tr><td>10529</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.36</td><td>± 0.6 %</td></tr><tr><td>10530</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.36</td><td>± 0.6 %</td></tr><tr><td>10531</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.29</td><td>± 0.6 %</td></tr><tr><td>10532</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.29</td><td>± 0.6 %</td></tr><tr><td>10533</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.30</td><td>± 0.6 %</td></tr><tr><td>10534</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10535</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10536</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.32</td><td>± 0.6 %</td></tr><tr><td>10537</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.44</td><td>± 0.6 %</td></tr><tr><td>10538</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.34</td><td>± 0.6 %</td></tr><tr><td>10539</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.39</td><td>± 0.6 %</td></tr><tr><td>10540</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.46</td><td>± 0.6 %</td></tr><tr><td>10541</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10542</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10543</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10544</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.47</td><td>± 0.6 %</td></tr><tr><td>10545</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.55</td><td>± 0.6 %</td></tr><tr><td>10546</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.35</td><td>± 0.6 %</td></tr></table>	10489	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	8.31	± 0.6 %	10490	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %	10491	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %	10492	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %	10493	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 0.6 %	10494	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %	10495	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 0.6 %	10496	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.37	± 0.6 %	10497	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.87	± 0.6 %	10498	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 0.6 %	10499	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 0.6 %	10500	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.87	± 0.6 %	10501	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 0.6 %	10502	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.82	± 0.6 %	10503	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 0.6 %	10504	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %	10505	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 0.6 %	10506	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %	10507	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 0.6 %	10508	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.95	± 0.6 %	10509	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 0.6 %	10510	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 0.6 %	10511	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 0.6 %	10512	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %	10513	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 0.6 %	10514	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %	10515	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 2 Mbps, R90cc)	WLAN	1.58	± 0.6 %	10516	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)	WLAN	1.57	± 0.6 %	10517	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 11 Mbps, R90cc)	WLAN	1.58	± 0.6 %	10518	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)	WLAN	8.33	± 0.6 %	10519	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)	WLAN	8.39	± 0.6 %	10520	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)	WLAN	8.12	± 0.6 %	10521	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)	WLAN	7.97	± 0.6 %	10522	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)	WLAN	8.45	± 0.6 %	10523	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 48 Mbps, R90cc)	WLAN	8.48	± 0.6 %	10524	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 54 Mbps, R90cc)	WLAN	8.27	± 0.6 %	10525	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	2.36	± 0.6 %	10526	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %	10527	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.21	± 0.6 %	10528	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %	10529	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.36	± 0.6 %	10530	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.36	± 0.6 %	10531	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.29	± 0.6 %	10532	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.29	± 0.6 %	10533	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.30	± 0.6 %	10534	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %	10535	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %	10536	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.32	± 0.6 %	10537	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.44	± 0.6 %	10538	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.34	± 0.6 %	10539	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %	10540	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.46	± 0.6 %	10541	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %	10542	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %	10543	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %	10544	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.47	± 0.6 %	10545	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.55	± 0.6 %	10546	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.35	± 0.6 %
10414	AAA	WLAN	CDP: 64-QAM, 40MHz	Generic	8.54	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10415	AAA	IEEE 802.11b WFI	2.4 GHz (DSSS, 1 Mbps, R90cc)	WLAN	1.54	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10416	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS, 5.5 Mbps, R90cc)	WLAN	8.23	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10417	AAC	IEEE 802.11n WFI	5 GHz (OFDM, 6 Mbps, R90cc)	WLAN	8.23	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10418	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Long)	WLAN	8.14	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10419	AAA	IEEE 802.11g WFI	2.4 GHz (DSSS-OFDM, 6 Mbps, R90cc, Short)	WLAN	8.19	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10420	AAC	IEEE 802.11n HT Overhead	7.2 Mbps, R90cc	WLAN	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10421	AAC	IEEE 802.11n HT Overhead	6.3 Mbps, 16-QAM	WLAN	8.47	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10424	AAD	IEEE 802.11n HT Overhead	7.2 Mbps, 64-QAM	WLAN	8.40	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10425	AAC	IEEE 802.11n HT Overhead	15 Mbps, R90cc	WLAN	5.9	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10428	AAC	IEEE 802.11n HT Overhead	30 Mbps, 16-QAM	WLAN	6.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10427	AAC	IEEE 802.11n HT Overhead	150 Mbps, 64-QAM	WLAN	8.41	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
10429	AAD	LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1)	LTE-FDD	8.38	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10431	AAD	LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1)	LTE-FDD	8.38	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10432	AAC	LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1)	LTE-FDD	8.34	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10433	AAC	LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1)	LTE-FDD	8.34	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10434	AAA	WCDMA (BS Test Model 1, 64 QPSK)	WCDMA	8.80	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10435	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10447	AAD	LTE-FDD (OFDMA, 5 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.86	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10448	AAD	LTE-FDD (OFDMA, 10 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.93	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10449	AAC	LTE-FDD (OFDMA, 15 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.91	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10450	AAC	LTE-FDD (OFDMA, 20 MHz, E-TRP 3.1, Clipping 44%)	LTE-FDD	7.88	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10451	AAA	WCDMA (BS Test Model 1, 64 QPSK, Clipping 44%)	WCDMA	7.89	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10452	AAD	Validation (Spurs, 10ms, 1ms)	Test	10.00	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10458	AAA	IEEE 802.11ac WFI (160MHz, 64-QAM, R90cc)	WLAN	8.63	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10457	AAA	UMTS-FDD (SC-SDMA)	WCDMA	6.62	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	8.25	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10462	AAA	UMTS-FDD (HSPA, R90cc)	WCDMA	2.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10461	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10462	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10463	AAB	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10464	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10465	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10466	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10467	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10468	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10469	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10470	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10471	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10472	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10473	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10474	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10475	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10476	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10477	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10478	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10479	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10480	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10481	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10482	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10483	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10484	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10485	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10486	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10487	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10488	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10489	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	8.31	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10490	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10491	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10492	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10493	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.41	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10494	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10495	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.37	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10496	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.37	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10497	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.87	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10498	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.40	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10499	AAB	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.68	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10500	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.87	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10501	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.44	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10502	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.82	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10503	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.72	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10504	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.31	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10505	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.54	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10506	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10507	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10508	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.95	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10509	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10510	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.49	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10511	AAC	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.51	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10512	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10513	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Sub)	LTE-TDD	8.42	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10514	AAF	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10515	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 2 Mbps, R90cc)	WLAN	1.58	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10516	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)	WLAN	1.57	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10517	AAA	IEEE 802.11ac WFI (2.4 GHz DSSS, 11 Mbps, R90cc)	WLAN	1.58	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10518	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)	WLAN	8.33	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10519	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)	WLAN	8.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10520	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)	WLAN	8.12	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10521	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)	WLAN	7.97	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10522	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10523	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 48 Mbps, R90cc)	WLAN	8.48	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10524	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 54 Mbps, R90cc)	WLAN	8.27	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10525	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	2.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10526	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10527	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.21	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10528	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10529	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10530	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10531	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.29	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10532	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.29	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10533	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.30	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10534	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10535	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10536	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.32	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10537	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.44	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10538	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.34	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10539	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10540	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.46	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10541	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10542	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10543	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10544	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.47	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10545	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.55	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10546	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.35	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
EX3034-SN-7346 March 30, 2022 <table><tr><td>10547</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.49</td><td>± 0.6 %</td></tr><tr><td>10548</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.37</td><td>± 0.6 %</td></tr><tr><td>10549</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.39</td><td>± 0.6 %</td></tr><tr><td>10550</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.39</td><td>± 0.6 %</td></tr><tr><td>10551</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.42</td><td>± 0.6 %</td></tr><tr><td>10552</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.42</td><td>± 0.6 %</td></tr><tr><td>10553</td><td>AAC</td><td>IEEE 802.11ac WFI (20MHz, MCS1, R90cc)</td><td>WLAN</td><td>8.4</td><td>± 0.6 %</td></tr><tr><td>10554</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS0, R90cc)</td><td>WLAN</td><td>6.48</td><td>± 0.6 %</td></tr><tr><td>10555</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.47</td><td>± 0.6 %</td></tr><tr><td>10556</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.47</td><td>± 0.6 %</td></tr><tr><td>10557</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.52</td><td>± 0.6 %</td></tr><tr><td>10558</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.51</td><td>± 0.6 %</td></tr><tr><td>10559</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.73</td><td>± 0.6 %</td></tr><tr><td>10560</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.56</td><td>± 0.6 %</td></tr><tr><td>10561</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.69</td><td>± 0.6 %</td></tr><tr><td>10562</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.77</td><td>± 0.6 %</td></tr><tr><td>10563</td><td>AAD</td><td>IEEE 802.11ac WFI (160MHz, MCS1, R90cc)</td><td>WLAN</td><td>6.77</td><td>± 0.6 %</td></tr><tr><td>10564</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)</td><td>WLAN</td><td>8.23</td><td>± 0.6 %</td></tr><tr><td>10565</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)</td><td>WLAN</td><td>8.45</td><td>± 0.6 %</td></tr><tr><td>10566</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)</td><td>WLAN</td><td>8.13</td><td>± 0.6 %</td></tr><tr><td>10567</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)</td><td>WLAN</td><td>8.60</td><td>± 0.6 %</td></tr><tr><td>10568</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)</td><td>WLAN</td><td>8.37</td><td>± 0.6 %</td></tr><tr><td>10569</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)</td><td>WLAN</td><td>8.10</td><td>± 0.6 %</td></tr><tr><td>10570</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)</td><td>WLAN</td><td>8.30</td><td>± 0.6 %</td></tr><tr><td>10571</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)</td><td>WLAN</td><td>1.99</td><td>± 0.6 %</td></tr><tr><td>10572</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS, 2 Mbps, R90cc)</td><td>WLAN</td><td>1.99</td><td>± 0.6 %</td></tr><tr><td>10573</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)</td><td>WLAN</td><td>1.98</td><td>± 0.6 %</td></tr><tr><td>10574</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS, 11 Mbps, R90cc)</td><td>WLAN</td><td>1.98</td><td>± 0.6 %</td></tr><tr><td>10575</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 6 Mbps, R90cc)</td><td>WLAN</td><td>8.89</td><td>± 0.6 %</td></tr><tr><td>10576</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 9 Mbps, R90cc)</td><td>WLAN</td><td>8.80</td><td>± 0.6 %</td></tr><tr><td>10577</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)</td><td>WLAN</td><td>8.79</td><td>± 0.6 %</td></tr><tr><td>10578</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)</td><td>WLAN</td><td>8.49</td><td>± 0.6 %</td></tr><tr><td>10579</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)</td><td>WLAN</td><td>8.36</td><td>± 0.6 %</td></tr><tr><td>10580</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)</td><td>WLAN</td><td>8.76</td><td>± 0.6 %</td></tr><tr><td>10581</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)</td><td>WLAN</td><td>8.35</td><td>± 0.6 %</td></tr><tr><td>10582</td><td>AAA</td><td>IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)</td><td>WLAN</td><td>8.67</td><td>± 0.6 %</td></tr><tr><td>10583</td><td>AAF</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)</td><td>WLAN</td><td>8.59</td><td>± 0.6 %</td></tr><tr><td>10584</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 9 Mbps, R90cc)</td><td>WLAN</td><td>8.60</td><td>± 0.6 %</td></tr><tr><td>10585</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)</td><td>WLAN</td><td>8.70</td><td>± 0.6 %</td></tr><tr><td>10586</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)</td><td>WLAN</td><td>8.48</td><td>± 0.6 %</td></tr><tr><td>10587</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)</td><td>WLAN</td><td>8.36</td><td>± 0.6 %</td></tr><tr><td>10588</td><td>AAC</td><td>IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)</td><td>WLAN</td></tr></table>	10547	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.49	± 0.6 %	10548	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.37	± 0.6 %	10549	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %	10550	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %	10551	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %	10552	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %	10553	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.4	± 0.6 %	10554	AAD	IEEE 802.11ac WFI (160MHz, MCS0, R90cc)	WLAN	6.48	± 0.6 %	10555	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.47	± 0.6 %	10556	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.47	± 0.6 %	10557	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.52	± 0.6 %	10558	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.51	± 0.6 %	10559	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.73	± 0.6 %	10560	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.56	± 0.6 %	10561	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.69	± 0.6 %	10562	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.77	± 0.6 %	10563	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.77	± 0.6 %	10564	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)	WLAN	8.23	± 0.6 %	10565	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)	WLAN	8.45	± 0.6 %	10566	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)	WLAN	8.13	± 0.6 %	10567	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)	WLAN	8.60	± 0.6 %	10568	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)	WLAN	8.37	± 0.6 %	10569	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)	WLAN	8.10	± 0.6 %	10570	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)	WLAN	8.30	± 0.6 %	10571	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)	WLAN	1.99	± 0.6 %	10572	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 2 Mbps, R90cc)	WLAN	1.99	± 0.6 %	10573	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)	WLAN	1.98	± 0.6 %	10574	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 11 Mbps, R90cc)	WLAN	1.98	± 0.6 %	10575	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 6 Mbps, R90cc)	WLAN	8.89	± 0.6 %	10576	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 9 Mbps, R90cc)	WLAN	8.80	± 0.6 %	10577	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)	WLAN	8.79	± 0.6 %	10578	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)	WLAN	8.49	± 0.6 %	10579	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)	WLAN	8.36	± 0.6 %	10580	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)	WLAN	8.76	± 0.6 %	10581	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)	WLAN	8.35	± 0.6 %	10582	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)	WLAN	8.67	± 0.6 %	10583	AAF	IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)	WLAN	8.59	± 0.6 %	10584	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 9 Mbps, R90cc)	WLAN	8.60	± 0.6 %	10585	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)	WLAN	8.70	± 0.6 %	10586	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)	WLAN	8.48	± 0.6 %	10587	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)	WLAN	8.36	± 0.6 %	10588	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)	WLAN																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
10547	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.49	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10548	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.37	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10549	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10550	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.39	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10551	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10552	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.42	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10553	AAC	IEEE 802.11ac WFI (20MHz, MCS1, R90cc)	WLAN	8.4	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10554	AAD	IEEE 802.11ac WFI (160MHz, MCS0, R90cc)	WLAN	6.48	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10555	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.47	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10556	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.47	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10557	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.52	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10558	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.51	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10559	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.73	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10560	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.56	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10561	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.69	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10562	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.77	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10563	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90cc)	WLAN	6.77	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10564	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)	WLAN	8.23	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10565	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)	WLAN	8.45	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10566	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)	WLAN	8.13	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10567	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)	WLAN	8.60	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10568	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)	WLAN	8.37	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10569	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)	WLAN	8.10	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10570	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)	WLAN	8.30	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10571	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 1 Mbps, R90cc)	WLAN	1.99	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10572	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 2 Mbps, R90cc)	WLAN	1.99	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10573	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 5.5 Mbps, R90cc)	WLAN	1.98	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10574	AAA	IEEE 802.11g WFI (2.4 GHz DSSS, 11 Mbps, R90cc)	WLAN	1.98	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10575	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 6 Mbps, R90cc)	WLAN	8.89	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10576	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 9 Mbps, R90cc)	WLAN	8.80	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10577	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 12 Mbps, R90cc)	WLAN	8.79	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10578	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 18 Mbps, R90cc)	WLAN	8.49	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10579	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 24 Mbps, R90cc)	WLAN	8.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10580	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 36 Mbps, R90cc)	WLAN	8.76	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10581	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 48 Mbps, R90cc)	WLAN	8.35	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10582	AAA	IEEE 802.11g WFI (2.4 GHz DSSS-OFDM, 54 Mbps, R90cc)	WLAN	8.67	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10583	AAF	IEEE 802.11ac WFI (5 GHz OFDM, 6 Mbps, R90cc)	WLAN	8.59	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10584	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 9 Mbps, R90cc)	WLAN	8.60	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10585	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 12 Mbps, R90cc)	WLAN	8.70	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10586	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 18 Mbps, R90cc)	WLAN	8.48	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10587	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 24 Mbps, R90cc)	WLAN	8.36	± 0.6 %																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
10588	AAC	IEEE 802.11ac WFI (5 GHz OFDM, 36 Mbps, R90cc)	WLAN																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted under the applicable laws. The results otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.DCcheck@sgs.com

China 10 Weiyue Road, Development Zone, Kunshan, Jiangsu, China	215300	t:(86-512) 5735 5888	t:(86-512) 57370818	www.sgs.com
中国·江苏·昆山开发区伟业路10号	邮编: 215300	t:(86-512) 57355888	t:(86-512) 57370818	sgs.china@sgs.com

EXC304- SN 7346

March 30, 2022

15985	AAA	50 NR DL (CP-CPOM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.54	± 9.8 %
15986	AAA	50 NR DL (CP-CPOM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.50	± 9.8 %
15987	AAA	50 NR DL (CP-CPOM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.50	± 9.8 %
15988	AAA	50 NR DL (CP-CPOM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.38	± 9.8 %
15989	AAA	50 NR DL (CP-CPOM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.33	± 9.8 %
15990	AAA	50 NR DL (CP-CPOM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.32	± 9.8 %

¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the test value.

Continue to: EXC304- SN 7346

Page 27 of 28

EXC304- SN 7346

March 30, 2022

15985	AAA	50 NR DL (CP-CPOM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.54	± 9.8 %
15986	AAA	50 NR DL (CP-CPOM, TM 3.1, 50 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.50	± 9.8 %
15987	AAA	50 NR DL (CP-CPOM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.50	± 9.8 %
15988	AAA	50 NR DL (CP-CPOM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.38	± 9.8 %
15989	AAA	50 NR DL (CP-CPOM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.33	± 9.8 %
15990	AAA	50 NR DL (CP-CPOM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	SG NR PR1 TDD	9.32	± 9.8 %

¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the test value.

Continue to: EXC304- SN 7346

Page 24 of 24

4 Impedance and return loss

Dipole CLA150 SN 4025				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
2021/4/26	-31.4	/	47.8	/
Dipole D450V3 SN 1103				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	$\Delta\Omega$
2021/4/21	-23	/	57.1	/



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10 Weiye Road, Development Zone, Kunshan, Jiangsu, China 215300 t(86-512) 5735 5888 f(86-512) 57370818 www.sgsgroup.com.cn
中国·江苏·昆山开发区伟业路10号 邮编: 215300 t(86-512) 57355888 f(86-512) 57370818 sgs.china@sgs.com