



## Conducted Spurious Emissions

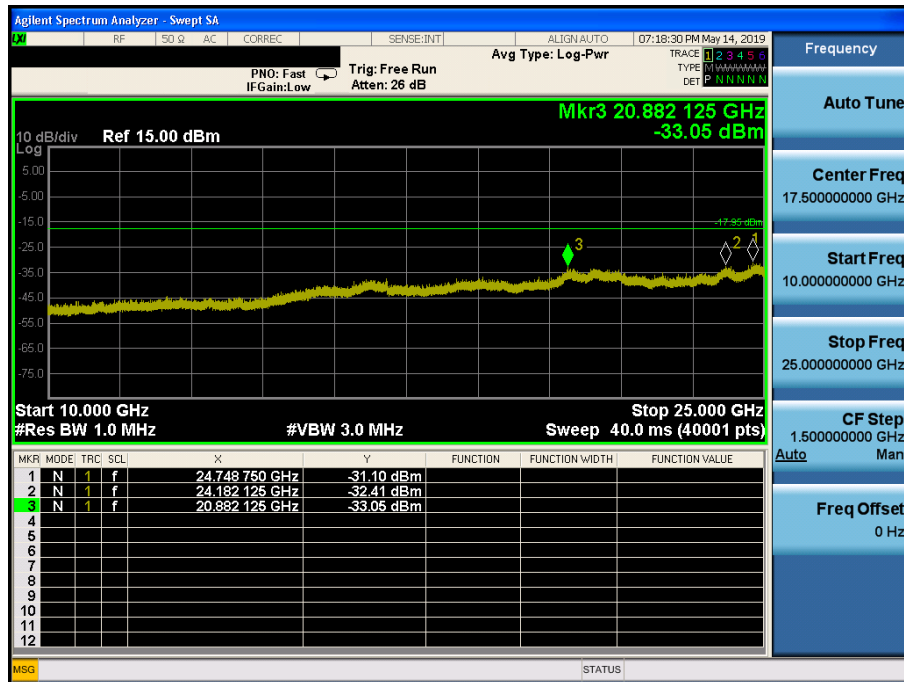


## 802.11g & 2437


### Reference

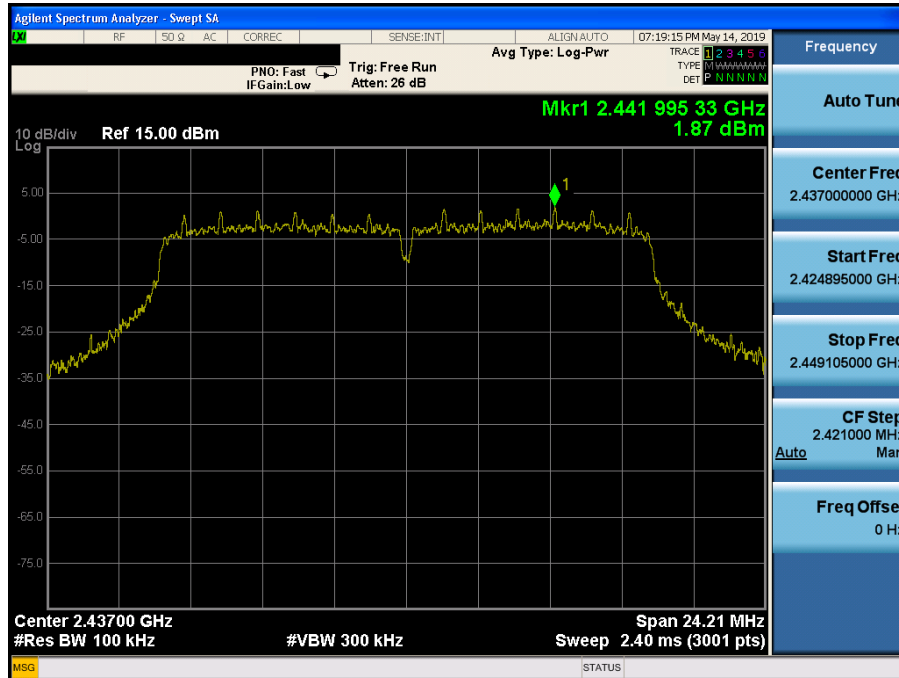

### Conducted Spurious Emissions

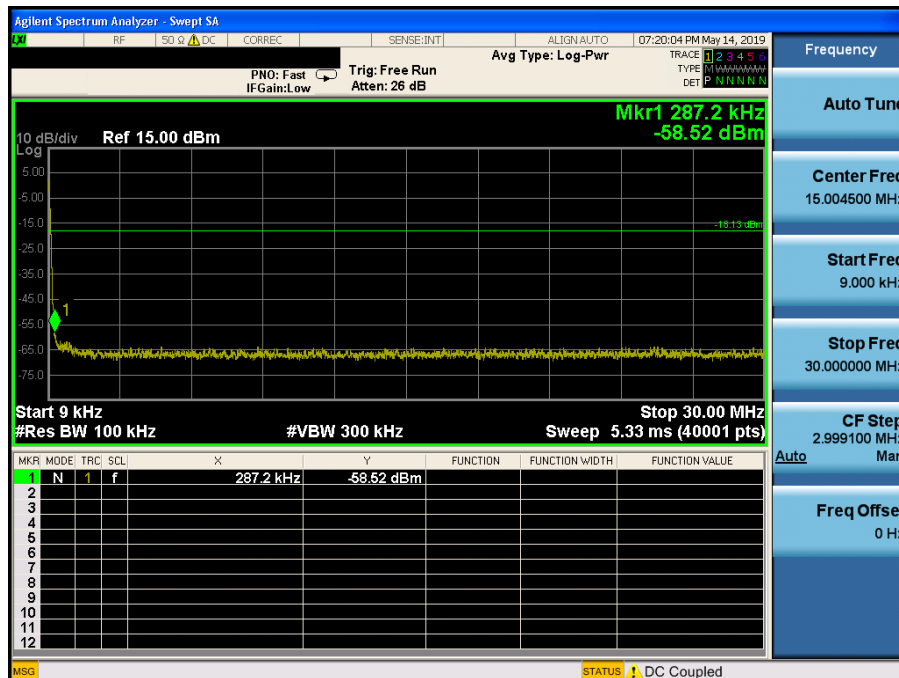


## Conducted Spurious Emissions

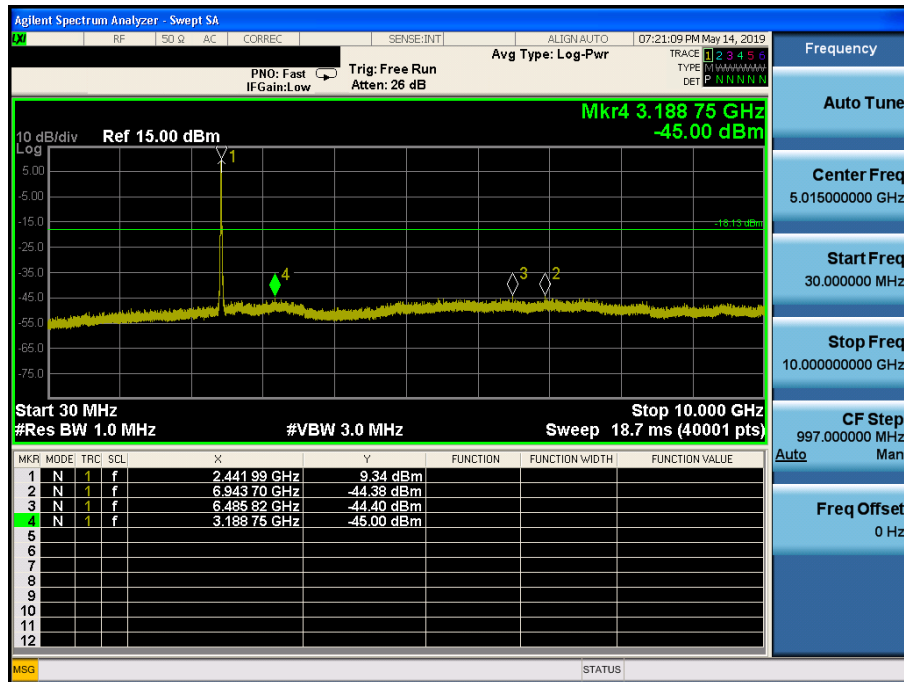


## 802.11g &amp; 2462



## Reference

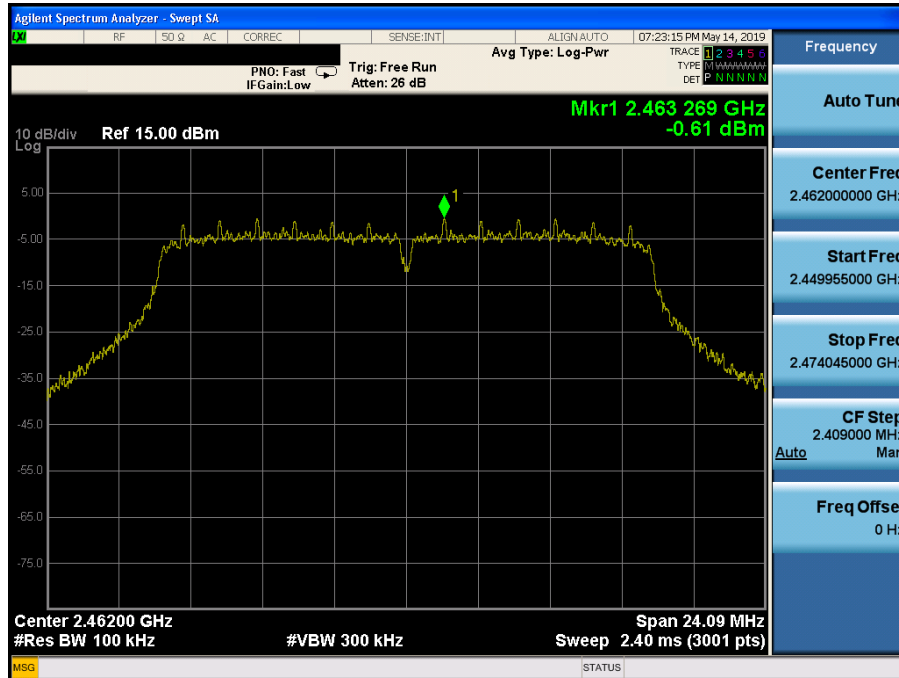


## High Band-edge

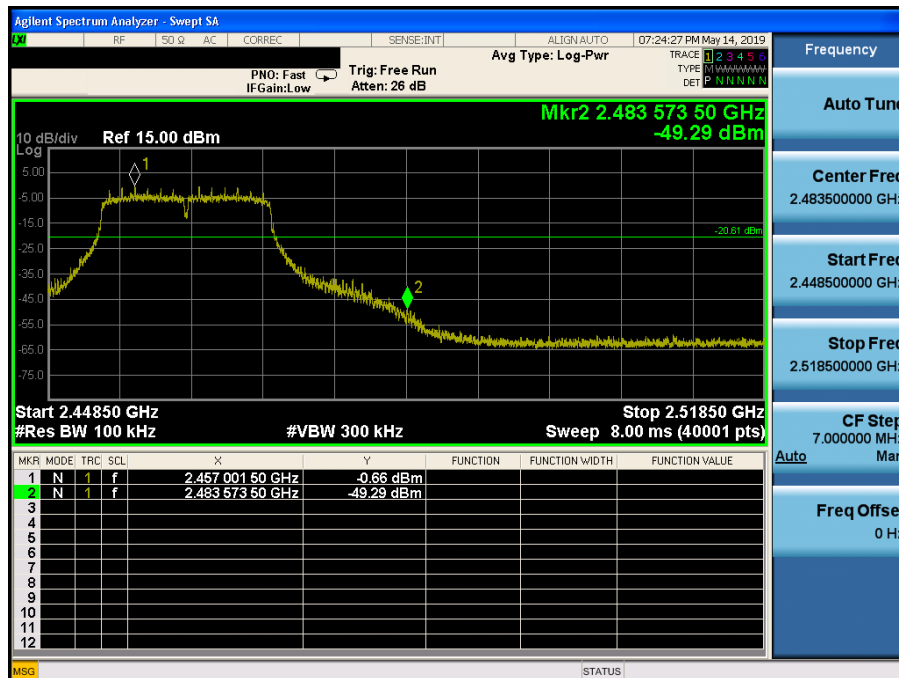

## Conducted Spurious Emissions

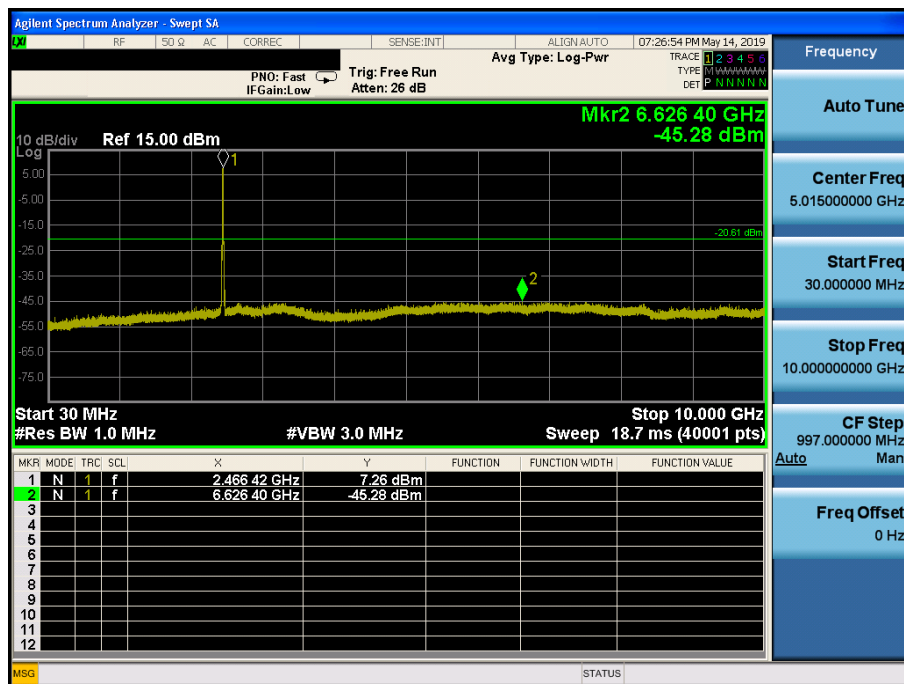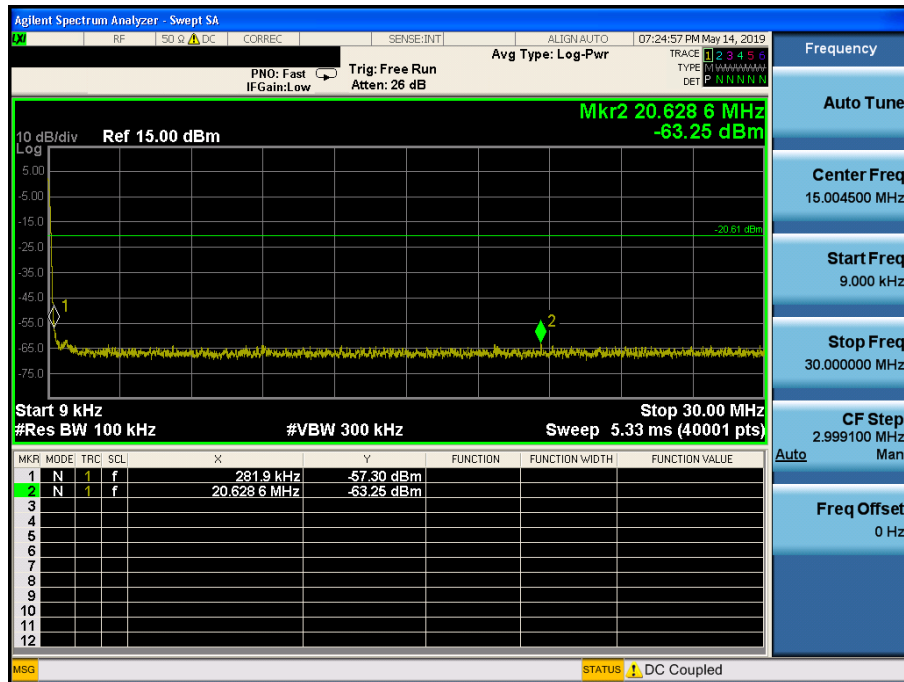


## Conducted Spurious Emissions

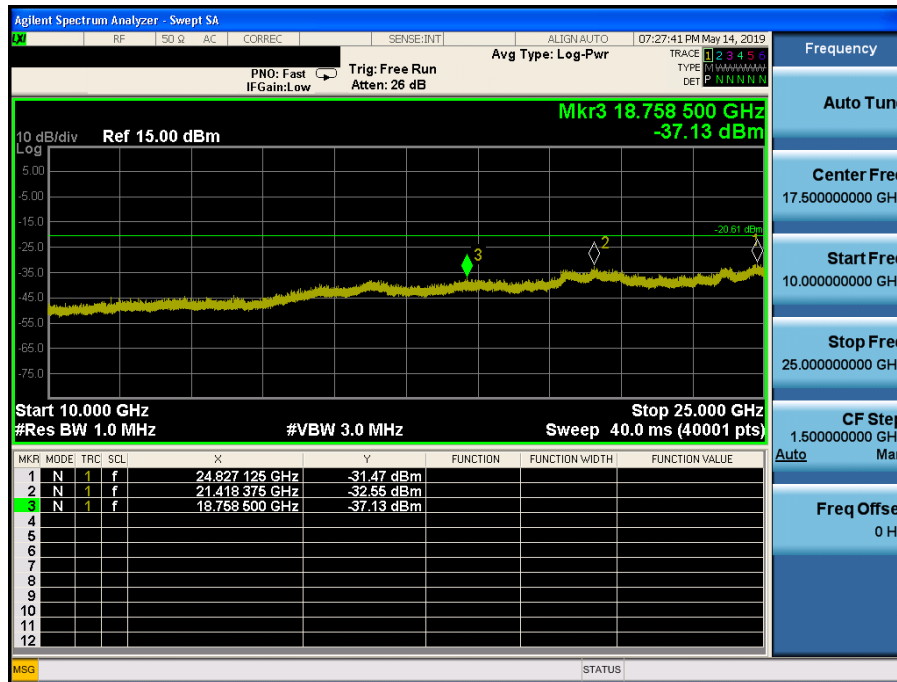


## 802.11g & 2472



### Reference

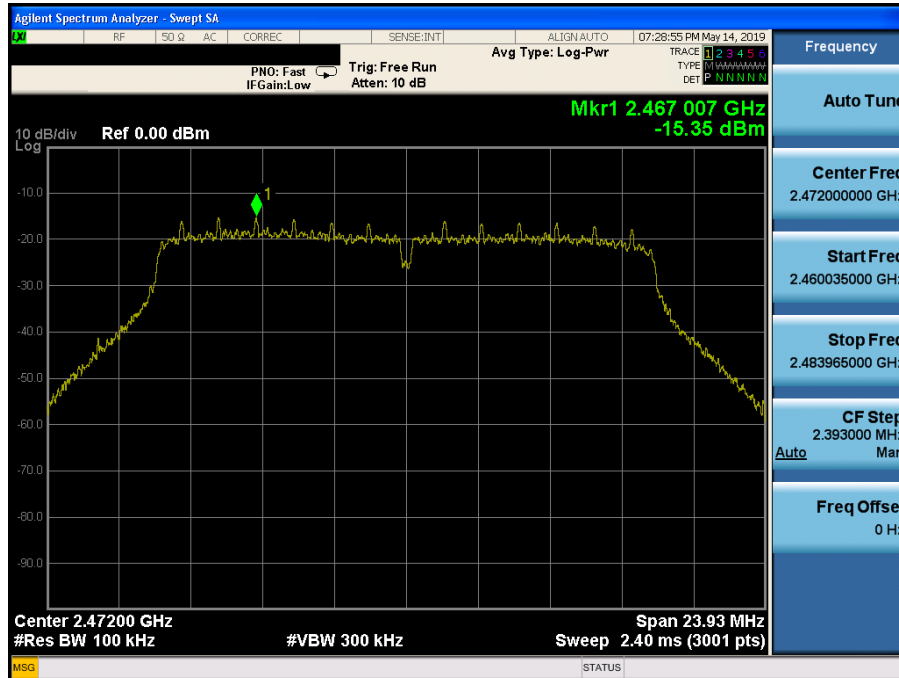

### High Band-edge

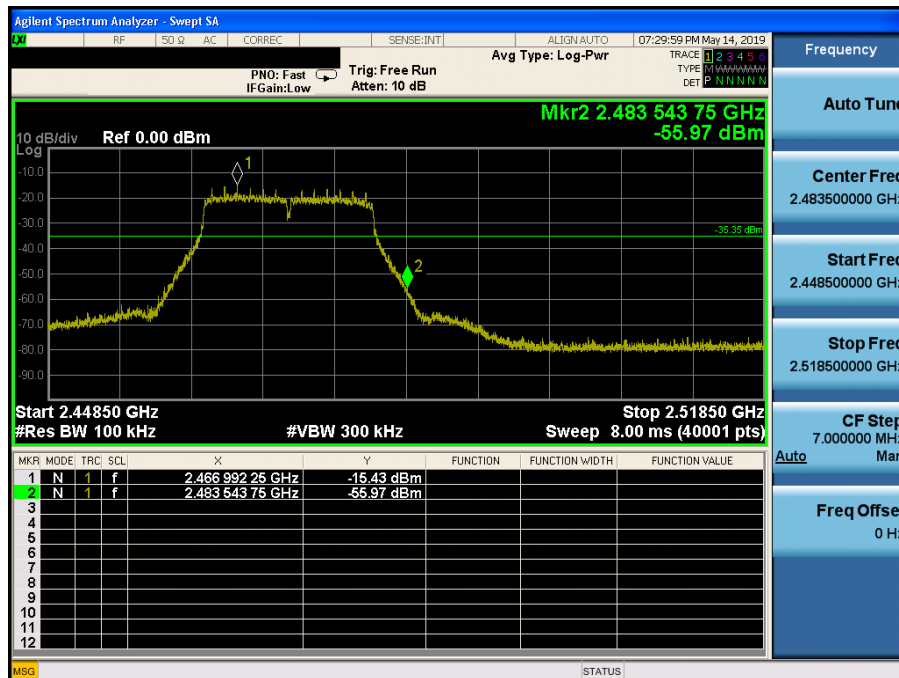


## Conducted Spurious Emissions

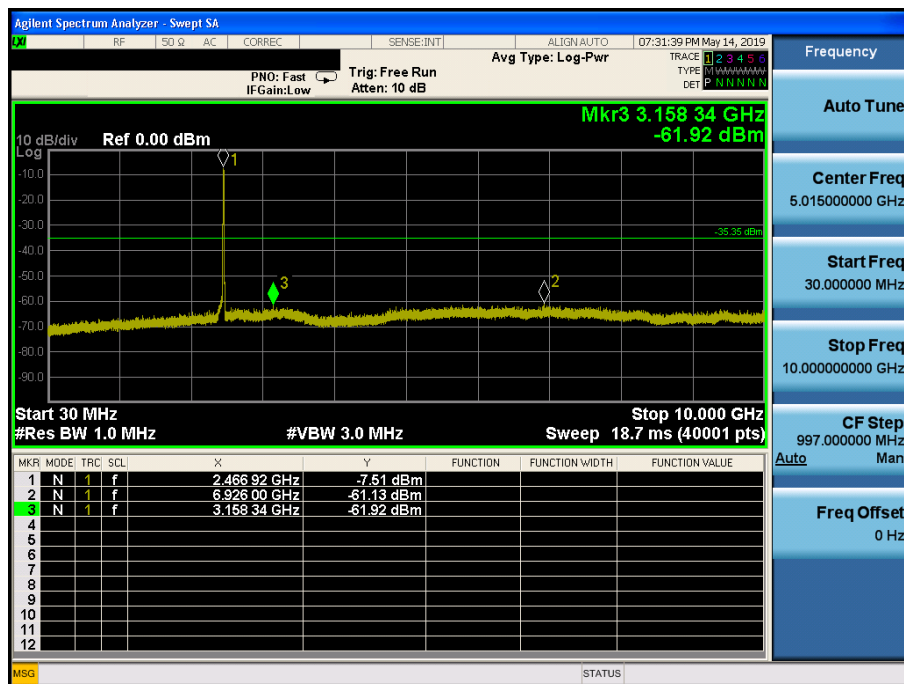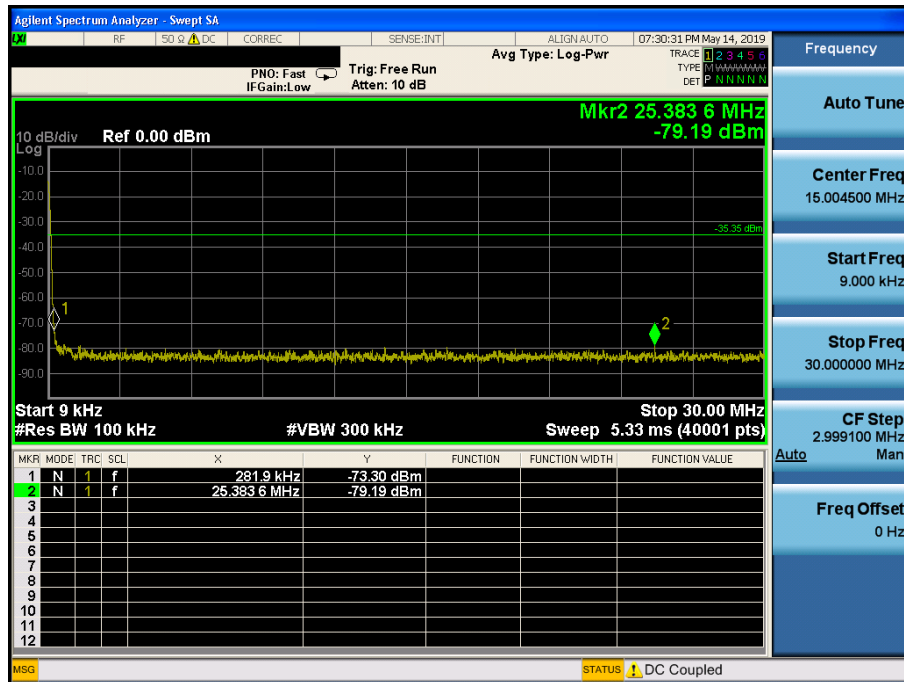




## Conducted Spurious Emissions

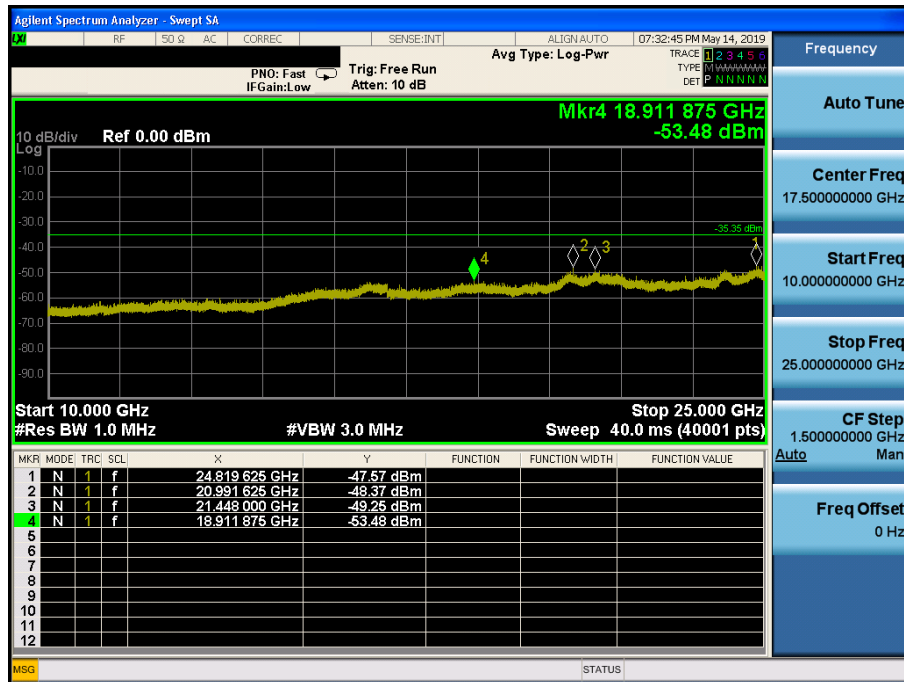


## 802.11n &amp; 2412



## Reference

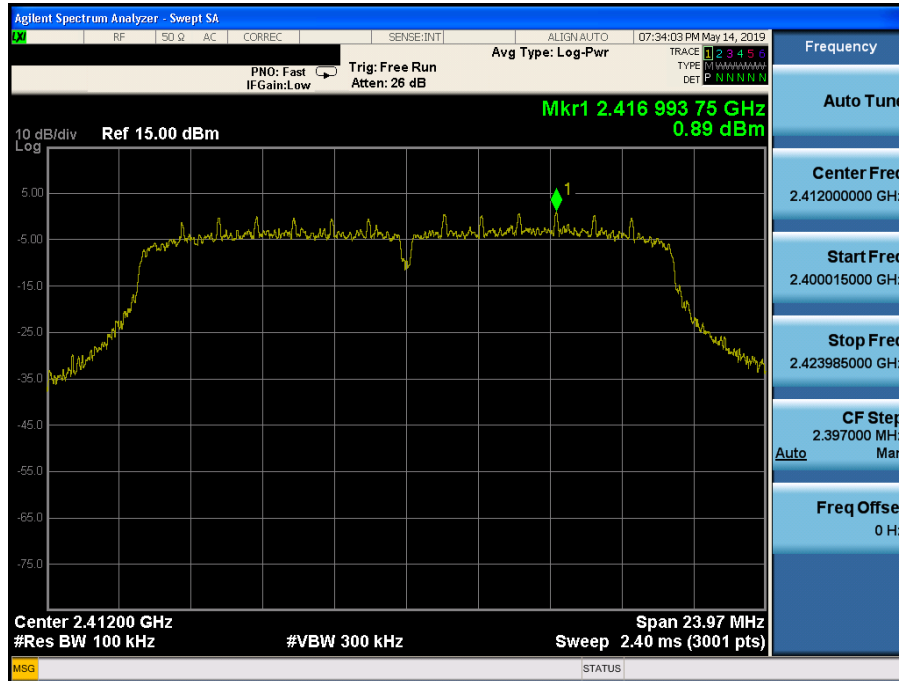

## Low Band-edge

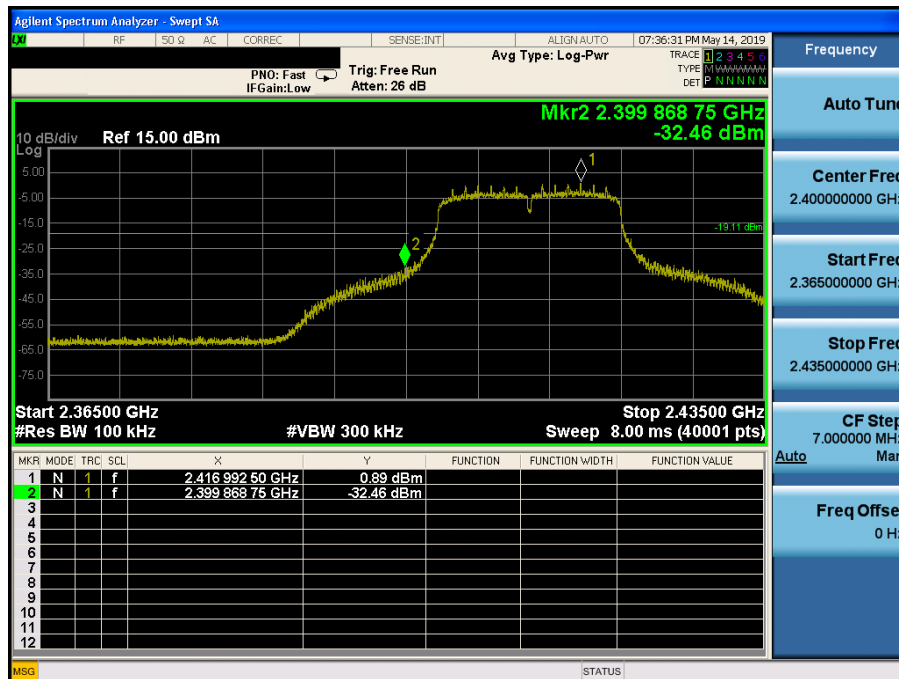

## Conducted Spurious Emissions

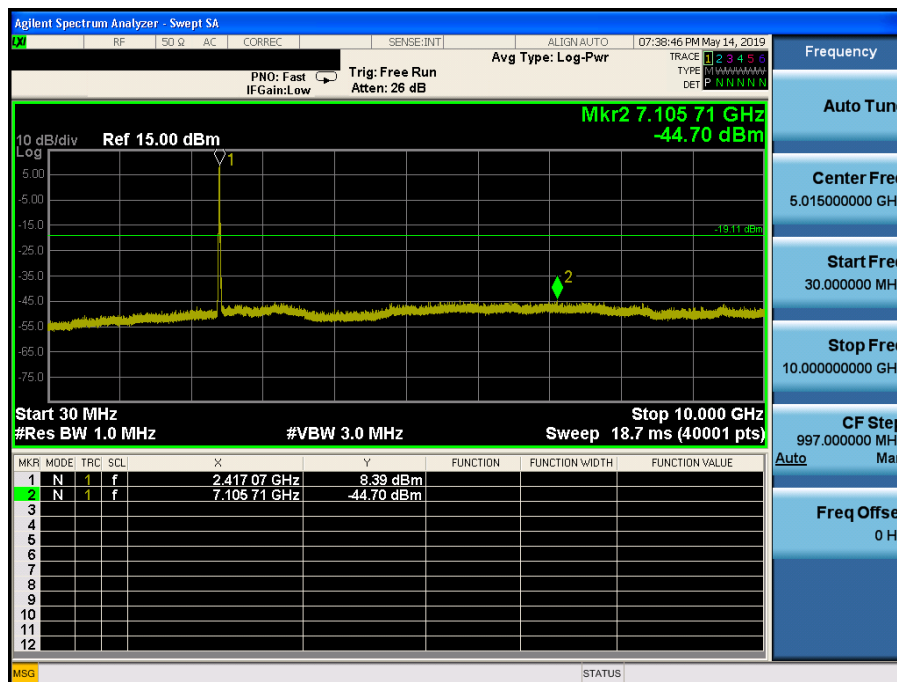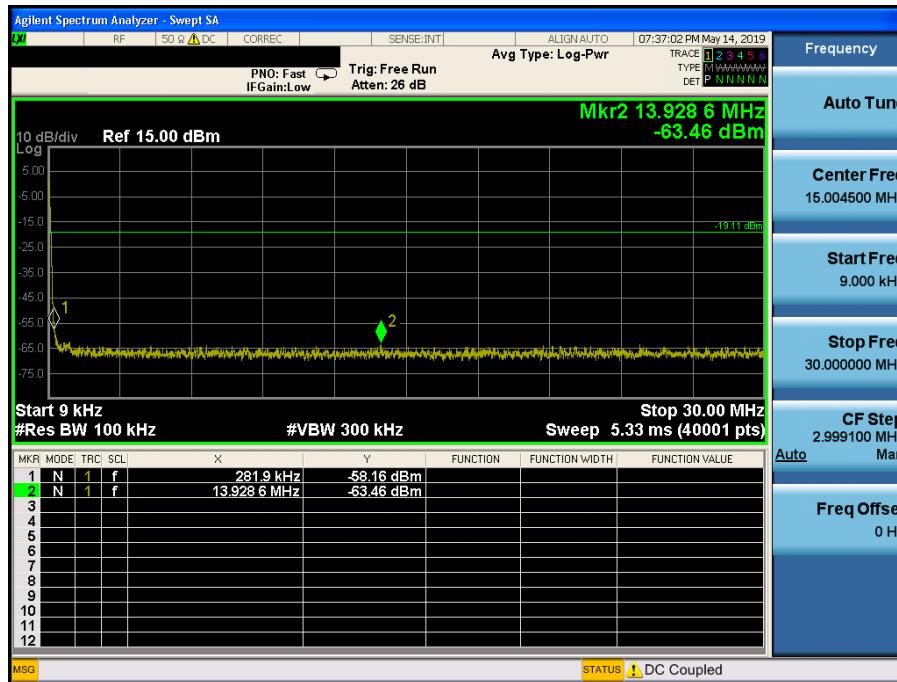


## Conducted Spurious Emissions




## 802.11n & 2437

### Reference

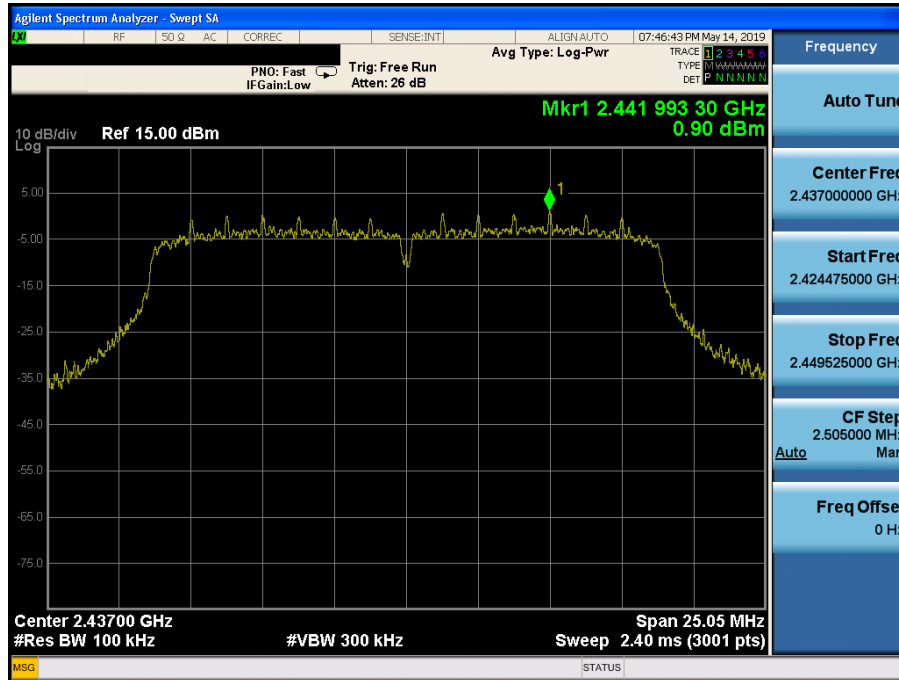

### Conducted Spurious Emissions

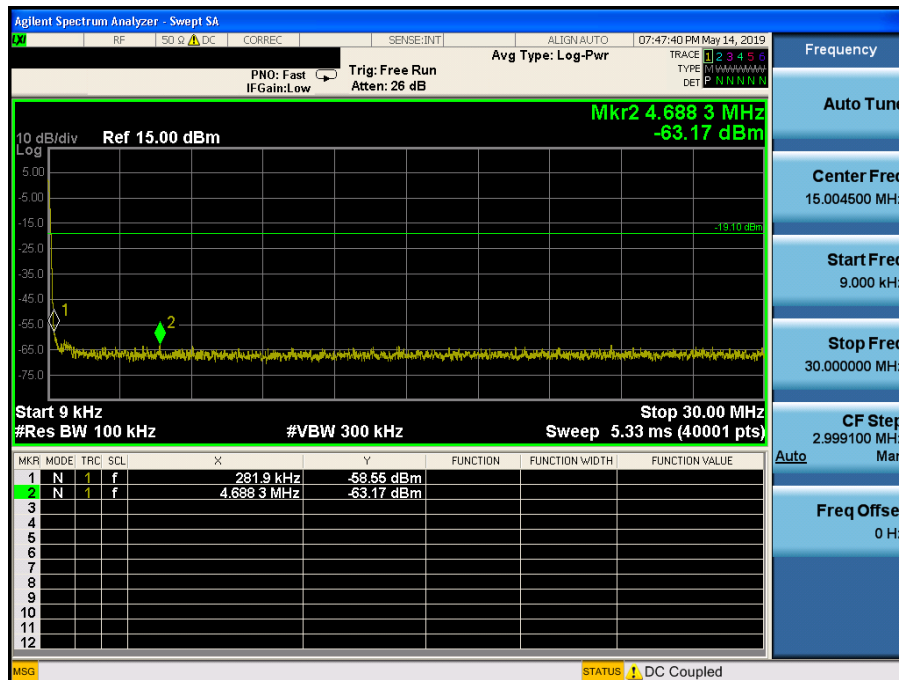


## Conducted Spurious Emissions




## 802.11n &amp; 2462



## Reference

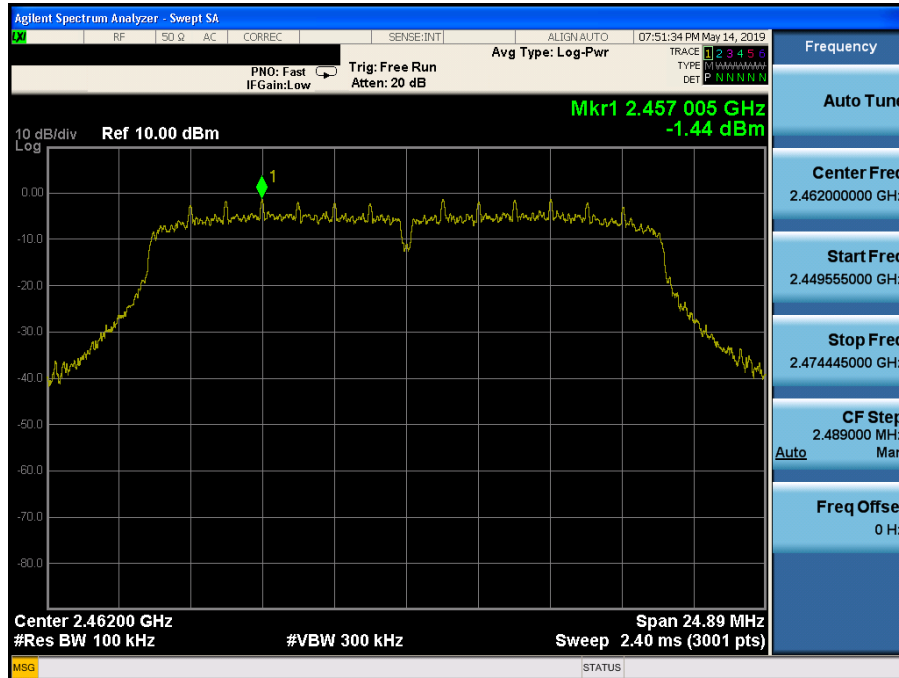

## High Band-edge

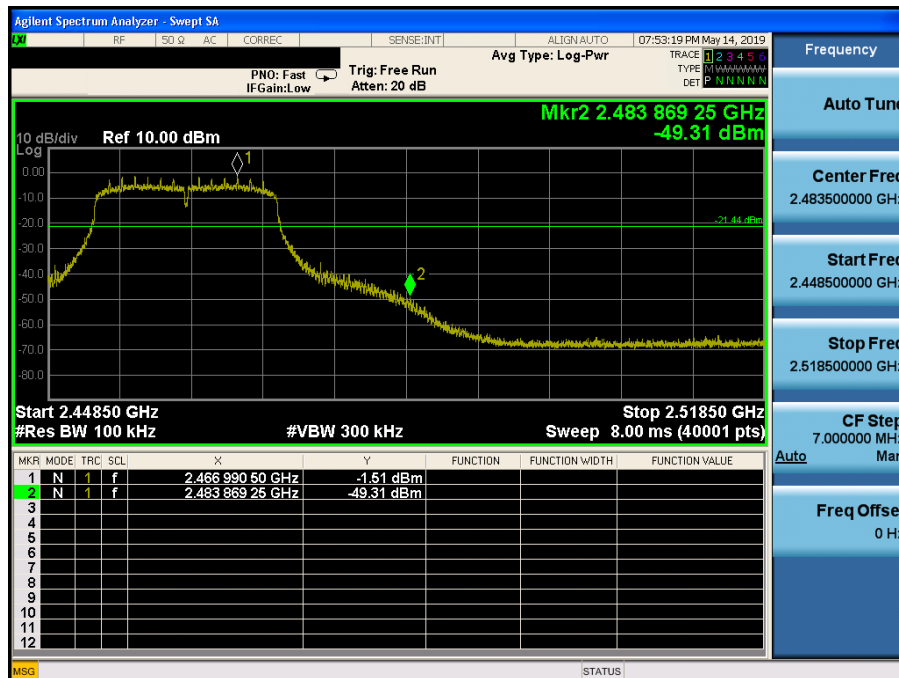


## Conducted Spurious Emissions

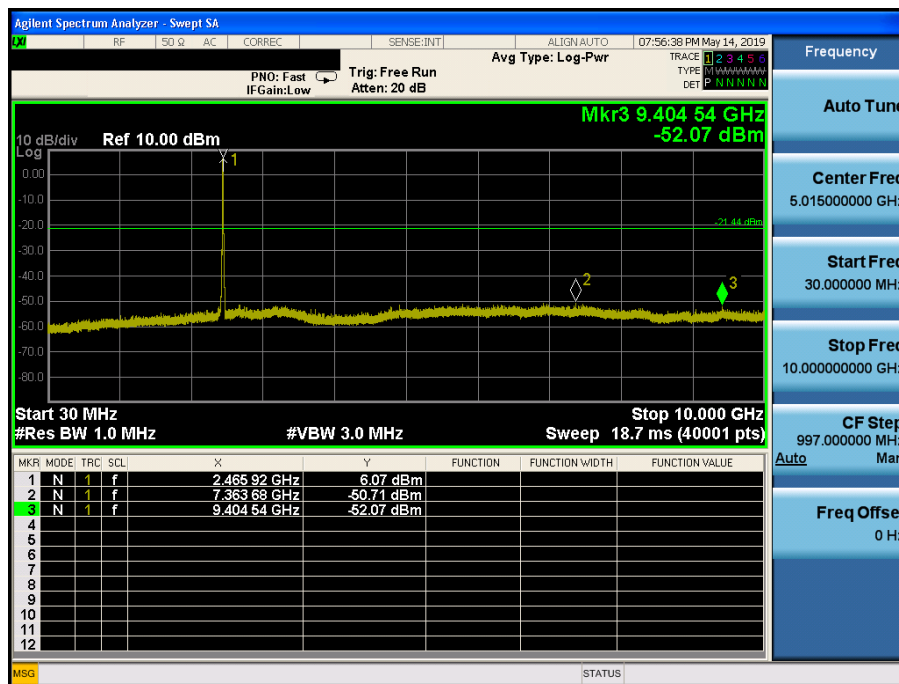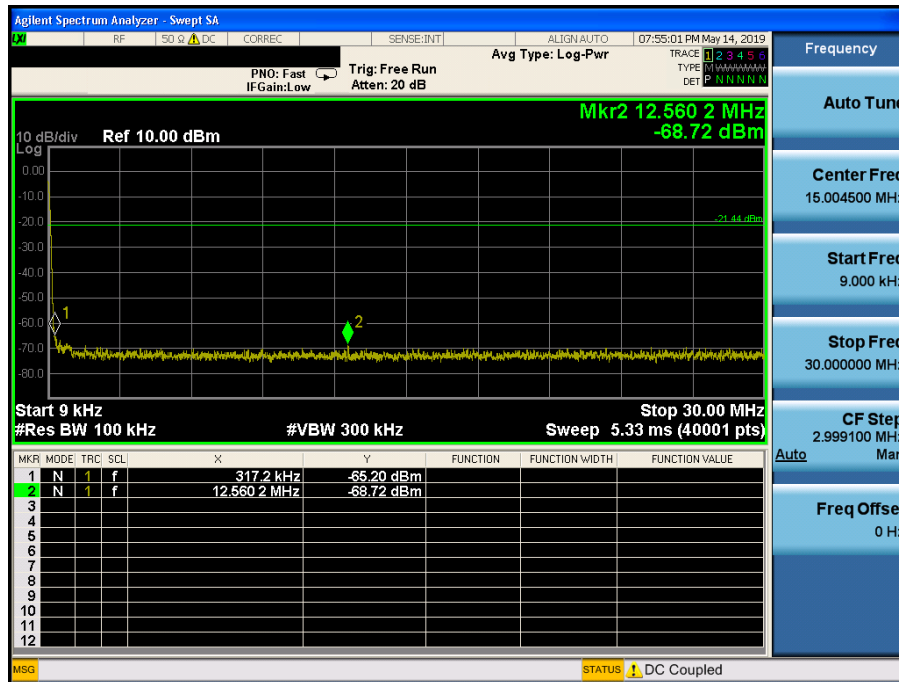




## Conducted Spurious Emissions

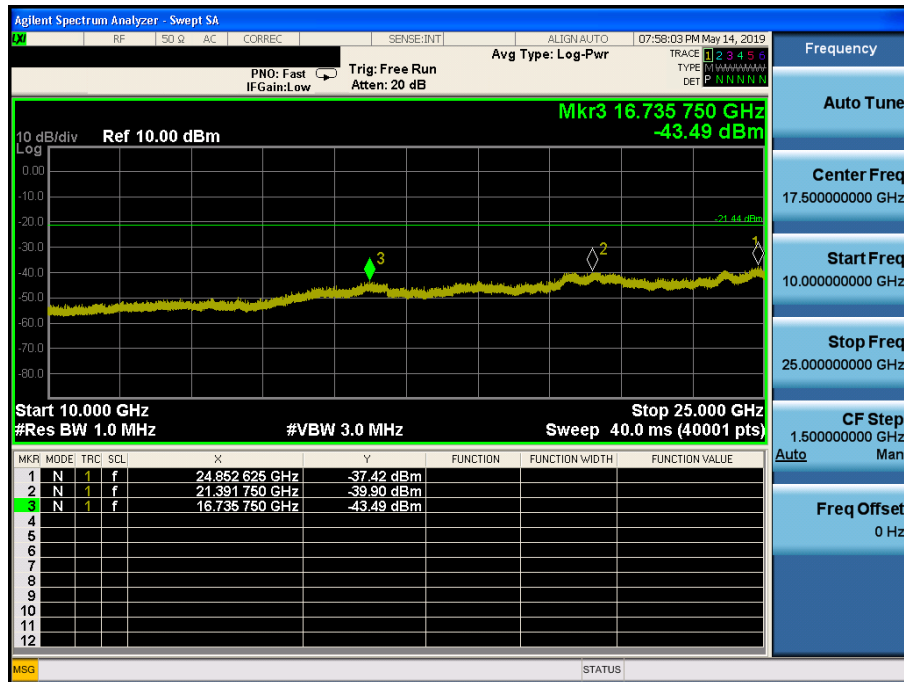

## 802.11n &amp; 2472



## Reference

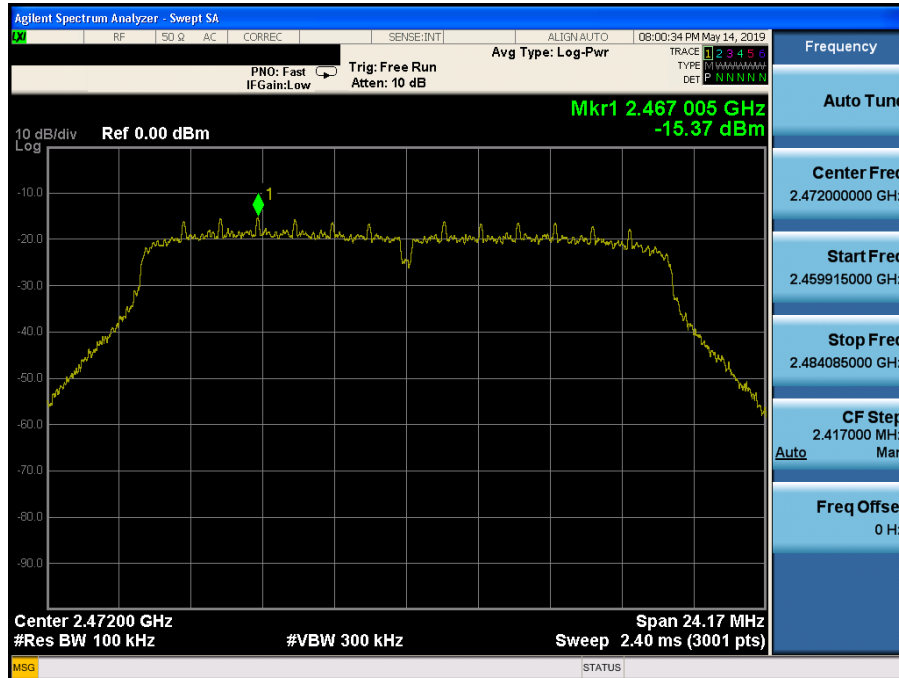


## High Band-edge



## Conducted Spurious Emissions

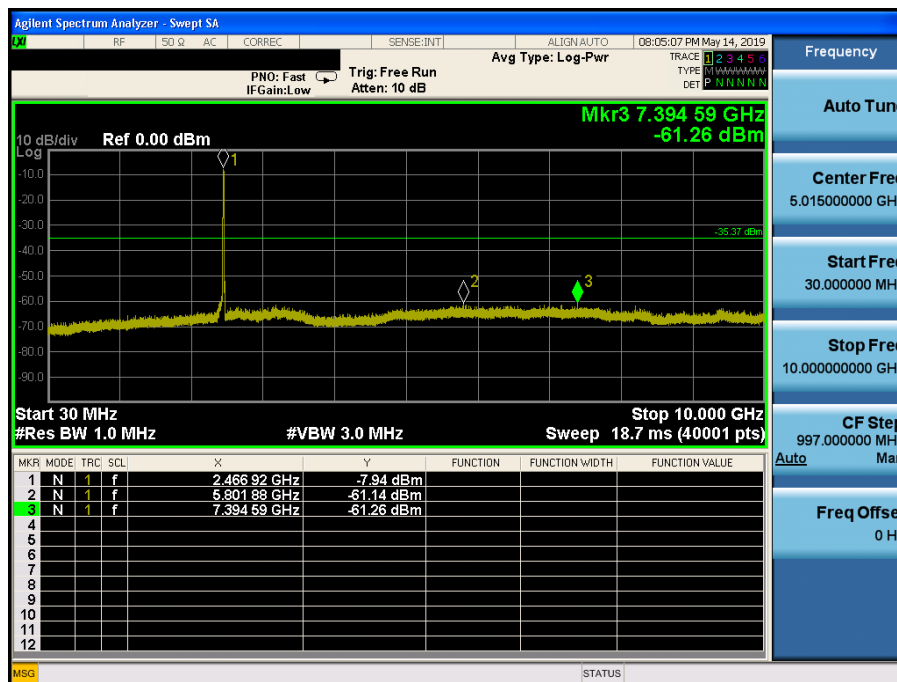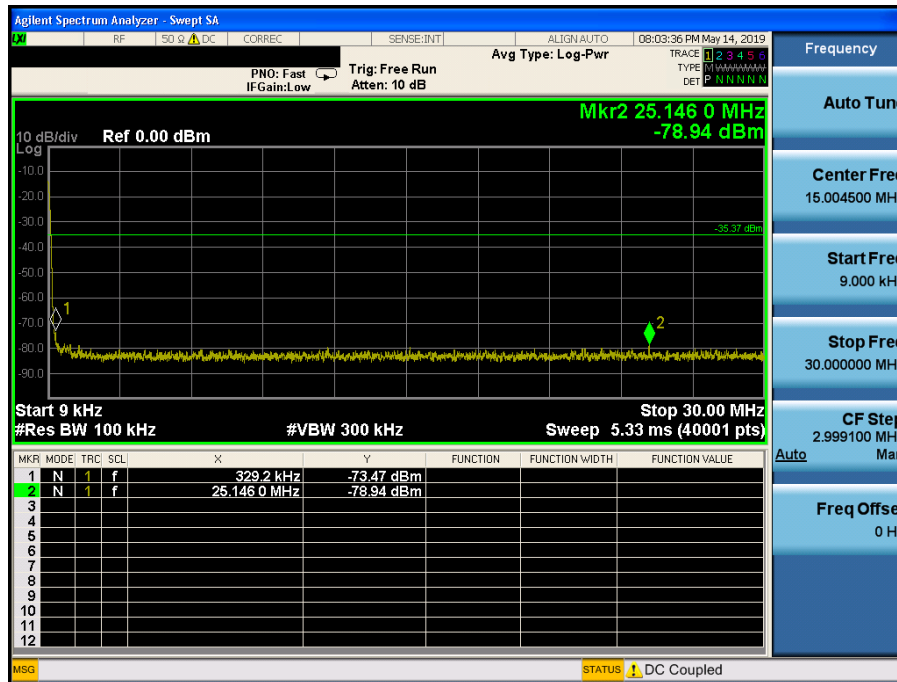

## Conducted Spurious Emissions

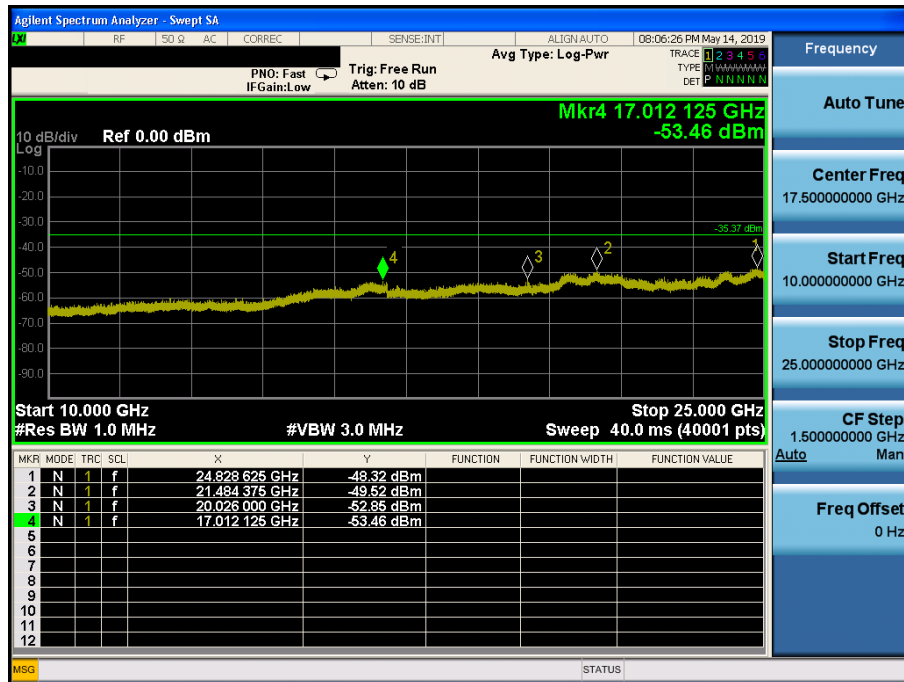

## 8.5 Radiated spurious emissions

### ■ Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the operating frequency band, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 KHz bandwidth within the band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed.

#### ▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.


#### ▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	608 ~ 614	3345.8 ~ 3358		
		960 ~ 1240	3600 ~ 4400		

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.


## Test Configuration

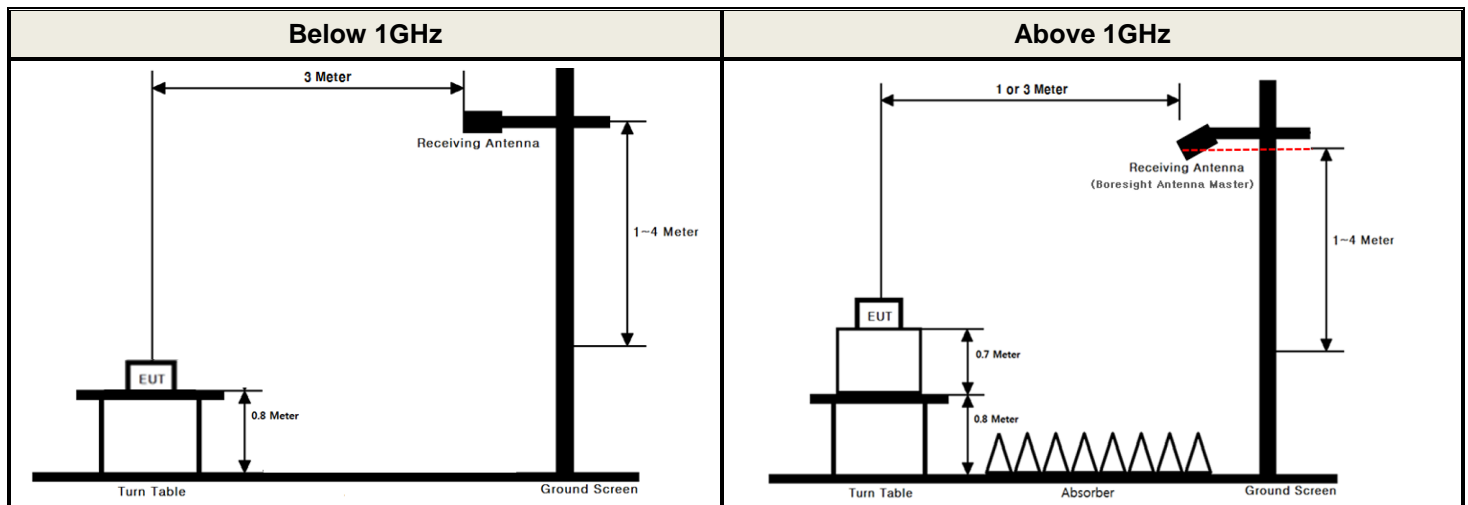

## Test Procedure

1. The EUT is placed on a non-conductive table, emission measurements at below 1 GHz, the table height is 80 cm and above 1 GHz, the table height is 1.5 m.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1 or 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

## Conducted Measurement

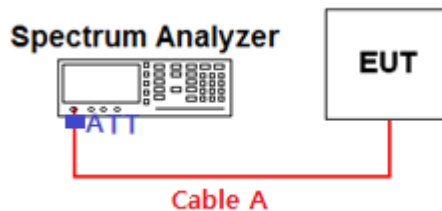

Path loss information

Frequency (GHz)	Path Loss (dB)	Frequency (GHz)	Path Loss (dB)
0.03	2.60	15	6.91
1	3.41	20	7.49
2.412 & 2.437 & 2.462 & 2.472	4.12	25	8.73
5	4.78	-	-
10	5.52	-	-

Note 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (S/A's correction factor) = Cable A  
(Attenuator, Applied only when it was used externally)

## **Measurement Instrument Setting for Radiated Emission Measurements.**

- KDB558074 D01v05 - Section 8.6
- ANSI C63.10-2013 – Section 11.12

### **Peak Measurement**

RBW = As specified in below table, VBW  $\geq 3 \times$  RBW, Sweep = Auto, Detector = Peak, Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

### **Average Measurement:**

1. RBW = 1 MHz (unless otherwise specified).
2. VBW  $\geq 3 \times$  RBW.
3. Detector = RMS (Number of points  $\geq 2 \times$  Span / RBW)
4. Averaging type = power. (i.e., RMS)
5. Sweep time = auto.
6. Perform a trace average of at least 100 traces.
7. A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
  - 1) If power averaging (RMS) mode was used in step 4, then the applicable correction factor is  $10 \log(1/D)$ , where D is the duty cycle.
  - 2) If linear voltage averaging mode was used in step 4, then the applicable correction factor is  $20 \log(1/D)$ , where D is the duty cycle.
  - 3) If a specific emission is demonstrated to be continuous ( $\geq 98$  percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

### **Duty Cycle Correction factor**

Test Mode	Date rate	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	D = T <sub>on</sub> / (T <sub>on+off</sub> )	DCCF = $10 \log(1/D)$ (dB)
802.11b	11 Mbps	1.285	1.303	0.9862	0.07
802.11g	9 Mbps	1.360	1.378	0.9869	0.06
802.11n	MCS 0	1.880	1.900	0.9895	0.05

Note1: Where, T= Transmission duration / D= Duty cycle

Note2: Please refer to the appendix I for duty cycle plots.

## **Test Results: Comply**

Please refer to next page for data table and the appendix II for worst data plots.

**Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : 802.11b**

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	2389.47	V	Z	PK	53.02	2.77	N/A	N/A	55.79	74.00	18.21
	2389.53	V	Z	AV	42.35	2.77	N/A	N/A	45.12	54.00	8.88
	4823.64	H	X	PK	49.78	1.64	N/A	N/A	51.42	74.00	22.58
	4823.64	H	X	AV	39.48	1.64	N/A	N/A	41.12	54.00	12.88
2437	4874.27	H	X	PK	50.18	1.62	N/A	N/A	51.80	74.00	22.20
	4873.70	H	X	AV	39.91	1.62	N/A	N/A	41.53	54.00	12.47
2462	2483.95	V	Z	PK	53.22	3.27	N/A	N/A	56.49	74.00	17.51
	2483.83	V	Z	AV	43.14	3.26	N/A	N/A	46.40	54.00	7.60
	4923.90	H	X	PK	49.87	1.68	N/A	N/A	51.55	74.00	22.45
	4923.66	H	X	AV	39.36	1.68	N/A	N/A	41.04	54.00	12.96
2472	2483.81	V	Z	PK	51.74	3.26	N/A	N/A	55.00	74.00	19.00
	2483.76	V	Z	AV	41.94	3.26	N/A	N/A	45.20	54.00	8.80
	4943.55	H	X	PK	50.19	1.73	N/A	N/A	51.92	74.00	22.08
	4943.60	H	X	AV	39.46	1.73	N/A	N/A	41.19	54.00	12.81

**Note.**

- The radiated emissions were investigated 9kHz to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.  

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor.  
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.  
- Calculation of distance factor =  $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$



**Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : 802.11g**

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	2389.84	V	Z	PK	56.97	2.77	N/A	N/A	59.74	74.00	14.26
	2389.87	V	Z	AV	43.47	2.77	N/A	N/A	46.24	54.00	7.76
	4823.83	H	X	PK	50.51	1.64	N/A	N/A	52.15	74.00	21.85
	4824.40	H	X	AV	39.71	1.64	N/A	N/A	41.35	54.00	12.65
2437	4874.30	H	X	PK	50.35	1.62	N/A	N/A	51.97	74.00	22.03
	4874.28	H	X	AV	39.51	1.62	N/A	N/A	41.13	54.00	12.87
2462	2483.73	V	Z	PK	59.62	3.26	N/A	N/A	62.88	74.00	11.12
	2483.79	V	Z	AV	45.39	3.26	N/A	N/A	48.65	54.00	5.35
	4924.08	H	X	PK	50.62	1.68	N/A	N/A	52.30	74.00	21.70
	4923.59	H	X	AV	39.35	1.68	N/A	N/A	41.03	54.00	12.97
2472	2483.76	V	Z	PK	53.31	3.26	N/A	N/A	56.57	74.00	17.43
	2483.64	V	Z	AV	42.26	3.26	N/A	N/A	45.52	54.00	8.48
	4944.48	H	X	PK	50.56	1.73	N/A	N/A	52.29	74.00	21.71
	4943.75	H	X	AV	39.30	1.73	N/A	N/A	41.03	54.00	12.97

**Note.**

- The radiated emissions were investigated 9kHz to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.  

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor.  
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.  
- Calculation of distance factor =  $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

**Radiated Spurious Emissions data(9 kHz ~ 25 GHz) : 802.11n**

Tested Frequency	Frequency (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2412	2389.79	V	Z	PK	52.18	2.77	N/A	N/A	54.95	74.00	19.05
	2389.75	V	Z	AV	43.51	2.77	N/A	N/A	46.28	54.00	7.72
	4823.68	H	X	PK	50.05	1.64	N/A	N/A	51.69	74.00	22.31
	4823.97	H	X	AV	39.20	1.64	N/A	N/A	40.84	54.00	13.16
2437	4874.50	H	X	PK	50.14	1.62	N/A	N/A	51.76	74.00	22.24
	4873.86	H	X	AV	39.79	1.62	N/A	N/A	41.41	54.00	12.59
2462	2483.78	V	Z	PK	56.92	3.26	N/A	N/A	60.18	74.00	13.82
	2483.60	V	Z	AV	44.61	3.26	N/A	N/A	47.87	54.00	6.13
	4924.15	H	X	PK	49.61	1.68	N/A	N/A	51.29	74.00	22.71
	4923.68	H	X	AV	39.38	1.68	N/A	N/A	41.06	54.00	12.94
2472	2483.58	V	Z	PK	54.62	3.26	N/A	N/A	57.88	74.00	16.12
	2483.57	V	Z	AV	42.39	3.26	N/A	N/A	45.65	54.00	8.35
	4943.51	H	X	PK	49.45	1.73	N/A	N/A	51.18	74.00	22.82
	4943.61	H	X	AV	39.38	1.73	N/A	N/A	41.11	54.00	12.89

**Note.**

- The radiated emissions were investigated 9kHz to 25GHz. And no other spurious and harmonic emissions were found above listed frequencies.
- Sample Calculation.  

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,  
DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor.  
For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.  
- Calculation of distance factor =  $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

## 8.6 Power-line conducted emissions

### ■ Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network(LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### ■ Test Configuration

See test photographs for the actual connections between EUT and support equipment.

### ■ Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to the test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

### ■ Test Results: **Comply**(Refer to next page.)

The worst data was reported.

## RESULT PLOTS

### AC Line Conducted Emissions (Graph)

Test Mode: 802.11g & 2437 MHz

## Results of Conducted Emission

DTNC


Date 2019-05-10

Order No.  
Model No. LM-X320EMW  
Serial No.  
Test Condition 2.4G WLAN

Reference No.  
Power Supply 120 V, 60 Hz  
Temp/Humi. 23 'C / 35 %  
Operator Jae Hyuk Bang

Memo

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

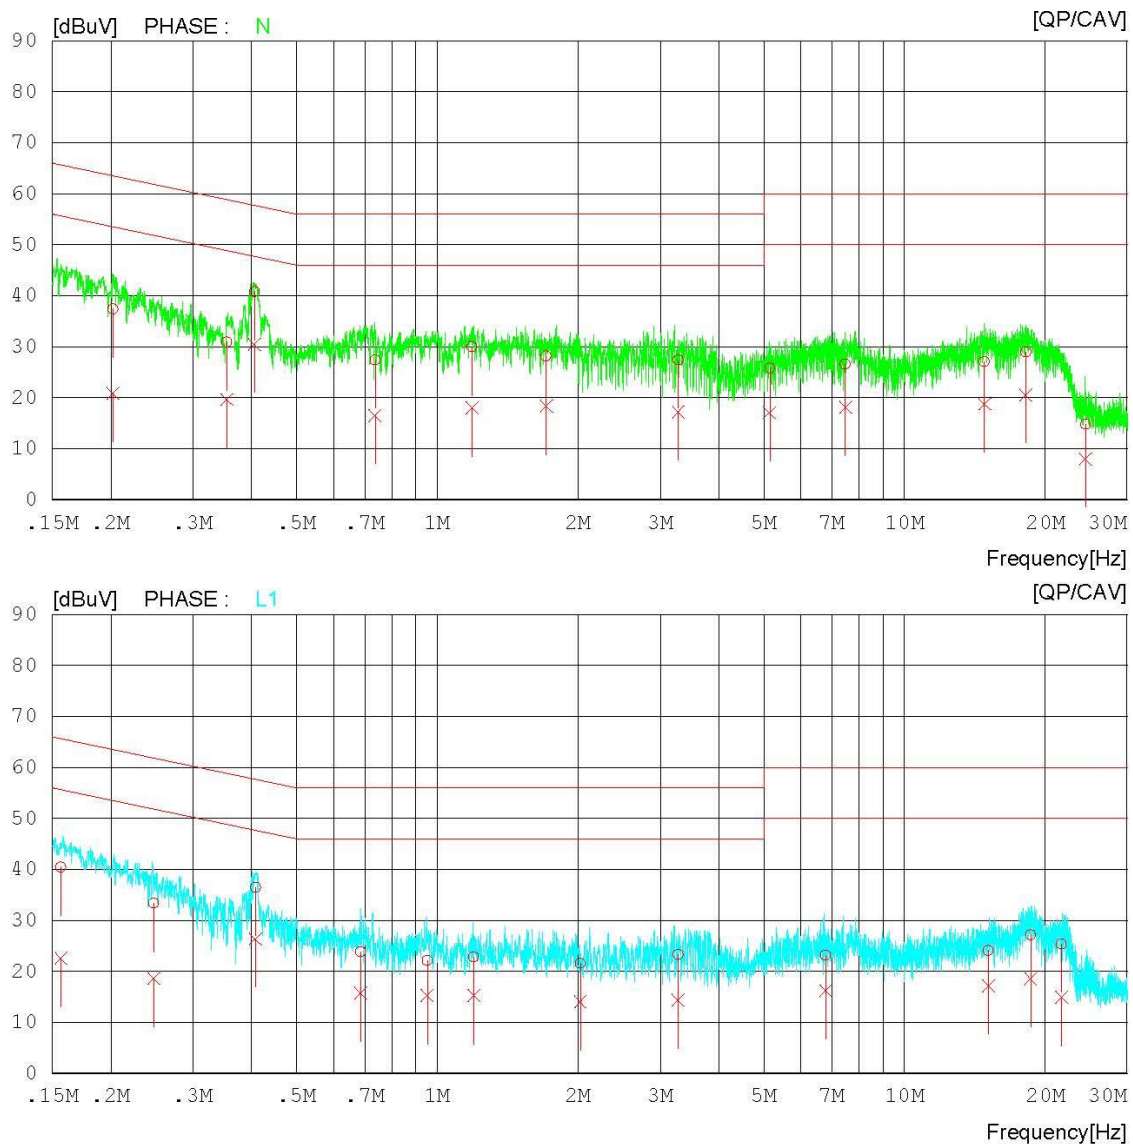

## AC Line Conducted Emissions (List)

Test Mode: 802.11g & 2437 MHz

## Results of Conducted Emission

DTNC

Date 2019-05-10

Order No.  
Model No. LM-X320EMW  
Serial No.  
Test Condition 2.4G WLAN

Reference No.  
Power Supply 120 V, 60 Hz  
Temp/Humi. 23 °C / 35 %  
Operator Jae Hyuk Bang

Memo

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.20235	27.44	10.94	9.94	37.38	20.88	63.51	53.51	26.13	32.63	N
2	0.35472	21.01	9.70	9.95	30.96	19.65	58.85	48.85	27.89	29.20	N
3	0.40621	30.86	20.51	9.95	40.81	30.46	57.73	47.73	16.92	17.27	N
4	0.73557	17.41	6.60	9.97	27.38	16.57	56.00	46.00	28.62	29.43	N
5	1.18700	19.98	8.03	9.99	29.97	18.02	56.00	46.00	26.03	27.98	N
6	1.71080	18.15	8.33	10.01	28.16	18.34	56.00	46.00	27.84	27.66	N
7	3.28000	17.32	7.15	10.09	27.41	17.24	56.00	46.00	28.59	28.76	N
8	5.14600	15.60	6.88	10.16	25.76	17.04	60.00	50.00	34.24	32.96	N
9	7.47400	16.36	7.89	10.24	26.60	18.13	60.00	50.00	33.40	31.87	N
10	14.82220	16.56	8.27	10.49	27.05	18.76	60.00	50.00	32.95	31.24	N
11	18.19040	18.48	10.02	10.53	29.01	20.55	60.00	50.00	30.99	29.45	N
12	24.40020	4.16	-2.63	10.64	14.80	8.01	60.00	50.00	45.20	41.99	N
13	0.15661	30.46	12.58	9.94	40.40	22.52	65.64	55.64	25.24	33.12	L1
14	0.24721	23.41	8.65	9.94	33.35	18.59	61.85	51.85	28.50	33.26	L1
15	0.40855	26.53	16.37	9.95	36.48	26.32	57.68	47.68	21.20	21.36	L1
16	0.68577	13.82	5.73	9.96	23.78	15.69	56.00	46.00	32.22	30.31	L1
17	0.95088	12.17	5.25	9.97	22.14	15.22	56.00	46.00	33.86	30.78	L1
18	1.19700	12.78	5.28	9.98	22.76	15.26	56.00	46.00	33.24	30.74	L1
19	2.02360	11.58	3.97	10.03	21.61	14.00	56.00	46.00	34.39	32.00	L1
20	3.27560	13.16	4.23	10.08	23.24	14.31	56.00	46.00	32.76	31.69	L1
21	6.77900	12.94	5.95	10.22	23.16	16.17	60.00	50.00	36.84	33.83	L1
22	15.13720	13.63	6.65	10.46	24.09	17.11	60.00	50.00	35.91	32.89	L1
23	18.61160	16.64	8.03	10.51	27.15	18.54	60.00	50.00	32.85	31.46	L1
24	21.68840	14.78	4.36	10.56	25.34	14.92	60.00	50.00	34.66	35.08	L1

## 9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/12/19	19/12/19	MY48010133
Spectrum Analyzer	Agilent Technologies	N9020A	18/12/19	19/12/19	MY48011700
DC Power Supply	Agilent Technologies	66332A	18/07/02	19/07/02	US37473422
Multimeter	FLUKE	17B	18/12/18	19/12/18	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Signal Generator	ANRITSU	MG3695C	18/12/10	19/12/10	173501
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-1
Thermohygrometer	BODYCOM	BJ5478	18/07/09	19/07/09	N/A
IN/OUT Thermohygrometer	SATO	PC-5000TRH-II	18/07/18	19/07/18	N/A
HYGROMETER	TESTO	608-H1	19/01/31	20/01/31	34862883
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
Horn Antenna	ETS-Lindgren	3115	19/01/11	21/01/11	9202-3820
Horn Antenna	Schwarzbeck	BBHA 9120C	17/12/04	19/12/04	9120C-561
Horn Antenna	A.H.Systems Inc.	SAS-574	17/07/31	19/07/31	155
PreAmplifier	tsj	MLA-0118-J01-45	18/12/19	19/12/19	17138
PreAmplifier	tsj	MLA-1840-J02-45	18/07/06	19/07/06	16966-10728
PreAmplifier	tsj	MLA-10K01-B01-27	18/10/31	19/10/31	2005354
Attenuator	SMAJK	SMAJK-2-3	18/07/02	19/07/02	3
Attenuator	SMAJK	SMAJK-2-3	18/07/04	19/07/04	4
Attenuator	SRTechnology	F01-B0606-01	18/07/02	19/07/02	13092403
Attenuator	Hefei Shunze	SS5T2.92-10-40	18/07/03	19/07/03	16012202
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	18/07/03	19/07/03	3
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	18/07/02	19/07/02	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	18/07/02	19/07/02	1
Power Meter & Wide Bandwidth Sensor	Anritsu	MA2411B MA2490A	18/12/19	19/12/19	1306053 1249303
EMI Test Receiver	Rohde Schwarz	ESW44	18/08/06	20/08/06	101645
EMI Test Receiver	Rohde Schwarz	ESCi7	19/01/30	20/01/30	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	18/09/27	19/09/27	101333
LISN	SCHWARZBECK	NNLK 8121	19/03/19	20/03/19	06183
Cable	HUBER+SUHNER	SUCOFLEX 106	18/06/25	19/06/25	G-01
Cable	HUBER+SUHNER	SUCOFLEX 104	18/06/25	19/06/25	G-02
Cable	HUBER+SUHNER	SUCOFLEX 104	18/06/25	19/06/25	G-03
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-04
Cable	Junkosha	MWX241	18/06/25	19/06/25	G-07
Cable	DT&C	Cable	18/07/06	19/07/06	G-13
Cable	DT&C	Cable	18/07/06	19/07/06	G-14
Cable	HUBER+SUHNER	SUCOFLEX 104	18/07/06	19/07/06	G-15
Cable	DT&C	Cable	18/07/05	19/07/05	RF-82

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

## APPENDIX I

### Duty cycle plots

#### ▪ Test Procedure


Duty Cycle was measured using **section 6.0 b) of KDB558074 D01v05r02** :

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

### Duty Cycle


802.11b & 2437

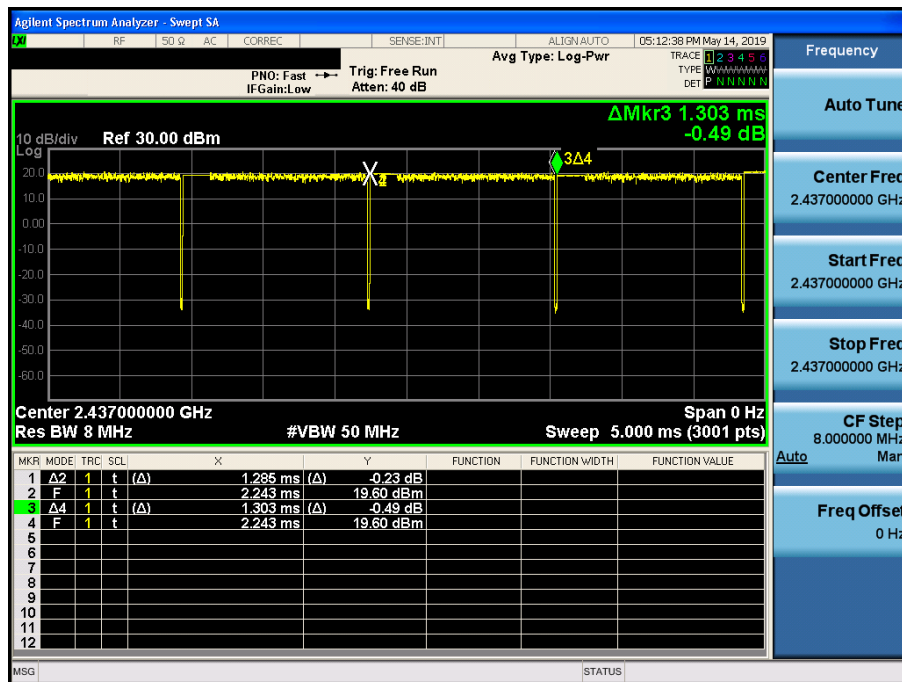




## Duty Cycle

802.11g &amp; 2437

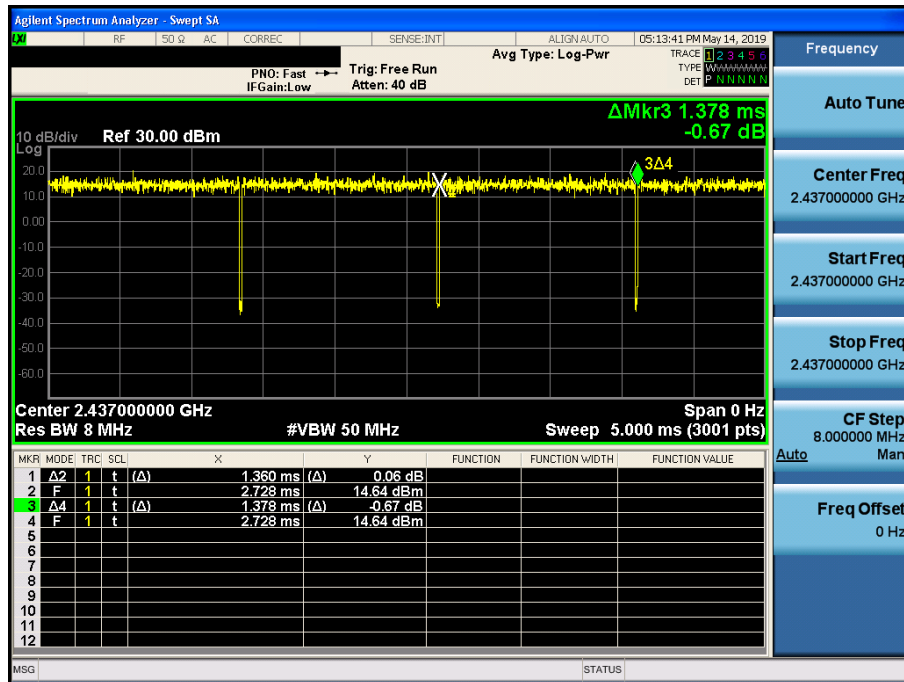

## Duty Cycle

802.11n &amp; 2437

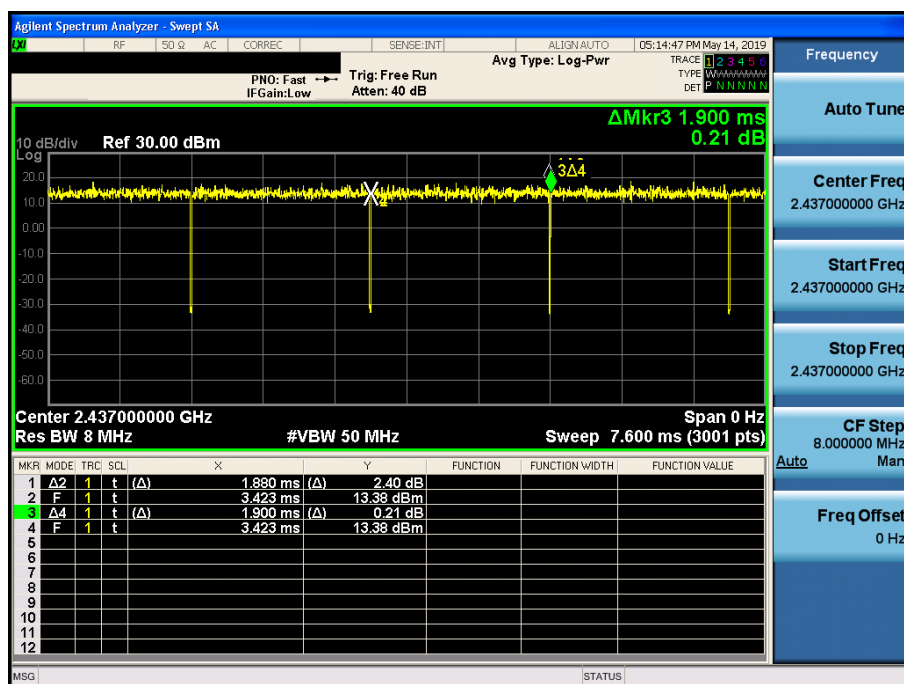




## APPENDIX II

### Unwanted Emissions (Radiated) Test Plot


802.11b & 2412 & Z axis & Ver

Detector Mode : PK

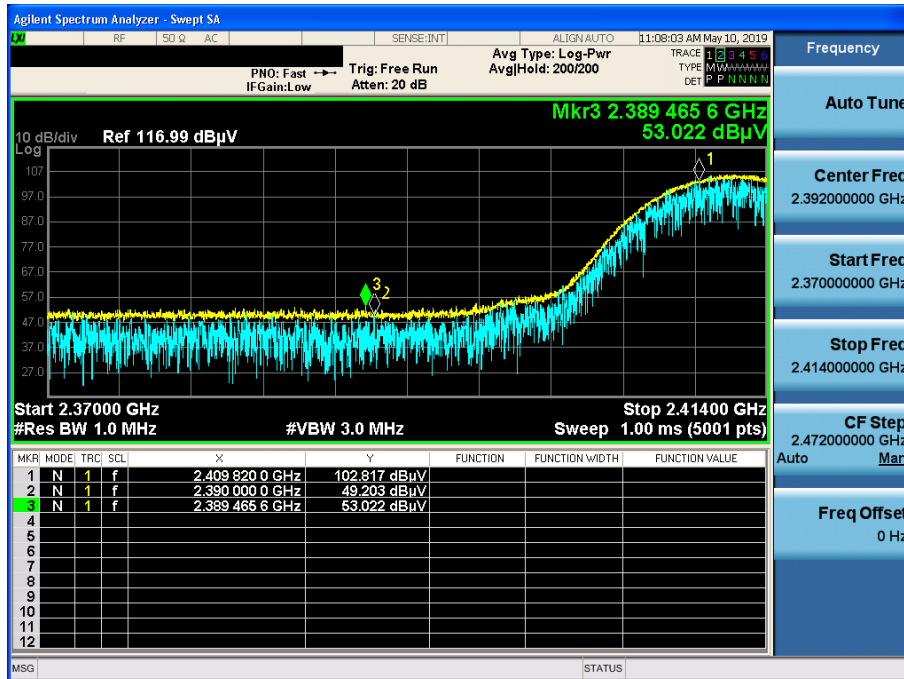


802.11b & 2412 & Z axis & Ver

Detector Mode : AV

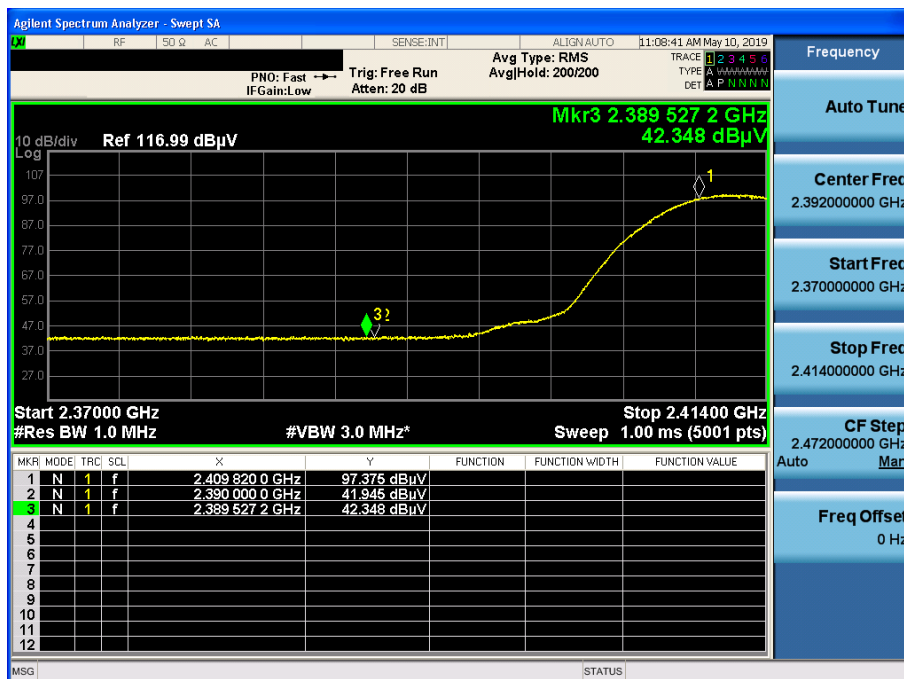

802.11b &amp; 2462 &amp; Z axis &amp; Ver

Detector Mode : PK

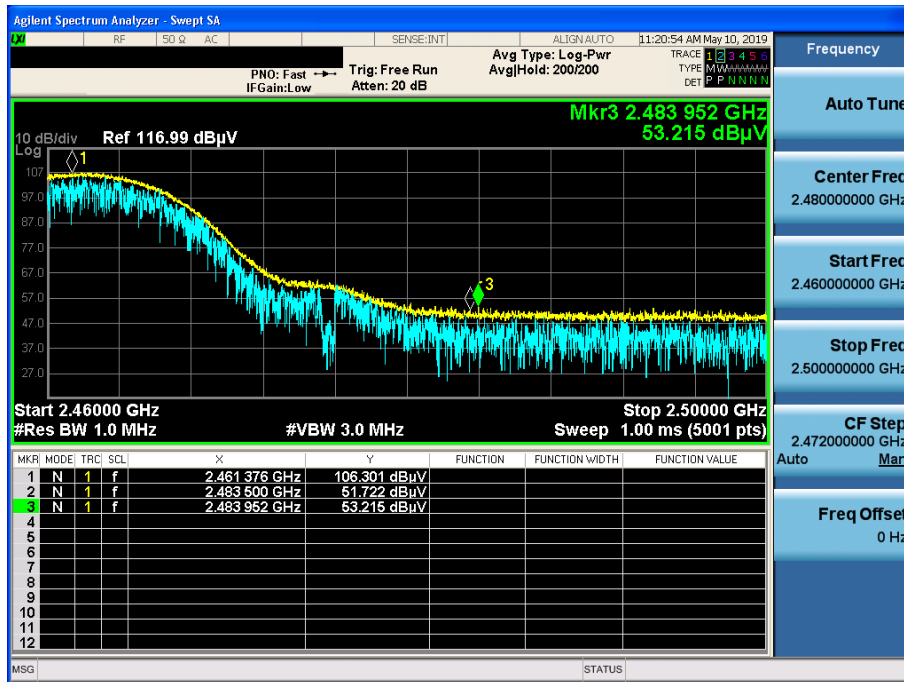


802.11b &amp; 2462 &amp; Z axis &amp; Ver

Detector Mode : AV



802.11b & 2472 & Z axis & Ver

Detector Mode : PK

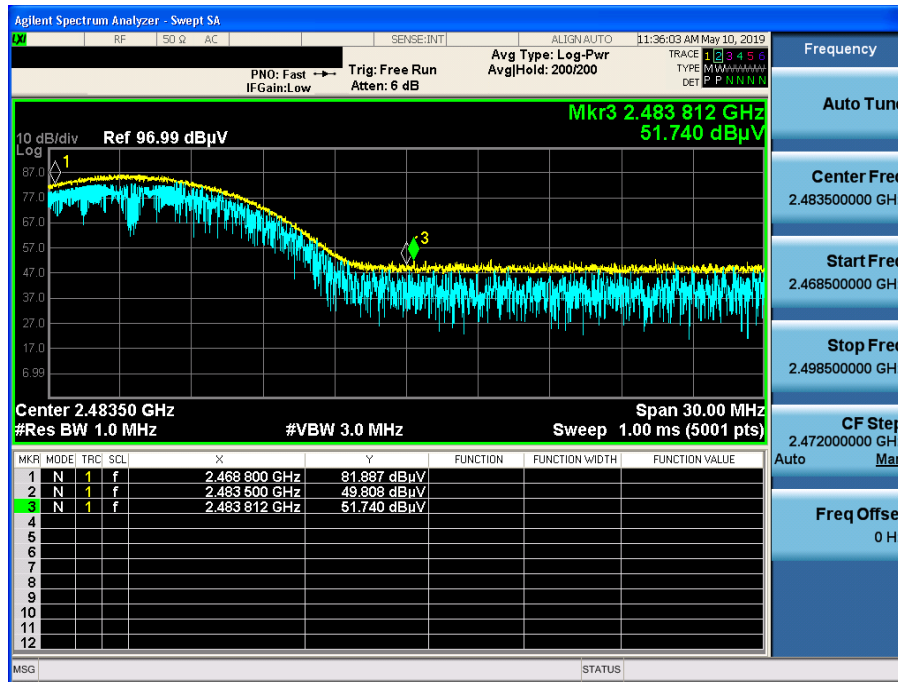


802.11b & 2472 & Z axis & Ver

Detector Mode : AV




802.11g & 2412 & Z axis & Ver

Detector Mode : PK

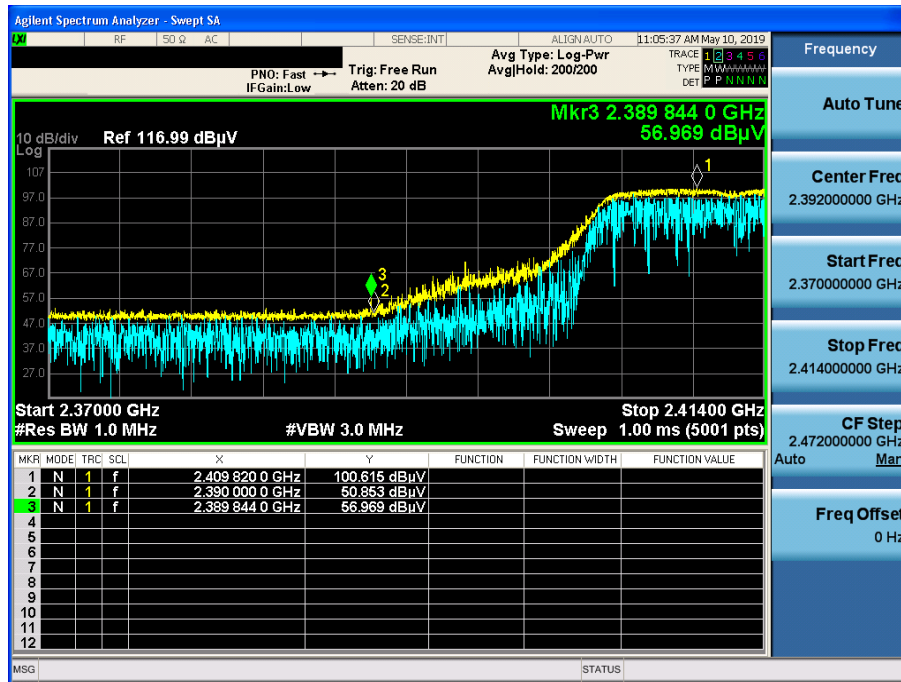


802.11g & 2412 & Z axis & Ver

Detector Mode : AV

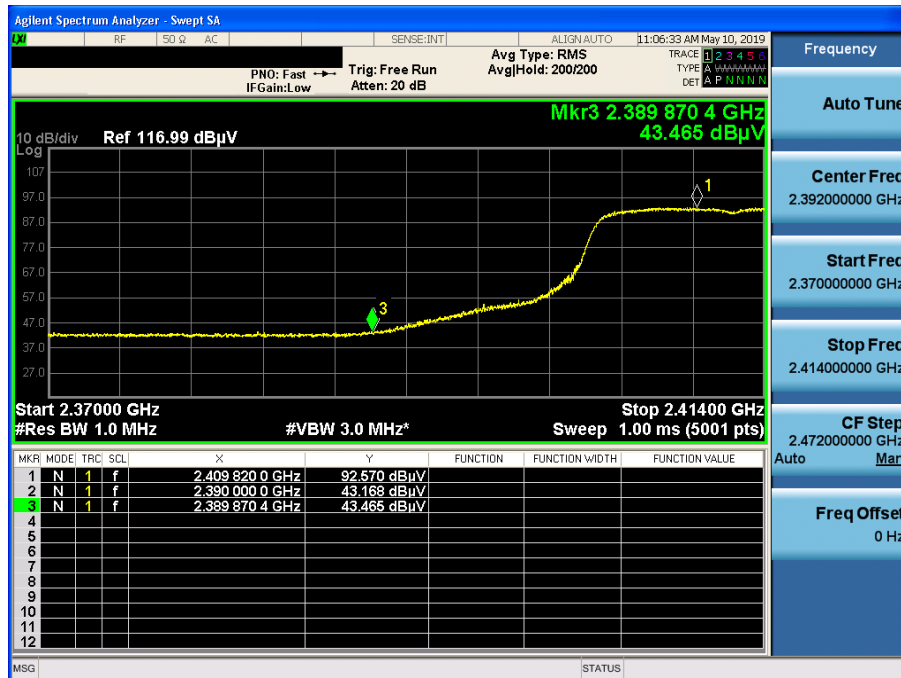

802.11g &amp; 2462 &amp; Z axis &amp; Ver

Detector Mode : PK

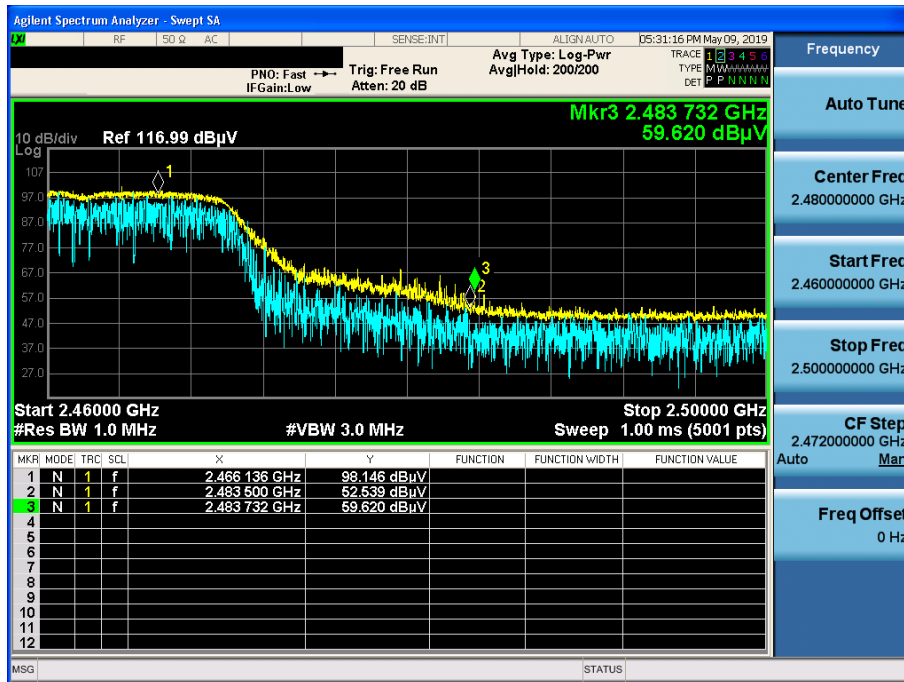


802.11g &amp; 2462 &amp; Z axis &amp; Ver

Detector Mode : AV




802.11g &amp; 2472 &amp; Z axis &amp; Ver

Detector Mode : PK

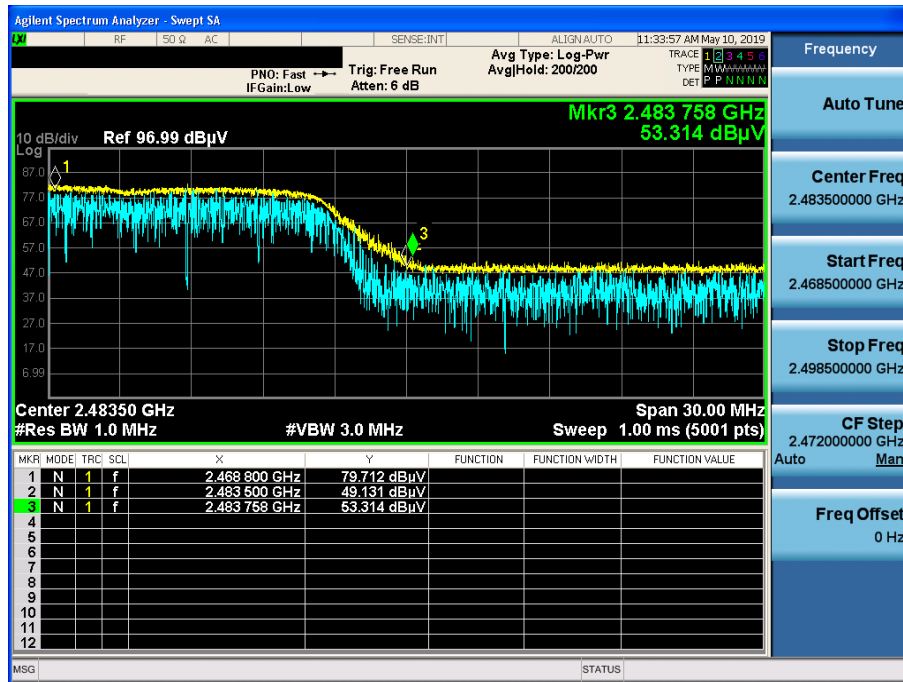


802.11g &amp; 2472 &amp; Z axis &amp; Ver

Detector Mode : AV

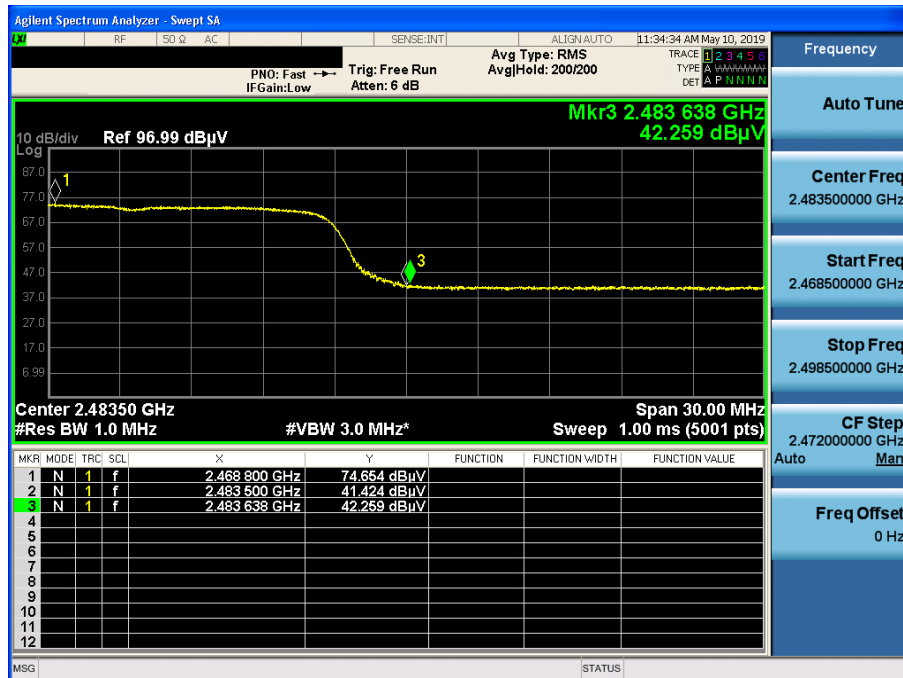


802.11n & 2412 & Z axis & Ver

Detector Mode : PK

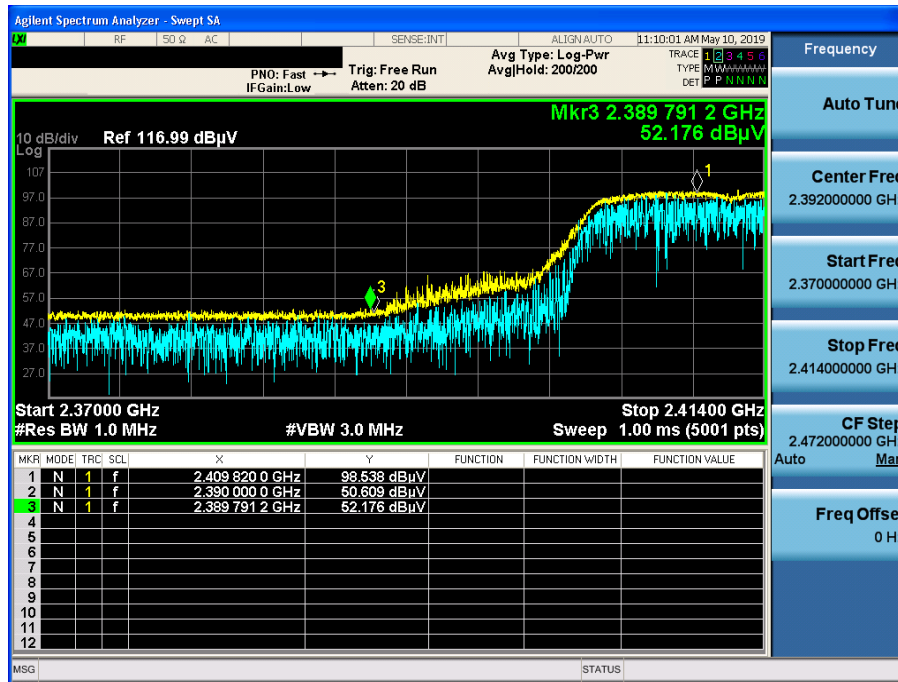

802.11n & 2412 & Z axis & Ver


Detector Mode : AV

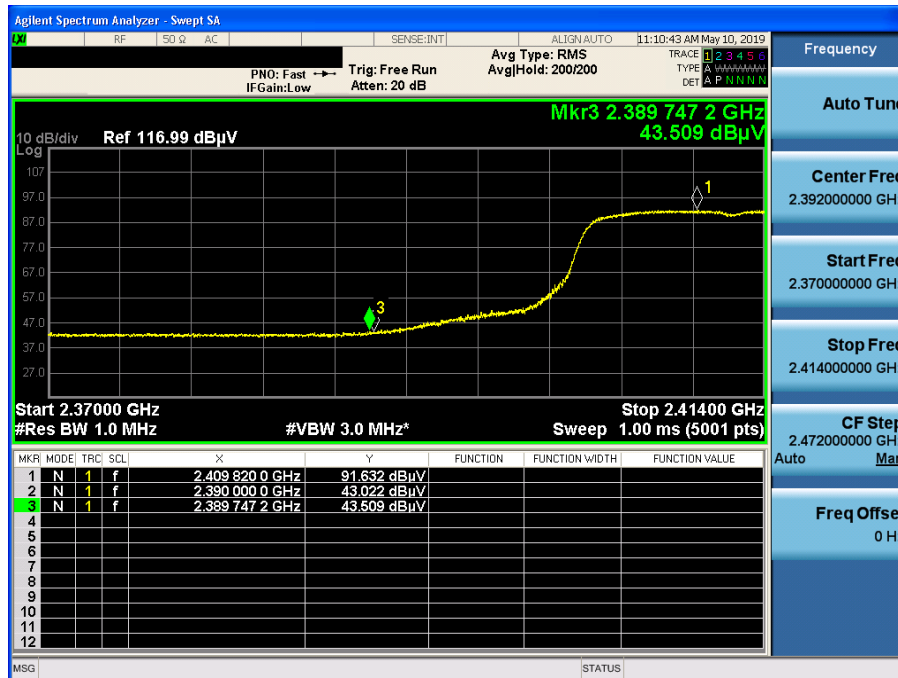




802.11n &amp; 2462 &amp; Z axis &amp; Ver

Detector Mode : PK

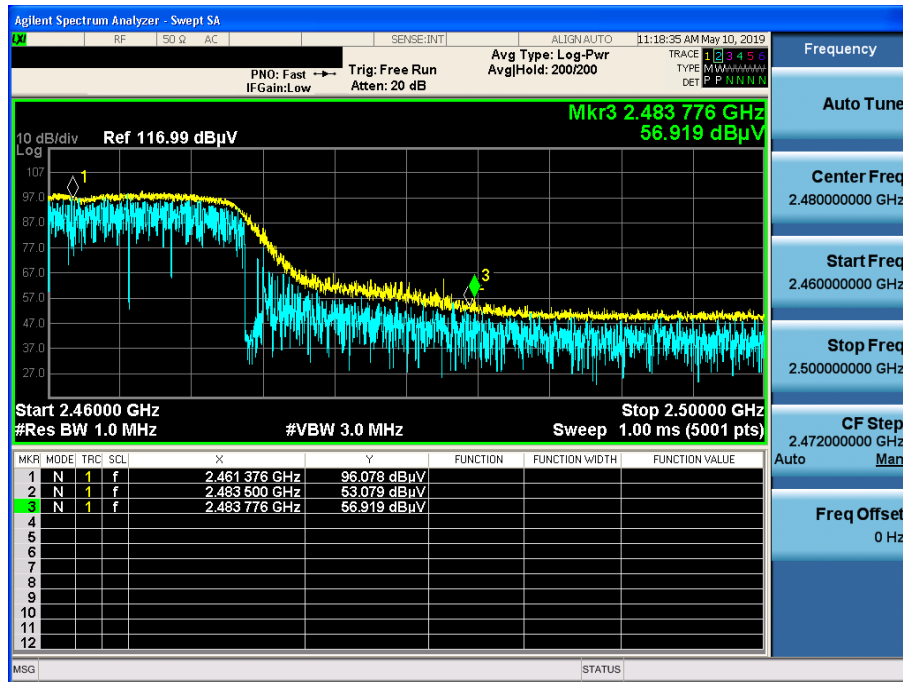

802.11n &amp; 2462 &amp; Z axis &amp; Ver


Detector Mode : AV

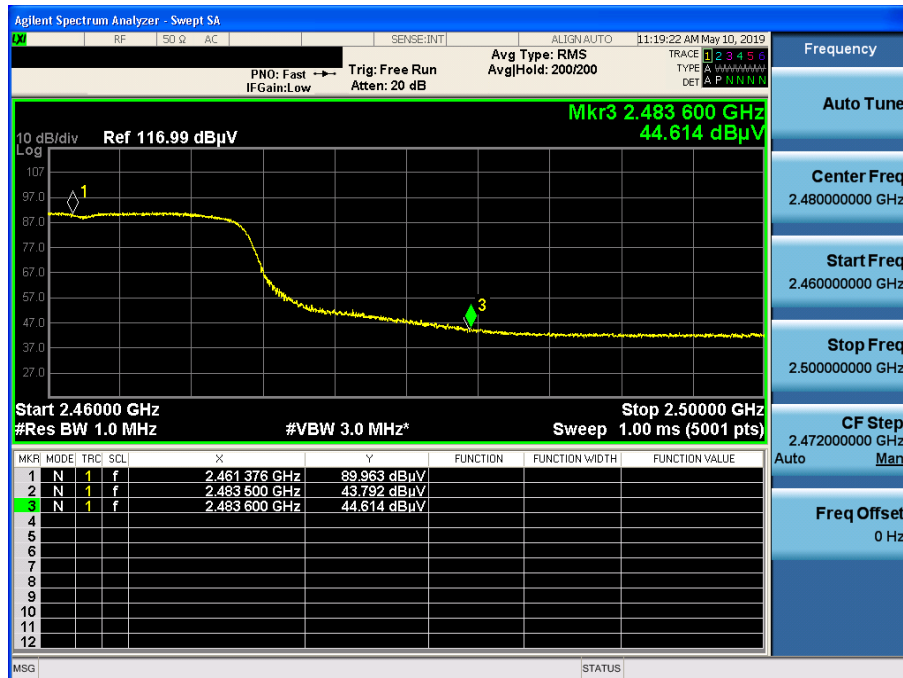



802.11n &amp; 2472 &amp; Z axis &amp; Ver

Detector Mode : PK

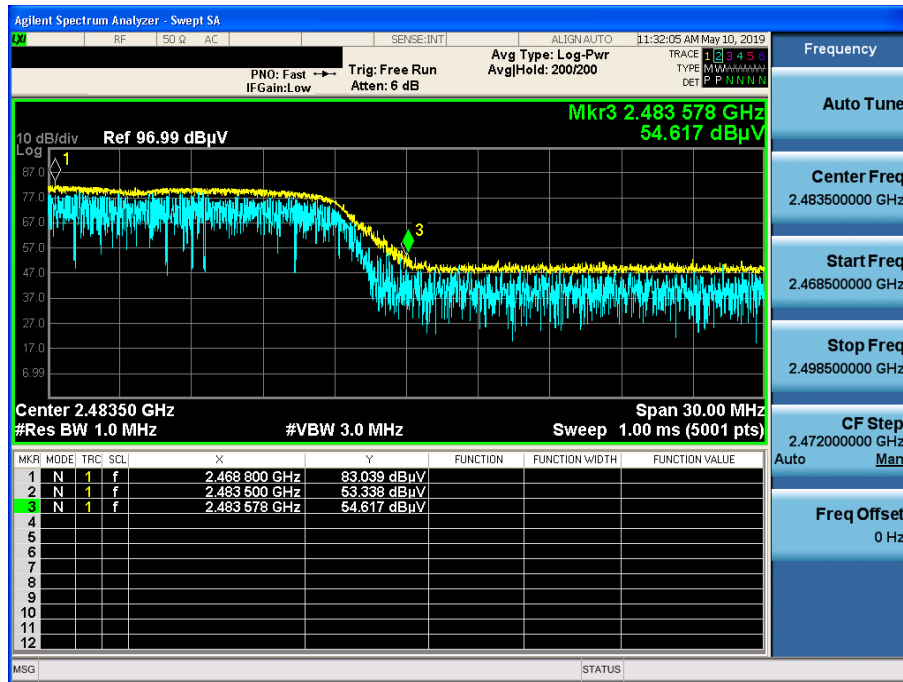


802.11n &amp; 2472 &amp; Z axis &amp; Ver

Detector Mode : AV




802.11b &amp; 2437 &amp; X axis &amp; Hor

Detector Mode : AV

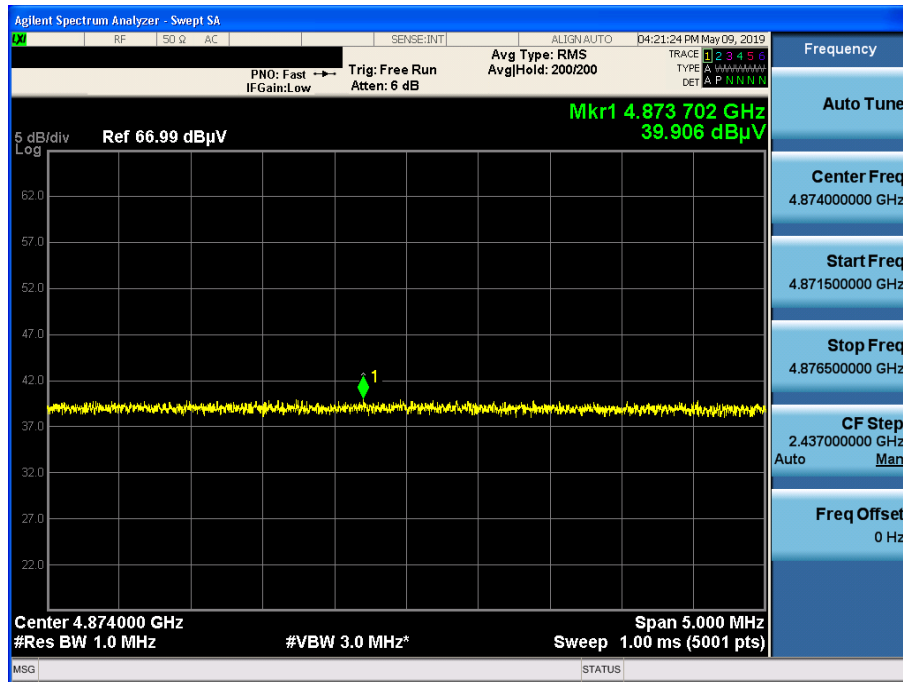

802.11g &amp; 2412 &amp; X axis &amp; Hor

Detector Mode : AV

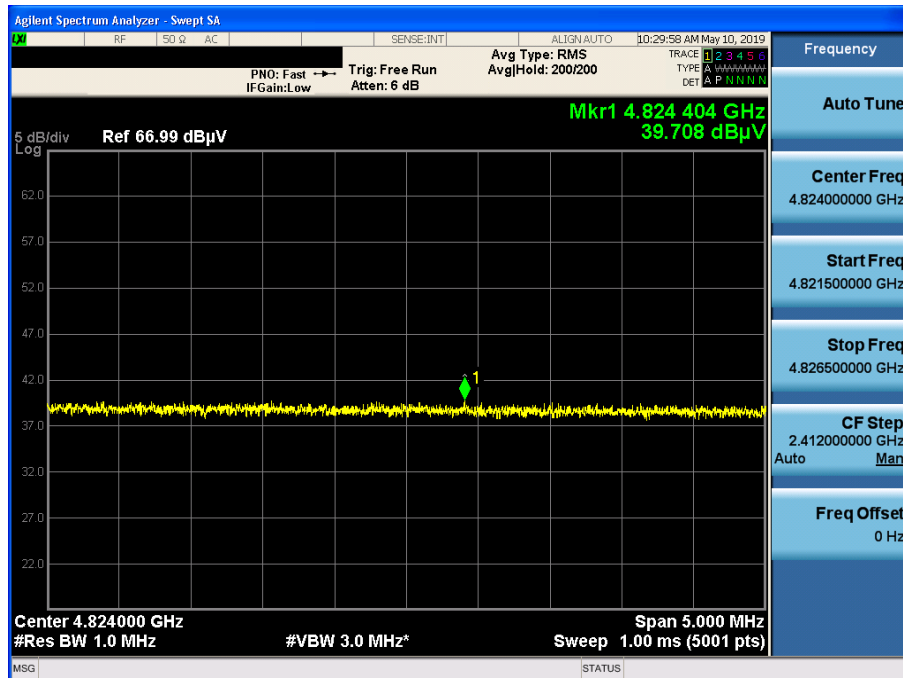

802.11n & 2437 & X axis & Hor

Detector Mode : AV

