


### ANT1


Test Mode: IEEE 802.11b  
Test CH1: 2412MHz

Test Mode: IEEE 802.11g  
Test CH1: 2412MHz

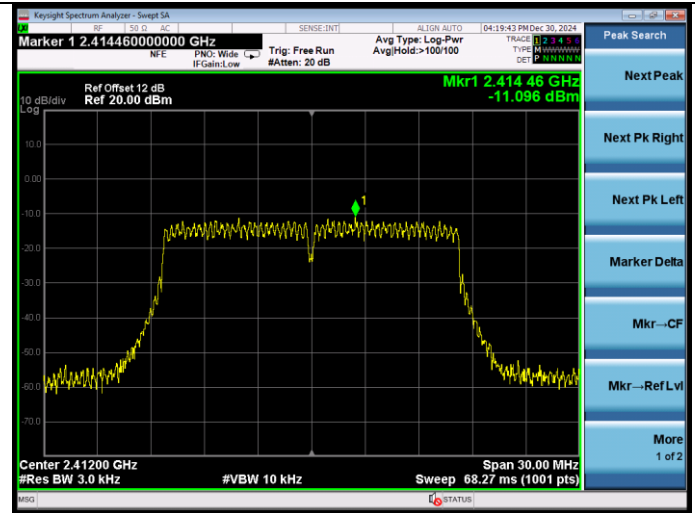


Test CH6: 2437MHz

Test CH6: 2437MHz

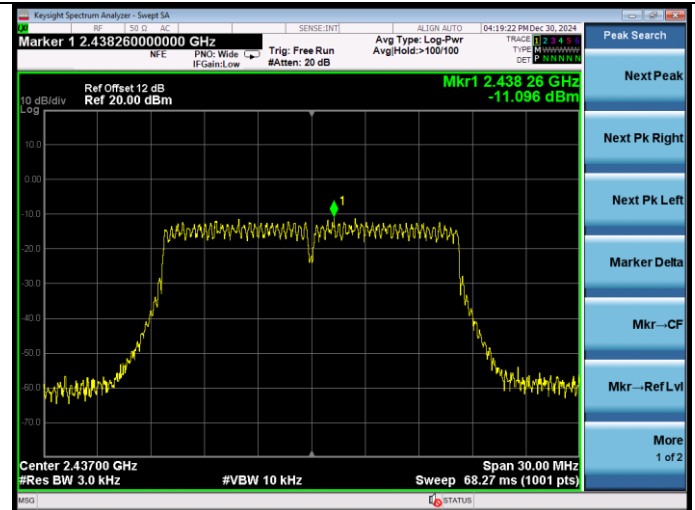


Test CH11: 2462MHz

Test CH11: 2462MHz

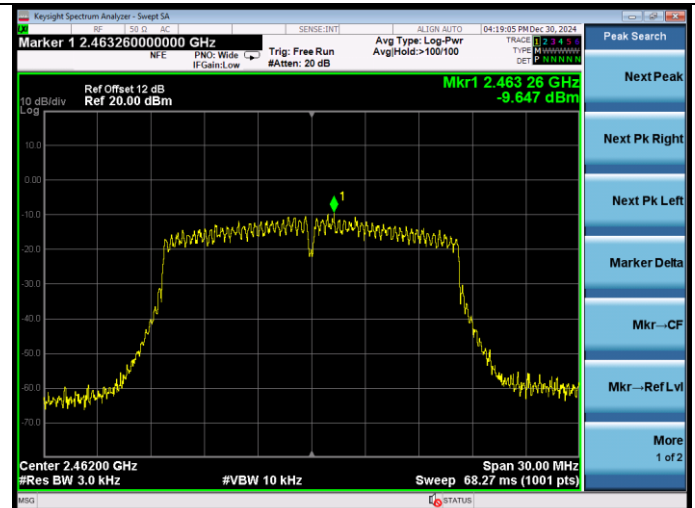


## ANT1


Test Mode: IEEE 802.11n HT20  
Test CH1: 2412MHz

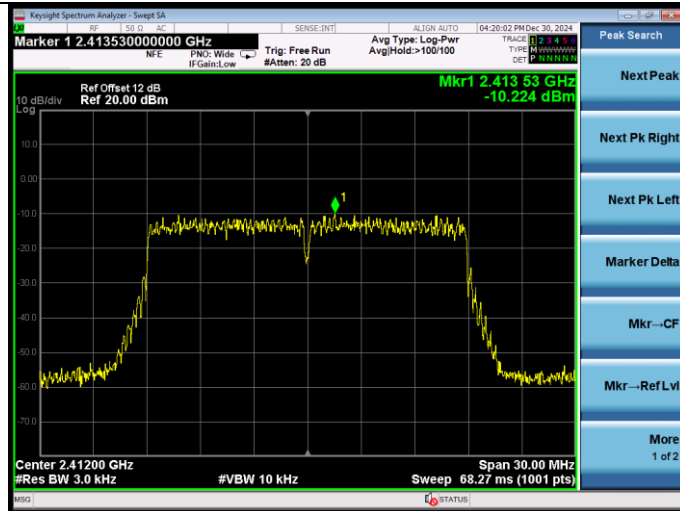


Test Mode: IEEE 802.11n HT40  
Test CH1: 2422MHz

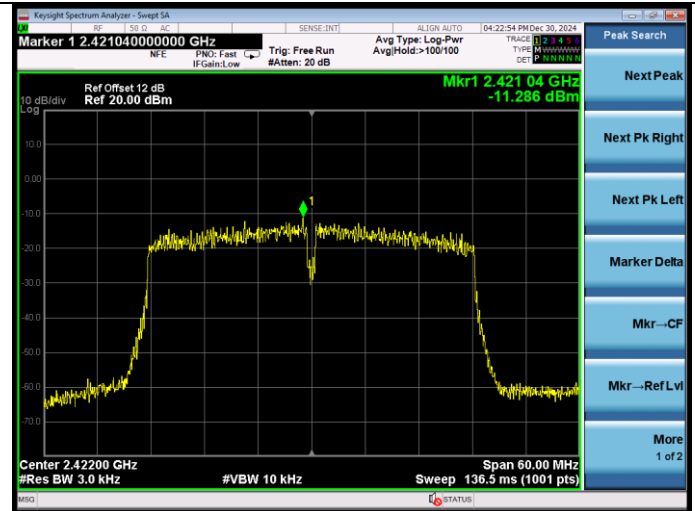


Test CH6: 2437MHz

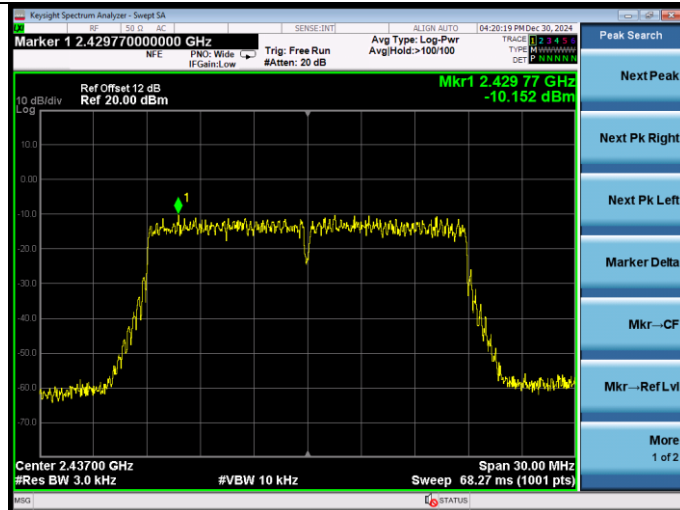


Test CH6: 2437MHz

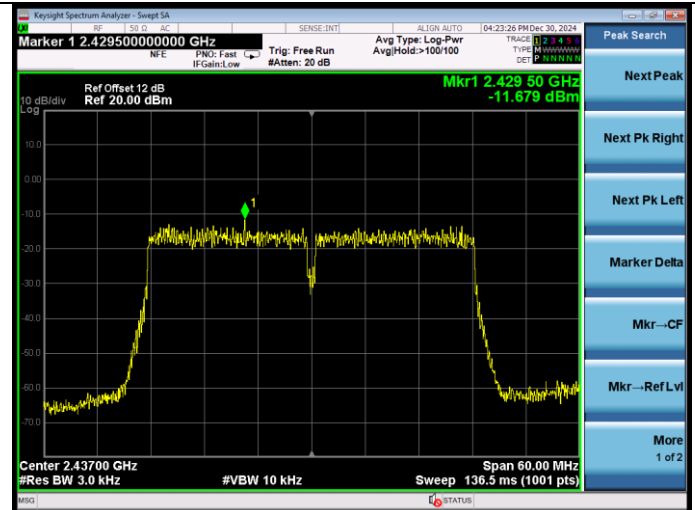

Test CH11: 2462MHz

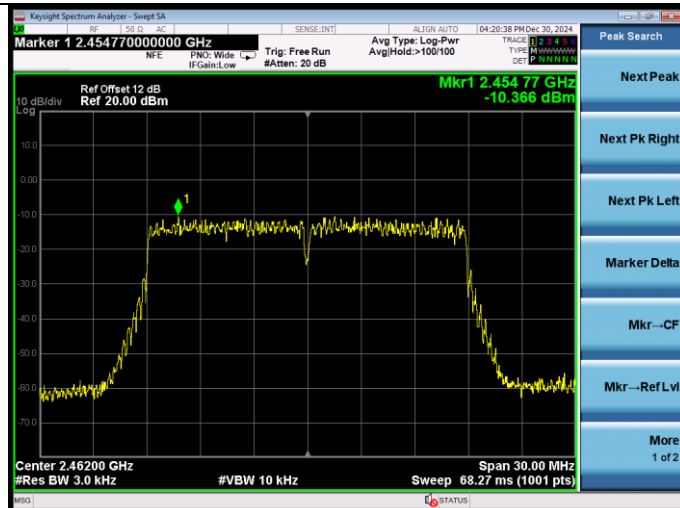


Test CH11: 2452MHz

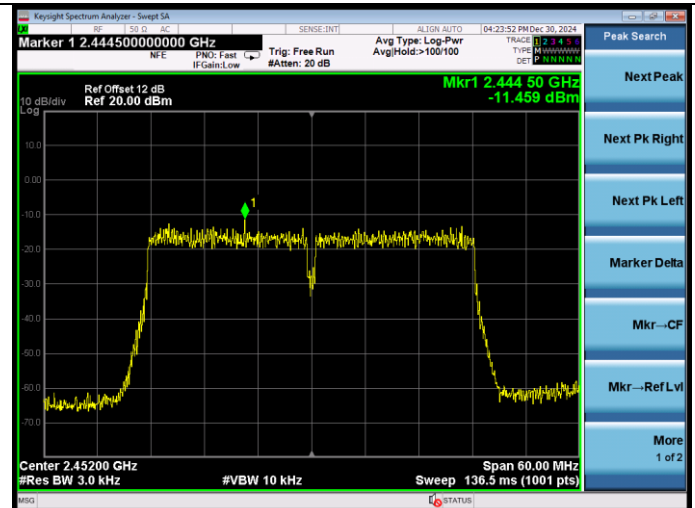


### ANT1


Test Mode: IEEE 802.11ax HE20  
Test CH1: 2412MHz

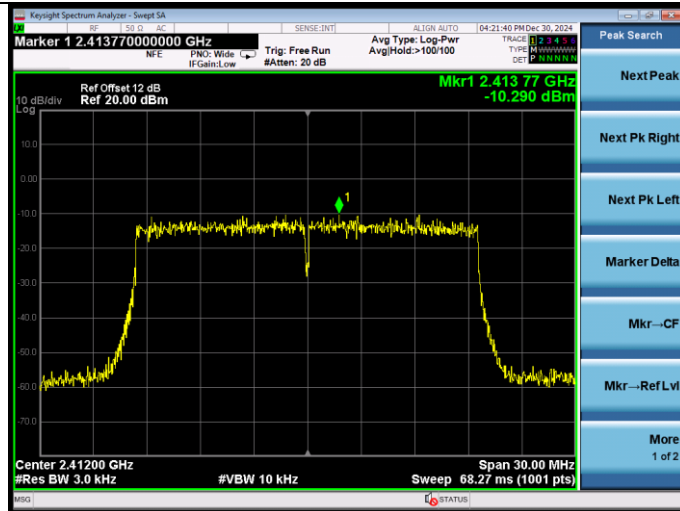


Test Mode: IEEE 802.11ax HE40  
Test CH1: 2422MHz

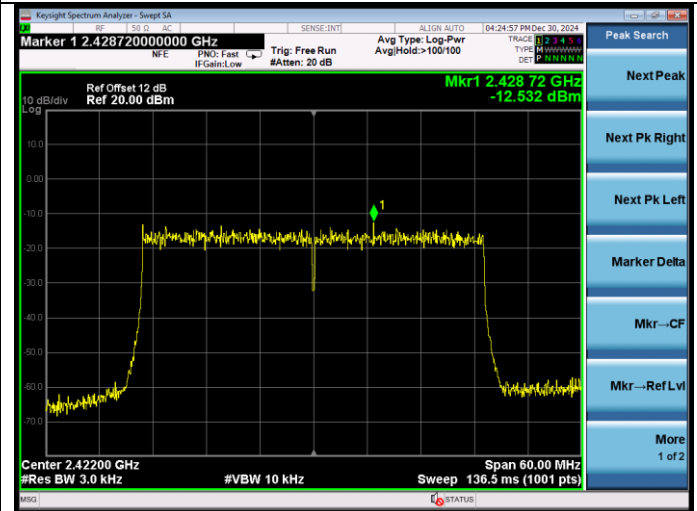


Test CH6: 2437MHz

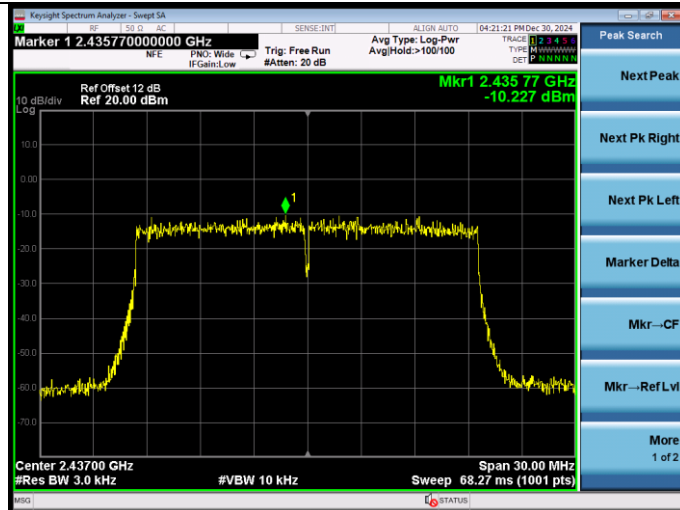


Test CH6: 2437MHz

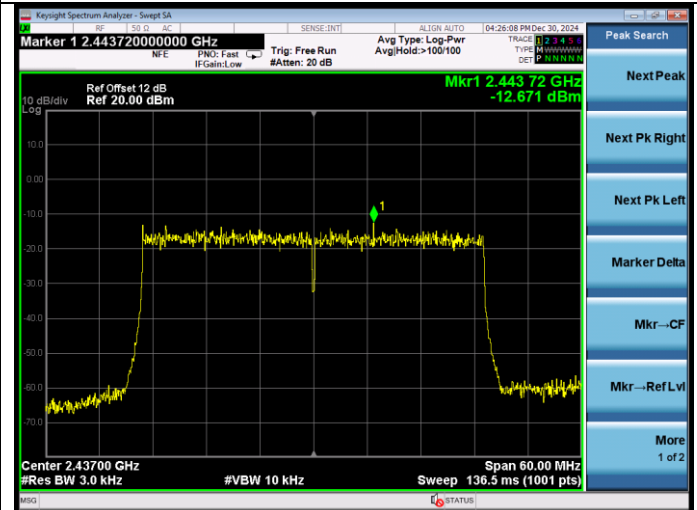

Test CH11: 2462MHz

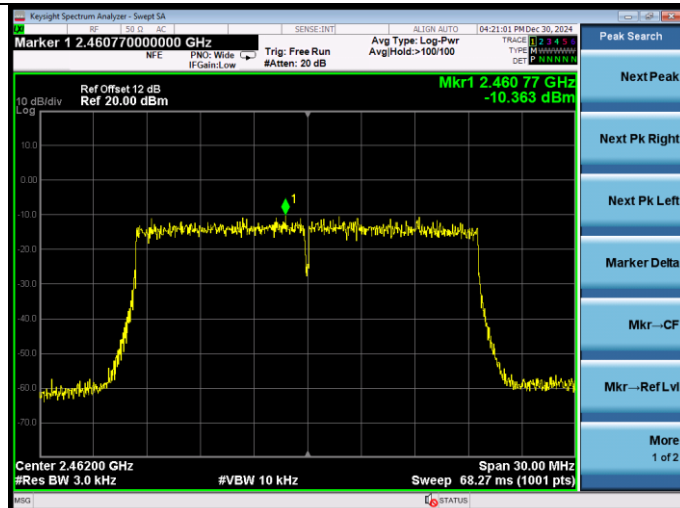

Test CH11: 2452MHz

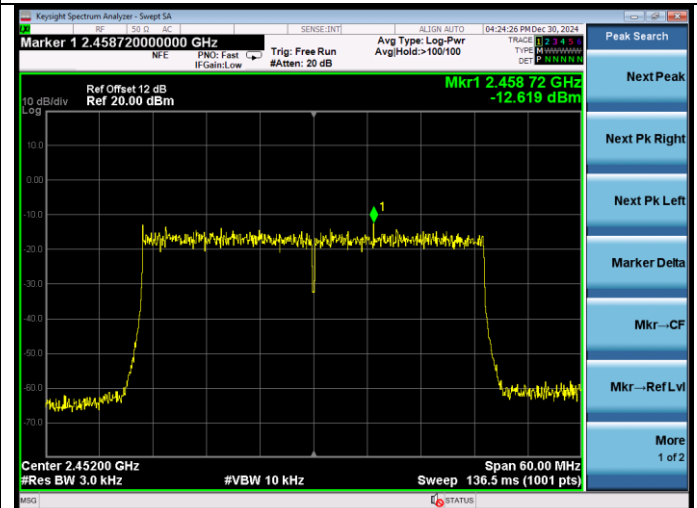

## 10. ANTENNA REQUIREMENT

### 10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 10.2. Antenna Connected Construction

The antennas used for this product are FPC antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is DTS Band: ant0: 3.63dBi ; ant1: 2.93dBi.

## 11. DEVIATION TO TEST SPECIFICATIONS

[NONE]

..... THE END .....