



# FCC Test Report

Test report no.: EMC\_831FCC15.247\_2004\_5745\_5825\_C2P\_PP07L

FCC Part 15.247 / CANADA RSS-210

EUT: WLAN                      Model: BCM94318MPAGH  
HOST LAPTOP                  Model: PP07L

FCC ID: QDS-BRCM1017  
IC ID: 4324A-BRCM1017  
(This test report covers freq. 5745-5825MHz)



**TTI-P-G 081/94-A0**

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification  
Test Facility  
(BQTF)**



FCC listed # 101450

IC recognized # 3925

## **CETECOM Inc.**

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686  
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

**Table of Contents**

<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>
<b>1.2</b>	<b>Testing laboratory</b>
<b>1.3</b>	<b>Details of applicant</b>
<b>1.4</b>	<b>Application details</b>
<b>1.5</b>	<b>Test item</b>
<b>1.6</b>	<b>Test standards</b>
<b>2</b>	<b>Technical test</b>
<b>2.1</b>	<b>Summary of test results</b>
<b>2.2</b>	<b>Test report</b>
<b>1</b>	<b>General information</b>
<b>1.1</b>	<b>Notes</b>

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

**TEST REPORT PREPARED BY:****EMC Engineer: Harpreet Sidhu**

**1.2 Testing laboratory**  
**CETECOM Inc.**  
**411 Dixon Landing Road, Milpitas, CA-95035, USA**  
**Phone: +1 408 586 6200 Fax: +1 408 586 6299**  
**E-mail: [lothar.schmidt@cetecomusa.com](mailto:lothar.schmidt@cetecomusa.com)**  
**Internet: [www.cetecom.com](http://www.cetecom.com)**

**1.3 Details of applicant**

**Name** : **Broadcom corporation**  
**Street** : **190 Mathilda Place**  
**City / Zip Code** : **Sunnyvale, CA 94086**  
**Country** : **USA**  
**Contact** : **Dan Lawless**  
**Telephone** : **408-922-5870**  
**Tele-fax** : **408-543-3399**  
**e-mail** : [dlawless@broadcom.com](mailto:dlawless@broadcom.com)

**1.4 Application details**

Date of receipt test item : 2005-03-09  
Date of test : 2005-03-09/10

**1.5 Test item**

**Manufacturer** : Applicant  
**Model No. (EUT)** : BCM94318MPAGH (sample# 2000)  
**Host** : Dell Laptop Model# PP07L, s/n 07899029300023  
**Description** : WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios in Laptop computer  
**FCC ID** : QDS-BRCM1017  
**IC ID** : 4324A-BRCM1017  
**Additional information**  
**Frequency** : 2412MHz – 2472MHz for 2.4GHz band (not covered in this test report)  
5180MHz – 5320MHz for 5GHz band (not covered in this test report)  
5745MHz – 5825MHz for 5GHz band (covered in this test report)  
**Type of modulation** : DSSS / OFDM (orthogonal frequency division multiplexing)  
**Number of channels** : 13 for 2.4GHz band  
13 for 5GHz band  
**Antenna** : 2.2dBi max. gain PCB ant. for 2.4GHz band  
3.9dBi max gain PCB ant. for 5GHz band  
**Power supply** : 3.3 VDC from Host  
**Output power** : 14.11dBm (25.76mW) conducted power for 5745-5825GHz  
**Extreme temp. Tolerance** : 0°C to +70°C

**1.6 Test standards:** **FCC Part 15 §15.247 / CANADA RSS-210**  
**Measurements done as per FCC04-165**

## PROJECT OVERVIEW:

This test report carries all radiated measurements required as per FCC 15.247 on WLAN mini PCI card model# BCM94318MPAGH tested in host laptop model PP07L for freq. range of 5745 – 5825MHz. For conducted measurements in this band please refer to test report# *EMC\_831FCC15.247\_2005\_5745\_5825\_rev1*

All measurements are done with under-mentioned max gain antenna. WLAN was tested for spurious emissions at different data rates. Test report shows only worst-case test results of all data rates with following power levels.

### 802.11a Mode:

Channels 36-48:12.0dBm

Channels 52-64:15.0dBm

Channel 149-165:15.0dBm


### ANTENNA

PCB Antenna:        2.2dBi for 2.4GHz band  
                         3.9dBi for 5GHz band

For more information on antennas and host platforms covered under this C2P change please refer to *BCM94318MPAGH\_C2P\_Declaration\_worst\_case\_platform*

**2 Technical test****2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only “passed” if all single measurements are “passed”)	<b>Passed</b>

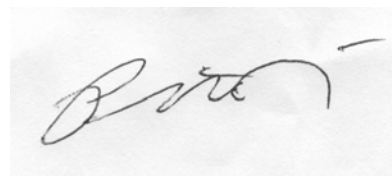**Technical responsibility for area of testing:****2005-03-29   EMC & Radio   Pete Krebill (EMC Engineer)****Date****Section****Name****Signature****Responsible for test report and project leader:****2005-03-29   EMC & Radio   Harpreet Sidhu (EMC Engineer)****Date****Section****Name****Signature**

## 2.2 Test report

### TEST REPORT

Test report no.: EMC\_831FCC15.247\_2005\_5745\_5825\_C2P\_PP07L

**TEST REPORT REFERENCE**

<b>LIST OF MEASUREMENTS</b>		<b>PAGE</b>
<b>OUTPUT POWER</b>	<b>§ 15.247 (b) (3)</b>	<b>8</b>
<b>EMISSION LIMITATIONS</b>	<b>§ 15.247 (d)</b>	<b>10</b>
<b>CONDUCTED EMISSIONS</b>	<b>§ 15.107/207</b>	<b>22</b>
<b>RECEIVER SPURIOUS RADIATION</b>	<b>§ 15.209</b>	<b>23</b>
<b>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</b>		<b>30</b>
<b>BLOCK DIAGRAMS</b>		<b>31</b>

**OUTPUT POWER****§ 15.247 (b) (3)****(Conducted)****\*Measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.****Test Procedure:****DA 02-2138 Test method-3**

TEST CONDITIONS		OUTPUT POWER (dBm)			
Frequency (MHz)		5745	5805	5825	
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3) VDC	Av	*14.11	*14.09	*13.83
Measurement uncertainty		±0.5dBm			

**LIMIT****SUBCLAUSE § 15.247 (b) (3)**

Frequency range	RF power output
5725-5850 MHz	1.0 Watt / 30dBm



**OUTPUT POWER**

§ 15.247 (b) (3)

**(RADIATED)**

Measurement procedure as per DA 02-2138 is used as directed by FCC 04-165.

**EIRP:**

TEST CONDITIONS		OUTPUT POWER EIRP(dBm)		
Frequency (MHz)		5745	5805	5825
T <sub>nom</sub> (23)°C	V <sub>nom</sub> (3.3) VDC	*18.01	*17.99	*17.73
Measurement uncertainty		±0.5dBm		

\*Note: EIRP is calculated based on 3.9dBi antenna gain and conducted peak power measurements.

**LIMIT**

SUBCLAUSE § 15.247 (b) (3)

Frequency range	RF power output
5725-5850 MHz	30dBm on Conducted

**EMISSION LIMITATIONS**  
**Transmitter (Radiated)**

§ 15.247 (d)

**LIMITS**

**In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).**

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots.

**Results for the radiated measurements below 30MHz according § 15.33**

<b>Frequency</b>	<b>Measured values</b>	<b>Remarks</b>
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

## **Phycomp PCB antenna**

**(Freq. band: 5GHz, Gain: 3.9dBi, Model 4313 334 01250/4343 334 02250)**

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

30MHz – 1GHz

Antenna:

Vertical

EUT plane:


Horizontal with screen vertical @ 90°

SWEEP TABLE:

"FCC 15.407 30-1G\_V"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

**Note: This plot is valid for low, mid, high channels (worst-case plot valid for all channels)**

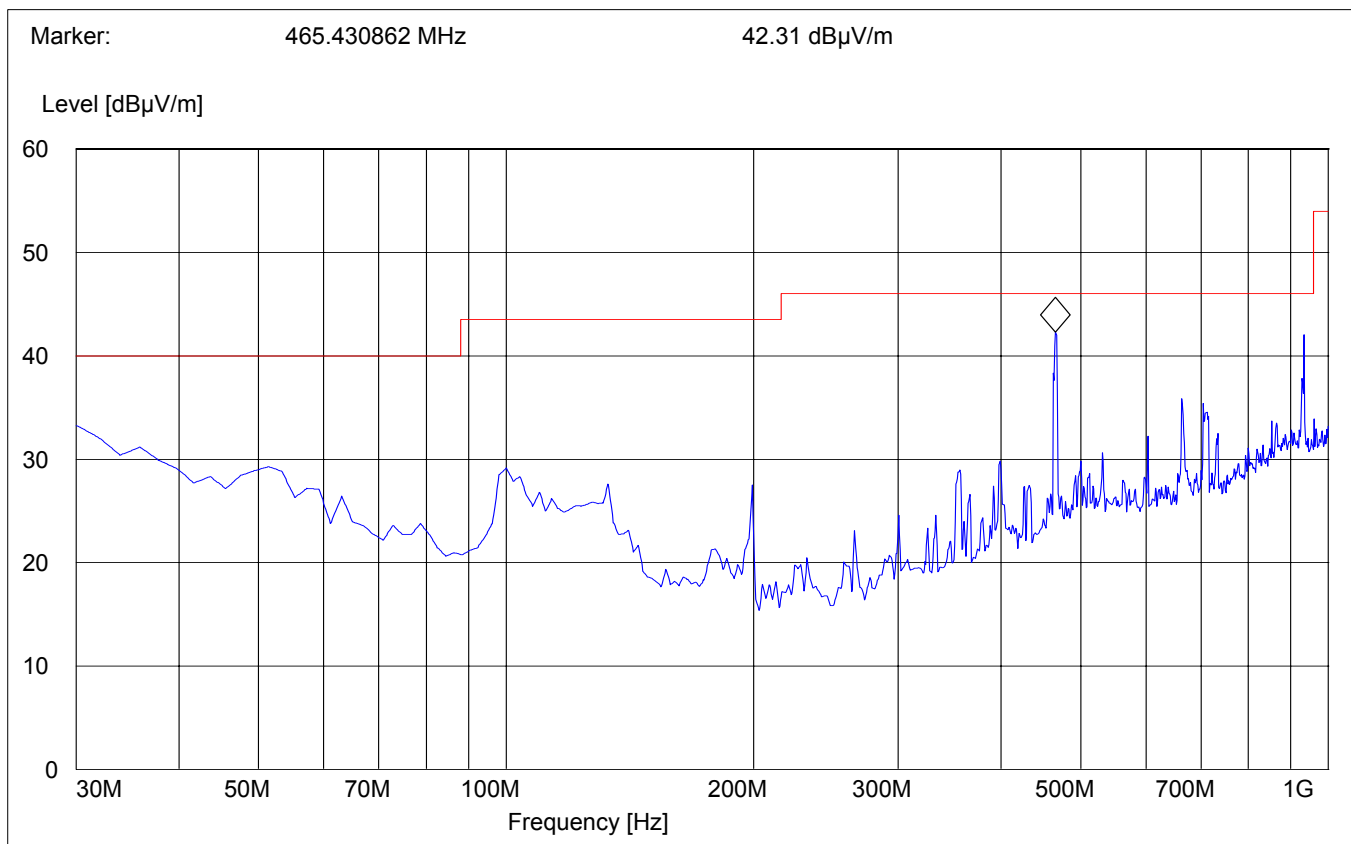


## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

30MHz – 1GHz

**Note: This plot is valid for low, mid, high channels (worst-case plot valid for all channels)**

Antenna:		Horizontal			
EUT plane:		Horizontal with screen vertical @ 90°			
SWEEP TABLE:		"FCC 15.407 30-1G_H"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

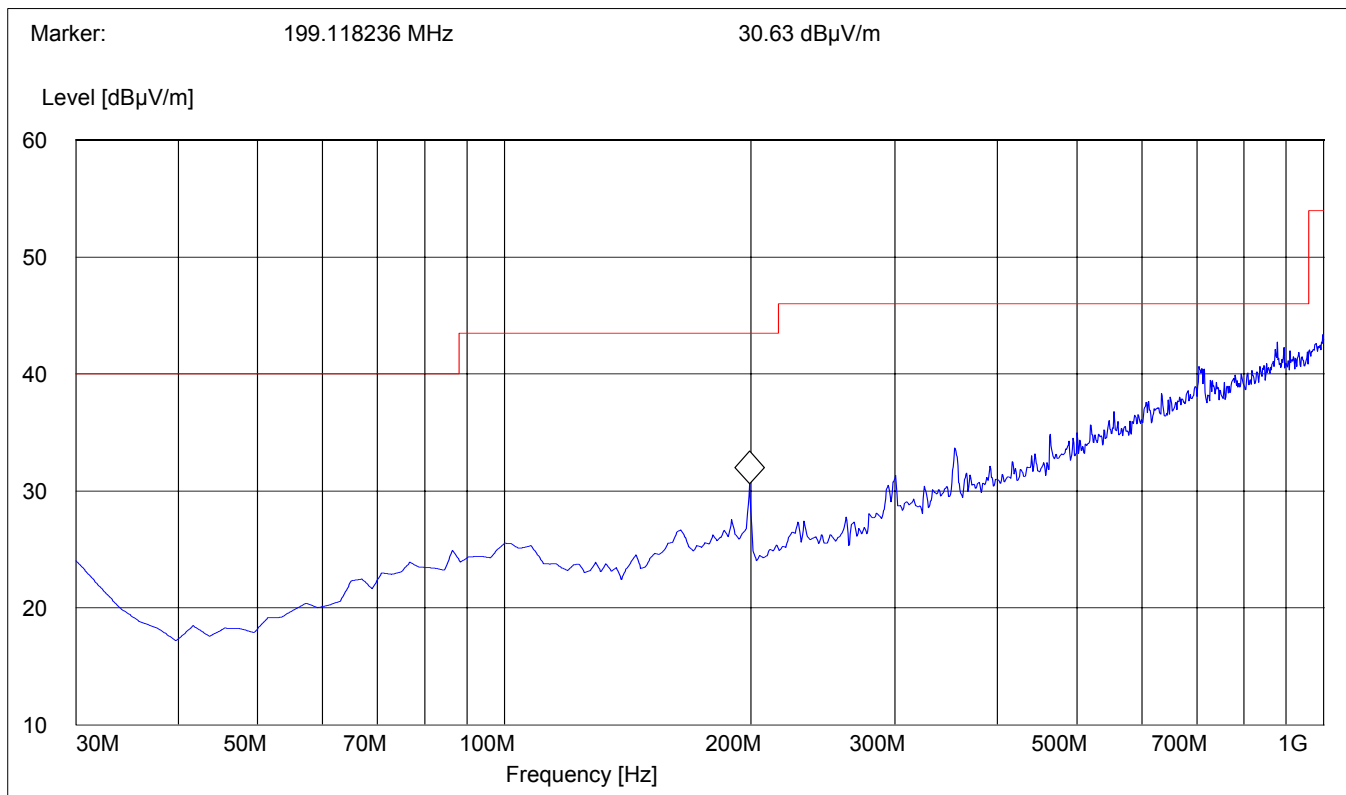

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

Lowest Channel (5745MHz): 1GHz – 7GHz

(Average)

Antenna: Vertical


EUT plane: Horizontal with screen vertical @ 90°

**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE:

"FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

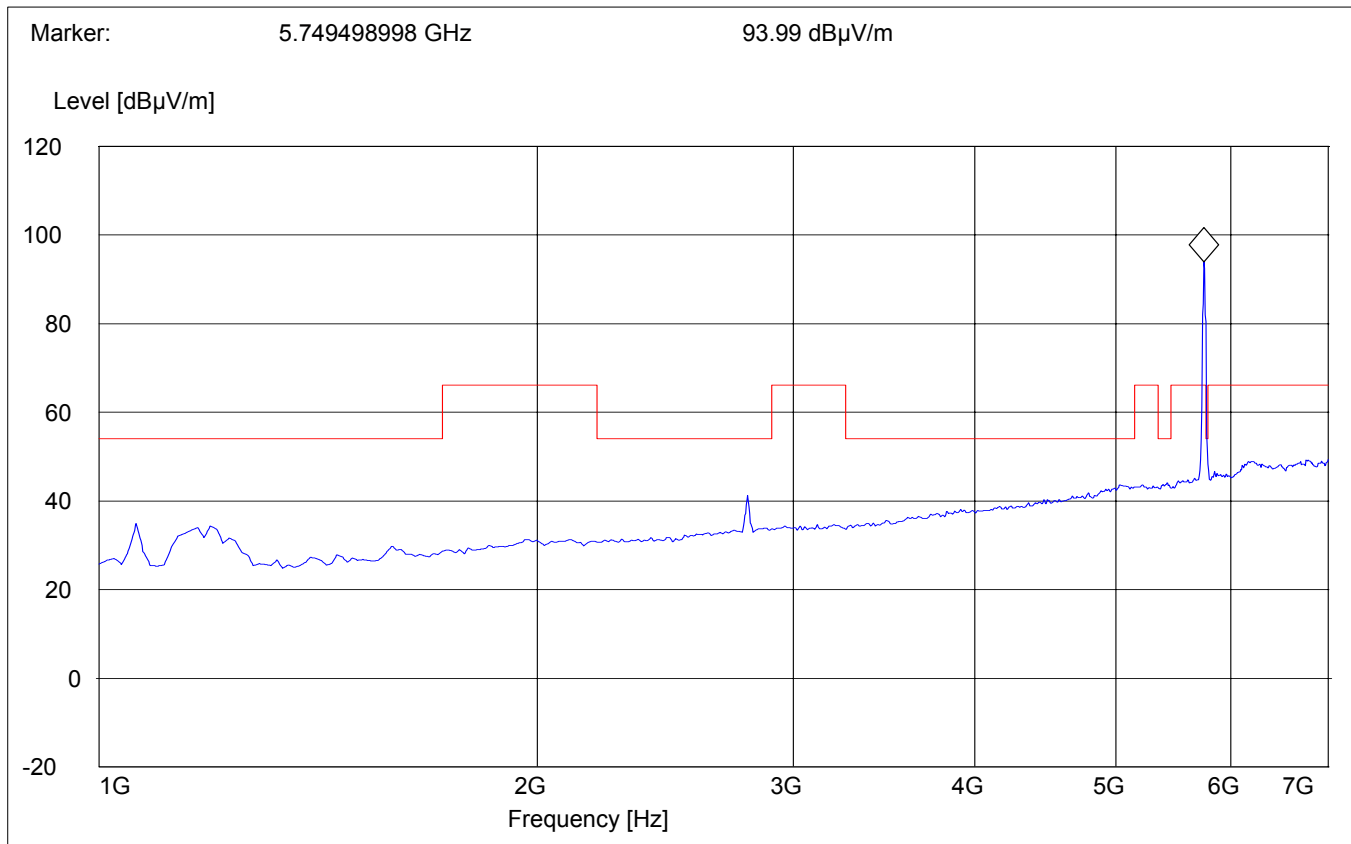

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

Lowest Channel (5745MHz): 7GHz – 18GHz

Average

Antenna:

Vertical


EUT plane:

Horizontal with screen vertical @ 90°

SWEEP TABLE:

"FCC 15.407 7-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

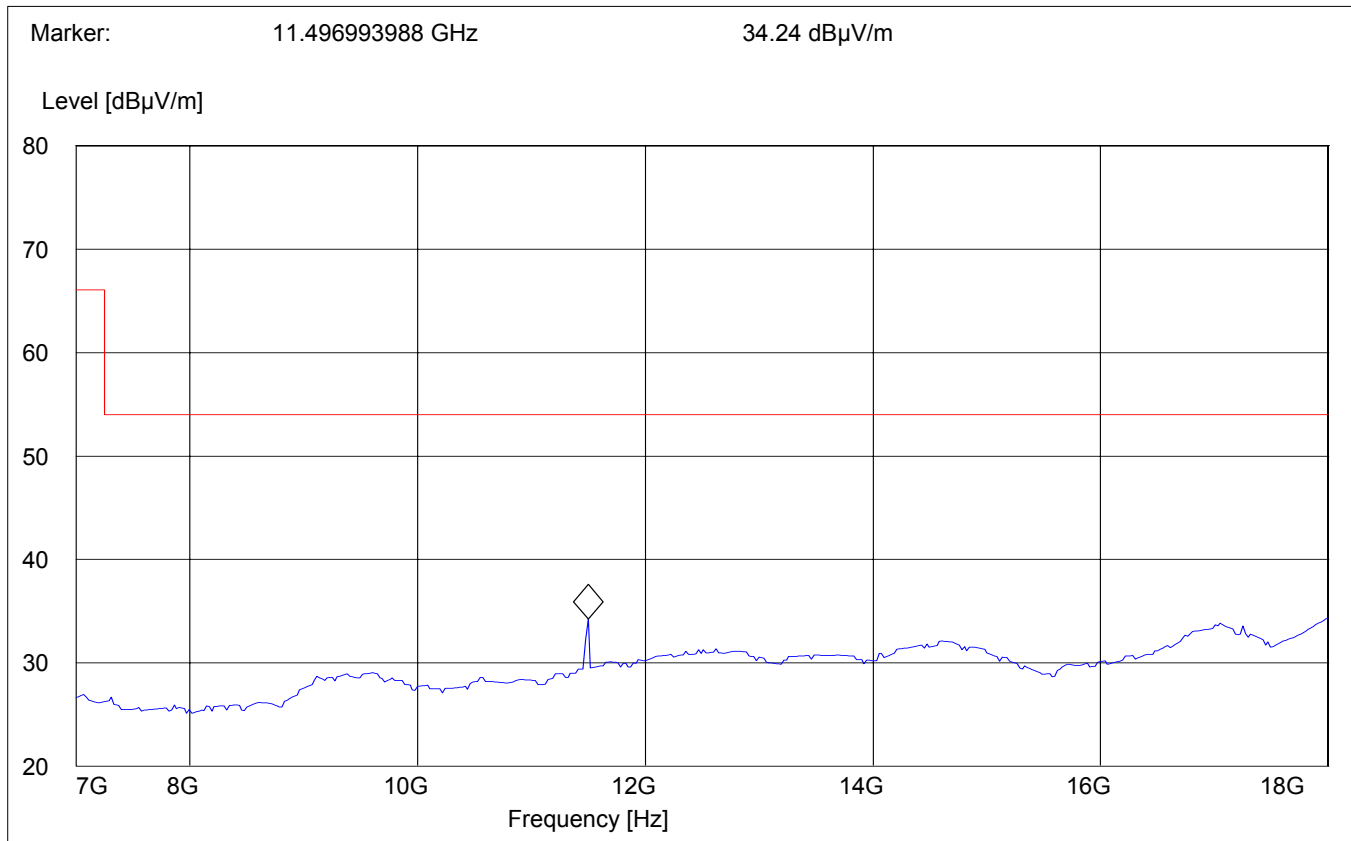

## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

Highest Channel (5805MHz): 1GHz – 7GHz

(Average)

Antenna:

Vertical

EUT plane:


Horizontal with screen vertical @ 90°

**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE:

"FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

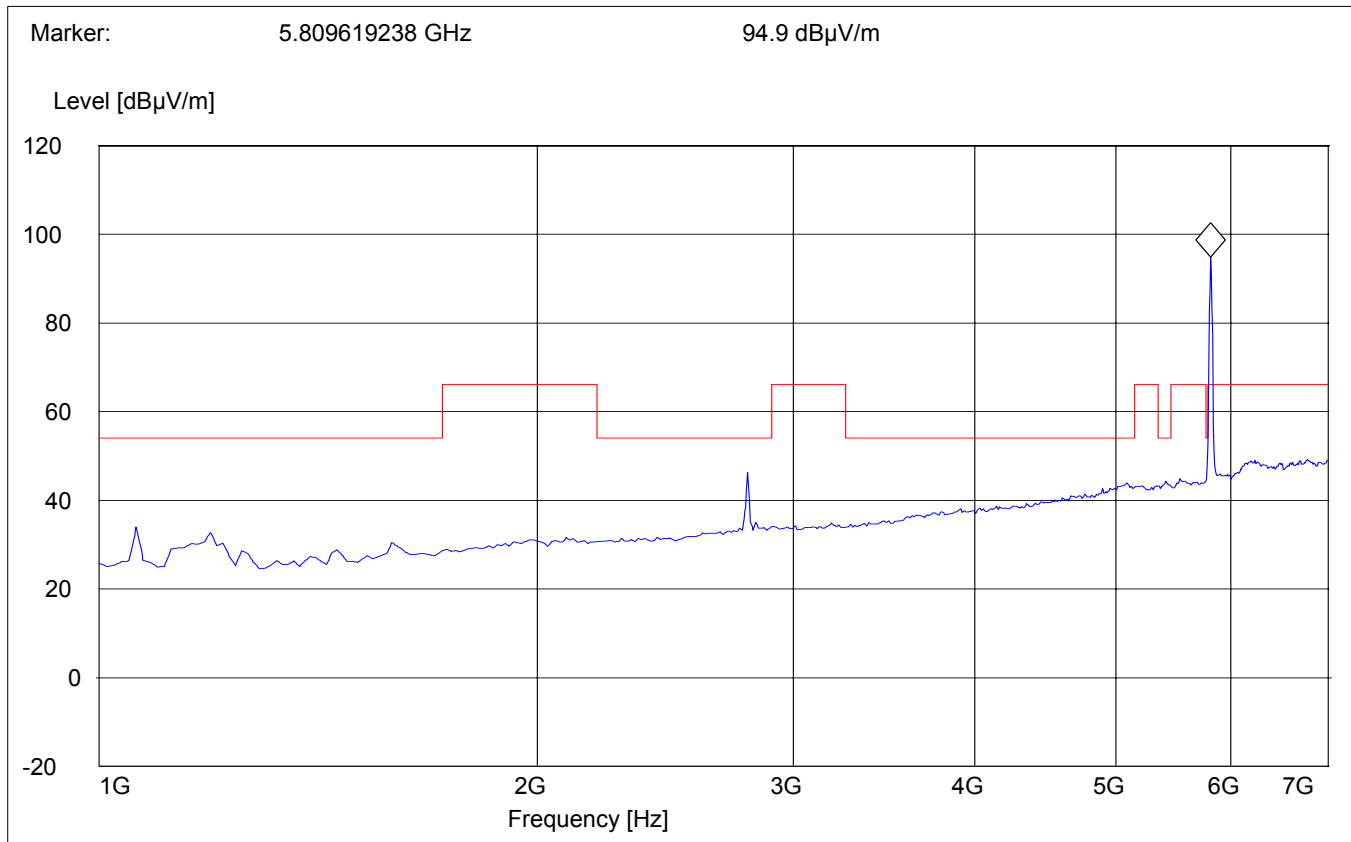



## EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

Highest Channel (5805MHz): 7GHz – 18GHz

Average

Antenna:

Vertical


EUT plane:

Horizontal with screen vertical @ 90°

SWEEP TABLE:

"FCC 15.407 7-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

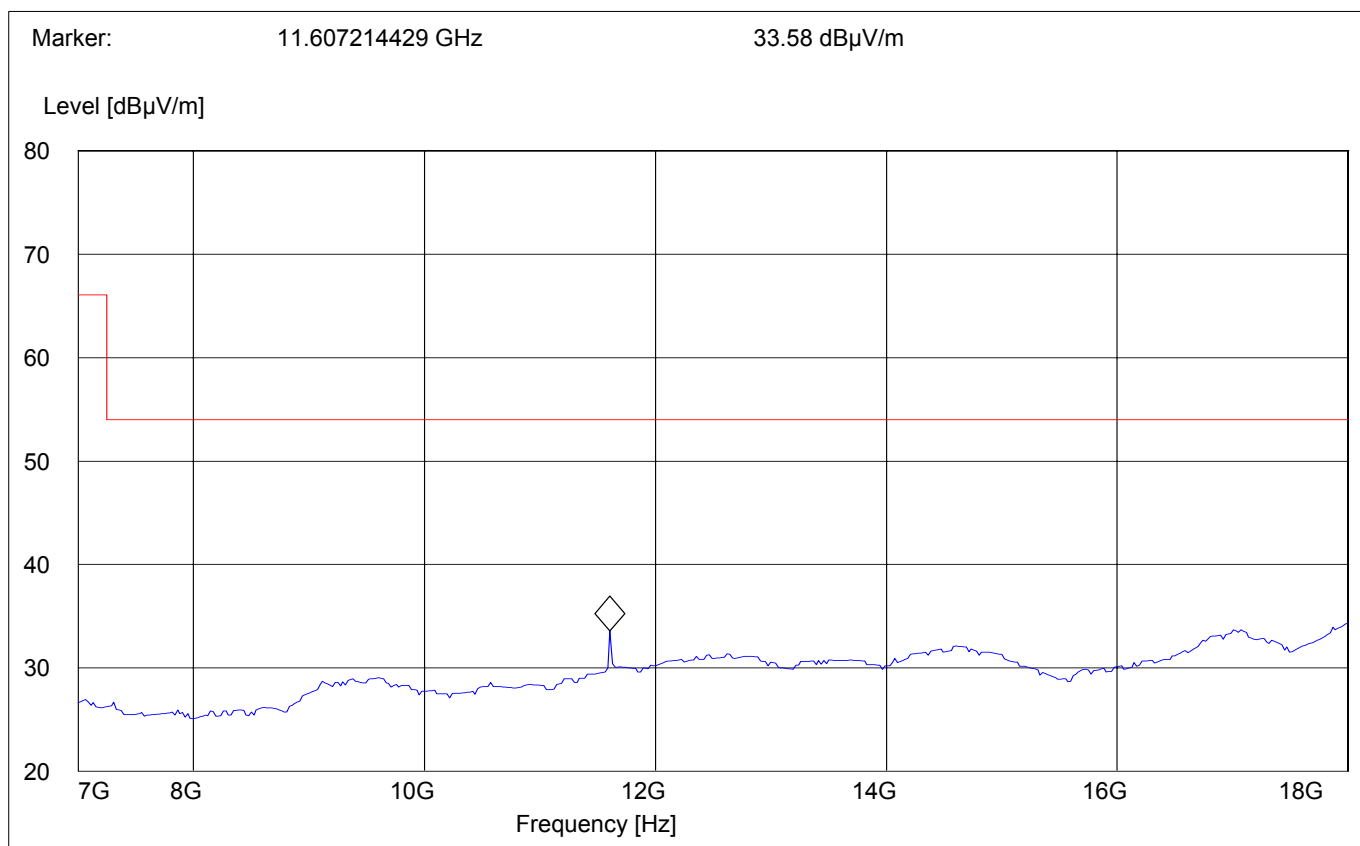

**EMISSION LIMITATIONS - Radiated (Transmitter)**  
**(5825MHz): 1GHz – 7GHz**  
**(Average)**


§ 15.247 (d)

**Antenna:** Vertical  
**EUT plane:** Horizontal with screen vertical @ 90°

**Note: The peak above the limit line is the carrier freq.**

**SWEEP TABLE:** "FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

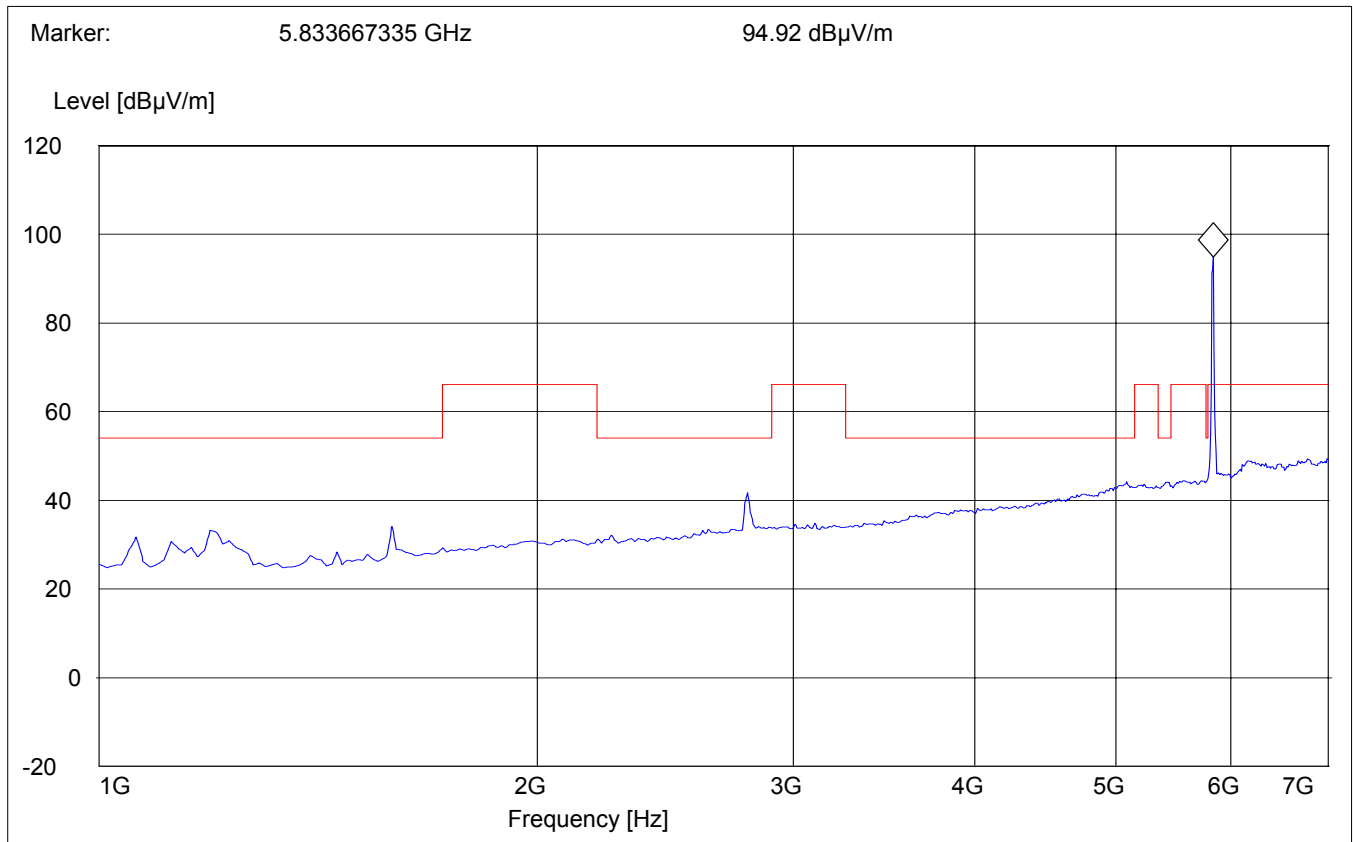

## EMISSION LIMITATIONS - Radiated (Transmitter) (5825MHz): 7GHz – 18GHz

§ 15.247 (d)

Average

Antenna:

Vertical


EUT plane:

Horizontal with screen vertical @ 90°

SWEEP TABLE:

"FCC 15.407 7-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

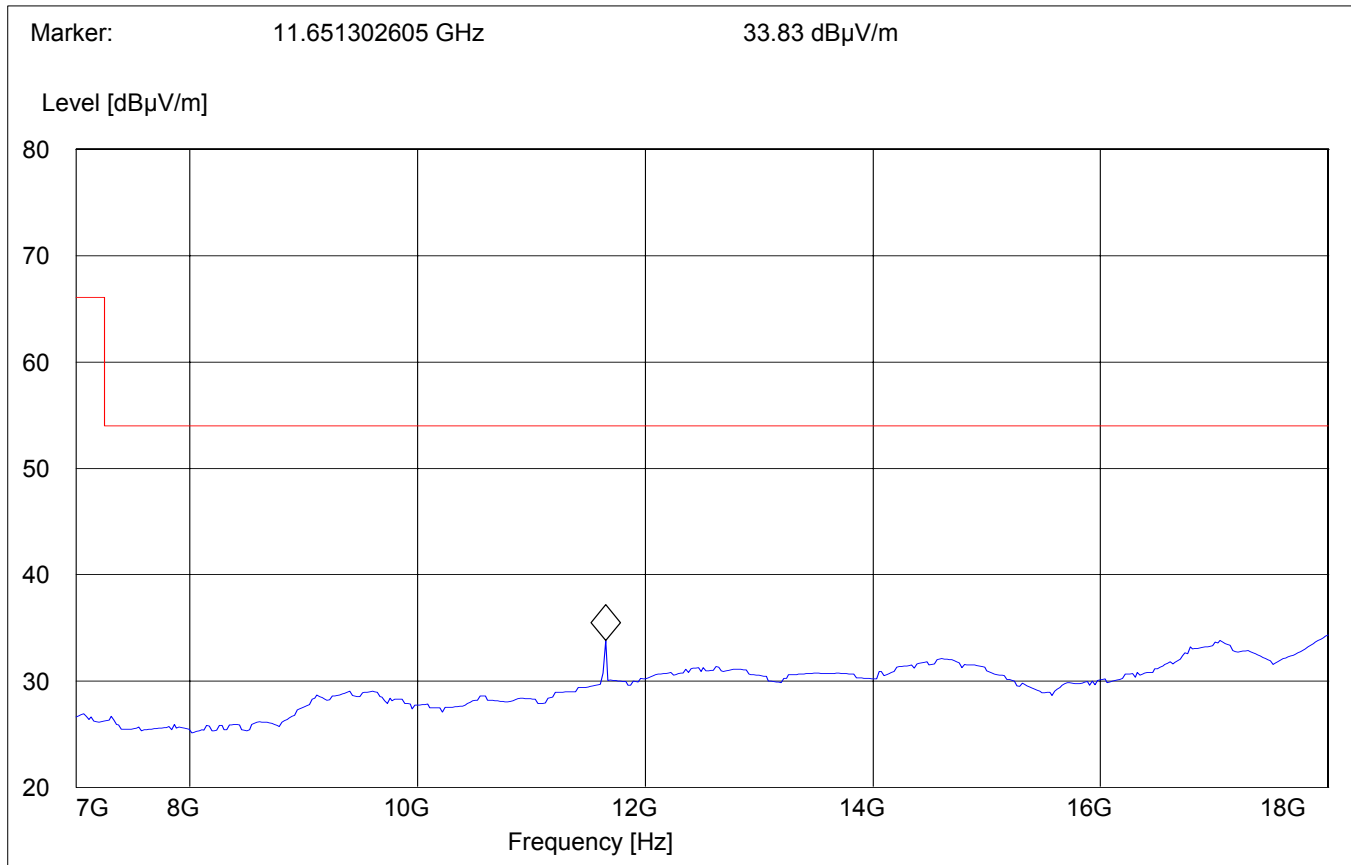

## EMISSION LIMITATIONS - Radiated (Transmitter) 18GHz – 26.5GHz


§ 15.247 (d)

Antenna: Vertical  
EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low & high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
18GHz	26.5 GHz	MaxPeak	Coupled	1MHz	3160-09 horn

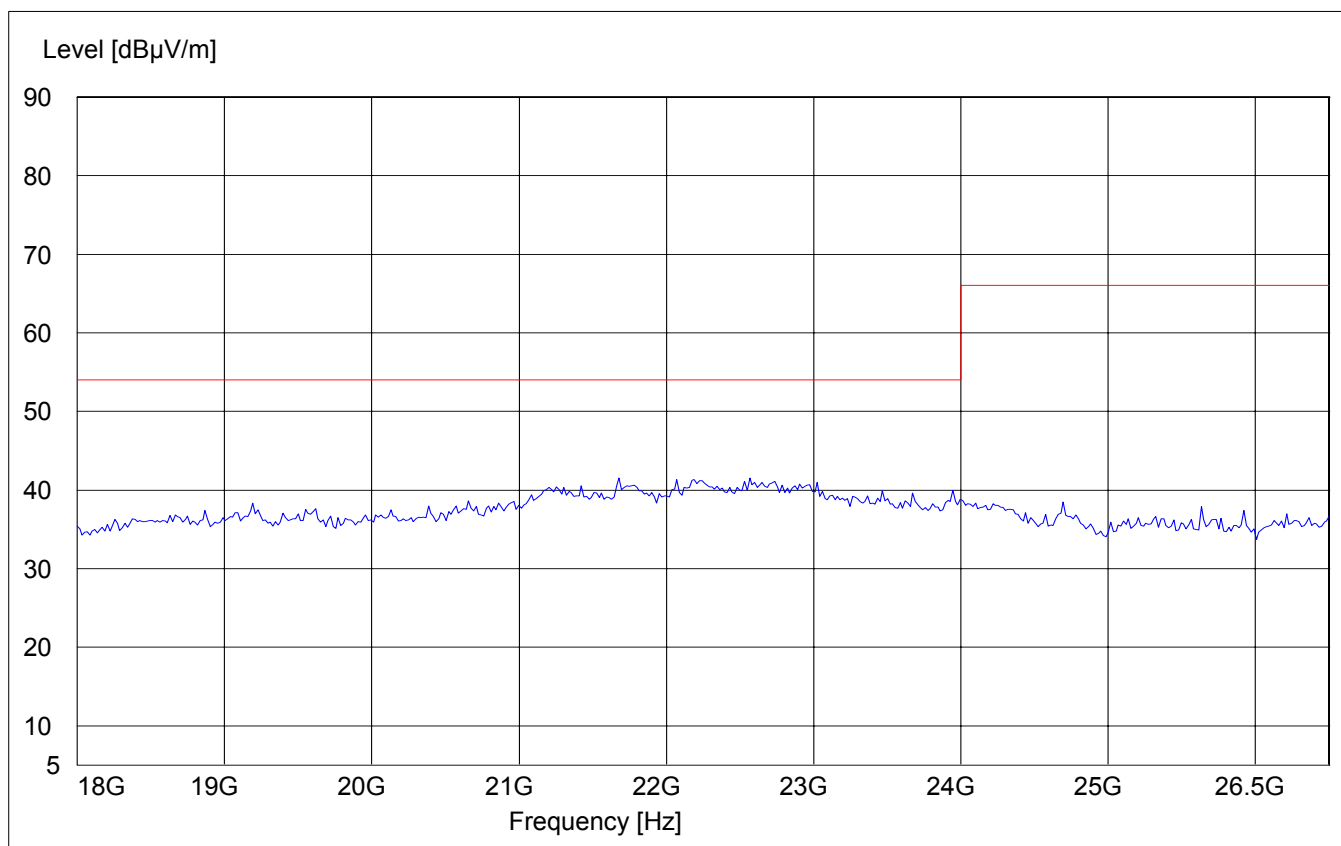

## EMISSION LIMITATIONS - Radiated (Transmitter) 26.5GHz – 40GHz


§ 15.247 (d)

Antenna: Vertical  
EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low & high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas. Time	RBW	VBW	Transducer
26.5GHz	40 GHz	MaxPeak	Coupled	1MHz		3160-10 horn

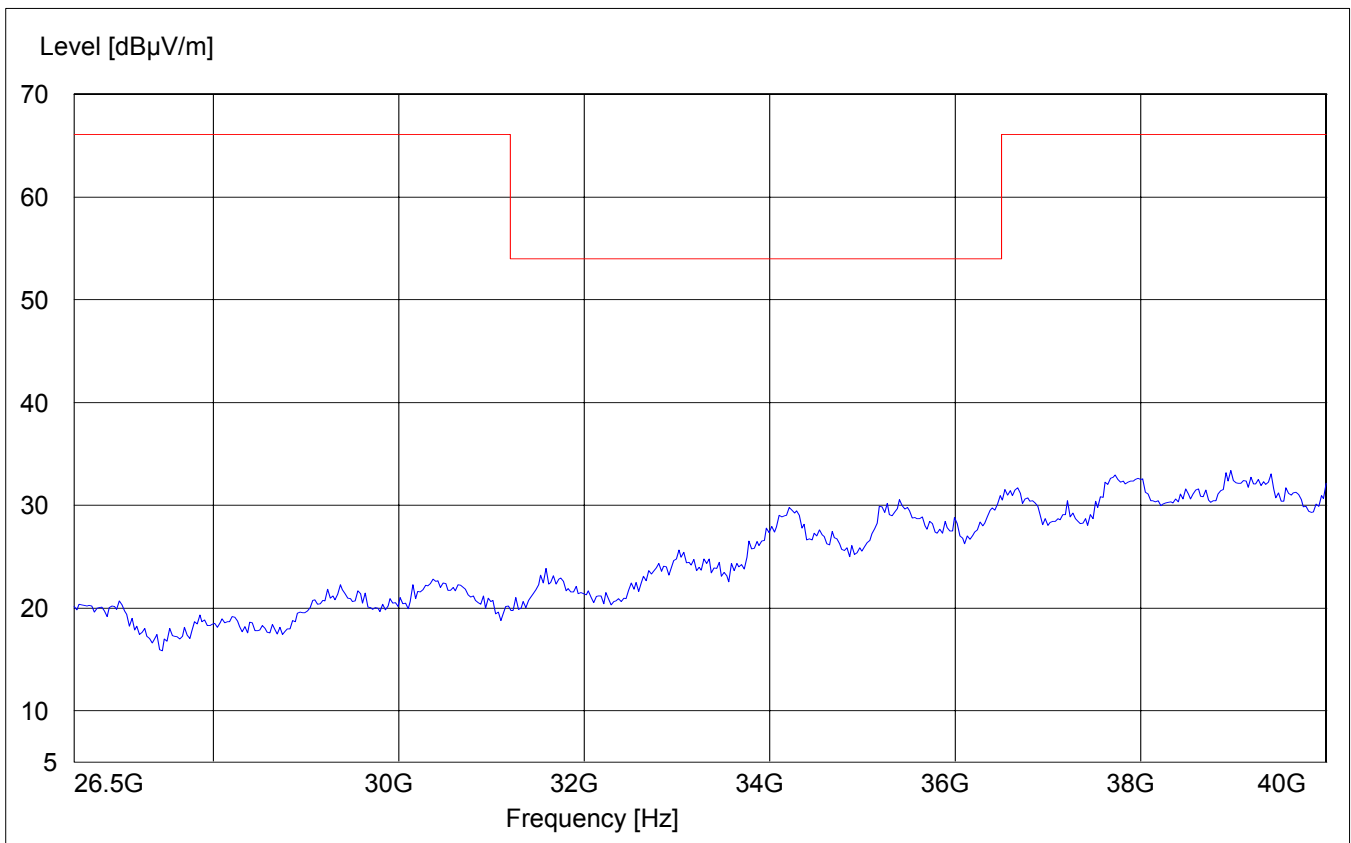

**CONDUCTED EMISSIONS**

§ 15.107/207

**Measured with AC/DC power adapter**

***SWEEP TABLE: "55022 cond"***

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

**Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**


**Limit**

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

**ANALYZER SETTINGS: RBW = 10KHz**

**VBW = 10KHz**

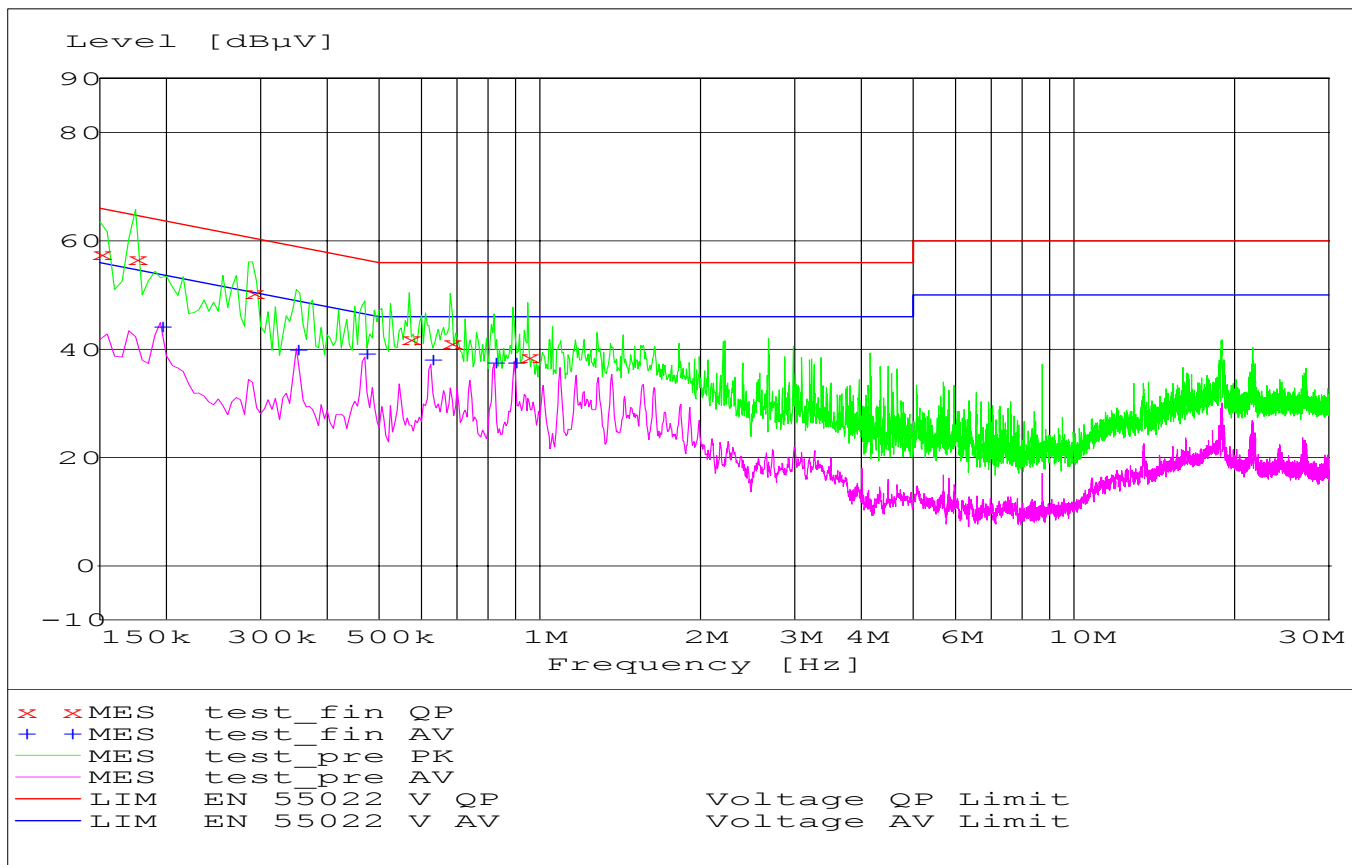

**MEASUREMENT RESULT: "test\_fin QP"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.150000	57.60	0.0	66	8.4	N	GND
0.175000	56.70	0.0	65	8.0	N	GND
0.290000	50.50	0.0	61	10.0	N	GND
0.570000	42.00	0.0	56	14.0	L1	GND
0.680000	41.10	0.0	56	14.9	N	GND
0.950000	38.70	0.0	56	17.3	N	GND

**MEASUREMENT RESULT: "test\_fin AV"**

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.195000	44.10	0.0	54	9.7	L1	GND
0.350000	40.00	0.0	49	8.9	L1	GND
0.470000	39.10	0.0	47	7.5	L1	GND
0.625000	38.10	0.0	46	7.9	N	GND
0.820000	37.50	0.0	46	8.5	L1	GND
0.895000	37.50	0.0	46	8.5	N	GND

**RECEIVER SPURIOUS RADIATION****§ 15.209****Limits**

Frequency (MHz)	Field strength (μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

**NOTE:**

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.



## RECEIVER SPURIOUS RADIATION

§ 15.209

(Data rate – 54Mbps)


Antenna: vertical

EUT plane: Horizontal with screen vertical @ 90°

**Note: This plot is valid for low, mid, high channels (worst-case plot valid for all channels)**

SWEEP TABLE: "WLAN Spuri hi 30-1G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

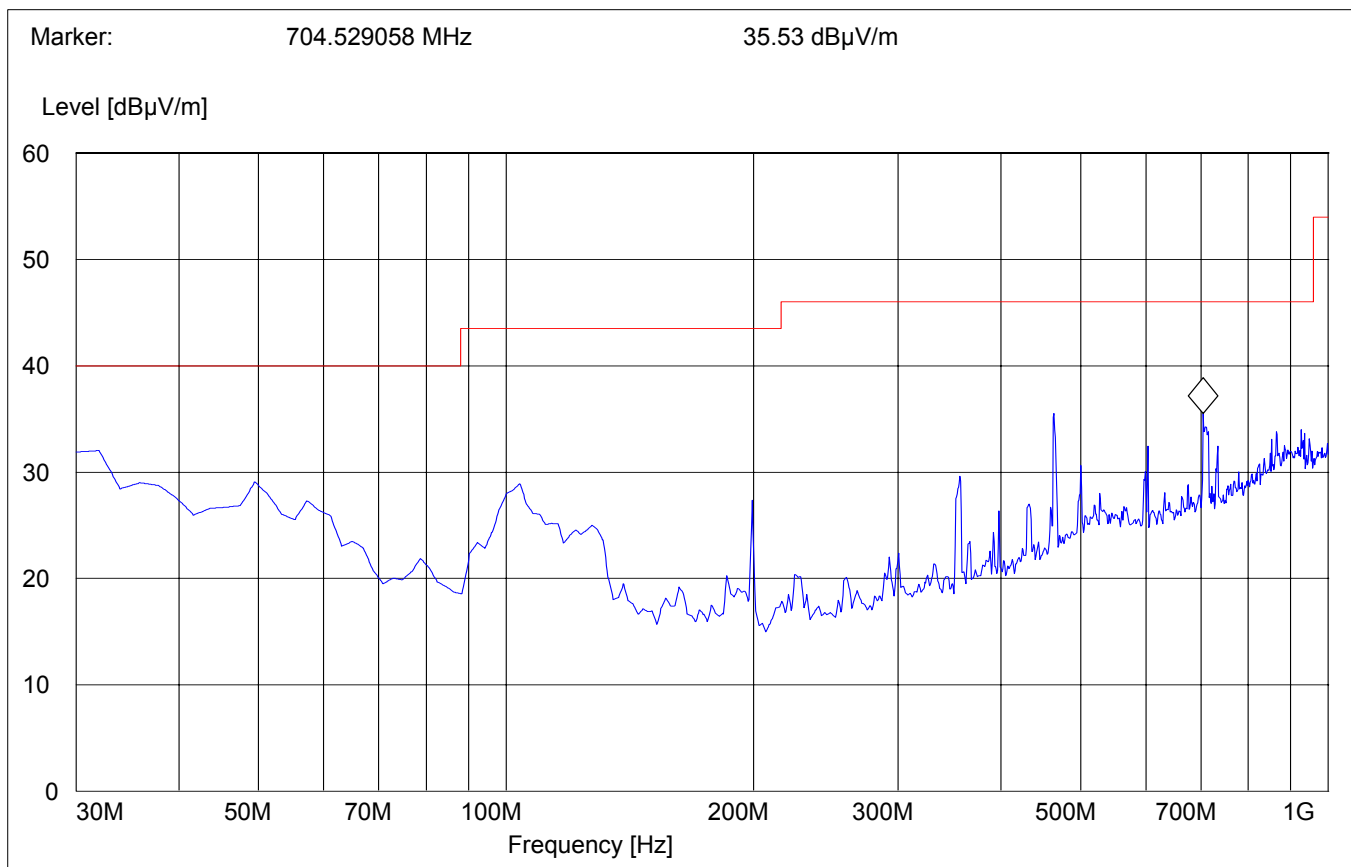


**RECEIVER SPURIOUS RADIATION**  
**1GHz – 7GHz**

§ 15.209

**Antenna:** Vertical  
**EUT plane:** Horizontal with screen vertical @ 90°

**SWEEP TABLE:** "WLAN Spuri hi 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

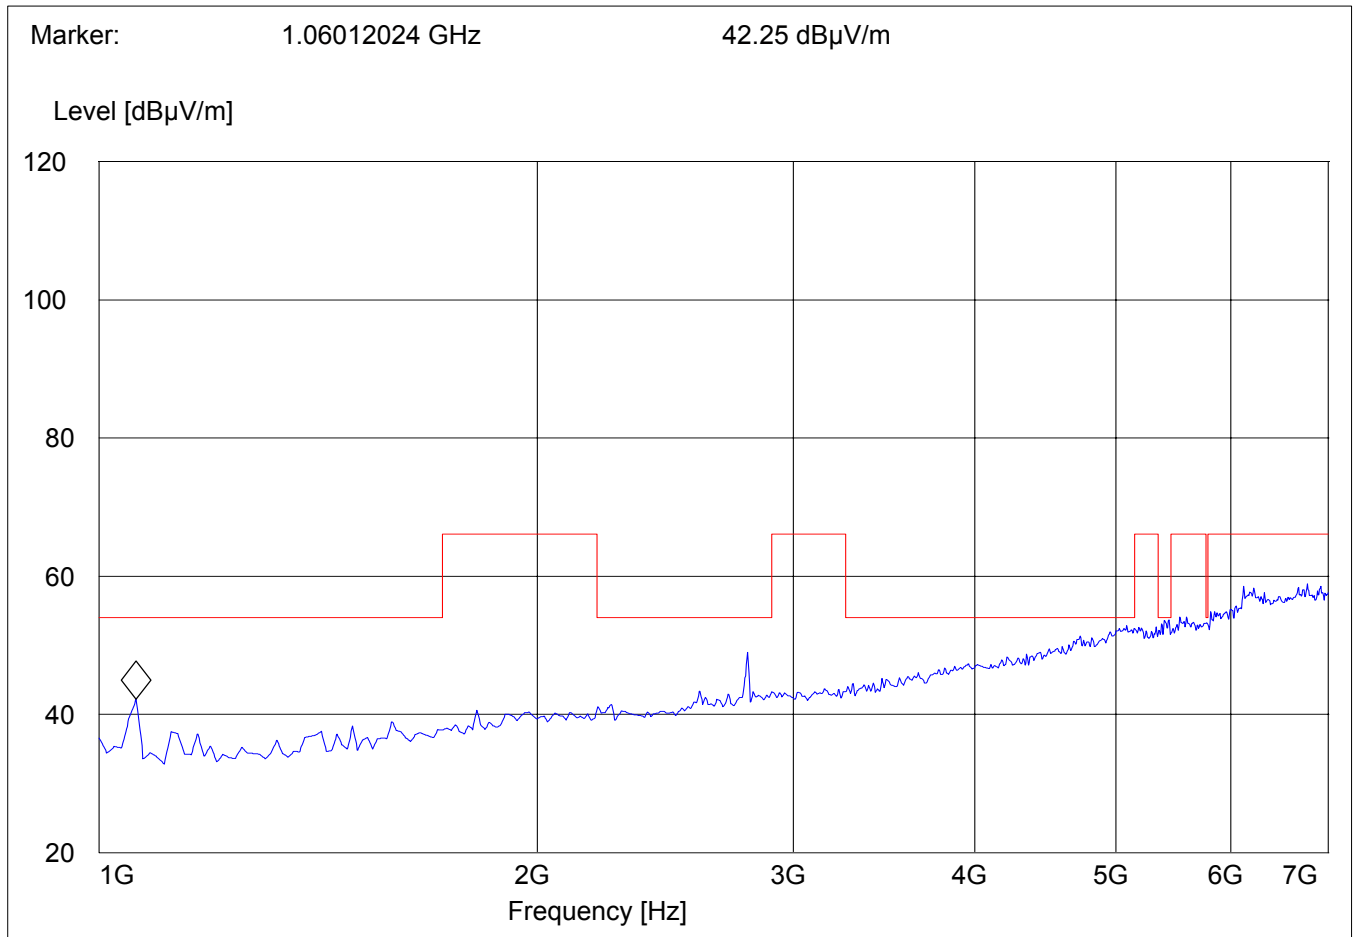


## RECEIVER SPURIOUS RADIATION 7GHz – 18GHz

§ 15.209

Antenna: Vertical  
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 7-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
7.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

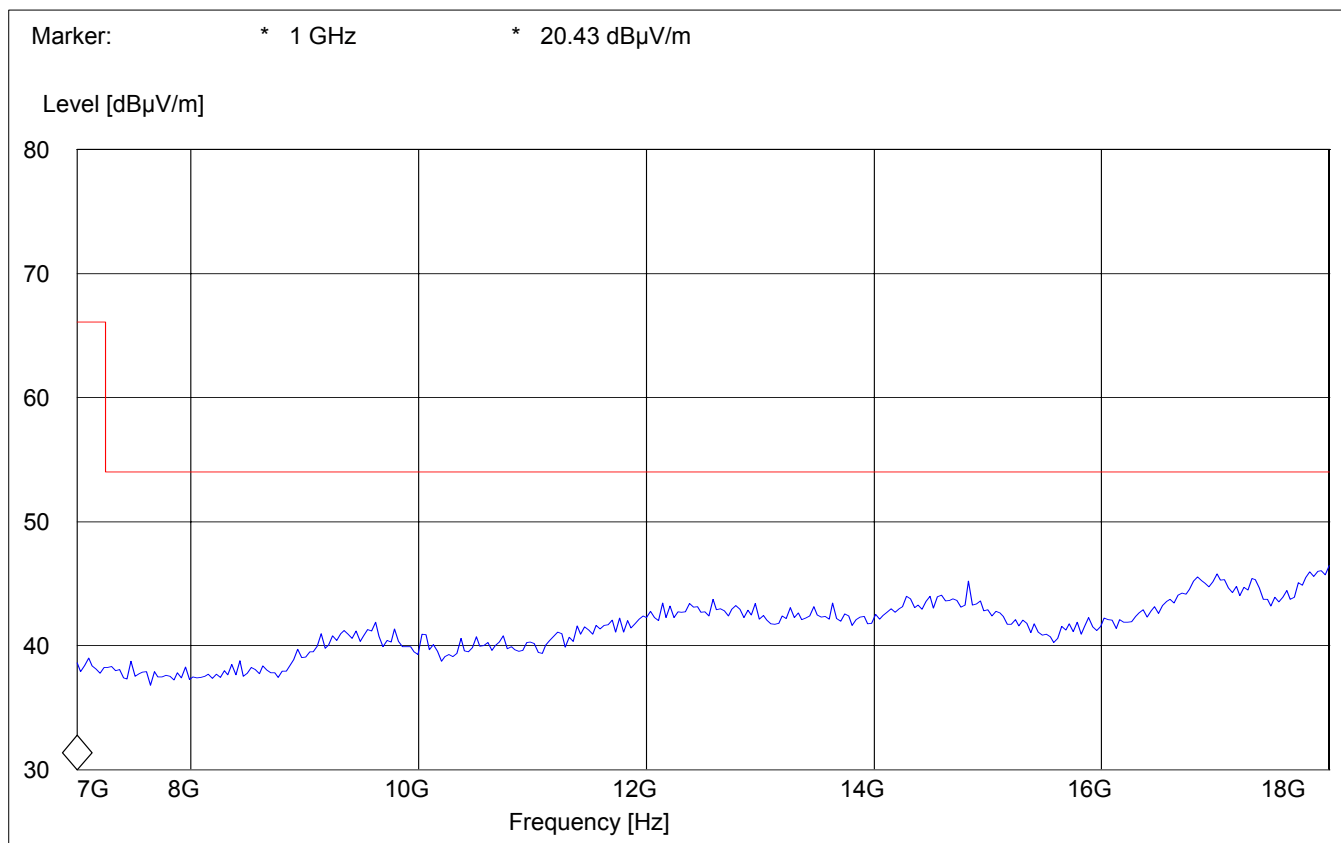


## RECEIVER SPURIOUS RADIATION 18GHz – 26.5GHz

§ 15.209

Antenna: Vertical  
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

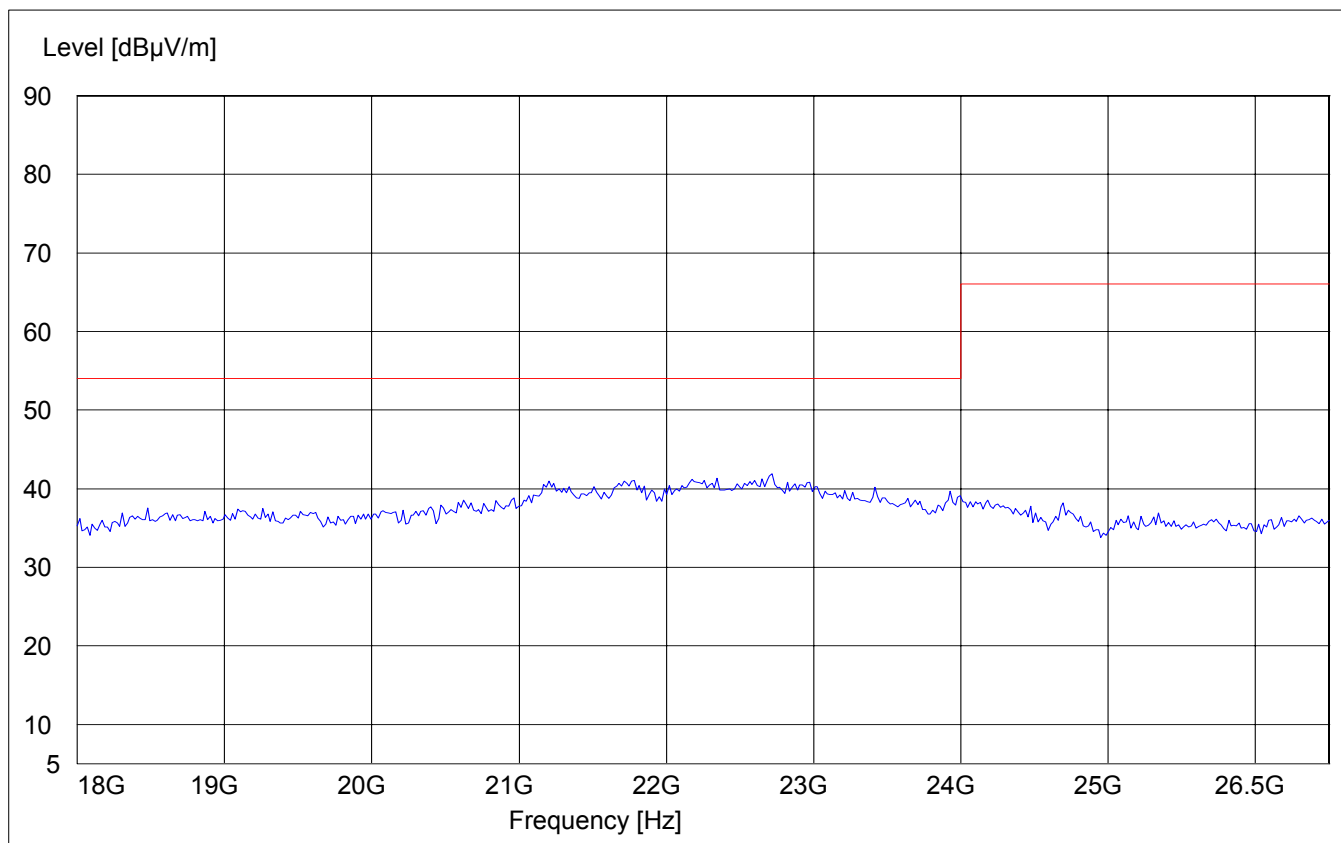


## RECEIVER SPURIOUS RADIATION 26.5GHz – 40GHz

§ 15.209

Antenna: Vertical  
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 26.5-40G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
26.5 GHz	40 GHz	MaxPeak	Coupled	1 MHz	3160-10 horn

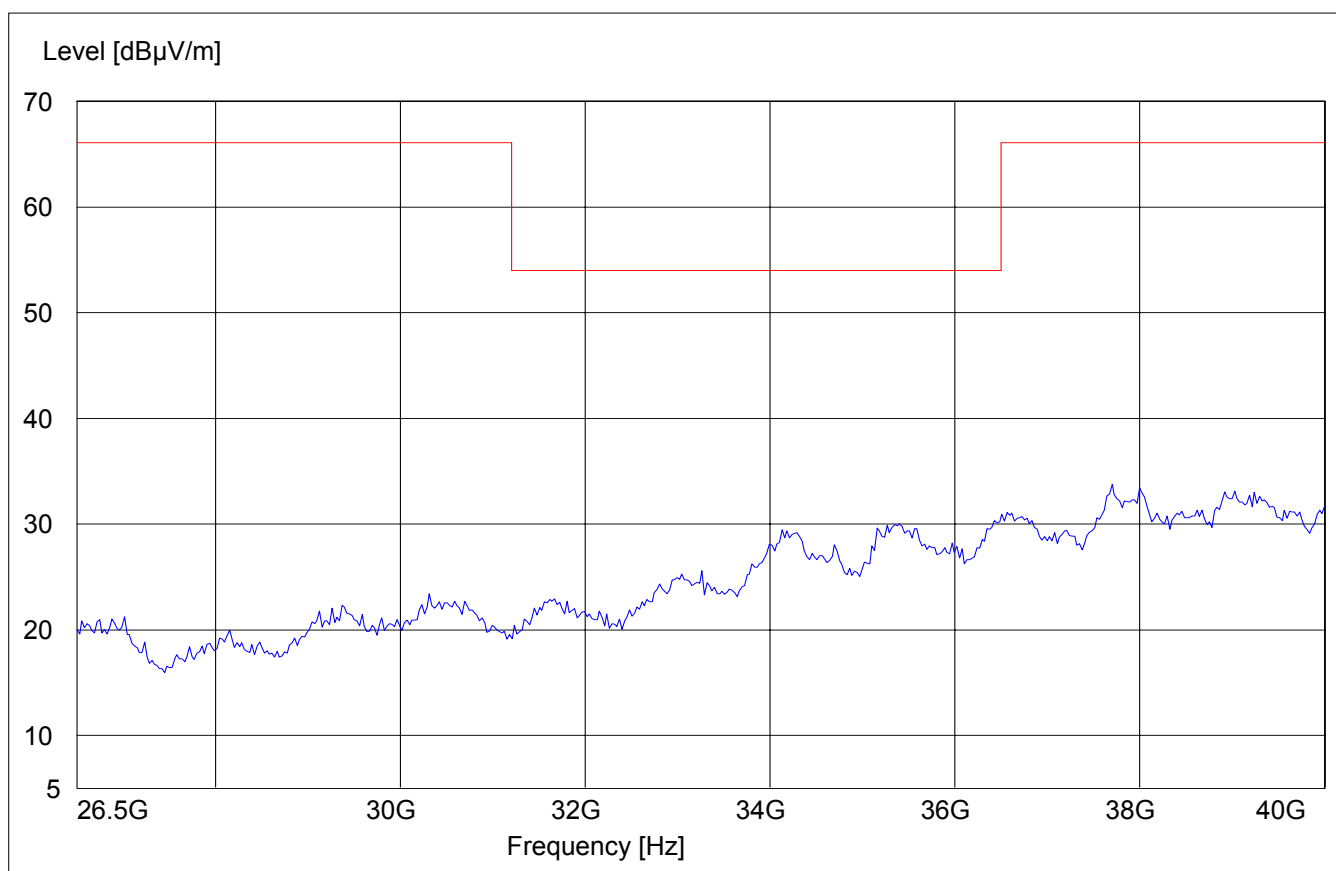

**TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

<b>No</b>	<b>Instrument/Ancillary</b>	<b>Type</b>	<b>Manufacturer</b>	<b>Serial No.</b>
<b>01</b>	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
<b>02</b>	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
<b>03</b>	Biconilog Antenna	3141	EMCO	0005-1186
<b>04</b>	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
<b>05</b>	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
<b>06</b>	2-3GHz Band reject filter	BRM50701	Microtronics	6
<b>07</b>	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
<b>08</b>	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
<b>09</b>	Pre-Amplifier	JS4-00102600	Miteq	00616

**BLOCK DIAGRAMS**  
**Radiated Testing**

**ANECHOIC CHAMBER**

