

Ecovacs Home Service Robotics Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISSED RSS-247 RF report

Model:

DEX56, DDX15

REPORT NUMBER:

2408B0748SHA-002

ISSUE DATE:

October 10, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.247-02_V1 © 2018 Intertek



Applicant: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road,Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Manufacturer: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road,Wusongjiang industry Park, Guoxiang Street,
Wuzhong District, Suzhou, Jiangsu, China.

Factory 1: Ecovacs Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang
Street, Wuzhong District, Suzhou, Jiangsu, China

Factory 2: Ecovacs Home Service Robotics Co., Ltd.
No.518 Songwei Road, Wusongjiang industry Park, Guoxiang
Street, Wuzhong District, Suzhou, Jiangsu, China.

FCC ID: 2A64B-DEX56

IC: 28593-DEX56

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 3 (August 2023): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (March 2019) Amendment 1: General Requirements for Compliance of Radio Apparatus

PREPARED BY:

Project Engineer
Eric Li

REVIEWED BY:

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

| | |
|---|-----------|
| REVISION HISTORY | 5 |
| MEASUREMENT RESULT SUMMARY | 6 |
| 1 GENERAL INFORMATION | 7 |
| 1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) | 7 |
| 1.2 TECHNICAL SPECIFICATION | 7 |
| 1.3 DESCRIPTION OF TEST FACILITY | 8 |
| 2 TEST SPECIFICATIONS | 9 |
| 2.1 STANDARDS OR SPECIFICATION | 9 |
| 2.2 MODE OF OPERATION DURING THE TEST | 9 |
| 2.3 TEST SOFTWARE LIST | 10 |
| 2.4 TEST PERIPHERALS LIST | 10 |
| 2.5 TEST ENVIRONMENT CONDITION | 10 |
| 2.6 INSTRUMENT LIST | 11 |
| 2.7 MEASUREMENT UNCERTAINTY | 13 |
| 3 MINIMUM 6DB BANDWIDTH | 14 |
| 3.1 LIMIT | 14 |
| 3.2 MEASUREMENT PROCEDURE | 14 |
| 3.3 TEST CONFIGURATION | 14 |
| 3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH | 14 |
| 4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P. | 15 |
| 4.1 LIMIT | 15 |
| 4.2 MEASUREMENT PROCEDURE | 15 |
| 4.3 TEST CONFIGURATION | 16 |
| 4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER | 16 |
| 5 POWER SPECTRUM DENSITY | 17 |
| 5.1 LIMIT | 17 |
| 5.2 MEASUREMENT PROCEDURE | 17 |
| 5.3 TEST CONFIGURATION | 18 |
| 5.4 TEST RESULTS OF POWER SPECTRUM DENSITY | 18 |
| 6 EMISSION OUTSIDE THE FREQUENCY BAND | 19 |
| 6.1 LIMIT | 19 |
| 6.2 MEASUREMENT PROCEDURE | 19 |
| 6.3 TEST CONFIGURATION | 20 |
| 6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND | 20 |
| 7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS | 21 |
| 7.1 LIMIT | 21 |
| 7.2 MEASUREMENT PROCEDURE | 21 |
| 7.3 TEST CONFIGURATION | 23 |
| 7.4 TEST RESULTS OF RADIATED EMISSIONS | 25 |
| 8 POWER LINE CONDUCTED EMISSION | 28 |
| 8.1 LIMIT | 28 |
| 8.2 TEST CONFIGURATION | 28 |
| 8.3 MEASUREMENT PROCEDURE | 29 |
| 8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION | 30 |

TEST REPORT

9 OCCUPIED BANDWIDTH 32

 9.1 LIMIT 32

 9.2 MEASUREMENT PROCEDURE 32

 9.3 TEST CONFIGURATION 32

 9.4 THE RESULTS OF OCCUPIED BANDWIDTH 32

10 ANTENNA REQUIREMENT 33

Revision History

| Report No. | Version | Description | Issued Date |
|------------------|---------|-------------------------|------------------|
| 2408B0748SHA-002 | Rev. 01 | Initial issue of report | October 10, 2024 |
| | | | |
| | | | |




Measurement result summary

| TEST ITEM | FCC REFERENCE | IC REFERENCE | RESULT |
|---|-----------------------------|------------------------------------|--------|
| Minimum 6dB Bandwidth | 15.247(a)(2) | RSS-247 Issue 3 Clause 5.2 | Pass |
| Maximum conducted output power and e.i.r.p. | 15.247(b)(3) | RSS-247 Issue 3 Clause 5.4 | Pass |
| Power spectrum density | 15.247(e) | RSS-247 Issue 3 Clause 5.2 | Pass |
| Emission outside the frequency band | 15.247(d) | RSS-247 Issue 3 Clause 5.5 | Pass |
| Radiated Emissions in restricted frequency bands | 15.247(d), 15.205&15.209 | RSS-Gen Issue 5 Clause 8.9&8.10 | Pass |
| Power line conducted emission | 15.207(a) | RSS-Gen Issue 5 Clause 8.8 | Pass |
| Occupied bandwidth | - | RSS-Gen Issue 5 Clause 6.6 | Tested |
| Antenna requirement | 15.203 | - | Pass |

Notes: 1: NA =Not Applicable

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

| | |
|----------------------------|--|
| Product name: | Floor Cleaning Robot |
| Type/Model/PMN/HVIN: | DEX56, DDX15 |
| Description of EUT: | The EUT is a Floor Cleaning Robot, it supports WIFI functions, there are two models, they are the same except DDX15 shut down the AI camera function through software. We tested DEX56 as representative and listed the worst results in this report. |
| Rating: | DC20V, 2A |
| Brand Name: |  ,  ,  |
| Category of EUT: | Class B |
| EUT type: | <input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing |
| Software Version: | / |
| Hardware Version: | / |
| Sample Identification No.: | 0240804-006-002 |
| Sample received date: | 2024.8.4 |
| Date of test: | 2024.8.5~2024.8.30 |

1.2 Technical Specification

| | |
|----------------------|------------------------------|
| Frequency Band: | 2402MHz to 2480MHz |
| Support Standards: | Bluetooth Low Energy |
| Type of Modulation: | GFSK |
| Channel Number: | 40 |
| Data Rate | 1Mbps |
| Channel Separation: | 2MHz |
| Antenna Information: | FPC Antenna, gain is 2.55dBi |

1.3 Description of Test Facility

| | |
|------------|--|
| Name: | Intertek Testing Services (Shanghai FTZ) Co., Ltd. |
| Address: | Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China |
| Telephone: | 86 21 61278200 |
| Telefax: | 86 21 54262353 |

| | |
|---|--|
| The test facility is recognized, certified, or accredited by these organizations: | CNAS Accreditation Lab Registration No. CNAS L21189 |
| | FCC Accredited Lab Designation Number: CN0175 |
| | IC Registration Lab CAB identifier.: CN0014 |
| | VCCI Registration Lab Member No: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252) |
| | A2LA Accreditation Lab Certificate Number: 3309.02 |

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)

ANSI C63.10 (2013)

KDB 558074 (v05r02)

RSS-247 Issue 3 (August 2023)

RSS-Gen Issue 5 (March 2019) Amendment 1

2.2 Mode of operation during the test

The lowest, middle and highest channel were tested as representatives.

| Frequency Band (MHz) | | | | 2402 ~ 2480 | | | |
|----------------------|-----------------|-----------|-----------------|-------------|-----------------|-----------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 0 | 2402 | 10 | 2422 | 20 | 2442 | 30 | 2462 |
| 1 | 2404 | 11 | 2424 | 21 | 2444 | 31 | 2464 |
| 2 | 2406 | 12 | 2426 | 22 | 2446 | 32 | 2466 |
| 3 | 2408 | 13 | 2428 | 23 | 2448 | 33 | 2468 |
| 4 | 2410 | 14 | 2430 | 24 | 2450 | 34 | 2470 |
| 5 | 2412 | 15 | 2432 | 25 | 2452 | 35 | 2472 |
| 6 | 2414 | 16 | 2434 | 26 | 2454 | 36 | 2474 |
| 7 | 2416 | 17 | 2436 | 27 | 2456 | 37 | 2476 |
| 8 | 2418 | 18 | 2438 | 28 | 2458 | 38 | 2478 |
| 9 | 2420 | 19 | 2440 | 29 | 2460 | 39 | 2480 |

Data rate VS Power:

| Test software and Power Setting parameter | | | |
|---|-----------|---------|---------|
| Test Software | Putty.exe | | |
| Working Mode | BLE | | |
| Test Channel | 2402MHz | 2440MHz | 2480MHz |
| Power Setting | Default | Default | Default |

2.3 Test software list

| Test Items | Software | Manufacturer | Version |
|--------------------|----------|--------------|---------|
| Conducted emission | ESxS-K1 | R&S | V2.1.0 |
| Radiated emission | ES-K1 | R&S | V1.71 |

2.4 Test peripherals list

| Item No. | Name | Band and Model | Description |
|----------|-----------------|----------------|-------------|
| 1 | Laptop computer | DELL 5480 | / |
| 2 | Docking station | CH2453G | / |
| | | | |

2.5 Test environment condition:

| Test items | Temperature | Humidity |
|--|-------------|----------|
| Minimum 6dB Bandwidth | 25°C | 52% RH |
| Maximum conducted output power and e.i.r.p. | | |
| Power spectrum density | | |
| Emission outside the frequency band | | |
| Occupied bandwidth | | |
| Radiated Emissions in restricted frequency bands | 24°C | 53% RH |
| Power line conducted emission | 24°C | 52% RH |

2.6 Instrument list

| Conducted Emission | | | | | |
|-------------------------------------|--------------------------------------|--------------|------------------------|--------------|------------|
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESR7 | EC 6194 | 2025-02-27 |
| <input checked="" type="checkbox"/> | Attenuator | Hua Xiang | Ts5-10db-6g | EC 6194-1 | 2024-12-07 |
| <input checked="" type="checkbox"/> | A.M.N. | R&S | ESH2-Z5 | EC 3119 | 2024-11-19 |
| <input type="checkbox"/> | A.M.N. | R&S | ENV 216 | EC 3393 | 2025-07-17 |
| <input type="checkbox"/> | A.M.N. | R&S | ENV4200 | EC 3558 | 2025-06-05 |
| Radiated Emission | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESIB 26 | EC 3045 | 2025-08-22 |
| <input checked="" type="checkbox"/> | Test Receiver | R&S | ESR | EC6501 | 2024-09-24 |
| <input checked="" type="checkbox"/> | Bilog Antenna | TESEQ | CBL 6112B | EC 6411 | 2024-09-12 |
| <input checked="" type="checkbox"/> | TRILOG broadband Antenna | Schwarzbeck | VULB9168 | EC 6402 | 2025-02-14 |
| <input checked="" type="checkbox"/> | Pre-amplifier | R&S | AFS42-00101800-25-S-42 | EC 5262 | 2025-06-15 |
| <input type="checkbox"/> | Pre-amplifier | Tonscend | tap01018050 | EC 6432-1 | 2024-12-07 |
| <input type="checkbox"/> | Horn antenna | Tonscend | bha9120d | EC 6432-2 | 2025-02-15 |
| <input checked="" type="checkbox"/> | Horn antenna | ETS | 3117 | EC 4792-1 | 2024-09-15 |
| <input checked="" type="checkbox"/> | Horn antenna | TOYO | HAP18-26W | EC 4792-3 | 2026-09-12 |
| <input type="checkbox"/> | Active loop antenna | Schwarzbeck | FMZB1519 | EC 5345 | 2025-07-16 |
| <input checked="" type="checkbox"/> | Horn antenna | ETS | 3116c | EC 5955 | 2025-07-22 |
| RF test | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | PXA Signal Analyzer | Keysight | N9030A | EC 5338 | 2025-03-07 |
| <input type="checkbox"/> | Power sensor | Agilent | U2021XA | EC 5338-1 | 2025-03-07 |
| <input type="checkbox"/> | Vector Signal Generator | Agilent | N5182B | EC 5175 | 2025-03-07 |
| <input type="checkbox"/> | Universal Radio Communication Tester | R&S | CMW500 | EC5944 | 2025-03-07 |
| <input type="checkbox"/> | MXG Analog | Agilent | N5181A | EC 5338-2 | 2025-03-07 |

TEST REPORT

| | Signal Generator | | | | |
|-------------------------------------|------------------------|-------------------|-----------------|--------------|------------|
| <input type="checkbox"/> | Mobile Test System | Litepoint | Iqxel | EC 5176 | 2025-01-11 |
| <input type="checkbox"/> | Test Receiver | R&S | ESCI 7 | EC 4501 | 2024-12-09 |
| <input type="checkbox"/> | Climate chamber | GWS | MT3065 | EC 6021 | 2025-03-06 |
| <input type="checkbox"/> | Spectrum Analyzer | Keysight | N9030B | EC 6078 | 2025-06-08 |
| Tet Site | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Shielded room | Zhongyu | - | EC 2838 | 2025-01-11 |
| <input type="checkbox"/> | Shielded room | Zhongyu | - | EC 2839 | 2025-01-11 |
| <input checked="" type="checkbox"/> | Semi-anechoic chamber | Albatross project | - | EC 3048 | 2025-07-08 |
| <input type="checkbox"/> | Fully-anechoic chamber | Albatross project | - | EC 3047 | 2025-07-08 |
| Additional instrument | | | | | |
| Used | Equipment | Manufacturer | Type | Internal no. | Due date |
| <input checked="" type="checkbox"/> | Thermo-Hygrograph | Testo | 175h1 | EC 6640 | 2025-08-28 |
| <input type="checkbox"/> | Thermo-Hygrograph | Testo | 175h1 | EC 6641 | 2025-08-28 |
| <input checked="" type="checkbox"/> | Thermo-Hygrograph | Testo | 175h1 | EC6642 | 2025-08-28 |
| <input checked="" type="checkbox"/> | Thermo-Hygrograph | Testo | 175h1 | EC 6643 | 2025-08-28 |
| <input type="checkbox"/> | Thermo-Hygrograph | Testo | 175h1 | EC 6644 | 2025-08-28 |
| <input type="checkbox"/> | Pressure meter | YM3 | Shanghai Mengde | EC 3320 | 2025-08-16 |

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Test item | Measurement uncertainty |
|---|-------------------------|
| Maximum peak output power | $\pm 0.74\text{dB}$ |
| Radiated Emissions in restricted frequency bands below 1GHz | $\pm 4.90\text{dB}$ |
| Radiated Emissions in restricted frequency bands above 1GHz | $\pm 5.02\text{dB}$ |
| Emission outside the frequency band | $\pm 2.89\text{dB}$ |
| Power line conducted emission | $\pm 3.19\text{dB}$ |

3 Minimum 6dB bandwidth

Test result: Pass


3.1 Limit

For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

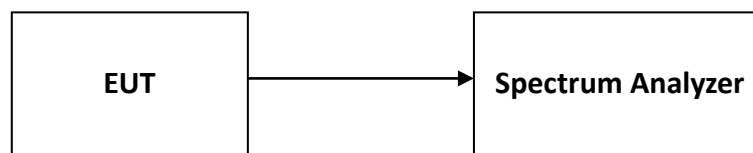

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix B

4 Maximum conducted output power and e.i.r.p.

Test result: Pass

4.1 Limit


For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

4.3 Test Configuration

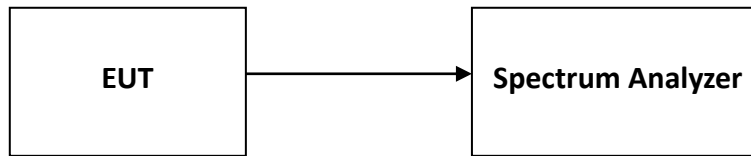

4.4 Test Results of Maximum conducted output power

Please refer to Appendix B

TEST REPORT

5 Power spectrum density

Test result: Pass

5.1 Limit


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and $8 + (6 - \text{antenna gain} - \text{beam forming gain})$.

5.2 Measurement Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration

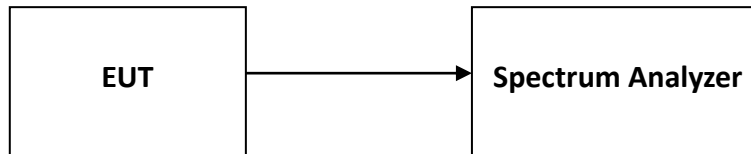

5.4 Test Results of Power spectrum density

Please refer to Appendix B

TEST REPORT

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration



6.4 The results of Emission outside the frequency band

Please refer to Appendix B

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

7.2 Measurement Procedure

The EUT was tested according to Subclause 11.12 of ANSI C63.10.

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. For the floor-standing devices, the EUT was placed on the top of a rotating table 0.1 meters above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT

For Radiated emission above 30MHz:


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. For the floor-standing devices, the EUT was placed on the top of a rotating table 0.1 meters above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detector function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 3 x RBW (Duty cycle \geq 98%) for Average detection (AV) at frequency above 1GHz.
- 4. All modes of operation were and the worst-case emissions were reported.

7.3 Test Configuration


For Radiated emission below 30MHz:

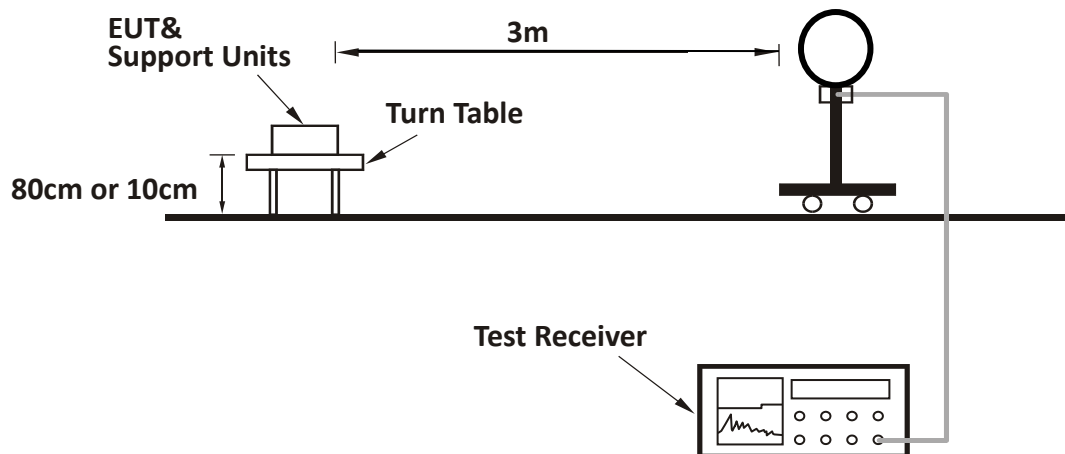

For Radiated emission 30MHz to 1GHz:

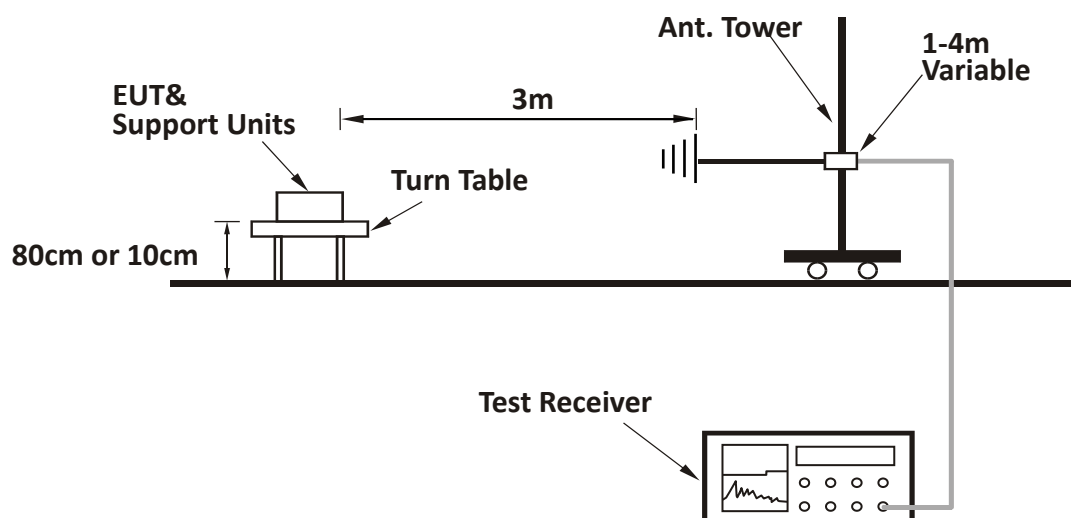

For Radiated emission above 1GHz:

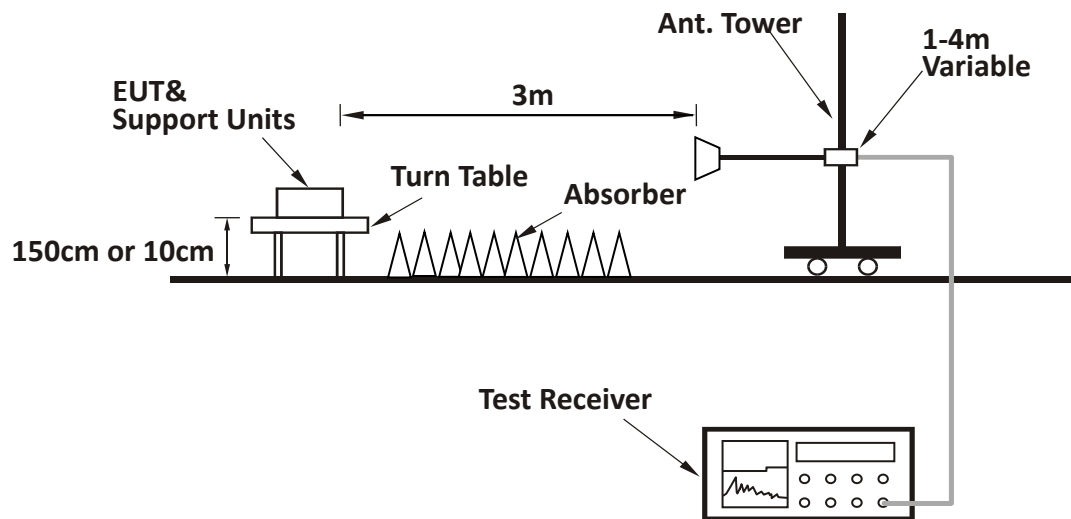


TEST REPORT

7.4 Test Results of Radiated Emissions

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


Horizontal

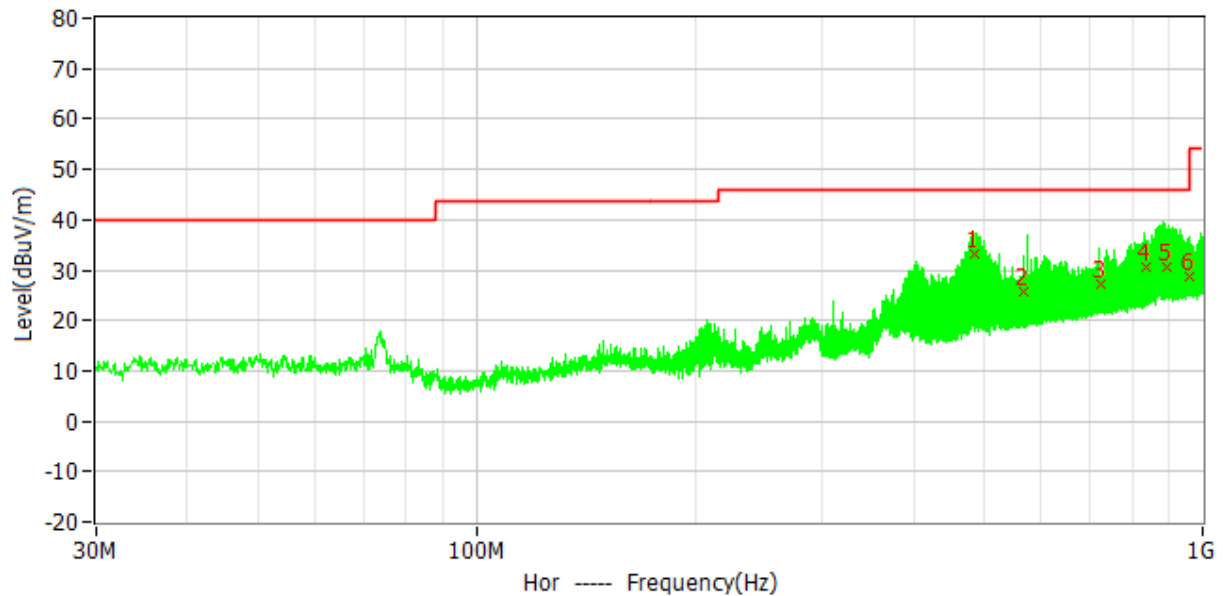

| No. | Frequency | Limit dBuV/m | Level dBuV/m | Delta dB | Reading dBuV | Factor dB/m | Detector | Polar |
|-----|------------|-----------------|-----------------|-------------|-----------------|----------------|----------|-------|
| 1 | 485.506MHz | 46.00 | 33.25 | -12.75 | 13.05 | 20.20 | QP | Hor |
| 2 | 568.402MHz | 46.00 | 25.77 | -20.23 | 3.77 | 22.00 | QP | Hor |
| 3 | 724.344MHz | 46.00 | 27.30 | -18.70 | 2.80 | 24.50 | QP | Hor |
| 4 | 834.871MHz | 46.00 | 30.41 | -15.59 | 4.11 | 26.30 | QP | Hor |
| 5 | 890.108MHz | 46.00 | 30.49 | -15.51 | 3.49 | 27.00 | QP | Hor |
| 6 | 959.174MHz | 46.00 | 28.64 | -17.36 | 1.04 | 27.60 | QP | Hor |

TEST REPORT

Vertical

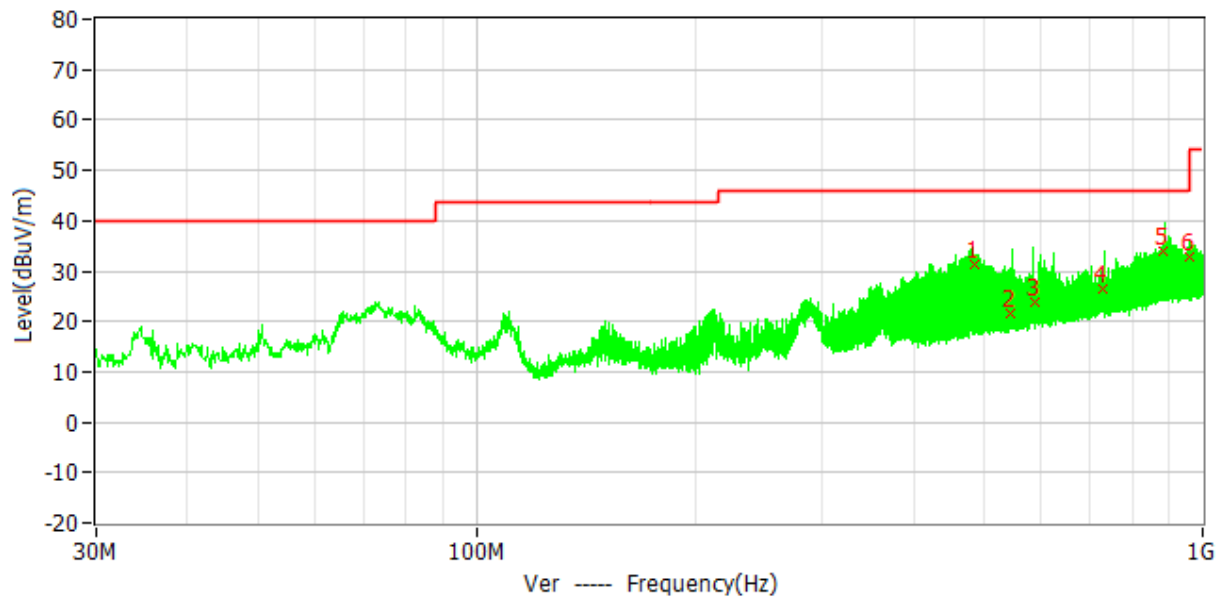

| No. | Frequency | Limit dBuV/m | Level dBuV/m | Delta dB | Reading dBuV | Factor dB/m | Detector | Polar |
|-----|------------|-----------------|-----------------|-------------|-----------------|----------------|----------|-------|
| 1 | 485.530MHz | 46.00 | 31.18 | -14.82 | 10.98 | 20.20 | QP | Ver |
| 2 | 544.659MHz | 46.00 | 21.68 | -24.32 | 0.18 | 21.50 | QP | Ver |
| 3 | 587.100MHz | 46.00 | 23.64 | -22.36 | 1.34 | 22.30 | QP | Ver |
| 4 | 728.277MHz | 46.00 | 26.59 | -19.41 | 1.99 | 24.60 | QP | Ver |
| 5 | 880.267MHz | 46.00 | 33.86 | -12.14 | 6.96 | 26.90 | QP | Ver |
| 6 | 959.213MHz | 46.00 | 32.83 | -13.17 | 5.23 | 27.60 | QP | Ver |

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Level = Original Receiver Reading + Correct Factor
 3. Delta = Level - Limit
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

TEST REPORT

Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

| CH | Antenna | Frequency (MHz) | Corrected Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector |
|----|---------|-----------------|----------------------------|----------------|-------------|----------|
| L | H | 2390.00 | 50.90 | 74.00 | 23.10 | PK |
| | V | 2390.00 | 51.70 | 74.00 | 22.30 | PK |
| | H | 4804.00 | 45.80 | 74.00 | 28.20 | PK |
| | V | 4804.00 | 46.60 | 74.00 | 27.40 | PK |
| M | H | 4880.00 | 45.90 | 74.00 | 28.10 | PK |
| | V | 4880.00 | 46.60 | 74.00 | 27.40 | PK |
| H | H | 2483.50 | 51.10 | 74.00 | 22.90 | PK |
| | V | 2483.50 | 51.90 | 74.00 | 22.10 | PK |
| | H | 4960.00 | 45.40 | 74.00 | 28.60 | PK |
| | V | 4960.00 | 46.70 | 74.00 | 27.30 | PK |

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (- Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

8 Power line conducted emission


Test result: Pass

8.1 Limit

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|------------|
| | QP | AV |
| 0.15-0.5 | 66 to 56* | 56 to 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

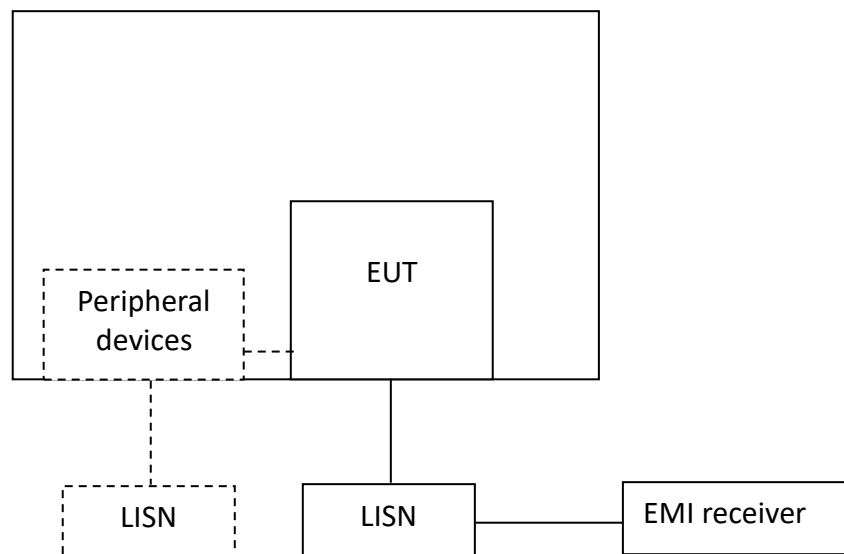

TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

TEST REPORT


8.4 Test Results of Power line conducted emission

Test Voltage: AC 120V, 60Hz

L Line

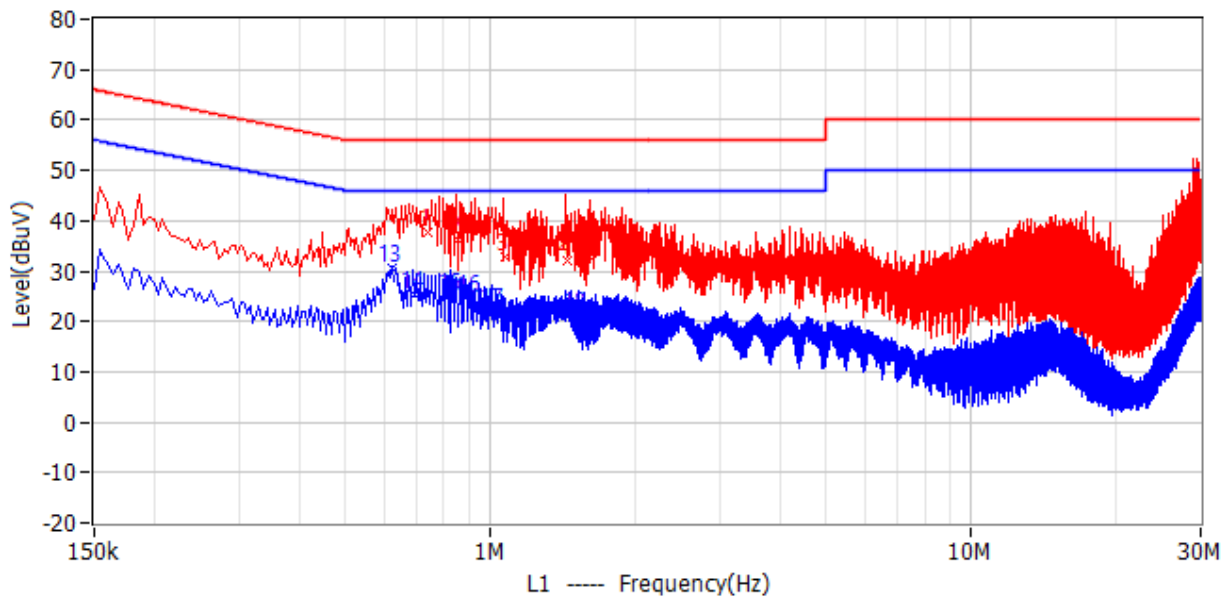

N Line

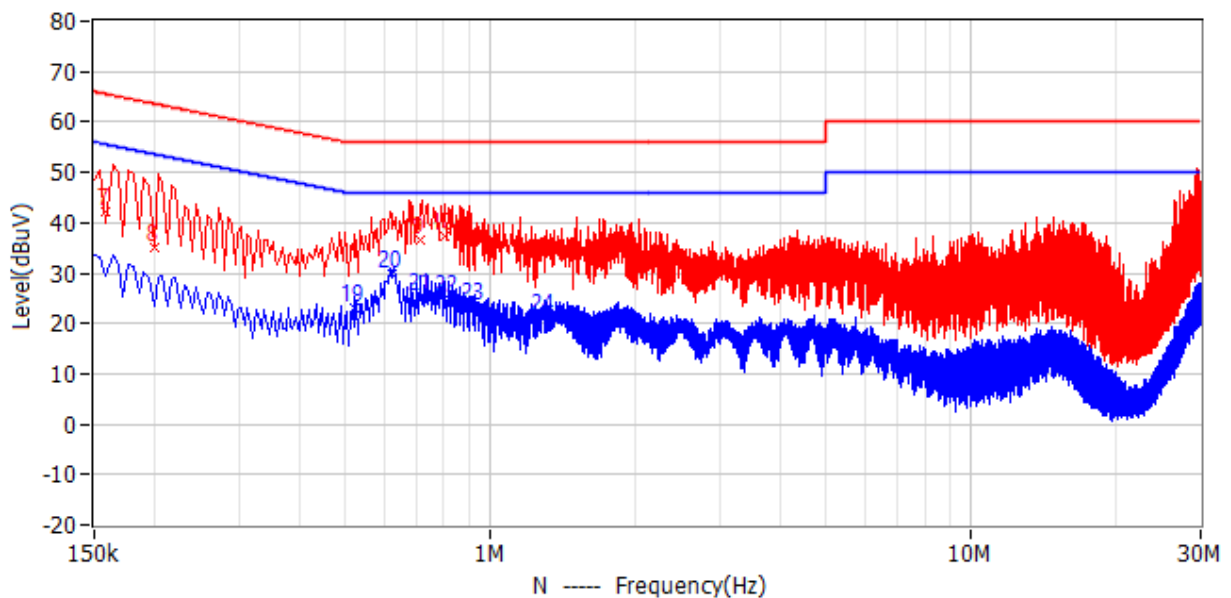

TEST REPORT

Test Data:

| No. | Frequency | Limit dBuV | Level dBuV | Delta dB | Reading dBuV | Factor dB | Detector | Phase |
|-----|------------|---------------|---------------|-------------|-----------------|--------------|----------|-------|
| 1 | 744.000kHz | 56.00 | 37.74 | -18.26 | 31.54 | 6.20 | QP | L1 |
| 2 | 856.500kHz | 56.00 | 36.28 | -19.72 | 30.08 | 6.20 | QP | L1 |
| 3 | 1.077MHz | 56.00 | 32.75 | -23.25 | 26.55 | 6.20 | QP | L1 |
| 4 | 1.446MHz | 56.00 | 31.96 | -24.04 | 25.76 | 6.20 | QP | L1 |
| 5 | 1.613MHz | 56.00 | 32.69 | -23.31 | 26.49 | 6.20 | QP | L1 |
| 6 | 29.621MHz | 60.00 | 36.45 | -23.55 | 28.55 | 7.90 | QP | L1 |
| 7 | 159.000kHz | 65.52 | 41.99 | -23.53 | 35.79 | 6.20 | QP | N |
| 8 | 199.500kHz | 63.63 | 35.23 | -28.40 | 29.03 | 6.20 | QP | N |
| 9 | 712.500kHz | 56.00 | 36.42 | -19.58 | 30.22 | 6.20 | QP | N |
| 10 | 807.000kHz | 56.00 | 37.28 | -18.72 | 31.08 | 6.20 | QP | N |
| 11 | 892.500kHz | 56.00 | 36.01 | -19.99 | 29.81 | 6.20 | QP | N |
| 12 | 29.661MHz | 60.00 | 37.69 | -22.31 | 29.89 | 7.80 | QP | N |
| 13 | 627.000kHz | 46.00 | 30.47 | -15.53 | 24.27 | 6.20 | CAV | L1 |
| 14 | 694.500kHz | 46.00 | 25.36 | -20.64 | 19.16 | 6.20 | CAV | L1 |
| 15 | 834.000kHz | 46.00 | 24.99 | -21.01 | 18.79 | 6.20 | CAV | L1 |
| 16 | 910.500kHz | 46.00 | 24.44 | -21.56 | 18.24 | 6.20 | CAV | L1 |
| 17 | 1.019MHz | 46.00 | 21.89 | -24.11 | 15.69 | 6.20 | CAV | L1 |
| 18 | 1.518MHz | 46.00 | 21.25 | -24.75 | 15.05 | 6.20 | CAV | L1 |
| 19 | 523.500kHz | 46.00 | 22.98 | -23.02 | 16.78 | 6.20 | CAV | N |
| 20 | 622.500kHz | 46.00 | 29.98 | -16.02 | 23.78 | 6.20 | CAV | N |
| 21 | 721.500kHz | 46.00 | 25.42 | -20.58 | 19.22 | 6.20 | CAV | N |
| 22 | 820.500kHz | 46.00 | 24.89 | -21.11 | 18.69 | 6.20 | CAV | N |
| 23 | 933.000kHz | 46.00 | 23.28 | -22.72 | 17.08 | 6.20 | CAV | N |
| 24 | 1.293MHz | 46.00 | 21.22 | -24.78 | 15.02 | 6.20 | CAV | N |

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Level - Limit

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

9 Occupied Bandwidth

Test result: **Tested**

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration

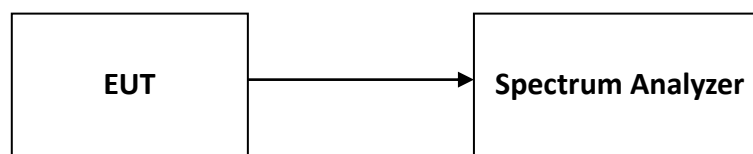

9.4 The results of Occupied Bandwidth

Please refer to Appendix B

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****