



# Antenna data sheet

Product Name: 433M Antenna

Product Model: IP06

Part Number: LJS062201A

Write By : Huxuwen

Issued Date: 2022-03-29

Manufacturer : Shenzhen Lejin radio frequency technology Co., LTD

Address : Rm301B,A4Bld,Junfeng Innovation Park,  
Fuyong,BaoanDist,Shenzhen

REV	MODIFIED DESCRIPTION	DATE	REMARK
V1.0	Initial Draft Release	2022/03/29	



### 3.Product Specification

A. Electrical Characteristics	
Frequency	433.92MHz $\pm$ 10.0MHz
VSWR	<2.0
Efficiency	$\geq$ 20%
Impedance	50Ohm
Polarization	Linear
Gain ( Peak )	1.20dBi
B. Material & Mechanical Characteristics	
Material of Radiator	Metal(Carbon steel)
Cable Type	N/A
Connector Type	Soldering( $\Phi$ 0.5mm)
Dimension	$\Phi$ 4.0*22.0mm
C. Environmental	
Operation Temperature	- 20 $^{\circ}$ C ~ + 70 $^{\circ}$ C
Storage Temperature	- 30 $^{\circ}$ C ~ + 85 $^{\circ}$ C
Humidity	40%~95%

### 4.Test Equipment & Conditions

- |                                  |                     |
|----------------------------------|---------------------|
| 1.Network Analyzers              | Agilent 8753D/5071C |
| 2.HSPA and LTE protocol test set | R&S CMW500 -PT      |
| 3.Communications Test Set        | Agilent 8960        |
| 4.3D Chamber Test System         |                     |

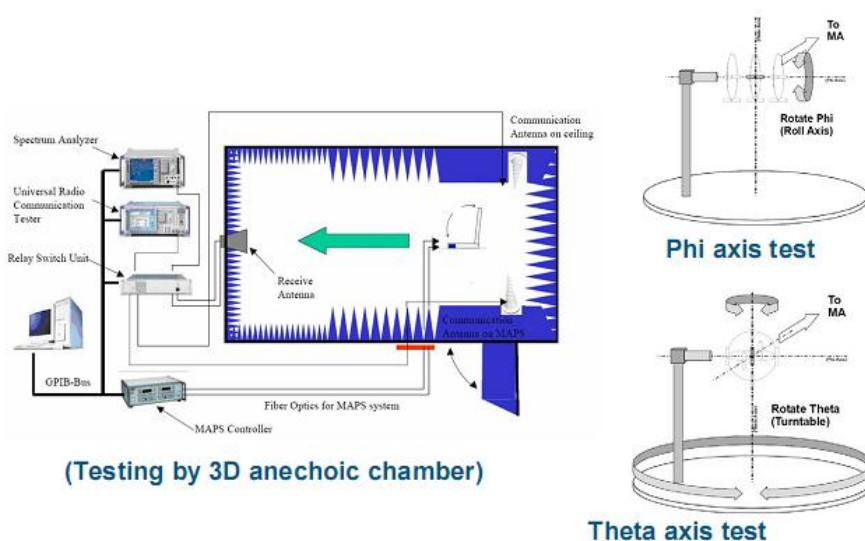


Chart 1 Test topology

## 5.Test Report

### 5.1 Voltage Standing Wave Ratio(VSWR).

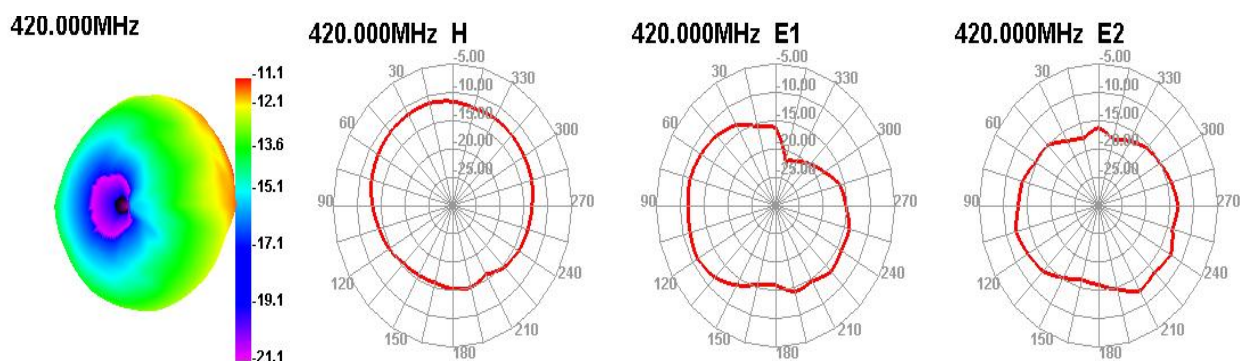



Chart 2 VSWR

### 5.2 Efficient and gain.

Passive	Freq(MHz)	410	420	430	440	450
Test For	Effi(%)	17.77	20.12	22.01	18.75	15.21
	Gain(dBi)	0.45	0.78	1.20	0.74	0.45

### 5.3 Radiation pattern.





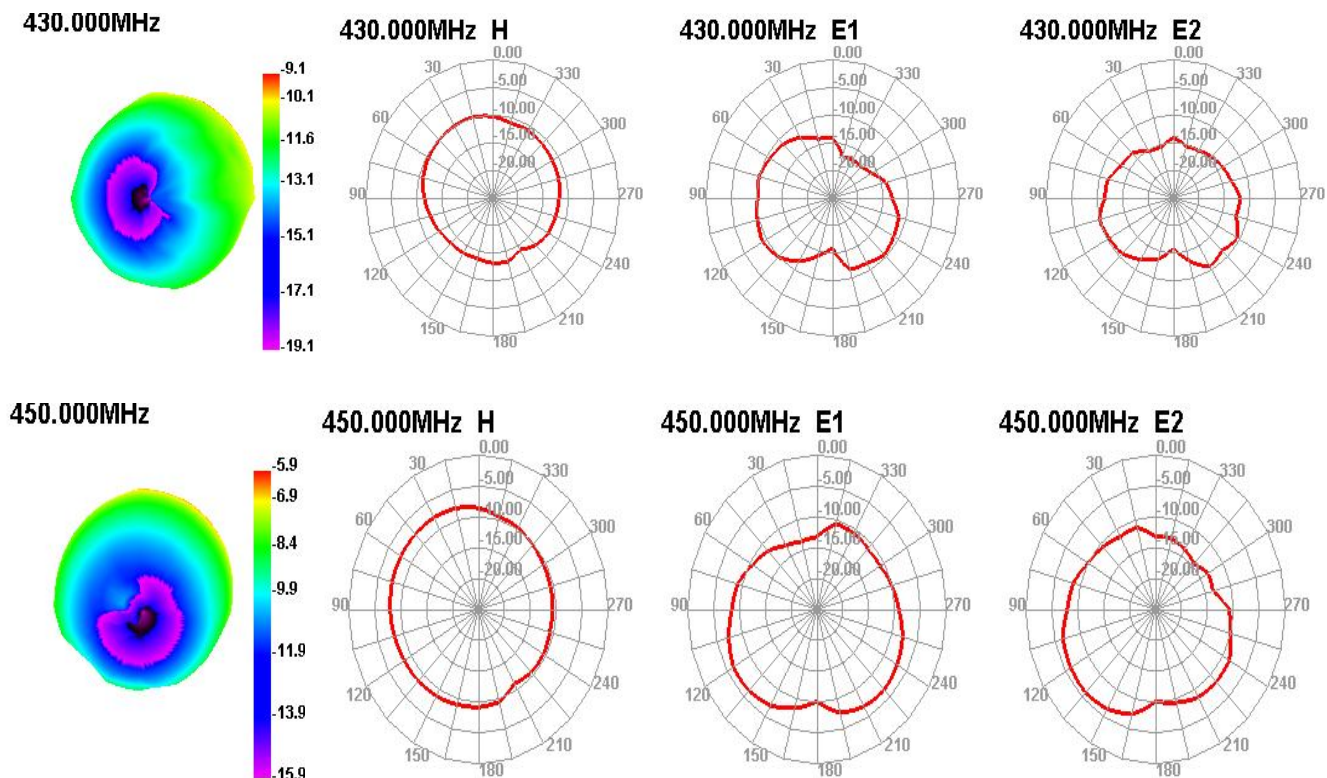


## 6. Reliability Test

Test Item		Test condition	Equipment	Specification	Result
1	Low Temp. Storage Test	Temperature: -30℃, Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-down the temp. to -30℃ in one hour, store antenna for 44 hours; step-up temp to 25℃, test antenna after 2 hours.	Temp.&Humidity Tester	No material deformation is allowed. Electronic Performance is ok.	PASS
	High Temp./High Humid Storage Test	Temperature: 85℃ Humidity: 85% RH Time:48hrs Test condition: Placing antenna in a Low/High Temperature Chamber, keep the temp is 25℃ and humidity is 65% for one hour, then step-up the temp. to 80℃ and the humidity up to 85% in one hour, store antenna for 44 hours; step-down temp to 25℃, test antenna after 2 hours.		No material deformation is allowed. Electronic Performance is ok.	
3	Salt-Spray Test	Placing antenna in the Salt-Spray Tester, set the test condition, Temp: 35±2℃ Humidity: 85% NaCl salt spray :5±1%. PH value :6.5~7.2 Test time: 24 hours	Salt-Spray Tester	No color change No appear rusting	PASS

## 7. Assemble type(omit)

## 8. Product Drawing

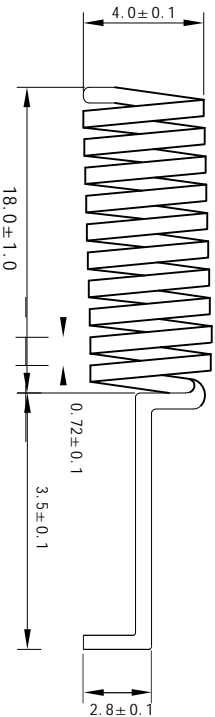

1			
Revise	2		
record	3		

SHEN ZHEN LEJIN RADIO FREQUENCY CO., LTD

	Third Angle	Project	Date	2023-03-13	
0~10	±0.05	○	0.02	Part Name	433M ANT
10~18	±0.10	◎	∅0.03	Part No.	
18~30	±0.12	└	0.02	Material	
30~40	±0.15	∇	0.04		
40~	±0.20	Angle	±0.5°	Treatment	LJS062201A
Location				Approved by	
				Unit	mm
				Scale	FIT
				Rev	A