



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15 SUBPART C

Report Reference No..... : CTL2412093062-WF

Compiled by
(position+printed name+signature)

Happy Guo
(File administrators)

Supervised by
(position+printed name+signature)

Jack Wang
(Test Engineer)

Approved by
(position+printed name+signature)

Ivan Xie
(Manager)



Applicant's name : ShenZhen YaWell intelligent Technology Co.,Ltd.

Address of applicant..... : A402, Wuhan University, Shenzhen Research Institute, No. 6
Yuexing 2nd Road, Gaoxin District Yuehai Street, Nanshan
District, Shenzhen, China

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address..... : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road,
Nanshan District, Shenzhen, China 518055

Test specification

Standard : FCC Part 15C

Master TRF : Dated 2011-01

Test item description : Wireless charging

FCC ID..... : 2AOM3R11

Trade Mark..... : N/A

Model/Type reference : R11

List Model(s) : N/A

Transmit Frequency : 251.8kHz

Antenna type..... : Internal Antenna

Date of receipt of test item : Jan. 20, 2025

Date of Test Date..... : Jan. 20, 2025-Mar. 11, 2025

Date of Issue..... : Mar. 11, 2025

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL2412093062-WF	Mar. 11, 2025
		Date of issue

Equipment under Test : Wireless charging

Sample No : CTL2412093062

Type / Model(s) : R11

Listed Models : N/A

Applicant : **ShenZhen YaWell intelligent Technology Co.,Ltd.**

Address : A402, Wuhan University, Shenzhen Research Institute, No. 6
Yuexing 2nd Road, Gaoxin District Yuehai Street, Nanshan
District, Shenzhen, China

Manufacturer : **ShenZhen YaWell intelligent Technology Co.,Ltd.**

Address : A402, Wuhan University, Shenzhen Research Institute, No. 6
Yuexing 2nd Road, Gaoxin District Yuehai Street, Nanshan
District, Shenzhen, China

Test result	Pass *
--------------------	---------------

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Contents

1.	<u>TEST STANDARDS</u>	<u>4</u>
2.	<u>SUMMARY</u>	<u>5</u>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	Related Submittal(s) / Grant (s)	6
2.5.	Modifications	6
2.6.	Summary of Test Results	6
3.	<u>TEST ENVIRONMENT</u>	<u>7</u>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Statement of the measurement uncertainty	8
3.5.	Equipments Used during the Test	8
4.	<u>TEST CONDITIONS AND RESULTS.....</u>	<u>9</u>
4.1.	AC Power Conducted Emission	9
4.2.	Radiated Emission	12
4.3.	20dB Bandwidth/99% Bandwidth	18
5.	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>19</u>
6.	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>21</u>

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.207,15.209, 15.215\(c\)](#)

[ANSI C63.10: 2013](#)

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jan. 20, 2025
Testing commenced on	:	Jan. 20, 2025
Testing concluded on	:	Mar. 11, 2025

2.2. Equipment Under Test

Power supply system utilised

Power supply voltage	:	Input: 5V

2.3. Auxiliary test equipment information

Manufacturer	Description	Model	Serial Number
HUAWEI TECHNOLOGIES CO.LTD	Adapter	HW-200200CP1	---
ShenZhen YaWell intelligent Technology Co.,Ltd.	Smart Ring	R11(FCC ID: 2AOM3-R11RING)	---

2.4. Short description of the Equipment under Test (EUT)

Clock wireless charger work frequency range 251.8 kHz.

For more details, refer to the user's manual of the EUT.

Serial number: R11

EUT operation mode

The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting mode for testing.

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AOM3R11 filing to comply with FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

2.7. Summary of Test Results

The EUT is night light with wireless charger, The test summary of the EUT listed as below:

	Test Standards	Test Result
Electric Field Radiated Emissions	FCC Part 15 C (Section15.209)	PASS
20dB Bandwidth/99% Bandwidth	FCC Part 15 C (Section15.215(c))	PASS
Conducted Emissions	FCC Part 15 C (Section15.207)	PASS

Remark: The measurement uncertainty is not included in the test result.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd, EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.08dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.


3.5. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2024/04/30	2025/04/29
Double cone logarithmic antenna	Schwarzbeck	VULB 9168	824	2023/02/13	2026/02/12
EMI Test Receiver	R&S	ESCI	1166.5950.03	2024/04/30	2025/04/29
Spectrum Analyzer	Keysight	N9020A	MY53420874	2024/05/01	2025/04/30
Active Loop Antenna	Da Ze	ZN30900A	/	2024/04/30	2025/04/29
Spectrum Analyzer	RS	FSP	1164.4391.38	2024/05/03	2025/05/02
9kHz-40GHz coaxial line chamber 2	/	Z108-NJ-NJ-9.5M	21121049	2024/12/01	2025/11/30
Software:					
Name of Software:			Version:		
ES-K1			V1.71		

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

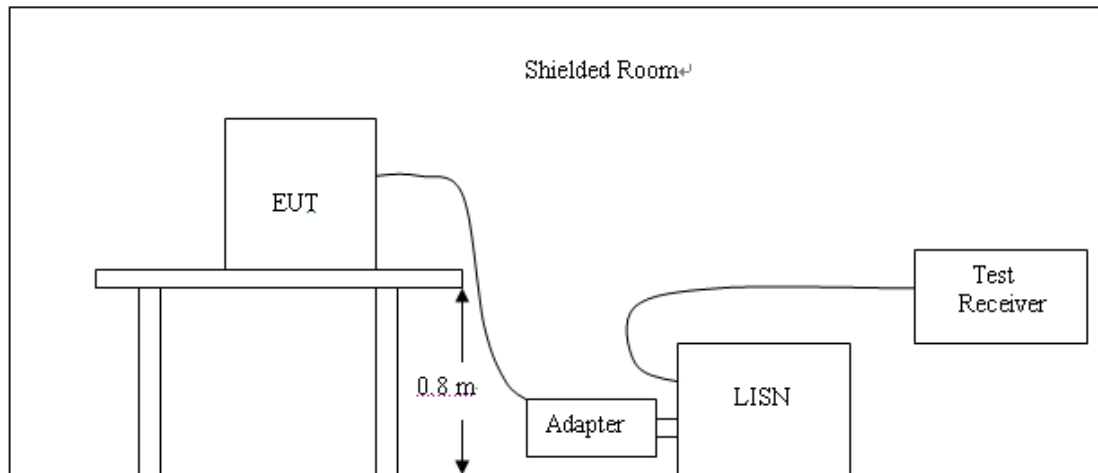

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10:2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013
- 4 The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.
Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency


TEST RESULTS

Line:

L

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

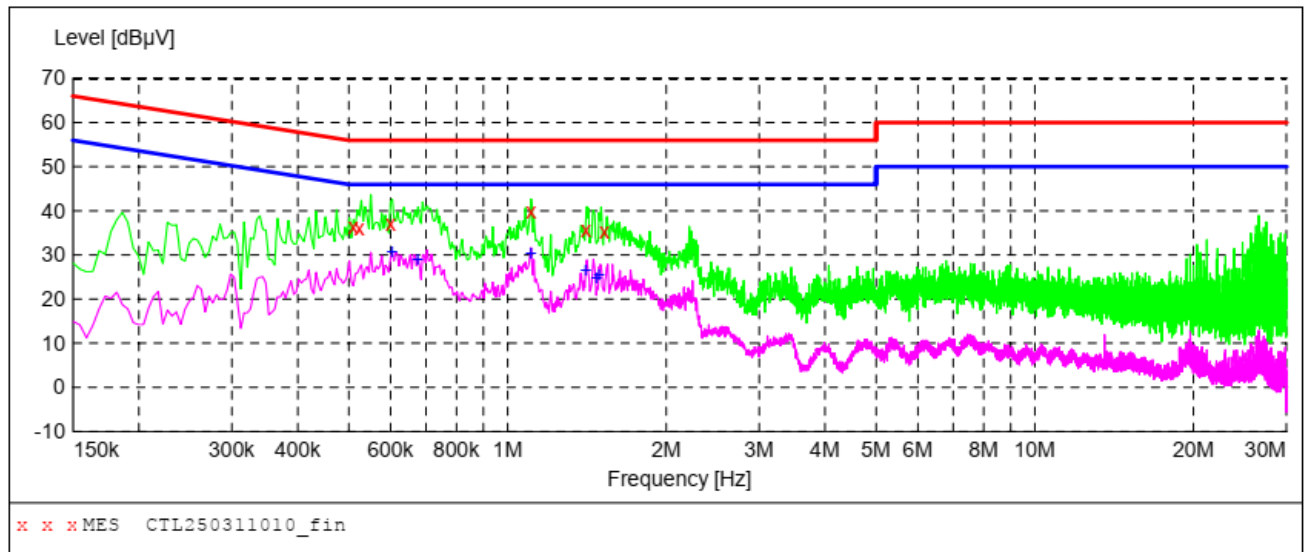**MEASUREMENT RESULT: "CTL250311010_fin"**

3/11/2025 11:02AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.510000	36.40	10.0	56	19.6	QP	L1	GND
0.523500	36.20	10.0	56	19.8	QP	L1	GND
0.600000	37.00	10.0	56	19.0	QP	L1	GND
1.108500	40.00	10.1	56	16.0	QP	L1	GND
1.410000	35.50	10.1	56	20.5	QP	L1	GND
1.527000	35.20	10.1	56	20.8	QP	L1	GND

MEASUREMENT RESULT: "CTL250311010_fin2"

3/11/2025 11:02AM


Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.604500	30.70	10.0	46	15.3	AV	L1	GND
0.676500	29.10	10.0	46	16.9	AV	L1	GND
1.108500	30.40	10.1	46	15.6	AV	L1	GND
1.410000	26.70	10.1	46	19.3	AV	L1	GND
1.477500	24.90	10.1	46	21.1	AV	L1	GND
1.491000	25.40	10.1	46	20.6	AV	L1	GND

Line:

N

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

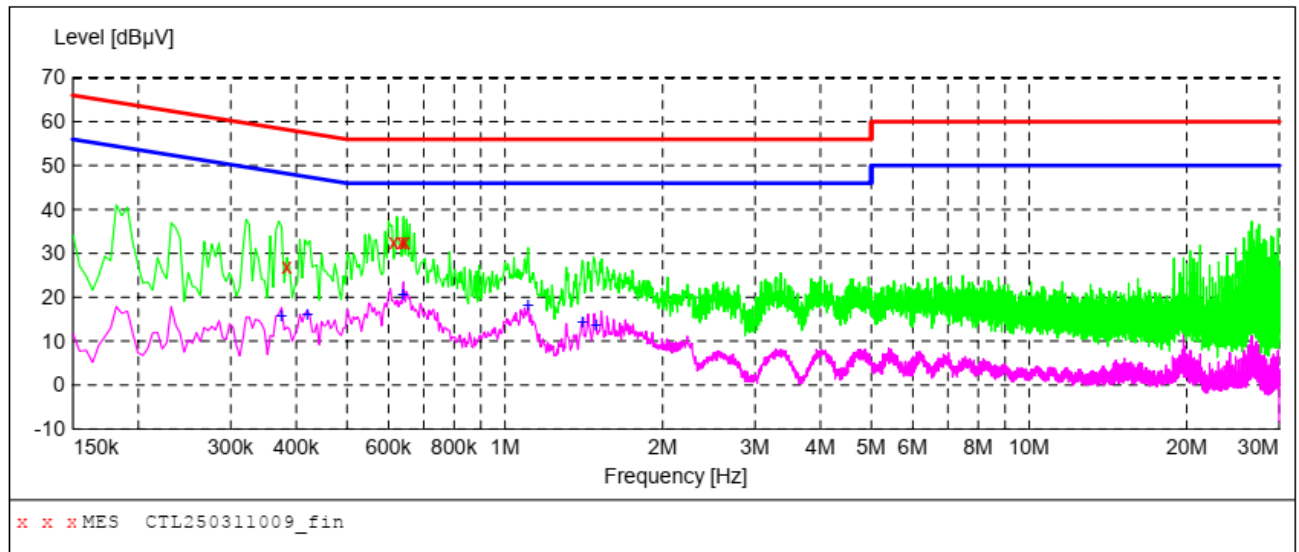**MEASUREMENT RESULT: "CTL250311009_fin"**

3/11/2025 10:59AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.384000	27.10	10.0	58	31.1	QP	N	GND
0.613500	32.40	10.0	56	23.6	QP	N	GND
0.636000	32.40	10.0	56	23.6	QP	N	GND
0.645000	32.60	10.0	56	23.4	QP	N	GND

MEASUREMENT RESULT: "CTL250311009_fin2"


3/11/2025 10:59AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.375000	15.80	10.0	48	32.6	AV	N	GND
0.420000	16.30	10.0	47	31.1	AV	N	GND
0.640500	20.80	10.0	46	25.2	AV	N	GND
1.108500	18.30	10.1	46	27.7	AV	N	GND
1.410000	14.50	10.1	46	31.5	AV	N	GND
1.491000	13.60	10.1	46	32.4	AV	N	GND


4.2. Radiated Emission

TEST CONFIGURATION

Radiated Emission Test Set-Up
Frequency range 9kHz – 30MHz

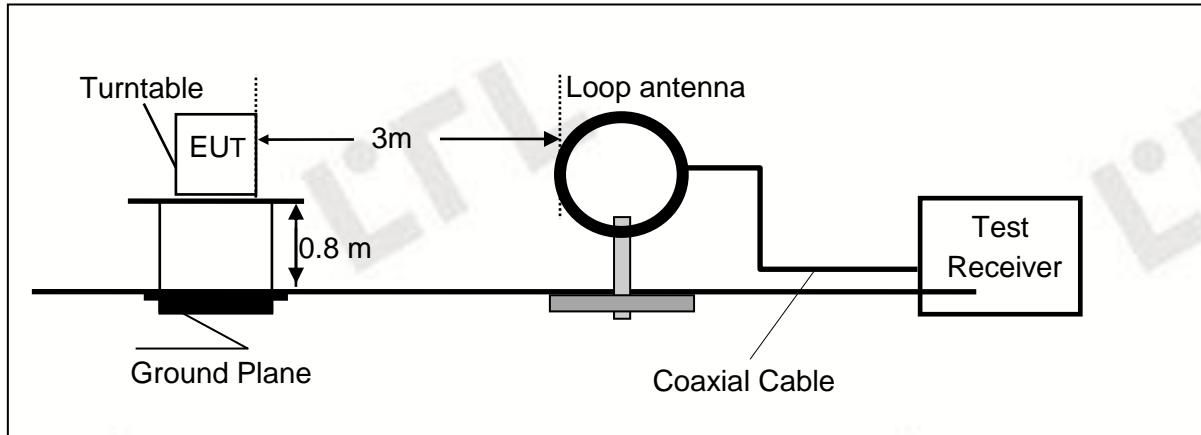

Frequency range 30MHz – 1000MHz

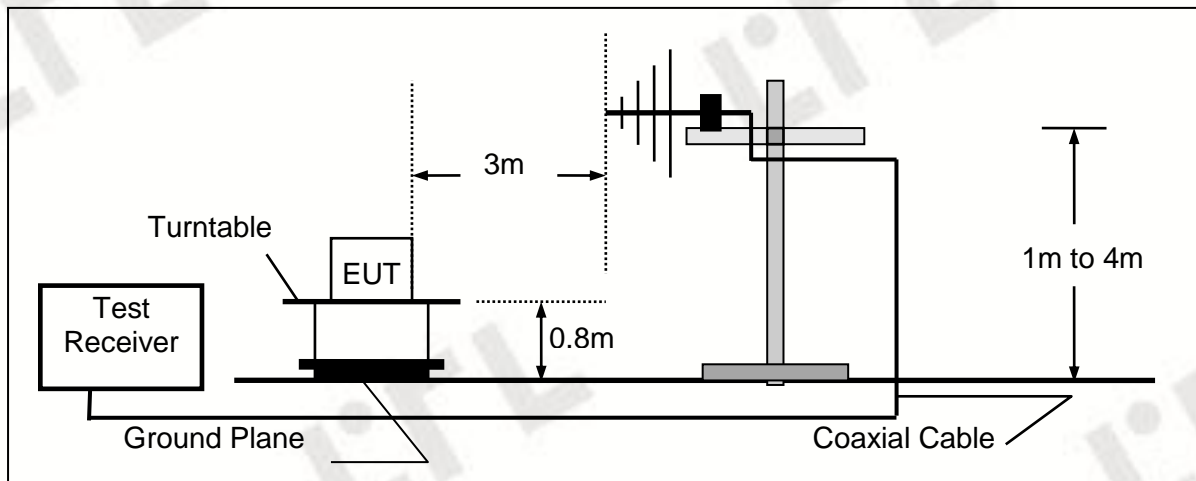

TEST PROCEDURE

- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
- 2 Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3 And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4 Repeat above procedures until all frequency measurements have been completed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dBμV/m)	RA (dBμV/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

9k~30MHz:

Frequency Range (MHz)	E-field Strength Limit @ 30m (mV/m)	E-field Strength Limit @ 3m (dBμV/m)
0.009-0.490	2400/F(kHz)	129-94
0.490-1.705	24000/F(kHz)	74-63
1.705-30	30	70
Note: Where the limits have been defined at one distance, and a signal level measured at another, the limits have been extrapolated using the following formula: $\text{Extrapolation(dB)} = 40\log_{10}(\text{Measurement Distance/Specification Distance})$		

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) dBuV/m = 20*log(uV/m)

30M~1GHz:

Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

Note:

- (1) The tighter limit shall apply at the edge between two frequency bands.
- (2) Distance refers to the distance in meters between the test instrument antenna and the closest point of any part of the E.U.T.


TEST RESULTS
WORST-CASE RADIATED EMISSION BELOW 30 MHz

Remark: This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

X



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

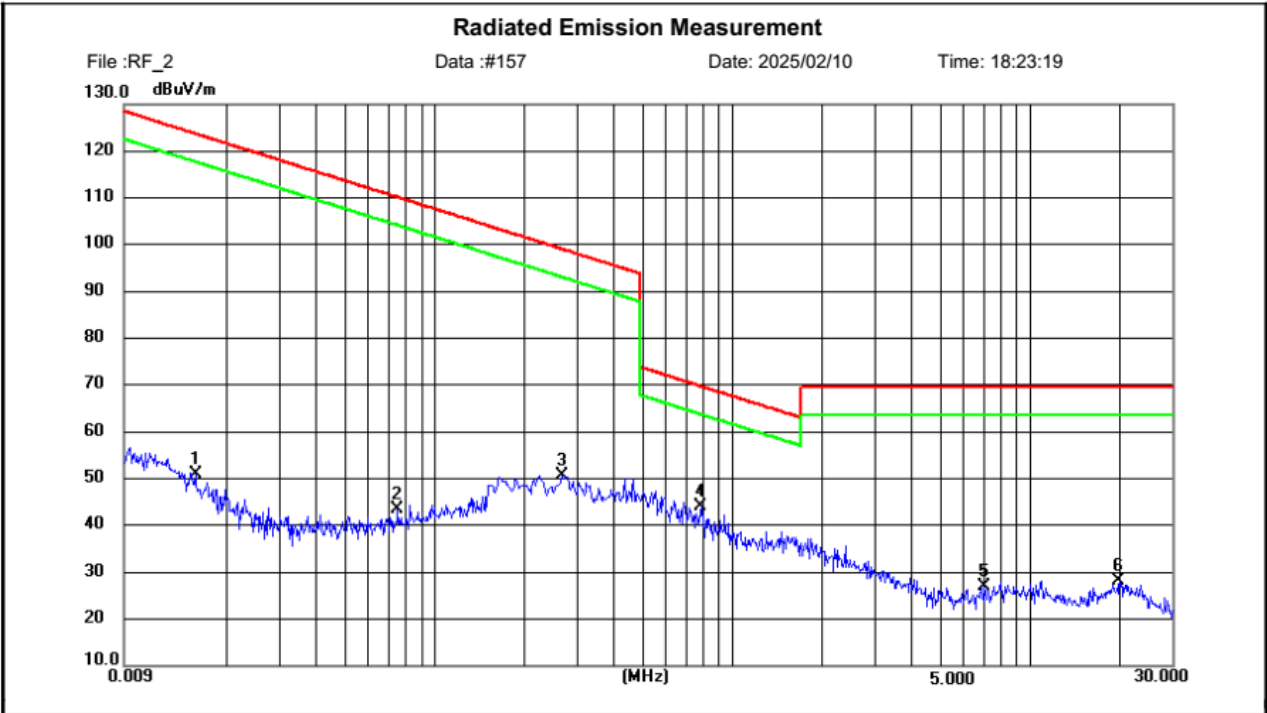

Site LAB Chamber 2	Polarization:	Temperature: 25(C)
Limit: FCC Part 15 9K-30MHZ-2	Power:	Humidity: 50 %
EUT: /	Distance: 3m	
M/N: R11		
Mode: 251.84KHz		
Note: Shenzhen Yawell Intelligent Technology Co.,Ltd		

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark	
1	0.0157	29.22	21.65	50.87	123.69	72.82	peak	P		
2	0.0747	22.91	20.59	43.50	110.14	66.64	peak	P		
3	0.2670	27.62	23.17	50.79	99.07	48.28	peak	P		
4	0.7845	25.32	18.69	44.01	69.71	25.70	peak	P		
5	7.0035	8.64	18.36	27.00	69.54	42.54	peak	P		
6	19.9860	6.73	21.29	28.02	69.54	41.52	peak	P		

Radiated Emission Test Data 30-1000MHz:

Horizontal



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF_3

Data :#488

Date: 2025/03/11

Time: 9:43:14

80.0 dBuV/m

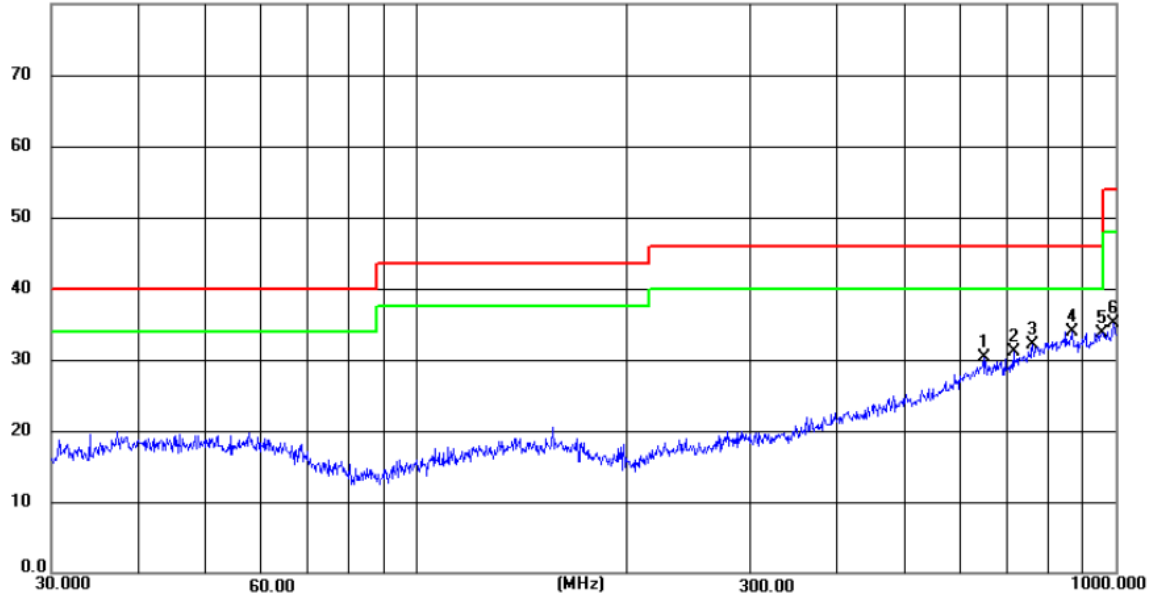

Site LAB Chamber 2

Polarization: **Horizontal**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_30-1000MHz

Power:

Humidity: 50 %

EUT: /

Distance: 3m

M/N: R11

Mode: 251.84KHz

Note: Shenzhen Yawell Intelligent Technology Co.,Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	648.5216	7.73	22.57	30.30	46.00	15.70	peak	100	71	P	
2	714.7996	8.00	23.09	31.09	46.00	14.91	peak	100	155	P	
3	761.7045	7.37	24.80	32.17	46.00	13.83	peak	100	197	P	
4	866.4676	7.61	26.23	33.84	46.00	12.16	peak	100	224	P	
5	956.2760	6.58	27.15	33.73	46.00	12.27	peak	100	1	P	
6	995.1900	7.49	27.70	35.19	54.00	18.81	peak	100	323	P	

Vertical



Shenzhen CTL Testing Technology Co., Ltd
Tel: +86-755-89486194

Radiated Emission Measurement


File :RF_3

Data :#489

Date: 2025/03/11

Time: 9:44:05

80.0 dBuV/m

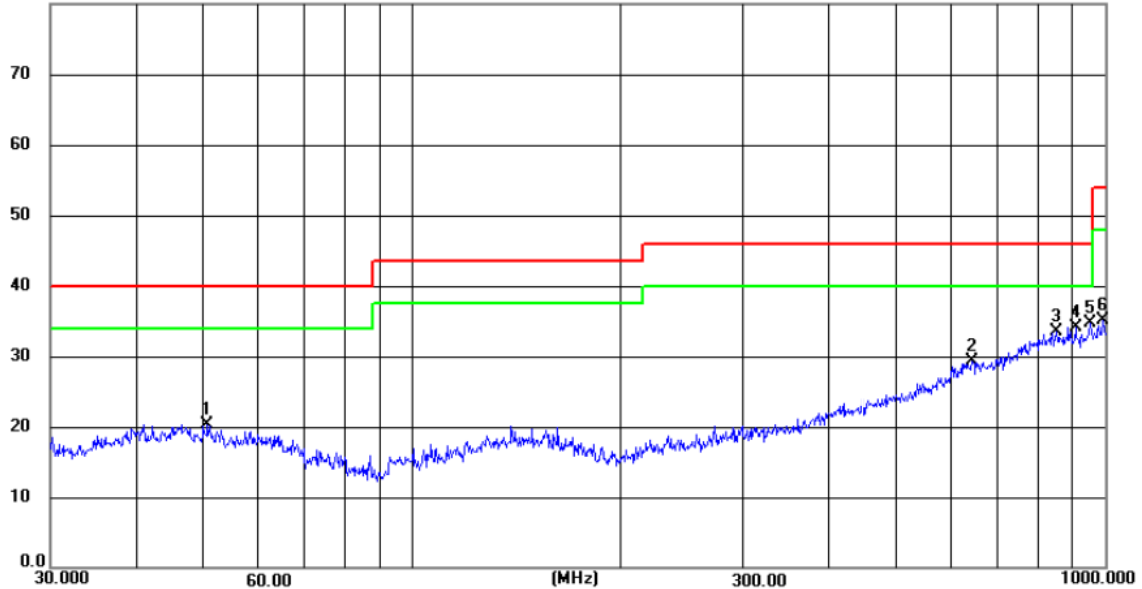

Site LAB Chamber 2

Polarization: **Vertical**

Temperature: 25(C)

Limit: FCC Part15 RE-Class C_30-1000MHz

Power:

Humidity: 50 %

EUT: /

Distance: 3m

M/N: R11

Mode: 251.84KHz

Note: Shenzhen Yawell Intelligent Technology Co.,Ltd

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	50.6303	6.01	14.34	20.35	40.00	19.65	peak	100	80	P	
2	643.9894	6.61	22.62	29.23	46.00	16.77	peak	100	234	P	
3	854.0247	7.19	26.32	33.51	46.00	12.49	peak	100	332	P	
4	908.0732	7.42	26.63	34.05	46.00	11.95	peak	100	206	P	
5	954.1826	7.58	27.12	34.70	46.00	11.30	peak	100	108	P	
6	993.0114	7.43	27.65	35.08	54.00	18.92	peak	100	304	P	

4.3. 20dB Bandwidth/99% Bandwidth

Limit


The 20dB bandwidth shall be less than 80% of the permitted frequency band.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100Hz RBW and 300Hz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


Test Configuration




Test Results


Frequency(MHz)	20dB bandwidth(kHz)	99% OBW(kHz)	Result
0.2518	2.724	3.019	Pass

251.8 kHz

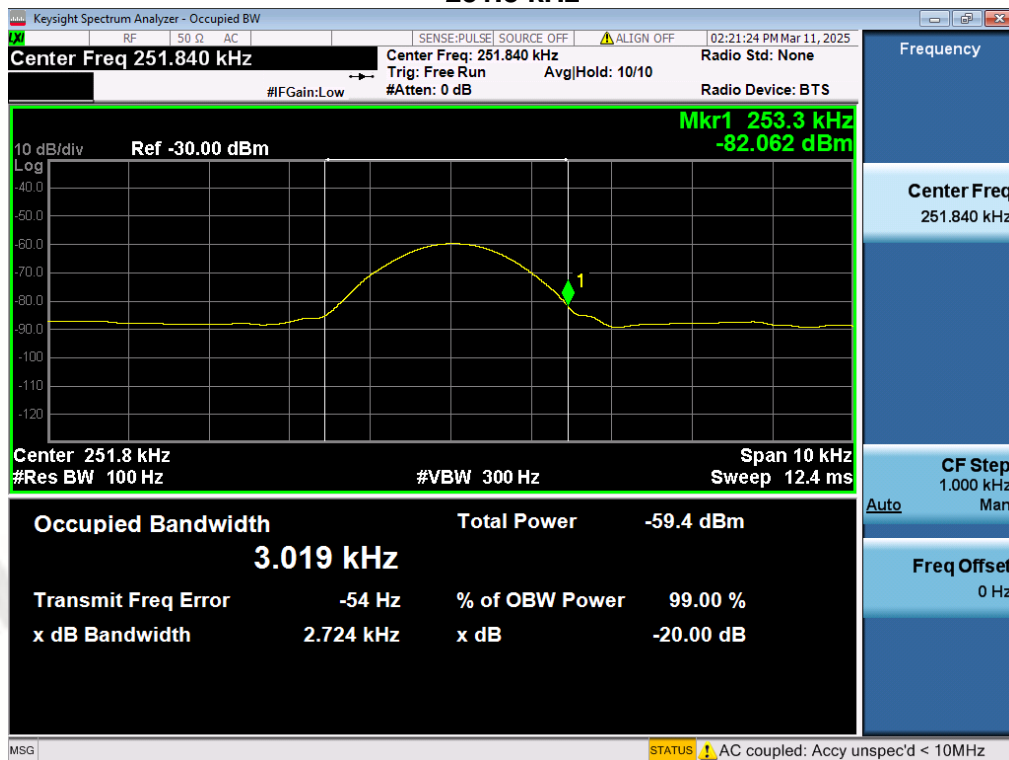


5. Test Setup Photos of the EUT

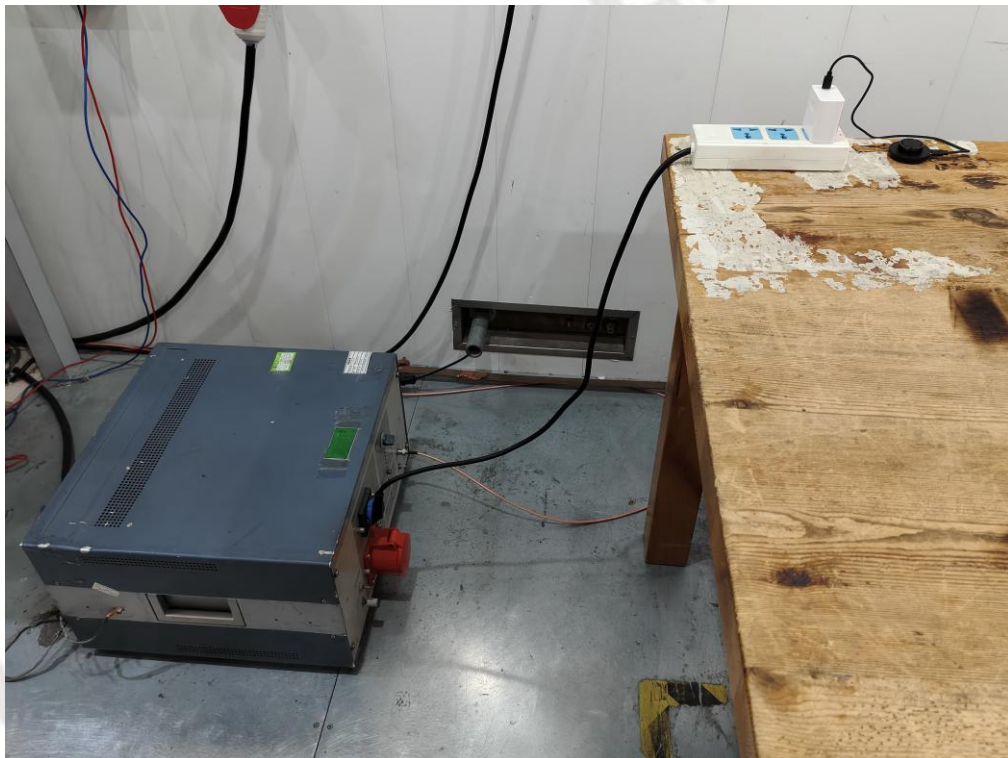



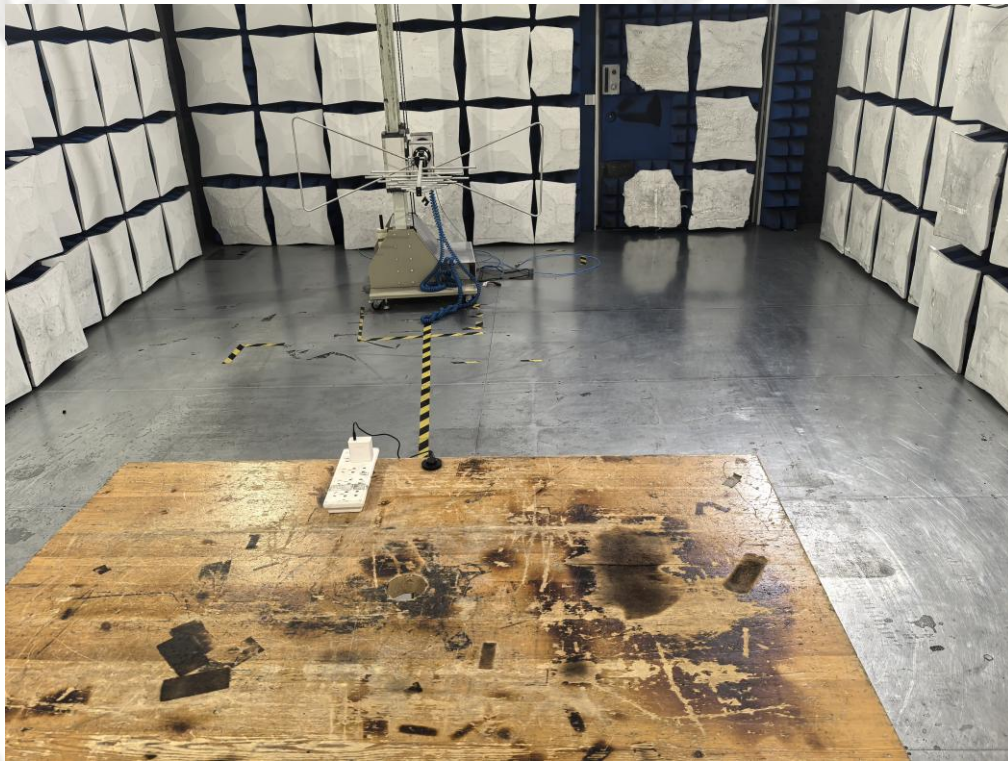



6. External and Internal Photos of the EUT



External photos

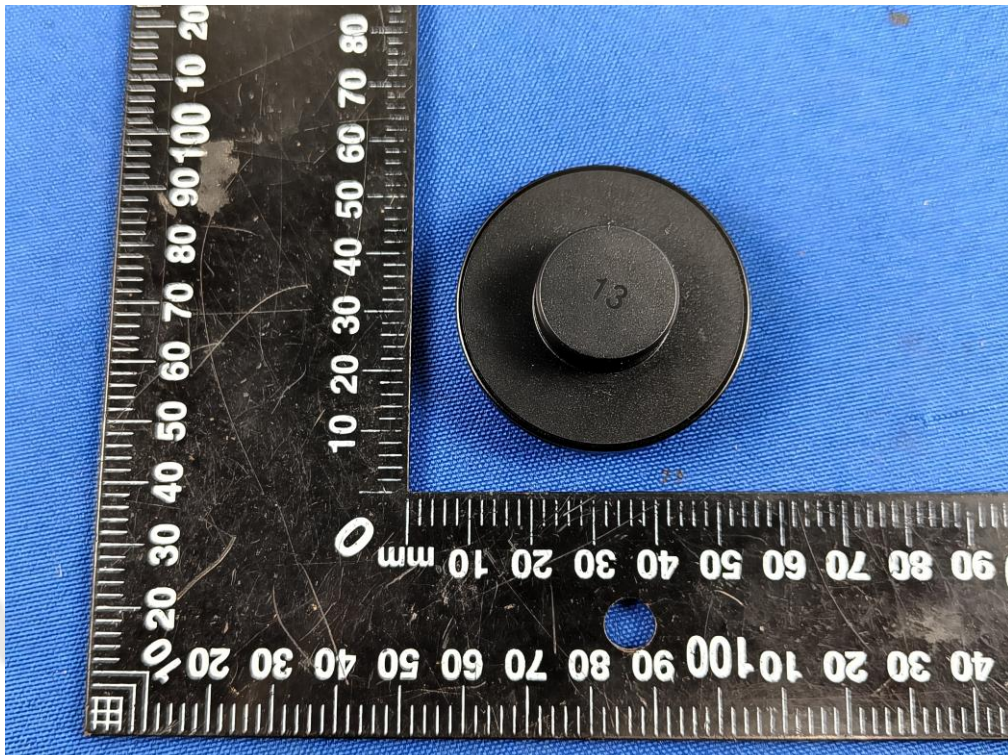


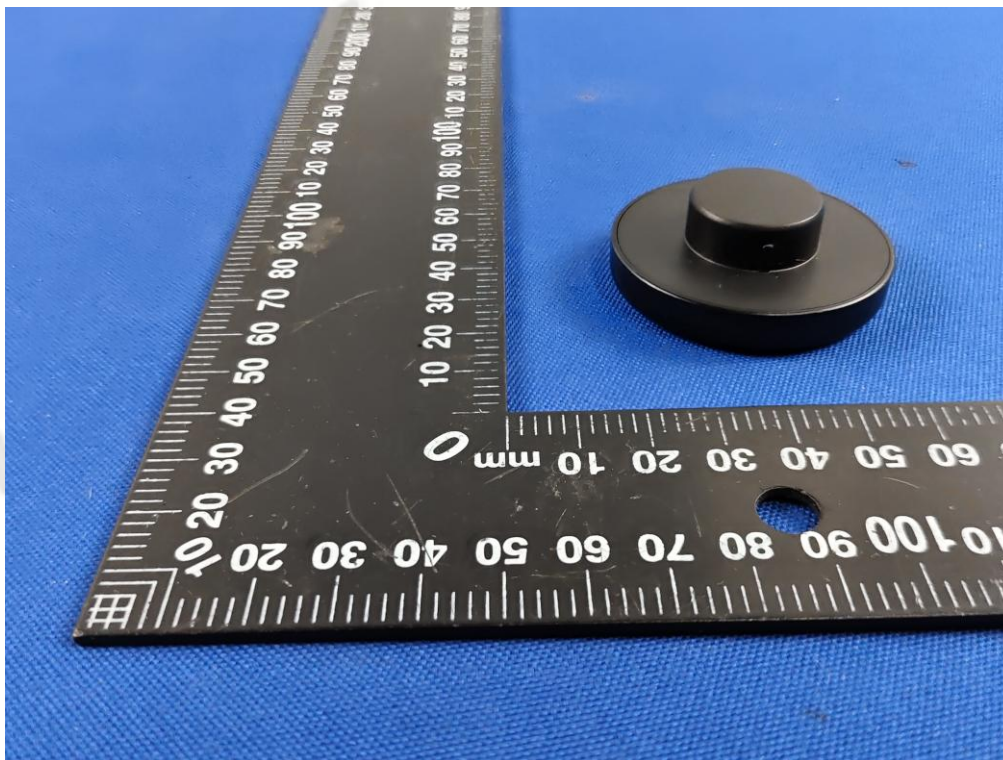

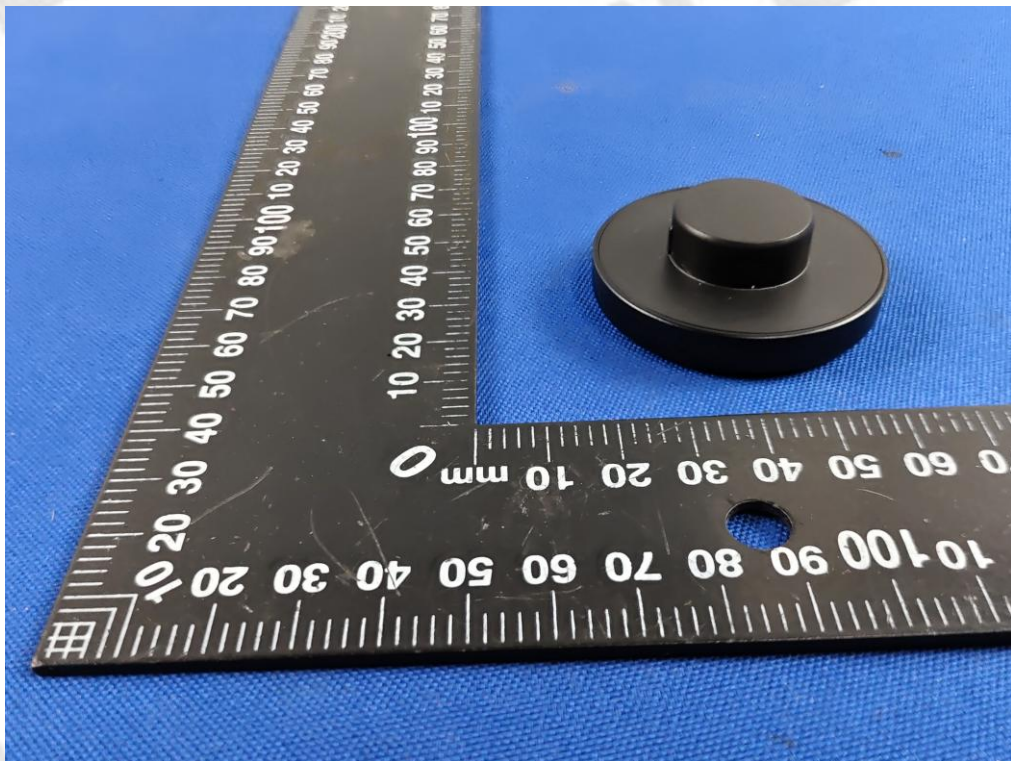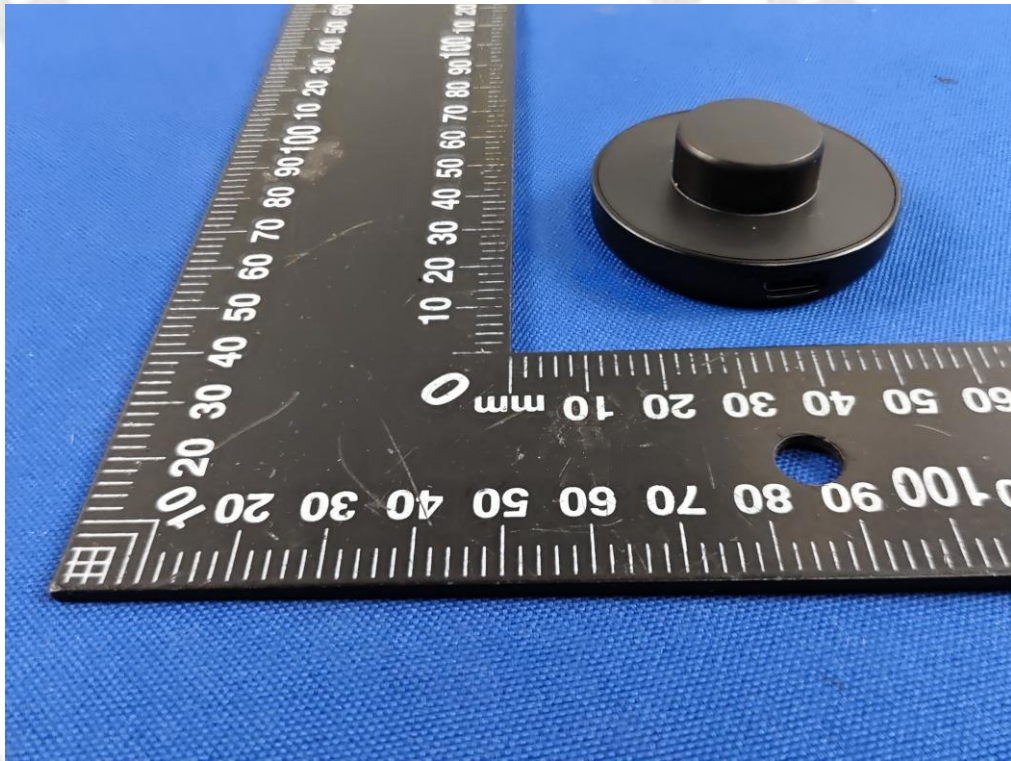

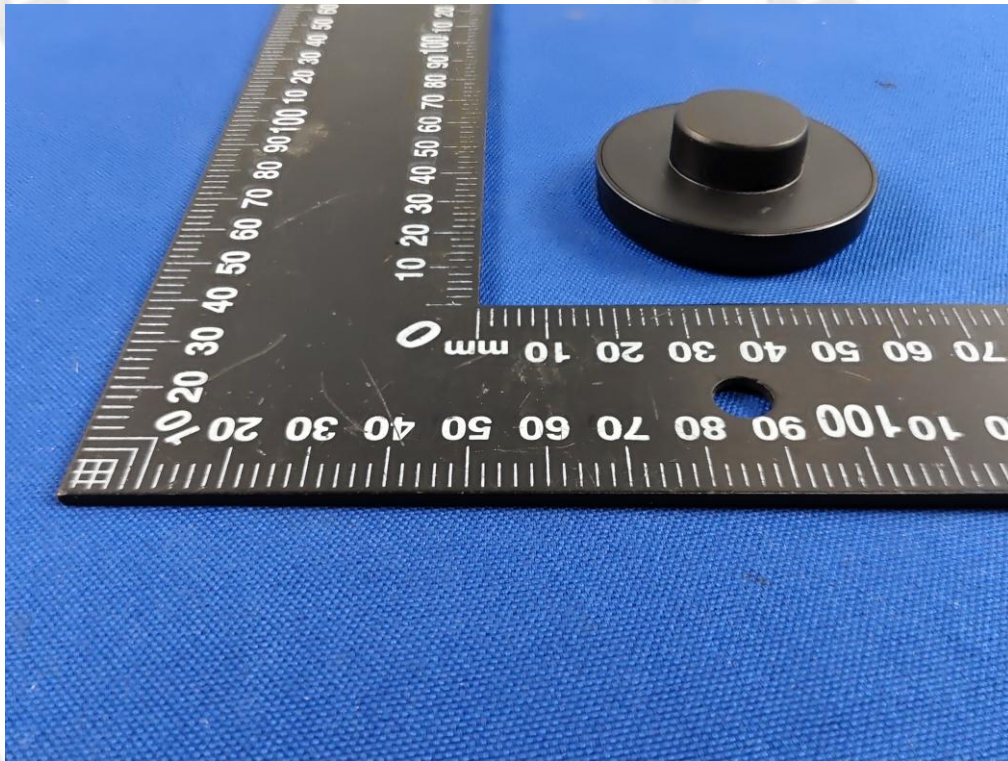

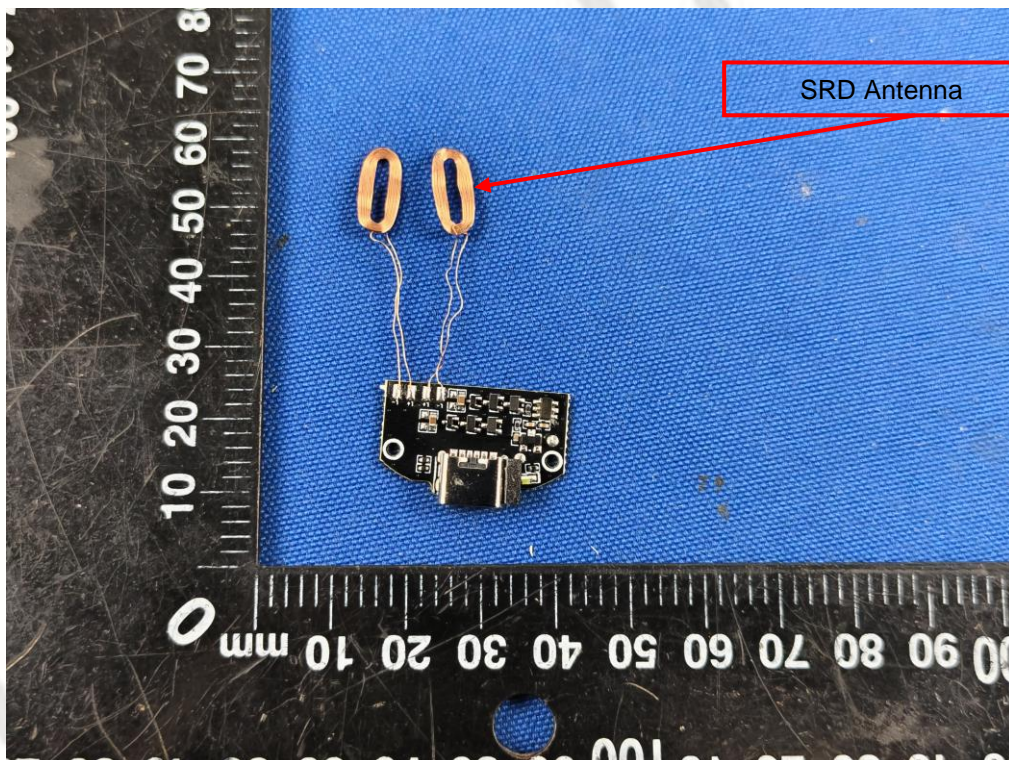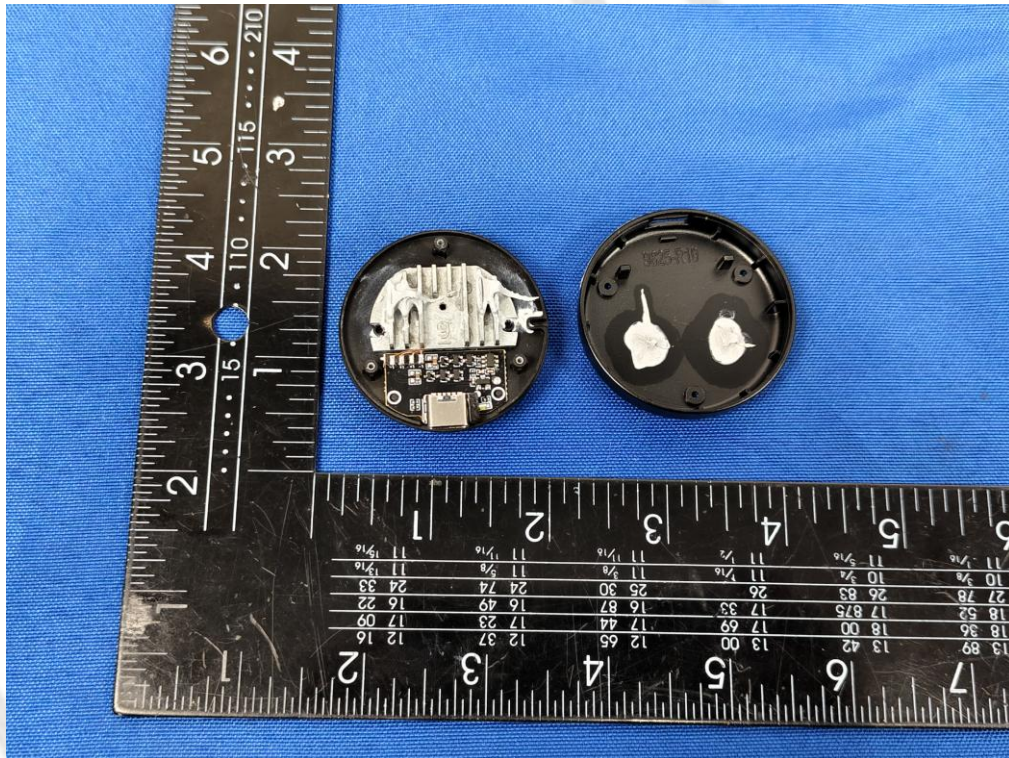Internal photos

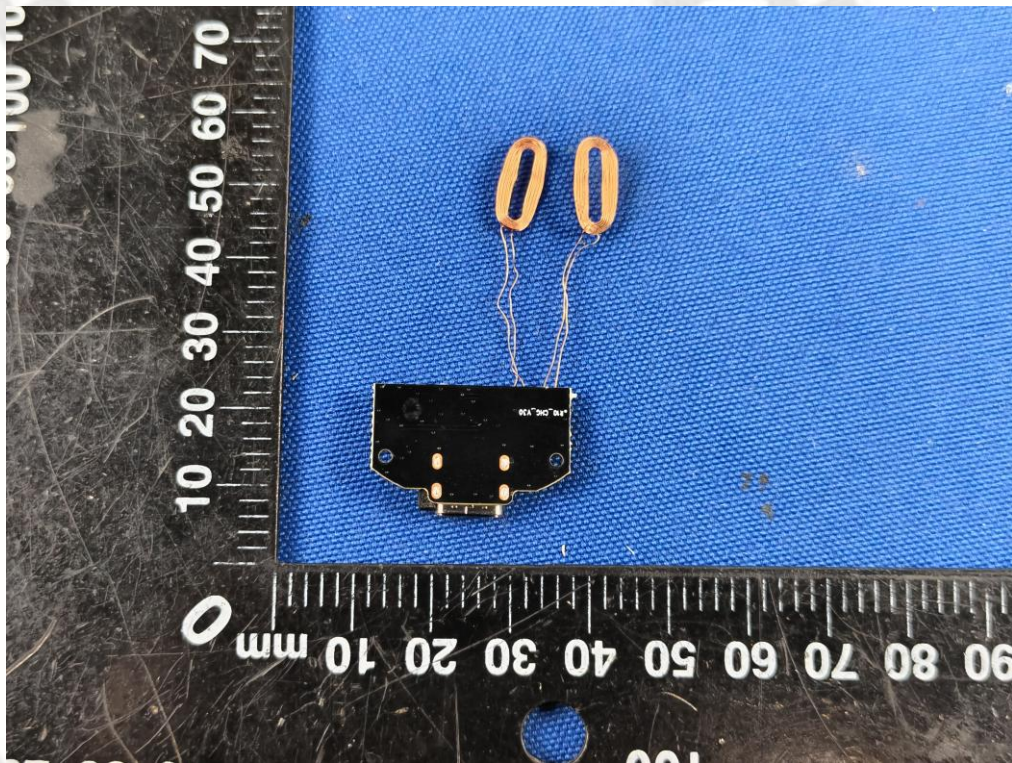

***** End of Report *****