


# TEST REPORT

FCC ID..... :	2ATO6-HYPERSONIC1	
Test Report No..... :	TCT210914E012	
Date of issue..... :	Oct. 09, 2021	
Testing laboratory .....	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	LinearFlux USA Inc	
Address..... :	355 Woodrow St, DALY CITY, California 94014, United States	
Manufacturer's name ... :	LinearFlux USA Inc	
Address..... :	355 Woodrow St, DALY CITY, California 94014, United States	
Standard(s) .....	FCC CFR Title 47 Part 15 Subpart C	
Test item description .....	LinearFlux HyperSonic	
Trade Mark .....	LinearFlux, HyperSonic	
Model/Type reference..... :	4897053631086, 4897053630492, 4897053630515, 4897053630508, 4897053630539, 4897053630546, HyperSonic 360, HyperSonic PRO, HyperSonic GAME, HyperSonic EVO, HyperSonic	
Rating(s) .....	Output: 5W/7.5W/10W/15W Rechargeable Li-ion Battery DC 3.7V	
Date of receipt of test item .....	Sep. 14, 2021	
Date (s) of performance of test..... :	Sep. 14, 2021 ~ Oct. 09, 2021	
Tested by (+signature) ... :	Brave Zeng	
Check by (+signature)..... :	Beryl Zhao	
Approved by (+signature):	Tomsin	



**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

## Table of Contents

<b>1. General Product Information .....</b>	<b>3</b>
1.1. EUT description .....	3
1.2. Model(s) list.....	3
<b>2. Test Result Summary .....</b>	<b>4</b>
<b>3. General Information.....</b>	<b>5</b>
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	5
<b>4. Facilities and Accreditations .....</b>	<b>6</b>
4.1. Facilities .....	6
4.2. Location .....	6
4.3. Measurement Uncertainty.....	6
<b>5. Test Results and Measurement Data .....</b>	<b>7</b>
5.1. Antenna requirement .....	7
5.2. Conducted Emission.....	8
5.3. Radiated Spurious Emission Measurement.....	12
<b>Appendix A: Photographs of Test Setup</b>	
<b>Appendix B: Photographs of EUT</b>	

## 1. General Product Information

### 1.1.EUT description

Test item description .....	LinearFlux HyperSonic
Model/Type reference.....	4897053631086
Sample Number.....	TCT210914E012-0101
Operation Frequency .....	120.83kHz - 148.56kHz
Modulation Technology .....	Load modulation
Antenna Type.....	Inductive loop coil Antenna
Rating(s) .....	Output: 5W/7.5W/10W/15W Rechargeable Li-ion Battery DC 3.7V
Remark .....	/

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

### 1.2.Model(s) list

No.	Model No.	Tested with
1	4897053631086	<input checked="" type="checkbox"/>
Other models	4897053630492, 4897053630515, 4897053630508, 4897053630539, 4897053630546, HyperSonic 360, HyperSonic PRO, HyperSonic GAME, HyperSonic EVO, HyperSonic	<input type="checkbox"/>

Note: 4897053631086 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names and color. So the test data of 4897053631086 can represent the remaining models.

## 2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

### 3. General Information

#### 3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	25 °C	25.4 °C
Humidity:	55 % RH	49 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
Engineering mode:	Output power 15W is worse case and report output power 15W test mode.	
<p>The sample was placed 0.8m &amp; 1.5m for the measurement below &amp; above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case( Z axis) are shown in Test Results of the following pages.</p>		

#### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Mobile Phone	SM-G9350	R28HA2ER3GT	/	SAMSUNG
Adapter	EP-TA200	R37M4PR3QD1SE3	/	SAMSUNG

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4. Facilities and Accreditations

### 4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

### 4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: TCT Testing Industrial Park Fuqiao 5th Industrial Zone, Fuhai Street, Bao'an District Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

### 4.3. Measurement Uncertainty


The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 3.10$ dB
2	RF power, conducted	$\pm 0.12$ dB
3	Spurious emissions, conducted	$\pm 0.11$ dB
4	All emissions, radiated(<1 GHz)	$\pm 4.56$ dB
5	All emissions, radiated(1 GHz - 18 GHz)	$\pm 4.22$ dB
6	All emissions, radiated(18 GHz- 40 GHz)	$\pm 4.36$ dB

## 5. Test Results and Measurement Data

### 5.1. Antenna requirement

<b>Standard requirement:</b>	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>E.U.T Antenna:</b>	
The antenna is inductive loop coil antenna which permanently attached.	

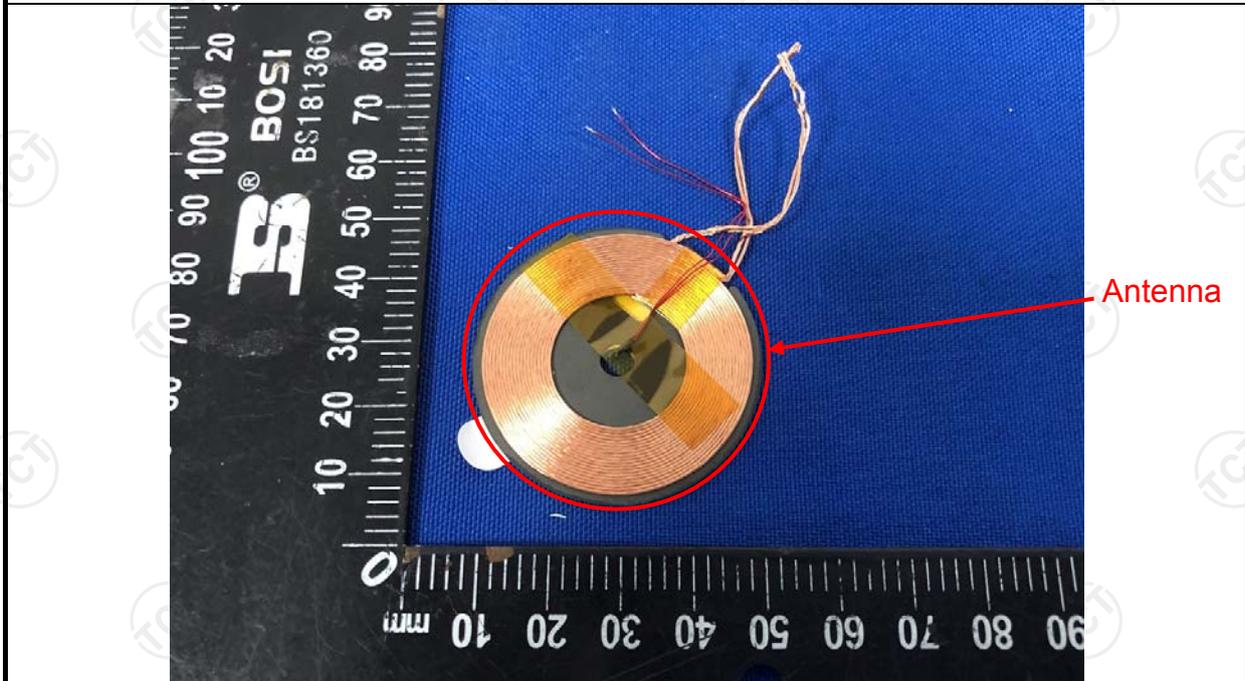

## 5.2. Conducted Emission

### 5.2.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
<b>Test Mode:</b>	Charging + Transmitting Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														


**5.2.2. Test Instruments**

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jul. 07, 2022
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Mar. 11, 2022
Line-5	TCT	CE-05	N/A	Jul. 07, 2022
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

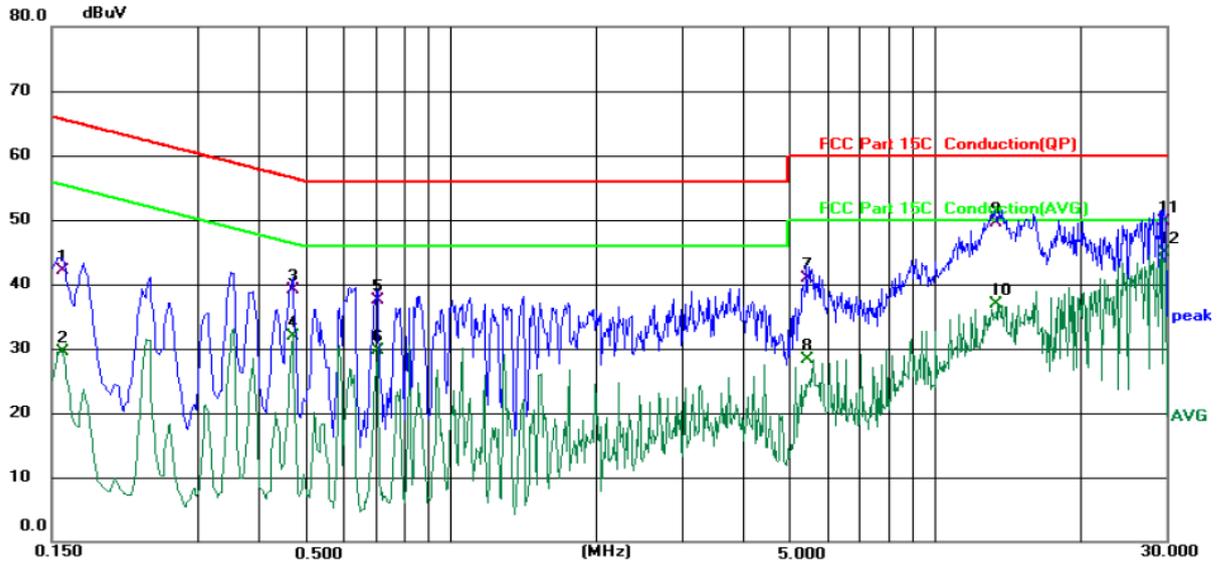

Site 844 Shielding Room Phase: L1 Temperature: 25 (°C) Humidity: 55 %  
Limit: FCC Part 15C Conduction(QP) Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	32.61	9.59	42.20	65.57	-23.37	QP	
2		0.1580	19.98	9.59	29.57	55.57	-26.00	AVG	
3		0.4700	29.87	9.23	39.10	56.51	-17.41	QP	
4		0.4700	22.65	9.23	31.88	46.51	-14.63	AVG	
5		0.7060	28.29	9.21	37.50	56.00	-18.50	QP	
6		0.7060	20.59	9.21	29.80	46.00	-16.20	AVG	
7		5.4380	31.51	9.49	41.00	60.00	-19.00	QP	
8		5.4380	18.90	9.49	28.39	50.00	-21.61	AVG	
9		13.3340	39.85	9.65	49.50	60.00	-10.50	QP	
10		13.3340	27.26	9.65	36.91	50.00	-13.09	AVG	
11		29.8260	39.82	9.88	49.70	60.00	-10.30	QP	
12	*	29.8260	34.95	9.88	44.83	50.00	-5.17	AVG	

**Note:**

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard


Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak

AVG =average

\* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

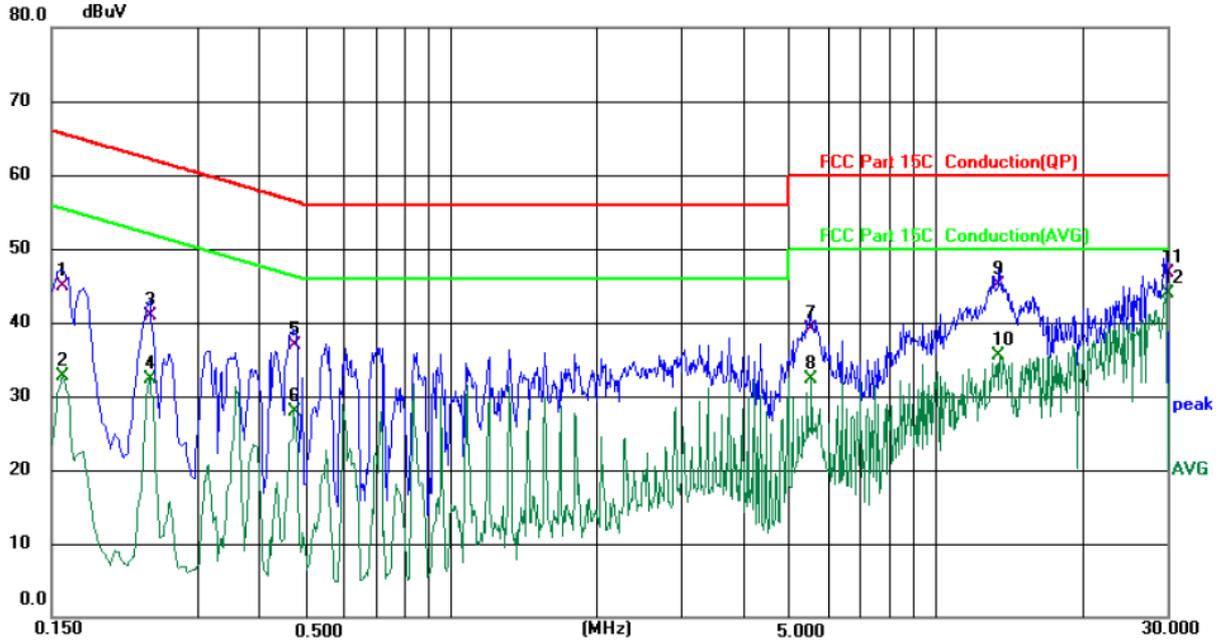

Site 844 Shielding Room      Phase: *N*      Temperature: 25 (°C)      Humidity: 55 %

Limit: FCC Part 15C Conduction(QP)      Power: DC 5 V(Adapter Input AC 120 V/60 Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1580	35.41	9.59	45.00	65.57	-20.57	QP	
2		0.1580	23.13	9.59	32.72	55.57	-22.85	AVG	
3		0.2380	31.68	9.32	41.00	62.17	-21.17	QP	
4		0.2380	23.07	9.32	32.39	52.17	-19.78	AVG	
5		0.4740	27.77	9.23	37.00	56.44	-19.44	QP	
6		0.4740	18.58	9.23	27.81	46.44	-18.63	AVG	
7		5.5100	29.60	9.50	39.10	60.00	-20.90	QP	
8		5.5100	22.72	9.50	32.22	50.00	-17.78	AVG	
9		13.5340	35.55	9.65	45.20	60.00	-14.80	QP	
10		13.5340	25.91	9.65	35.56	50.00	-14.44	AVG	
11		29.9060	36.92	9.88	46.80	60.00	-13.20	QP	
12	*	29.9060	34.07	9.88	43.95	50.00	-6.05	AVG	


**Note:**

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = LISN factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak    AVG =average
- \* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


### 5.3. Radiated Spurious Emission Measurement

#### 5.3.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.209					
<b>Test Method:</b>	ANSI C63.10: 2013					
<b>Frequency Range:</b>	9 kHz to 25 GHz					
<b>Measurement Distance:</b>	3 m					
<b>Antenna Polarization:</b>	Horizontal & Vertical					
<b>Operation mode:</b>	Refer to item 3.1					
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark	
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
<b>Limit:</b>	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)			
	0.009-0.490	2400/F(KHz)	300			
	0.490-1.705	24000/F(KHz)	30			
	1.705-30	30	30			
	30-88	100	3			
	88-216	150	3			
	216-960	200	3			
	Above 960	500	3			
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector		
	Above 1GHz	500	3	Average		
	5000	3	Peak			
<b>Test setup:</b>	For radiated emissions below 30MHz					
	<p>30MHz to 1GHz</p>					

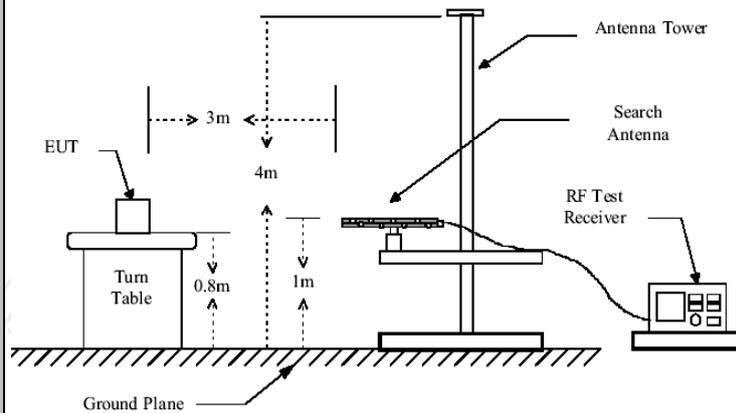

Above 1GHz

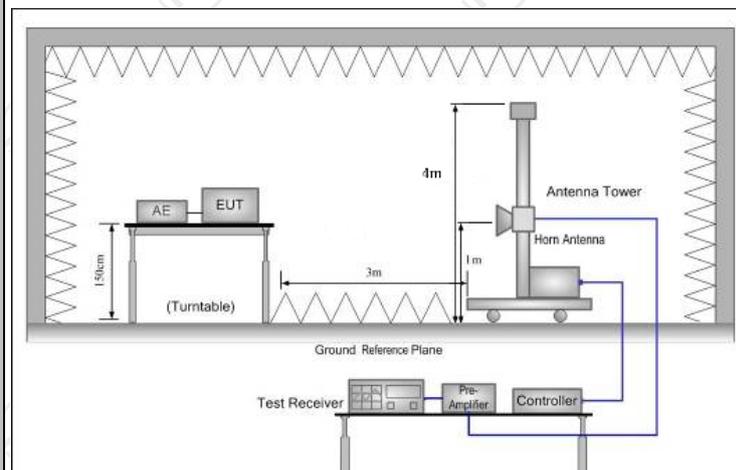

**Test Procedure:**

1. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
- For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>4. Use the following spectrum analyzer settings:</p> <p>(1) Span shall wide enough to fully capture the emission being measured;</p> <p>(2) Set RBW=120 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</p> <p>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</p> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
<b>Test mode:</b>	Refer to section 3.1 for details
<b>Test results:</b>	PASS

**5.3.2. Test Instruments**


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jul. 07, 2022
Spectrum Analyzer	R&S	FSQ40	200061	Jul. 07, 2022
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Mar. 11, 2022
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Apr. 08, 2022
Pre-amplifier	HP	8447D	2727A05017	Jul. 07, 2022
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 05, 2022
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 04, 2022
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Apr. 10, 2023
Antenna Mast	Keleto	RE-AM	N/A	N/A
Coaxial cable	SKET	RC_DC18G-N	N/A	Apr. 08, 2022
Coaxial cable	SKET	RC-DC18G-N	N/A	Apr. 08, 2022
Coaxial cable	SKET	RC-DC40G-N	N/A	Jul. 07, 2022
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

**5.3.3. Test Data**

Please refer to following diagram for individual


**9KHz-30MHz**

9KHz-150KHz:

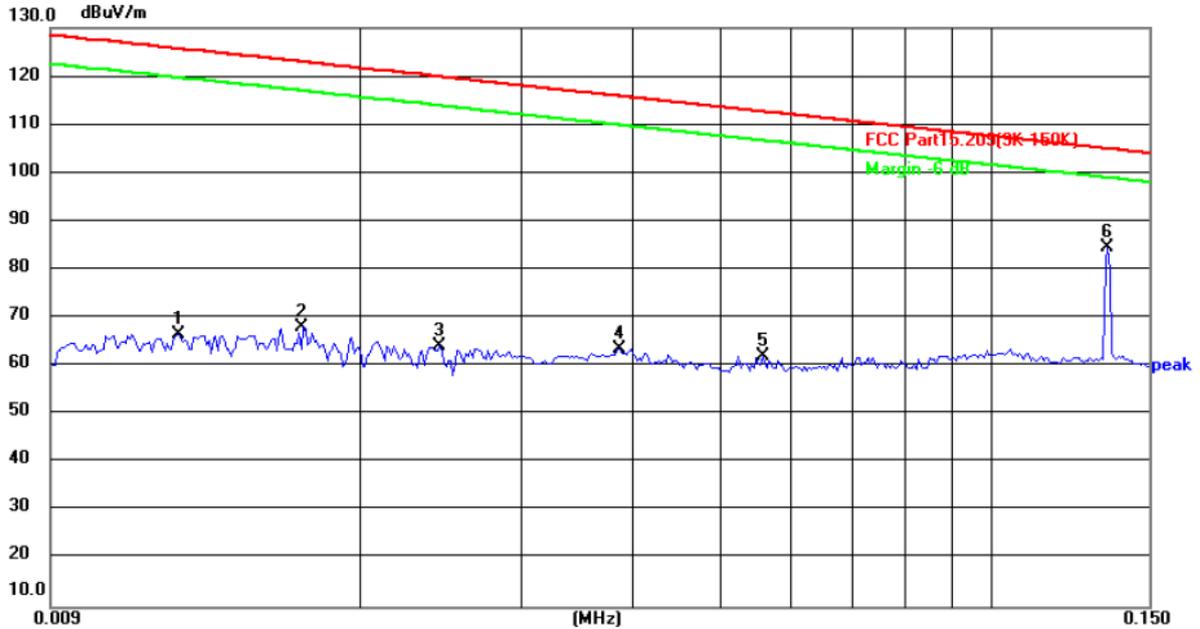

Site: Polarization: Temperature: 25(°C)  
Limit: FCC Part15.209(9K-150K) Power: DC 3.7 V Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0125	44.11	22.40	66.51	125.66	-59.15	peak
2	0.0171	48.16	19.99	68.15	122.94	-54.79	peak
3	0.0244	45.57	18.70	64.27	119.86	-55.59	peak
4	0.0386	43.95	19.65	63.60	115.88	-52.28	peak
5	0.0555	41.35	20.78	62.13	112.73	-50.60	peak
6 *	0.1348	59.13	25.49	84.62	105.03	-20.41	peak

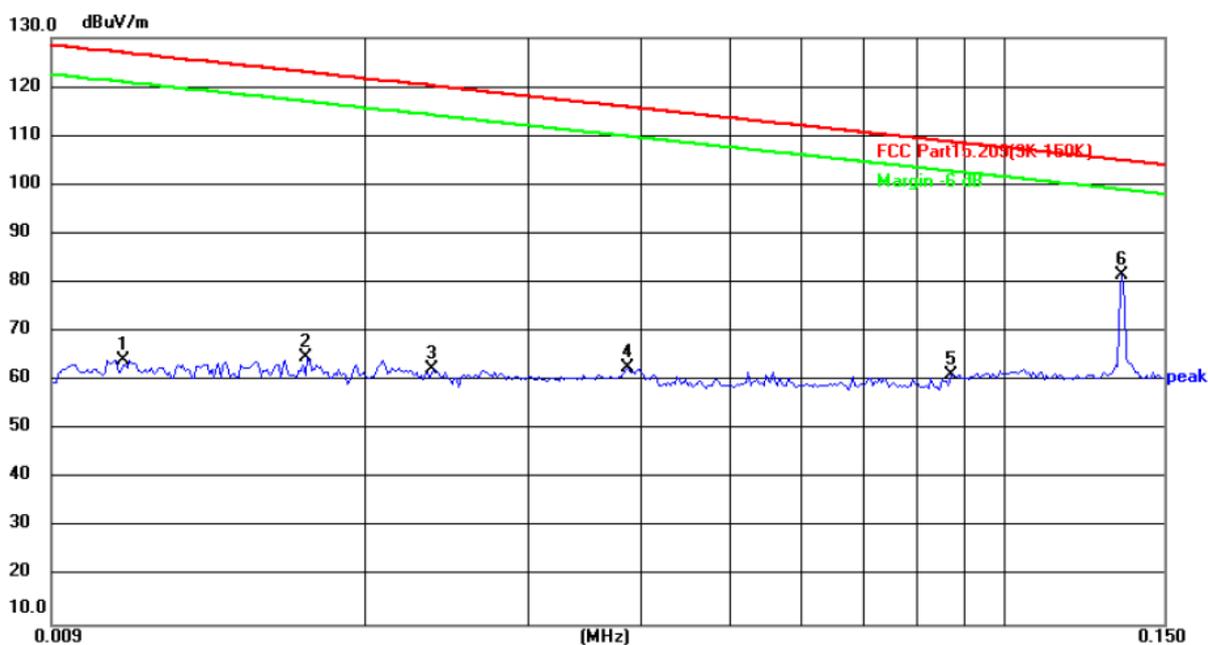


Site: Polarization: Temperature: 25(°C)  
 Limit: FCC Part15.209(9K-150K) Power: DC 5 V(Adapter Input AC 120 V/60Hz) Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0108	40.97	23.31	64.28	126.93	-62.65	peak
2	0.0171	44.66	19.99	64.65	122.94	-58.29	peak
3	0.0235	43.71	18.64	62.35	120.19	-57.84	peak
4	0.0386	42.95	19.65	62.60	115.88	-53.28	peak
5	0.0874	38.16	22.95	61.11	108.79	-47.68	peak
6 *	0.1348	56.13	25.49	81.62	105.03	-23.41	peak




150KHz-30MHz:

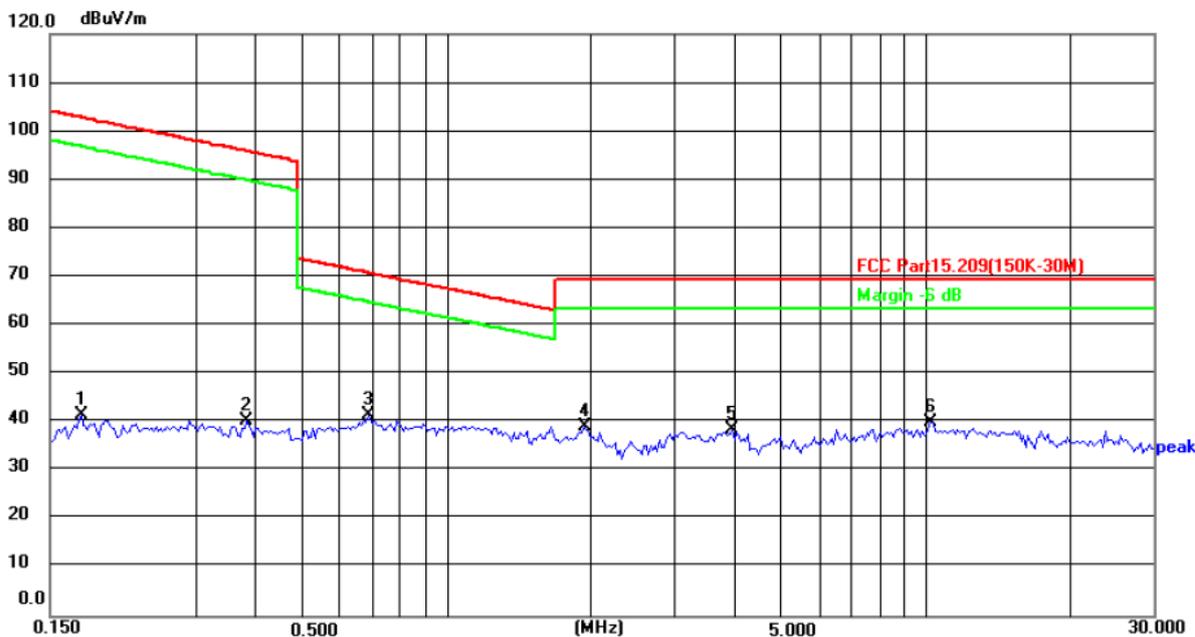

Site: Polarization: Temperature: 25(°C)  
 Limit: FCC Part15.209(150K-30M) Power: DC 3.7 V Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1737	15.15	26.37	41.52	102.82	-61.30	peak
2	0.3850	14.21	26.24	40.45	95.90	-55.45	peak
3 *	0.6895	16.32	25.16	41.48	70.84	-29.36	peak
4	1.9489	14.52	24.77	39.29	69.50	-30.21	peak
5	3.9639	14.00	24.66	38.66	69.50	-30.84	peak
6	10.2873	13.75	26.23	39.98	69.50	-29.52	peak

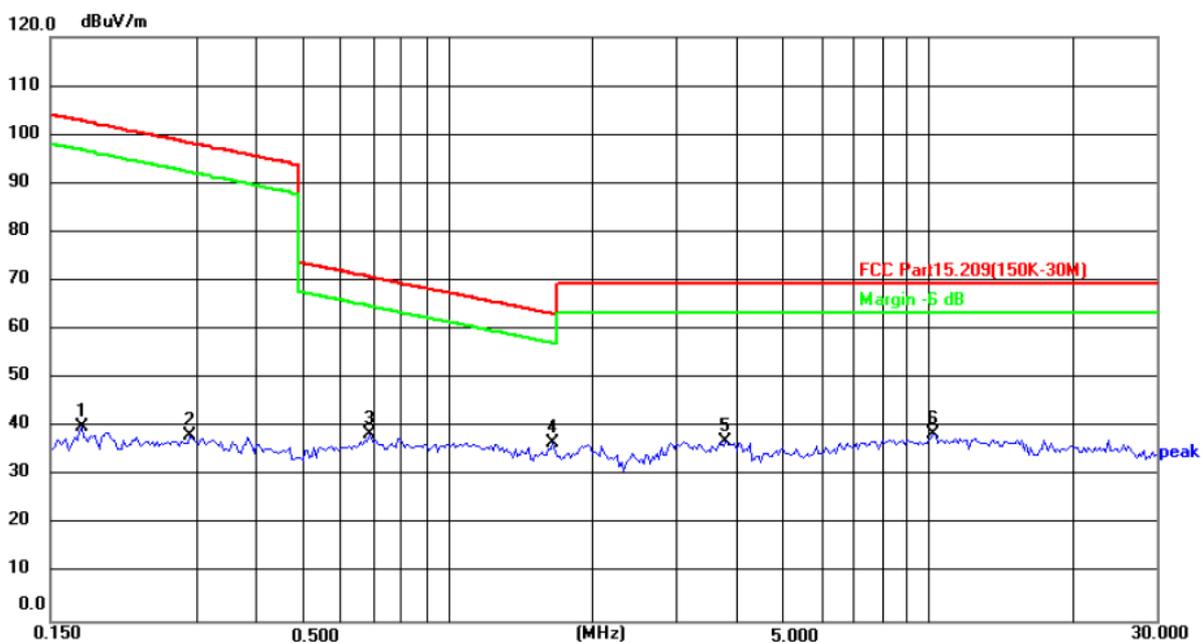


Site: Polarization: Temperature: 25(°C)  
 Limit: FCC Part15.209(150K-30M) Power: DC 5 V(Adapter Input AC 120 V/60Hz Humidity: 55 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1737	13.65	26.37	40.02	102.82	-62.80	peak
2	0.2923	12.16	26.22	38.38	98.30	-59.92	peak
3	0.6895	13.32	25.16	38.48	70.84	-32.36	peak
4 *	1.6625	11.85	24.86	36.71	63.22	-26.51	peak
5	3.7993	12.39	24.67	37.06	69.50	-32.44	peak
6	10.2873	12.25	26.23	38.48	69.50	-31.02	peak



## 30MHz-1GHz


Horizontal:

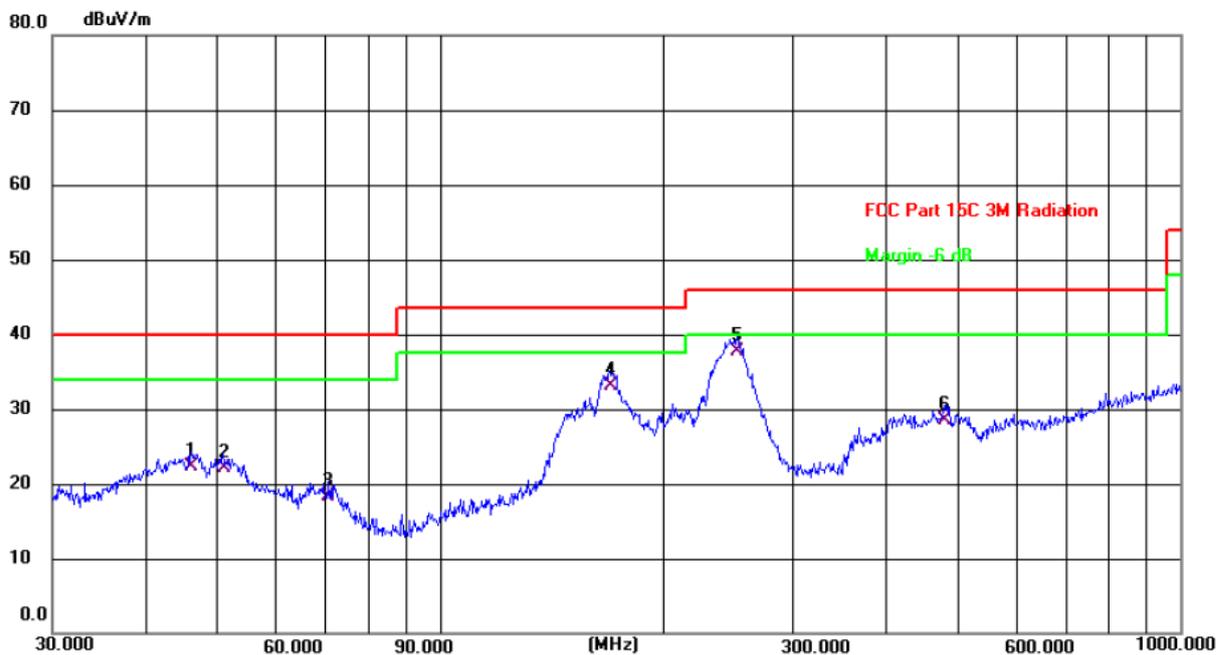

Site: Polarization: **Horizontal** Temperature: 25.4(C)  
 Limit: FCC Part 15C 3M Radiation Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	46.1779	8.40	13.85	22.25	40.00	-17.75	QP	P	
2	50.9420	8.42	13.65	22.07	40.00	-17.93	QP	P	
3	70.8315	7.10	11.13	18.23	40.00	-21.77	QP	P	
4	169.5990	20.11	12.95	33.06	43.50	-10.44	QP	P	
5 *	252.0627	24.90	12.80	37.70	46.00	-8.30	QP	P	
6	480.5276	9.92	18.55	28.47	46.00	-17.53	QP	P	

Vertical:

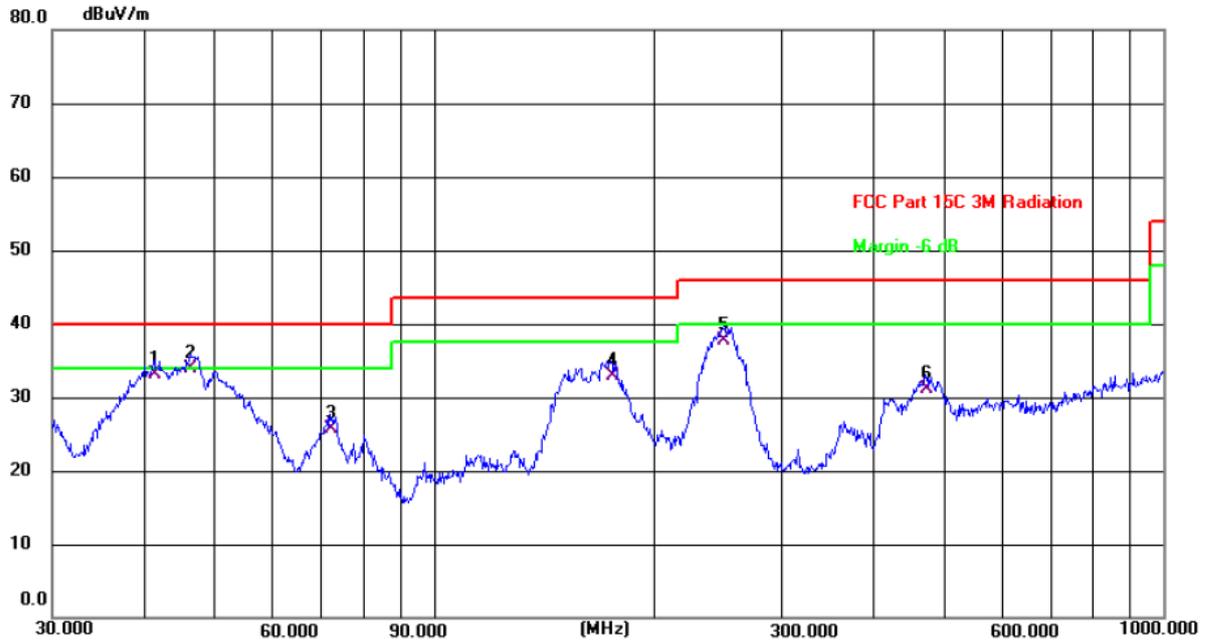


Site: Polarization: **Vertical** Temperature: 25.4(C)  
 Limit: FCC Part 15C 3M Radiation Power: DC 5 V(Adapter Input AC 120 V/60 Hz) Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	41.4215	19.18	13.96	33.14	40.00	-6.86	QP	P	
2 *	46.3402	20.04	13.85	33.89	40.00	-6.11	QP	P	
3	72.0843	14.77	10.87	25.64	40.00	-14.36	QP	P	
4	175.0368	20.51	12.42	32.93	43.50	-10.57	QP	P	
5	249.4250	24.99	12.79	37.78	46.00	-8.22	QP	P	
6	472.1760	12.78	18.35	31.13	46.00	-14.87	QP	P	

**Note:**

*Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier*

Horizontal:

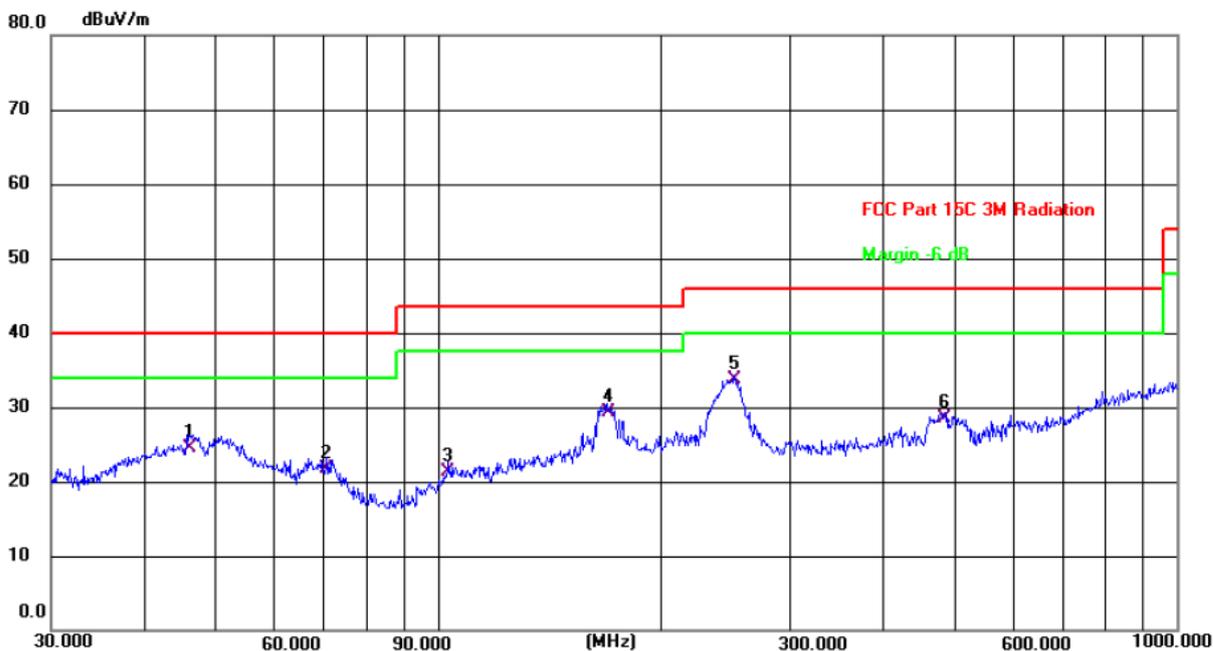

Site #1

Polarization: *Horizontal*

Temperature: 25.4(C)


Limit: FCC Part 15C 3M Radiation

Power: DC 3.7 V

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	46.1779	10.66	13.85	24.51	40.00	-15.49	QP	P	
2	70.8315	10.66	11.13	21.79	40.00	-18.21	QP	P	
3	103.4419	10.66	10.70	21.36	43.50	-22.14	QP	P	
4	169.5989	16.35	12.95	29.30	43.50	-14.20	QP	P	
5 *	252.0627	20.88	12.80	33.68	46.00	-12.32	QP	P	
6	485.6091	9.88	18.68	28.56	46.00	-17.44	QP	P	

Vertical:

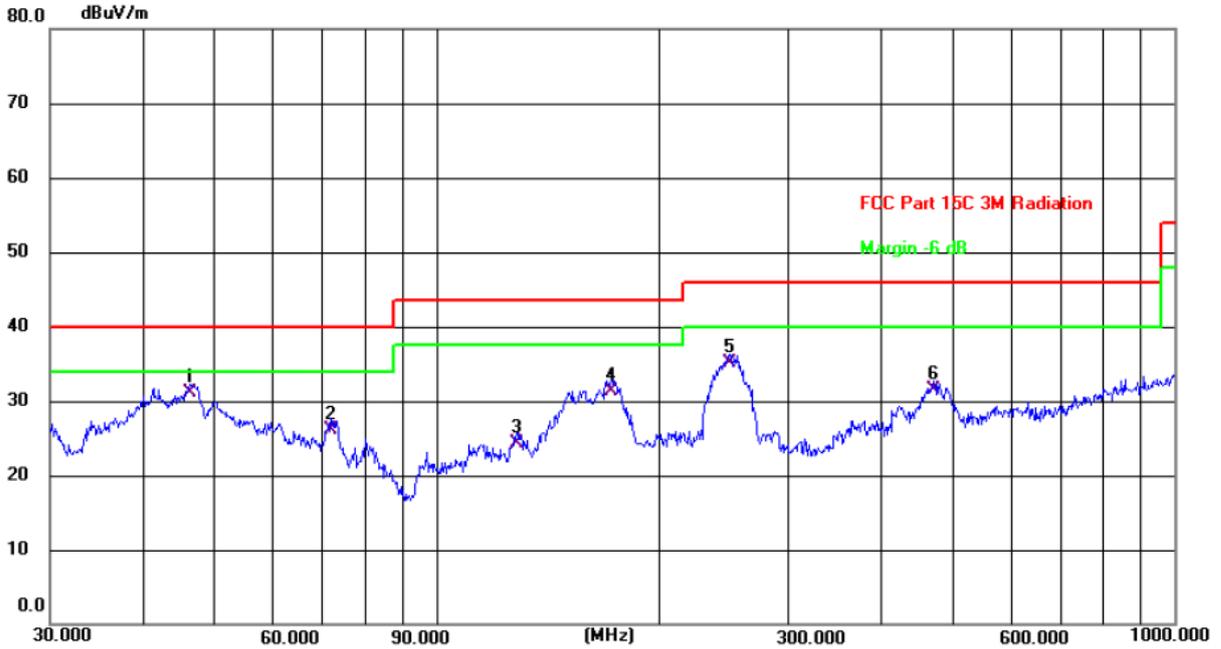

Site #1

Polarization: **Vertical**

Temperature: 25.4(C)

Limit: FCC Part 15C 3M Radiation

Power: DC 3.7 V

Humidity: 49 %

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1 *	46.3402	17.25	13.85	31.10	40.00	-8.90	QP	P	
2	72.0841	15.33	10.87	26.20	40.00	-13.80	QP	P	
3	128.5629	11.66	12.57	24.23	43.50	-19.27	QP	P	
4	172.5987	18.65	12.65	31.30	43.50	-12.20	QP	P	
5	249.4250	22.35	12.79	35.14	46.00	-10.86	QP	P	
6	472.1759	13.25	18.35	31.60	46.00	-14.40	QP	P	

**Note:**


*Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier*


### Appendix A: Photographs of Test Setup

Product: LinearFlux HyperSonic


Model: 4897053631086

Radiated Emission

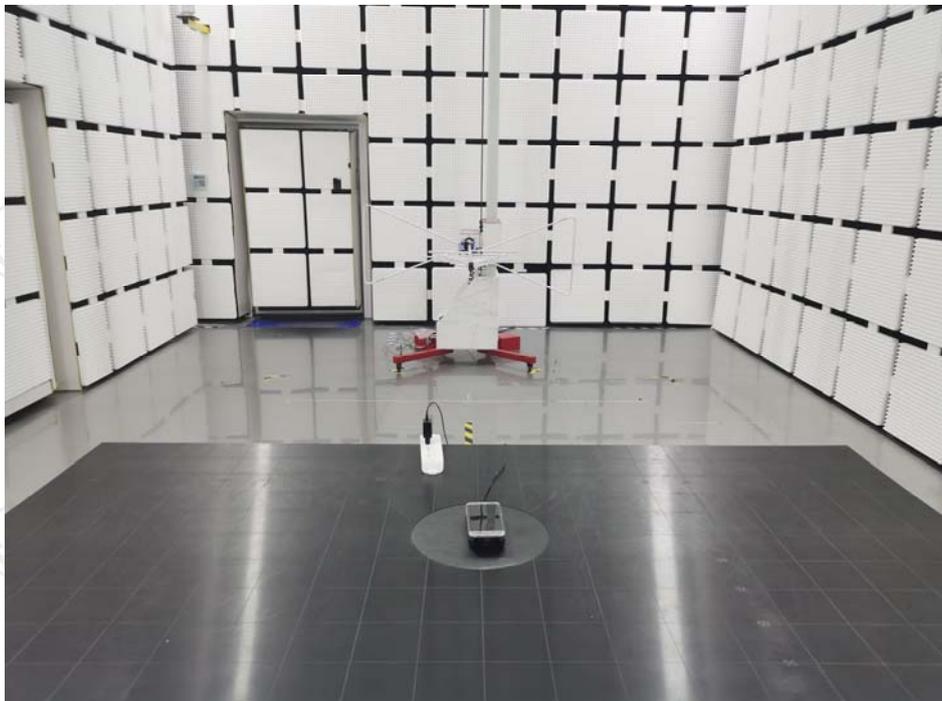

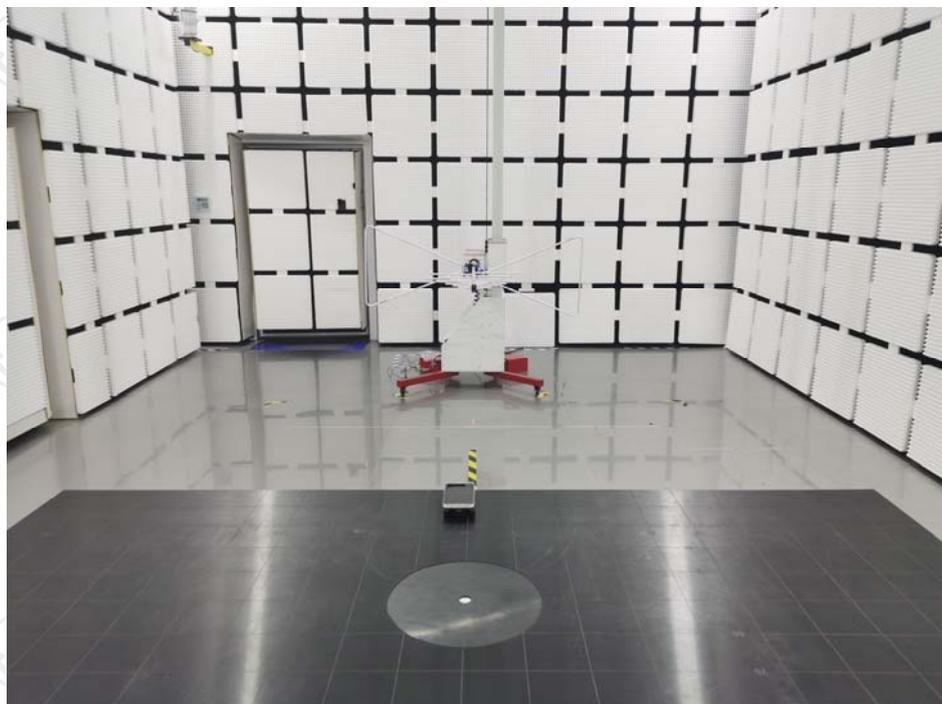



Conducted Emission

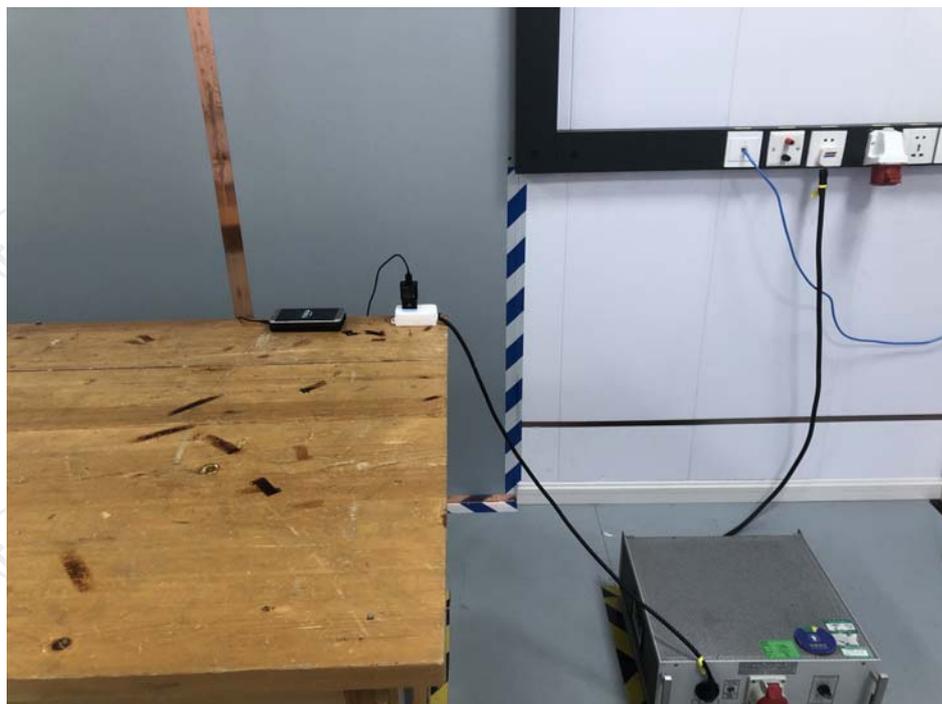



**Appendix B: Photographs of EUT**  
**Product: LinearFlux HyperSonic**  
**Model: 4897053631086**  
**External Photos**






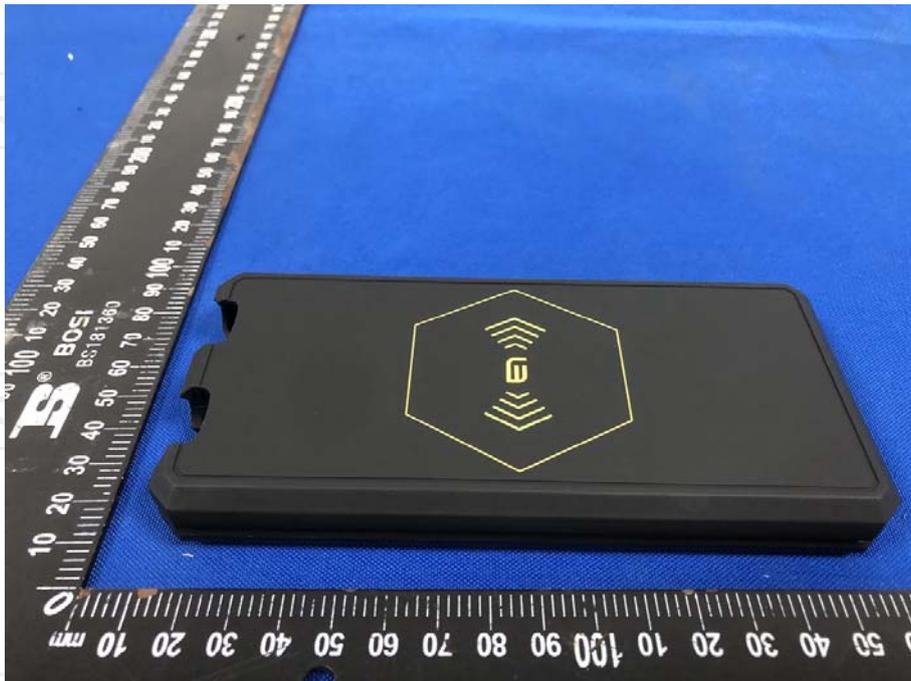


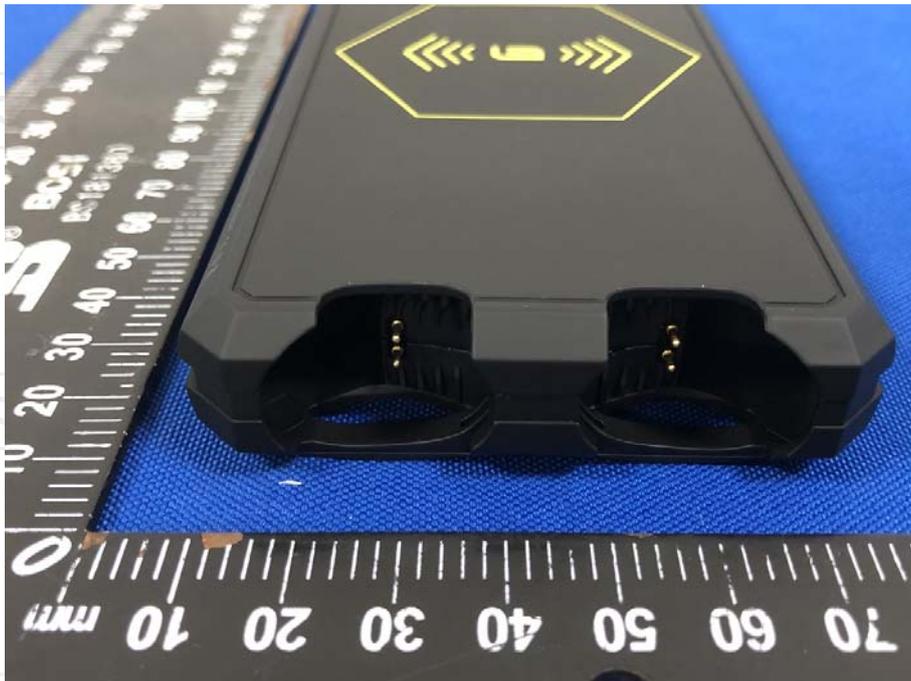



**Product: LinearFlux HyperSonic**  
**Model: 4897053631086**  
**Internal Photos**

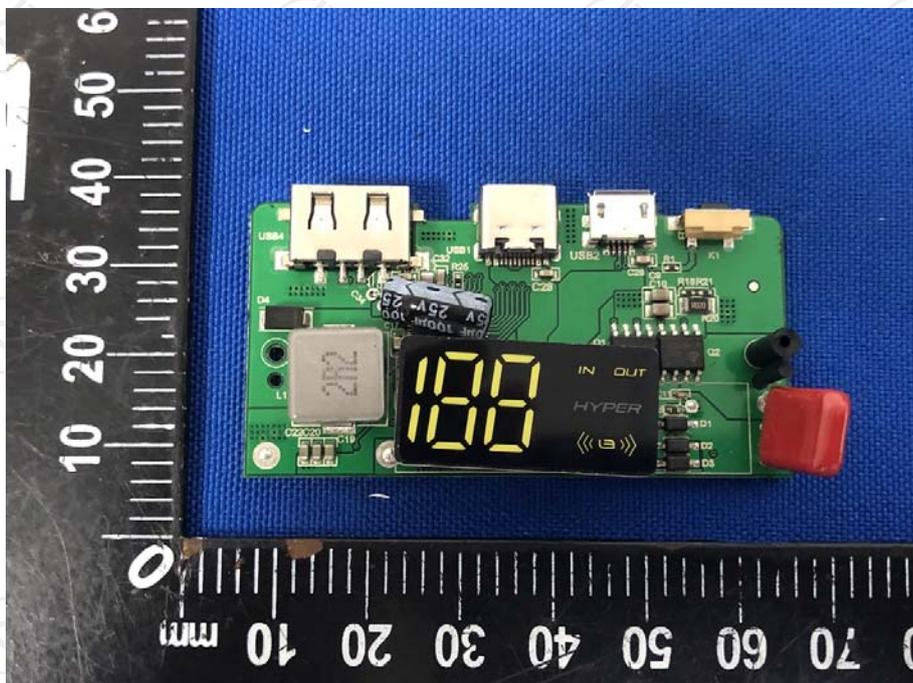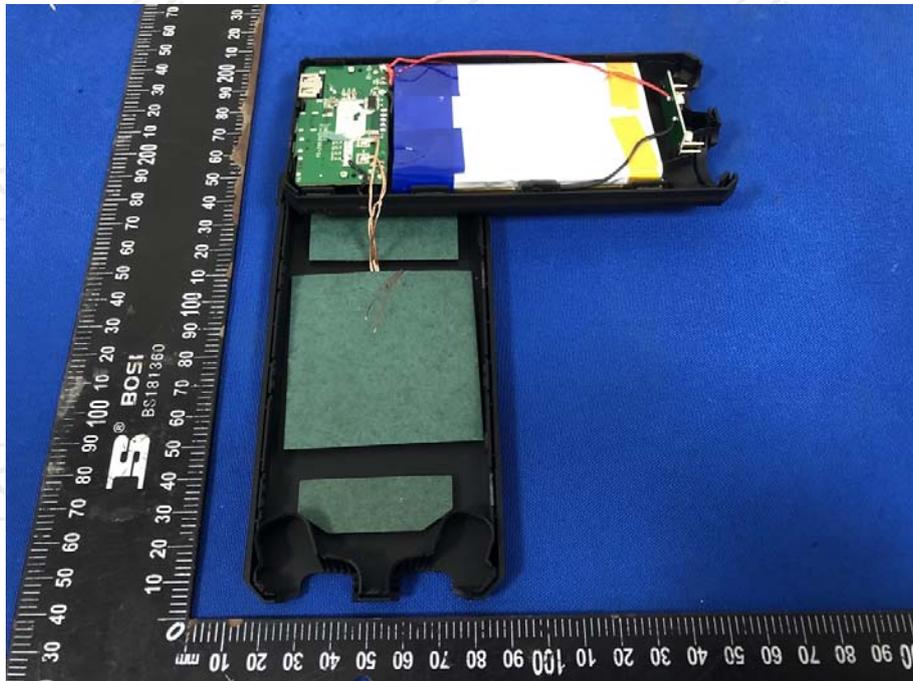

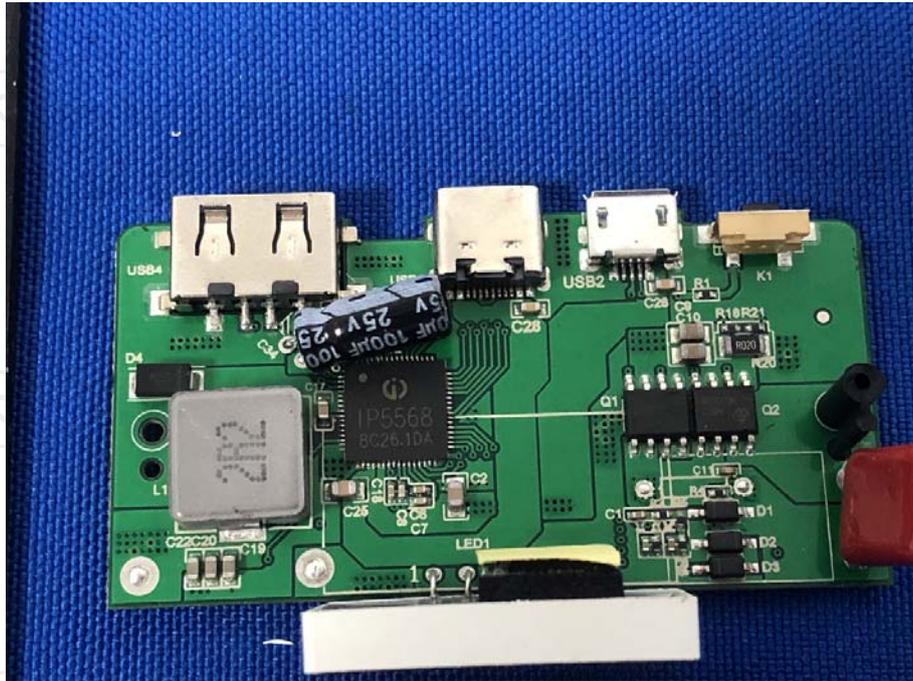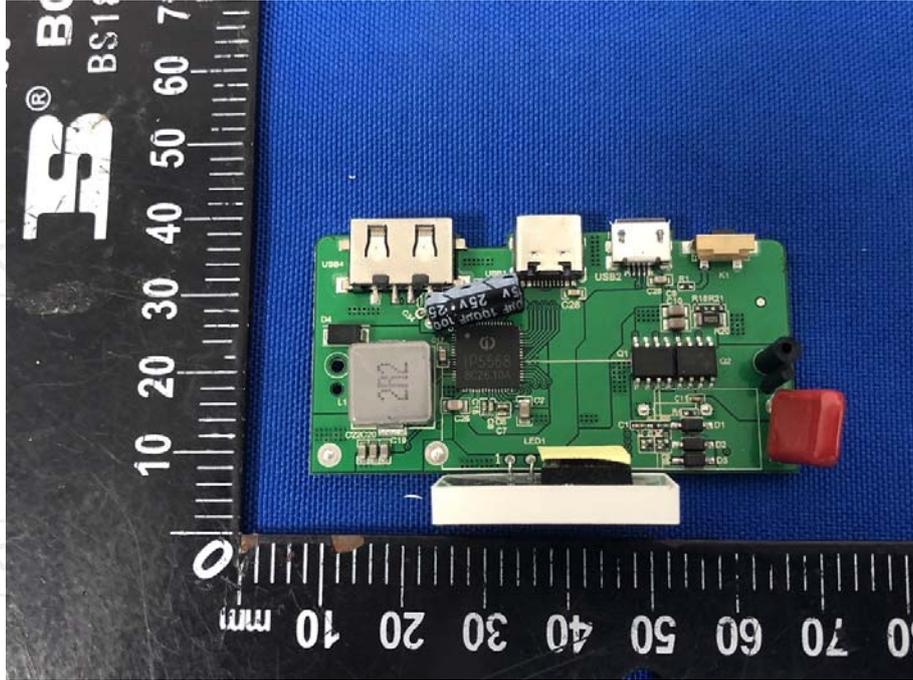

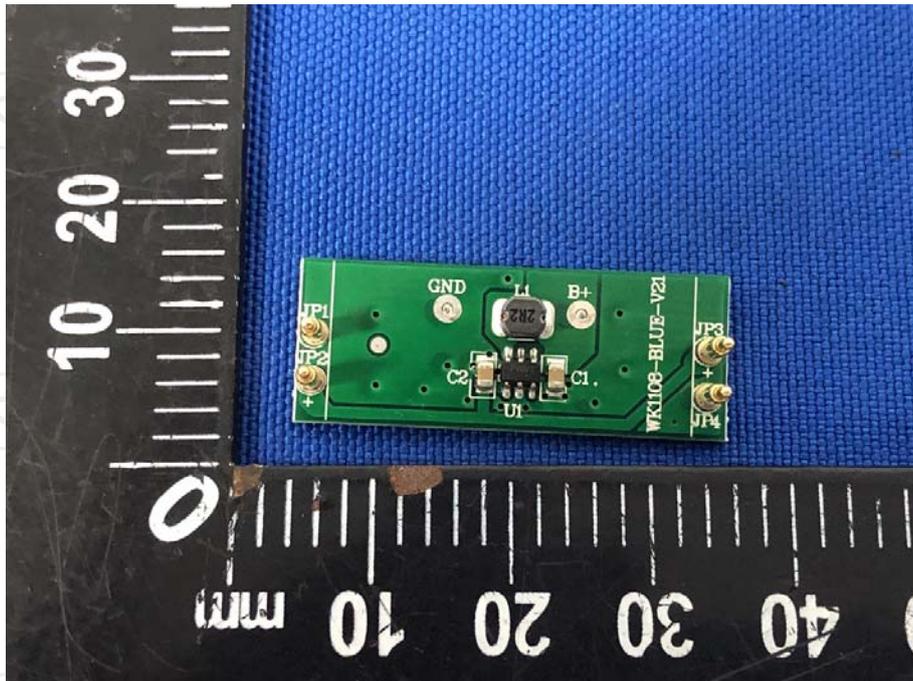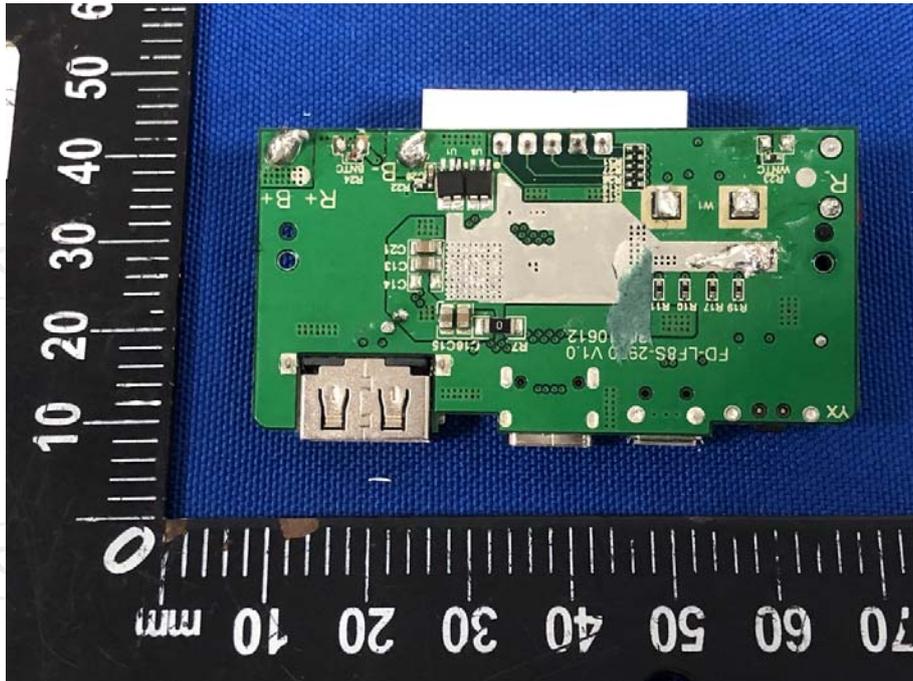

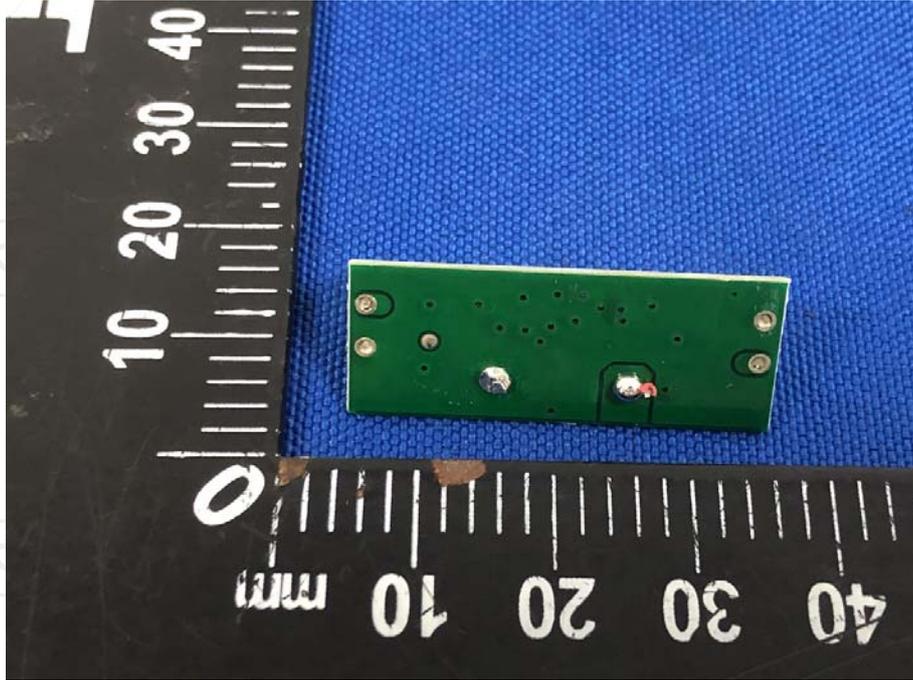

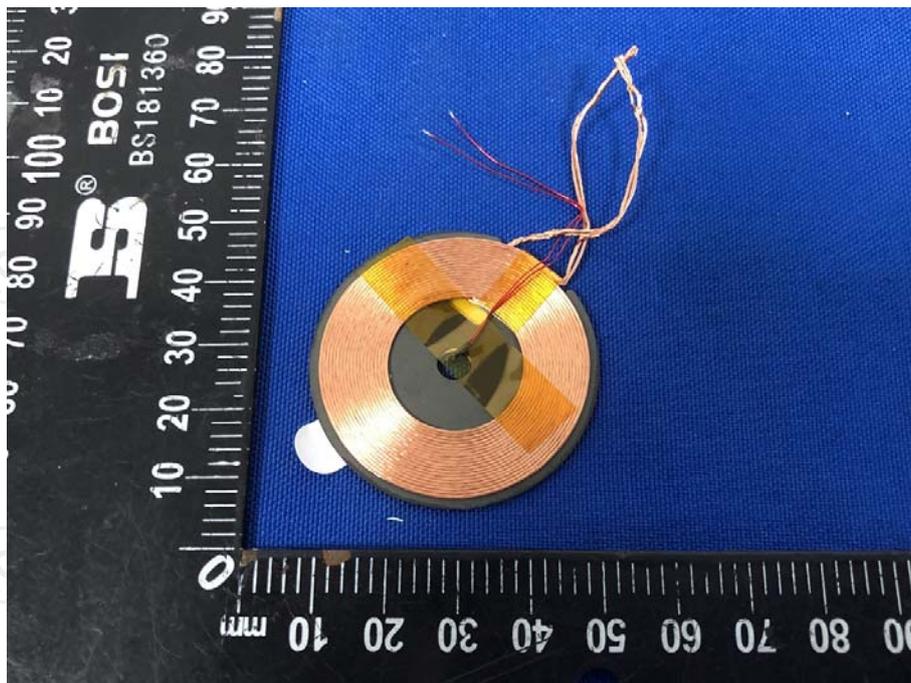

**\*\*\*\*\*END OF REPORT\*\*\*\*\***