

Antenna specification

Antenna Sample Confirmation From

Name of supplier	Dongguan Yafu Intelligent Technology Co., Ltd				
Customer name	ZKC				
Sample name					
model	TCT				
Sample size					
Inspection item	Performance test	Visual inspection	Structure	In the news	Test results
Notes					
Quality Audit		Project Audit		Business confirmation	
The following is to be completed by the client					

Dongguan Yafu Intelligent Technology Co., Ltd

Customer feedback	
Customer signature/seal	<div>date:</div>

Antenna Test Report

Test Unit: Shenzhen Aihui Technology Co. , Ltd.			
Materials	FPC		
Antenna form	PIFA	Polarization mode	Linear
Application scenario	W/G/B		
Working band	2400Mhz-2500Mhz	VSWR	≤2

Power	Max: 2W	Impedance	50Ω
dBi	0.94dBi		
Test Equipment	HPE5071C、Shielding Room、3D automatic turntable		
<p>Antenna Description::</p> <p>1. Grounding processing and picture description: no</p> <p>2. Need to change the motherboard to match: no</p> <ul style="list-style-type: none">● Test voltage: 3.6V, check the antenna contact is good before testing.● The RF cable of the integrated tester is kept in a natural state and can not be curled. <p>Specification:test the specified power level, all indicators must conform to the specifications.</p>			

1.Project Image

2.Test Fixture

3.Antenna matching circuit

4.S11 test

5.Antenna passive efficiency and gain

6.Darkroom test equipment and data

7.Schematic diagram of antenna assembly

8.Antenna environment handling

9.Antenna mass production index

10.Structural drawing


1. Project Image

The final verification antenna performance prototype in our company for at least one year, easy to analyze and solve the problem of antenna mass production, to ensure the quality of antenna shipment


2. Test Fixture

Objective: to test the passive parameters of antenna as accurately as possible. Making

Method: the handset is made of a 50 ohm coaxial cable, one end of which is connected to the test point of the back end of the matching circuit of the handset motherboard (front end of the RF test hole) , and the other end is connected to the SMA joint. The diagram is as follows:

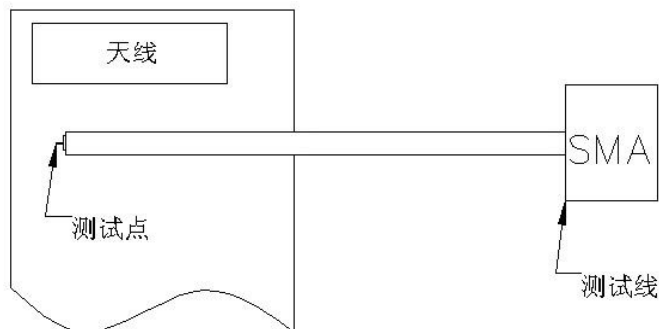

3. Antenna matching circuit

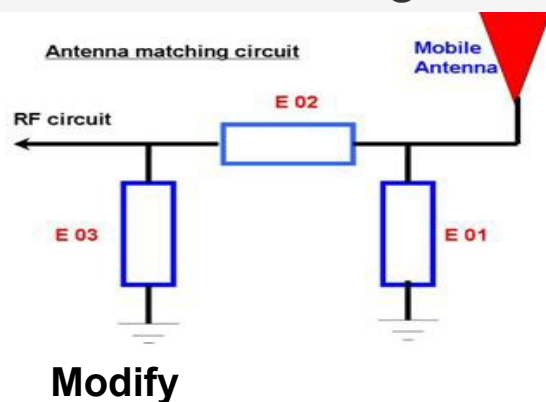


E01	E02	E03
No	No	No

Note: The match is unmodified.

4.S11 test

4.0 4.0s11 test method description of test equipment: Network Analyzer (E5071C) test method: a 50 ohm CABLE is used to export from the instrument test port. The SMA connector for connecting the handset is calibrated using a calibration piece, record the echo loss and standing wave ratio corresponding to the relevant frequency points. The test schematic is as follows:

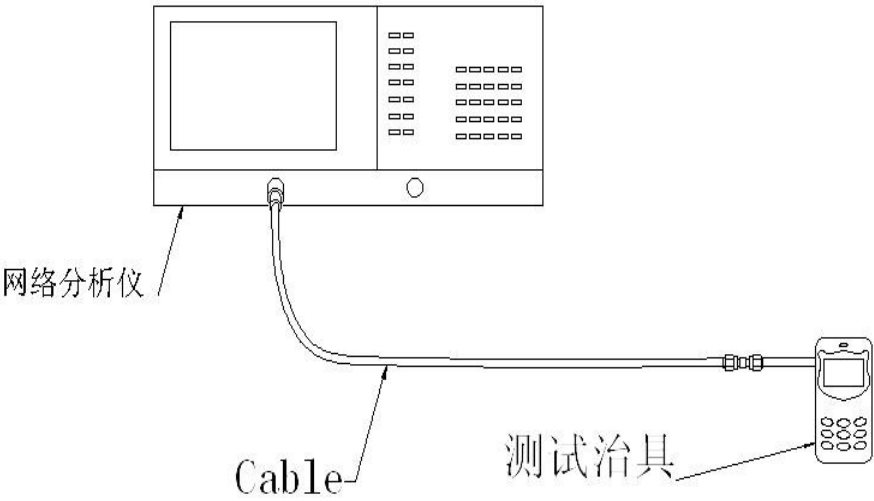

Darkroom test equipment and data


4.Test Equipment

Test system: shielded darkroom

The temperature was $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and the humidity was $50\% \pm 15\%$

Test equipment: when testing passive data, use the Network analyzer

AGILENTE5071C to test active data, use the omnibus CMW500







5.Active antenna test data

测试数据:

BT 、 WiFi 2400-2500Mhz

Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	35.4	0.28
2410	33.6	0.36
2420	36.7	0.25
2430	38.6	0.85
2440	39.3	0.31
2450	35.6	0.94
2460	34.5	0.48
2470	33.1	0.20
2480	32.3	0.29
2490	34.5	0.88
2500	36.1	0.93

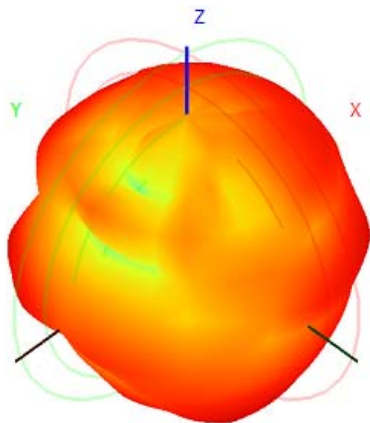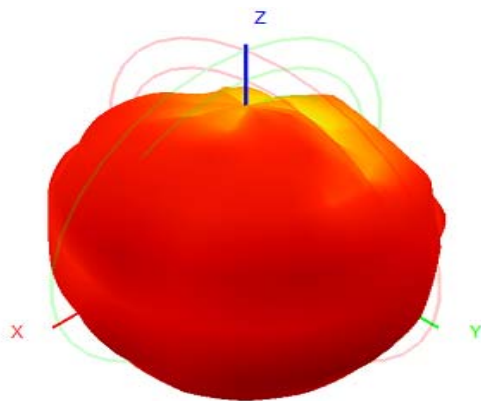

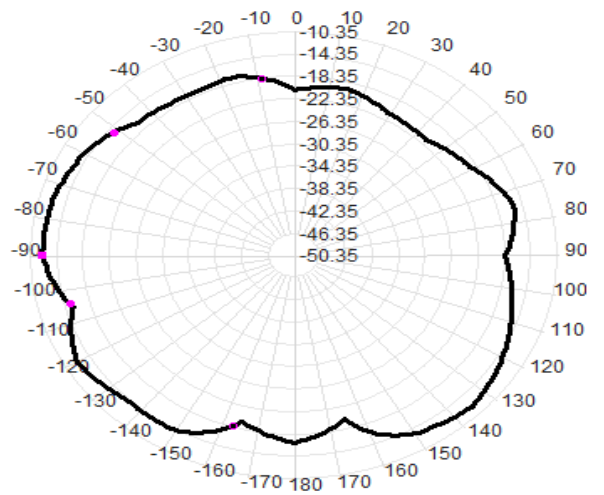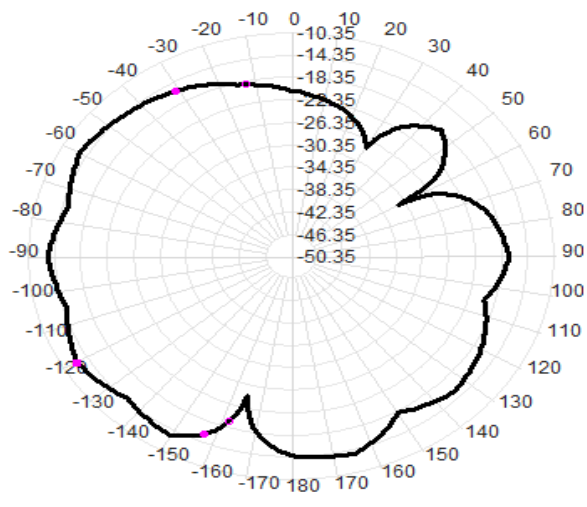

6.The panel matches the change schematic

7.Antenna environment handlin

8.The panel matches the change schematic

9.Antenna environment handlin

8.Antenna mass production index

When the antenna is mass-produced, the standing wave ratio is taken as the mass-produced test standard. Based on the differences of the project itself, the following criteria are given:

Frequency	Standard for volume production
2400 MHZ -2500MHZ	VSWR (Mass Production performance) & LT; VSWR(recognition performance) 0.5

10. Structural drawings

