



FCCTESTREPORT

FCC ID: SY4-A02044

On Behalf of

Shanghai Huace Navigation Technology Ltd.

Geodetic GNSS Receiver

Model No.: iBase

Prepared for : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China

PreparedBy : Shenzhen Alpha Product Testing Co.,Ltd.
Address : Buildingi, No.2,LixinRoad, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2302250-C05-R03
Date of Receipt : April 10, 2023
Date of Test : April 10, 2023-May 6, 2023
Date of Report : May 6, 2023
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	5
1.1. Description of Standards and Results	5
2. General Information	6
2.1. Description of Device (EUT)	6
2.2. Accessories of Device (EUT)	7
2.3. Tested Supporting System Details	7
2.4. Block Diagram of connection between EUT and simulators	7
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Spurious Emission	11
3.1. Test Limits	11
3.2. Test Procedure	12
3.3. Test Setup	12
3.4. Test Results	13
4. Power line Conducted Emission	28
4.1. Test Limits	28
4.2. Test Procedure	28
4.3. Test Setup	28
4.4. Test Results	28
5. Conducted Maximum Output Power	29
5.1. Test limits	29
5.2. Test Procedure	29
5.3. Test Setup	29
5.4. Test Results	29
6. Peak Power Spectral Density	31
6.1. Test limits	31
6.2. Test Procedure	31
6.3. Test Setup	31
6.4. Test Results	32
7. Bandwidth	37
7.1. Test limits	37
7.2. Test Procedure	37
7.3. Test Setup	37
7.4. Test Results	37
8. Band Edge Check	48
8.1. Test limits	48
8.2. Test Procedure	48
8.3. Test Setup	48
8.4. Test Results	48
9. Antenna Requirement	53
9.1. Standard Requirement	53
9.2. Antenna Connected Construction	53
9.3. Results	53
10. Test setup photo	54
10.1. Photos of Radiated emission	54

TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
Manufacturer : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
EUT Description : Geodetic GNSS Receiver
(A) ModelNo. : iBase
(B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10-2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission level emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yanniss Wen
Project Engineer



Approved by (name + signature).....: Reak Yang
Project Manager



Date of issue.....: May 6, 2023

Revision History

Revision	Issue Date	Revisions	RevisedBy
V0	May 6, 2023	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15.15.207 ANSI C63.10	N/A
6 dB Bandwidth	FCC Part 15.15.247(a)(2) ANSI C63.10	P
Output Power	FCC Part 15.15.247(b)(3) ANSI C63.10	P
Radiated Spurious Emission	FCC Part 15.15.209 FCC Part 15.15.247(d) ANSI C63.10	P
Conducted Spurious & Band Edge Emission	FCC Part 15.15.247(d) ANSI C63.10	P
Power Spectral Density	FCC Part 15.15.247(e) ANSI C63.10	P
Radiated Band Edge Emission	FCC Part 15.15.247(d) ANSI C63.10	P
Antenna Requirement	FCC Part 15.15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable. 4. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.		

2. GENERAL INFORMATION

2.1. Description of Device(EUT)

EUT Name : Geodetic GNSS Receiver
Model No. : iBase
DIFF. : N/A
Power supply : DC 7.4V from battery

2.4GWIFI :

Operation frequency : 2412MHz-2462MHzforIEEE802.11b,g,n/HT20

Channel No. : 802.11b/802.11g/802.11n(HT20):11CH

Modulation type : IEEE802.11b:DSSS(CCK,DQPSK,DBPSK)
IEEE802.11g:OFDM(64QAM,16QAM,QPSK,BPSK)
IEEE802.11n:OFDM(64QAM,16QAM,QPSK,BPSK)

Antenna Type : Internal antenna, Maximum Gain is 1.51dBi.
Antenna information is provided by applicant.

Software version : 2.2.1

Hardware version : V1.2.0

Intend use environment : Residential, commercial and light industrial environment

Note : /


2.2. Accessories of Device(EUT)

Accessories : /
Manufacturer : /
Model : /
Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	SerialNumber	CertificationorSDOC
1	Notebook PC	ThinkPad	E14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

Dutycycle:100%KeepingTX			
Mode	datarate(Mbps)(seeNote)	Channel	Frequency (MHz)
IEEE802.11b	1	Low:CH1	2412
	1	Middle:CH6	2437
	1	High:CH11	2462
IEEE802.11g	6	Low:CH1	2412
	6	Middle:CH6	2437
	6	High:CH11	2462
IEEE802.11n/HT20	6.5	Low:CH1	2412
	6.5	Middle:CH6	2437
	6.5	High:CH11	2462
Note: According exploratory test, EUT will have maximum output power in those data rate. So those data rate were used for all test.			

Channel list:					
ForIEEE802.11b,g,n/HT20					
Channel	Frequency(MHz)	Channel	Frequency(MHz)	Channel	Frequency(MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	24℃
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co.,Ltd
 Building1, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293961
 Designation Number: CN1236

July 15, 2019 Certificated by IC
 Registration Number: 12135A

2.8. Measurement Uncertainty

(95% confidence levels, $k=2$)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2℃
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. TestEquipmentList

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2022.05.17	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2022.08.22	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2022.08.22	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2022.08.22	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2022.08.22	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2022.08.22	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2022.08.22	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2022.08.22	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2022.08.22	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2022.08.22	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2022.08.22	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2022.08.23	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	/	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2022.08.22	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2022.08.22	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2022.08.22	1 Year
Temp. & Humid. Chamber	Weihuang	WHTH-1000 -40-880	/	100631	2022.08.22	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2022.08.22	1 Year
Adjustable attenuator	MWRFTest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. SPURIOUSEMISSION

3.1. Test Limits

All the emissions appearing with in 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELDSTRENGTHSLIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0dB(μV)/m(Peak) 54.0dB(μV)/m(Average)	
Note1:Thepeaklimitis20dBhigherthantheaveragelimit			
Note2:Peaklimitapplies(AVGlimit+20dB)aswellasRSS-247Section5.5			

3.2. Test Procedure



The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation. The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.


The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured

If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.

3.3. Test Setup

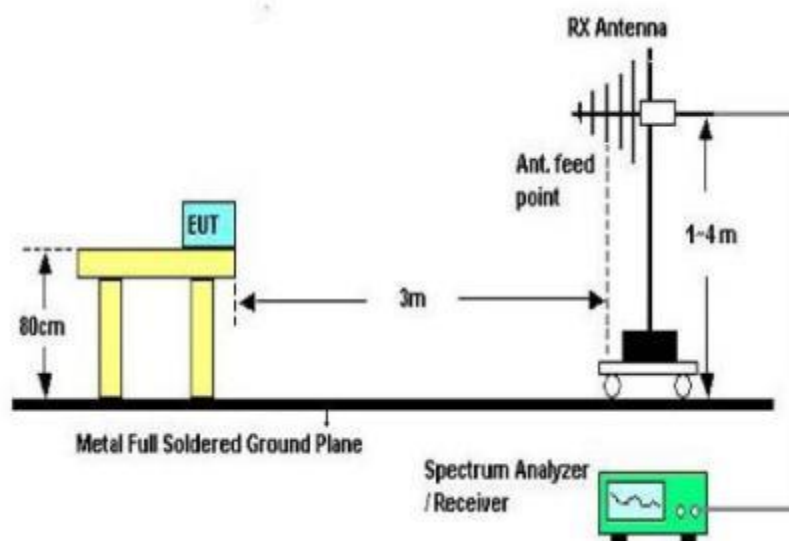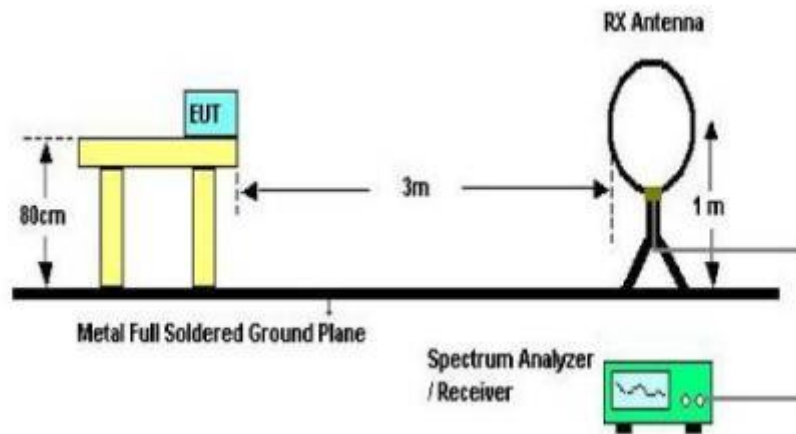

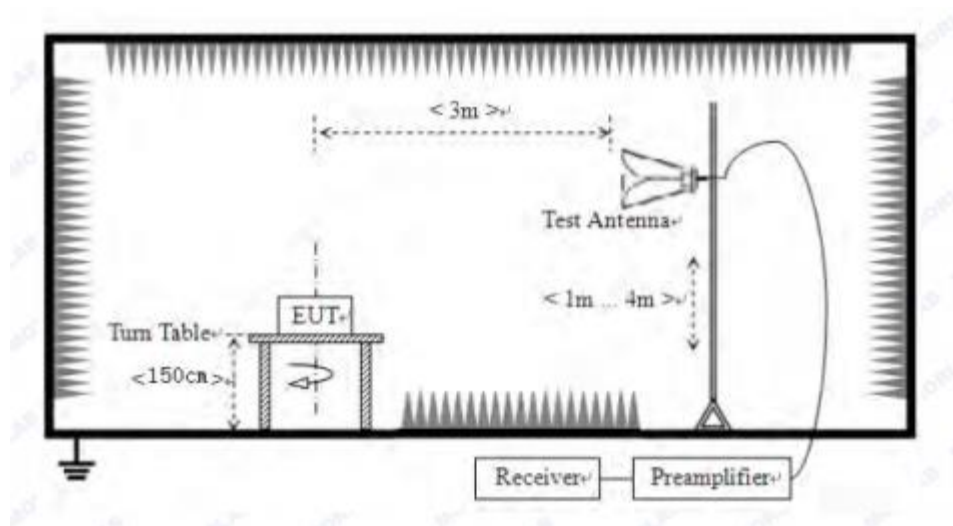

Above1GHzTestSetup

3.4. Test Results

TestCondition

ContinualTransmittinginmaximumpower.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW30KHz
30MHz~1GHz	RBW120KHz	VBW300KHz
Above1GHz	RBW1MHz	VBW3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note:1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.Only show the test data of the worst Channel in this report.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

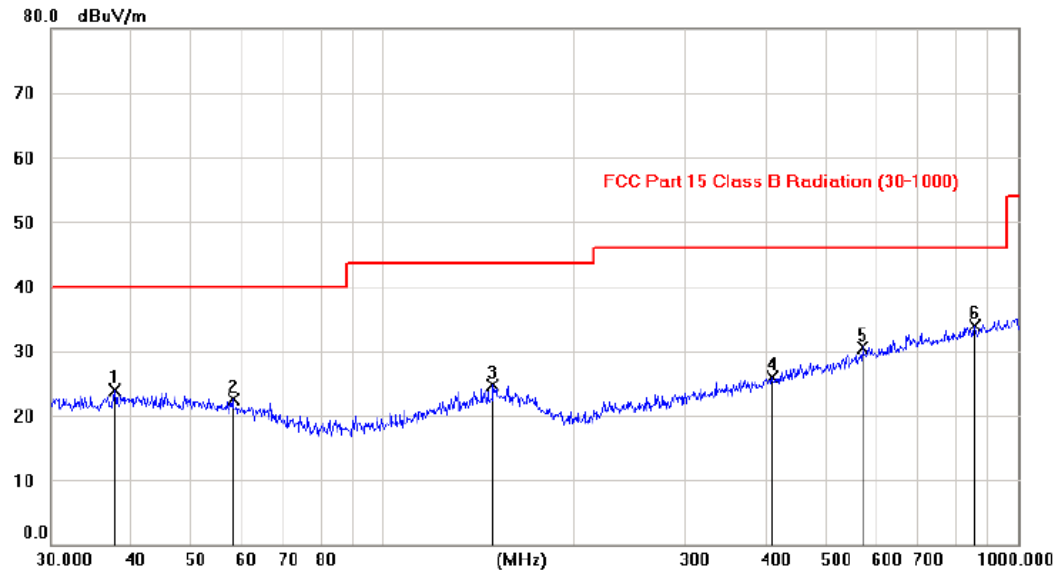

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		37.9184	9.77	14.11	23.88	40.00	-16.12	peak		
2		58.1894	9.10	13.38	22.48	40.00	-17.52	peak		
3		148.9973	9.65	14.98	24.63	43.50	-18.87	peak		
4		411.1986	9.35	16.52	25.87	46.00	-20.13	peak		
5		570.5433	11.04	19.56	30.60	46.00	-15.40	peak		
6	*	856.3238	10.44	23.41	33.85	46.00	-12.15	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

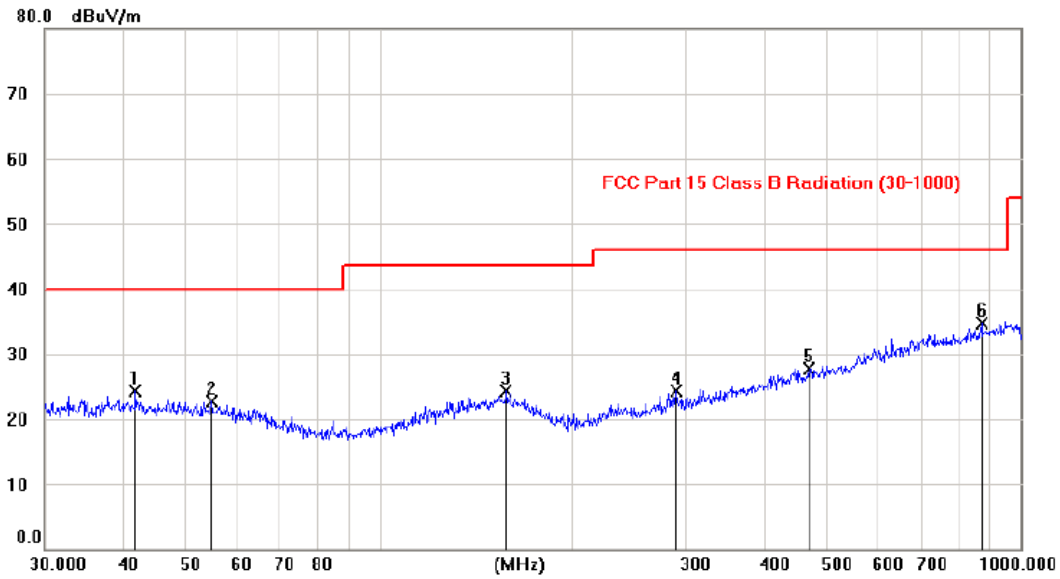Horizontal:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	41.7033	9.88	14.35	24.23	40.00	-15.77	peak		
2	54.7964	9.17	13.60	22.77	40.00	-17.23	peak		
3	157.7063	9.17	15.04	24.21	43.50	-19.29	peak		
4	290.7979	10.37	13.90	24.27	46.00	-21.73	peak		
5	468.6023	9.98	17.74	27.72	46.00	-18.28	peak		
6 *	870.5536	11.07	23.67	34.74	46.00	-11.26	peak		

Note: 1. *: Maximum data; x: Over limit; !: over margin.

2. Measurement = Reading Level + Correct Factor; Correct Factor = Antenna Factor + Cable Loss.

Remark: All modes have been tested, and only worst data of b mode, Channel 2412MHz was listed in this report.

TestMode:IEEE802.11bTXLow									
Freq (MHz)	ReadLevel (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cableloss (dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	43.65	V	33.95	10.18	34.26	53.52	74	-20.48	PK
4824	33.57	V	33.95	10.18	34.26	43.44	54	-10.56	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	46.34	H	33.95	10.18	34.26	56.21	74	-17.79	PK
4824	36.76	H	33.95	10.18	34.26	46.63	54	-7.37	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
TestMode:IEEE802.11bTXMid									
4874	45.40	V	33.93	10.2	34.29	55.24	74	-18.76	PK
4874	32.73	V	33.93	10.2	34.29	42.57	54	-11.43	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	46.76	H	33.93	10.2	34.29	56.60	74	-17.40	PK
4874	34.91	H	33.93	10.2	34.29	44.75	54	-9.25	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
TestMode:IEEE802.11bTXHigh									
4924	45.56	V	33.98	10.22	34.25	55.51	74	-18.49	PK
4924	34.42	V	33.98	10.22	34.25	44.37	54	-9.63	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	45.95	H	33.98	10.22	34.25	55.90	74	-18.10	PK
4924	33.57	H	33.98	10.22	34.25	43.52	54	-10.48	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/

Note:


1,Result=Readlevel+Antennafactor+cableloss-Ampfactor

2,AlltheotheremissionsnotreportedweretoolowtoreadanddeemedtocomplywithFCClimit.


TestMode:IEEE802.11gTXLow									
Freq (MHz)	ReadLevel (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cableloss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	44.70	V	33.95	10.18	34.26	54.57	74	-19.43	PK
4824	36.35	V	33.95	10.18	34.26	46.22	54	-7.78	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
4824	45.60	H	33.95	10.18	34.26	55.47	74	-18.53	PK
4824	36.56	H	33.95	10.18	34.26	46.43	54	-7.57	AV
7236	/	/	/	/	/	/	/	/	/
9648	/	/	/	/	/	/	/	/	/
TestMode:IEEE802.11gTXMid									
4874	43.34	V	33.93	10.2	34.29	53.18	74	-20.82	PK
4874	31.57	V	33.93	10.2	34.29	41.41	54	-12.59	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
4874	46.55	H	33.93	10.2	34.29	56.39	74	-17.61	PK
4874	33.16	H	33.93	10.2	34.29	43.00	54	-11.00	AV
7311	/	/	/	/	/	/	/	/	/
9748	/	/	/	/	/	/	/	/	/
TestMode:IEEE802.11gTXHigh									
4924	47.26	V	33.98	10.22	34.25	57.21	74	-16.79	PK
4924	35.37	V	33.98	10.22	34.25	45.32	54	-8.68	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
4924	48.78	H	33.98	10.22	34.25	58.73	74	-15.27	PK
4924	33.44	H	33.98	10.22	34.25	43.39	54	-10.61	AV
7386	/	/	/	/	/	/	/	/	/
9848	/	/	/	/	/	/	/	/	/
Note: 1,Result=Readlevel+Antennafactor+cableloss-Ampfactor 2,AlltheotheremissionsnotreportedweretoolowtoreadanddeemedtocomplywithFCClimit.									

Conducted RF Spurious Emission


Tx. Spurious NVNT b 2412MHz Ant1 Ref

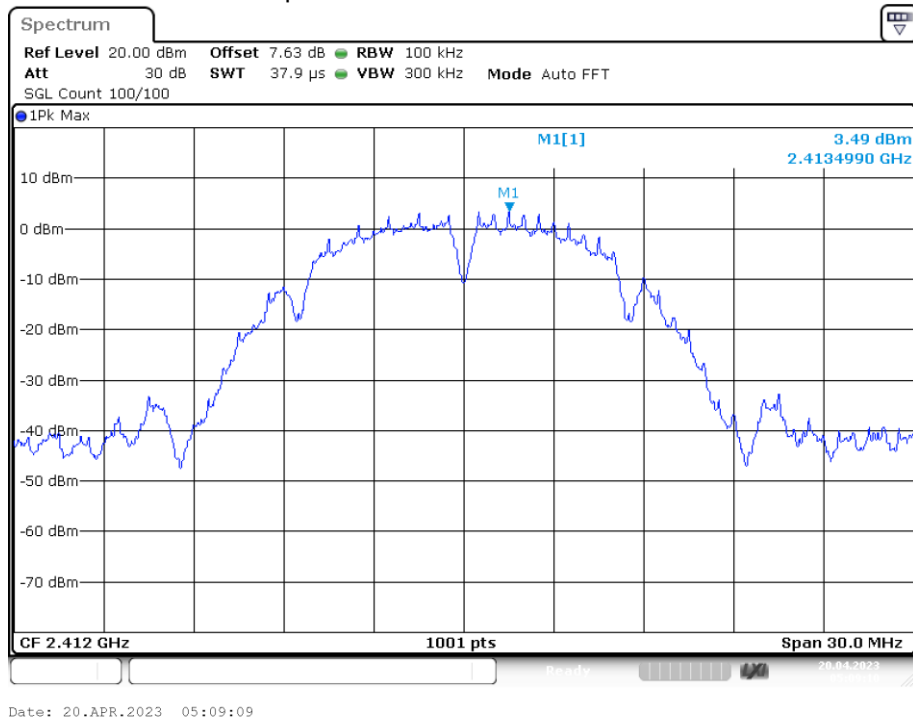

Tx. Spurious NVNT b 2412MHz Ant1 Emission

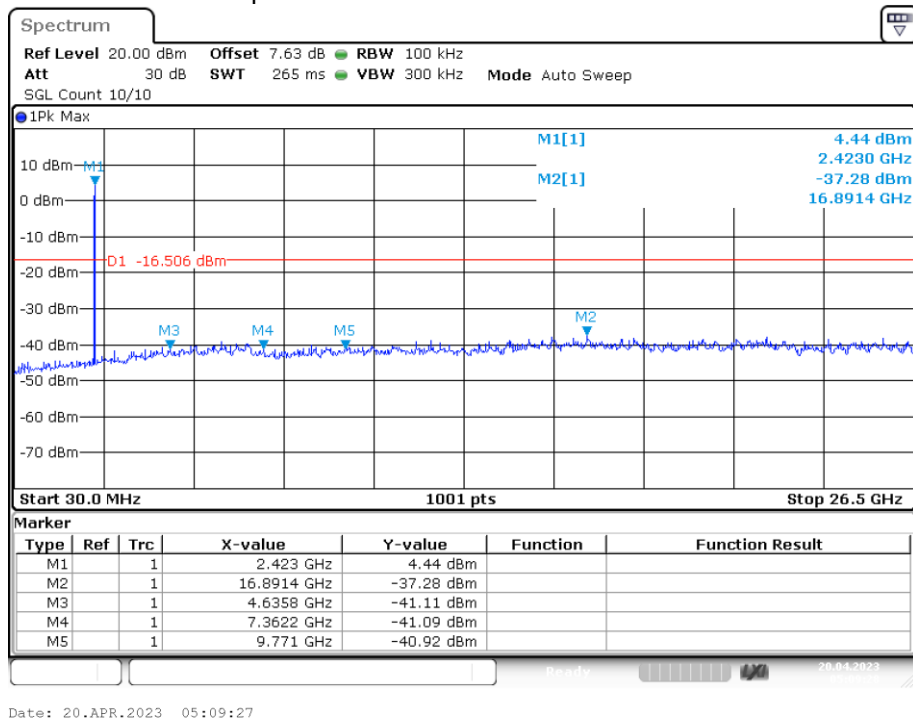


Tx. Spurious NVNT b 2437MHz Ant1 Ref

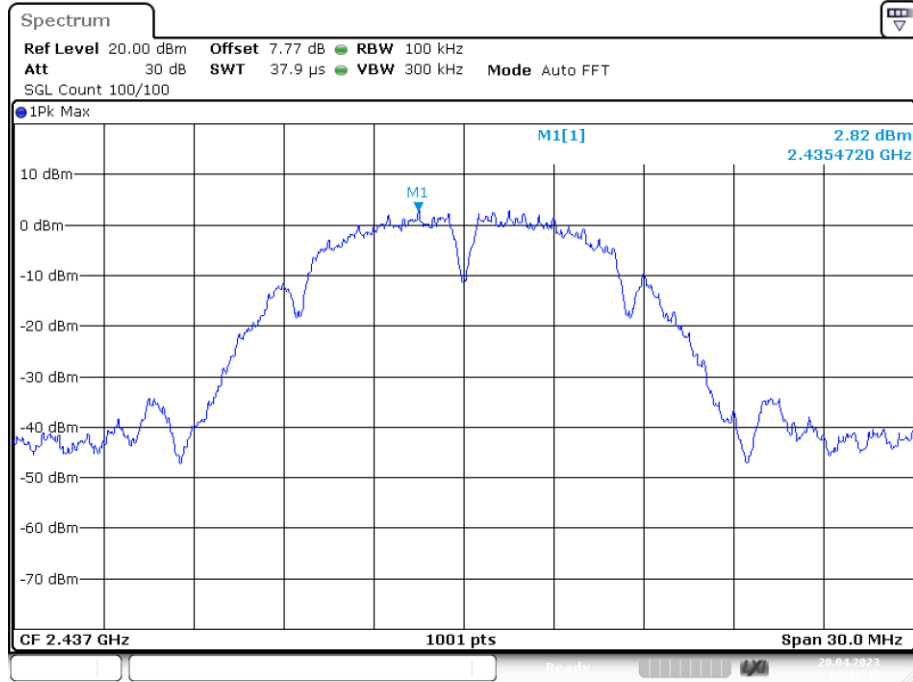


Date: 20.APR.2023 05:10:49

Tx. Spurious NVNT b 2437MHz Ant1 Emission

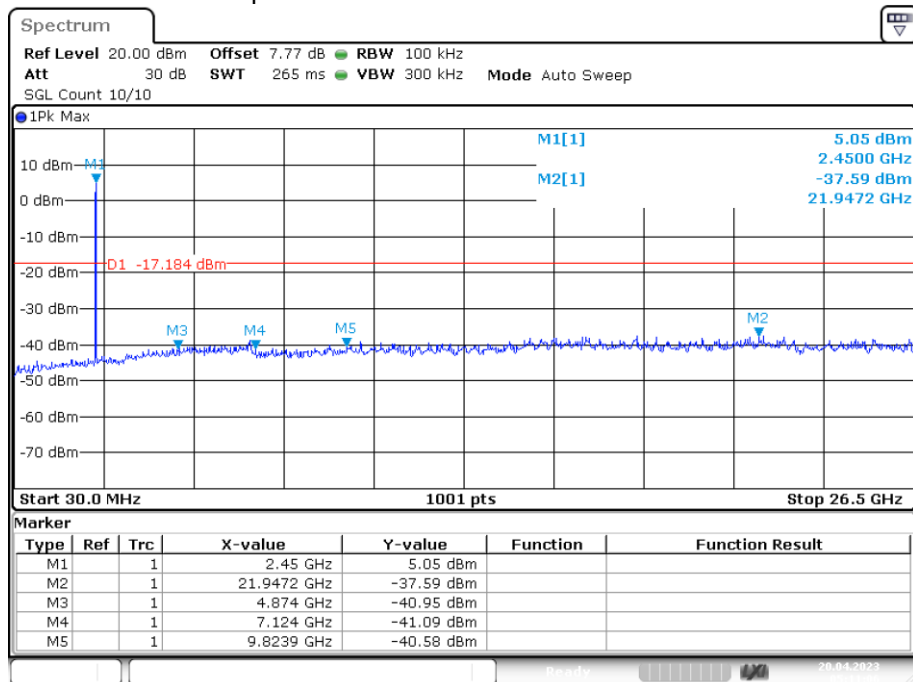


Date: 20.APR.2023 05:11:07

Tx. Spurious NVNT b 2462MHz Ant1 Ref

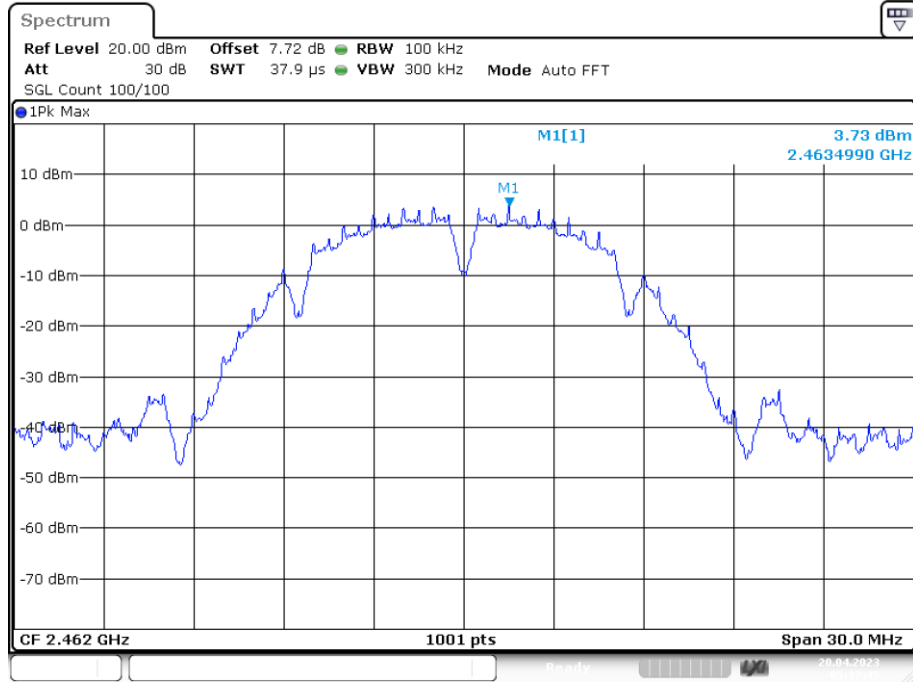


Date: 20.APR.2023 05:12:45

Tx. Spurious NVNT b 2462MHz Ant1 Emission

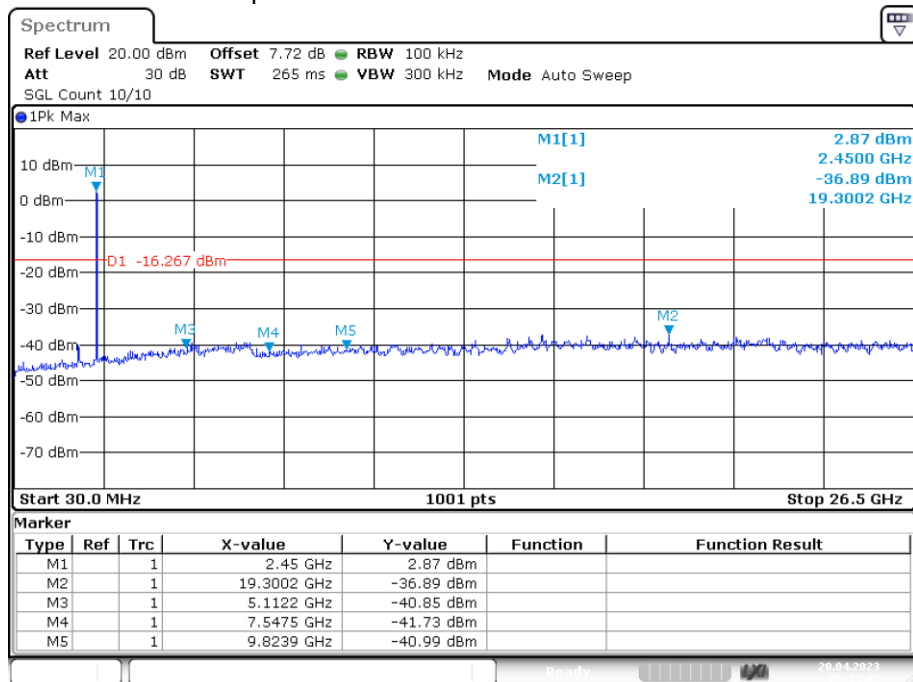


Date: 20.APR.2023 05:13:03

Tx. Spurious NVNT g 2412MHz Ant1 Ref

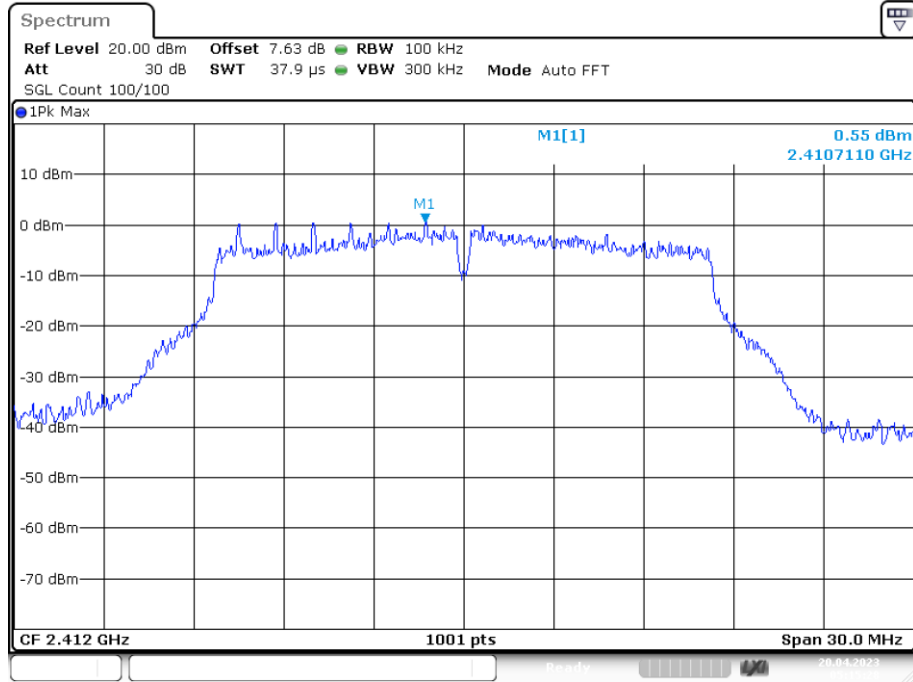


Date: 20.APR.2023 05:15:28

Tx. Spurious NVNT g 2412MHz Ant1 Emission

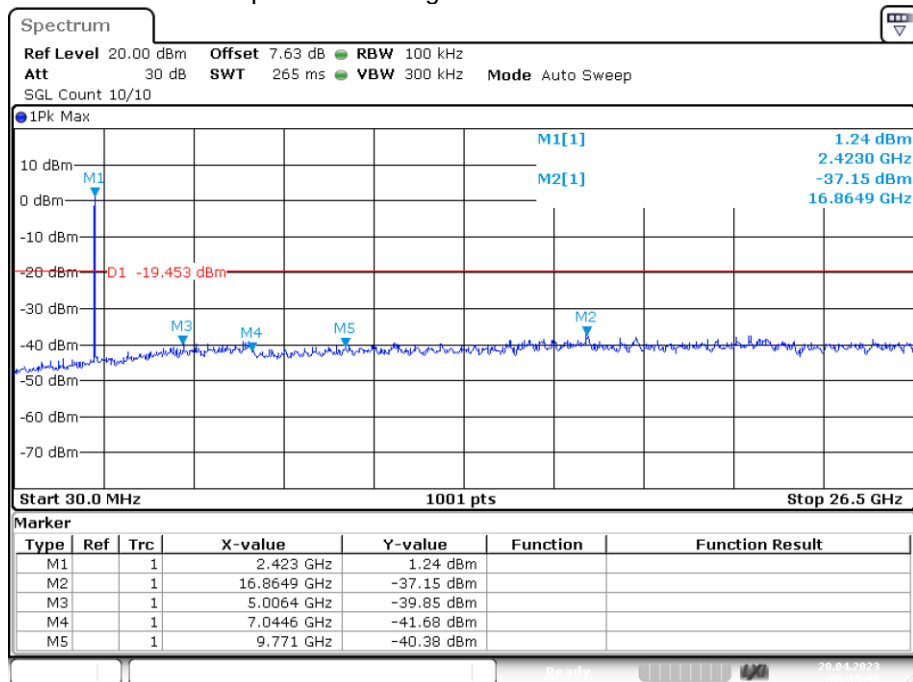


Date: 20.APR.2023 05:15:46

Tx. Spurious NVNT g 2437MHz Ant1 Ref

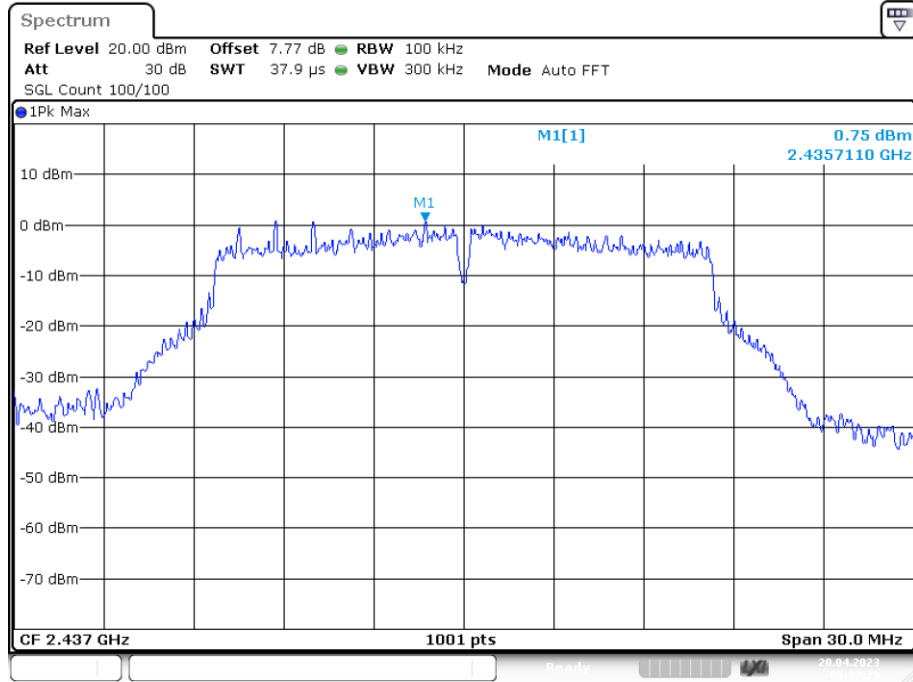


Date: 20.APR.2023 05:17:29

Tx. Spurious NVNT g 2437MHz Ant1 Emission

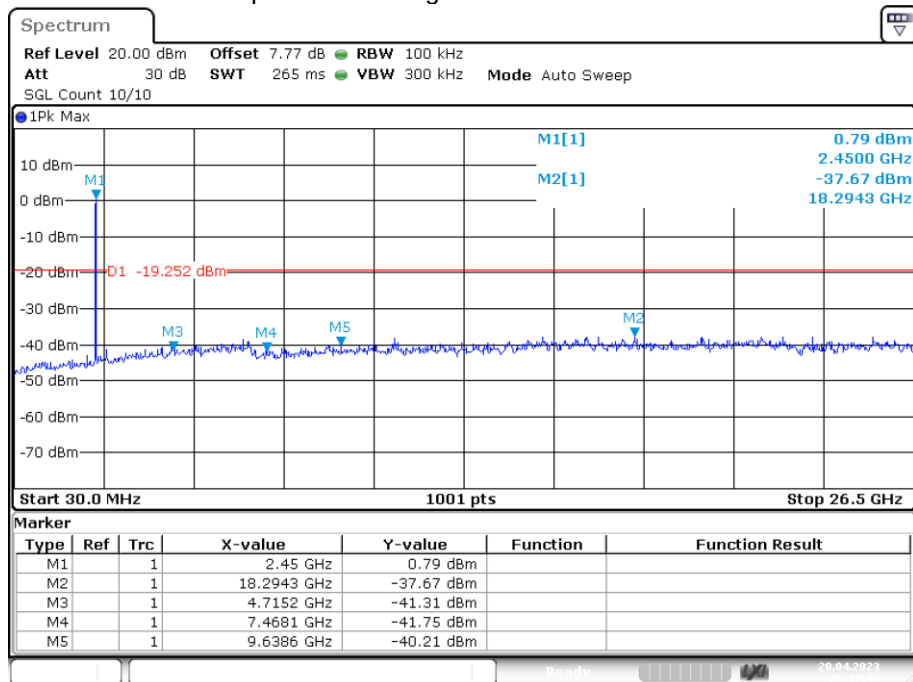


Date: 20.APR.2023 05:17:46

Tx. Spurious NVNT g 2462MHz Ant1 Ref

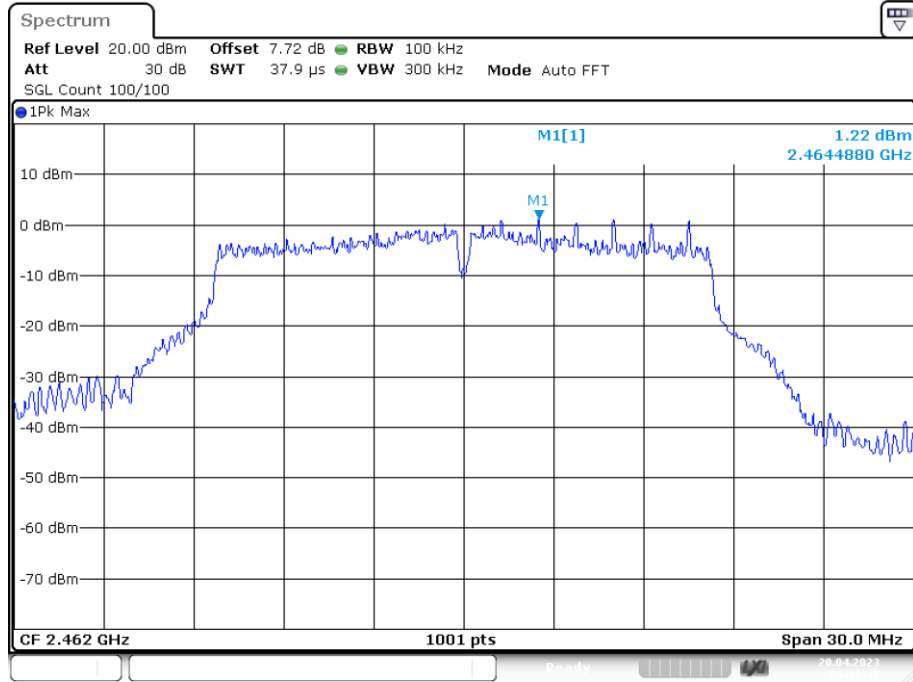


Date: 20.APR.2023 05:19:45

Tx. Spurious NVNT g 2462MHz Ant1 Emission

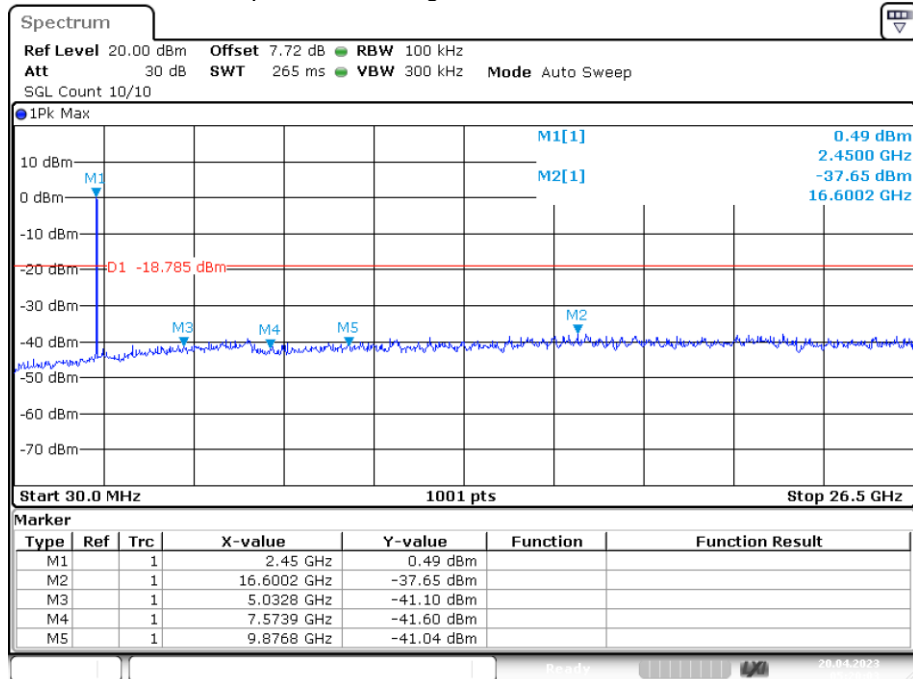


Date: 20.APR.2023 05:20:03

Tx. Spurious NVNT n20 2412MHz Ant1 Ref

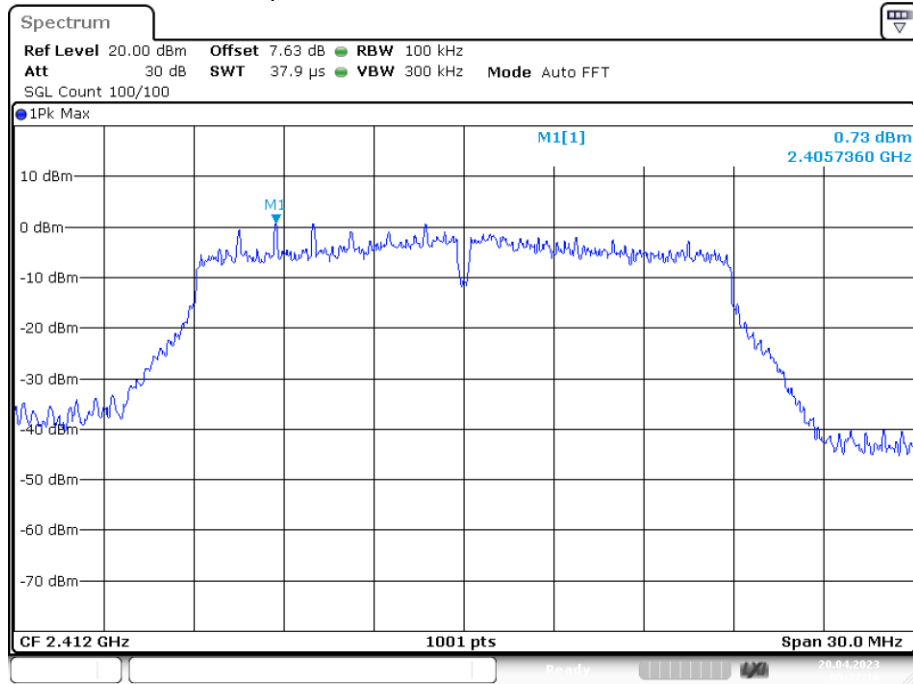


Date: 20.APR.2023 05:22:16

Tx. Spurious NVNT n20 2412MHz Ant1 Emission

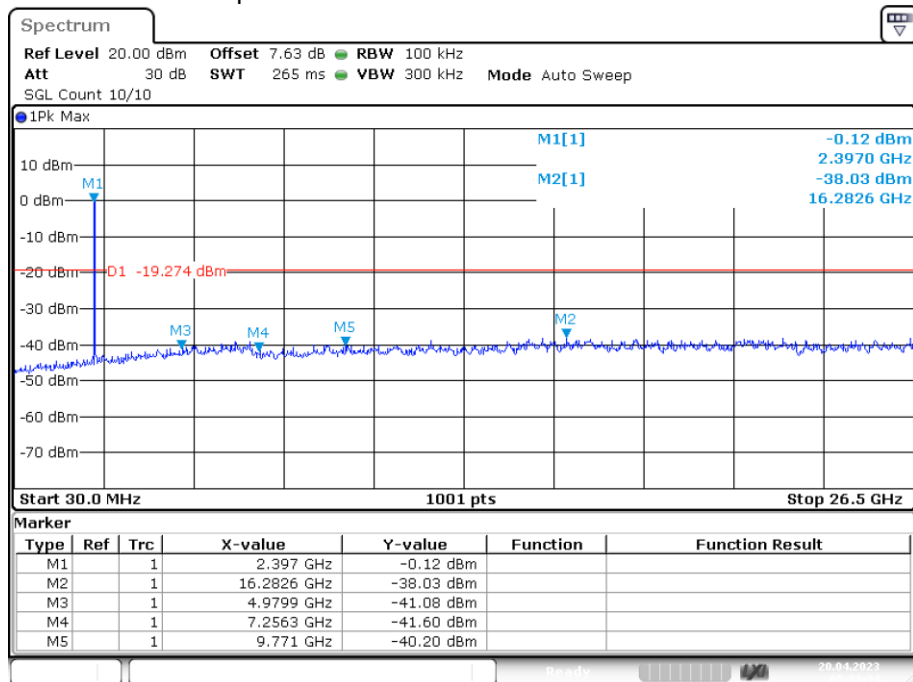


Date: 20.APR.2023 05:22:33

Tx. Spurious NVNT n20 2437MHz Ant1 Ref

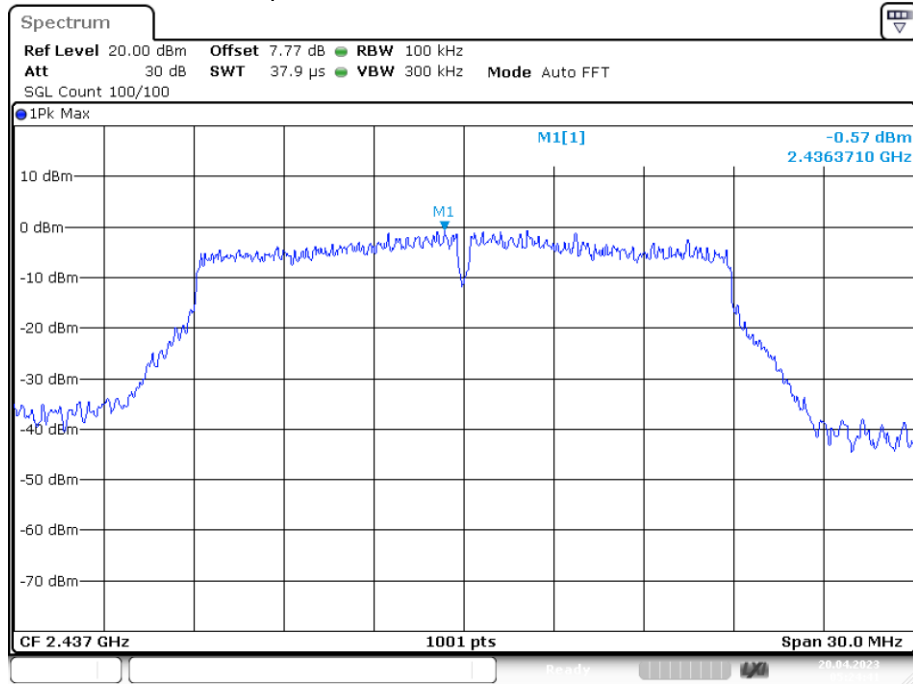


Date: 20.APR.2023 05:24:41

Tx. Spurious NVNT n20 2437MHz Ant1 Emission

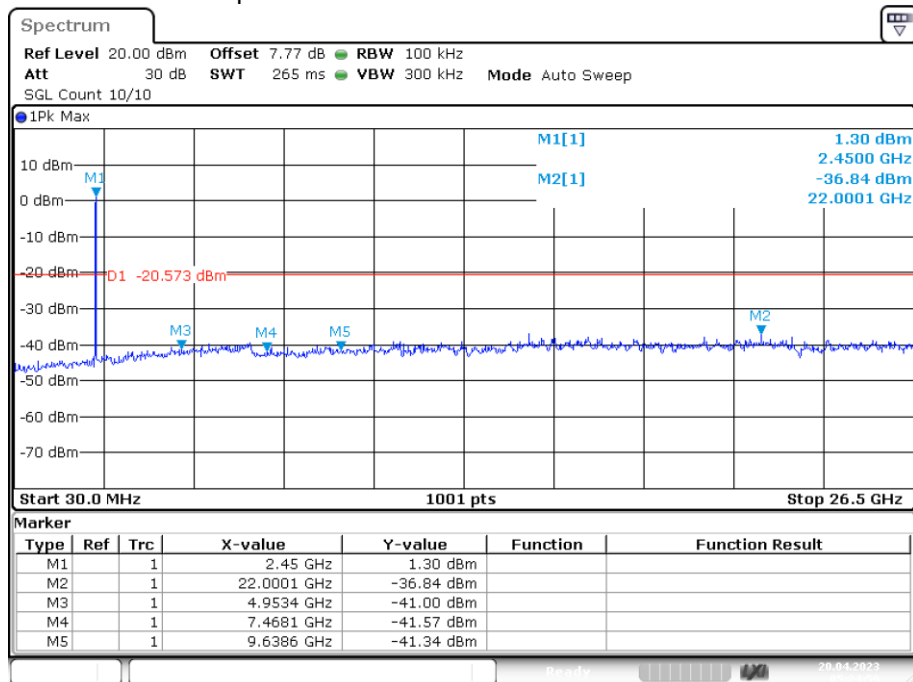


Date: 20.APR.2023 05:24:59

Tx. Spurious NVNT n20 2462MHz Ant1 Ref

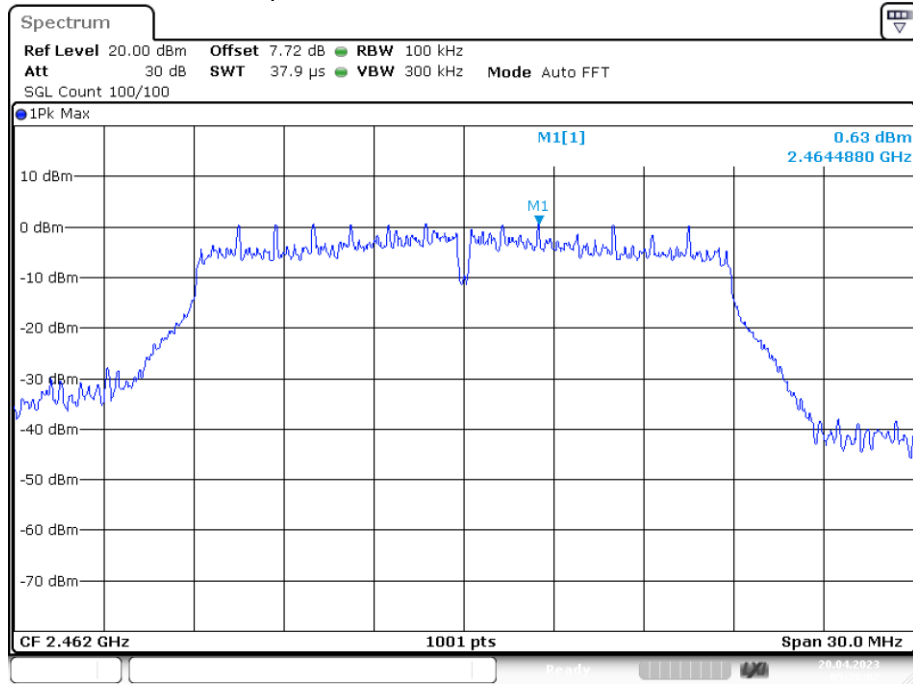

Date: 20.APR.2023 05:28:01

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

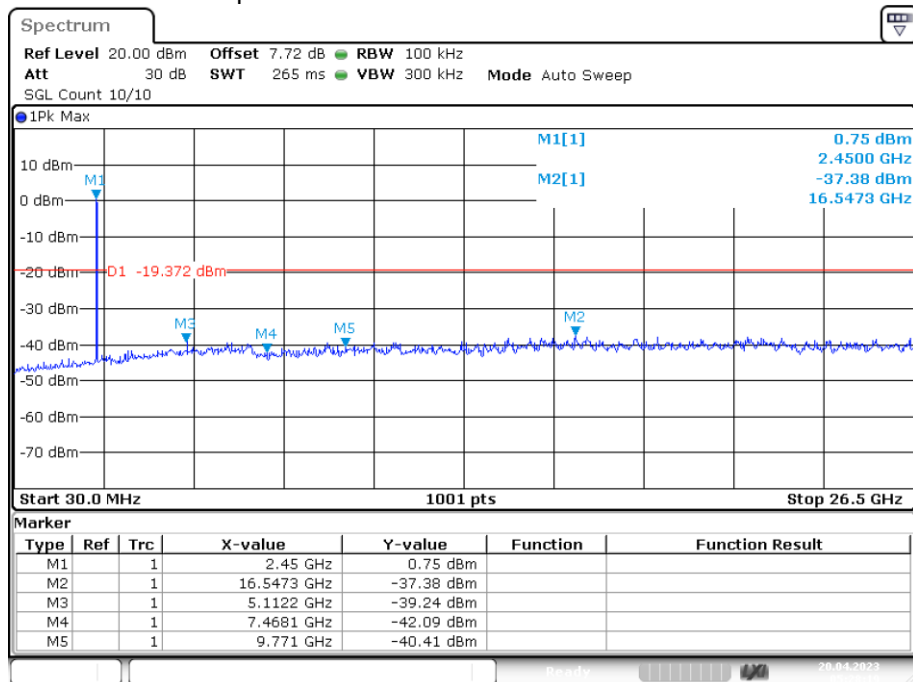

Date: 20.APR.2023 05:28:19

4. POWERLINE CONDUCTED EMISSION

4.1. Test Limits

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15-0.50	66-56*	56-46*
0.50-5.00	56	46
5.00-30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.


3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.

The bandwidth of test receiver is set at 9 kHz.

4.3. Test Setup

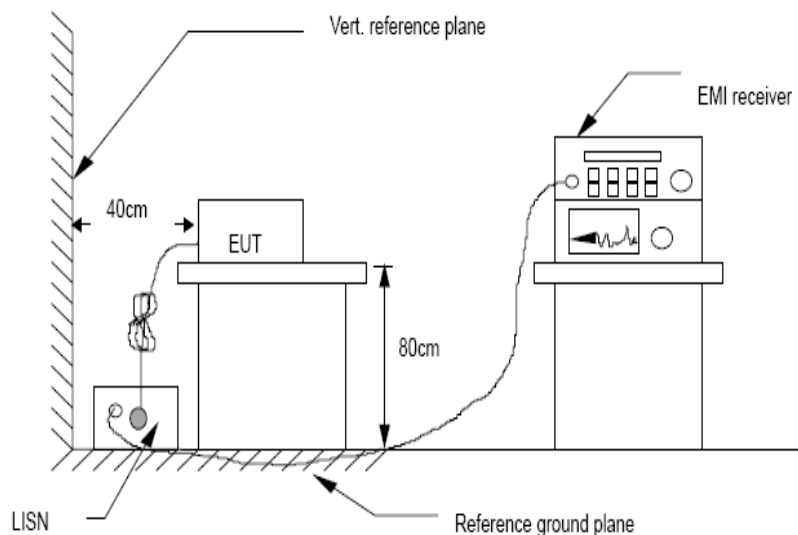

4.4. Test Results

Battery powered not applicable

5. CONDUCTED MAXIMUM OUTPUT POWER

5.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands AVG output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

5.3. Test Setup



5.4. Test Results

PASS

Detailed information please sees the following page.

Mode	Frequency (MHz)	PK Output power(dBm)	Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	16.933	30	PASS
	CH6: 2437	17.089	30	PASS
	CH11: 2462	17.081	30	PASS
IEEE 802.11 g	CH1: 2412	21.456	30	PASS
	CH6: 2437	21.584	30	PASS
	CH11: 2462	21.476	30	PASS
IEEE 802.11 n/HT20	CH1: 2412	20.907	30	PASS
	CH6: 2437	21.167	30	PASS
	CH11: 2462	21.332	30	PASS

6. PEAKPOWERSPECTRALDENSITY

6.1. Test limits

6.1.1 Please refer RSS-247 & FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as $RBW = 100\text{kHz}$ (Set the RBW to: $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$), $VBW = 300\text{kHz}$ (Set the $VBW \geq 3 \times RBW$), $\text{span} \geq 1.5 \times \text{DTS bandwidth}$., detail see the test plot.

6.2.4 Record the max reading.


6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

6.3. Test Setup




6.4. Test Results

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-8.606	8	Pass
NVNT	b	2437	Ant1	-9.06	8	Pass
NVNT	b	2462	Ant1	-8.426	8	Pass
NVNT	g	2412	Ant1	-9.713	8	Pass
NVNT	g	2437	Ant1	-9.161	8	Pass
NVNT	g	2462	Ant1	-9.056	8	Pass
NVNT	n20	2412	Ant1	-10.661	8	Pass
NVNT	n20	2437	Ant1	-10.163	8	Pass
NVNT	n20	2462	Ant1	-11.161	8	Pass

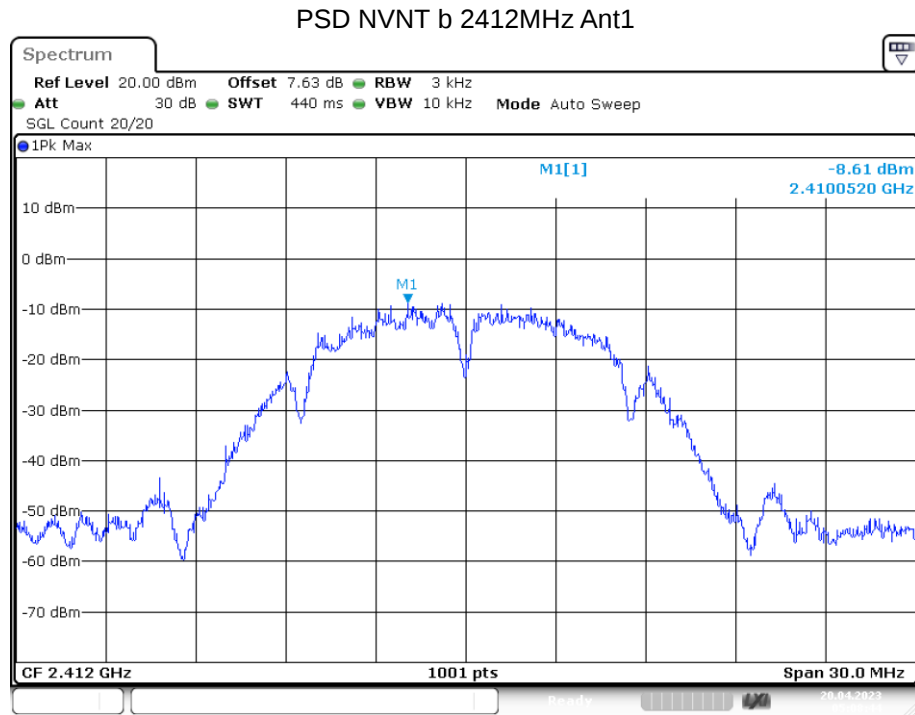


Date: 20.APR.2023 05:08:44

PSD NVNT b 2437MHz Ant1

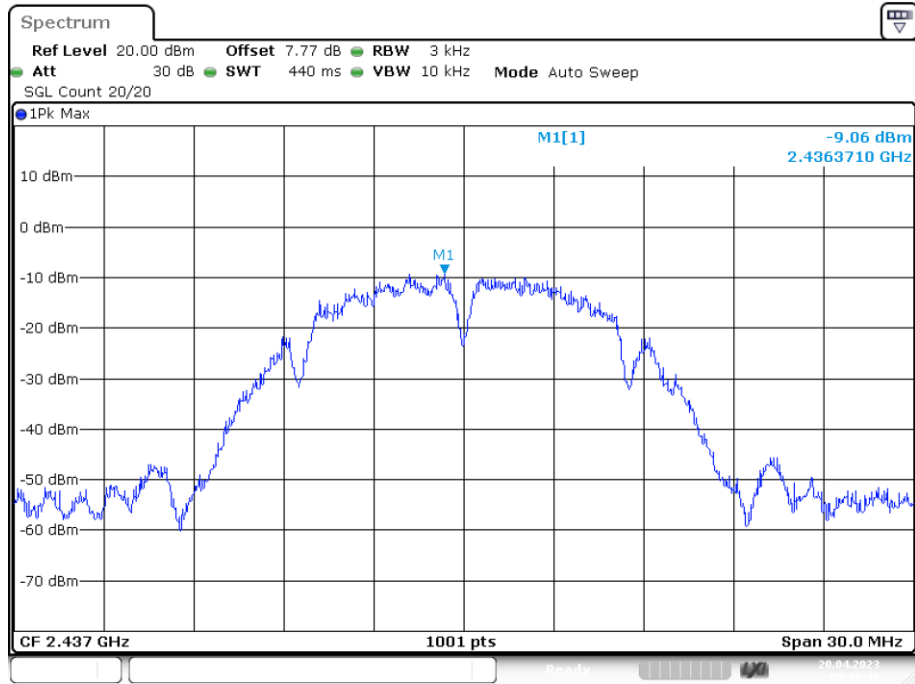


Date: 20.APR.2023 05:10:42

PSD NVNT b 2462MHz Ant1

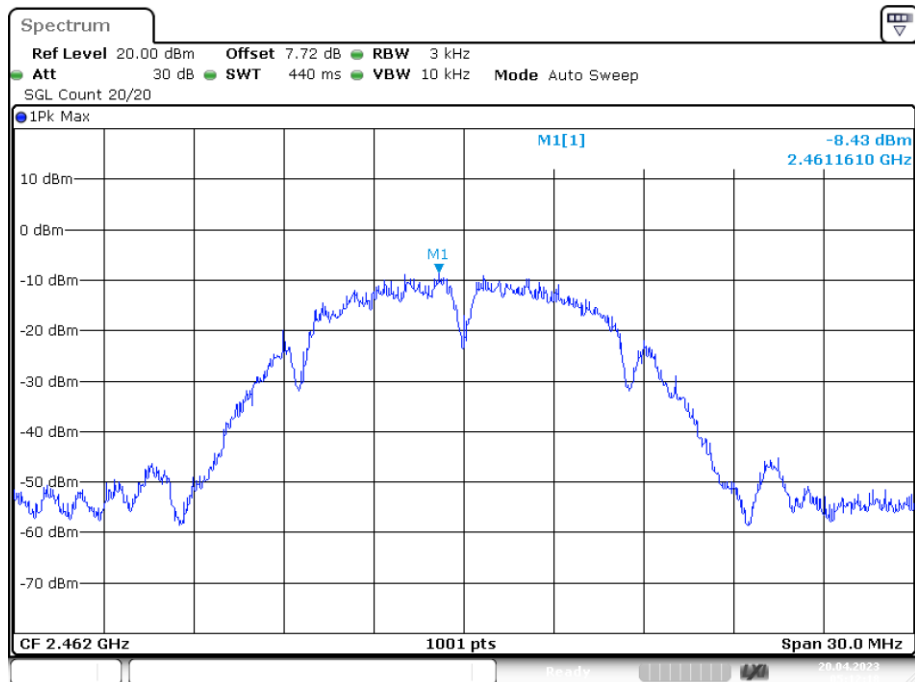


Date: 20.APR.2023 05:12:17

PSD NVNT g 2412MHz Ant1

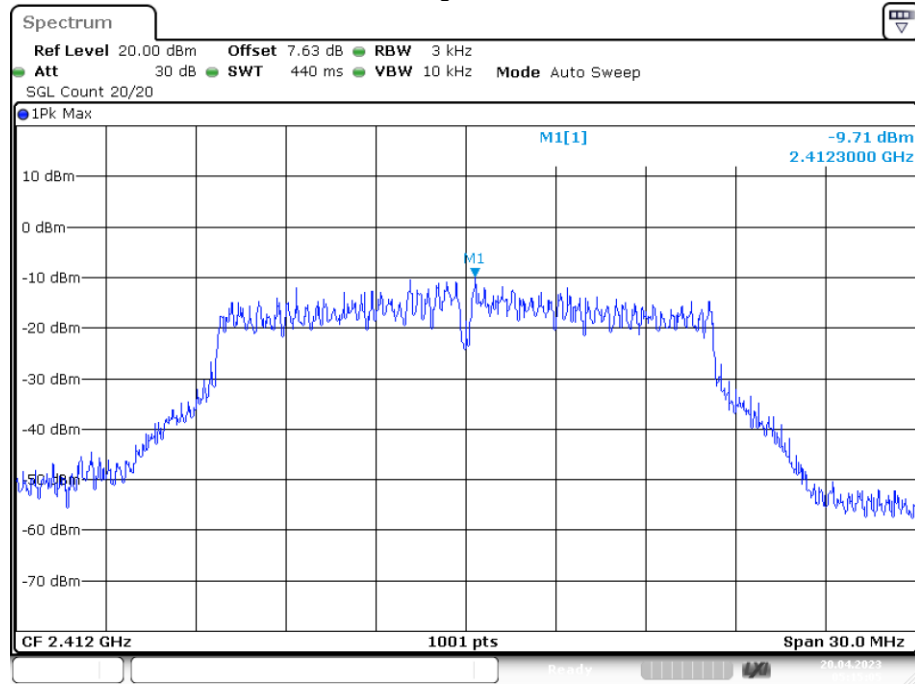


Date: 20.APR.2023 05:15:04

PSD NVNT g 2437MHz Ant1

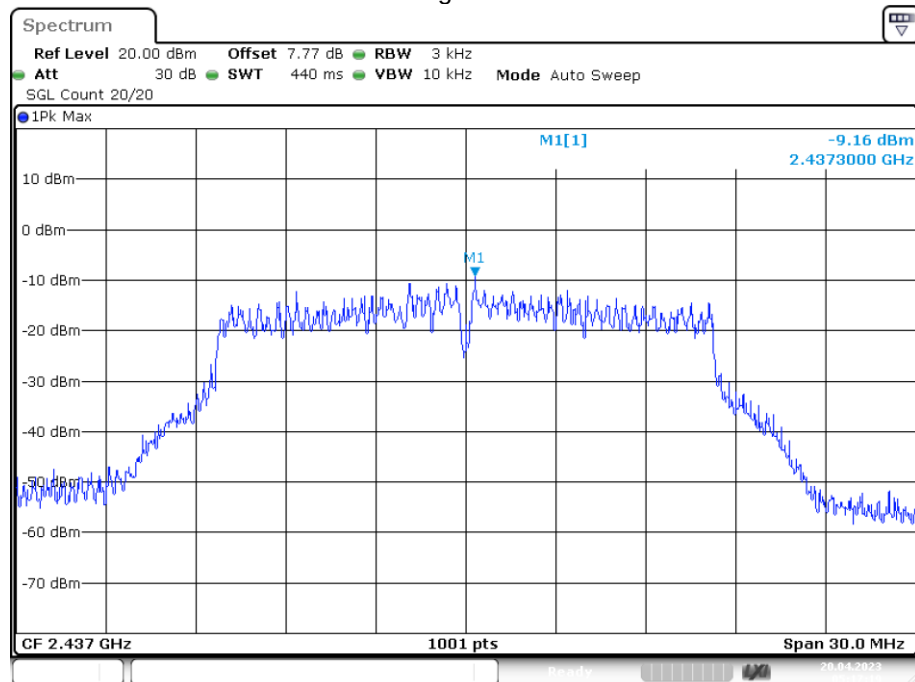


Date: 20.APR.2023 05:17:19

PSD NVNT g 2462MHz Ant1

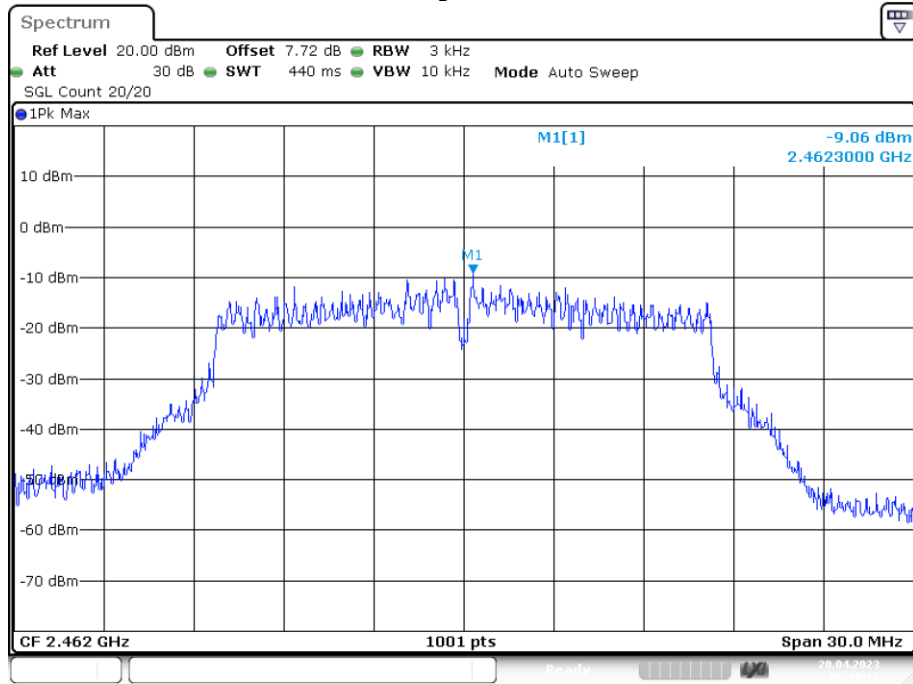


Date: 20.APR.2023 05:19:17

PSD NVNT n20 2412MHz Ant1

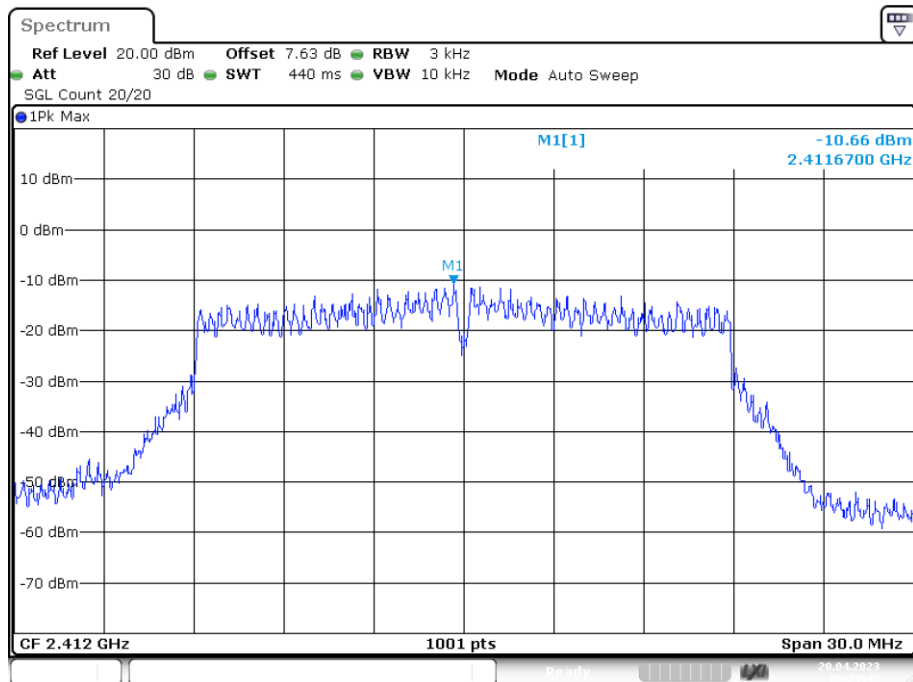


Date: 20.APR.2023 05:21:45

PSD NVNT n20 2437MHz Ant1

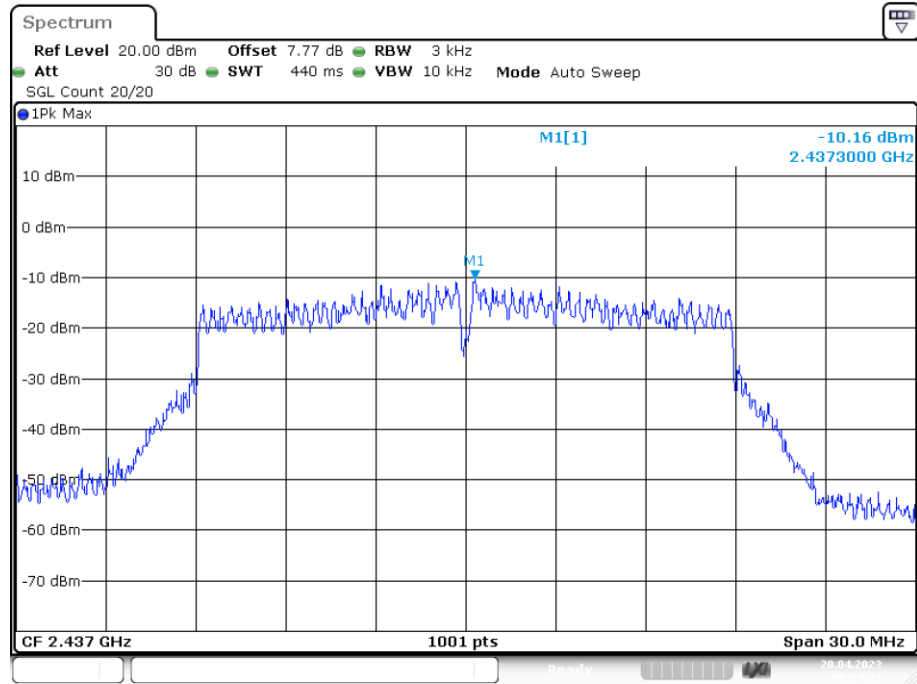

Date: 20.APR.2023 05:24:28

PSD NVNT n20 2462MHz Ant1

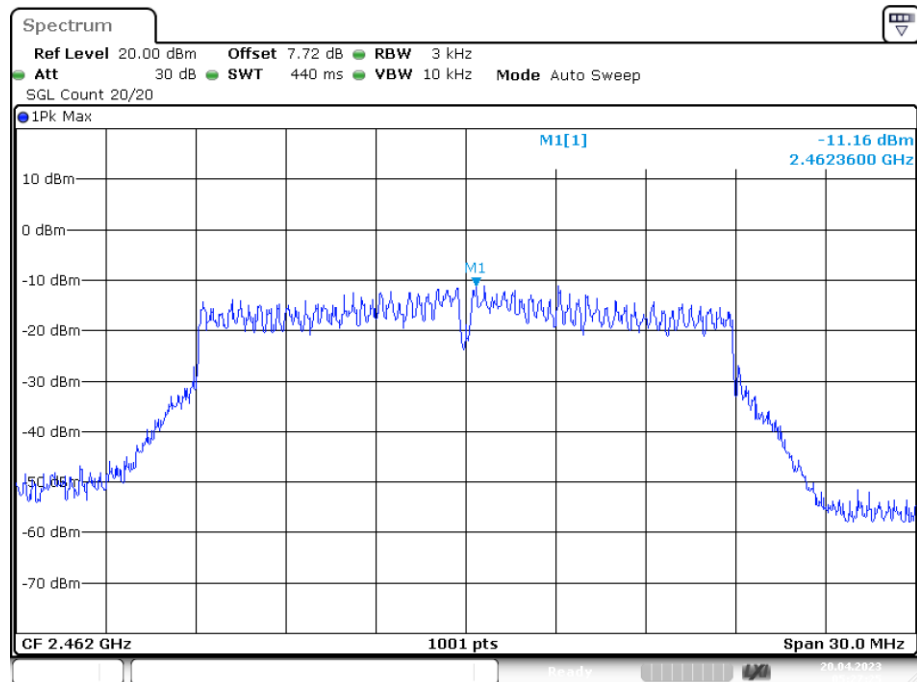

Date: 20.APR.2023 05:27:25

7. BANDWIDTH

7.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz,, Peak Detector, Sweep time set auto, detail see the test plot.

7.3. Test Setup




7.4. Test Results

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	9.03	0.5	Pass
NVNT	b	2437	Ant1	9.06	0.5	Pass
NVNT	b	2462	Ant1	8.55	0.5	Pass
NVNT	g	2412	Ant1	16.29	0.5	Pass
NVNT	g	2437	Ant1	16.29	0.5	Pass
NVNT	g	2462	Ant1	16.35	0.5	Pass
NVNT	n20	2412	Ant1	17.55	0.5	Pass
NVNT	n20	2437	Ant1	17.52	0.5	Pass
NVNT	n20	2462	Ant1	17.61	0.5	Pass

-6dB Bandwidth NVNT b 2412MHz Ant1

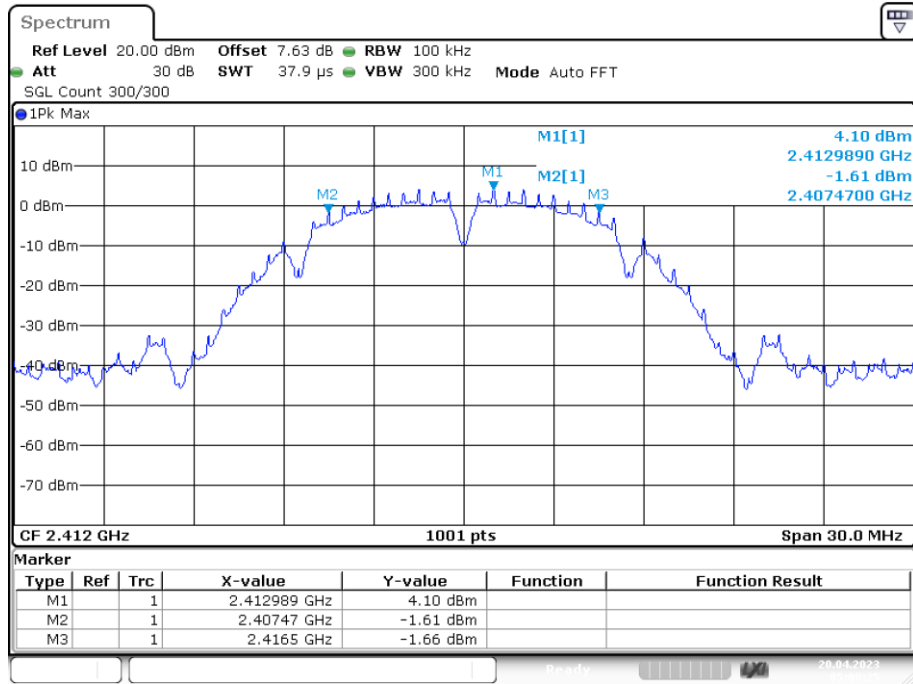


Date: 20.APR.2023 05:08:25

-6dB Bandwidth NVNT b 2437MHz Ant1

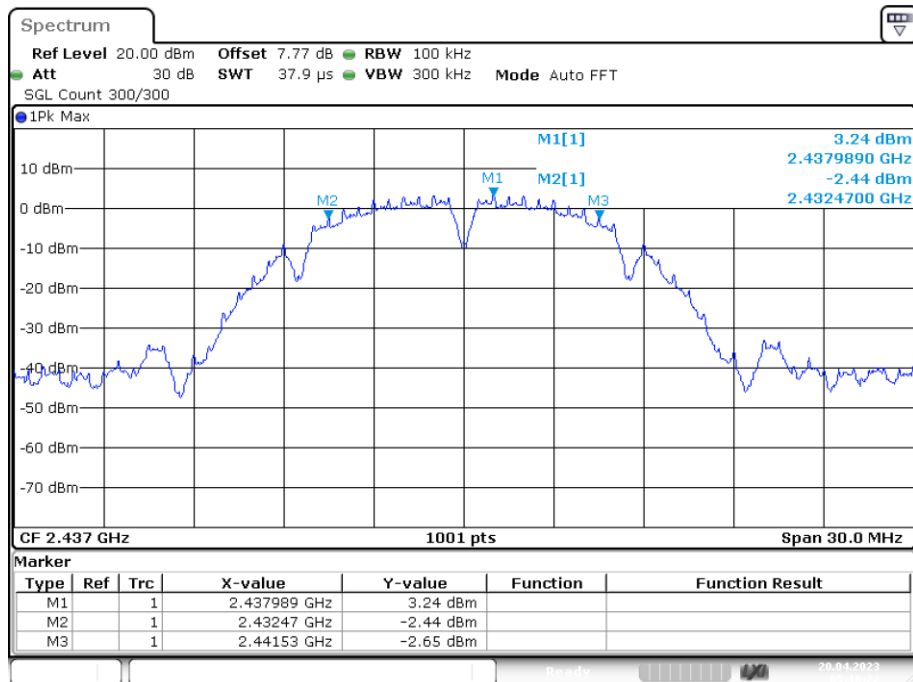


Date: 20.APR.2023 05:10:22

-6dB Bandwidth NVNT b 2462MHz Ant1

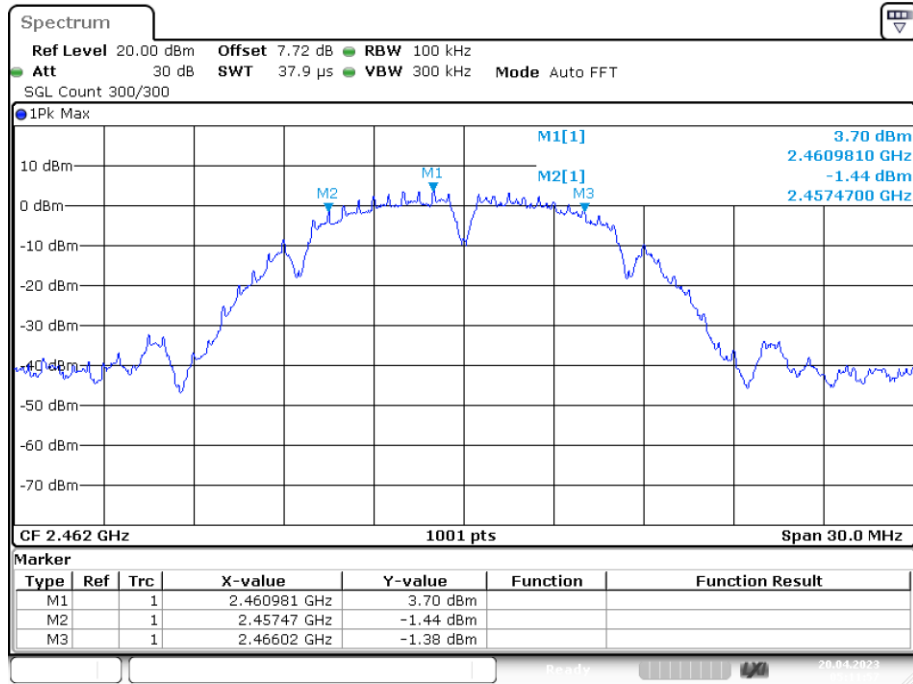


Date: 20.APR.2023 05:11:57

-6dB Bandwidth NVNT g 2412MHz Ant1

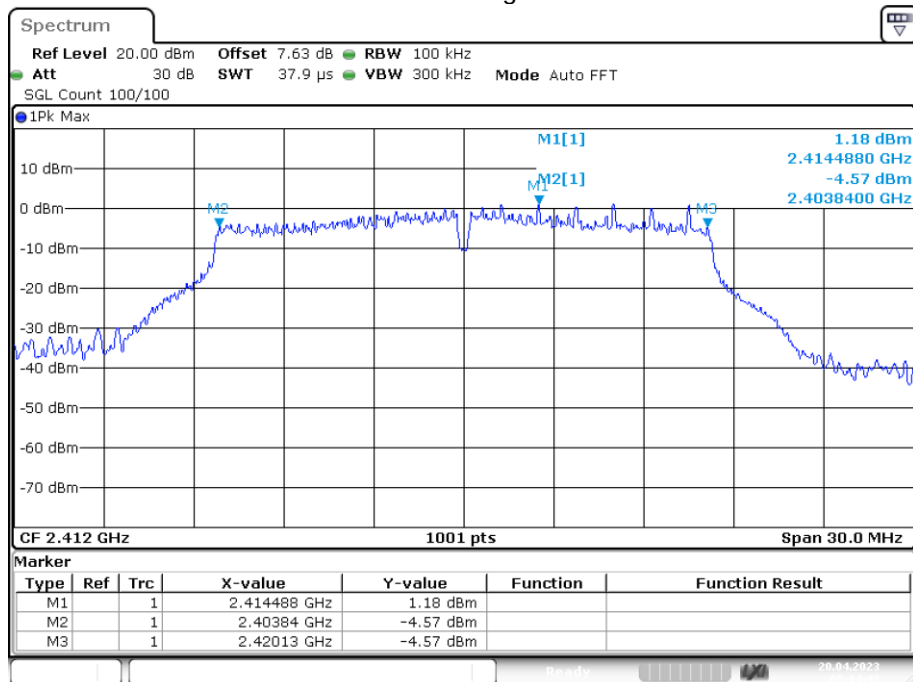


Date: 20.APR.2023 05:14:41

-6dB Bandwidth NVNT g 2437MHz Ant1

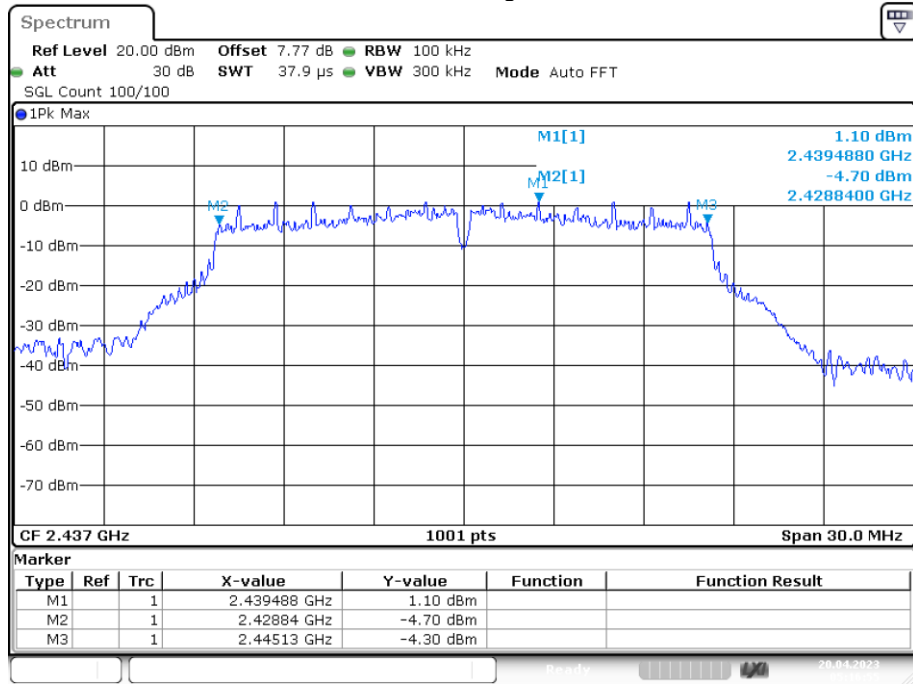


Date: 20.APR.2023 05:16:54

-6dB Bandwidth NVNT g 2462MHz Ant1

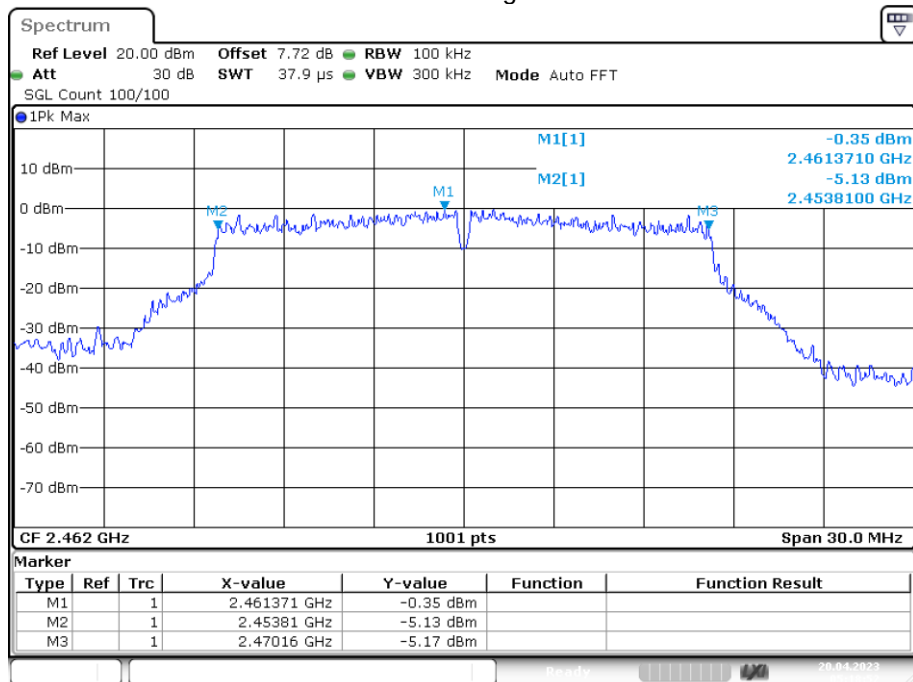


Date: 20.APR.2023 05:18:52

-6dB Bandwidth NVNT n20 2412MHz Ant1

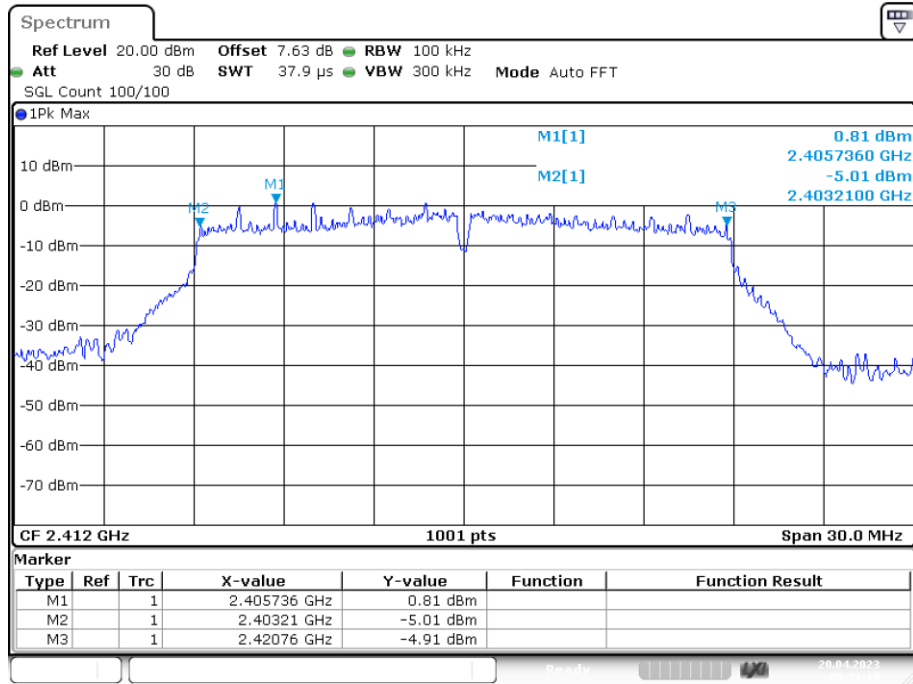


Date: 20.APR.2023 05:21:19

-6dB Bandwidth NVNT n20 2437MHz Ant1

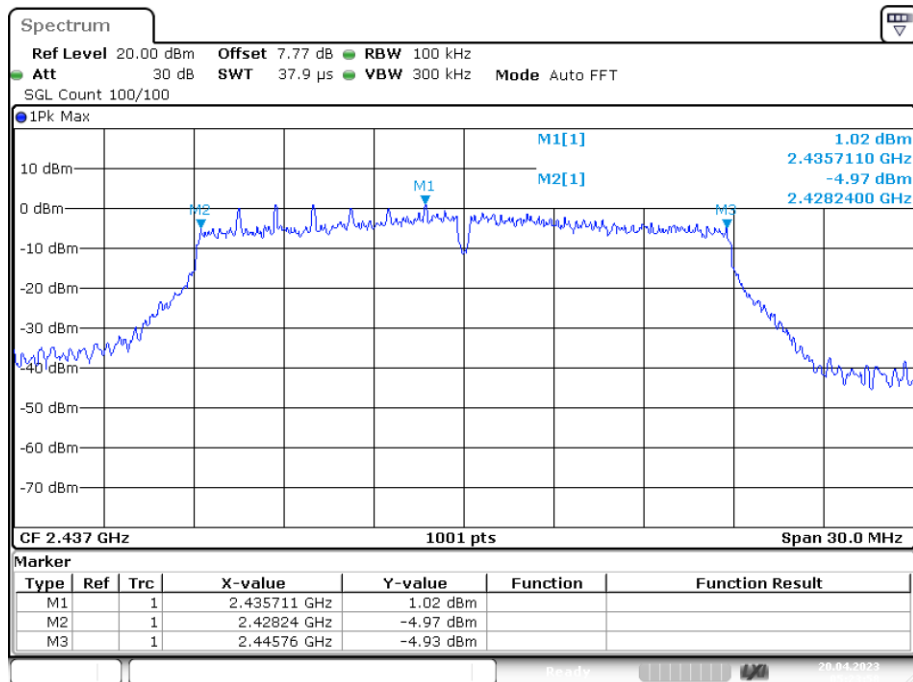

Date: 20.APR.2023 05:23:58


-6dB Bandwidth NVNT n20 2462MHz Ant1

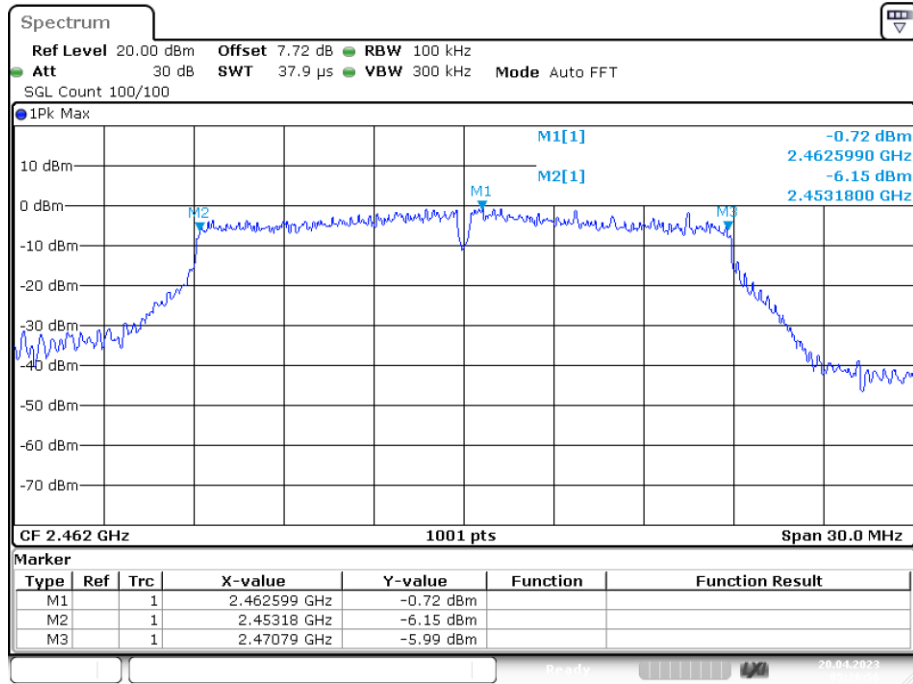

Date: 20.APR.2023 05:26:55


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.018
NVNT	b	2437	Ant1	11.988
NVNT	b	2462	Ant1	12.018
NVNT	g	2412	Ant1	16.603
NVNT	g	2437	Ant1	16.543
NVNT	g	2462	Ant1	16.454
NVNT	n20	2412	Ant1	17.742
NVNT	n20	2437	Ant1	17.742
NVNT	n20	2462	Ant1	17.742

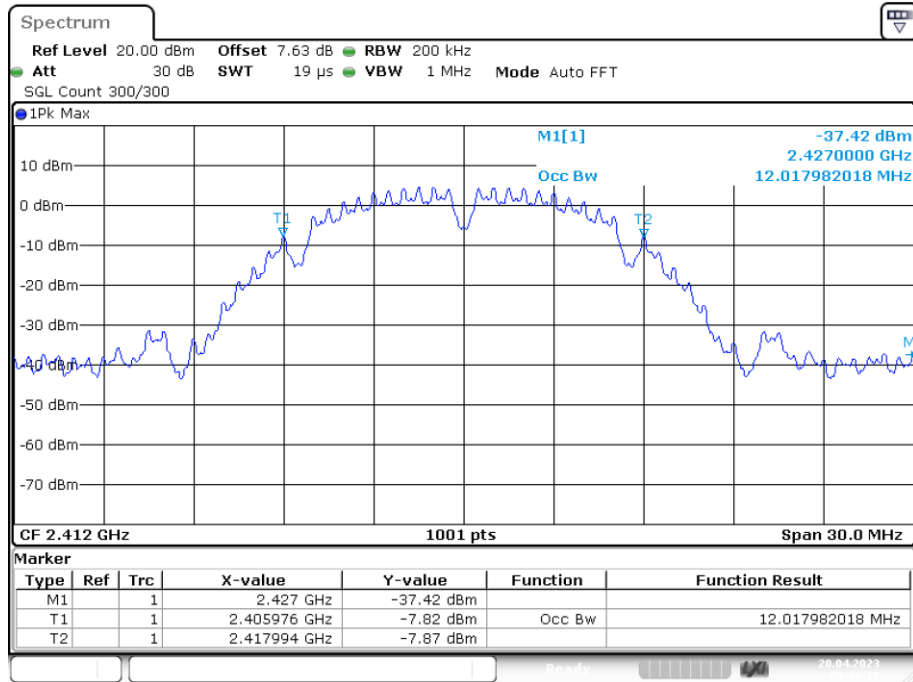OBW NVNT b 2412MHz Ant1


Date: 20.APR.2023 05:08:15

OBW NVNT b 2437MHz Ant1

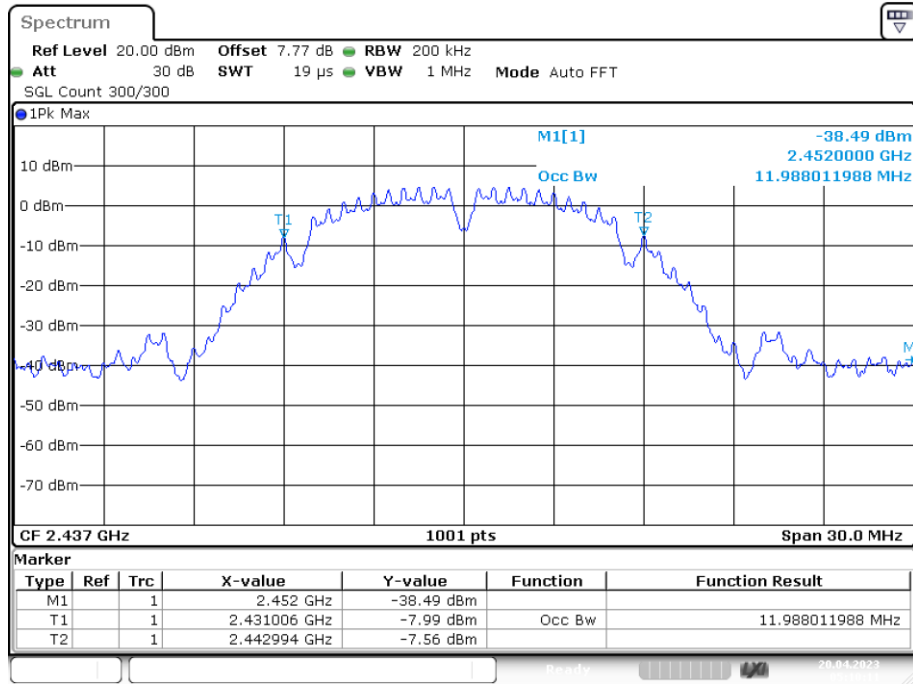


Date: 20.APR.2023 05:10:10

OBW NVNT b 2462MHz Ant1

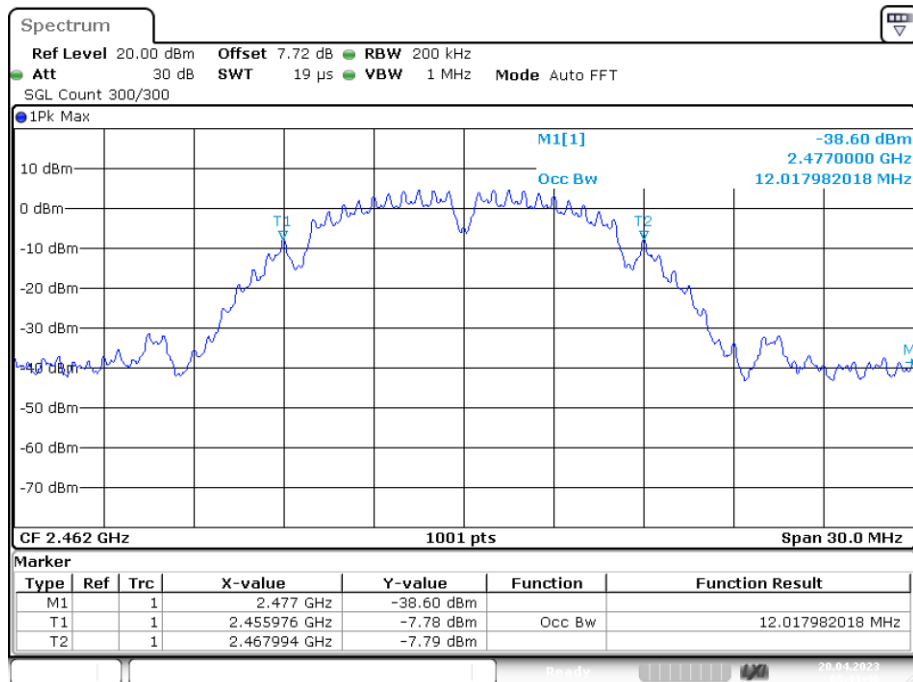


Date: 20.APR.2023 05:11:45

OBW NVNT g 2412MHz Ant1

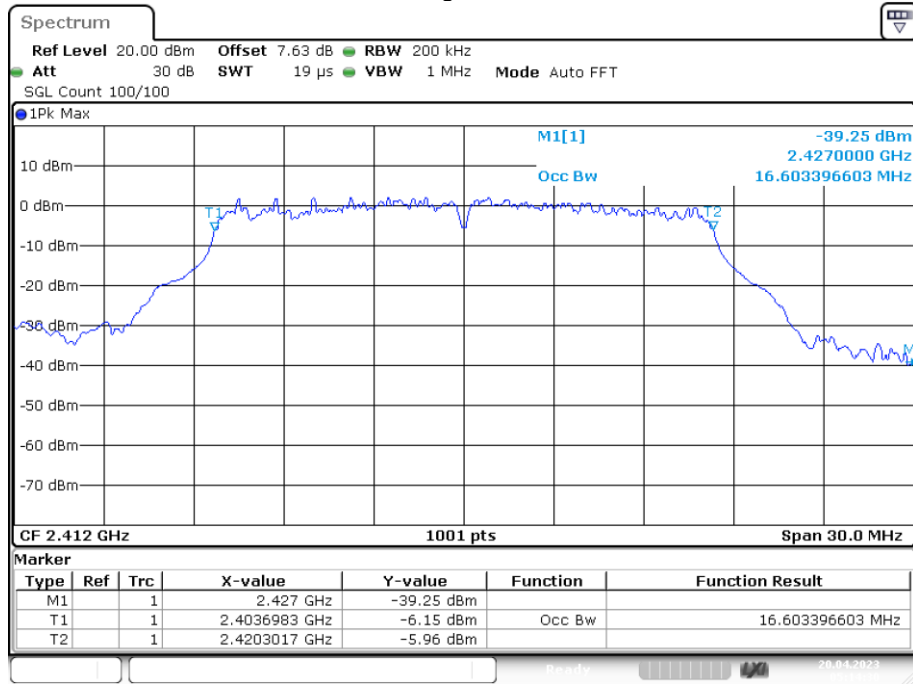


Date: 20.APR.2023 05:14:29

OBW NVNT g 2437MHz Ant1

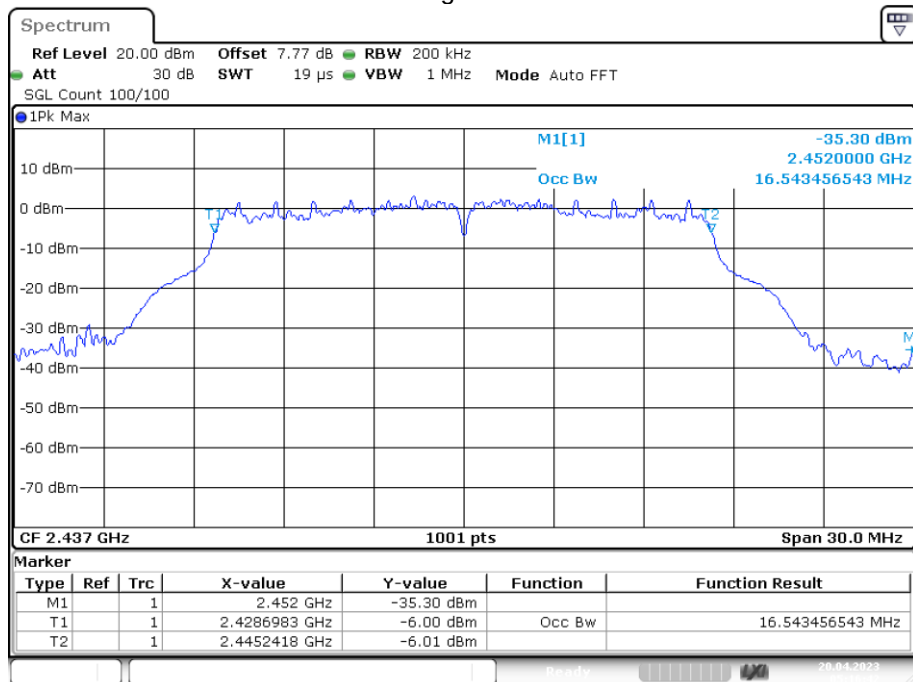


Date: 20.APR.2023 05:16:42

OBW NVNT g 2462MHz Ant1

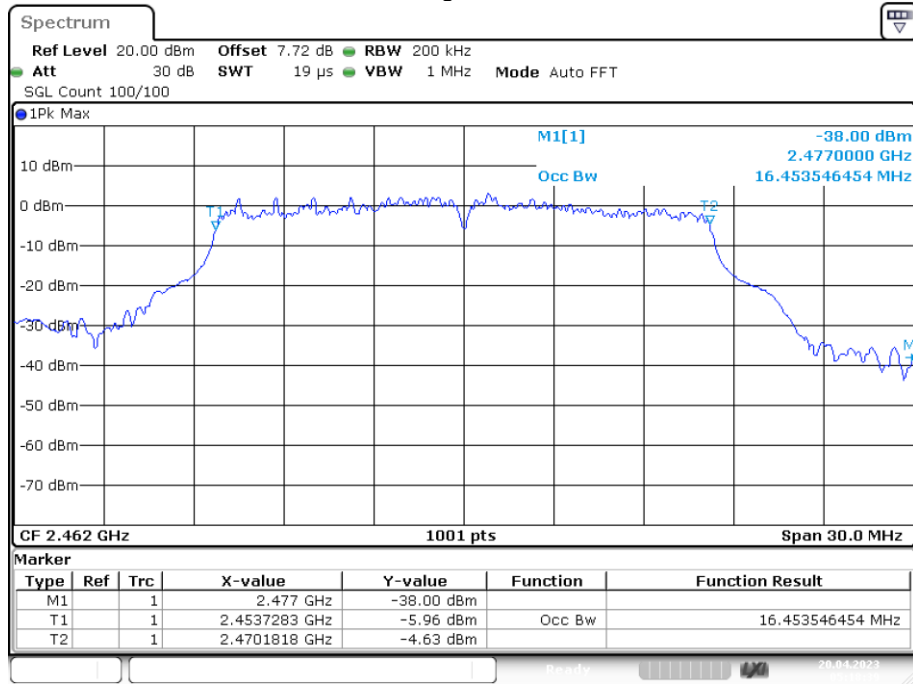


Date: 20.APR.2023 05:18:39

OBW NVNT n20 2412MHz Ant1

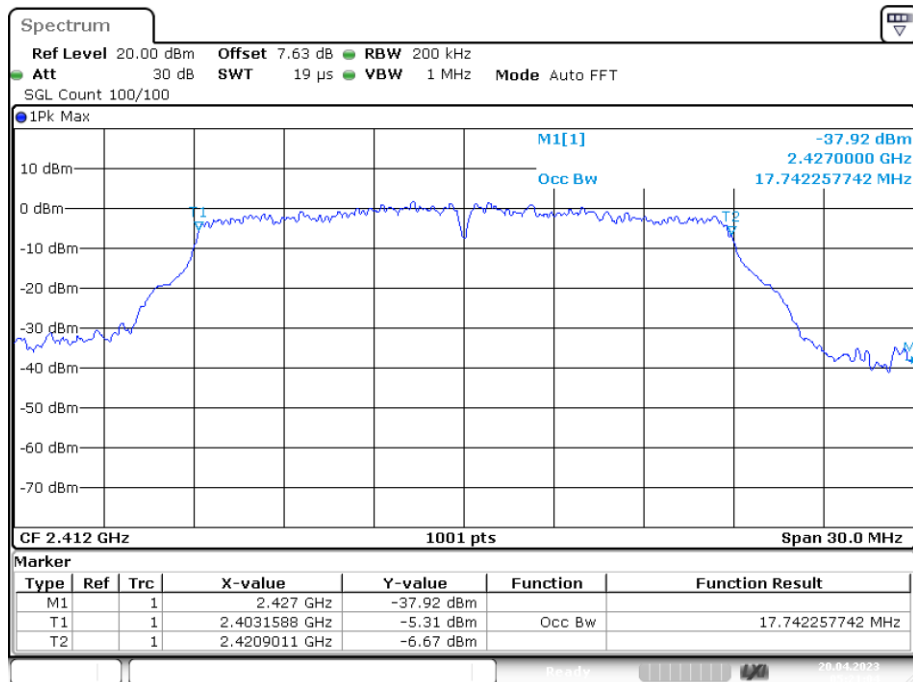


Date: 20.APR.2023 05:21:04

OBW NVNT n20 2437MHz Ant1

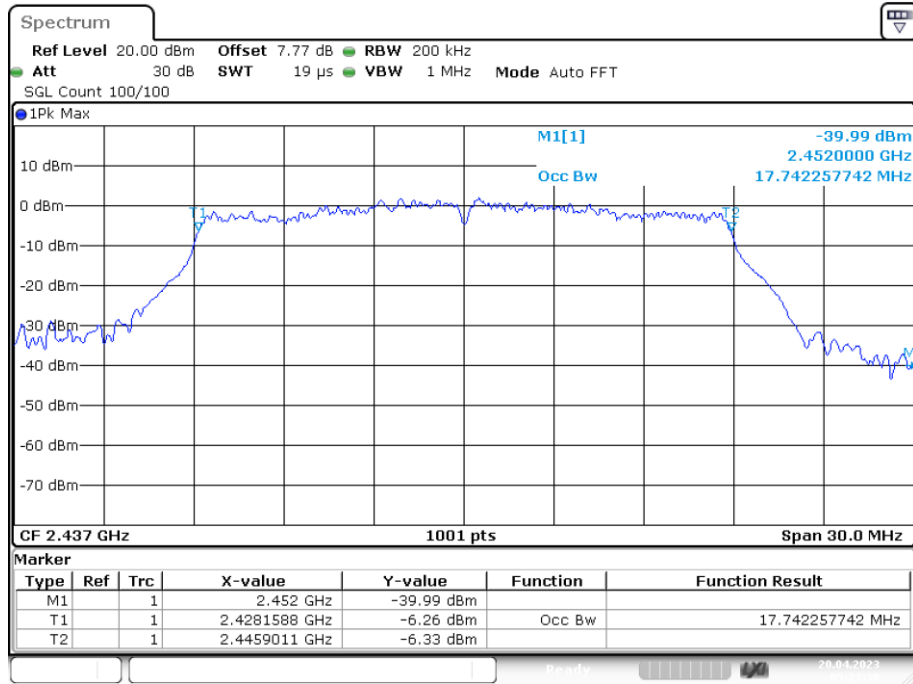

Date: 20.APR.2023 05:23:38

OBW NVNT n20 2462MHz Ant1

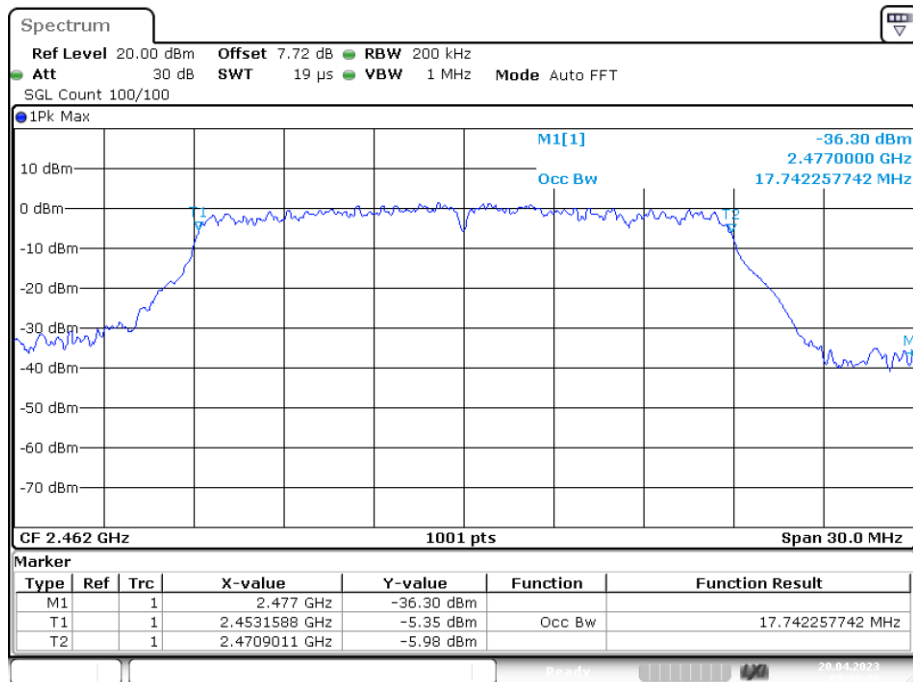

Date: 20.APR.2023 05:26:37

8. BANDEDGE CHECK

8.1. Test limits

Please refer RSS-GEN & FCC PART 15: 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits and RSS-GEN limits.

8.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value , RBW 1MHz ,VBW 10Hz , RMS detector for AV value.

8.3. Test Setup


Same as 5.2.2.

8.4. Test Results


PASS.

Detailed information please see the following page.


Test Mode: IEEE 802.11b-Low

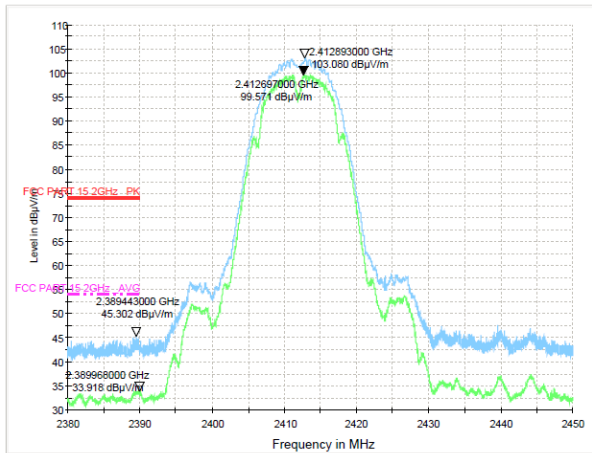


Test Mode: IEEE 802.11b-High

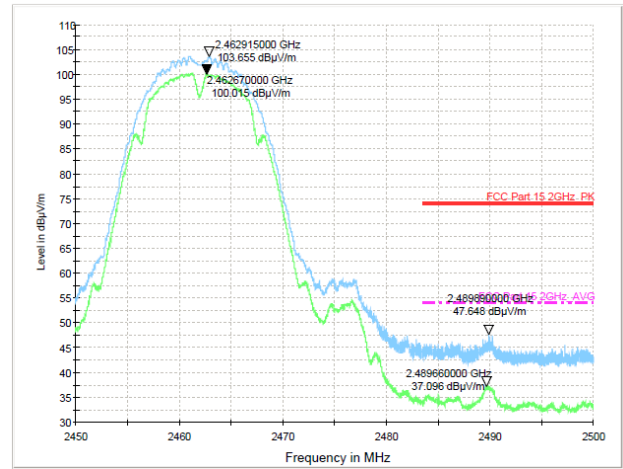


Test Mode: IEEE 802.11g-Low

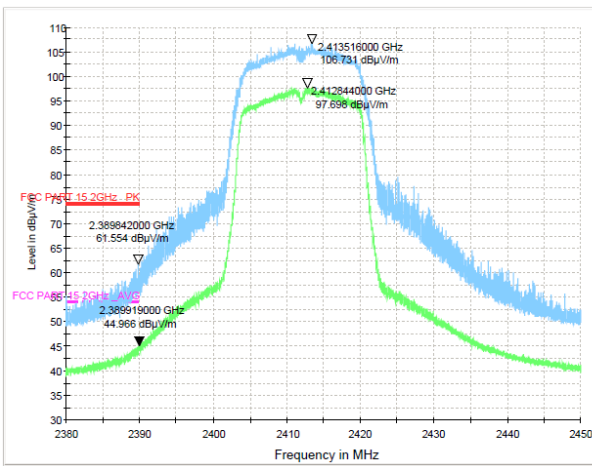


Test Mode: IEEE 802.11g-High

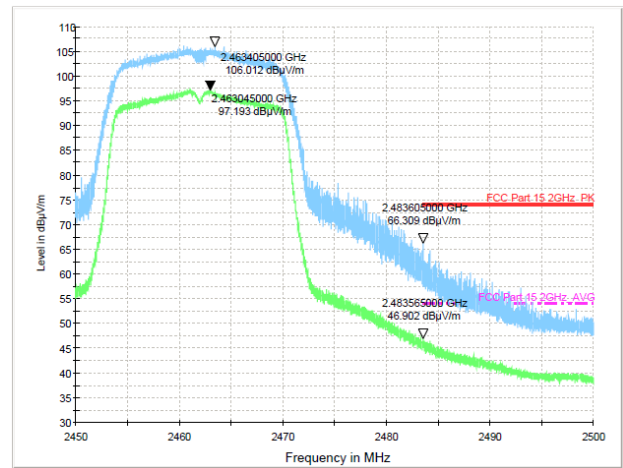


Test Mode: IEEE 802.11n20-Low

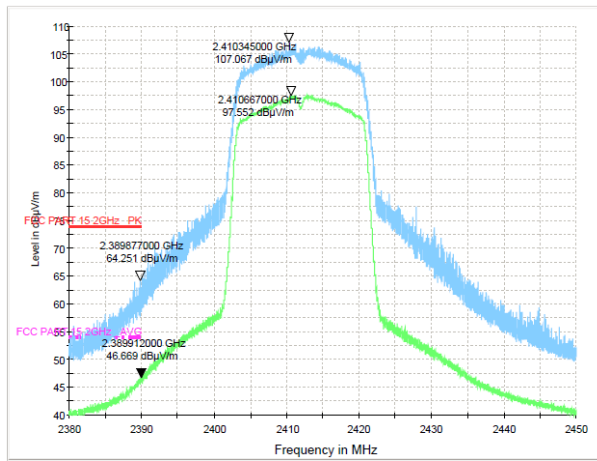


Test Mode: IEEE 802.11n20-High

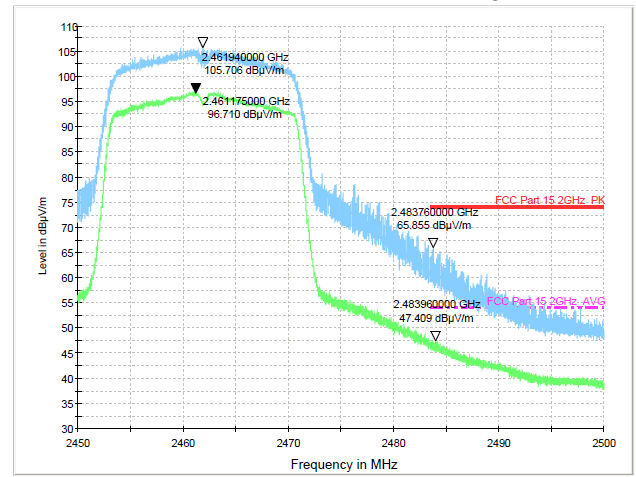

Testmode:802.11b

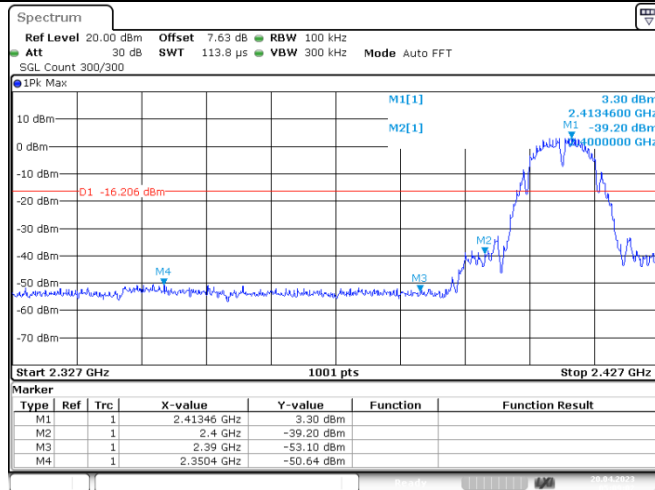


Lowest channel

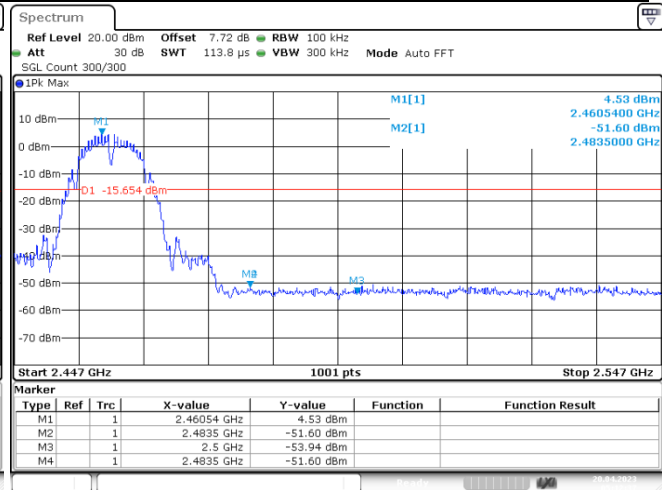


Highest channel


Testmode:802.11g

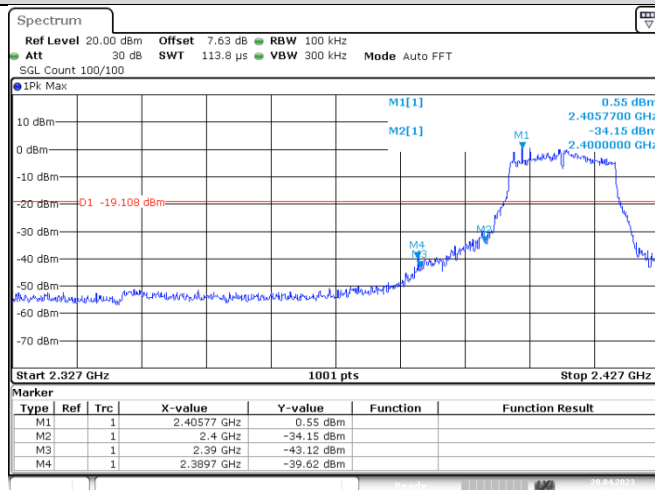

Lowest channel

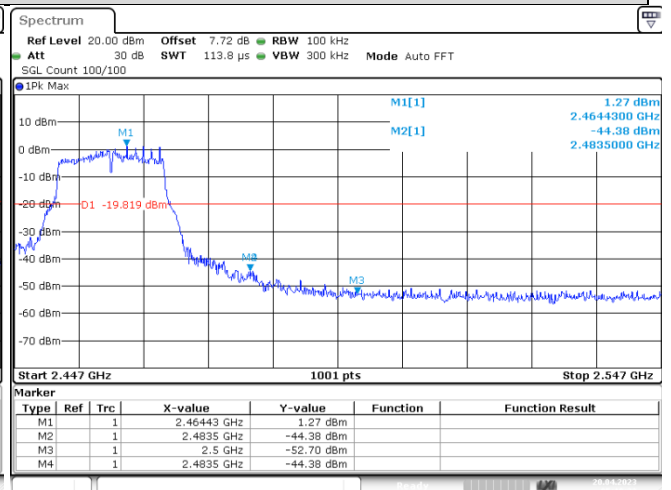

Highest channel

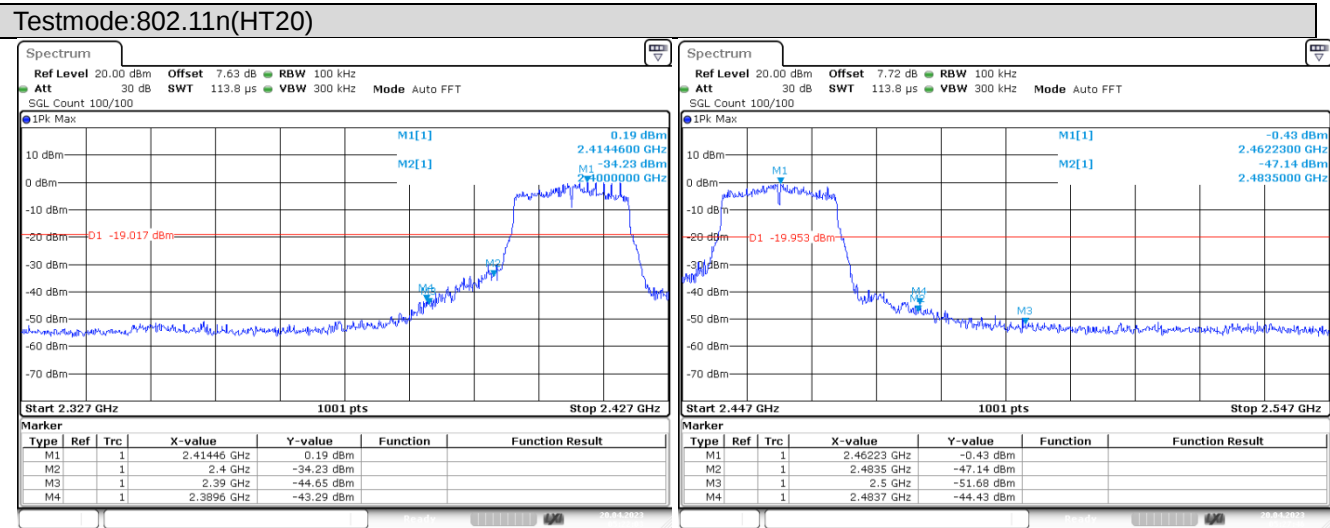

9. ANTENNA REQUIREMENT

9.1. Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

9.2. Antenna Connected Construction



The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

9.3. Results

The EUT antenna is internal Antenna. It complies with the standard requirement.

10. TESTSETUPPHOTO

10.1. Photos of Radiated emission

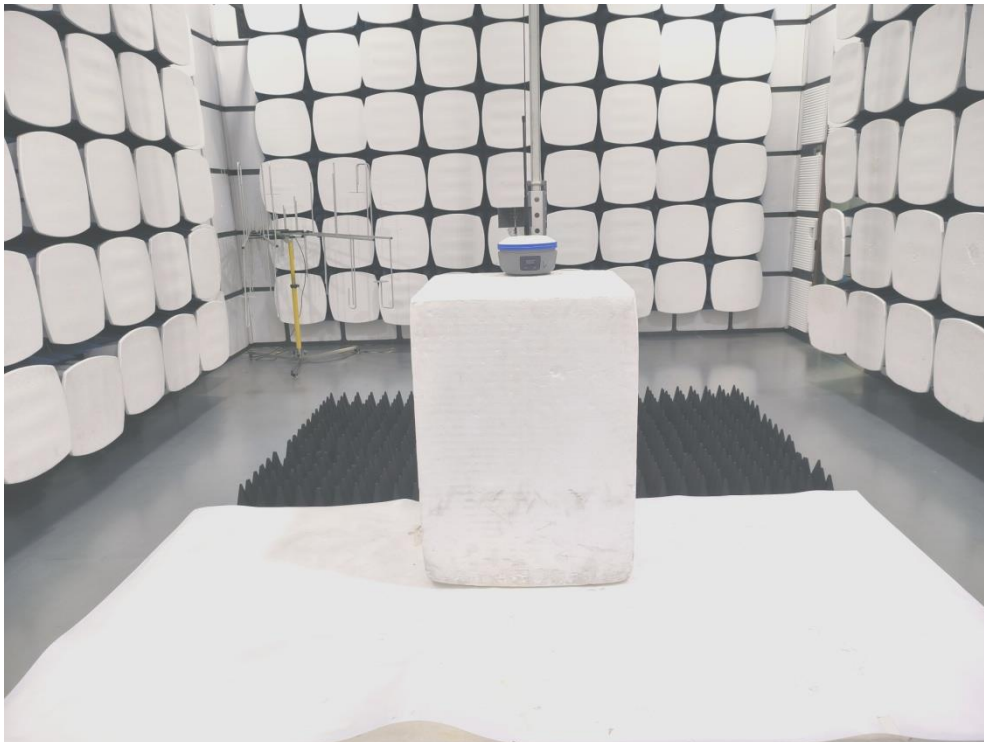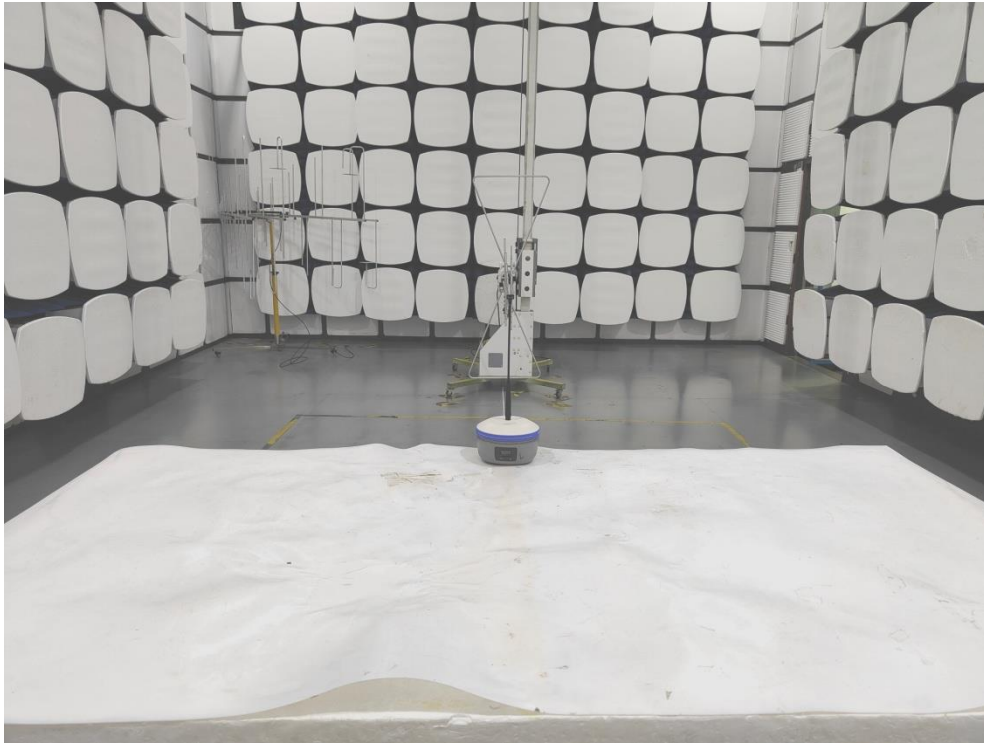

-----END OF REPORT-----