

FCC Test Report

Report No.: AGC01110230768FR02

FCC ID	:	2AOKB-A3872R
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Headphone
BRAND NAME	:	soundcore
MODEL NAME	:	A3872R
APPLICANT	:	Anker Innovations Limited
DATE OF ISSUE	:	Aug. 24, 2023
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







REPORT REVISE RECORD

Report Version	Revise Time	Issued Date Valid Version		Notes	
V1.0	/	Aug. 24, 2023	Valid	Initial Release	



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	
2.6. RELATED SUBMITTAL(S) / GRANT (S)	
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	
2.9. EQUIPMENT MODIFICATIONS	-
2.10. ANTENNA REQUIREMENT	9
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	
7. PEAK OUTPUT POWER	14
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3. LIMITS AND MEASUREMENT RESULT	
8. 20DB BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	

Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	31
9.3. MEASUREMENT EQUIPMENT USED	31
9.4. LIMITS AND MEASUREMENT RESULT	31
10. RADIATED EMISSION	52
10.1. MEASUREMENT PROCEDURE	52
10.2. TEST SETUP	54
10.3. LIMITS AND MEASUREMENT RESULT	55
10.4. TEST RESULT	55
11. NUMBER OF HOPPING FREQUENCY	73
11.1. MEASUREMENT PROCEDURE	73
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	73
11.3. MEASUREMENT EQUIPMENT USED	73
11.4. LIMITS AND MEASUREMENT RESULT	73
12. TIME OF OCCUPANCY (DWELL TIME)	74
12.1. MEASUREMENT PROCEDURE	74
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	74
12.3. MEASUREMENT EQUIPMENT USED	74
12.4. LIMITS AND MEASUREMENT RESULT	74
13. FREQUENCY SEPARATION	78
13.1. MEASUREMENT PROCEDURE	78
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	78
13.3. MEASUREMENT EQUIPMENT USED	78
13.4. LIMITS AND MEASUREMENT RESULT	78
14. LINE CONDUCTED EMISSION TEST	79
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	79
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	79
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	80
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	80
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	81

APPENDIX B: PHOTOGRAPHS OF EUT 81



1. VERIFICATION OF CONFORMITY

Applicant	Anker Innovations Limited
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Manufacturer	Anker Innovations Limited
Address	Room 1318-19, Hollywood Plaza, 610 Nathan Road, Mongkok, Kowloon, Hongkong
Factory	N/A
Address	N/A
Product Designation	Wireless Headphone
Brand Name	soundcore
Test Model	A3872R
Date of receipt of test item	Aug. 10, 2023
Date of test	Aug. 11, 2023 to Aug. 24, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Cool chen Prepared By Cool Cheng Aug. 24, 2023 (Project Engineer) **Reviewed By** Calvin Liu Aug. 24, 2023 (Reviewer) Approved By

Max Zhang (Authorized Officer)

Aug. 24, 2023



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as "Wireless Headphone". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz		
RF Output Power	With battery M76230: 10.422dBm (Max) With battery HT76230VS: 9.916dBm (Max)		
Bluetooth Version	V5.3		
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps		
Number of channels	79		
Hardware Version	V2.0		
Software Version	V01.26		
Antenna Designation	PIFA Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	-0.12dBi		
Power Supply	DC 3.72V by battery		
Battery	Battery 1: Model: M76230 voltage and capacity : 3.72V, 85mAh Battery 2: Model: HT76230VS voltage and capacity : 3.72V, 85mAh		

Note: The battery 1 and battery 2 all the same except for the model names and manufacturer. The RF output power of each battery had been tested and recorded in the report. For the other test items, the battery 1 had been tested and recorded in this report.



2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency			
	0	2402 MHz			
	1	2403 MHz			
	:	:			
		2440 MHz			
2402~2480MHz		2441 MHz			
	40	2442 MHz			
	:	:			
	77	2479 MHz			
	78	2480 MHz			

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode: 40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55, 36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63, 42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14, 51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49, 20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37, 65, 32, 70, 52, 27, 59, 22, 62, 39



2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AOKB-A3872R** filing to comply with the FCC PART 15.247 requirements.

2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.8. SPECIAL ACCESSORIES

Refer to section 5.2.

2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_{c} = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



4. DESCRIPTION OF TEST MODES

Low channel GFSK
Middle channel GFSK
High channel GFSK
Low channel π/4-DQPSK
Middle channel π/4-DQPSK
High channel π/4-DQPSK
Low channel 8DPSK
Middle channel 8DPSK
High channel 8DPSK
Hopping mode GFSK
Hopping mode π/4-DQPSK
Hopping mode 8DPSK

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

Software Setting

e <u>D</u> evi	ce															
ices										BLE BT	DEBUG					
rt ID COM2	Address Ox	Name WQ	Address Ty Private	} State	Role UNDEFI	Authenticatic Encryption	Version	Founc 11 - dev		Settings BR EDR RF Tx Ho Packet Ty Data Len, Payload Power Lev	Scanning TRABSBIITT de ype gth vel	TEST_M TN_TVP1 1021 PRBS9 3	Tx Mode DDE_TX_MST 2_3DH5	Rx Node	VCO TEST	
cez Selected	Local Device Tra	aces Sel	ected Feer 1	Device Tra	245				×	Frequency Hopping J LT Addrey Tx Interv	55	78 Hoppin: 1 0	K0_2	* *		
(PAR) (PAR) (-[09:4 (PAR) (PAR) (PAR) (PAR) (PAR) (PAR)	WA} Rsv0 = 0x00 WA} Rsv1 = 0x00 48:21:416] WQ-DUT WA} Length = 0x06 WA} Nb Hci Comman WA} Command Opcod WA} Status = 0x00 WA} Num Pkt Recei	: CMD_COM d Packets le = 0xFCBC (success)	PLETE_EVT(H = 0x05 (cmd_vs_en_	CMD_VS_EN	BT_RX_TEST_C	10_OPCODE) -			·····	Tx Packe	t Frumber Ox	FFFFF	TF		Start IX Stop IX	
[09: <-[09: {PARJ {PARJ {PARJ	nd: d0d2c5c2001f0 5210:109] WQ-DUT 5210:200 WQ-DUT W1 Length = 0x04 W1 ND Hci Comman W1 Command Opcod W1 Status = 0x00	: CMD(H_C : CMD_COM d Packets e = 0x0C03	MD_RESET)-> PLETE_EVT(H_ = 0x05 (cmd_reset)	CMD_RESET)		34040f2858574			·····+	External W Timeout(ms		Set	Platfor Ox		o Sett: Rese	t Syn
]SCO fil ady	tering 🗹 MCI IS	30 filterin	g Chip Se	1 CHIP_DE	FAULT 🔻				Clear	0x						Send



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Radiated Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

ltem	Equipment	Model No.	ID or Specification	Remark
1	Wireless Headphone	A3872R	2AOKB-A3872R	EUT
2	Control Box	N/A	USB-TTL	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test software	R&S	Ver.V1.71	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	Ver.2.5	N/A	N/A	N/A



7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer.
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW \geq RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

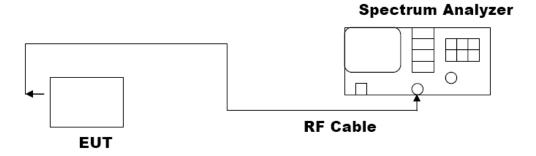




Test Data of Conducted Output Power with battery M76230				
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail
	2402	10.255	\$21	Pass
GFSK	2441	10.422	\$21	Pass
	2480	10.394	\$21	Pass
	2402	9.992	\$21	Pass
π /4-DQPSK	2441	10.276	\$21	Pass
	2480	10.252	\$21	Pass
	2402	5.959	\$21	Pass
8DPSK	2441	6.678	\$21	Pass
	2480	6.573	\$21	Pass

7.3. LIMITS AND MEASUREMENT RESULT


Test Graphs of Conducted Output Power






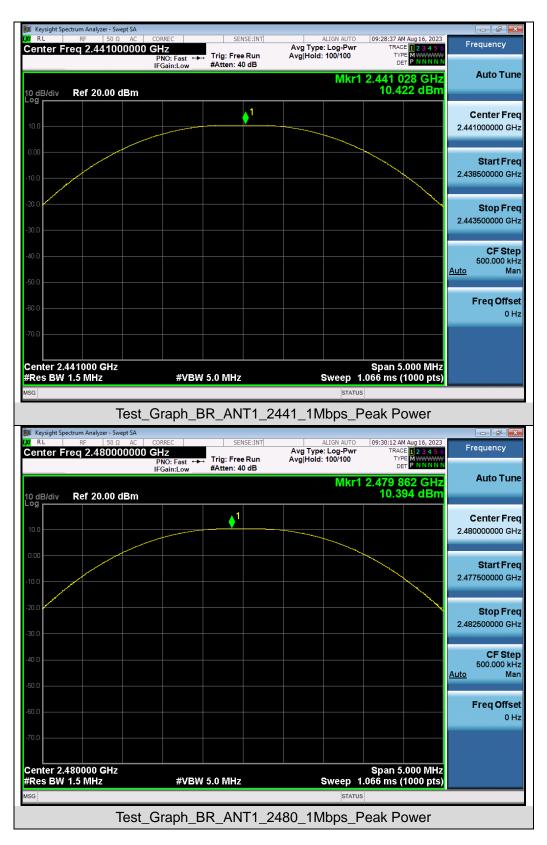




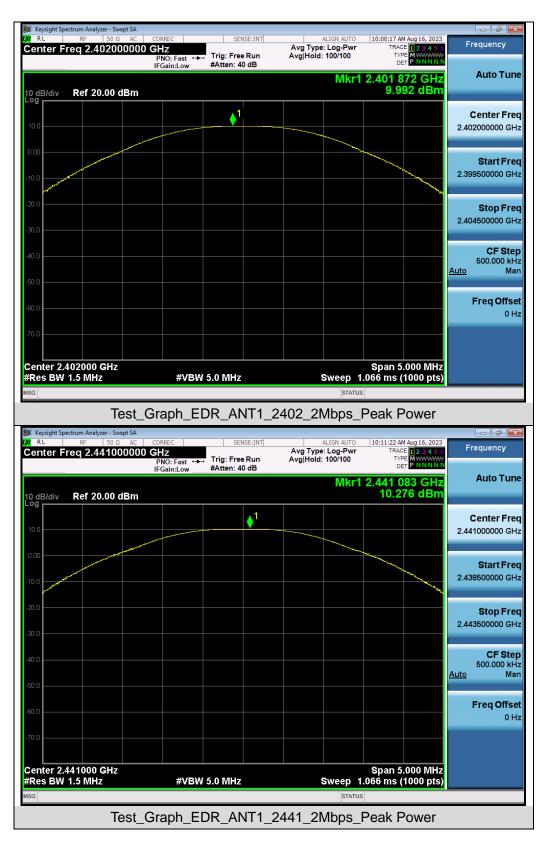



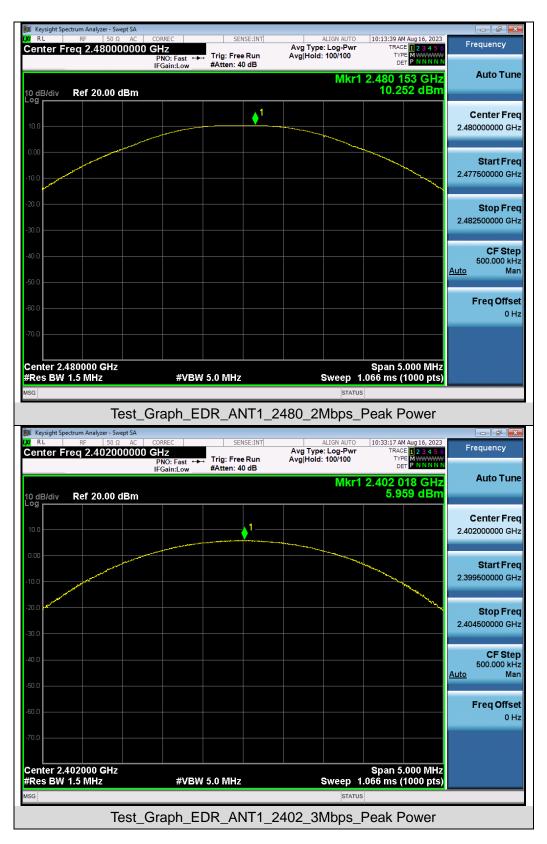




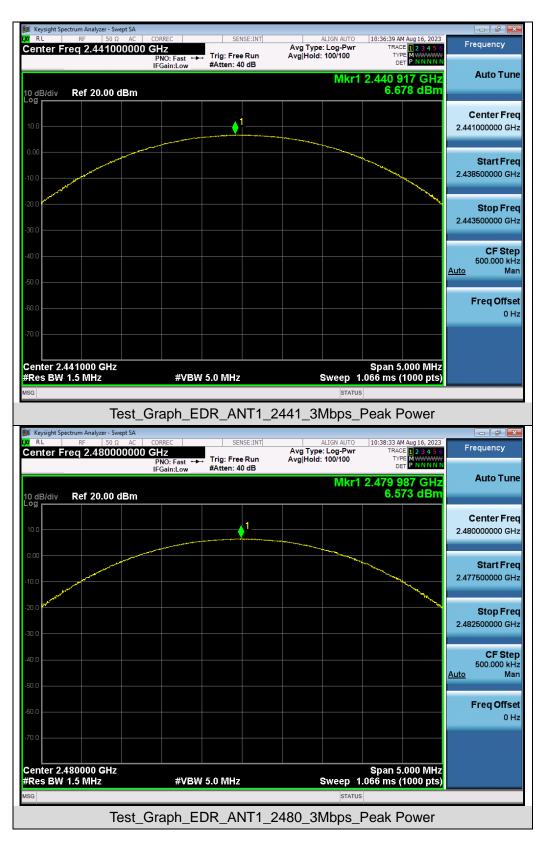




	Test Data of Conducted Output Power with battery HT76230VS					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	9.688	\$21	Pass		
GFSK	2441	9.916	⊴21	Pass		
	2480	9.914	≪21	Pass		
	2402	9.437	\$21	Pass		
π /4-DQPSK	2441	5.465	≪21	Pass		
	2480	9.703	\$21	Pass		
	2402	6.274	\$21	Pass		
8DPSK	2441	9.703	≪21	Pass		
	2480	6.043	\$21	Pass		


Test Graphs of Conducted Output Power

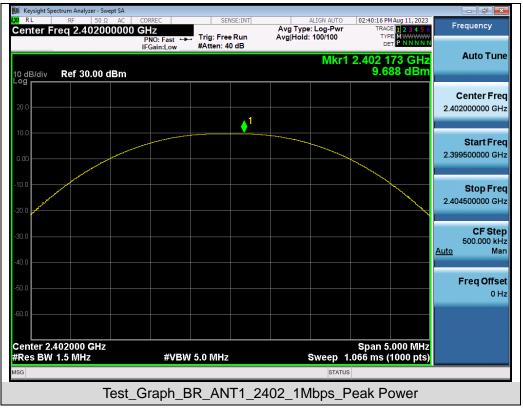




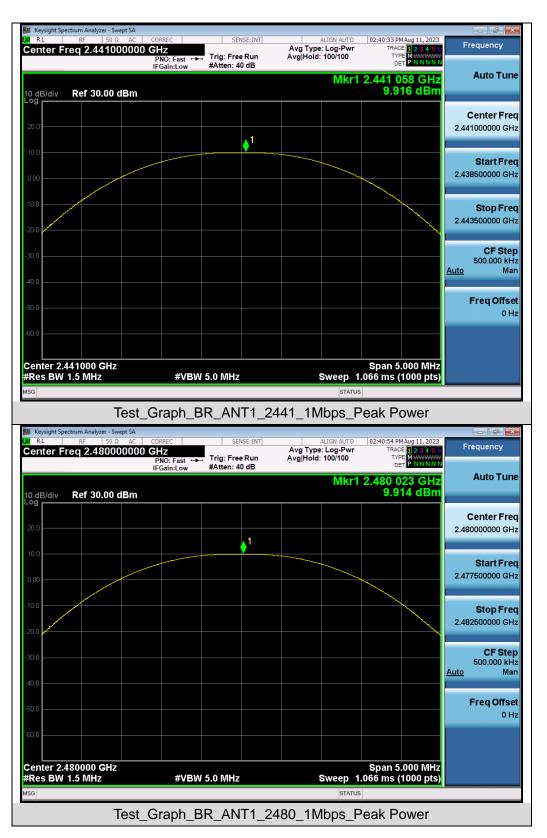




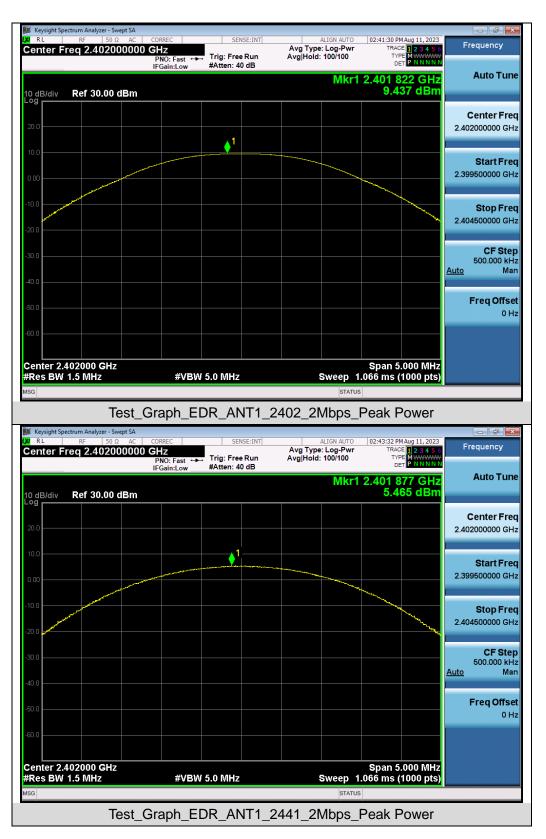



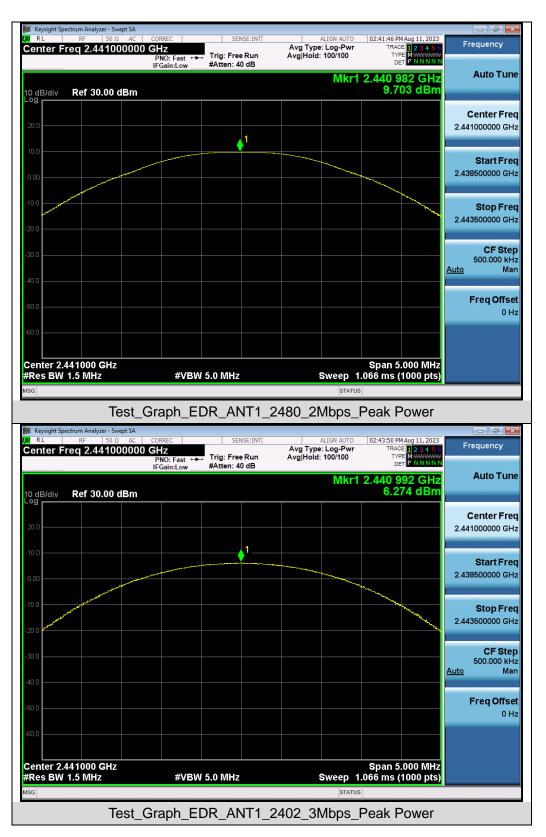



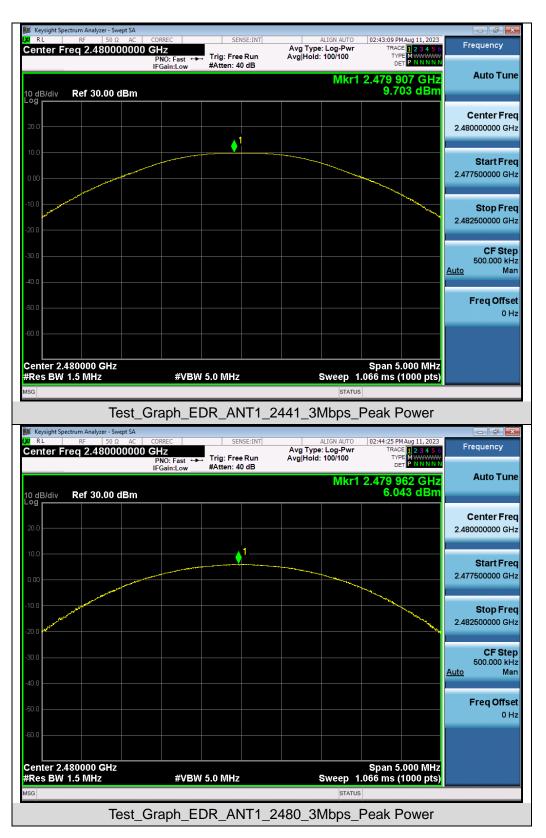




8. 20DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer.
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

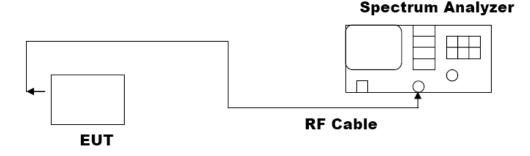





Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.853	0.945	N/A	Pass
GFSK	2441	0.872	0.972	N/A	Pass
	2480	0.883	0.995	N/A	Pass
	2402	1.160	1.280	N/A	Pass
π /4-DQPSK	2441	1.188	1.280	N/A	Pass
	2480	1.172	1.260	N/A	Pass
	2402	1.169	1.293	N/A	Pass
8DPSK	2441	1.166	1.256	N/A	Pass
	2480	1.172	1.275	N/A	Pass

8.3. LIMITS AND MEASUREMENT RESULTS


Test Graphs of Occupied Bandwidth and -20 Bandwidth

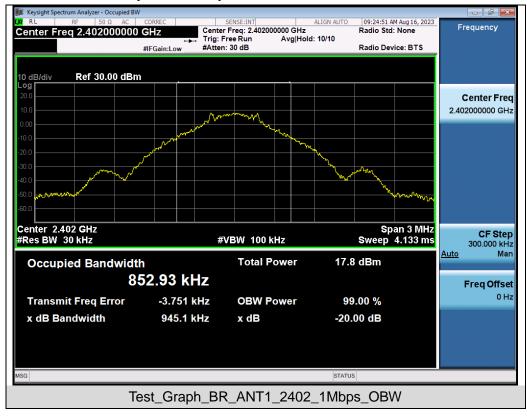




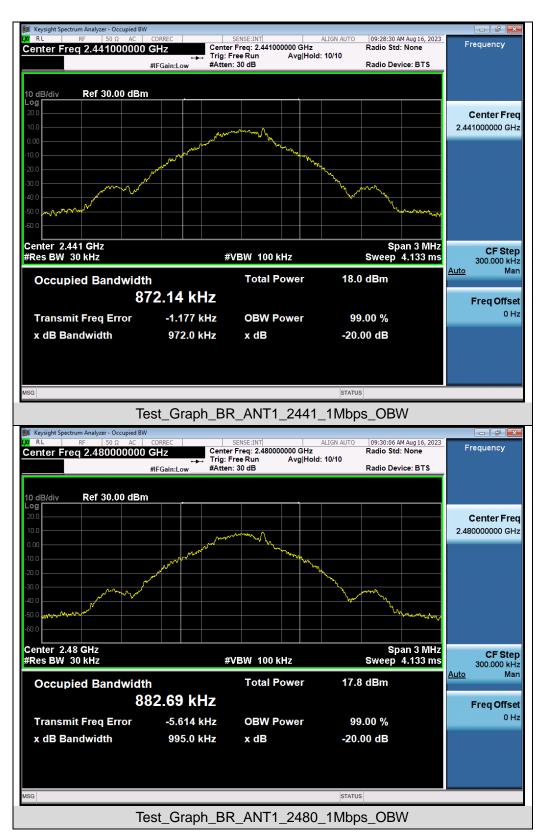



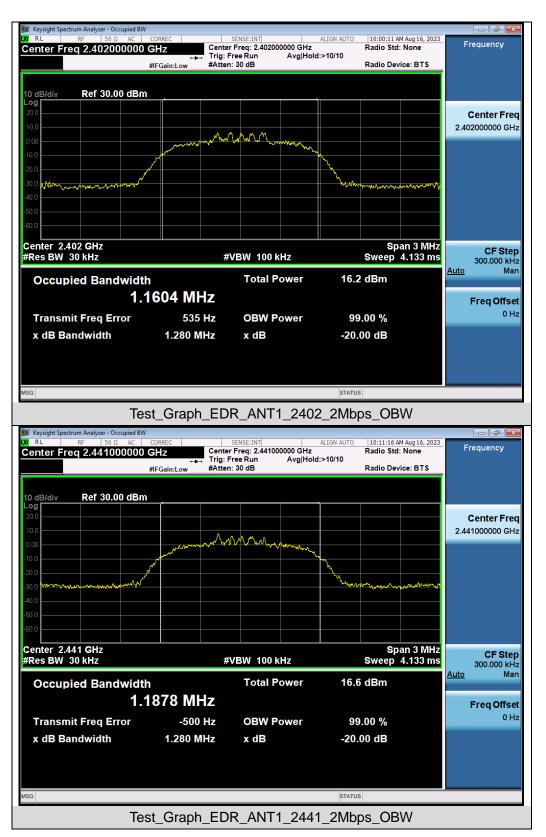



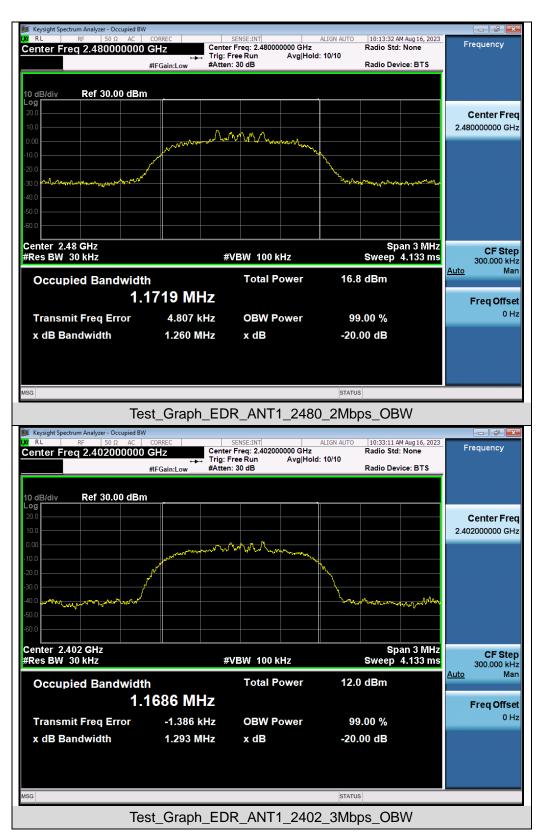


 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



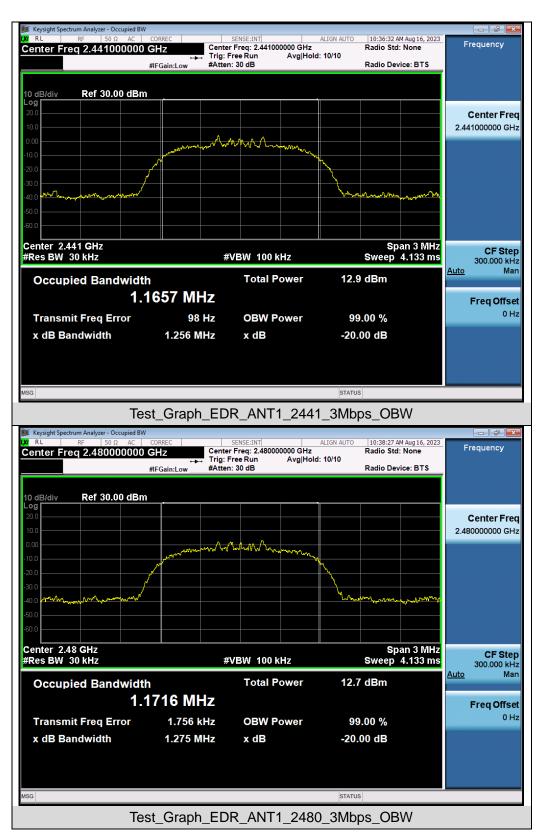



9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer.
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
 RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 8.2

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

9.4. LIMITS AND MEASUREMENT RESULT

Measurement Re Test Data -20dBc than the limit ed on the BOTTOM	esult Criteria
-20dBc than the limit	Criteria
ed on the BOTTOM	
	PASS
Channel	
	PASS
	-20dBc than the limit d on the TOP Channel









Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




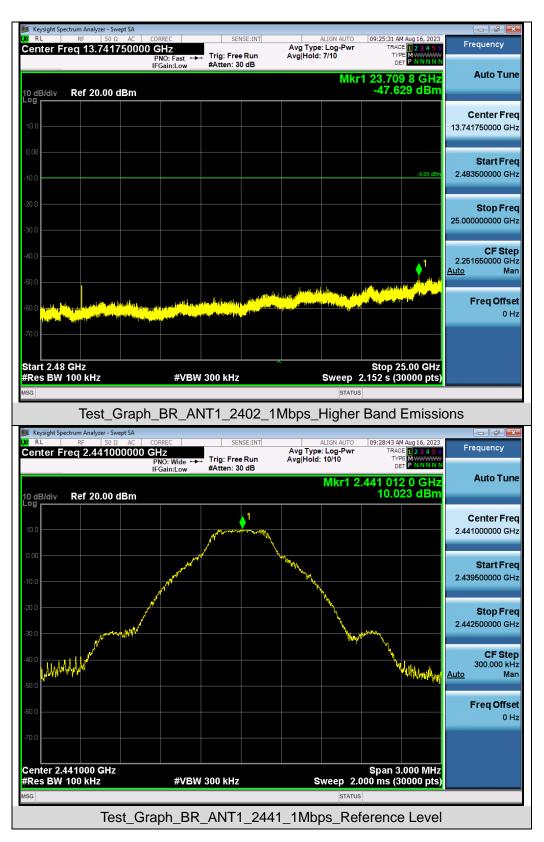




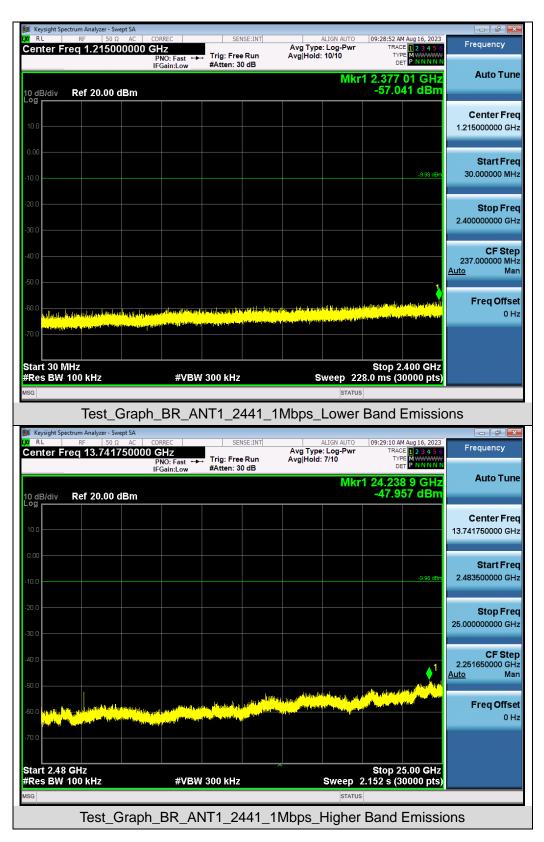




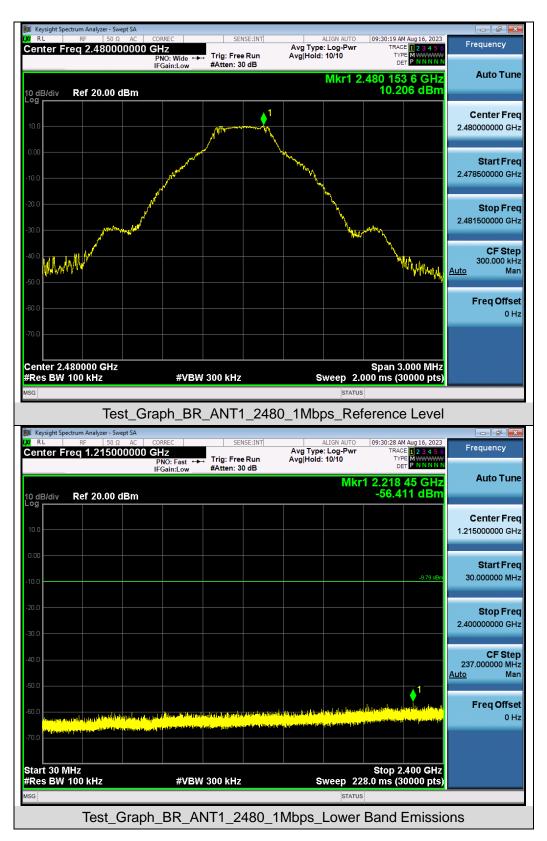




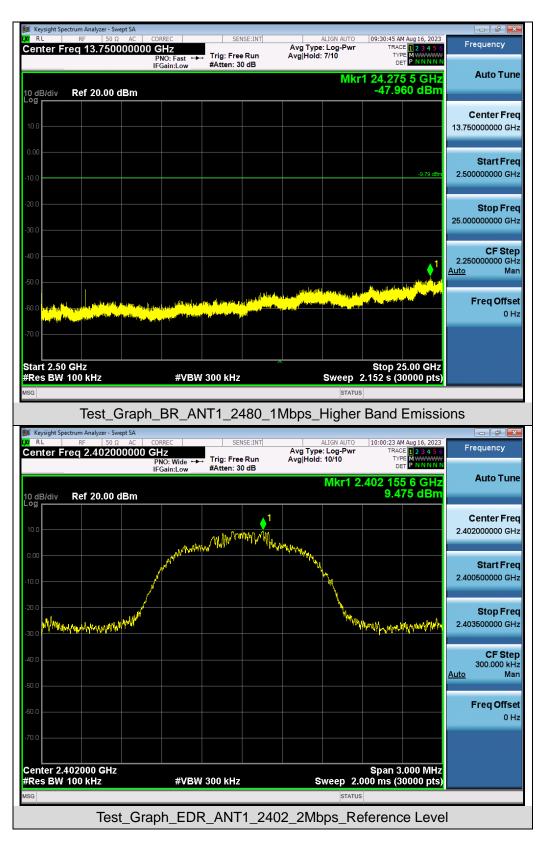




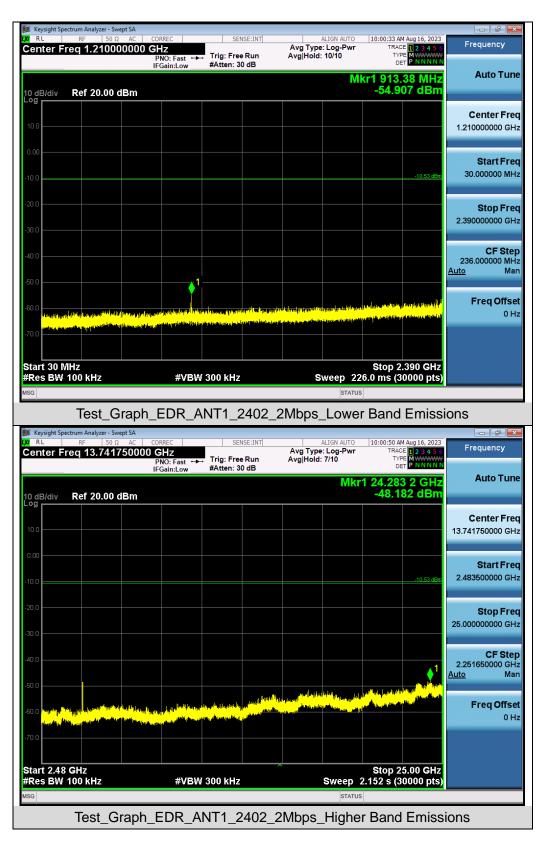




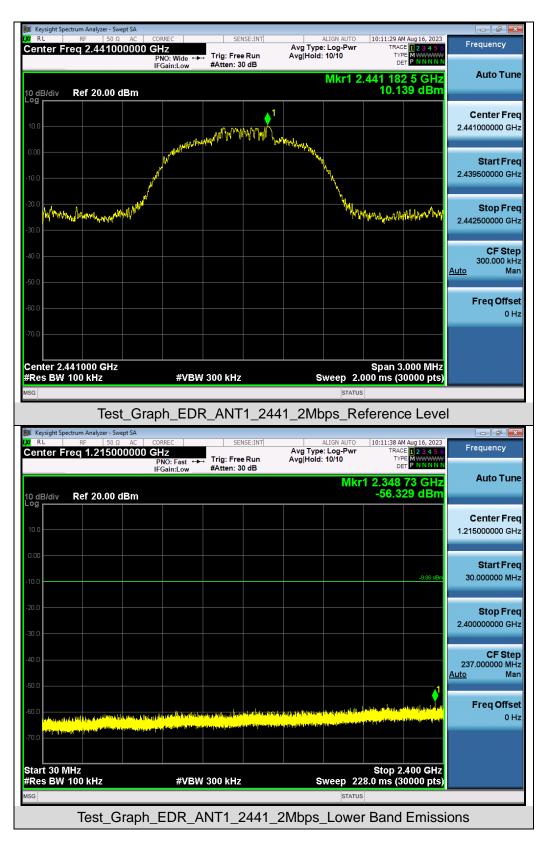




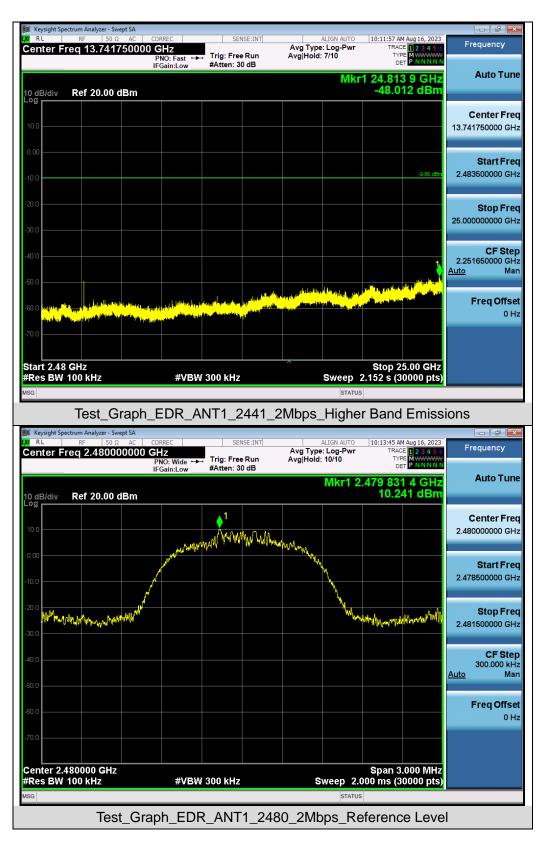




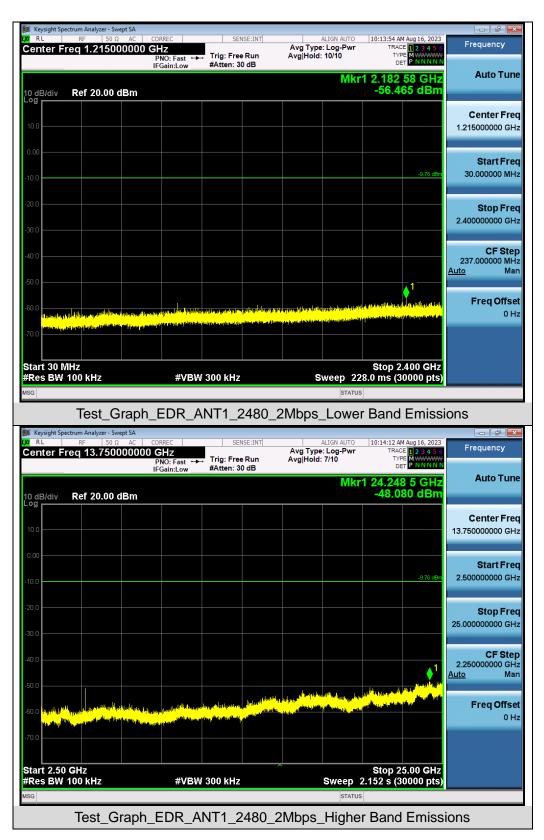




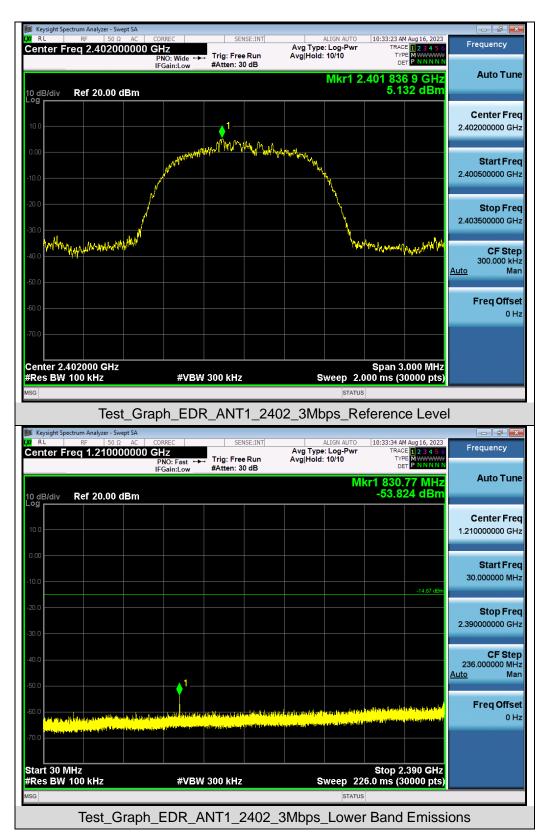




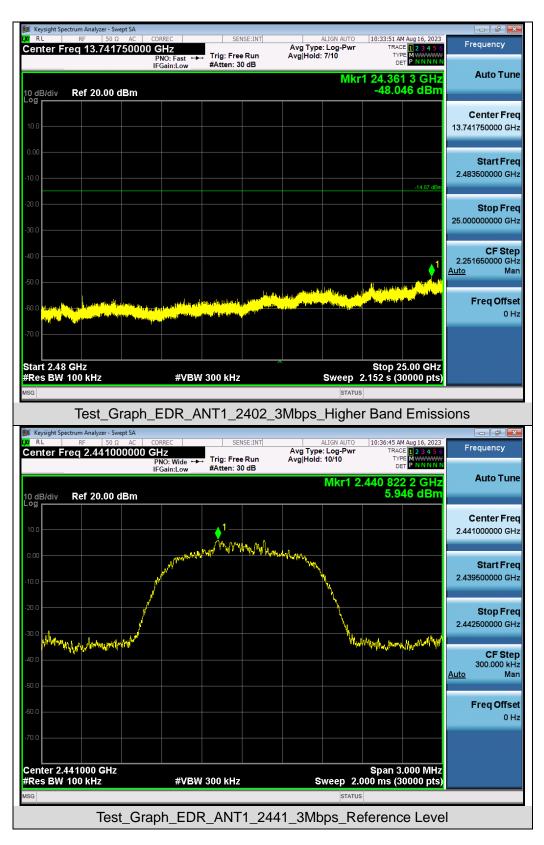




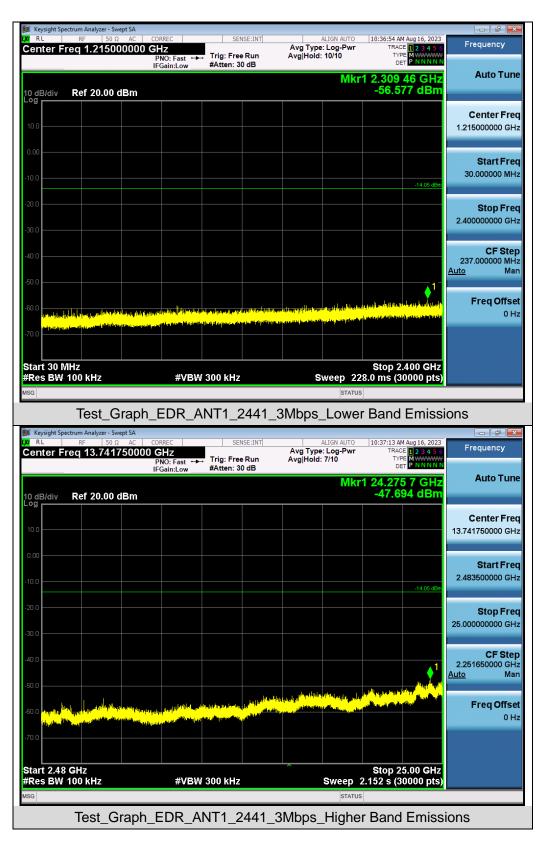




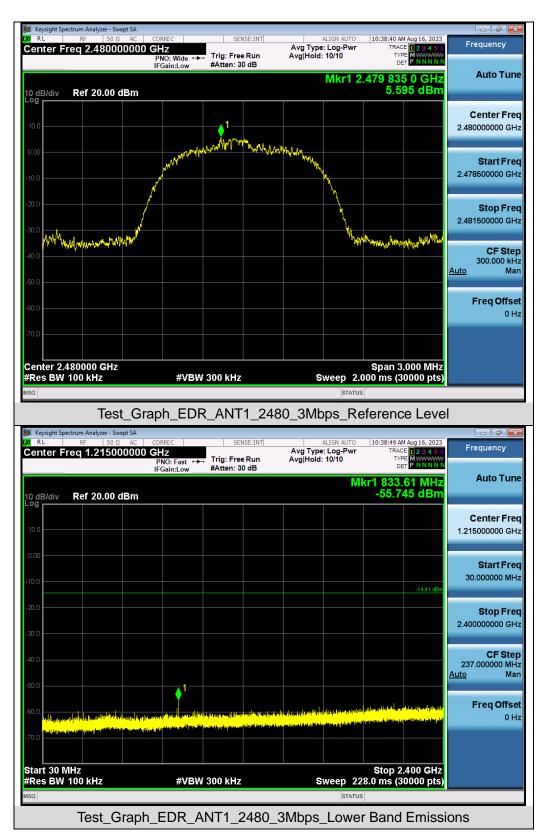



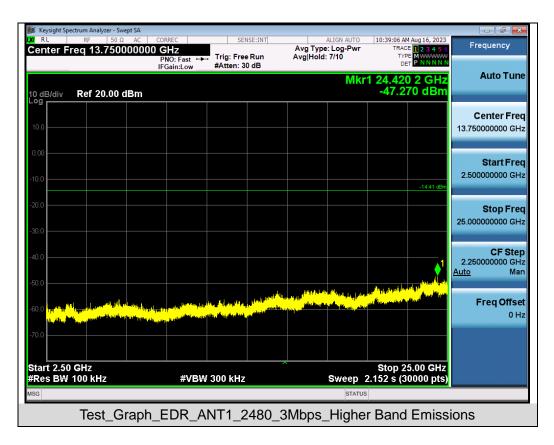




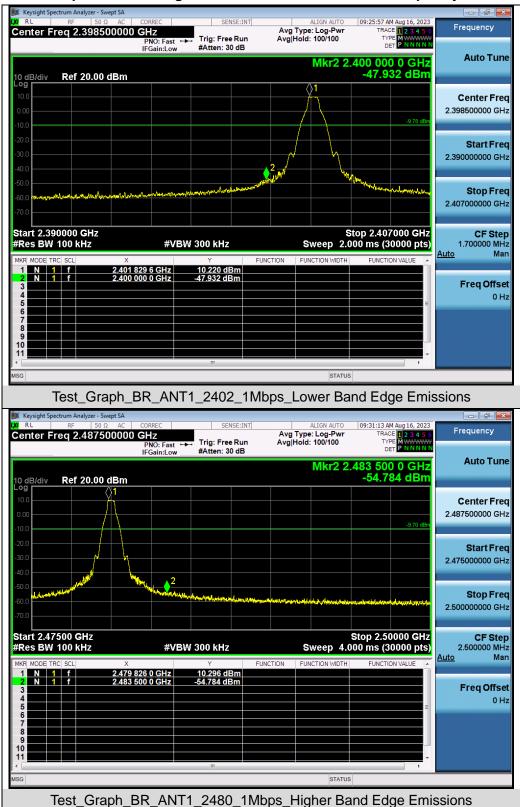

Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



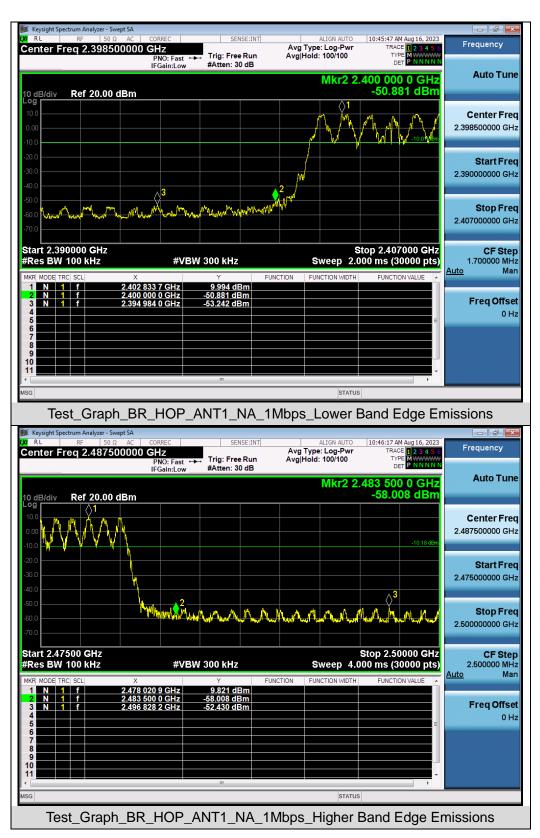



















10. RADIATED EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




10.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

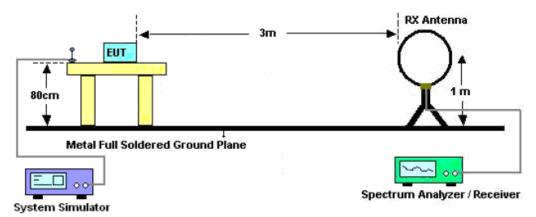

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

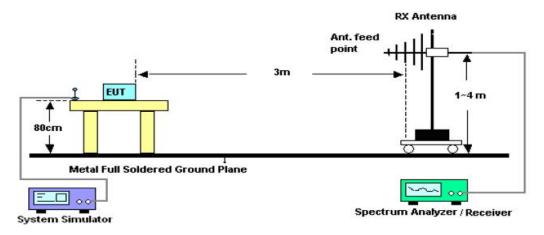

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

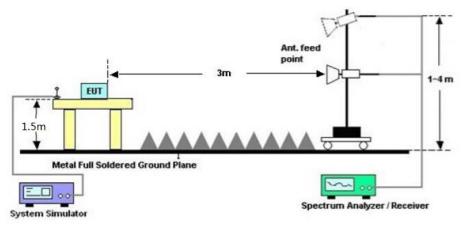



10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

10.4. TEST RESULT

Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4°C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal
72.0 dBu∀/m			Limit —
			Margin:
32		3	mun un an minu
			munituntation
1	2 2	and a stand and a stand and a stand and the	
where and the stand and the	ali allanda Mudala Maria	Vice with the second of the second	
-8			
30.000 40 50	60 70 8D (M	Hz) 300 400	500 600 700 1000.000
	Reading Corre		
No. Mk.	Freq. Level Fact	or ment Limit	Over
	MHz dBuV dB	dBuV/m dB/m	dB Detector
1 39	9.9941 5.24 13.9	0 19.14 40.00 -:	20.86 peak
2 130	0.3788 5.84 15.7	8 21.62 43.50 -2	21.88 peak
3 440	0.1963 5.53 25.0	9 30.62 46.00 -	15.38 peak
4 520	0.8881 5.98 25.1	4 31.12 46.00 -	14.88 peak
5 599	9.3212 6.41 25.0	7 31.48 46.00 -	14.52 peak

Radiated emission from 30MHz to 1000MHz

RESULT: PASS



EUT	Wireless Headphor	ne	Model Name	A3872R
Temperature	23.4° C		Relative Humidity	/ 60.1%
Pressure	960hPa		Test Voltage	Normal Voltage
Test Mode	Mode 2		Antenna	Vertical
72.0 dBu∀/m				Limit —
-8				Margin:
30.000 40	50 60 70 80	(MHz)	300 400	500 600 700 1000.000
No. Mk.	Reading Freq. Level		leasure- ment Limit	Over
	MHz dBuV	dB o	lBuV/m dB/m	dB Detector
	49.0145 6.39		23.38 40.00	-16.62 peak
2 6	63.9828 6.44	17.06	23.50 40.00	-16.50 peak
3 15	57.5588 6.08	18.20	24.28 43.50	-19.22 peak
4 46	6.39 6.39	25.04	31.43 46.00	-14.57 peak
5 7	14.1734 6.08	28.60	34.68 46.00	-11.32 peak
6 * 94	42.1305 5.67	30.91	36.58 46.00	-9.42 peak

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 3 is the worst case and recorded in the report.



Radiated emission above 1GHz

EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.26	0.08	47.34	74	-26.66	peak
4804.000	38.54	0.08	38.62	54	-15.38	AVG
7206.000	42.15	2.21	44.36	74	-29.64	peak
7206.000	32.49	2.21	34.7	54	-19.3	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.38	0.08	46.46	74	-27.54	peak
4804.000	36.27	0.08	36.35	54	-17.65	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.49	2.21	34.7	54	-19.3	AVG
Remark:						
Factor = Anter	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					



EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	46.94	0.14	47.08	74	-26.92	peak	
4882.000	37.54	0.14	37.68	54	-16.32	AVG	
7323.000	41.05	2.36	43.41	74	-30.59	peak	
7323.000	32.46	2.36	34.82	54	-19.18	AVG	
Remark:							
actor = Anter	actor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.29	0.14	46.43	74	-27.57	peak
4882.000	37.54	0.14	37.68	54	-16.32	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.49	2.36	34.85	54	-19.15	AVG
Remark:						
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			



EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	35.28	0.22	35.5	54	-18.5	AVG
7440.000	40.26	2.64	42.9	74	-31.1	peak
7440.000	31.47	2.64	34.11	54	-19.89	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Headphone	Model Name	A3872R
Temperature	23.4° C	Relative Humidity	60.1%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	40.26	2.64	42.9	74	-31.1	peak
7440.000	31.94	2.64	34.58	54	-19.42	AVG
Remark:						
Factor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.




EUT	Wireless Headphone	Model Name	A3872R	
Temperature	25°C	Relative Humidity	55.4%	
Pressure	960hPa	Test Voltage	Normal Voltage	
Test Mode	Mode 1	Antenna	Horizontal	

Test result for band edge emission at restricted bands

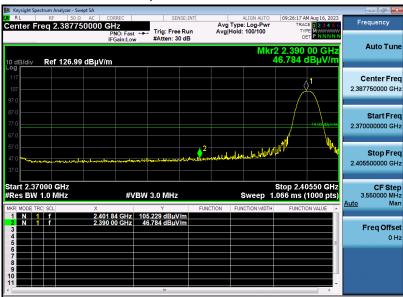

Test Graph for Peak Measurement

Test Graph for Average Measurement

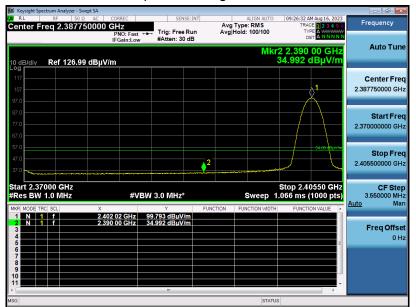

RESULT: PASS




Report No.: AGC01110230768FR02 Page 62 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

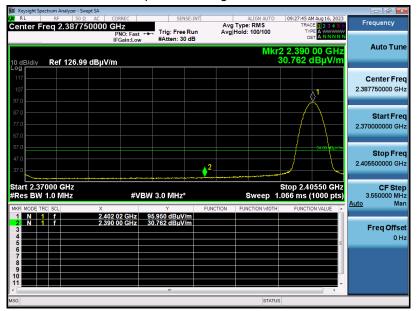


RESULT: PASS




Report No.: AGC01110230768FR02 Page 63 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Test Graph for Peak Measurement

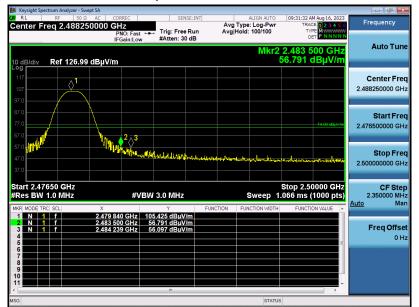

Test Graph for Average Measurement

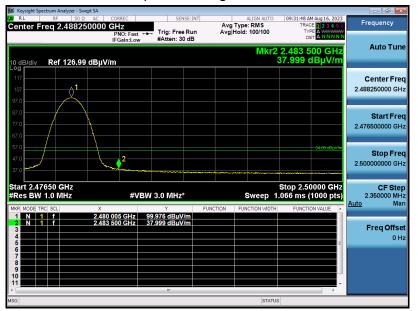


RESULT: PASS




Report No.: AGC01110230768FR02 Page 64 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Test Graph for Peak Measurement

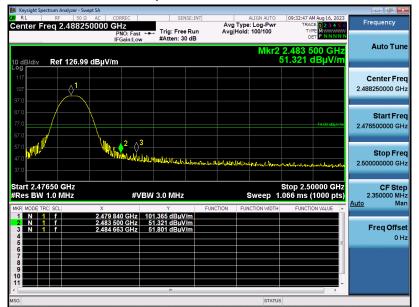

Test Graph for Average Measurement

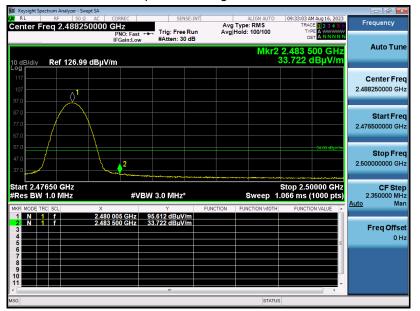


RESULT: PASS




Report No.: AGC01110230768FR02 Page 65 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Test Graph for Peak Measurement

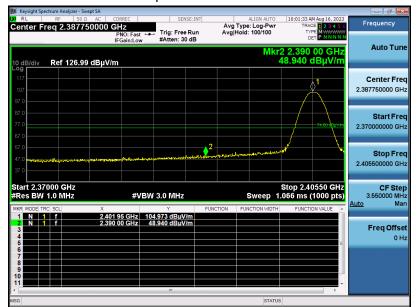

Test Graph for Average Measurement

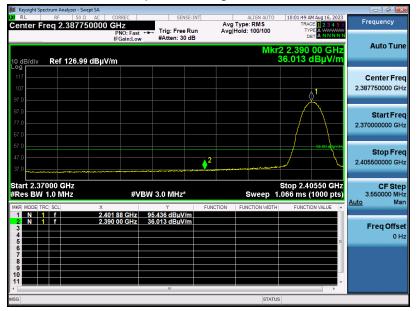


RESULT: PASS




Report No.: AGC01110230768FR02 Page 66 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

Test Graph for Peak Measurement

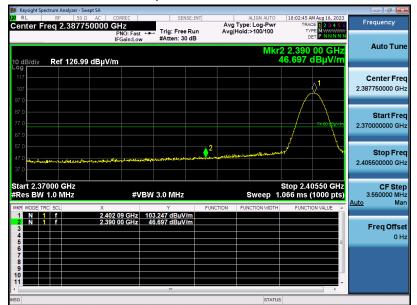

Test Graph for Average Measurement

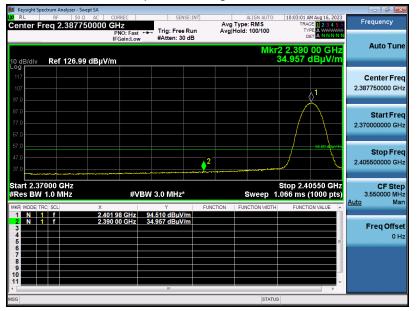

RESULT: PASS



Report No.: AGC01110230768FR02 Page 67 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS




Report No.: AGC01110230768FR02 Page 68 of 81

EUT	Wireless Headphone	Model Name	A3872R
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

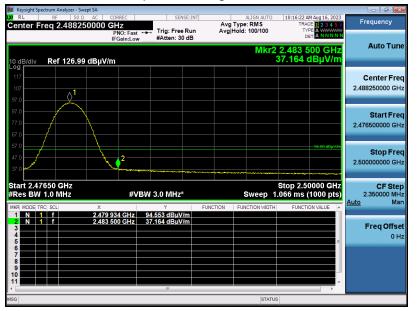

RESULT: PASS