

Test Report Prepared By:

Electronics Test Centre  
27 East Lake Hill  
Airdrie, Alberta  
Canada  
T4A 2K3

[sales@etc-mpbtech.com](mailto:sales@etc-mpbtech.com)  
<http://www.etc-mpb.com>

Telephone: 1-403-912-0037

ETC Report #: t29e22a261-DTS Release1

Report date: October 27 , 2022

**EMC testing of the Tektelic Communication Inc. Kona Mega Gateway in  
accordance with FCC Part 15.247 and ANSI C63.10: 2013 as referenced by FCC  
OET KDB 558074 D01 15.247 Meas Guidance v05r02.**

**FCC ID: 2ALEPT0008387**

Test Dates: September 30 to October 20, 2022

Test Personnel: Imran Akram, Janet Mijares,

Prepared for: Tektelic Communication Inc.

7657 10<sup>th</sup> Street NE  
Calgary, Alberta  
Canada  
T2E 8X2

Telephone: 1-403-338-6910



Imran Akram  
[iakram@etc-mpbtech.com](mailto:iakram@etc-mpbtech.com)  
EMC Technologist  
Electronics Test Centre (Airdrie)



Marc Rousseau  
[marc.rousseau@mpbc.ca](mailto:marc.rousseau@mpbc.ca)  
QA Manager  
Electronics Test Centre (Airdrie)

## REVISION RECORD

ISSUE	DATE	AUTHOR	REVISIONS
DRAFT 1	2022-10-11	I. Akram / J. Mijares	Initial draft submitted for review.
DRAFT 2	2022-10-19	J. Mijares	Removed modem 7430 results.
Release 1	2022-10-27	I. Akram	Sign Off

## TABLE OF CONTENTS

1.0	INTRODUCTION	5
1.1	Scope .....	5
1.2	Applicant .....	5
1.3	Test Sample Description.....	5
1.4	General Test Conditions .....	5
1.5	Reference Standards .....	6
1.6	Test Methodology.....	6
1.6.1	Variations in Test Methodology.....	6
1.6.2	Test Sample Verification, Configuration & Modifications .....	6
1.6.3	Uncertainty of Measurement: .....	6
2.0	TEST CONCLUSION	7
2.1	AC Power Line Conducted Emissions: Transmit Mode .....	8
2.1.1	Test Guidance.....	8
2.1.2	Deviations From The Standard .....	9
2.1.3	Test Equipment.....	9
2.1.4	Test Sample Verification, Configuration & Modifications .....	9
2.1.5	Conducted Emissions Data.....	10
2.2	6dB Bandwidth .....	12
2.2.1	Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 55807412	
2.2.2	Deviations From The Standard: .....	12
2.2.3	Test Equipment.....	12
2.2.4	Test Sample Verification, Configuration & Modifications .....	13
2.2.5	Channel Occupied Bandwidth Data: LoRa DTS .....	13
2.3	Max Average Output Power .....	17
2.3.1	Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074 17	
2.3.2	Deviations From The Standard: .....	17
2.3.3	Test Equipment.....	18
2.3.4	Test Sample Verification, Configuration & Modifications .....	18
2.3.5	Max Average Output Power Data: LoRa DTS .....	18
2.4	Power Spectral Density .....	22
2.4.1	Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074 22	
2.4.2	Deviations From The Standard: .....	23
2.4.3	Test Equipment.....	23
2.4.4	Test Sample Verification, Configuration & Modifications .....	23
2.4.5	Average PSD Data LoRa DTS .....	24
2.5	Band Edge Attenuation .....	28
2.5.1	Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074 .....	28
2.5.2	Deviations From The Standard: .....	28
2.5.3	Test Equipment.....	29
2.5.4	Test Sample Verification, Configuration & Modifications .....	29
2.5.5	Band Edge Data LoRa DTS.....	29
2.6	Conducted Spurious Emissions (Non-Restricted Band) .....	32
2.6.1	Test Guidance: ANSI C63.10-2013, Clause 6.7 .....	32
2.6.2	Deviations From The Standard: .....	32
2.6.3	Test Equipment.....	32

2.6.4	Test Sample Verification, Configuration & Modifications .....	33
2.6.5	Conducted Emissions Data: LoRa DTS.....	33
2.7	EUT Positioning Assessment.....	39
2.8	Radiated Spurious Emissions within restricted band .....	40
2.8.1	Test Guidance: ANSI C63.10-2013, Clause 13.4.2 .....	41
2.8.2	Deviations From The Standard: .....	42
2.8.3	Test Equipment.....	42
2.8.4	Test Sample Verification, Configuration & Modifications .....	42
2.8.5	Radiated Emissions Data: LoRa DTS with LTE EM7455 Modem .....	43
2.9	Radiated Emissions Receive Mode .....	49
2.9.1	Test Guidance:.....	49
2.9.2	Deviations From The Standard: .....	49
2.9.3	Test Equipment.....	50
2.9.4	Test Sample Verification, Configuration & Modifications .....	50
2.9.5	Radiated Emissions Data maximization: with LTE EM7455 Modem .....	51
2.10	AC Power Line Conducted Emissions Receive Mode .....	54
2.10.1	Test Guidance.....	54
2.10.2	Deviations From The Standard .....	55
2.10.3	Test Equipment.....	55
2.10.4	Test Sample Verification, Configuration & Modifications .....	55
2.10.5	Conducted Emissions Data.....	56
2.11	RF Exposure .....	58
3.0	TEST FACILITY .....	59
3.1	Location.....	59
3.2	Grounding Plan .....	59
3.3	Power Supply .....	59
Appendix A – EUT Family Information .....		60
Appendix B – Test Setup Block Diagram .....		61

## **1.0 INTRODUCTION**

### **1.1 Scope**

The purpose of this report is to present the results of compliance testing performed in accordance with FCC Part 15.247 and ANSI C63.10-2013 to gain FCC Certification Authorization for Low-Power License-Exempt transmitters. All test procedures, limits, criteria, and results described in this report apply only to the Tektelic Communication Inc. Kona Mega Gateway test sample, referred to herein as the EUT (Equipment Under Test).

This report does not imply product endorsement by the Electronics Test Centre, A2LA, nor any Canadian Government agency.

### **1.2 Applicant**

This test report has been prepared for Tektelic Communication Inc., located in Calgary, Alberta, Canada.

### **1.3 Test Sample Description**

As provided to ETC (Airdrie) by Tektelic Communication Inc.:

<b>Product Name:</b>		Kona Mega Gateway
<b>Lora Radio</b>	<b>Frequency Band</b>	902 – 928 MHz
	<b>Frequency Range</b>	923.3 – 927.5 MHz
	<b>Type of Modulation</b>	LoRa 500KHz DTS
<b>LoRa Associated Antennas</b>	<b>1</b>	Isotropic Model # WTTX-OMNI920-8-NJ, 8 dBi antenna
<b>EUT</b>	<b>Model#</b>	T0005010
	<b>Serial#</b>	2239K0001
<b>Pre-Certified LTE Modem</b>	<b>Model#</b>	EM7455
	<b>FCC ID#</b>	N7NEM7455
<b>Variant Model#</b>		T0004978, T0004982, T0004988, T0004992, T0004996 T0005000, T0005004, T0005006, T0005008, T0005010
<b>Power supply:</b>		DC Powered

This Kona Mega Gateway T0005010 model contains all of the equipment options in this family of products. This model was chosen as a worst-case condition for emission testing.

Detail differences between the models are given in Kona Mega Gateway family exhibit in Appendix A of this test report.

### **1.4 General Test Conditions**

The EUT was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. All inputs and outputs to and from other equipment associated with the EUT were adequately simulated.

Where relevant, the EUT was only tested using the monitoring methods and test criteria defined in this report.

The environmental conditions are recorded during each test, and are reported in the relevant sections of this document.

## 1.5 Reference Standards

Standards	Description
FCC, title 47 CFR § 15.247	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
FCC, title 47 CFR § 15.207	General Requirements for Compliance of Radio Apparatus
FCC, title 47 CFR § 15.209	Intentional radiator, conducted emission limits
ANSI C63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio – Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 KHz to 40 GHz
558074 D01 15.247 Meas Guidance v05r02	Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The FCC Rules

## 1.6 Test Methodology

Test methods are specified in the Basic Standard as referenced and/or modified by the Product Standard in the part of Section 2 of this report associated with each particular test case. Separate test report is provided to customer for RX mode under SDOC.

### 1.6.1 Variations in Test Methodology

Any variance in methodology or deviation from the reference Standard is documented in the part of Section 2 of this report associated with each particular Test Case.

### 1.6.2 Test Sample Verification, Configuration & Modifications

EUT setup, configuration, protocols for operation and monitoring of EUT functions, and any modifications performed in order to meet the requirements, are detailed in each Test Case of Section 2 of this report.

### 1.6.3 Uncertainty of Measurement:

The factors contributing to measurement uncertainty are identified and calculated in accordance with CISPR 16-4-2: 2011.

This uncertainty estimate represents an expended uncertainty expressed at approximately 95% confidence using a coverage factor of  $k = 2$ .

Test Method	Uncertainty
Radiated Emissions Level (9 KHz – 1 GHz)	±5.8 dB
Radiated Emissions Level (1 GHz – 18 GHz)	±4.9 dB
Radiated Emissions Level (18 GHz – 26.5 GHz)	±5.0 dB
Conducted Emissions Level (150 KHz – 30 MHz)	±3.0 dB
Uncertainty Conducted Power level	±0.5 dB
Uncertainty Conducted Spurious emission level	±0.6 dB
Uncertainty for Bandwidth test	±1.5 %

## 2.0 TEST CONCLUSION

### STATEMENT OF COMPLIANCE

The customer equipment referred to in this report was found to comply with the requirements, as summarized below.

The EUT was subjected to the following tests. Compliance status is reported as **Compliant** or **Non-compliant**. **N/A** indicates the test was Not Applicable to the EUT.

The measurement uncertainty is not accounted for determination of the statement of compliance. The statement of compliance is based only on the measurement value recorded.

**Note:** Maintenance of compliance is the responsibility of the Manufacturer. Any modifications to the product should be assessed to determine their potential impact on the compliance status of the EUT with respect to the standards detailed in this test report.

The following table summarizes the tests performed in terms of the specification, class or performance criterion applied, and the EUT modification state.

Test Case	Test Type	Specification	Test Sample	Modifications	Config.	Result
2.1	AC Conducted Emissions (TX)	15.207	Kona Mega Gateway	none	see § 2.1	Compliant
2.2	6dB Bandwidth	15.247(a)	Kona Mega Gateway	none	see § 2.2	Compliant
2.3	Max Output Power	15.247(d)	Kona Mega Gateway	none	see § 2.3	Compliant
2.4	Power Spectral Density	15.247(e)	Kona Mega Gateway	none	see § 2.4	Compliant
2.5	Band Edge	15.247(d)	Kona Mega Gateway	none	see § 2.5	Compliant
2.6	Conducted Spurious Emission (Non-Restricted Band)	15.247(d)	Kona Mega Gateway	none	see § 2.6	Compliant
2.7	EUT Position	ANSI C63.4	Kona Mega Gateway	none	see § 2.7	N/A Fix Position
2.8	Radiated Spurious Emission (TX Mode) (Restricted Band)	15.205, 15.209 15.247(d)	Kona Mega Gateway	none	see § 2.8	Compliant
2.9	Radiated Emission (RX Mode)	15.109	Kona Mega Gateway	none	see § 2.9	Compliant
2.10	AC Conducted Emissions (RX)	15.107	Kona Mega Gateway	none	see § 2.10	Compliant
2.11	RF Exposure	15.247(i)	Kona Mega Gateway	none	see § 2.11	Compliant

Refer to the test data for applicable test conditions.

## 2.1 AC Power Line Conducted Emissions: Transmit Mode

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Janet Mijares	Standard: FCC Part 15.207
Date: 2022-10-04 (20.7°C, 30.1% RH)	Basic Standard: ANSI C63.10: 2013
<b>EUT status: Compliant</b>	

### Specification:

Frequency (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50
<b>Criteria:</b> The conducted emissions produced by a device shall not exceed the limits as specified.		
*Limits decrease linearly with the logarithm of the frequency*		

### 2.1.1 Test Guidance

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

The EUT is powered through a 50µH Line Impedance Stabilizing Network (LISN) which is placed 80cm away from the EUT. For tabletop equipment, a vertical ground plane is placed 40cm from the edge of the table. Lastly, the spectrum analyzer is connected to the LISN via armored cable run from the control room to the test chamber. Both the LISN and vertical ground plane are grounded to the reference ground plane on the chamber floor.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.



## 2.1.2 Deviations From The Standard

There were no deviations from the EUT setup or methodology specified in the standard.

## 2.1.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A FW A.25.05	6130	2022-07-12	2023-07-12
LISN 150kHz to 30MHz	Com-Power	LI-215A	6180	2022-08-09	2024-08-09
T/H Data Logger	Extech Ins.	42270	5892	2022-04-07	2023-04-07

## 2.1.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. EUT has option of POE. EUT tested for conducted emission on AC side of POE adaptor model#PD-9501GO-ET/AC and serial#C19026674000302. Customer is not providing POE adaptor with EUT.

The EUT met the requirements without modification.

### Diagram of setup for Conducted Emissions testing:

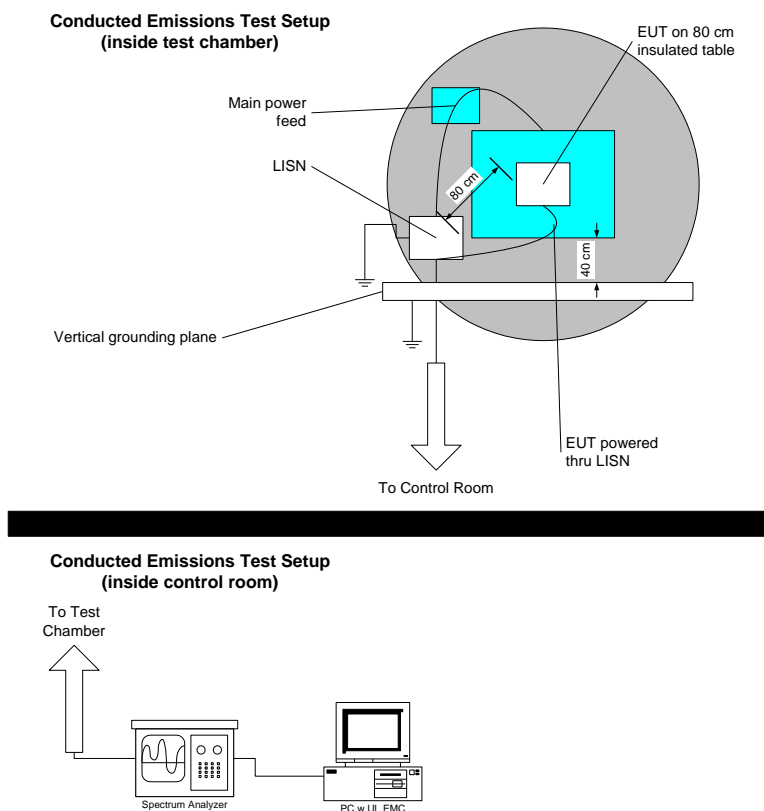

## 2.1.5 Conducted Emissions Data

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of limit at the frequency measured, and the Delta between the result and the limit.

### EUT with LTE EM7455

Freq. Marker	Freq. (MHz)	Raw reading (dBμV)	Det.	LISN Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBμV)	FCC 207 Limit (dBμV)	Delta (dB)	L / N
1	.51162	28.28	LnAv	0	9.8	38.08	46	-7.92	Line
2	2.95718	19.39	LnAv	0	9.9	29.29	46	-16.71	Line
3	4.84727	18.32	LnAv	0	10	28.32	46	-17.68	Line
4	13.48129	19.17	LnAv	0	10.4	29.57	50	-20.43	Line
1	.50043	28.63	LnAv	0	9.8	38.43	46	-7.57	Neutral
2	4.78016	24.3	LnAv	0	10	34.3	46	-11.7	Neutral
3	13.35826	20.28	LnAv	0	10.4	30.68	50	-19.32	Neutral


**Meter Reading in dBμV + LISN Factor in dB + Gain/Loss Factor in dB = Corrected Emission Strength in dBμV.**

Notes:


- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- LnAv = Linear Average detector

**Negative values for Delta indicate compliance.**

## EUT with LTE EM7455 Plot of Conducted Emissions: LINE

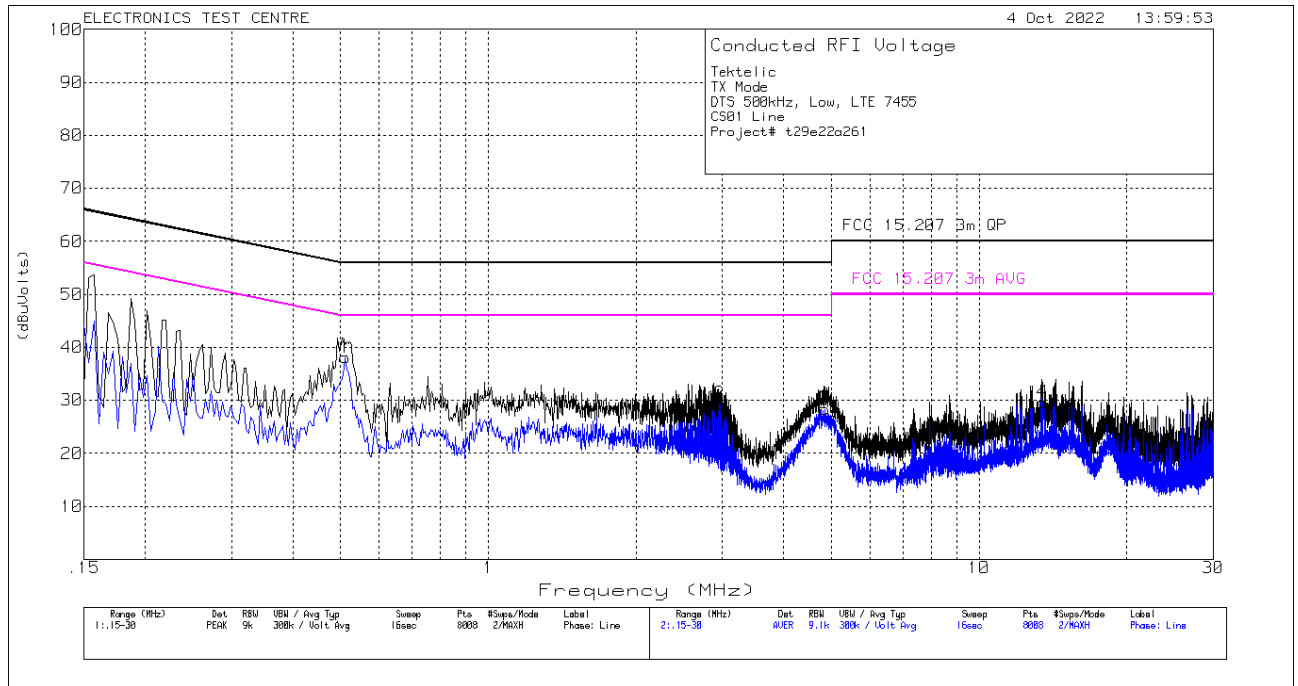

## Plot of Conducted Emissions: Neutral

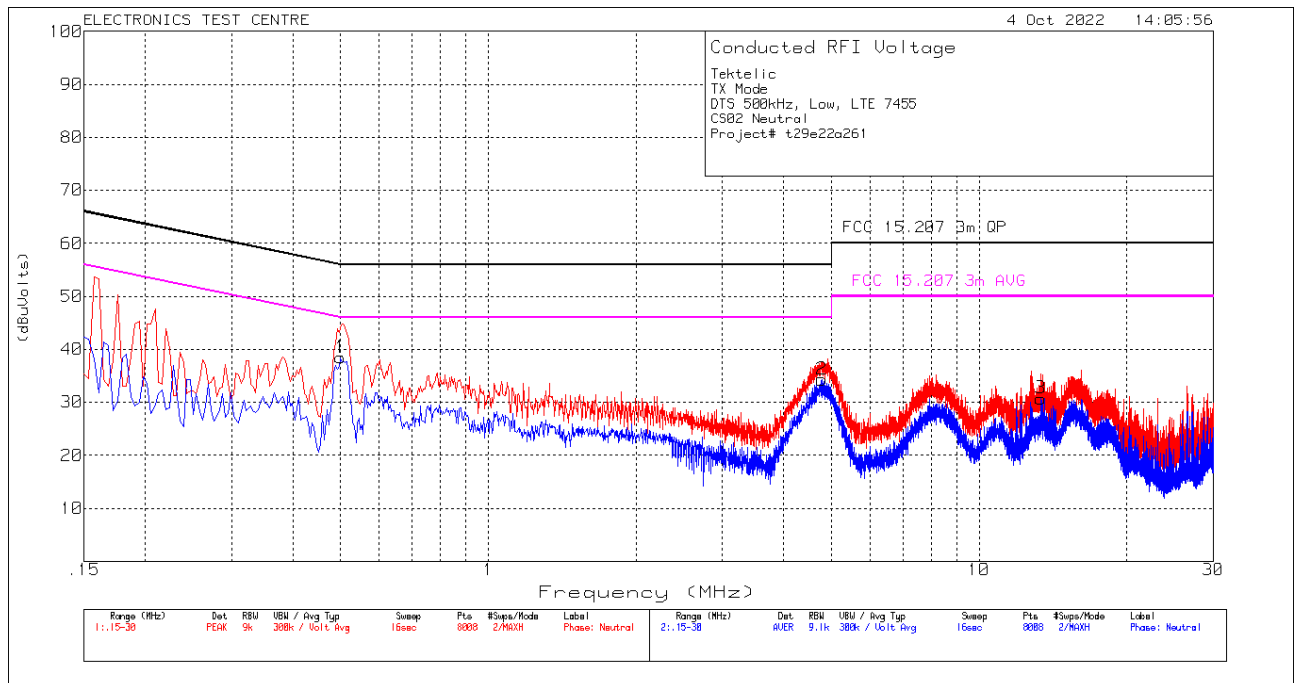

## 2.2 6dB Bandwidth

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Imran Akram/ Janet Mijares	Standard: FCC PART 15.247
Date: 2022-10-06/07 (20.7°C, 25.2%RH)	Basic Standard: ANSI C63.10-2013 FCC OET KDB 558074
EUT status: Compliant	

**Specification: FCC Part 15.247 (a, 2), FCC 15.215 (c)**

**Criteria:** Systems using digital modulation techniques may operate in the 902-928 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.2.1 Test Guidance: ANSI C63.10-2013, Clause 11.8 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

For DTS the spectrum analyzer is set for a frequency span  $\geq (2 * OBW)$ ,  $\leq (5 * OBW)$ , selected to clearly display the channel. The RBW is set to 100 kHz. The VBW is set to  $\geq (3 * RBW)$ . The Peak detector is used, with the trace set to Max Hold.

The automated 99% BW function of the spectrum analyzer is engaged, and the 6 dB OBW and/or 20 dB OBW is measured with the x dB function.

### 2.2.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.2.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Temp/Humidity	Extech	42270	5892	2022-04-07	2023-04-07
Attenuator	Fairview Microwave	SA18N5WA-10	6886	Cal. before each use	
Coaxial Cables (RF)	W.L. Gore	Pgr10R01036.0	-	Cal. before each use	

## 2.2.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

**Test setup diagrams for Occupied Bandwidth testing:**

**Conducted:**




## 2.2.5 Channel Occupied Bandwidth Data: LoRa DTS


Mode of operation	Channel	Freq. [MHz]	6 dB BW [kHz]		Limit BW [kHz]
			Ant Port 0	Ant Port 1	
LoRa 500 KHz	Low	923.3	612.8	611.7	≥ 500
	Mid	925.1	612.8	612	
	High	927.5	611.6	611.2	

## Antenna Port 0


### Screen Captures from the spectrum analyzer: Low Channel

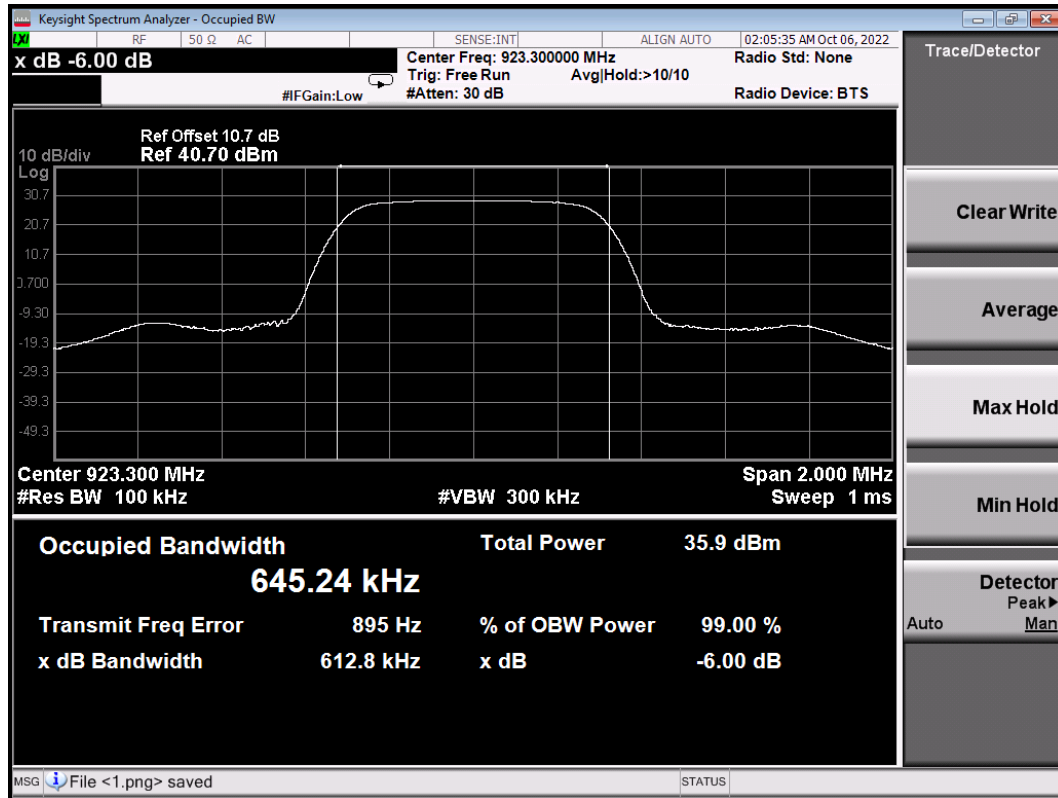

### Screen Captures from the spectrum analyzer: MID Channel

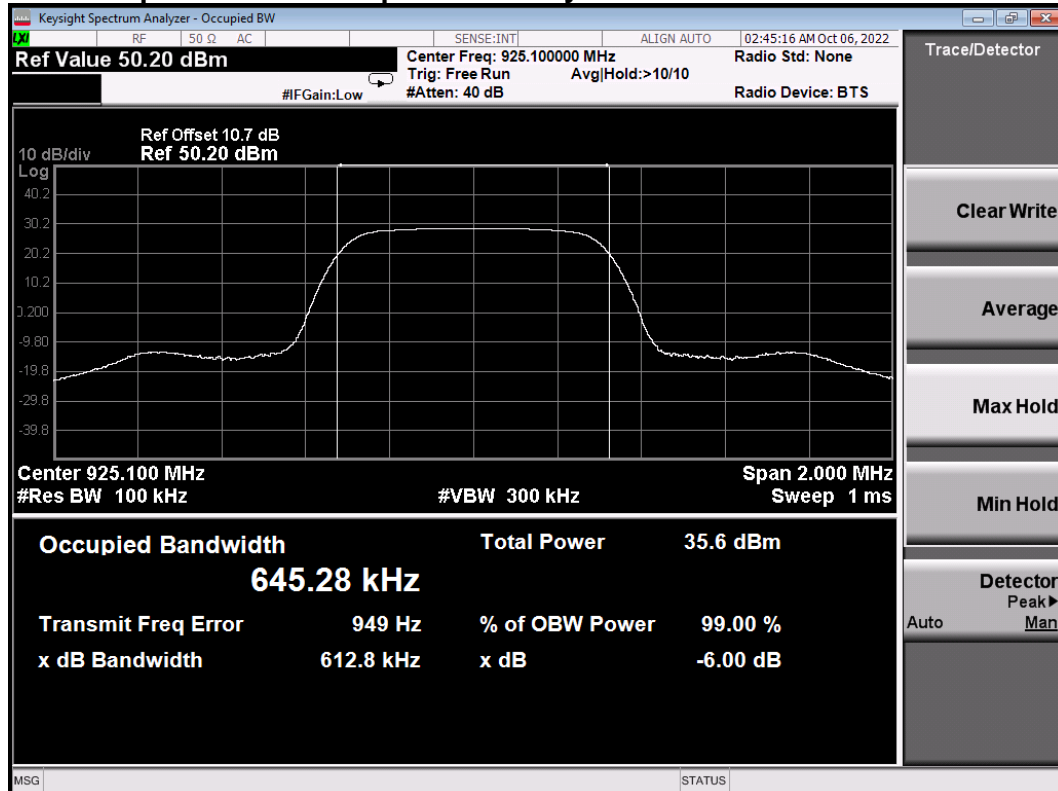


### Screen Captures from the spectrum analyzer: High Channel

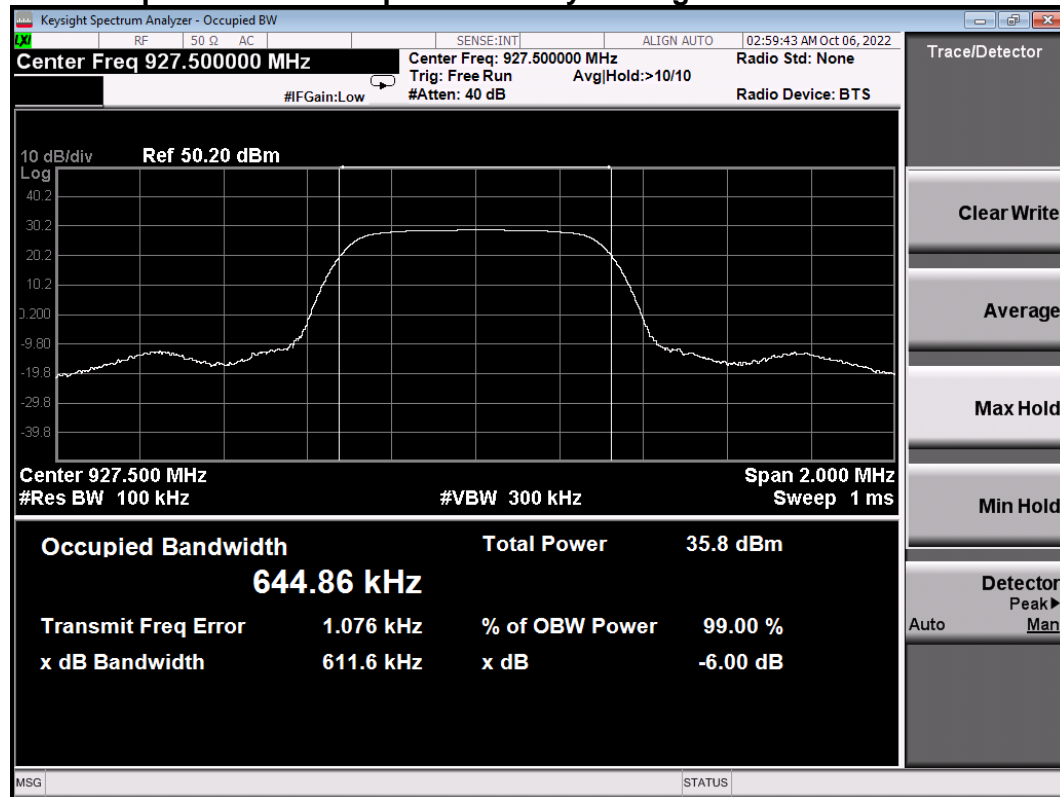


### Antenna Port 1


### Screen Captures from the spectrum analyzer: Low Channel

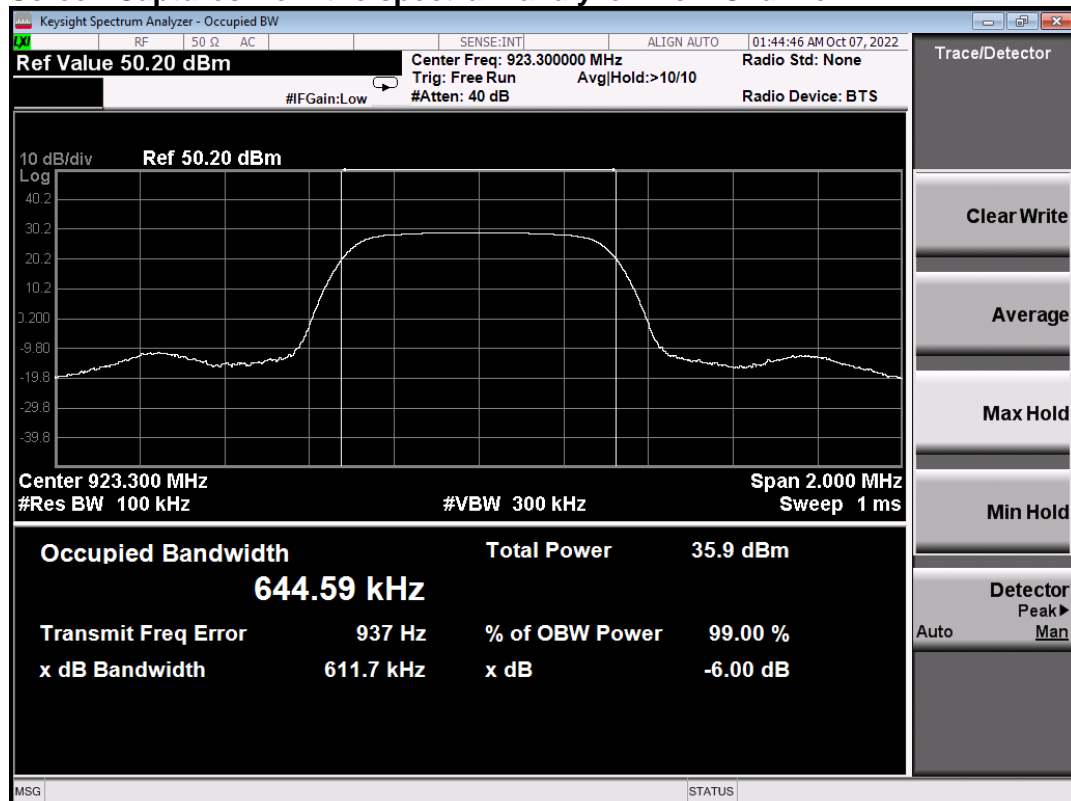

## Screen Captures from the spectrum analyzer: MID Channel

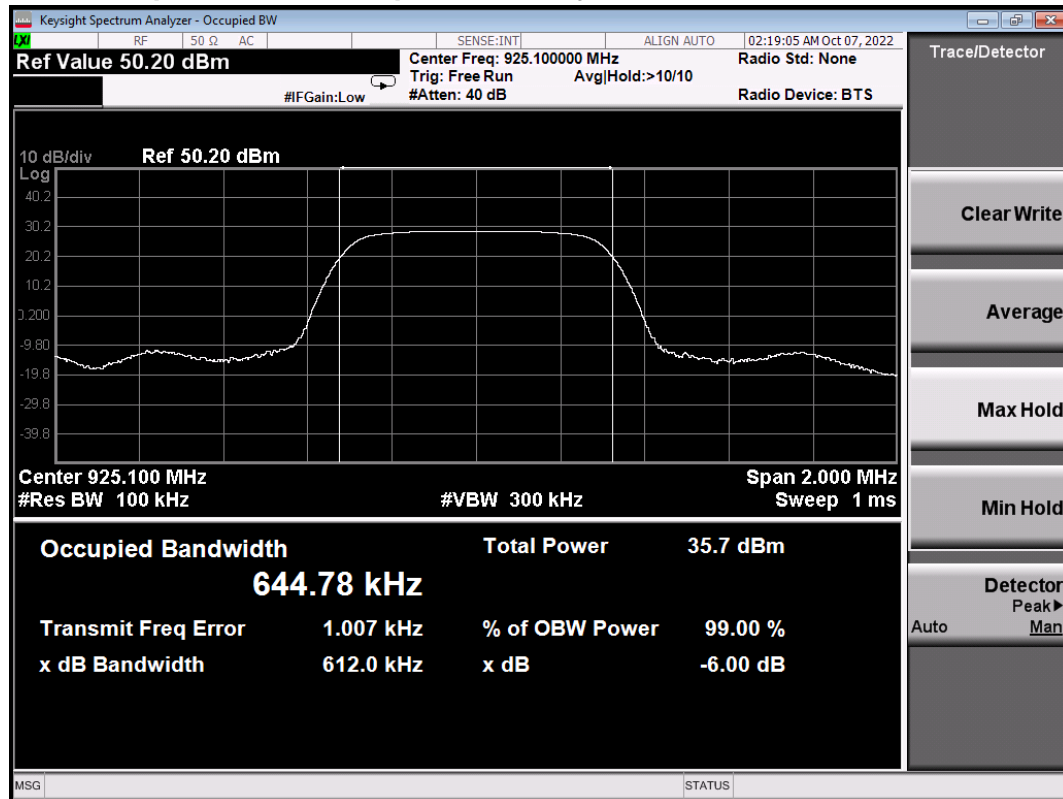

## Screen Captures from the spectrum analyzer: High Channel

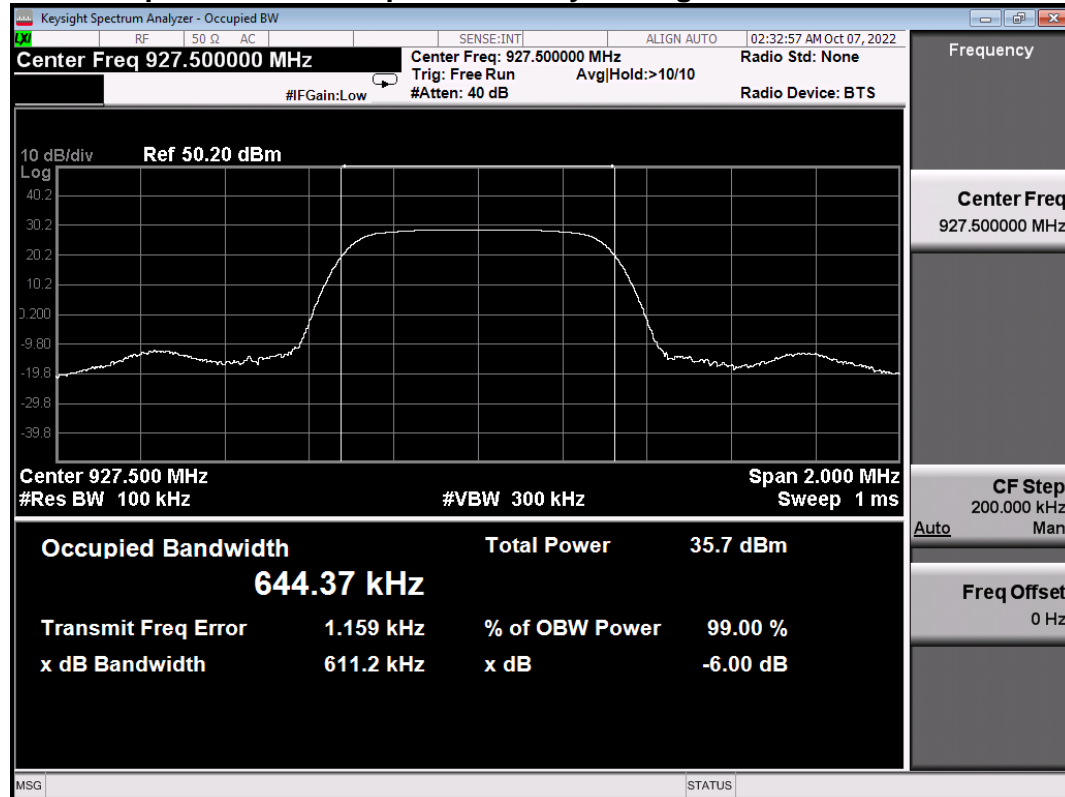



## 2.3 Max Average Output Power

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Imran Akram/ Janet Mijares	Standard: FCC PART 15.247
Date: 2022-10-06/07 (20.7°C, 25.2% RH)	Basic Standard: ANSI C63.10: 2013 FCC OET KDB 558074
<b>EUT status: Compliant</b>	

**Specification: FCC Part 15.247(b, 3)**

**Criteria (3)** For systems using digital modulation in the 902-928 MHz bands: 1 Watt.

### 2.3.1 Test Guidance: ANSI C63.10-2013, Clause 11.9.2.2.2/ FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Output Power Method AVGSA-1 For LoRa DTS	
Span	≥ 1.5 times the OBW
RBW	1 – 5 % of the OBW, ≤ 1 MHz
VBW	≥ 3 x RBW
Number of Points in sweep	≥ 2 x Span / RBW
Sweep time	Auto
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle ≥98%)
Trace Average	100 traces in power Averaging (RMS)
Power measured	Integrated the spectrum across the OBW of the signal using the S/A band power measurement function, with band limit set equal to the OBW band edge.

### 2.3.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.3.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Temp/Humidity	Extech Ins.	42270	5892	2022-04-07	2023-04-07
Attenuator	Fairview Microwave	SA18N5WA-10	6886	Cal. before each use	
Coaxial Cables (RF)	W.L. Gore	Pgr10R01036.0	-	Cal. before each use	

### 2.3.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

**Test setup diagrams for Peak Power testing:**

**Conducted:**




### 2.3.5 Max Average Output Power Data: LoRa DTS


Mode of Operation	Channel	Freq. [MHz]	Antenna Port 0	Antenna Port 1	Out Put Power Limit (dBm)
			Out Put Power (dBm)	Out Put Power (dBm)	
LoRa 500 kHz	Low	923.3	28.36	28.37	30
	Mid	925.1	28.07	28.13	30
	High	927.5	28.39	28.15	30

## Antenna Port 0


### Screen Captures from the spectrum analyzer Low Channel

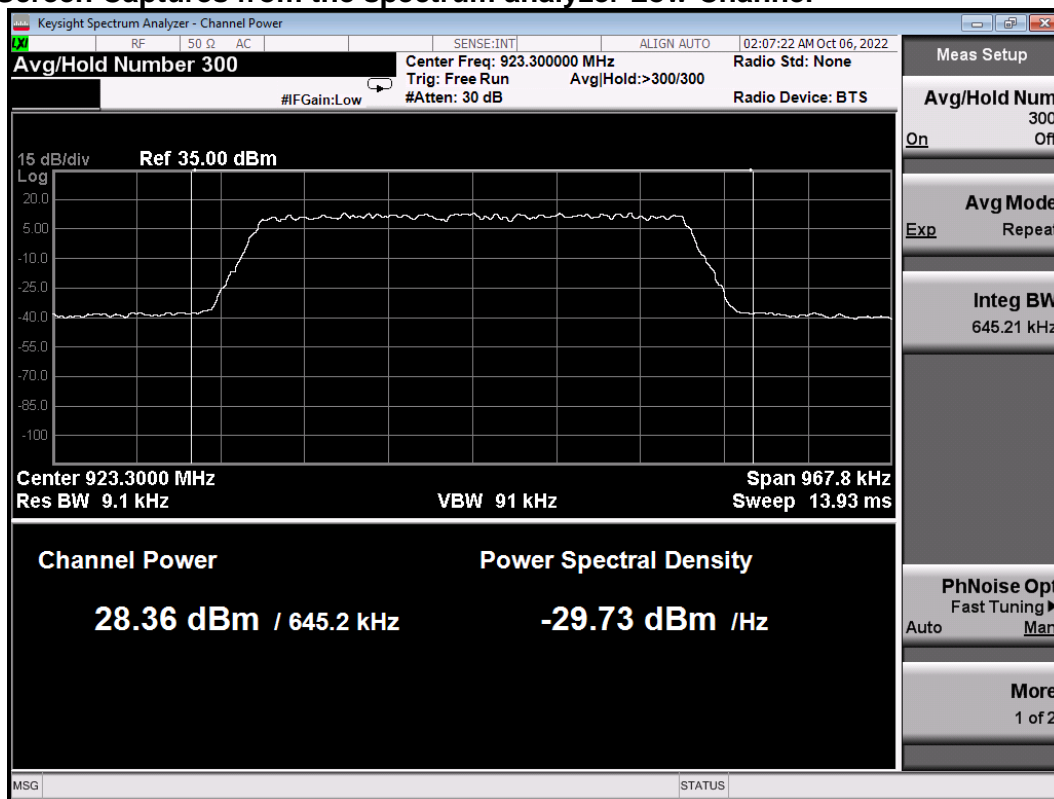

### Screen Captures from the spectrum analyzer: MID Channel

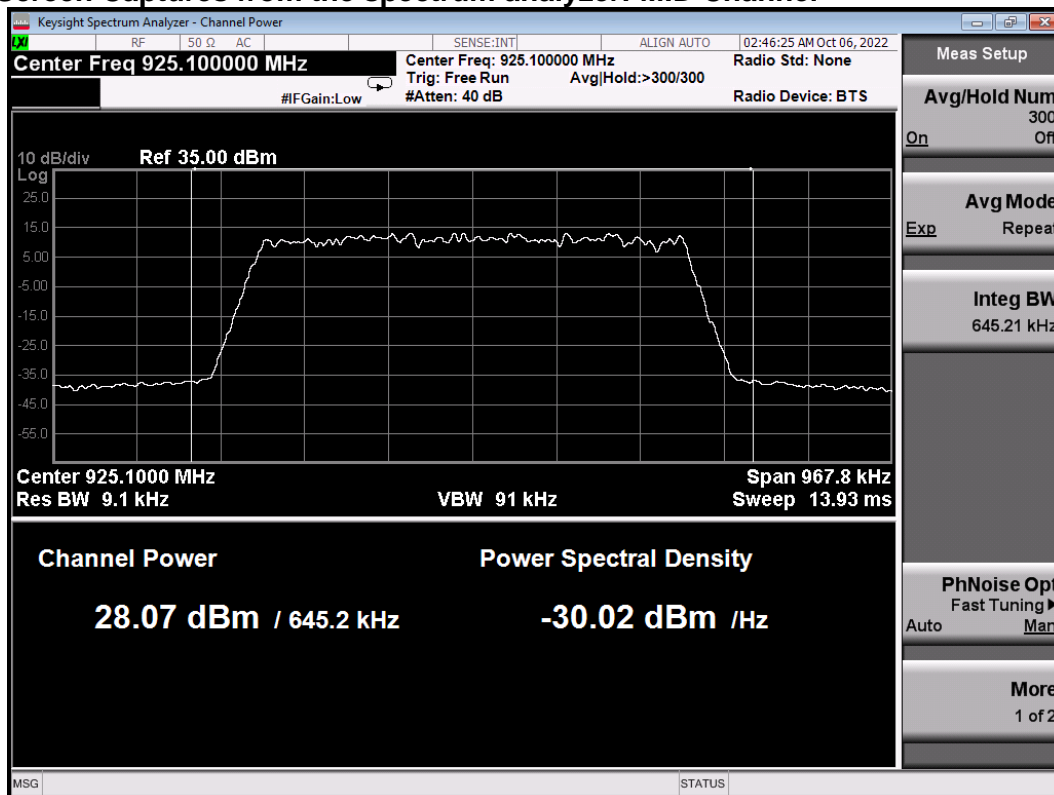


## Screen Captures from the spectrum analyzer: High Channel

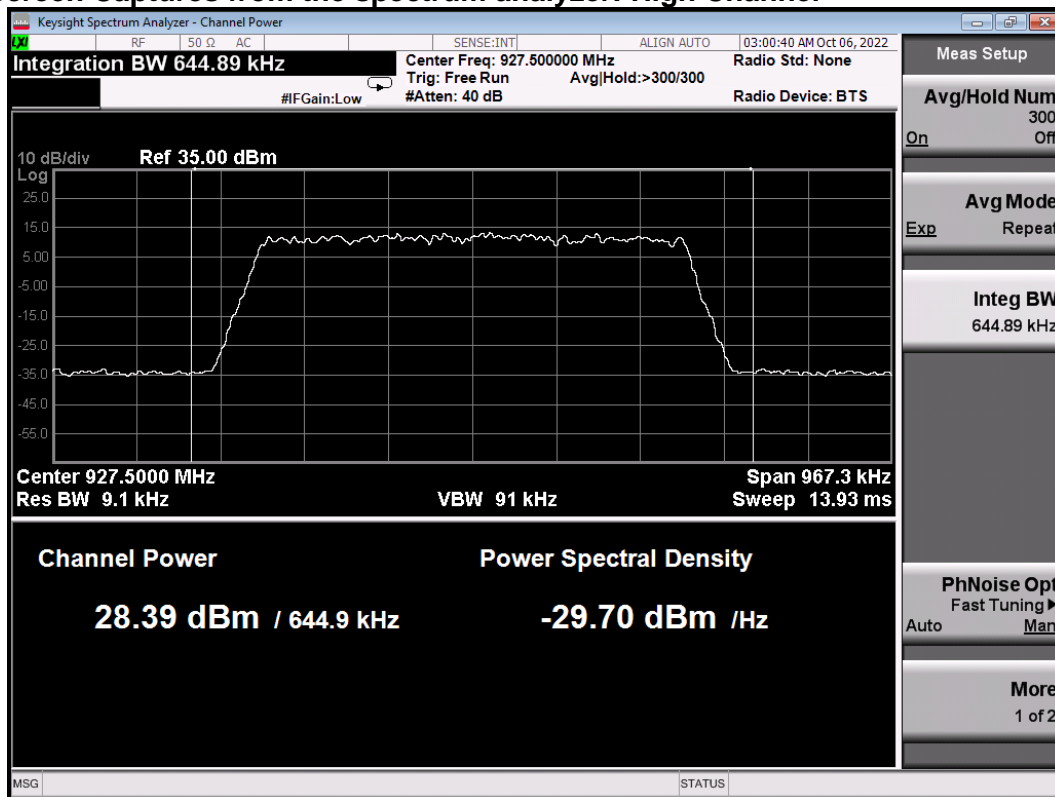


## Antenna Port 1


## Screen Captures from the spectrum analyzer Low Channels

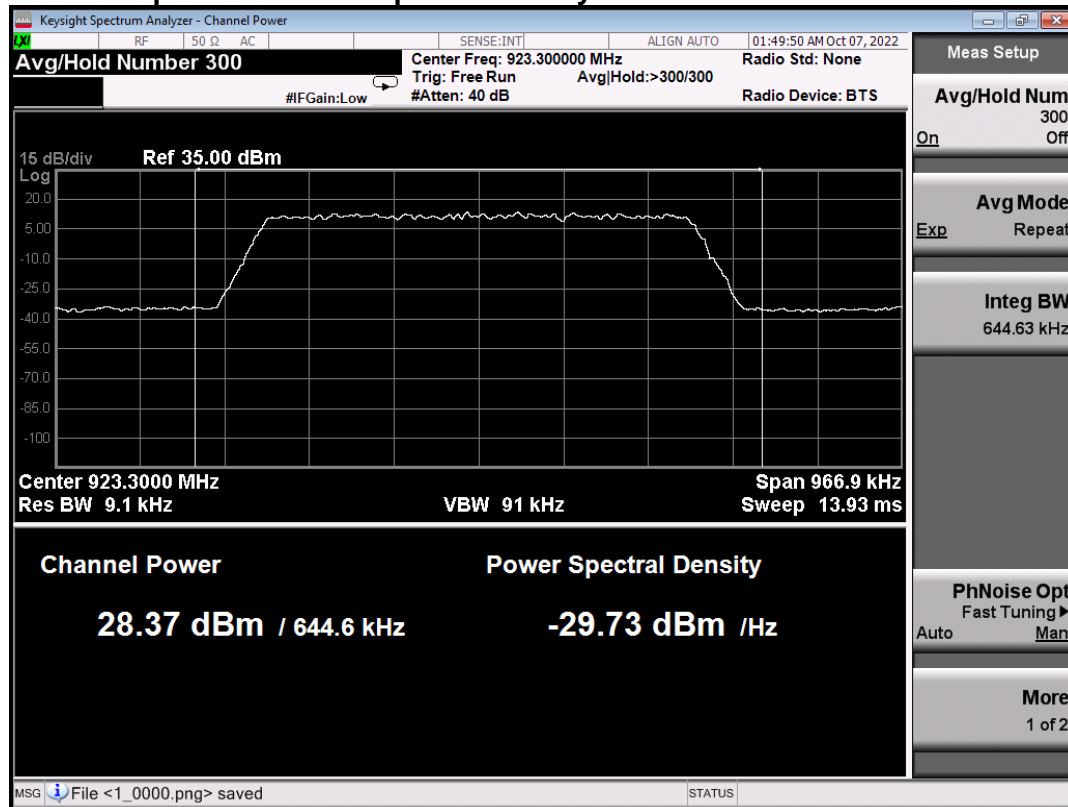

### Screen Captures from the spectrum analyzer: MID Channel

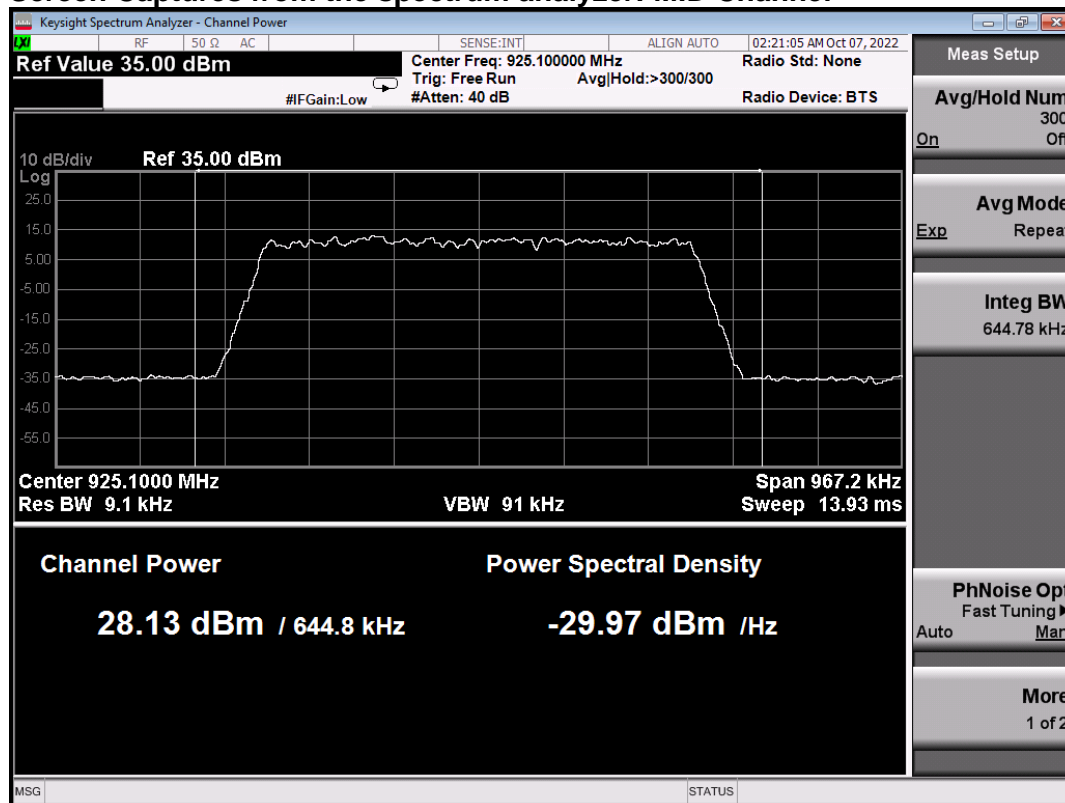

### Screen Captures from the spectrum analyzer: High Channel

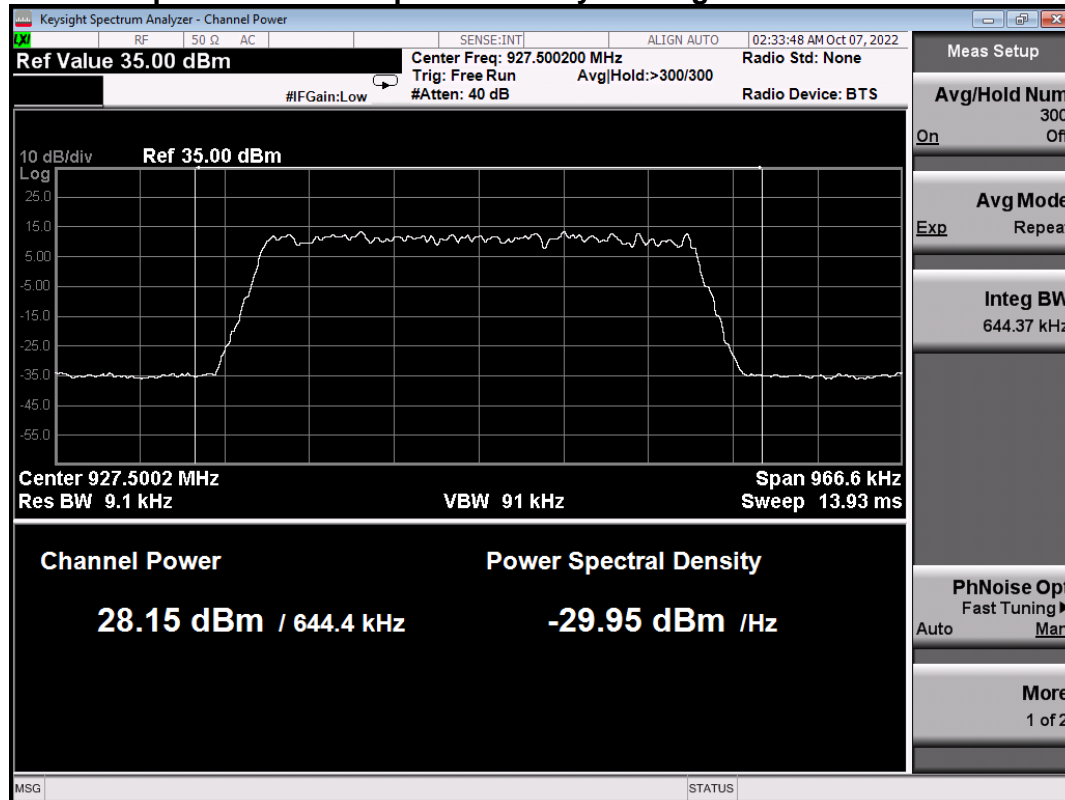

## 2.4 Power Spectral Density

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Imran Akram/ Janet Mijares	Standard: FCC PART 15.247
Date: 2022-10-06/07 (20.5°C,25.2% RH)	Basic Standard: ANSI C63.10: 2013

**EUT status: Compliant**

### Specification: FCC Part 15.247(e)

**Criteria** For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 2.4.1 Test Guidance: ANSI C63.10-2013, Clause 11.10.3 / FCC OET KDB 558074

This measurement is performed at low, mid and high frequencies, in continuous transmission, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

Method AVGPS-1 For DTS	
Span	$\geq 1.5$ times the OBW
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
VBW	$\geq 3 \times \text{RBW}$
Number of Points in sweep	$\geq 2 \times \text{Span} / \text{RBW}$
Sweep time	auto couple
Detector	RMS (Power Averaging)
Sweep trigger	Free Run (Duty Cycle $\geq 98\%$ )
Trace Average	Minimum 100 traces in power Averaging (RMS)
PSD measured	Use the peak marker function to determine the maximum amplitude level.
If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).	

#### 2.4.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

#### 2.4.3 Test Equipment

Testing was performed with this equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Temp/Humidity	Extech Ins.	42270	5892	2022-04-07	2023-04-07
Attenuator	Fairview Microwave	SA18N5WA-10	6886	Cal. before each use	
Coaxial Cables (RF)	W.L. Gore	Pgr10R01036.0	-	Cal. before each use	

#### 2.4.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.

**Test setup diagrams for Peak Power Spectral Density testing:  
Conducted:**




## 2.4.5 Average PSD Data LoRa DTS

Mode of operation	Channel	Freq. [MHz]	Antenna Port 0	Antenna Port 1	PSD Limit (dBm)
			PSD (dBm)	PSD (dBm)	
LoRa 500 KHz	Low	923.3	7.854	7.888	8
	Mid	925.1	7.673	7.789	8
	High	927.5	7.671	7.818	8


### Antenna Port 0

#### Screen Capture from Spectrum Analyzer: Low Channel

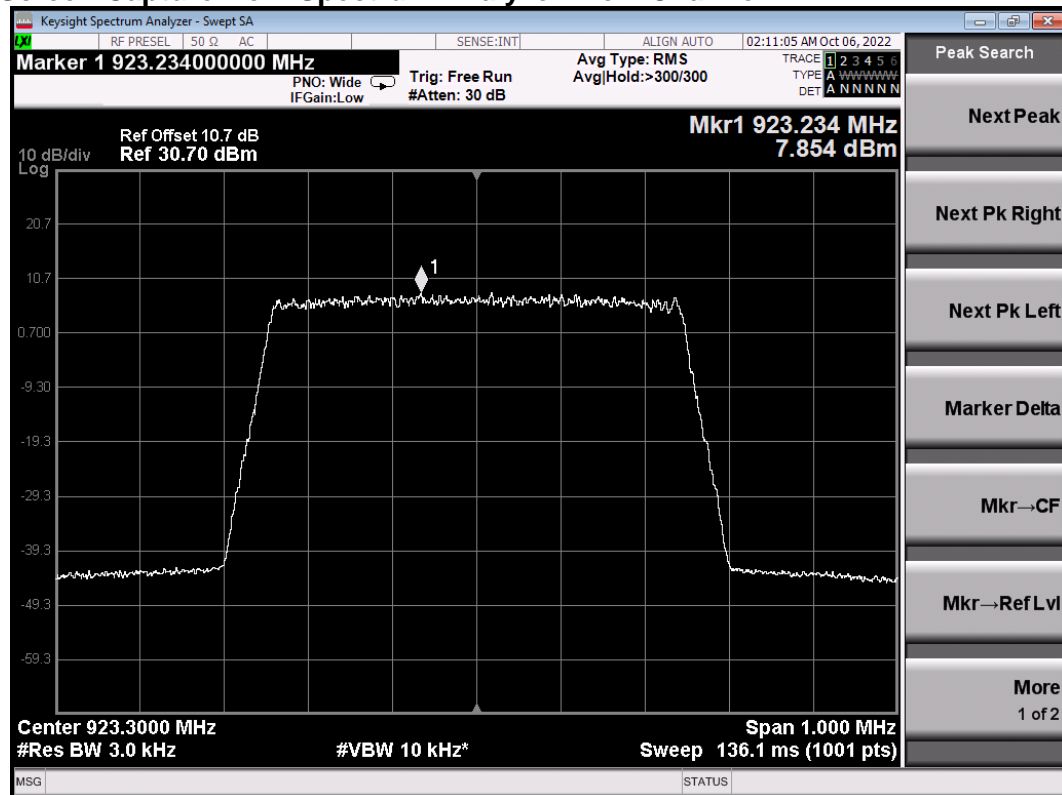




## Screen Capture from Spectrum Analyzer: MID Channel

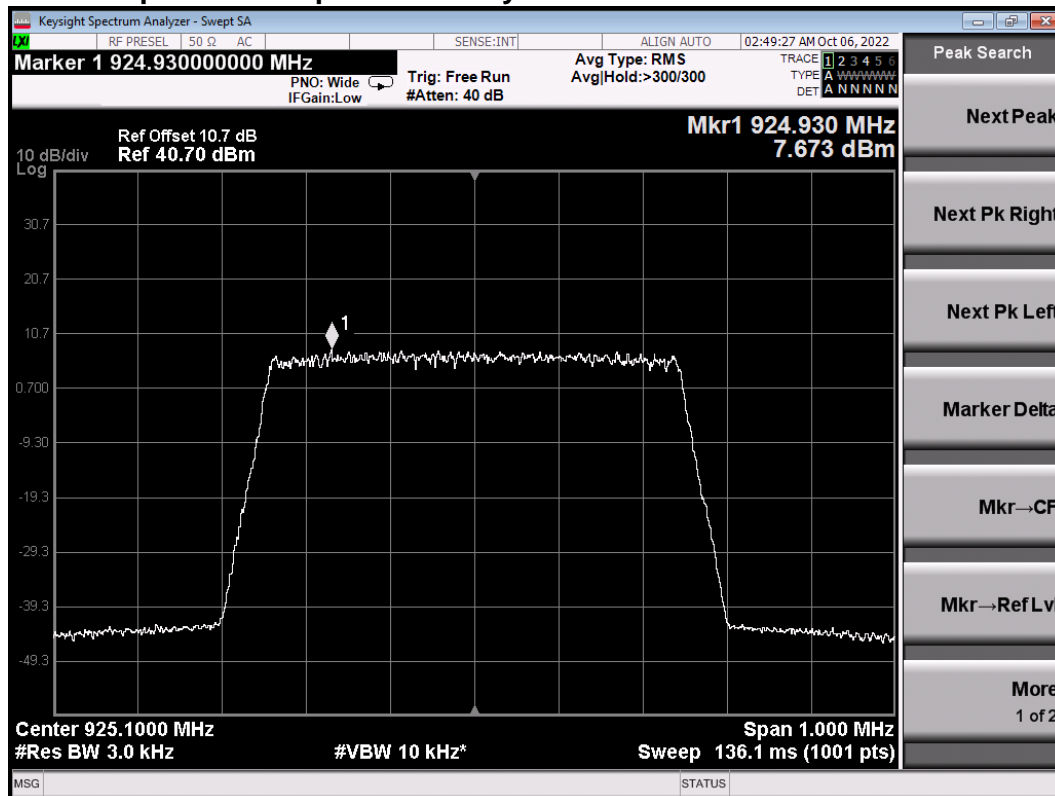


## Screen Capture from Spectrum Analyzer: High Channel

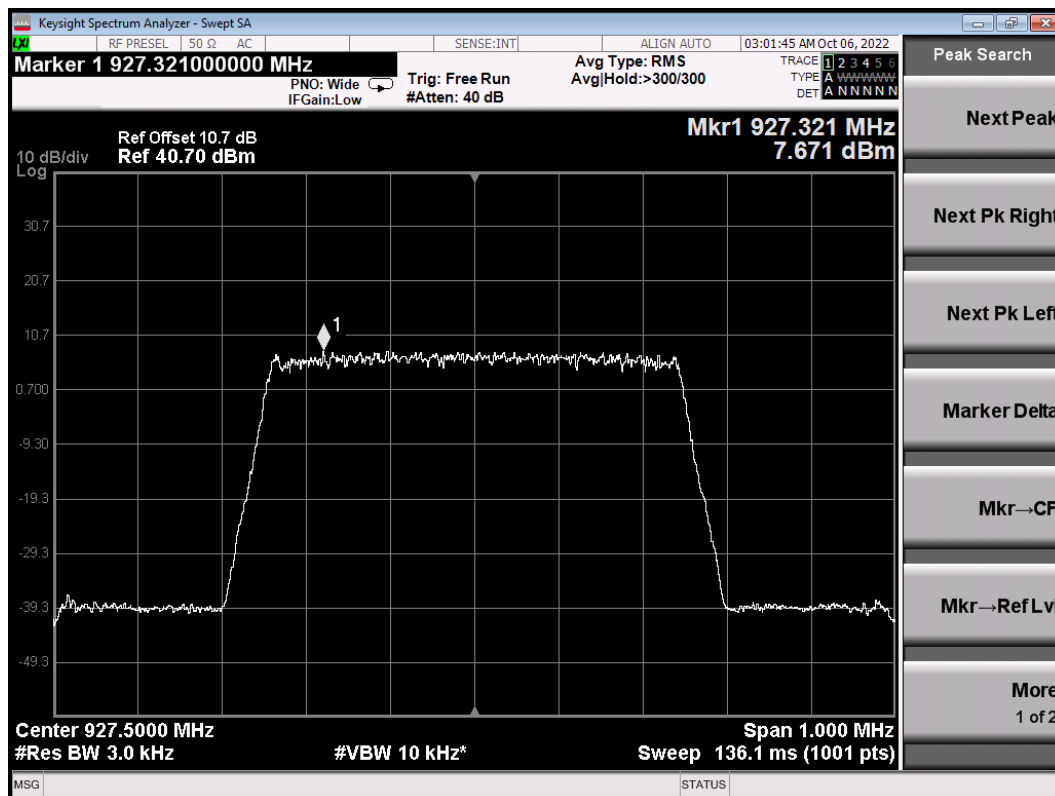


## Antenna Port 1


### Screen Capture from Spectrum Analyzer: Low Channel

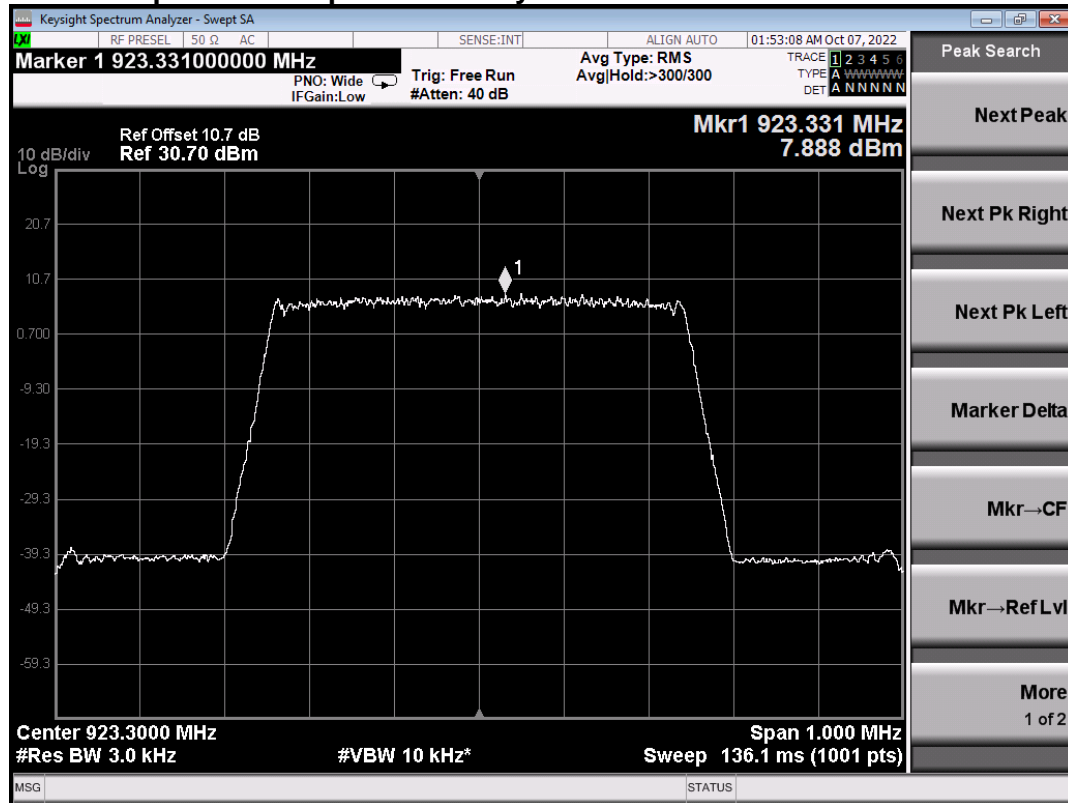

### Screen Capture from Spectrum Analyzer: MID Channel

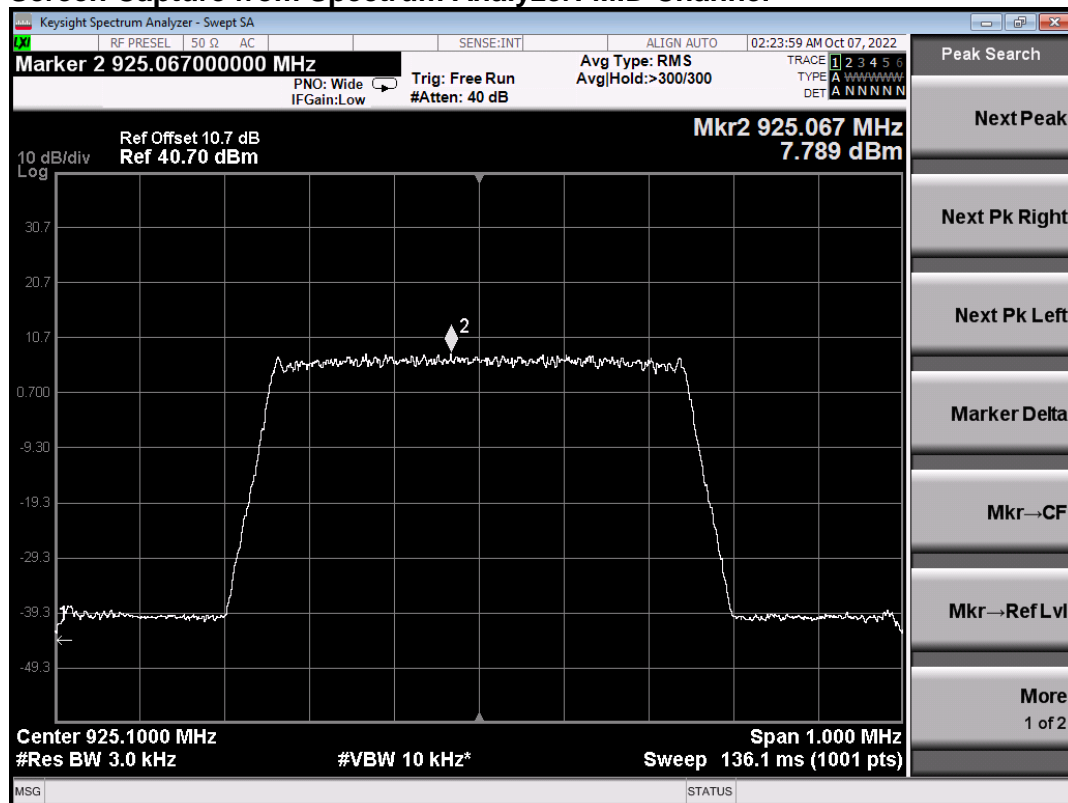

## Screen Capture from Spectrum Analyzer: High Channel

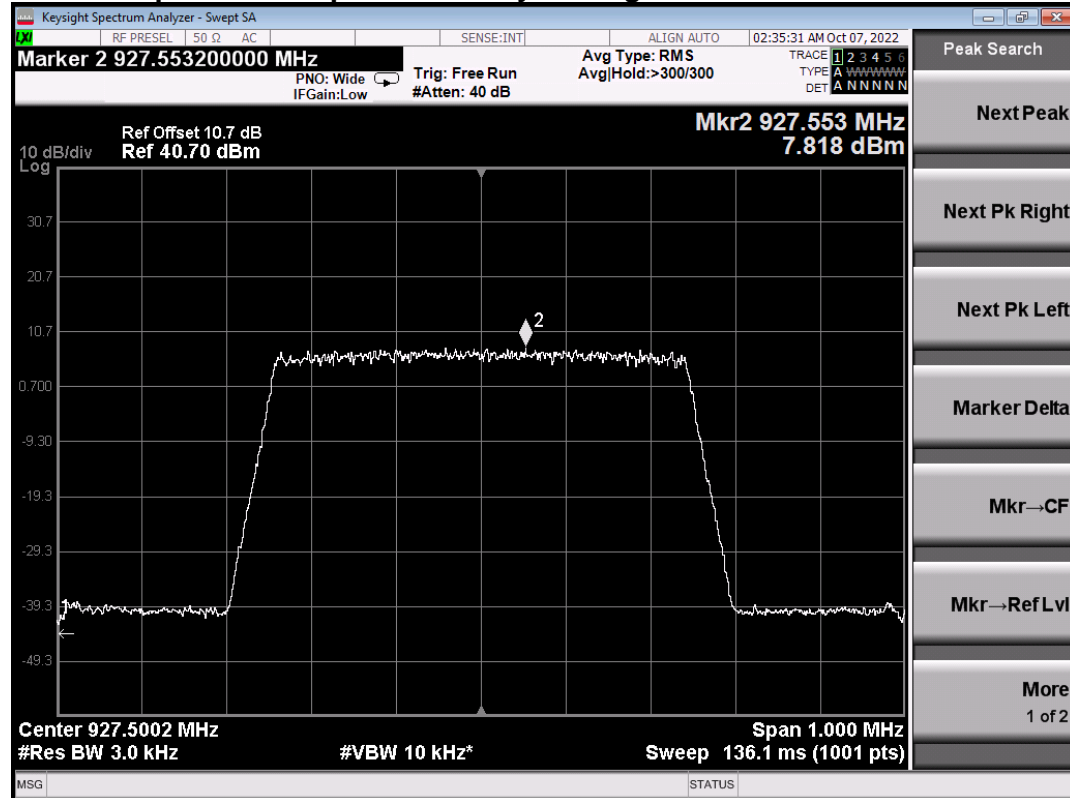

## 2.5 Band Edge Attenuation

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Imran Akram/ Janet Mijares	Standard: FCC PART 15.247
Date: 2022-10-06/07 (20.5°C, 25.2% RH)	Basic Standard: ANSI C63.10: 2013

**EUT status: Compliant**

### Specification: FCC Part 15.247(d)

**Criteria:** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 2.5.1 Test Guidance: ANSI C63.10-2013 Clause 11.13.2 & 6.10.4, 6.10.6 / FCC OET KDB 558074

This measurement is performed at the low and high frequencies, with modulation.

The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections.

The spectrum analyzer is set for a frequency span to show the band edge and the nearest channel. The RBW is set to  $\geq 100$  kHz. The VBW is set to  $\geq (\text{RBW} * 3)$ . The Peak detector is used, with the trace set to Max Hold.

The attenuation is measured with the Marker Delta function.

### 2.5.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.5.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Temp/Humidity	Extech Ins.	42270	5892	2022-04-07	2023-04-07
Attenuator	Fairview Microwave	SA18N5WA-10	6886	Cal. before each use	
Coaxial Cables (RF)	W.L. Gore	Pgr10R01036.0	-	Cal. before each use	


### 2.5.4 Test Sample Verification, Configuration & Modifications

The EUT was set to transmit continuously on a selected channel with test-specific software. The output was modulated as in normal operation.

The EUT met the requirements without modification.

Test setup diagrams for Band Edge Attenuation testing:

Conducted:




### 2.5.5 Band Edge Data LoRa DTS

Worse Case Data


Mode of operation	Channel	Antenna Port 0	Antenna Port 1	Attenuation Limit at Band Edge
		Attenuation at Band Edge	Attenuation at Band Edge	
Lora 500kHz	923.3	68.448dBc	69.002dBc	30 dBc
	927.5	42.159dBc	41.946dBc	30 dBc

## Antenna Port 0

### Screen Capture from the spectrum analyzer: Lower Band Edge

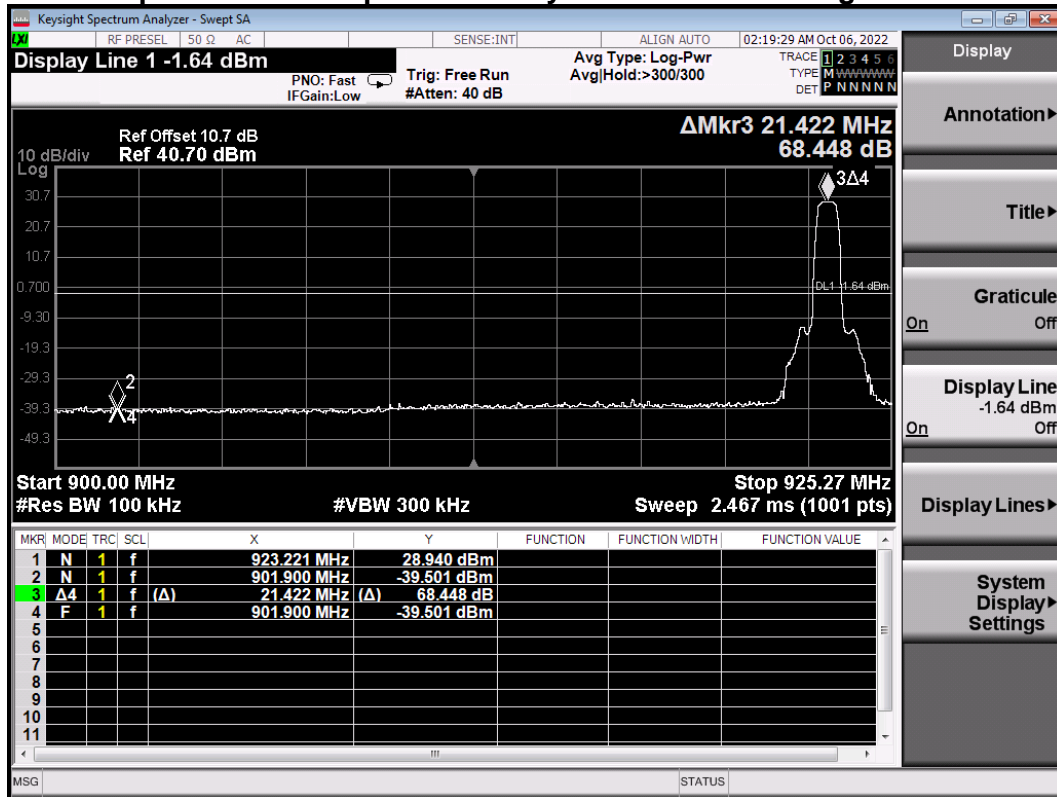


### Screen Capture from the spectrum analyzer: Upper Band Edge

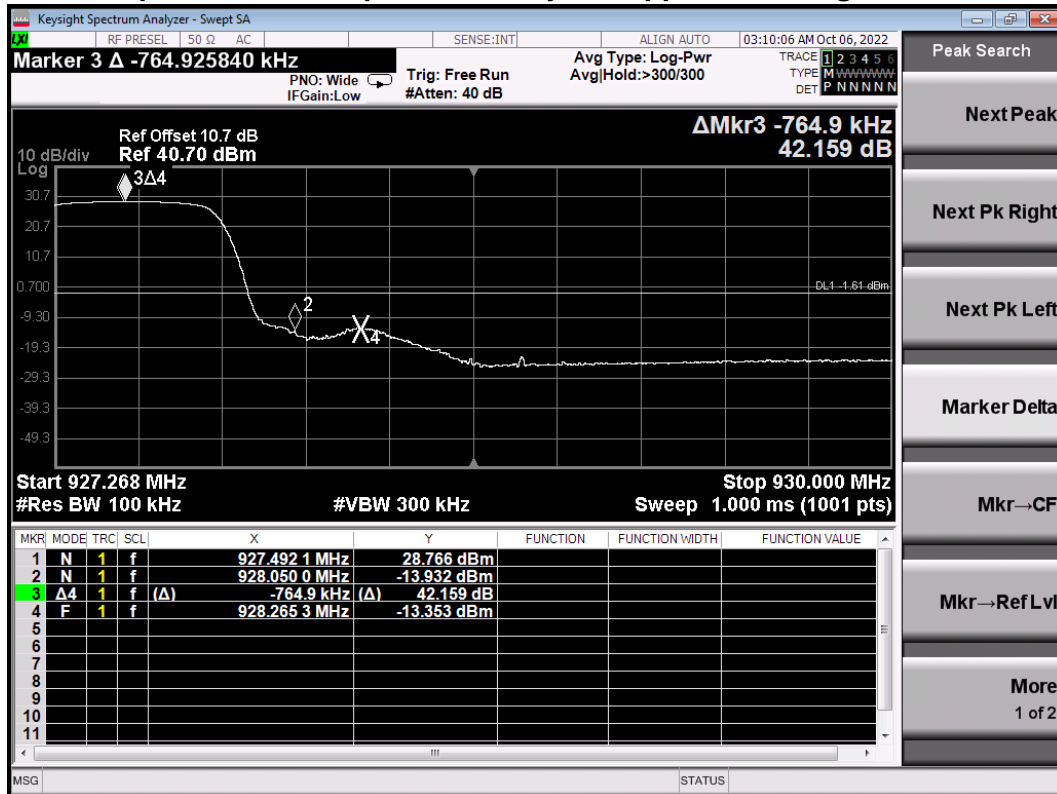


## Antenna Port 1

### Screen Capture from the spectrum analyzer: Lower Band Edge

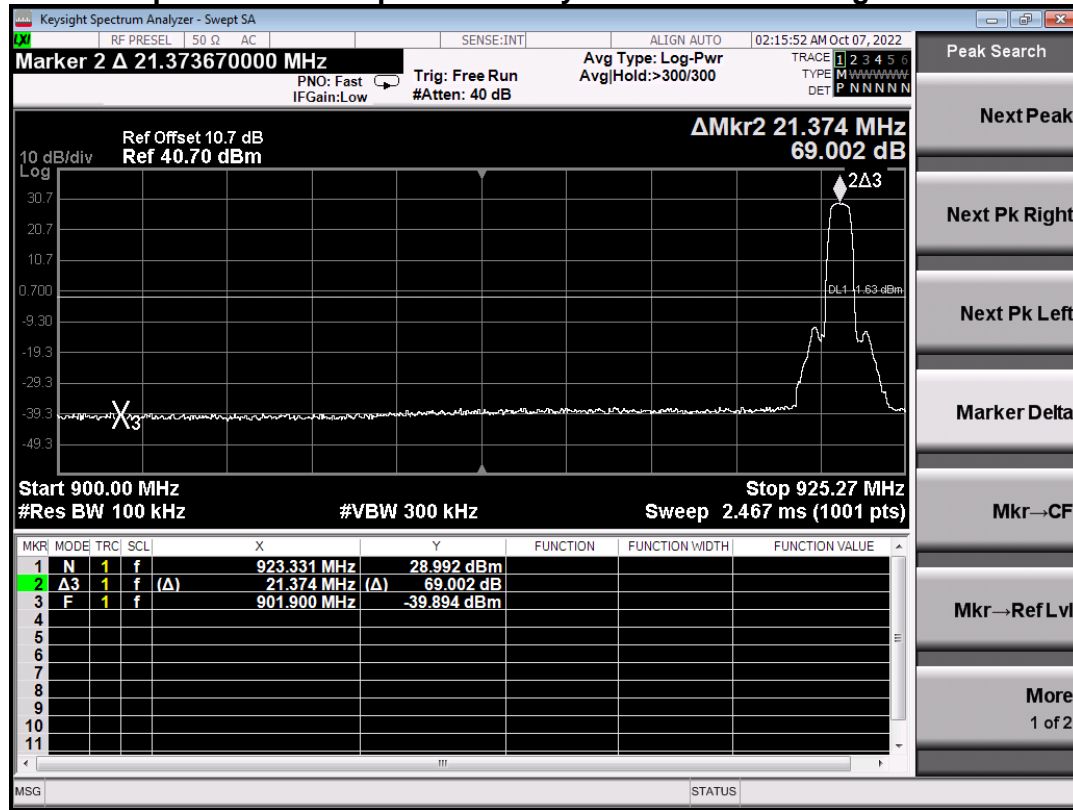

### Screen Capture from the spectrum analyzer: Upper Band Edge

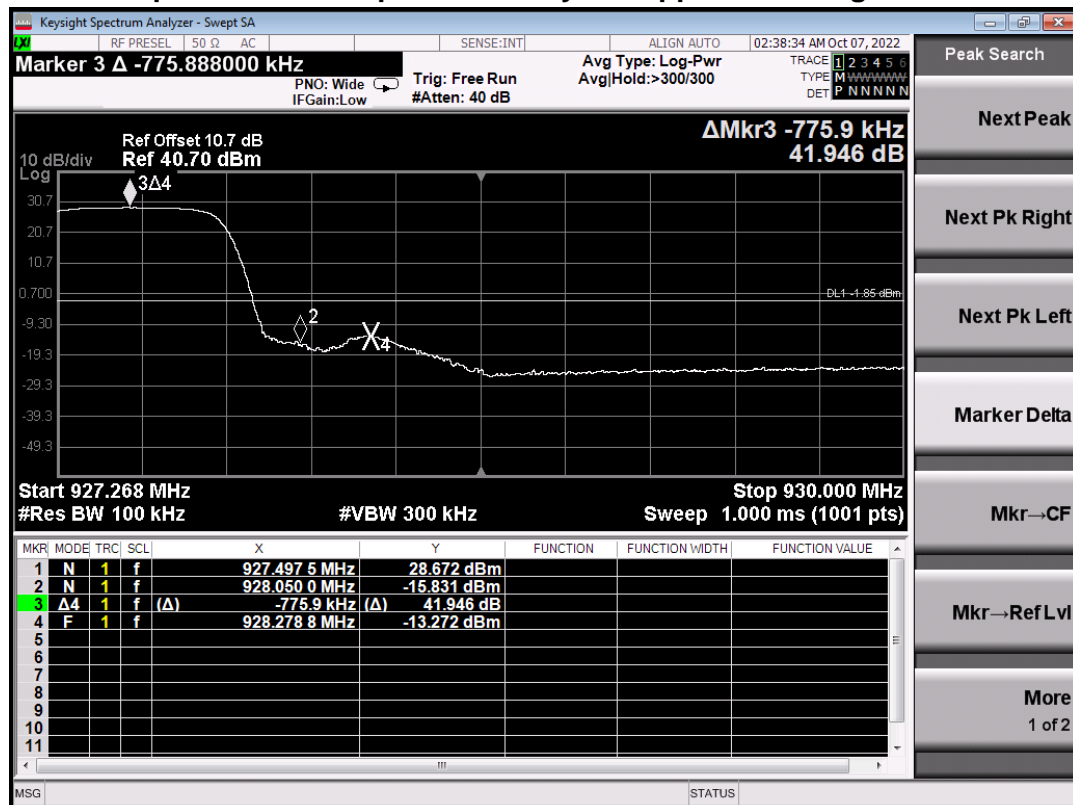

## 2.6 Conducted Spurious Emissions (Non-Restricted Band)

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Imran Akram/ Janet Mijares	Standard: FCC PART 15.247
Date: 2022-10-06/07 (20.5°C, 25.2% RH)	Basic Standard: ANSI C63.4-2014 FCC OET KDB 558470 v04 DTS

**EUT status: Compliant**

### Specification: FCC Part 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 2.6.1 Test Guidance: ANSI C63.10-2013, Clause 6.7

This measurement is performed at the low, mid and high frequencies, with modulation. The RF output of EUT with an antenna connector is fed to the input of the spectrum analyzer through appropriate attenuation. The loss from the cable and the attenuator were added on the analyzer as gain offset setting there by allowing direct measurements, without the need for any further corrections. The spectrum analyzer is stepped through the spectrum in frequency spans selected to ensure acceptable frequency resolution. The RBW is set to 100 kHz. The VBW is set to  $\geq 300$  kHz. The Peak detector is used, with the trace set to Max Hold.

### 2.6.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.6.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Cal. Date	Cal. Due
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Temp/Humidity	Extech	42270	5892	2022-04-07	2023-04-07
Attenuator	Fairview Microwave	SA18N5WA-10	6886	Cal. before each use	
Coaxial Cables (RF)	W.L. Gore	Pgr10R01036.0	-	Cal. before each use	



## 2.6.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. The EUT met the requirements without modification.



Test setup diagram for Conducted Spurious Emissions testing:






## 2.6.5 Conducted Emissions Data: LoRa DTS

Antenna Port 0




### Low Channel

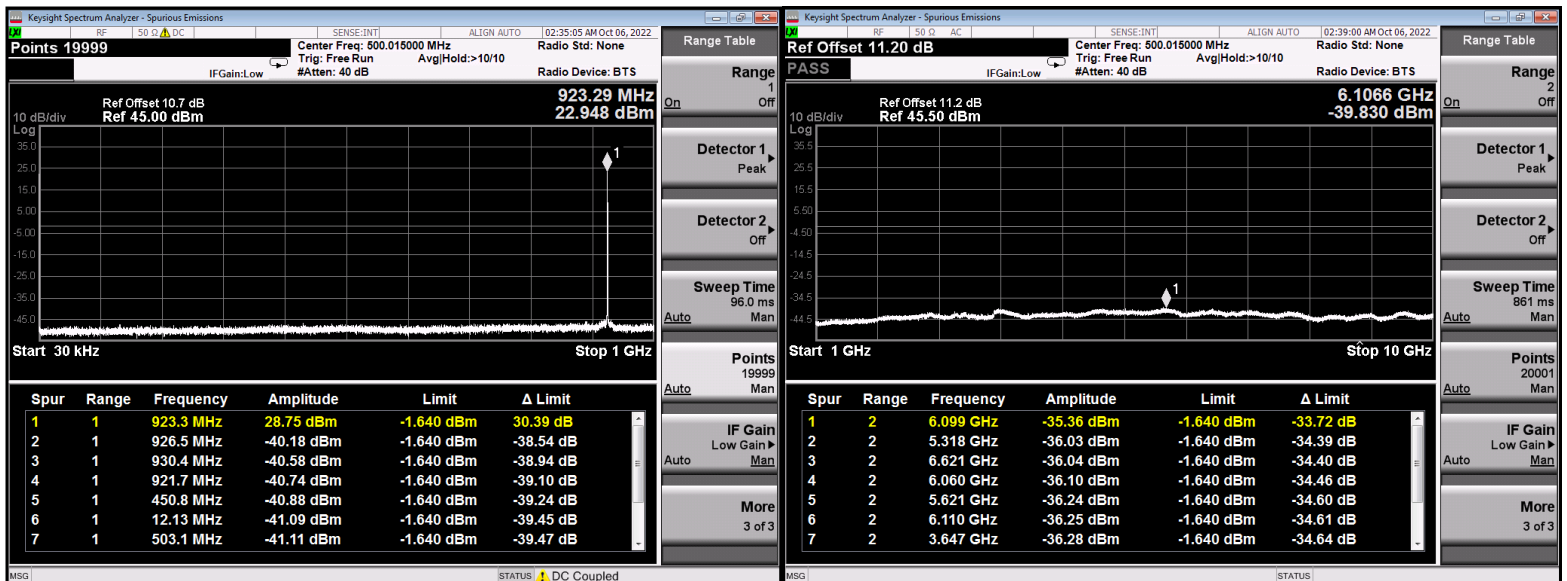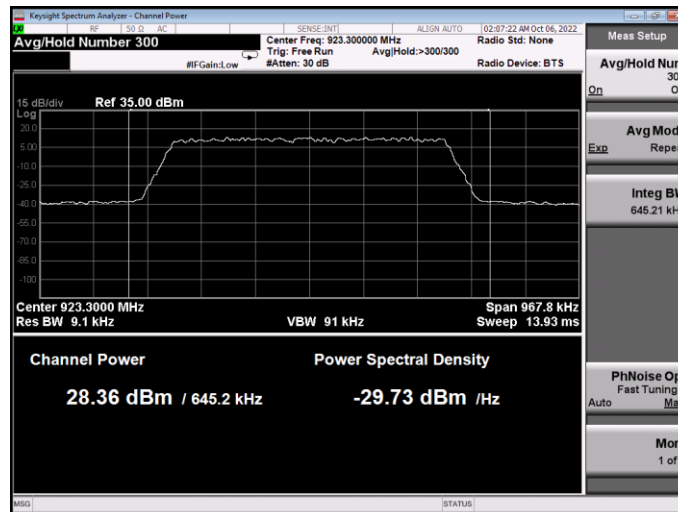

## MID Channel

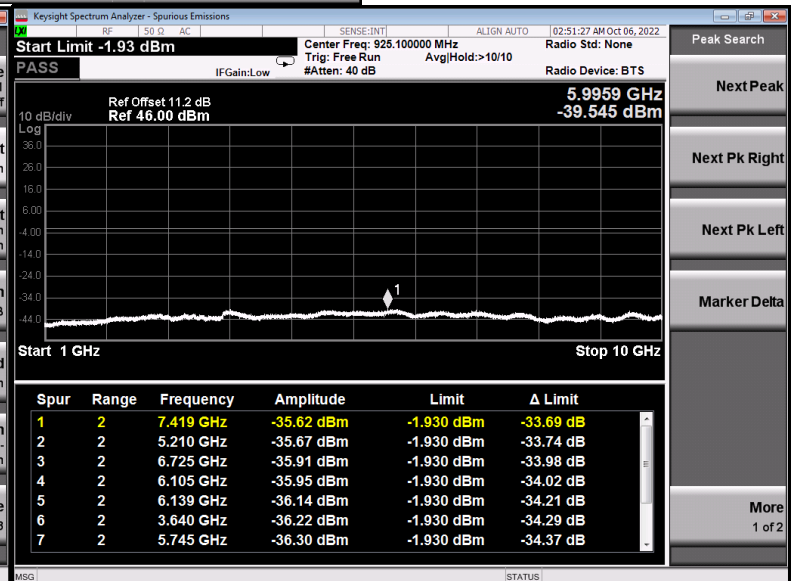
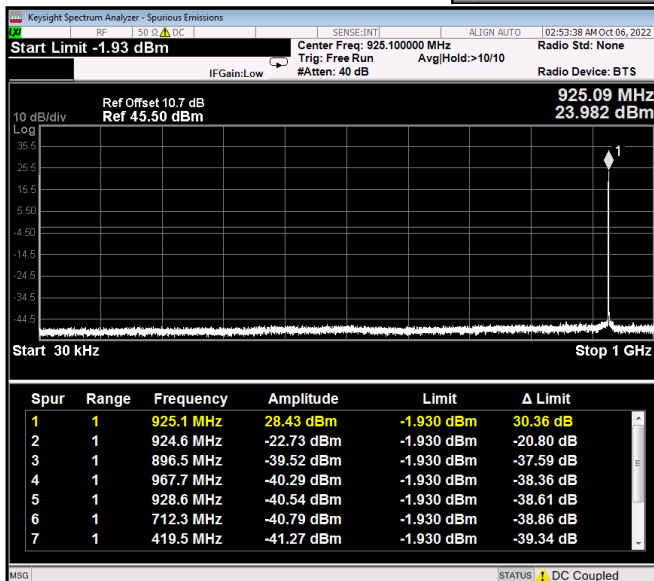
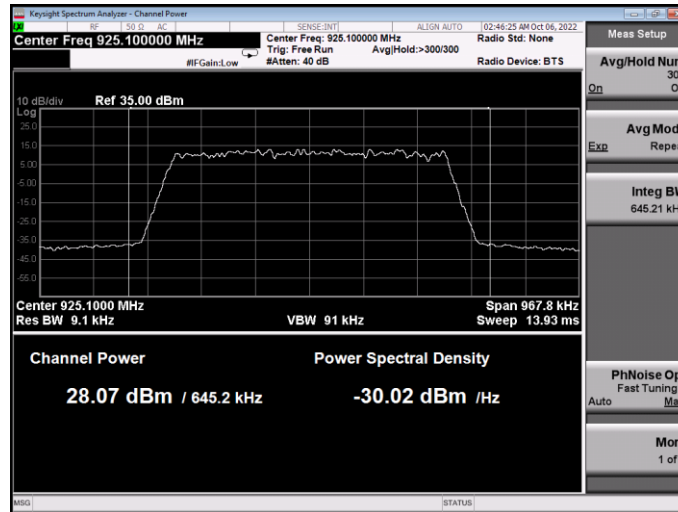


## High Channel

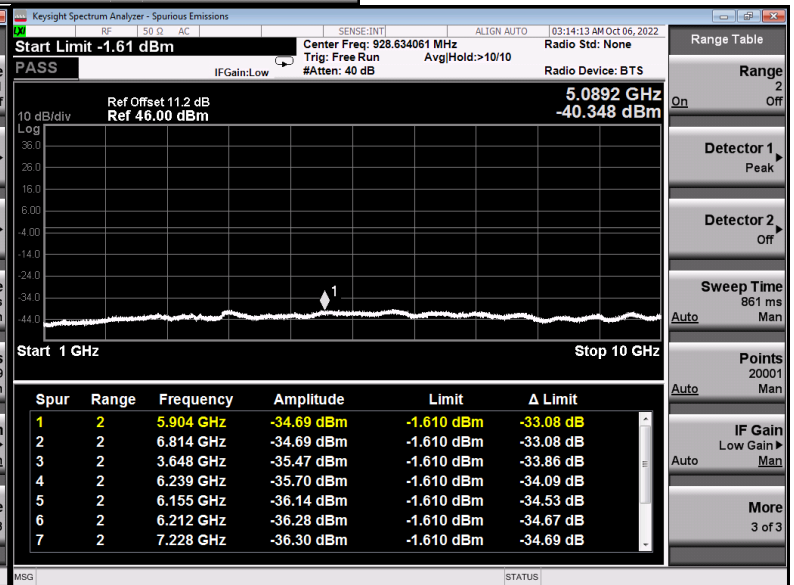
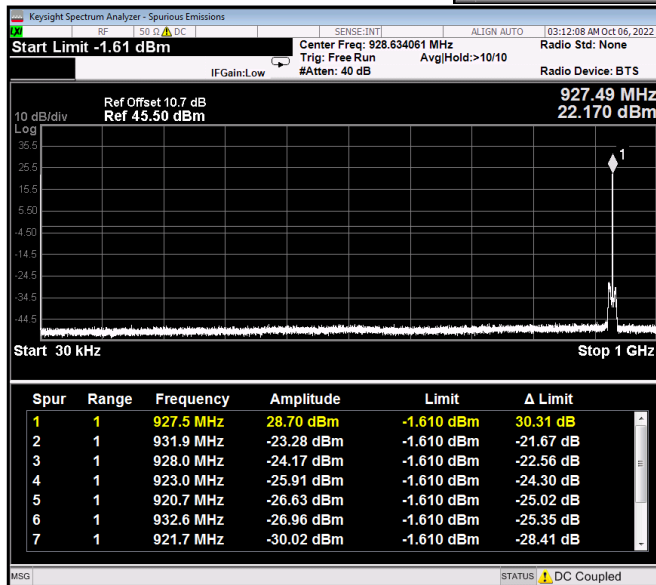
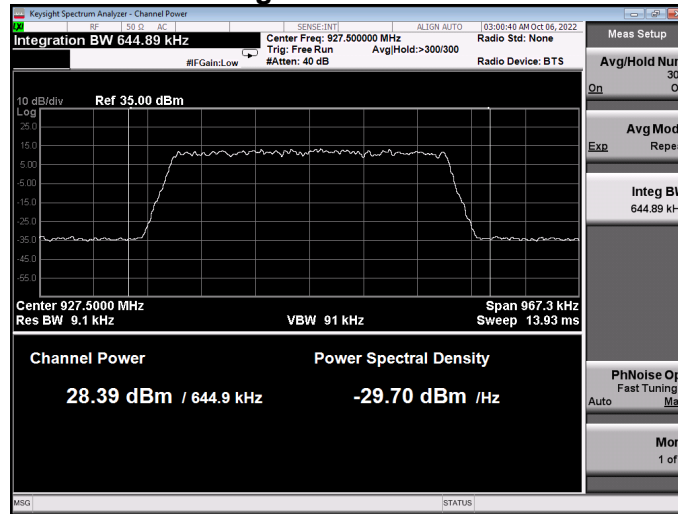


Antenna Port 1




Low Channel

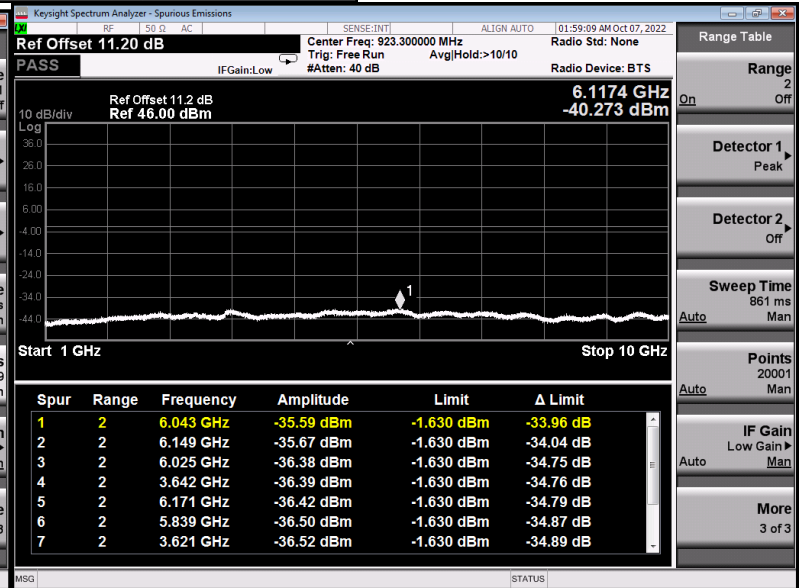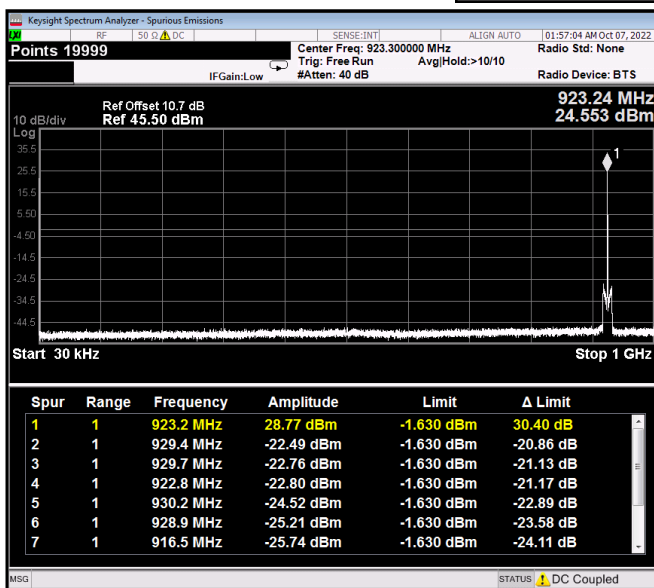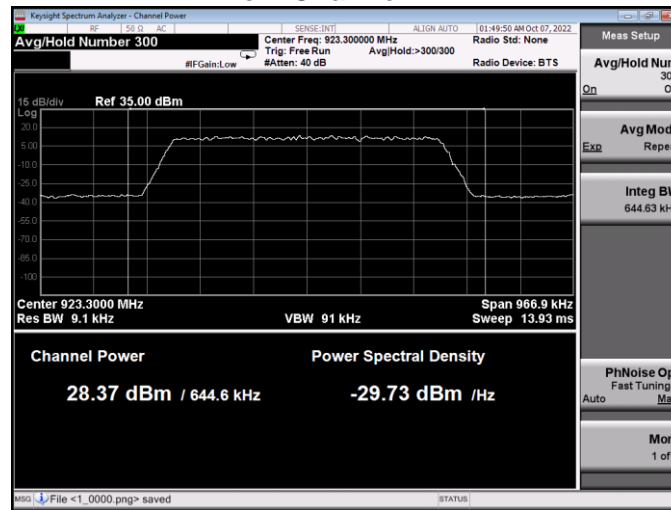

## MID Channel

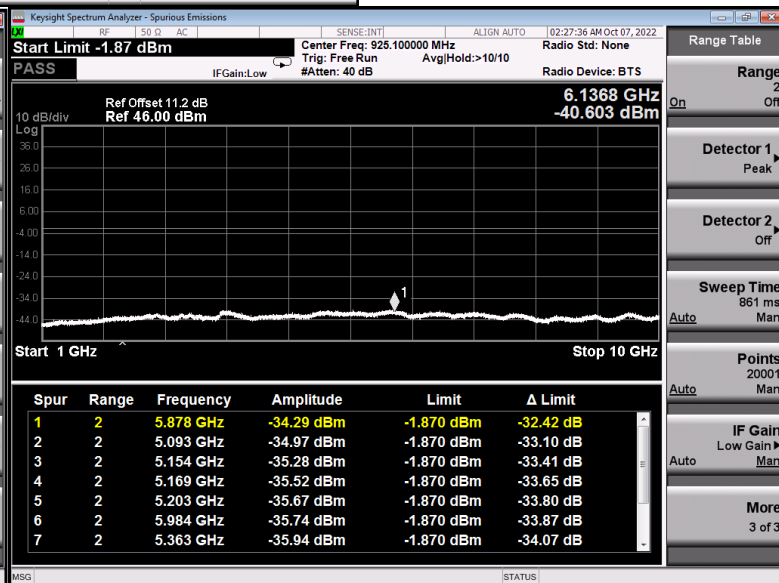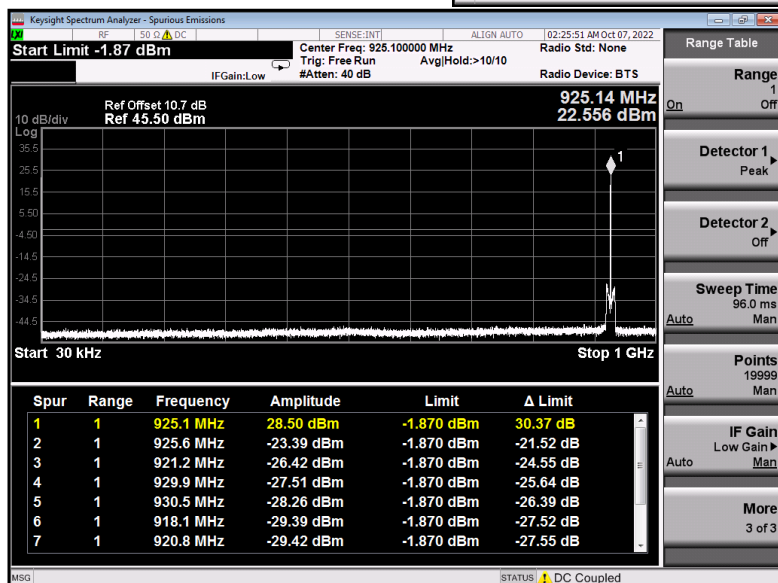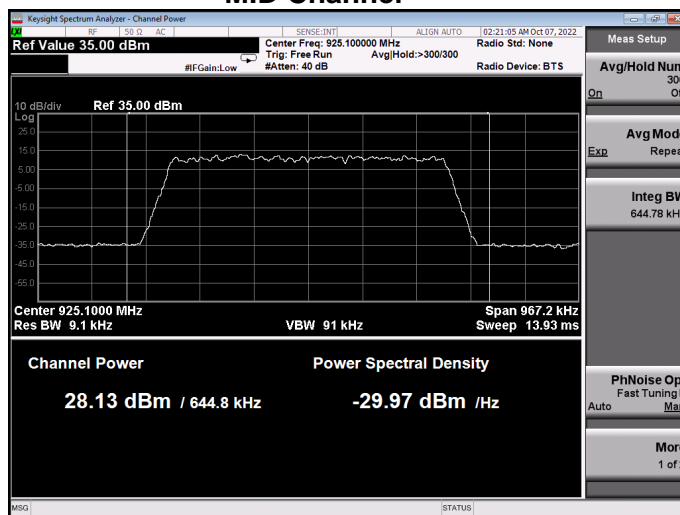

## High Channel

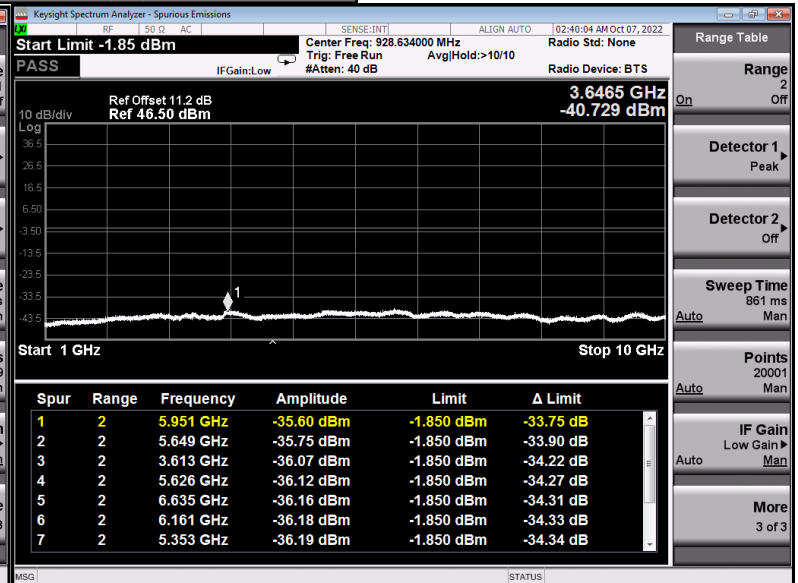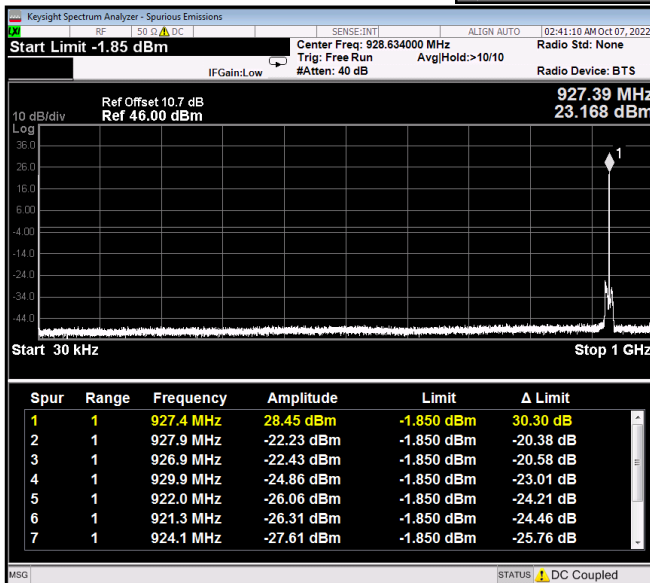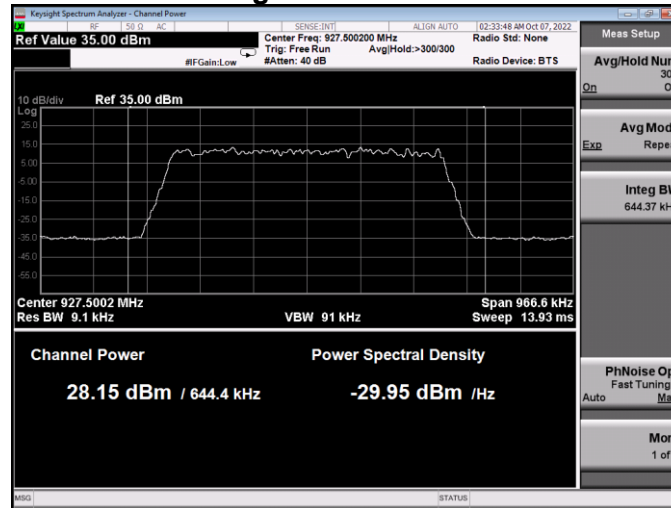

## 2.7 EUT Positioning Assessment

Test Lab: Electronics Test Centre, Airdrie

EUT: Kona Mega Gateway

Test Personnel:

Standard: FCC PART 15.247


Date:

Basic Standard: ANSI C63.4-2014

Comments: N/A, EUT used in fix position

### Specification: ANSI C63.4-2014, Clause 6.3.2.1

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs (see Figure 6, Figure 7, and Figure 9). For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

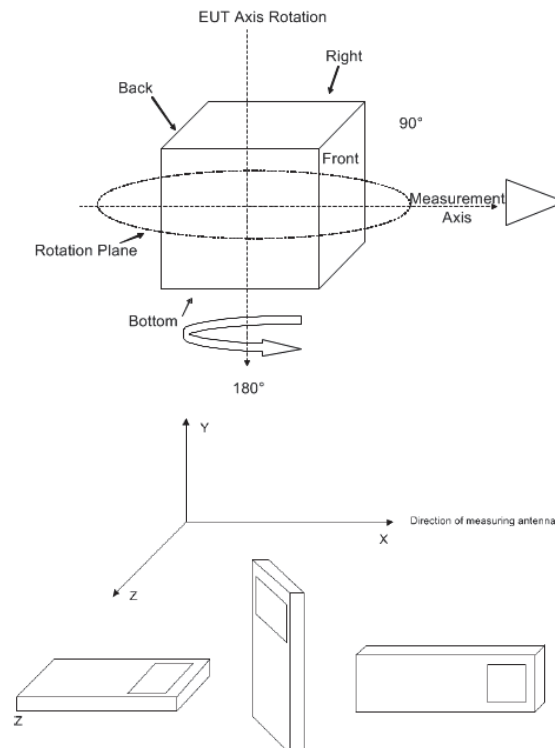

## 2.8 Radiated Spurious Emissions within restricted band

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Janet Mijares	Standard: FCC PART 15.247/15.209/15.205
Date: 2022-09-30 (20.6° C, 38.1 % RH) 2022-10-03/04 (20.7° C, 30.1 % RH)	Basic Standard: ANSI C63.10-2013
<b>EUT status: Compliant</b>	

### Specification: FCC PART 15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Restricted Bands of Operation:

MHz	MHz	MHz	MHz	MHz	GHz	GHz
0.0900000 – 0.1100000	8.2910000 - 8.2940000	16.804250 - 16.804750	162.01250 - 167.17000	1660.0000 – 1710.0000	3.6000000 – 4.4000000	14.470000 – 14.500000
0.4950000 - 0.5050000	8.3620000 - 8.3660000	25.500000 - 25.670000	167.72000 - 173.20000	1718.8000 – 1722.2000	4.5000000 – 5.1500000	15.350000 – 16.200000
2.1735000 - 2.1905000	8.3762500 - 8.3867500	37.500000 - 38.250000	240.00000 – 285.00000	2200.0000 – 2300.0000	5.3500000 – 5.4600000	17.700000 – 21.400000
4.1250000 - 4.1280000	8.4142500 - 8.4147500	73.000000 - 74.600000	322.00000 - 335.40000	2310.0000 – 2390.0000	7.2500000 – 7.7500000	22.010000 – 23.120000
4.1772500 - 4.1777500	12.290000 - 12.293000	74.800000 - 75.200000	399.90000 – 410.00000	2483.5000 – 2500.0000	8.0250000 – 8.5000000	23.600000 – 24.000000
4.2072500 - 4.2077500	12.519750 - 12.520250	108.00000 - 121.94000	608.00000 – 614.00000	2655.0000 – 2900.0000	9.0000000 – 9.2000000	31.200000 – 31.800000
5.6770000 - 5.6830000	12.576750 - 12.577250	123.00000 - 138.00000	960.00000 – 1240.0000	3260.0000 – 3267.0000	9.3000000 – 9.5000000	36.430000 – 36.500000
6.2150000 - 6.2180000	13.360000 - 13.410000	149.90000 - 150.05000	1300.0000 – 1427.0000	3332.0000 – 3339.0000	10.600000 – 12.700000	Above 38.600000
6.2677500 - 6.2682500	16.420000 - 16.423000	156.52475 - 156.52525	1435.0000 – 1626.5000	3345.8000 – 3358.0000	13.250000 – 13.400000	
6.3117500 - 6.3122500	16.694750 - 16.695250	156.70000 - 156.90000	1645.5000 – 1646.5000	3500.0000 – 3600.0000		

US only

\*\* Canada 108 – 138 MHz

\*\*\* Canada 960 – 1427 MHz

\*\*\*\* Canada only



### 2.8.1 Test Guidance: ANSI C63.10-2013, Clause 13.4.2

From 9 kHz to 150 kHz (resolution bandwidth of 200 Hz) and from 150 kHz to 30 MHz (resolution bandwidth 9 kHz) measurements are performed with a loop antenna (as per KDB 460108).

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.


Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz. The EUT is raised to 150 cm above the ground plane, and the area between the EUT and the antenna mast is covered with RF absorbent material.

The scan is performed at discreet increments of turntable azimuth and antenna height, which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.


Frequencies having peak emissions within 10dB of the limits are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

#### Test setup diagram for Radiated Spurious Emissions testing (below 1GHz):

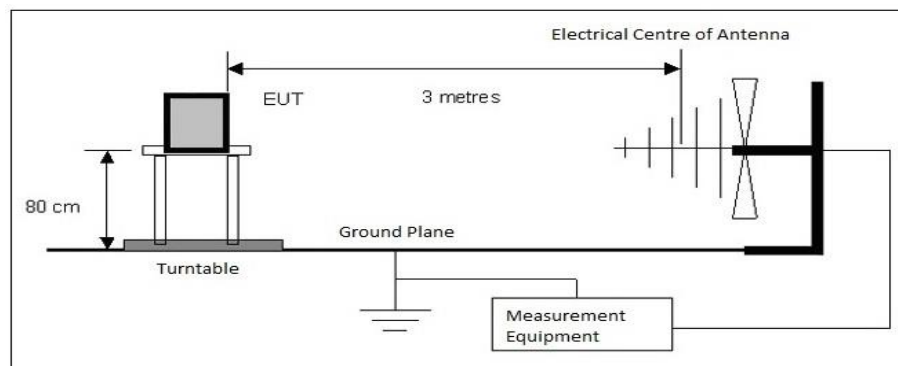

#### Test setup diagram for Radiated Spurious Emissions testing (above 1GHz):

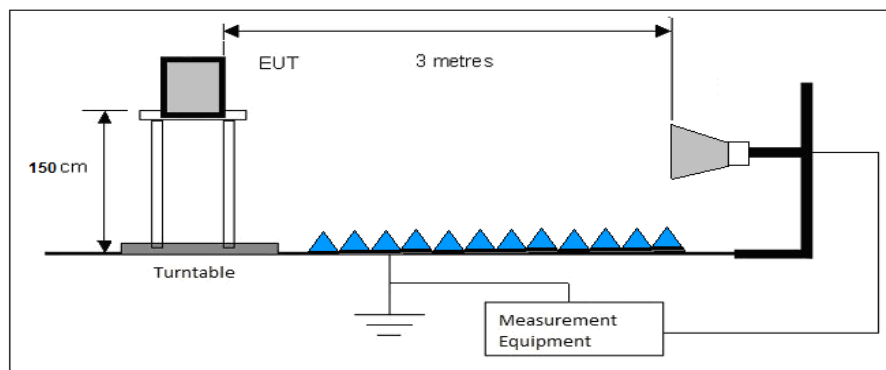

## 2.8.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

## 2.8.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Cal. Date (yyyy-mm-dd)	Cal. Due (yyyy-mm-dd)
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Loop Antenna (9KHz – 30MHz)	EMCO	6502	10868	2021-05-11	2023-05-11
Biconilog Antenna (30 – 1000 MHz)	AR	JB1	6905	2021-10-29	2023-10-29
DRG Horn (1000 – 18000 MHz)	Tensor	4105	9588	2021-05-10	2023-05-10
Humidity/Temp Logger	Extech Ins. Corp.	42270	5892	2022-04-07	2023-04-07
Pre-Amplifier (30 – 1400 MHz)	HP	8447D	9291	*2022-05-11	2023-05-11
Low Noise Amplifier (1 – 18 GHz)	MITEQ	JS43-01001800-21- 5P	4354	*2022-05-11	2023-05-11
RE Cable below 1GHz	Insulated Wire Inc.	KPS-1501A-3600- KPA-01102006	4419	*2022-05-11	2023-05-11
Re Cable Above 1 GHz	A.H. System Inc.	SAC-26G-8.23	6187	*2022-05-11	2023-05-11
0.9GHz Notch Filter	Microtronics	BRM20784	6947	*2022-05-11	2023-05-11
1.4GHz HPF	K & L	4DH21-R1793/6000-0/0	6952	*2022-05-11	2023-05-11

\* In house (Gain/loss) verification Performed.

## 2.8.4 Test Sample Verification, Configuration & Modifications

The EUT was set to a selected channel with test-specific software. The output was modulated as in normal operation. LoRa radio transmitting at low Channel 923.3 MHz

The EUT met the requirements without modification.

## 2.8.5 Radiated Emissions Data: LoRa DTS with LTE EM7455 Modem

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dBμV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dBμV/m.**

**Delta = Field Strength – Limit**

### Notes:

- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- Preliminary scans were performed for all channels in Transmit modes. The low band channel 923.3 MHz was selected as the worst-case condition for detailed examination.
- In Transmit mode, the EUT was assessed up to 10.0 GHz.


**Negative values for Delta indicate compliance.**

### Spurious Emission


Freq. Marker	Freq. [MHz]	Raw reading[ dBμV]	Det	Antenna Factor [dB/m]	Pre amp Gain/Cable Loss [dB]	Corrected Reading [dBμV/m]	FCC 15.209 Limit [dBμV/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
1	23.13	27.54	QP	9.8	1.3	38.64	36.56	-30.92	0	100	Perpendicular
1	*38.07	34.41	QP	19	-24.5	28.91	40.1	-11.09	122	105	Vertical
2	*73.28	41.02	QP	12.1	-23.8	29.32	40.01	-10.68	352	107	Vertical
3	540.16	45.47	PK	22.4	-20.3	48.07	20dBc	82.98dBc	21	105	Vertical
1	1847.0	36.05	AV	27.1	-34.4	28.75	53.98	-25.23	320	319	Horizontal
1	1847.0	45.49	PK	27.1	-34.4	38.19	73.98	-35.79	320	319	Horizontal
2	1847.0	36.81	AV	27.1	-34.4	29.51	53.98	-24.47	3	126	Vertical
2	1847.0	45.23	PK	27.1	-34.4	37.93	73.98	-36.05	3	126	Vertical

**\* Restricted Band**


## Plot of Radiated Emissions: Measuring Antenna Parallel

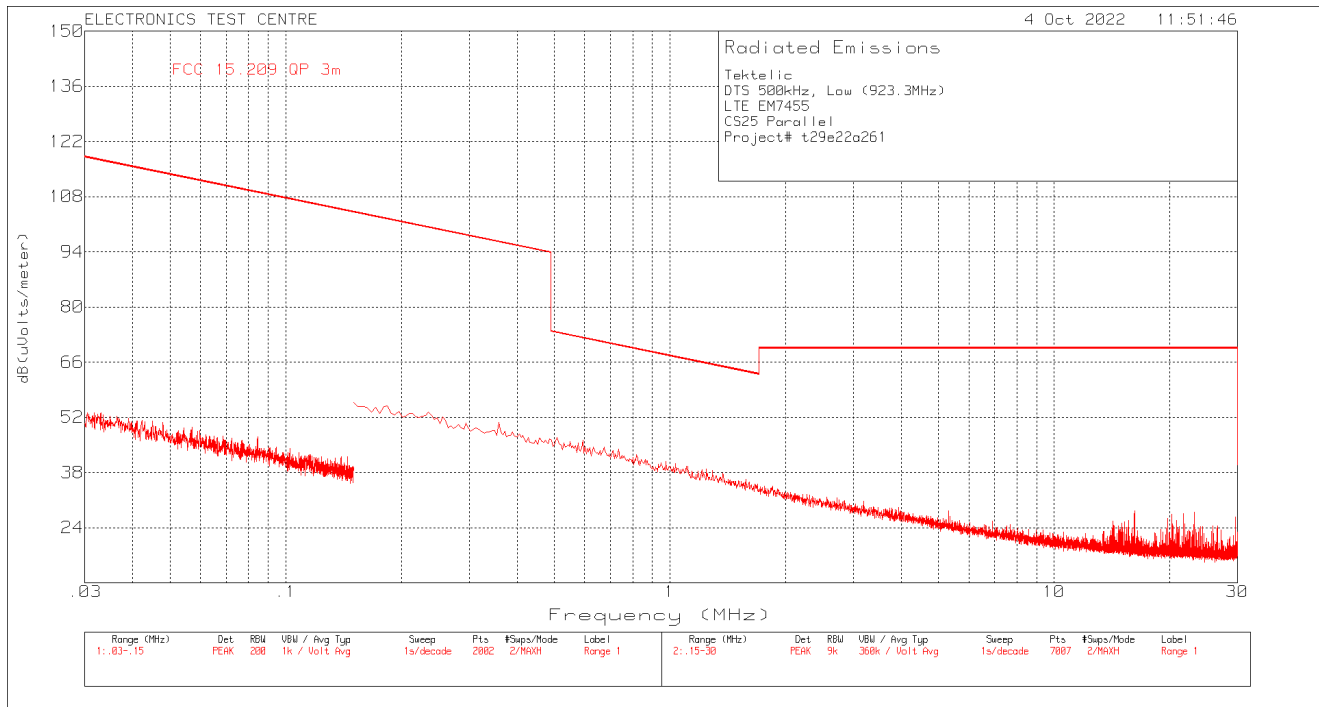


## Plot of Radiated Emissions: Measuring Antenna Perpendicular

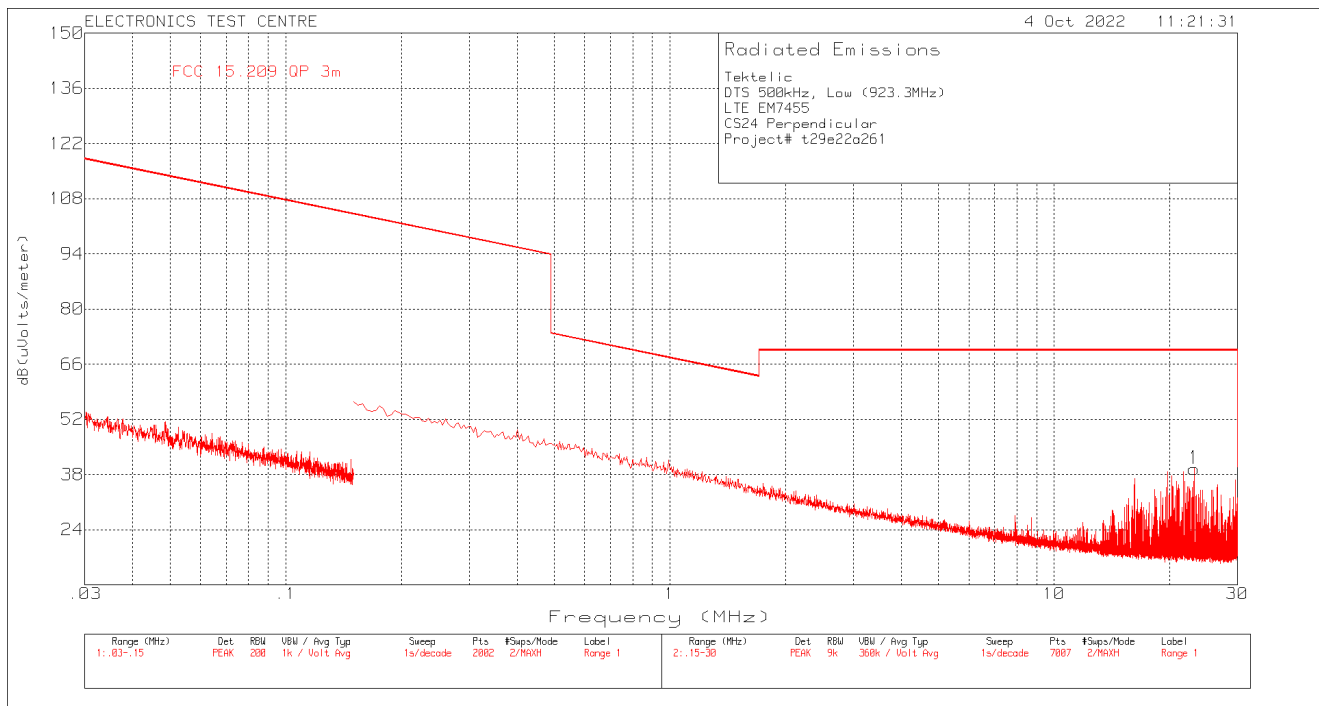


## Plot of Radiated Emissions: Horizontal polarization

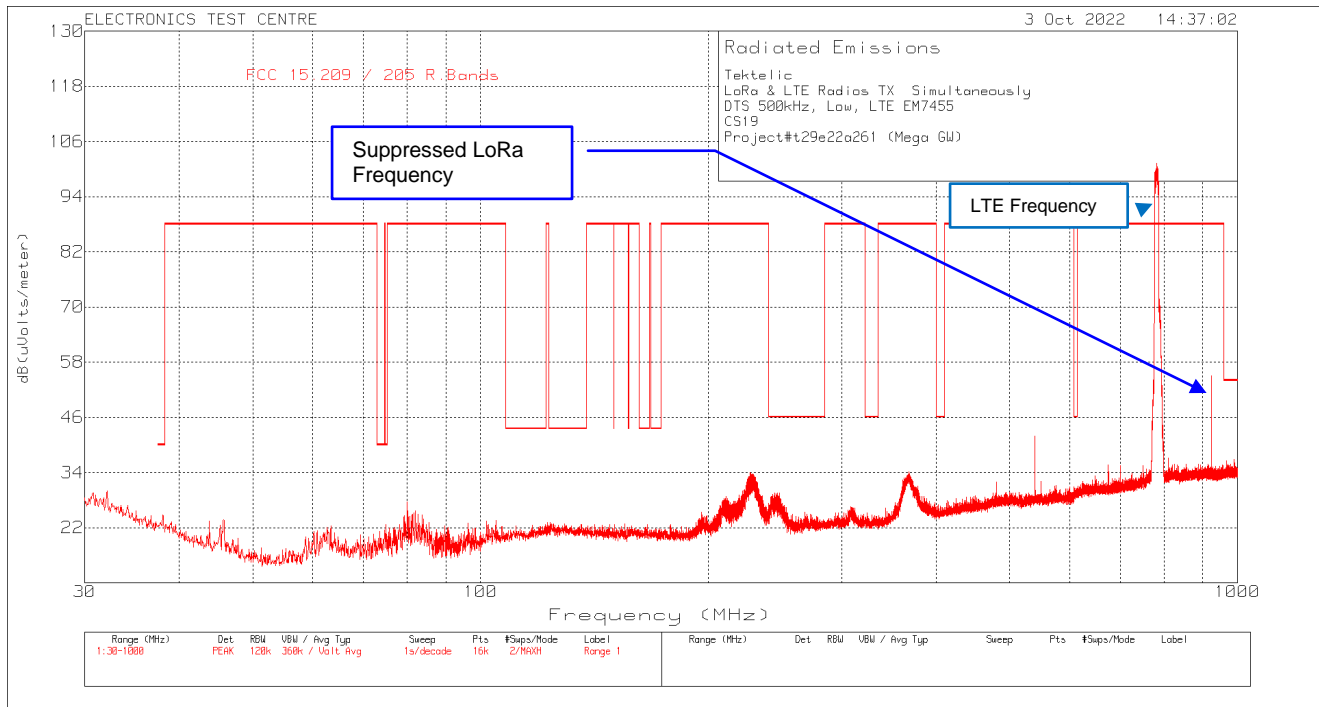


## Plot of Radiated Emissions: Vertical polarization

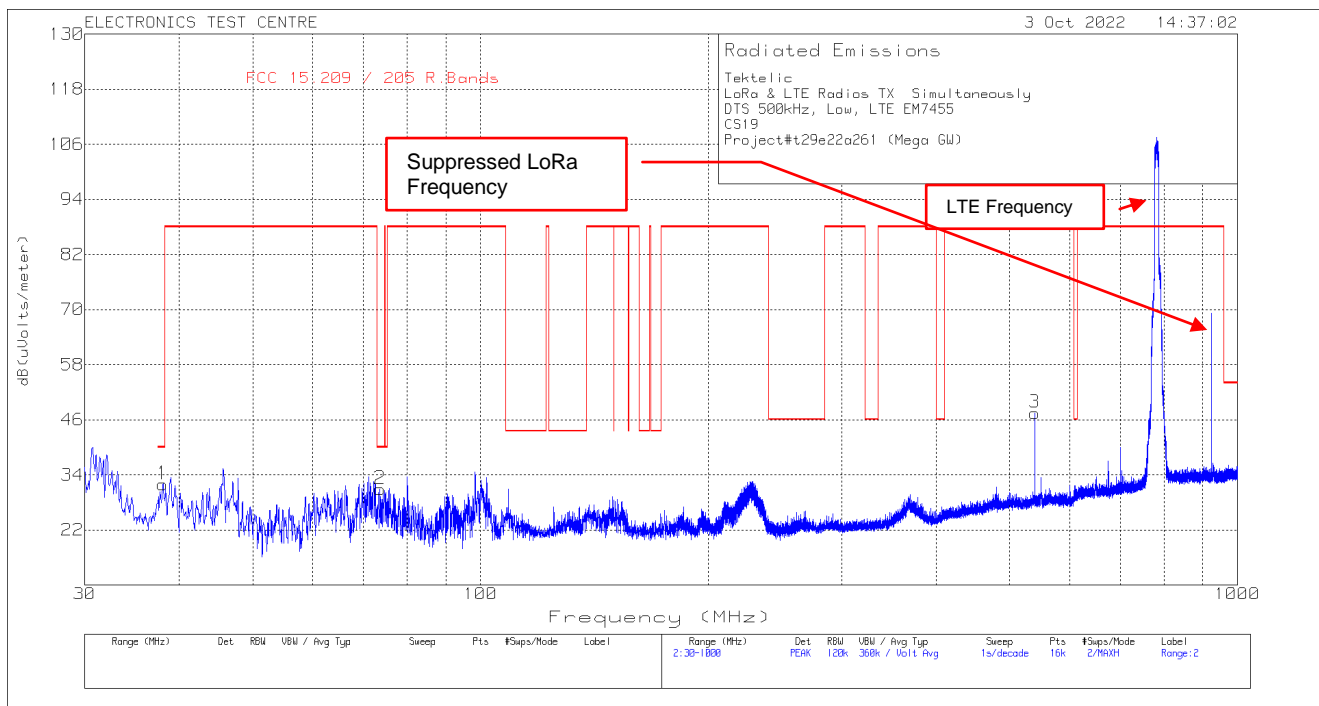


## Plot of Radiated Emissions: Horizontal polarization

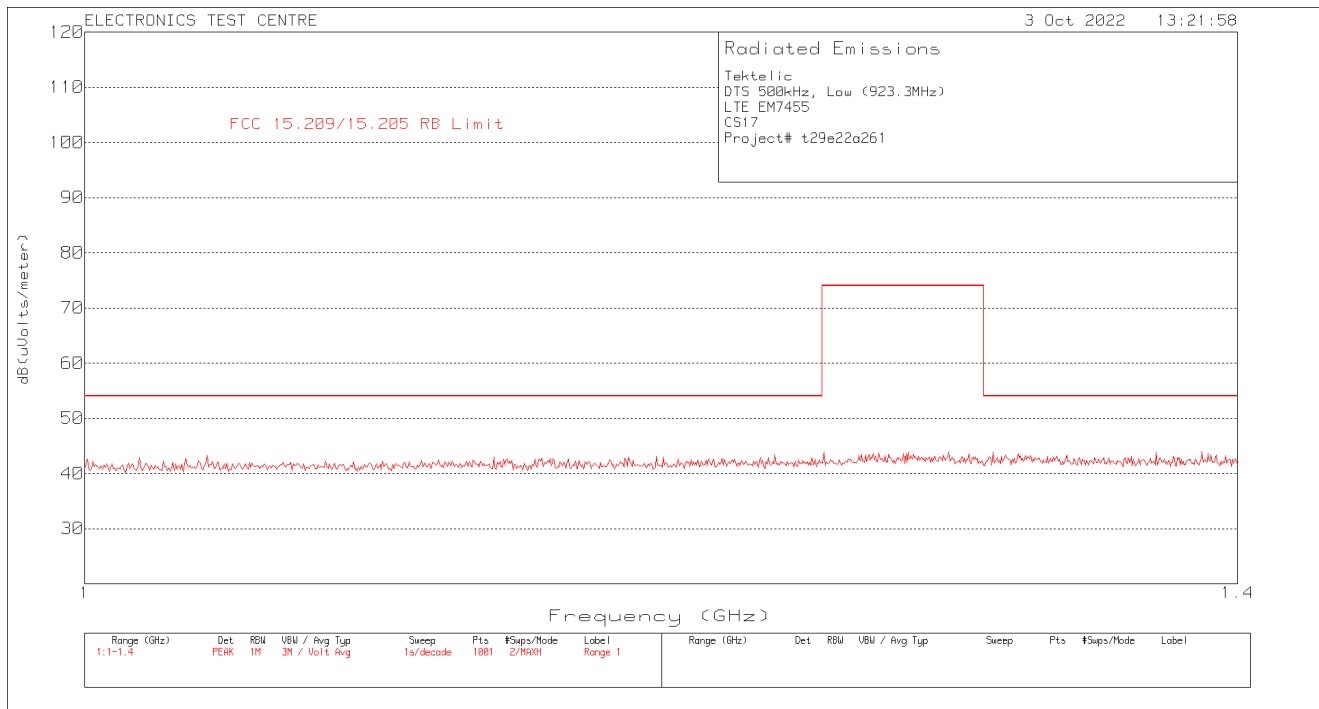


## Plot of Radiated Emissions: Vertical polarization

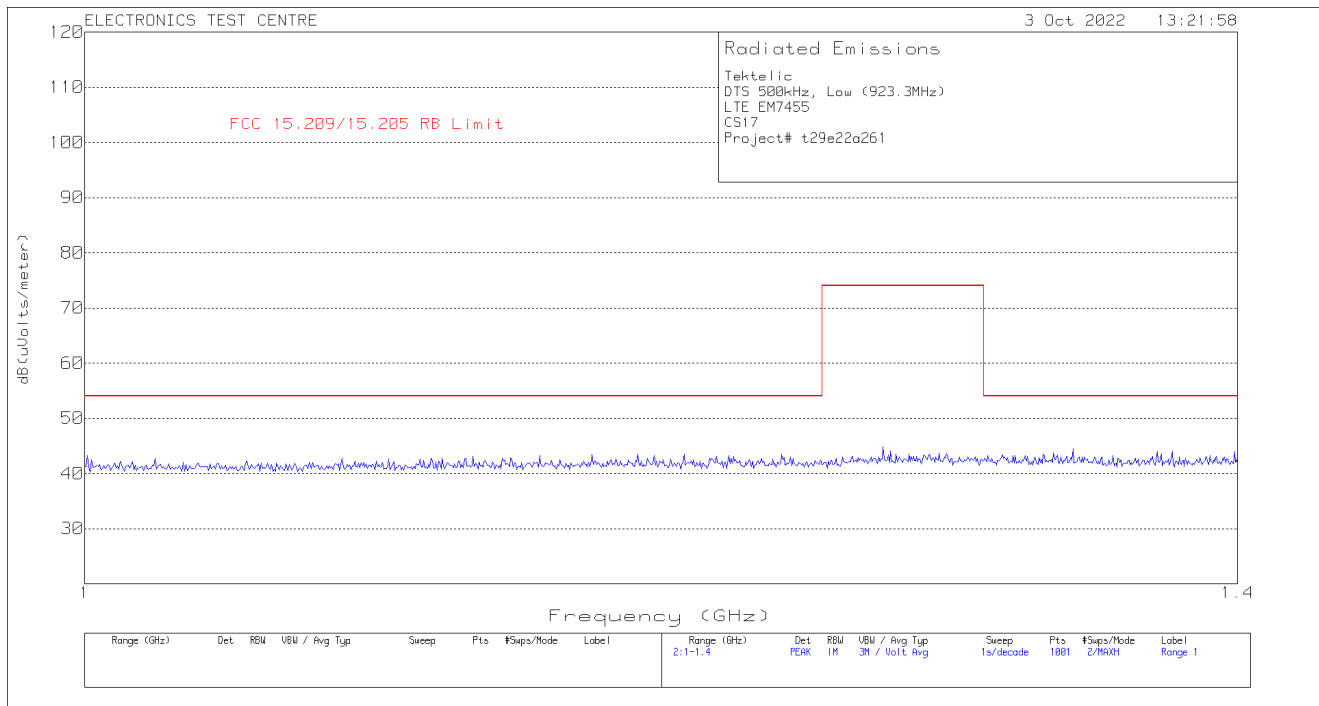


## Plot of Radiated Emissions: Horizontal polarization

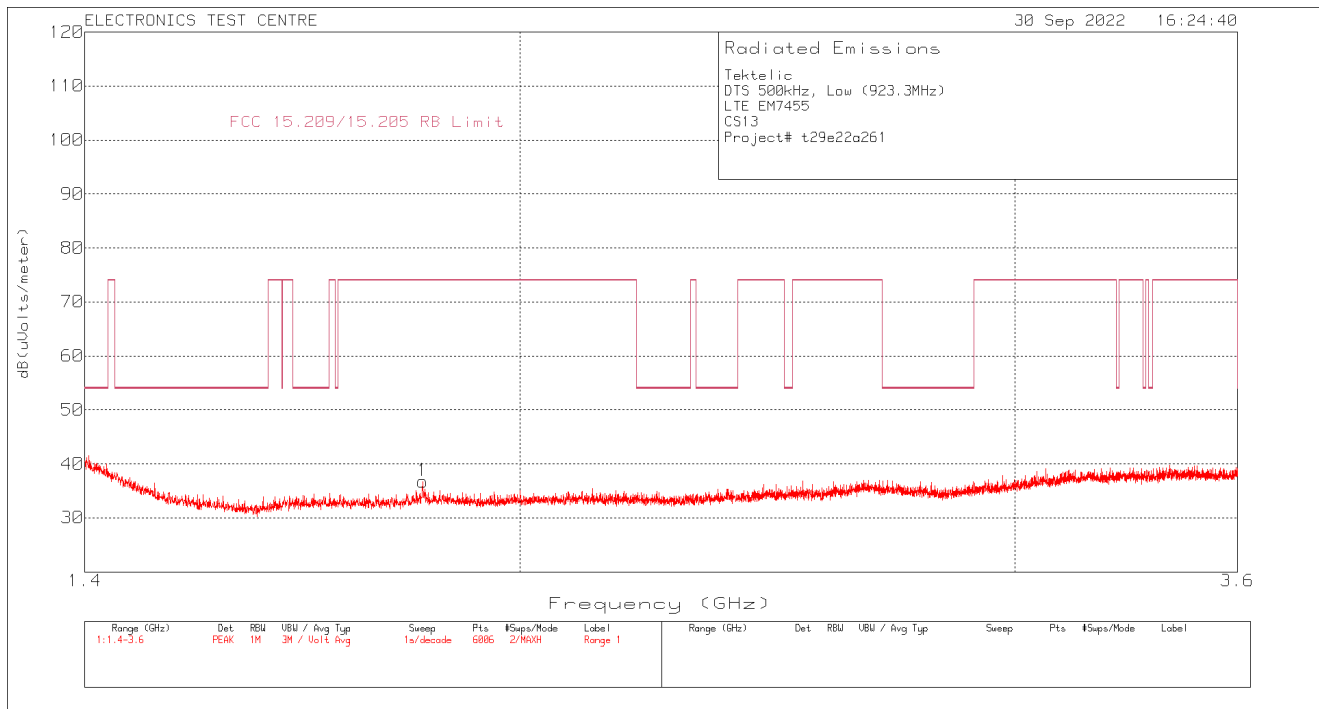


## Plot of Radiated Emissions: Vertical polarization

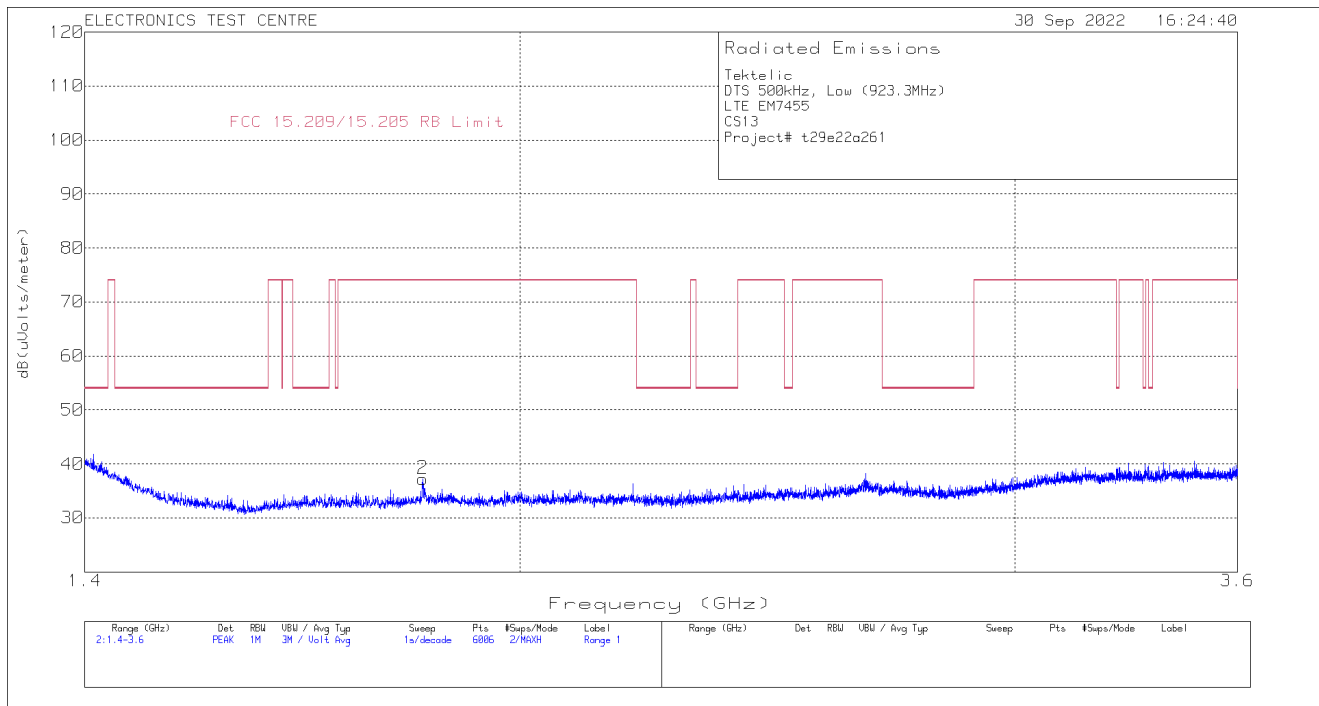

## Plot of Radiated Emissions: Horizontal polarization

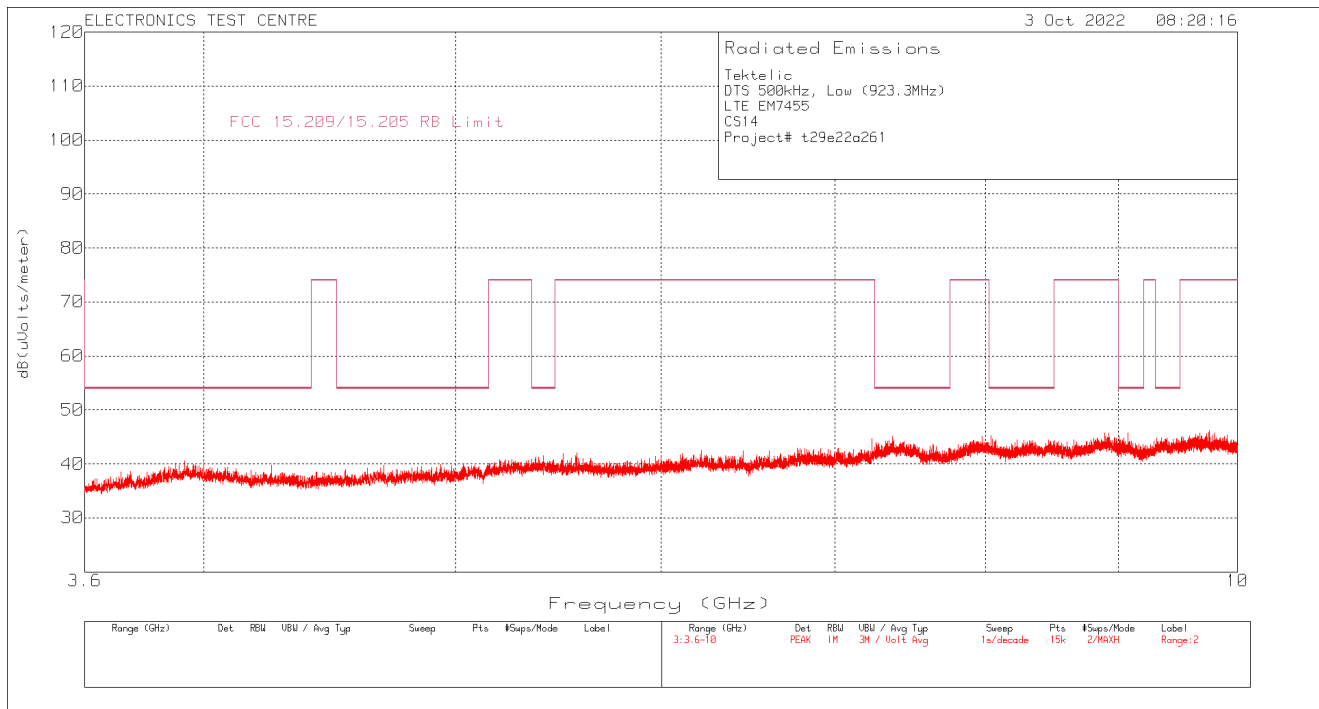

## Plot of Radiated Emissions: Vertical polarization

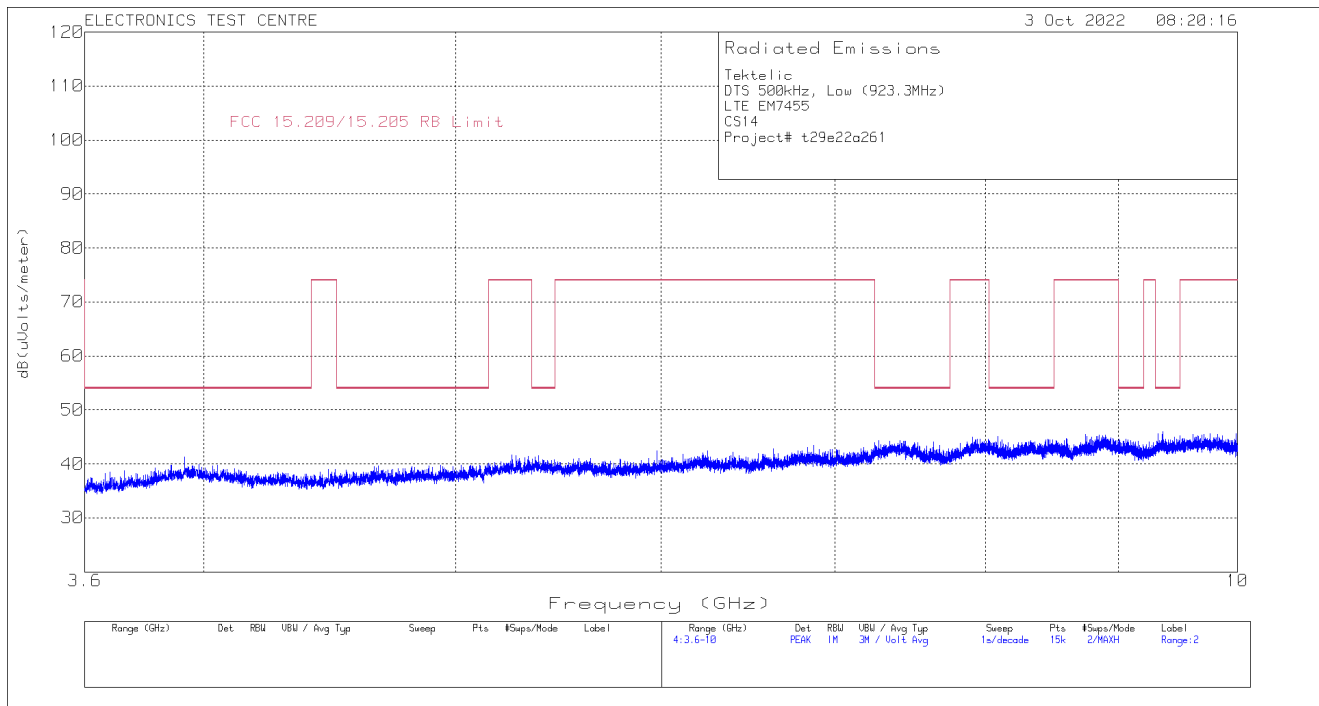



## 2.9 Radiated Emissions Receive Mode

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Janet Mijares	Standard: FCC Part 15.109
Date:2022-10-03/20 (20.7°C,30.1% RH)	Basic Standard: ANSI C63.4: 2014
	Class: B
EUT status: Compliant	

Frequency (MHz)	FCC Part 15.109 Class B Limit (3m)
30 – 88	40 (dBµV/m)
88 – 216	43.52 (dBµV/m)
216 – 960	46.02 (dBµV/m)
Above 960	53.98 (dBµV/m)

**Criteria:** The radiated emissions produced by a device, measured at a distance of 3 meters, shall not exceed the limits as specified.

### 2.9.1 Test Guidance:

From 30 MHz to 1000 MHz, measurements are performed with a broadband biconilog antenna and a resolution bandwidth of 120 kHz.

Above 1000 MHz, measurements are performed with a DRG Horn antenna or a Standard Gain horn, and a resolution bandwidth of 1 MHz.

The scan is performed at discreet increments of turntable azimuth and stepped antenna height, with peak detector and Max Hold function which are selected in accordance with the applicable standard in order to assure capture of frequencies of interest. Optimization is performed based on the scan data.

After the pre-scan is completed, the frequencies of interest are optimized. The EUT is rotated in azimuth over 360 degrees and the direction of maximum emission is noted.

Antenna height is varied from 1 – 4 meters at this azimuth to obtain the maximum emission. Then the maximum level is measured with the appropriate detector and recorded. This may produce a different reading than the pre scan trace. Up to 1 GHz, measurements are performed with a Quasi-Peak detector. Above 1 GHz, measurements are recorded with Peak and/or Average detectors, as applicable.

### 2.9.2 Deviations From The Standard:

There were no deviations from the EUT setup or methodology specified in the standard.

### 2.9.3 Test Equipment

Testing was performed with the following equipment:

Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A (FW A.25.05)	6130	2022-07-12	2023-07-12
Biconilog Antenna	SunAR RF Motion;	JB1	6905	2021-10-29	2023-10-29
DRG Horn	Tensor	4105	9588	2021-05-10	2023-05-10
T/H Logger	EXTECH Ins.	42270	5892	2022-04-07	2023-04-07
Pre- Amp	HP	8447D	9291	*2022-05-11	2023-05-11
Low Noise Amplifier	MITEQ	JS43-01001800-21-5P	4354	*2022-05-11	2023-05-11
RE Cable	Insulated Wire Inc.	KPS-1501A-3600-KPA-01102006	4419	*2022-05-11	2023-05-11


\* In house (Gain/loss) verification Performed.

### 2.9.4 Test Sample Verification, Configuration & Modifications

To cover the unintentional radiated emission. The both radios were configured in receive mode. Unit was placed at the center of turntable in semi-anechoic chamber 80cm above the ground plane and at a distance of 3m from the test receive antenna.

The EUT met the requirements without modification.

**EUT configuration for Radiated Emissions testing:**

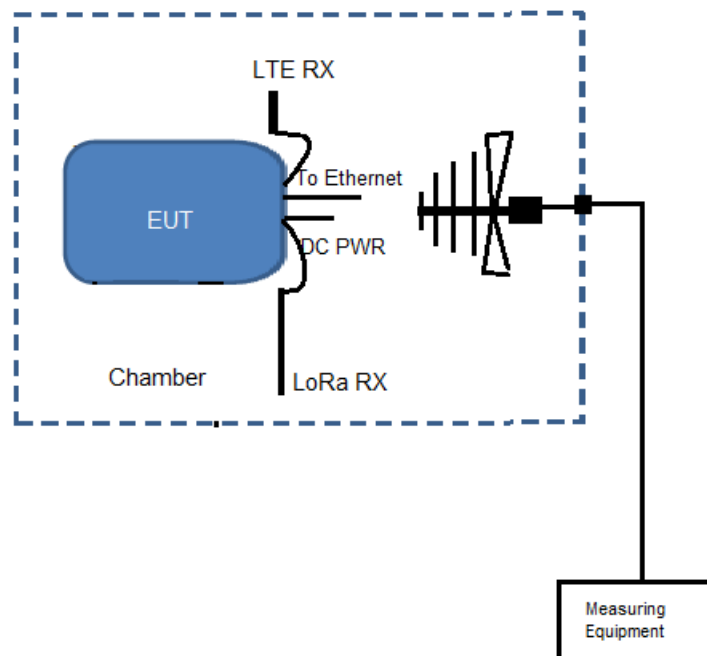

## 2.9.5 Radiated Emissions Data maximization: with LTE EM7455 Modem

The emissions data are presented in tabular form, showing turntable azimuth, antenna height and polarization, the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value of the limit at the frequency investigated, and the Delta between the result and the limit.

**Meter Reading in dBμV + Antenna Factor in dB/m + Gain/Loss Factor in dB = Corrected Field Strength in dBμV/m.**

**Delta = Field Strength – Limit**

### Notes:


- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- Measurements reported are the result of adjusting the turntable azimuth and antenna height to obtain the maximum EUT emission. This may produce a different reading than the plot trace. The plot is a Peak Hold function obtained at discreet increments of height and azimuth, while the reported measurement is obtained with the appropriate Quasi Peak or Average detector after the height and azimuth have been adjusted for maximum emission.
- In receive mode, the EUT was assessed up to 5.0 GHz.

**Negative values for Delta indicate compliance.**


### Spurious Emission

Freq. Marker	Freq. [MHz]	Raw reading [dBμv]	Det	Antenna Factor [dB/m]	Pre amp Gain [dB]	Corrected Reading [dBμv/m]	FCC 15.109 Class B Limit [dBμv/m]	Delta [dB]	Azimuth [Deg]	Height [cm]	Polarization
1	539.9901	32.93	QP	22.4	-20.3	35.03	46.03	-11	230	211	Horizontal
2	30.6822	38.45	QP	24.5	-24.7	38.25	40.01	-1.76	319	101	Vertical
3	32.0772	35.31	QP	23.5	-24.7	34.11	40.01	-5.9	278	106	Vertical
4	234.1495	38.98	QP	15.3	-22.2	32.08	46.03	-13.95	101	116	Vertical
5	540.0108	36.69	QP	22.4	-20.3	38.79	46.03	-7.24	169	213	Vertical
6	674.9997	32.71	QP	23.7	-19.4	37.01	46.03	-9.02	0	179	Vertical
1	1184.1	41.02	AV	24.5	-35.3	30.22	53.98	-23.76	248	109	Vertical
2	1250.0	35.56	AV	24.9	-35.2	25.26	53.98	-28.72	139	260	Vertical


## Plot of Radiated Emissions: Horizontal polarization

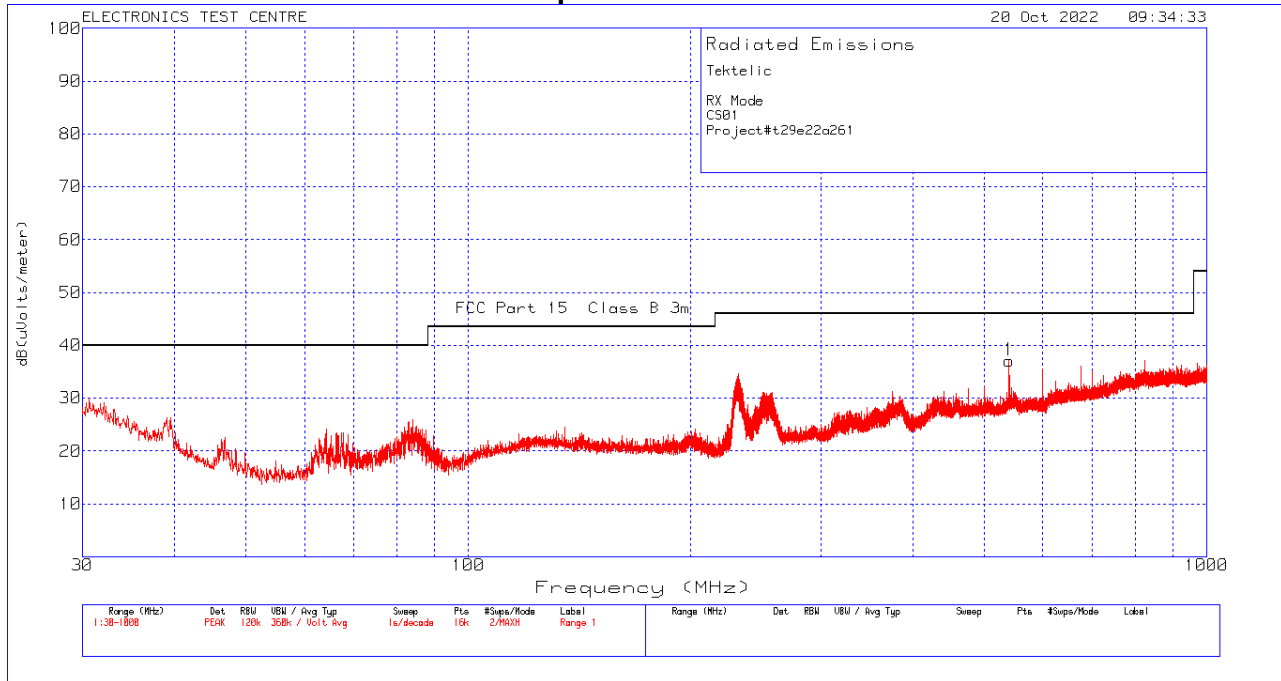


## Plot of Radiated Emissions: Vertical polarization

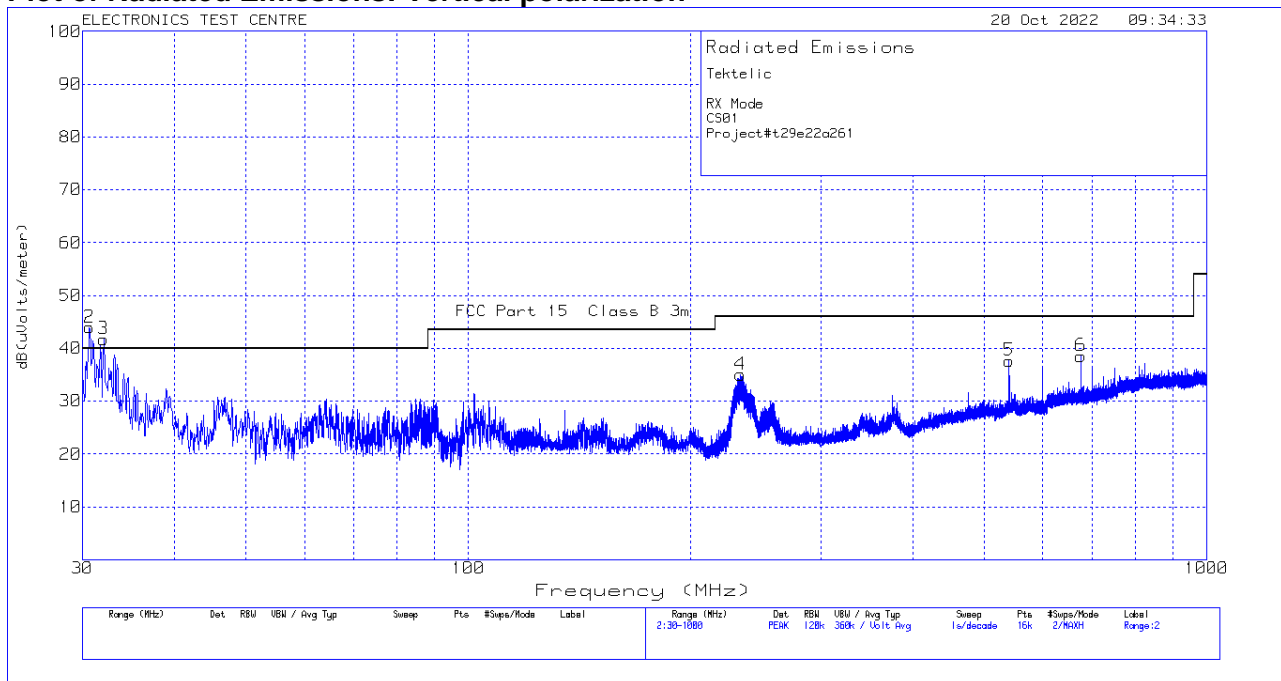

## Plot of Radiated Emissions: Horizontal polarization

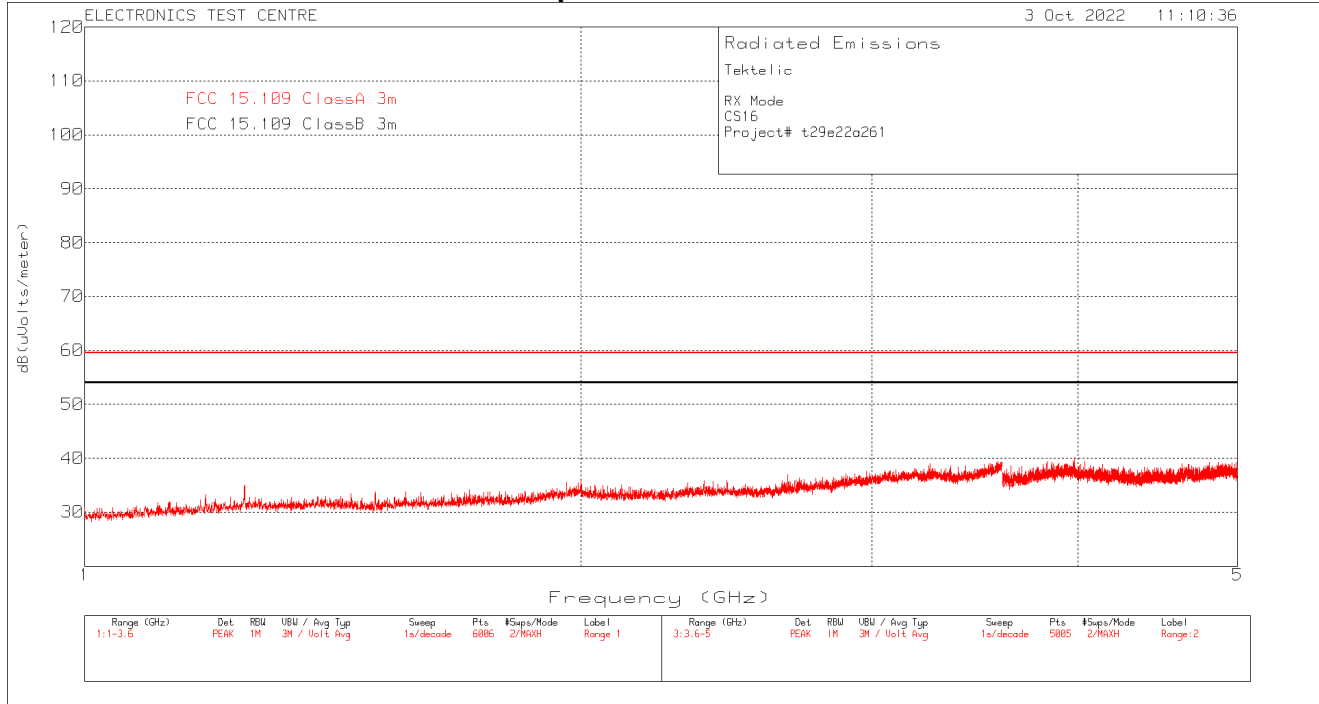

## Plot of Radiated Emissions: Vertical polarization

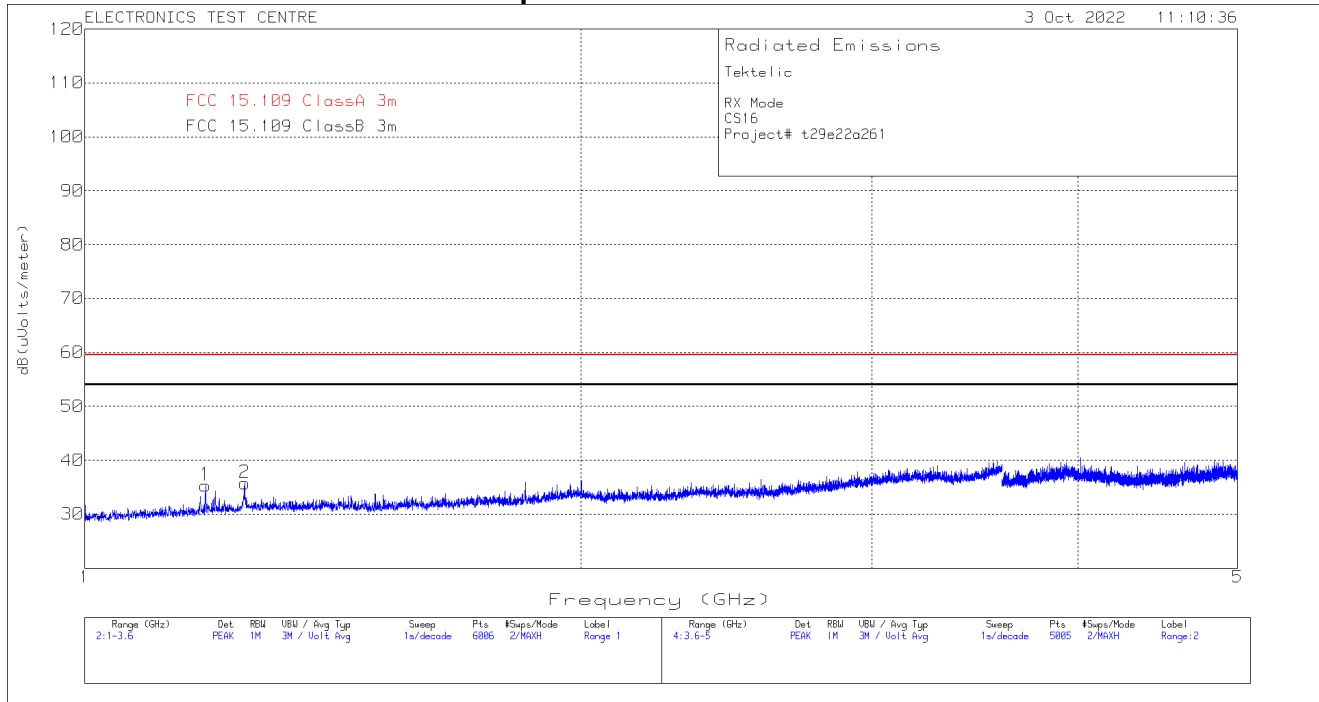

## 2.10 AC Power Line Conducted Emissions Receive Mode

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel: Janet Mijares	Standard: FCC 15.107
Date: 2022-10-04 (20.7°C, 30.1% RH)	Basic Standard: ANSI C63.4: 2014
	Class: B
<b>EUT status: Compliant</b>	

### Specification:

Frequency (MHz)	Quasi-Peak Limit (dBµV)	Average Limit (dBµV)
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50
<b>Criteria:</b> The conducted emissions produced by a device shall not exceed the limits as specified.		
*Limits decrease linearly with the logarithm of the frequency*		

### 2.10.1 Test Guidance

Before any testing is performed, the Ambient (measurement noise floor) is recorded, and a QC check is performed to show that the system is functioning correctly.

The EUT is powered through a 50µH Line Impedance Stabilizing Network (LISN) which is placed 80cm away from the EUT. For tabletop equipment, a vertical ground plane is placed 40cm from the edge of the table. Lastly, the spectrum analyzer is connected to the LISN via armored cable run from the control room to the test chamber. Both the LISN and vertical ground plane are grounded to the reference ground plane on the chamber floor.

Testing starts with a scan, performed under software control. After this is complete, the list of frequencies of interest is generated. These frequencies are then investigated for quasi-peak and average amplitude, as applicable. Emissions measured with a QP detector that fall below the Average limit are deemed to meet both requirements.

## 2.10.2 Deviations From The Standard

There were no deviations from the EUT setup or methodology specified in the standard.

## 2.10.3 Test Equipment

Testing was performed with the following equipment:


Equipment	Manufacturer	Model #	Asset #	Calibration Date	Calibration Due
EMC Software	UL	Ver. 9.5	ETC-SW-EMC 2.1	N/A	
EMI receiver	Agilent	N9038A FW A.25.05	6130	2022-07-12	2023-07-12
LISN 150kHz to 30MHz	Com-Power	LI-215A	6180	2022-08-09	2024-08-09
T/H Data Logger	Extech Ins.	42270	5892	2022-04-07	2023-04-07

## 2.10.4 Test Sample Verification, Configuration & Modifications

To cover the unintentional conducted emission. The both radios were configured in receive mode. EUT has option of POE. EUT tested for conducted emission on AC side of POE adaptor model#PD-9501GO-ET/AC and serial#C19026674000302. Customer is not providing POE adaptor with EUT.

The EUT met the requirements without modification.

### Diagram of setup for Conducted Emissions testing:

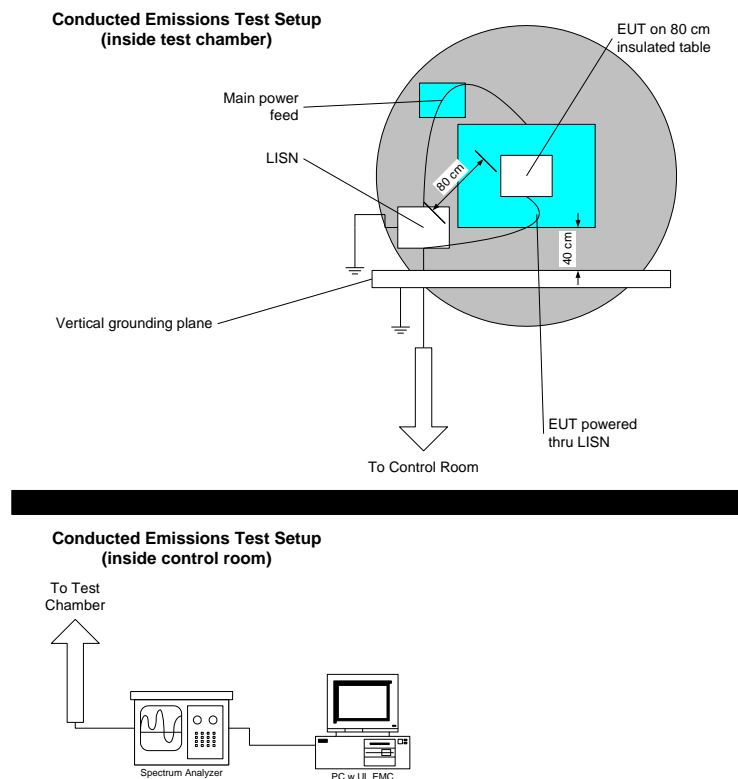

## 2.10.5 Conducted Emissions Data

The emissions data is presented in tabular form, showing the uncorrected spectrum analyzer reading, the correction factors applied, the net result, the value(s) of limit at the frequency measured, and the Delta between the result and the limit.

### EUT with LTE EM7455

Freq. Marker	Freq. (MHz)	Raw reading (dBμV)	Det.	LISN Factor (dB/m)	Cable Loss (dB)	Corrected Reading (dBμV)	FCC 107 Limit (dBμV)	Delta (dB)	L / N
1	.16118	36.73	LnAv	.1	9.8	46.63	55.4	-8.77	Line
2	.51162	27.86	LnAv	0	9.8	37.66	46	-8.34	Line
3	4.85472	18.46	LnAv	0	10	28.46	46	-17.54	Line
4	13.47756	18.03	LnAv	0	10.4	28.43	50	-21.57	Line
1	.16491	35.51	LnAv	.1	9.8	45.41	55.21	-9.8	Neutral
2	.50043	28.87	LnAv	0	9.8	38.67	46	-7.33	Neutral
3	4.8249	23.7	LnAv	0	10	33.7	46	-12.3	Neutral
4	13.41418	18.76	LnAv	0	10.4	29.16	50	-20.84	Neutral

**Meter Reading in dBμV + LISN Factor in dB + Gain/Loss Factor in dB = Corrected Emission Strength in dBμV.**

Notes:


- When a preamp is used, the resulting gain is compensated, producing a negative value for the Cable Loss.
- LnAv = Linear Average detector

**Negative values for Delta indicate compliance.**




## EUT with LTE EM7455

### Plot of Conducted Emissions: LINE

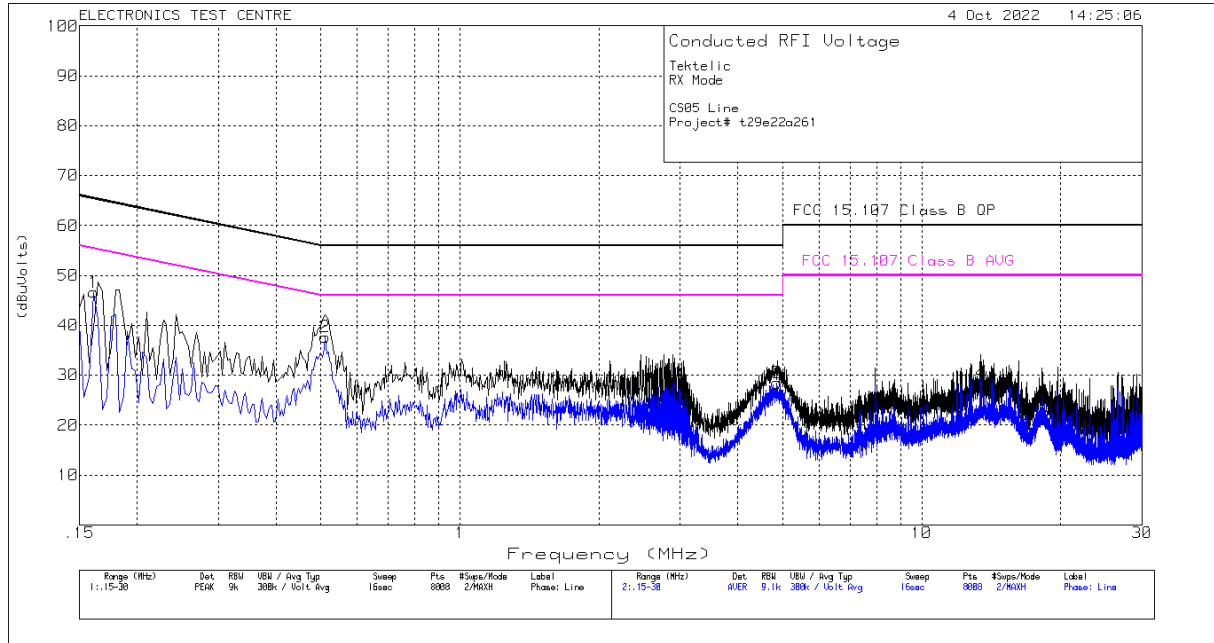

### Plot of Conducted Emissions: Neutral

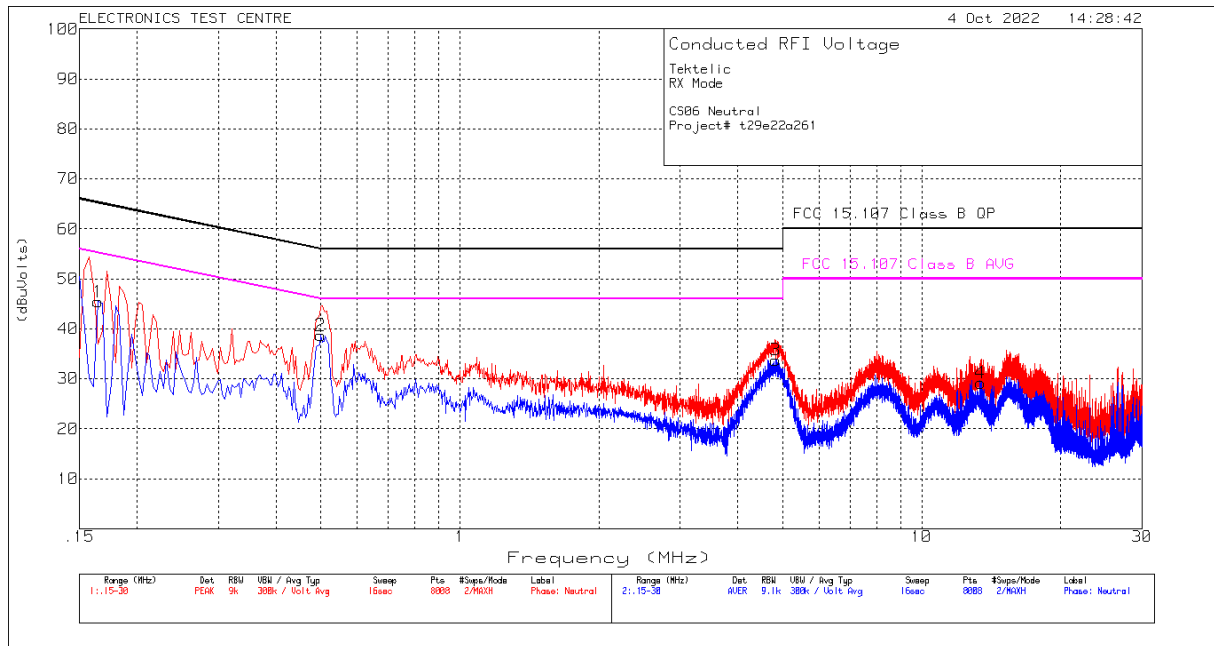

## 2.11 RF Exposure

Test Lab: Electronics Test Centre, Airdrie	EUT: Kona Mega Gateway
Test Personnel:	Standard: FCC PART 15.247
Date:	
EUT status: Compliant	

**Compliant:** RF exposure assessment to be provided in a separate Exhibit.

## **3.0 TEST FACILITY**

### **3.1 Location**

The Kona Mega Gateway was tested at the Electronics Test Centre laboratory located in Airdrie, Alberta, Canada. The Radio Frequency Anechoic Chamber (RFAC), identified as Chamber 1, has a usable working space measuring 10.6 m long x 7.3 m wide x 6.5 m high.

Measurements taken at this site are accepted by Industry Canada as evidence of conformity per registration file # 2046A. This site is also listed with the FCC under Registration Number CA2046.

The floor, walls and ceiling consist of annealed steel panels. The walls and ceiling are covered with ferrite tile, augmented by RF absorbant foam material on the end wall nearest the turntable, and on the adjacent walls and the ceiling. The chamber floor supports a 15 cm high internal floor, constructed of annealed steel panels, that forms the ground plane, and is bonded to the chamber walls.

The 3-m diameter turntable is flush-mounted with the floor. A sub-floor cable-way is provided to route cables between the turntable pit and EUT support equipment located in the Control Room. Cables reach the EUT through an opening in the centre of the turntable.

Test instrumentation and EUT support equipment is located in the Control Room, consisting of two shielded vestibules joined together at the side of the main room. Cables are routed through bulkhead panels between the rooms and the test chamber as required. Power feeds are routed into the main room and vestibules through line filters providing at least 100 dB of attenuation between 10 kHz and 10 GHz.

Either floor mounted or table-top equipment can be tested at this facility.

### **3.2 Grounding Plan**

The Kona Mega Gateway was placed at the center of the test chamber turntable on top of an 80-cm high polystyrene foam table below 1GHz and at 1.5m high polystyrene foam table above 1 GHz in TX Mode. The EUT was grounded according to Tektelic Communication Inc. specifications. Enclosure is connected to ground.


### **3.3 Power Supply**

All EUT power was supplied by an external DC power supply.

## Appendix A – EUT Family Information

Product Number	1X LoRa ANT	2X LoRa ANT	LTE Modem
T0004978	X		
T0004982		X	
T0004988	X		
T0004992		X	
T0004996	X		
T0005000		X	
T0005004	X		
T0005006	X		X
T0005008		X	
T0005010		X	X

## Appendix B – Test Setup Block Diagram

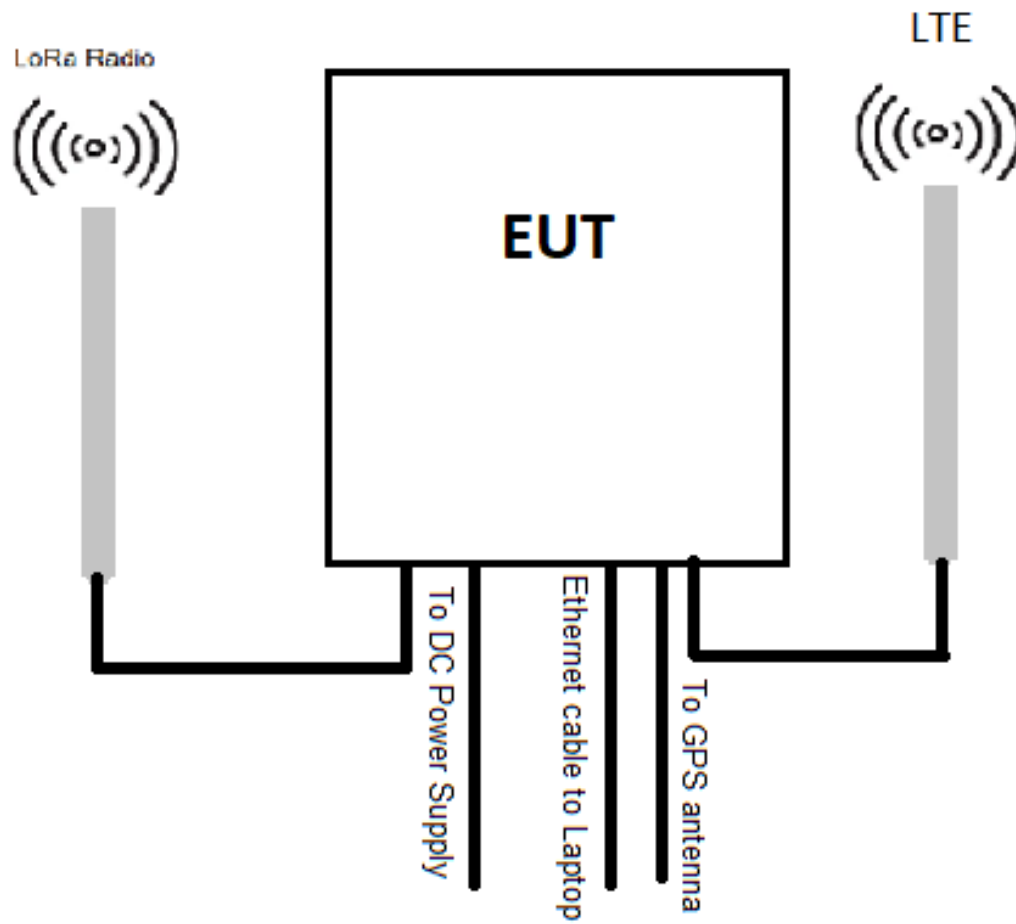

**End of Document**