

8.5 MAXIMUM POWER SPECTRAL DENSITY

8.5.1 Applicable Standard

According to FCC Part15.247(e)

According to RSS-247 5.2(b)

According to RSS-Gen 6.12

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.4

According to ANSI C63.10 Section 11.10.5

8.5.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

8.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup

8.5.4 Test Procedure

- Measure the duty cycle (D) of the transmitter output signal
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq [3 \times \text{RBW}]$.
- Detector = power averaging (rms) or sample detector (when rms not available).
- Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep time = auto couple.
- Do not use sweep triggering; allow sweep to "free run."
- Employ trace averaging (rms) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $[10 \log (1 / D)]$, where D is the duty cycle measured in step a), to the measured PSD to compute the average PSD during the actual transmission time.
- If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

8.5.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar
Test Engineer:	XXH

Note: N/A

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-14.79	≤8.00	PASS
		2437	-14.6	≤8.00	PASS
		2462	-14.96	≤8.00	PASS
11G	Ant1	2412	-18.14	≤8.00	PASS
		2437	-17.75	≤8.00	PASS
		2462	-18.04	≤8.00	PASS
11N20SISO	Ant1	2412	-17.31	≤8.00	PASS
		2437	-17.68	≤8.00	PASS
		2462	-17.28	≤8.00	PASS
11N40SISO	Ant1	2422	-21.51	≤8.00	PASS
		2437	-21.47	≤8.00	PASS
		2452	-21.1	≤8.00	PASS
11AX20SISO	Ant1	2412	-11.85	≤8.00	PASS
		2437	-11.84	≤8.00	PASS
		2462	-11.95	≤8.00	PASS
11AX40SISO	Ant1	2422	-13.96	≤8.00	PASS
		2437	-13.96	≤8.00	PASS
		2452	-14.01	≤8.00	PASS



Date: 12.AUG.2024 08:49:51

11B_Ant1_2412




Date: 12.AUG.2024 08:53:13

11B_Ant1_2437




Date: 12.AUG.2024 08:56:36


11B_Ant1_2462

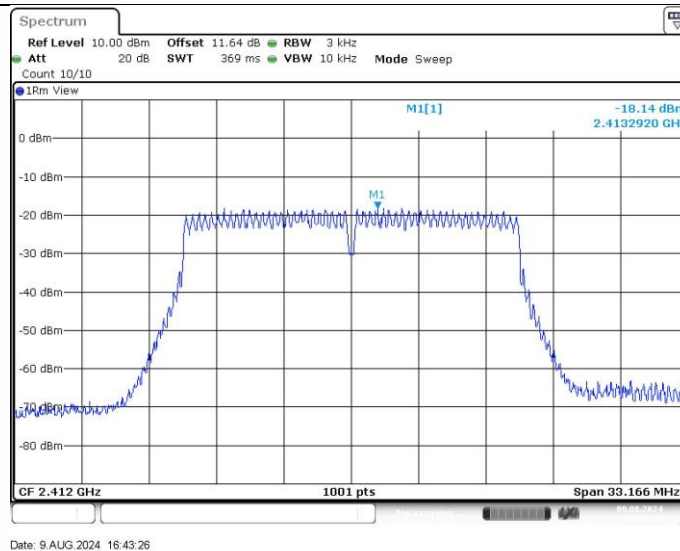


11G Ant1_2412

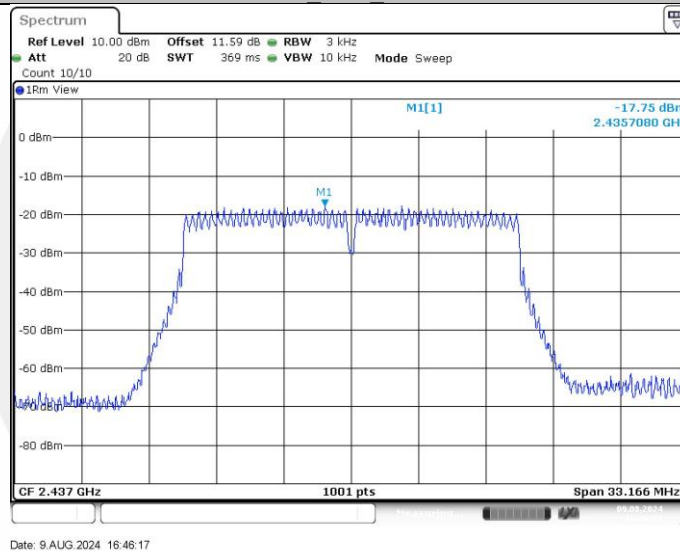


11G Ant1_2437

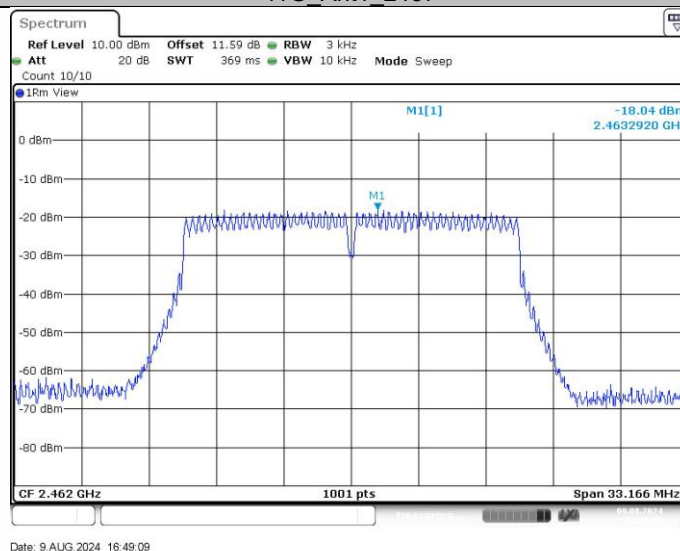


11G Ant1_2462

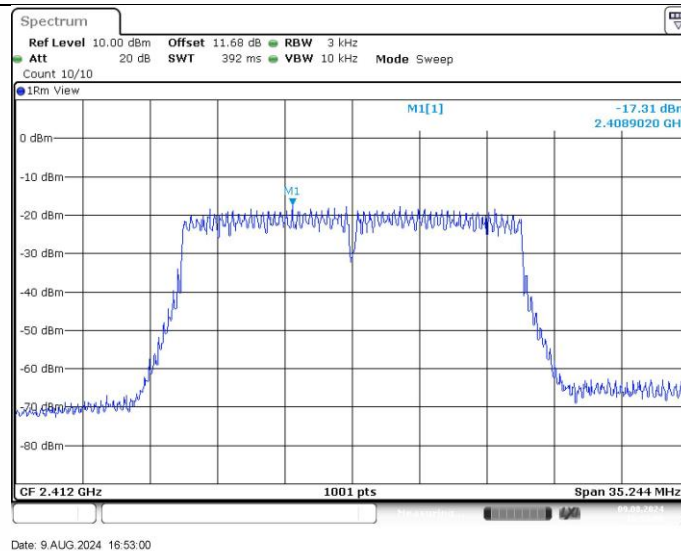


11N20SISO Ant1 2412

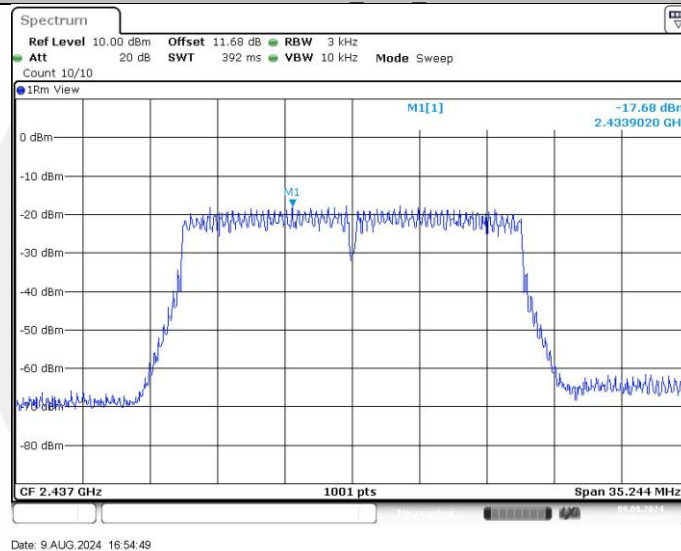

11N20SISO Ant1 2437

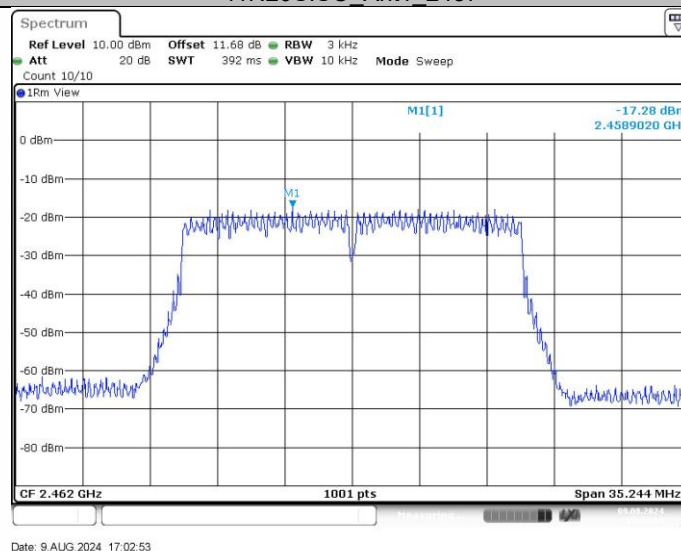


11N20SISO Ant1 2462

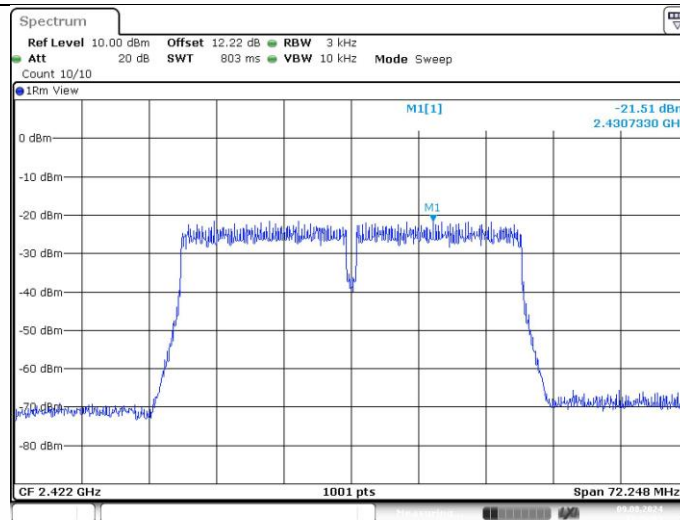


Date: 9.AUG.2024 17:26:03

11N40SISO_Ant1_2422

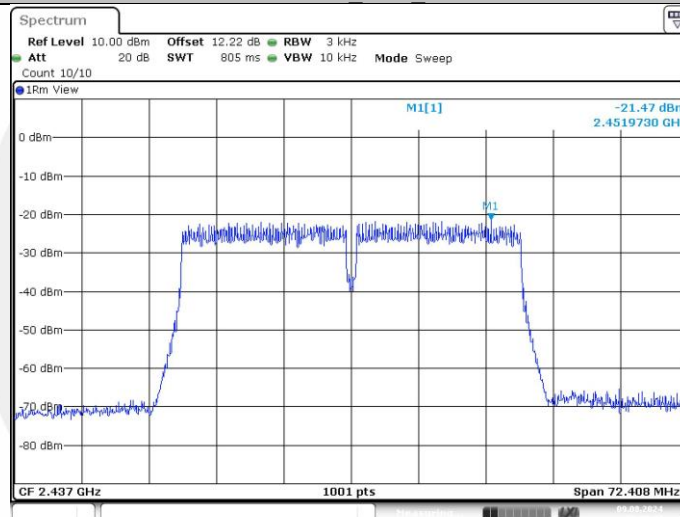


Date: 9.AUG.2024 17:29:47

11N40SISO_Ant1_2437

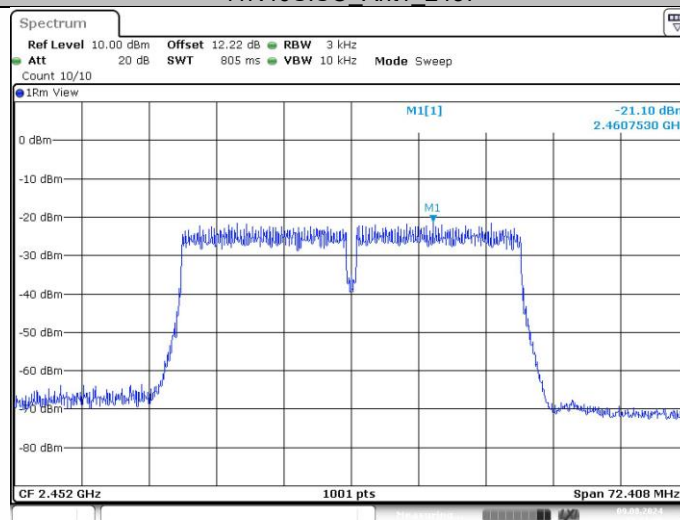


Date: 9.AUG.2024 17:31:31

11N40SISO_Ant1_2452

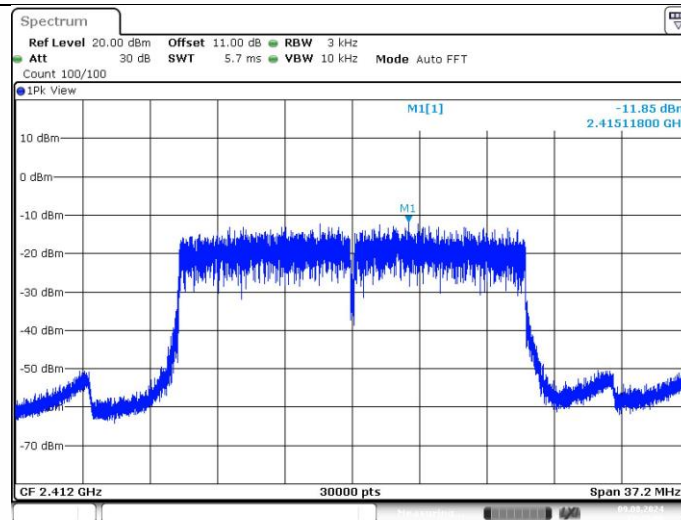


Date: 9 AUG 2024 17:45:56

11AX20SISO_Ant1_2412

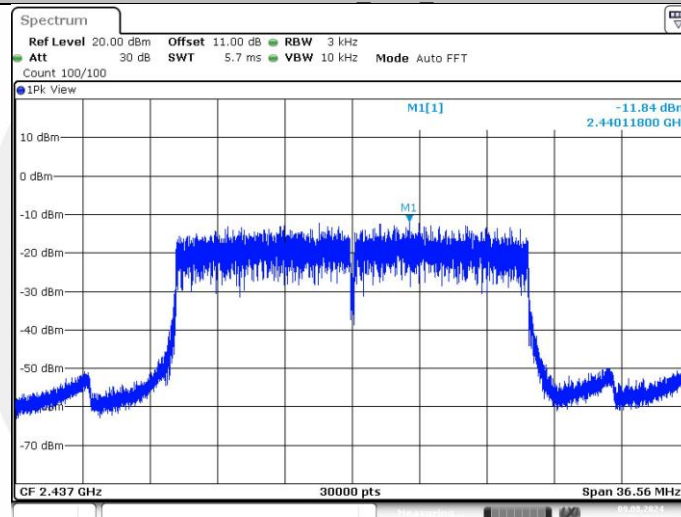


Date: 9 AUG 2024 17:47:44

11AX20SISO_Ant1_2437

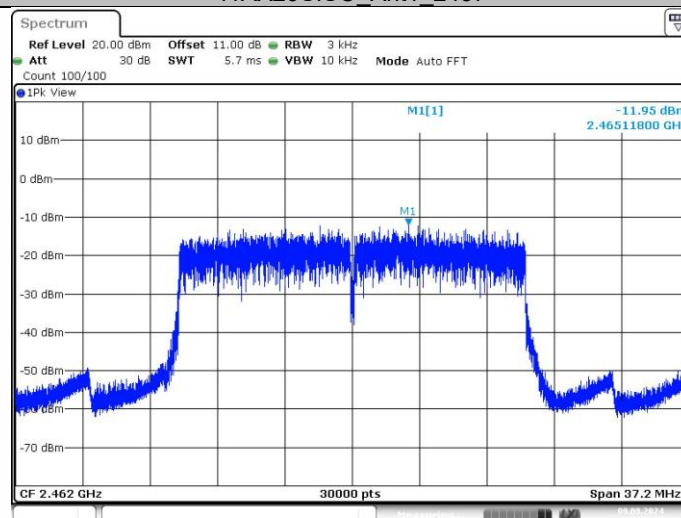


Date: 9 AUG 2024 17:49:07

11AX20SISO_Ant1_2462

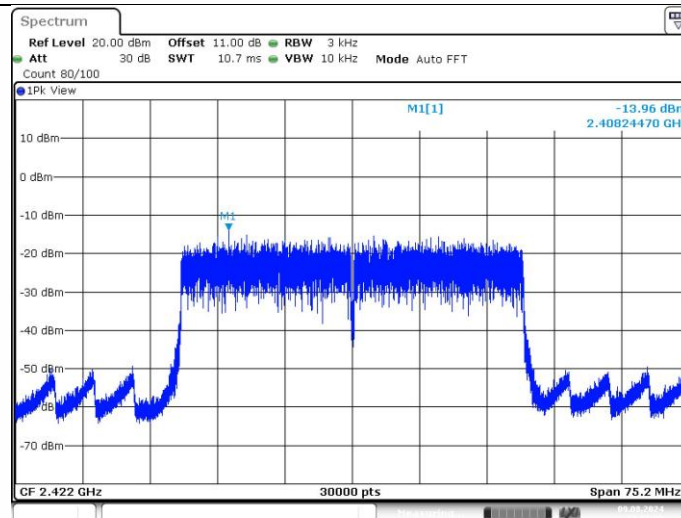


Date: 9.AUG.2024 17:51:04

11AX40SISO_Ant1_2422

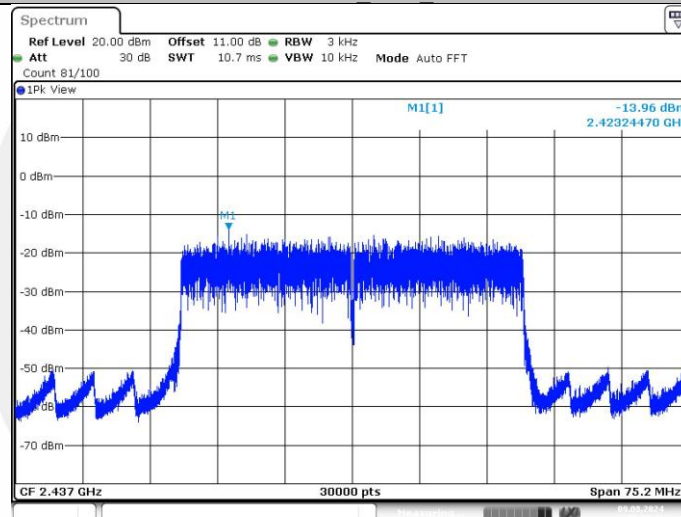

Date: 9.AUG.2024 17:52:41

11AX40SISO_Ant1_2437

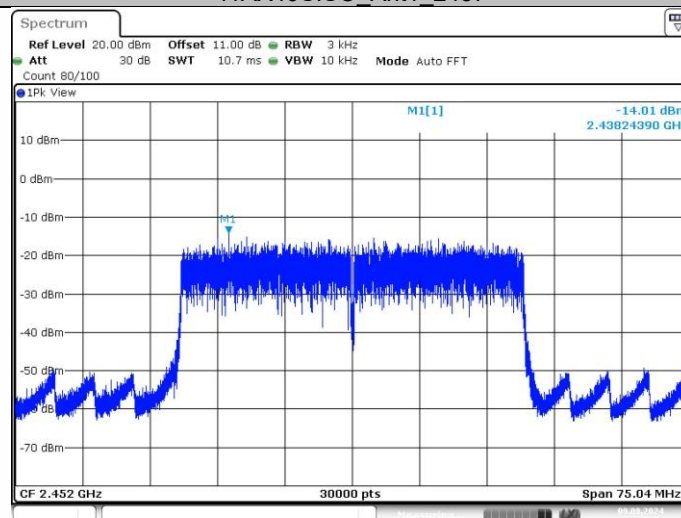

Date: 9.AUG.2024 17:53:51

11AX40SISO_Ant1_2452

8.6 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.6.1 Applicable Standard

According to FCC Part15.247(d)

According to RSS-247 5.5

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.5

According to ANSI C63.10 Section 11.11

8.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

8.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup

8.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHz Set VBW $\geq 3 \times$ RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding

restricted frequency bands) are attenuated by at least the minimum requirements . Report the three highest emissions relative to the limit.


8.6.5 Test Results

Temperature:	25 °C
Relative Humidity:	45%
ATM Pressure:	1011 mbar
Test Engineer:	XXH


Note: N/A

Reference level measurement


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
11B	Ant1	2412	2410.49	7.82
		2437	2438.51	7.82
		2462	2460.49	7.76
11G	Ant1	2412	2414.52	4.86

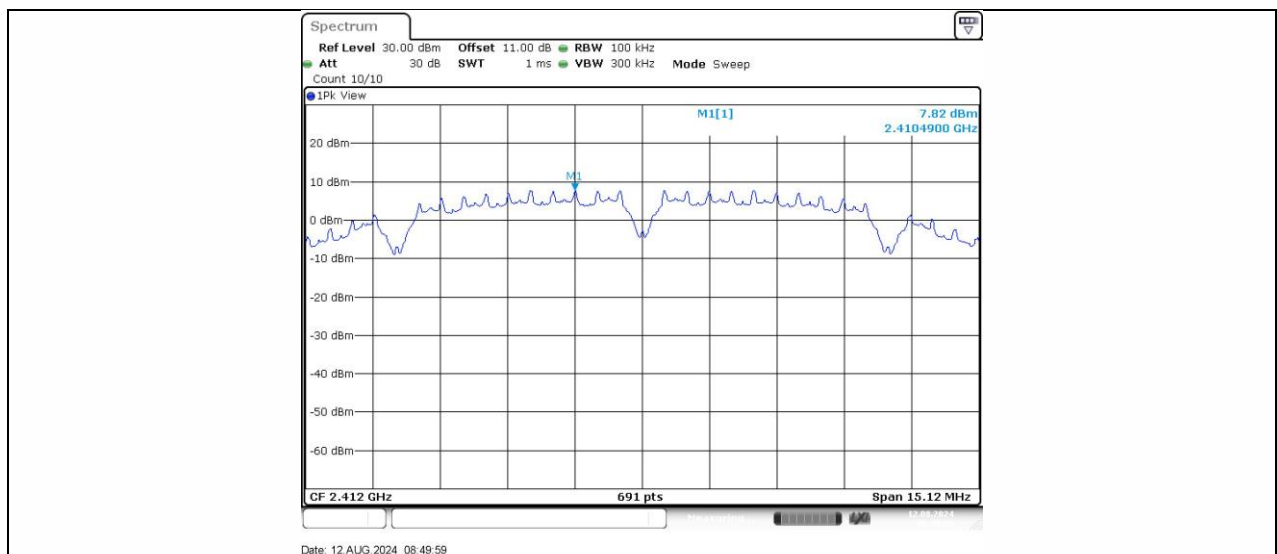

11B_Ant1_2412

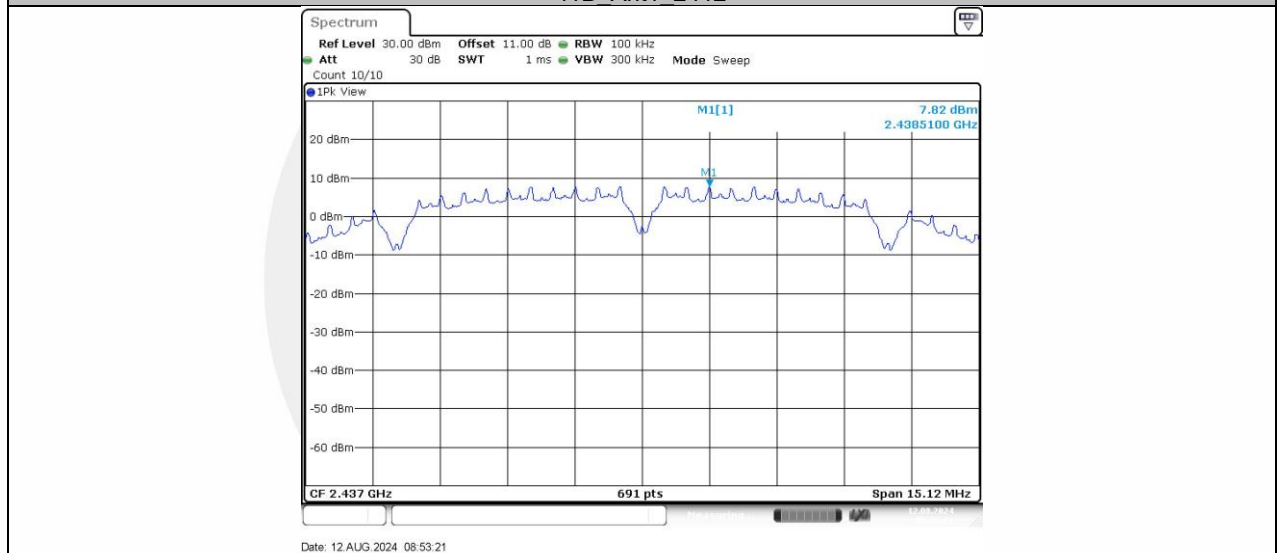


11B_Ant1_2437

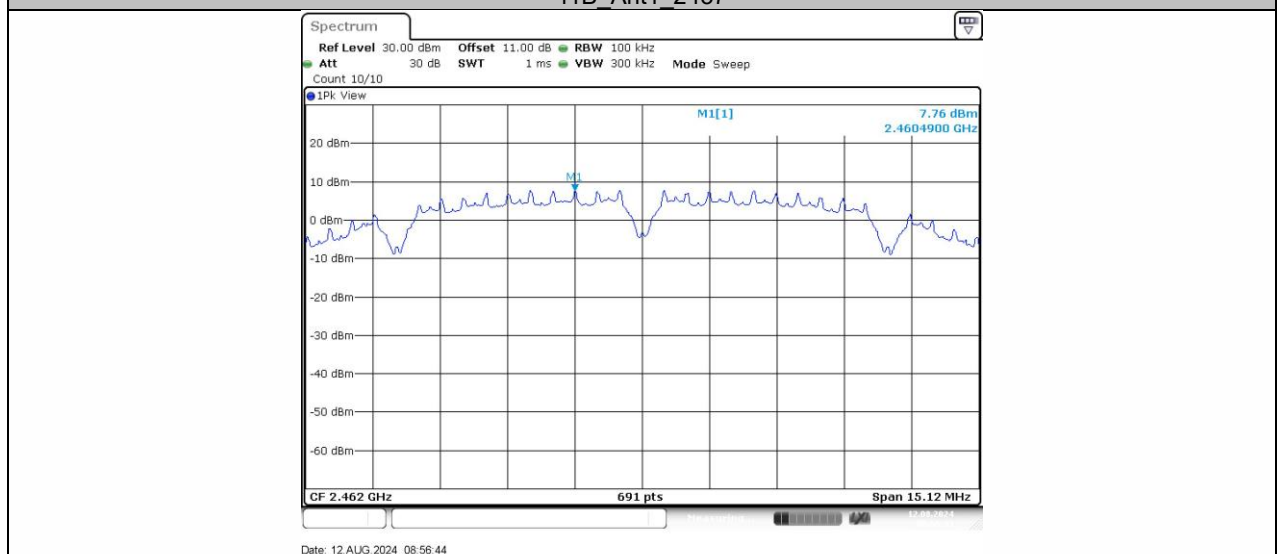


11B_Ant1_2462

Band edge measurements

TestMode	Antenna	ChName	Frequency [MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	7.82	-35.54	≤-22.18	PASS
		High	2462	7.76	-37.27	≤-22.24	PASS
11G	Ant1	Low	2412	4.86	-44.07	≤-25.14	PASS

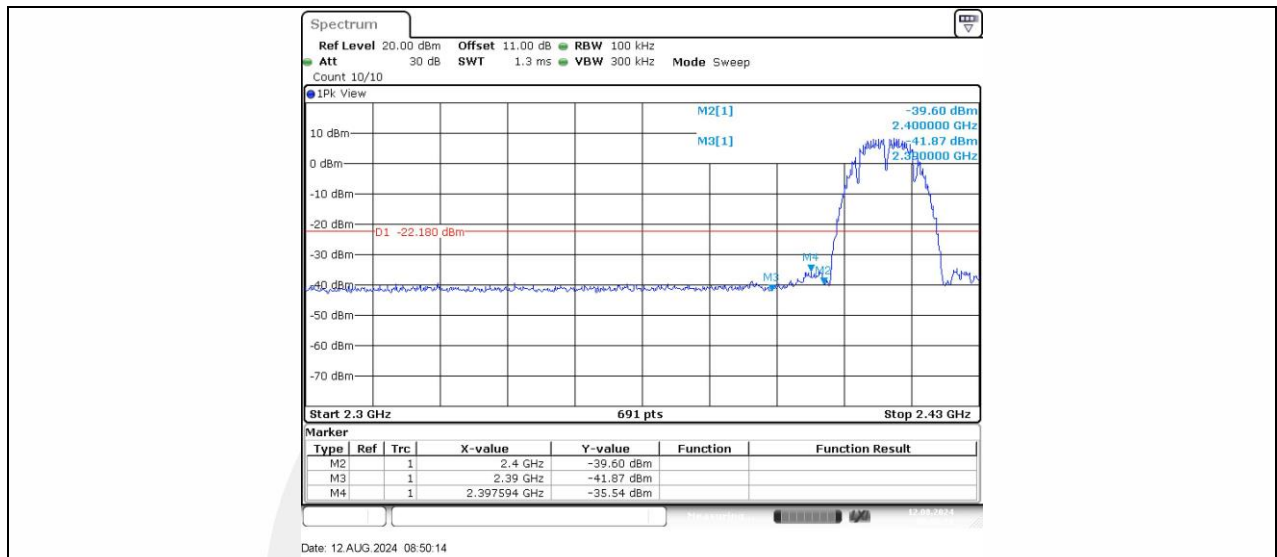

11B_Ant1_Low_2412

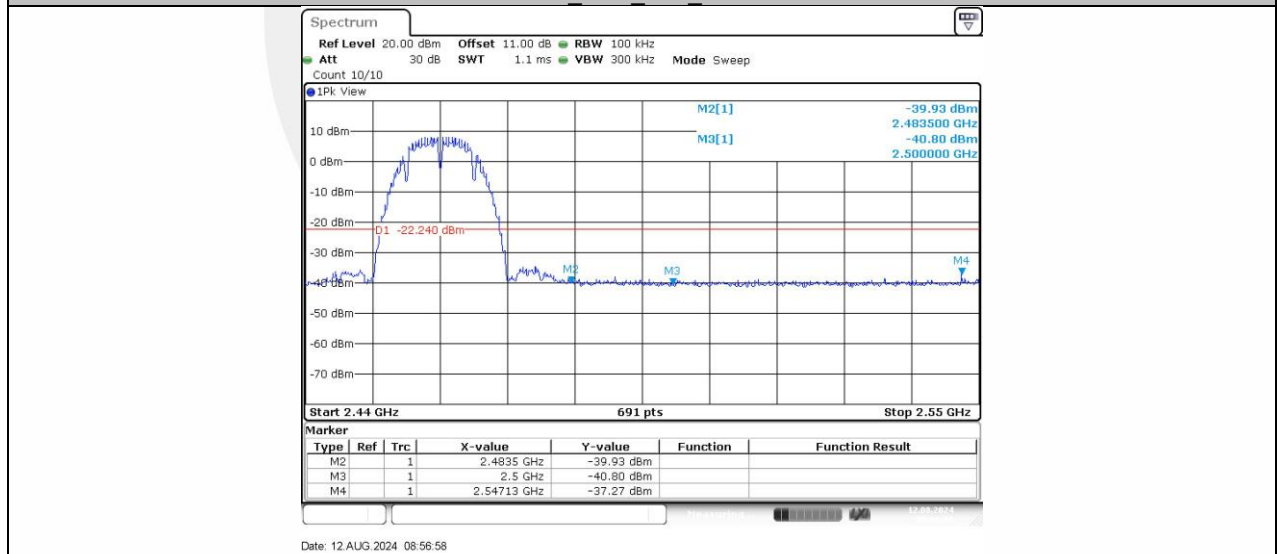


11B_Ant1_High_2462


Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	30~1000	7.82	-48.2	≤-22.18	PASS
			1000~26500	7.82	-43.92	≤-22.18	PASS
		2437	30~1000	7.82	-48.3	≤-22.18	PASS
			1000~26500	7.82	-44.87	≤-22.18	PASS
		2462	30~1000	7.76	-47.81	≤-22.24	PASS
			1000~26500	7.76	-44.01	≤-22.24	PASS
11G	Ant1	2412	30~1000	4.86	-54.01	≤-25.14	PASS
			1000~26500	4.86	-44.07	≤-25.14	PASS




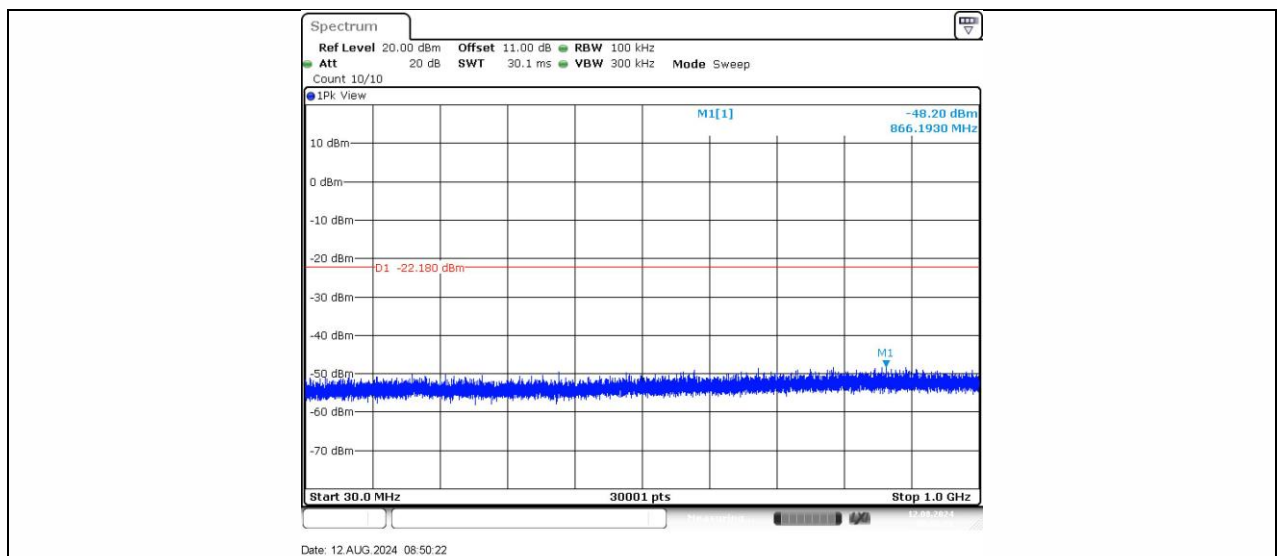


11B Ant1 2412 30~1000

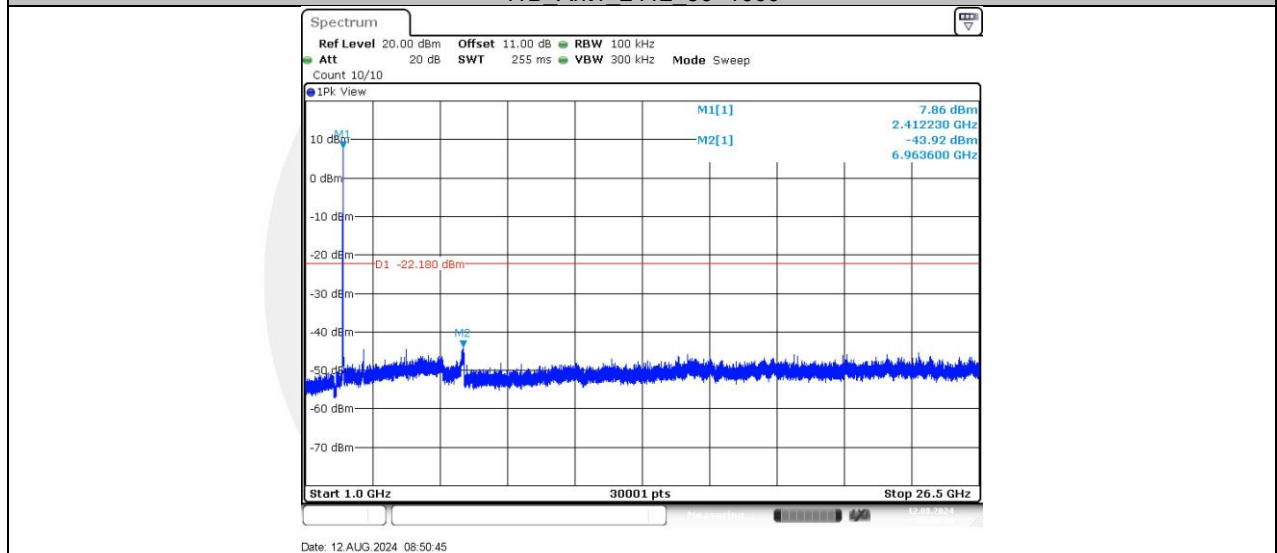


11B Ant1 2412 1000~26500

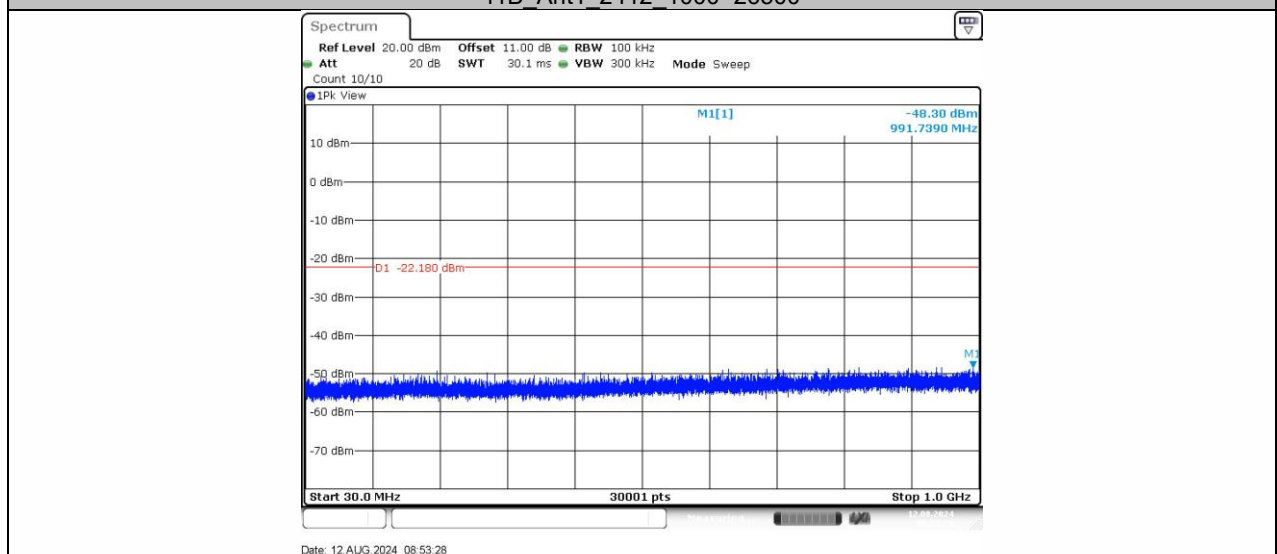


11B Ant1 2437 30~1000

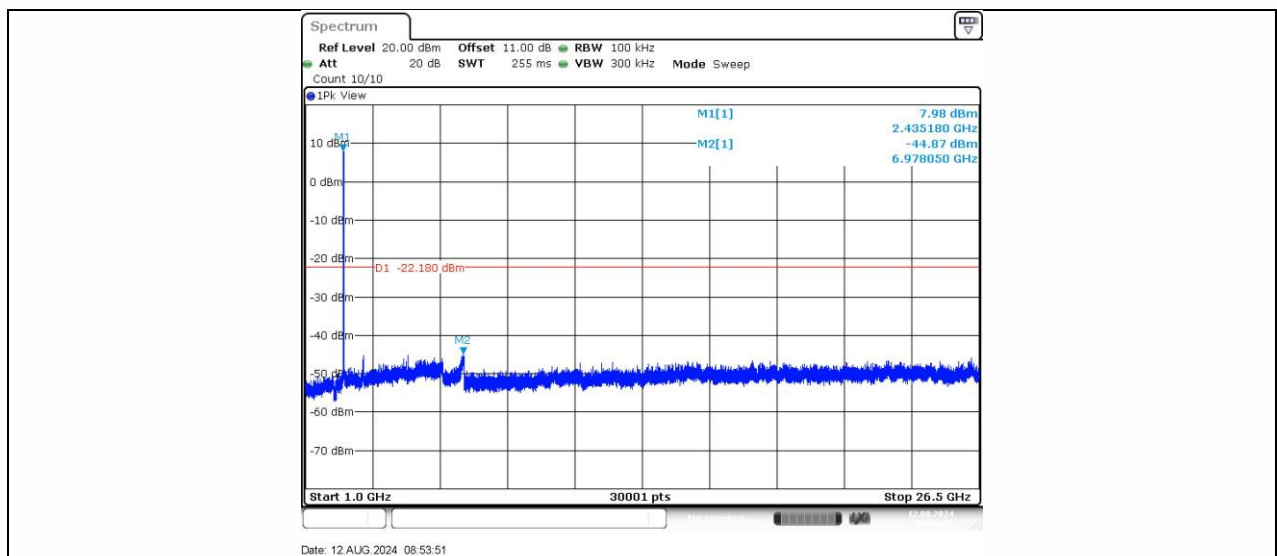

11B_Ant1_2437_1000~26500

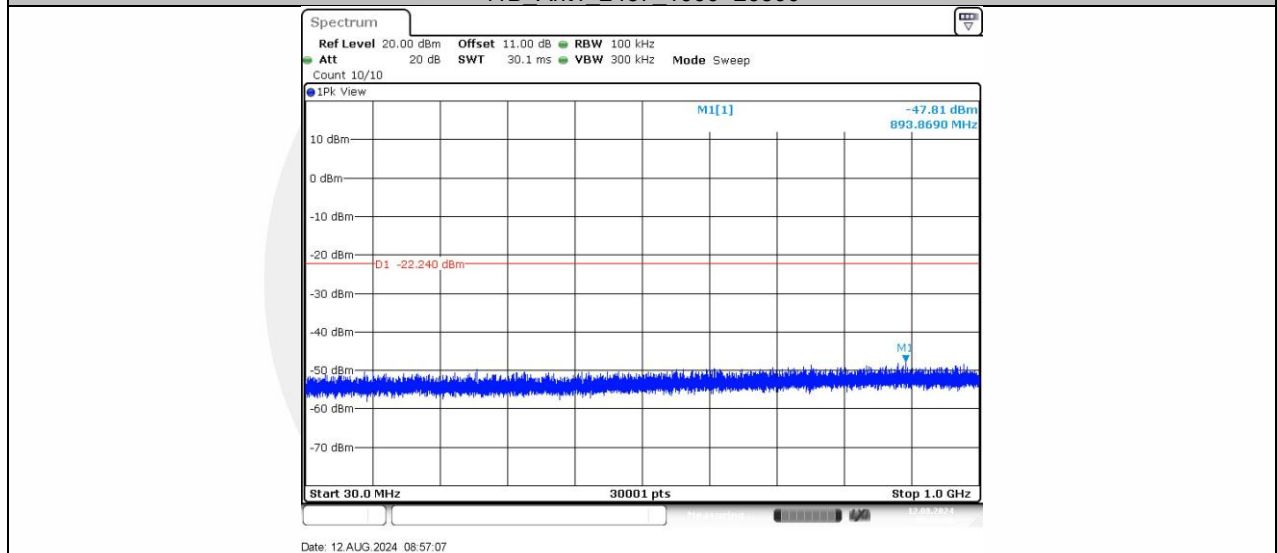

11B_Ant1_2462_30~1000

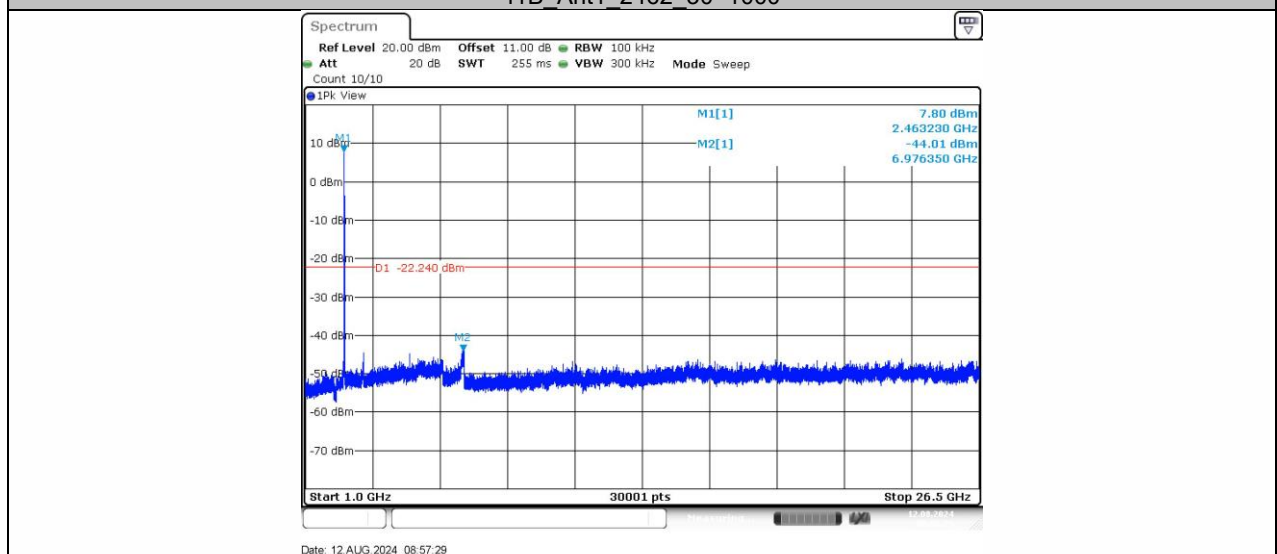

11B_Ant1_2462_1000~26500

8.7 RADIATED SPURIOUS EMISSION

8.7.1 Applicable Standard

According to FCC Part 15.247(d), 15.205, 15.209

According to RSS-Gen and RSS-247

According to 558074 D01 15.247 Meas Guidance v05r02 Section 8.6

According to ANSI C63.10 Section 11.12

8.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

According to FCC Part 15.205 the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (μV/m)	300
0.490-1.705	24000/F(KHz)	20 log (μV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup

8.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For average measurements the resolution bandwidth of spectrum analyzer is 1 MHz with the video bandwidth is $\geq 1/T$ with peak detector.

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit. Submit this data.

8.7.5 Test Results

Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar
Test Engineer:	XXH

■ Spurious Emission below 30MHz(9KHz to 30MHz)

For Spurious Emission below 30MHz (9KHz to 30MHz), was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All the antenna(Antenna 1) and modes(802.11b/g/n/ax) have been tested and the worst(Antenna 1, 802.11b) result recorded was report as below:

Test mode:		802.11b		Frequency:		Channel 1: 2412MHz	
Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
8319.37	V	59.44	4.62	64.06	74.00	9.94	Peak
9849.37	V	57.74	9.38	67.12	74.00	6.88	Peak
16550.6	V	54.05	13.61	67.66	74.00	6.34	Peak
8319.375	V	39.64	4.62	44.26	54.00	9.74	Avg
9849.375	V	35.18	9.38	44.56	54.00	9.44	Avg
16550.62	V	30.74	13.61	44.35	54.00	9.65	Avg
7976.25	H	59.29	3.62	62.91	74.00	11.09	Peak
9718.12	H	59.11	7.73	66.84	74.00	7.16	Peak
17030.6	H	51.58	15.93	67.51	74.00	6.49	Peak
7976.25	H	39.16	3.62	42.78	54.00	11.22	Avg
9718.125	H	35.84	7.73	43.57	54.00	10.43	Avg
17030.62	H	30.17	15.93	46.10	54.00	7.90	Avg
Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak; (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration; (3) Corrected Reading = Reading Level + Correct Factor; (4) Correct Factor = Ant_F + Cab_L - Preamp; (5) Margin = Limit - Corrected Reading;							

Test mode:		802.11b		Frequency:		Channel 6: 2437MHz	
Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
8428.12	V	58.7	5.49	64.19	74.00	9.81	Peak
11589.3	V	55.94	11.32	67.26	74.00	6.74	Peak
16575	V	54.67	13.17	67.84	74.00	6.16	Peak
8428.125	V	39.53	5.49	45.02	54.00	8.98	Avg
11589.37	V	35.12	11.32	46.44	54.00	7.56	Avg
16575	V	30.74	13.17	43.91	54.00	10.09	Avg
8437.5	H	58.28	5.50	63.78	74.00	10.22	Peak
9988.125	H	56.74	10.19	66.93	74.00	7.07	Peak
17784.37	H	51.84	16.49	68.33	74.00	5.67	Peak
8437.5	H	39.74	5.50	45.24	54.00	8.76	Avg
9988.125	H	35.83	10.19	46.02	54.00	7.98	Avg
17784.375	H	30.12	16.49	46.61	54.00	7.39	Avg
Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak; (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration; (3) Corrected Reading = Reading Level + Correct Factor; (4) Correct Factor = Ant_F + Cab_L - Preamp; (5) Margin = Limit - Corrected Reading;							

Test mode: 802.11b Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
7706.25	V	59.2	2.20	61.40	74.00	12.60	Peak
9573.75	V	59.09	6.67	65.76	74.00	8.24	Peak
16179.3	V	53.01	13.90	66.91	74.00	7.09	Peak
7706.25	V	39.27	2.20	41.47	54.00	12.53	Avg
9573.75	V	35.63	6.67	42.30	54.00	11.70	Avg
16179.37	V	30.19	13.90	44.09	54.00	9.91	Avg
7976.25	H	59.46	3.62	63.08	74.00	10.92	Peak
9858.75	H	56.2	9.69	65.89	74.00	8.11	Peak
16629.3	H	53.45	13.32	66.77	74.00	7.23	Peak
7976.25	H	39.53	3.62	43.15	54.00	10.85	Avg
9858.75	H	35.74	9.69	45.43	54.00	8.57	Avg
16629.37	H	30.91	13.32	44.23	54.00	9.77	Avg
Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak; (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration; (3) Corrected Reading = Reading Level + Correct Factor; (4) Correct Factor = Ant_F + Cab_L - Preamp; (5) Margin = Limit - Corrected Reading;							

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All the antenna(Antenna 1) and modes(802.11b/g/n/ax) have been tested and the worst(Antenna 1, 802.11n(HT20)) result recorded was report as below:


Test mode: 802.11n(HT20) Frequency: Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
2387.97	V	15.4	32.64	48.04	74.00	25.96	Peak
2387.97	V	6.24	32.64	38.88	54.00	15.12	Avg
2389.14	H	15.96	32.65	48.61	74.00	25.39	Peak
2389.14	H	6.83	32.65	39.48	54.00	14.52	Avg
Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak; (2) Avg RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = RMS; (3) Corrected Reading = Reading Level + Correct Factor; (4) Correct Factor = Ant_F + Cab_L - Preamp; (5) Margin = Limit - Corrected Reading;							


Test mode: 802.11n(HT20) Frequency: Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol.	Reading Level (dBuV/m)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Remark
2484.58	V	22.73	33.20	55.93	74.00	18.07	Peak
2484.58	V	6.42	33.20	39.62	54.00	14.38	Avg
2483.50	H	22.45	33.19	55.64	74.00	18.36	Peak
2483.50	H	6.12	33.19	39.31	54.00	14.69	Avg
Note: (1) Peak RBW = 1 MHz, VBW $\geq 3 \times$ RBW, Detector = Peak; (2) Avg RBW = 1 MHz, VBW = $1/T_{on}$, Detector = Peak, where: T_{on} is transmit duration; (3) Corrected Reading = Reading Level + Correct Factor; (4) Correct Factor = Ant_F + Cab_L - Preamp; (5) Margin = Limit - Corrected Reading;							


Test Model 802.11n(HT20) Spurious Emission in Restricted Band 2310-2390MHz
Channel 1: 2412MHz Polarity: H

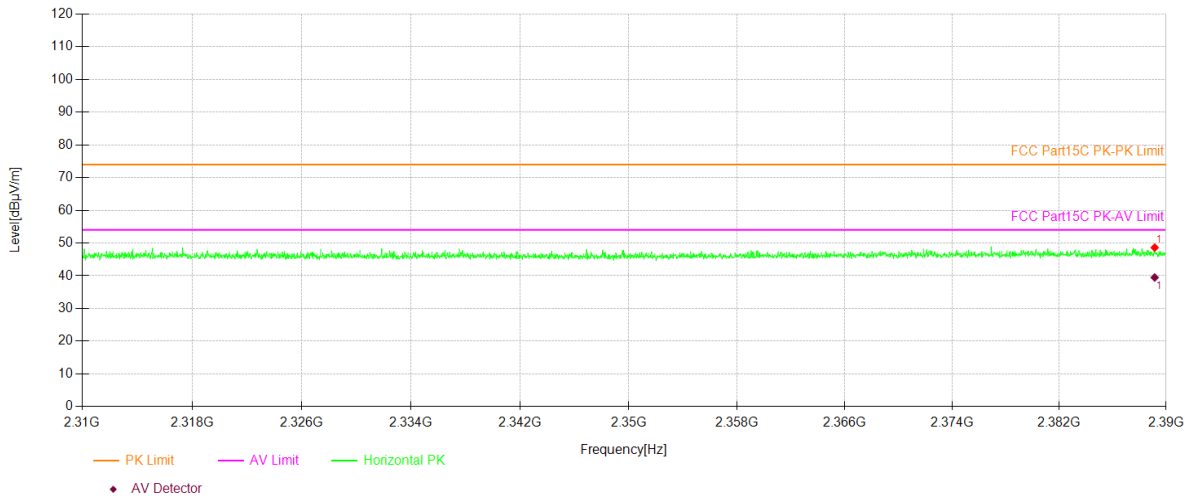


Test Model 802.11n(HT20) Spurious Emission in Restricted Band 2310-2390MHz
Channel 1: 2412MHz Polarity: V

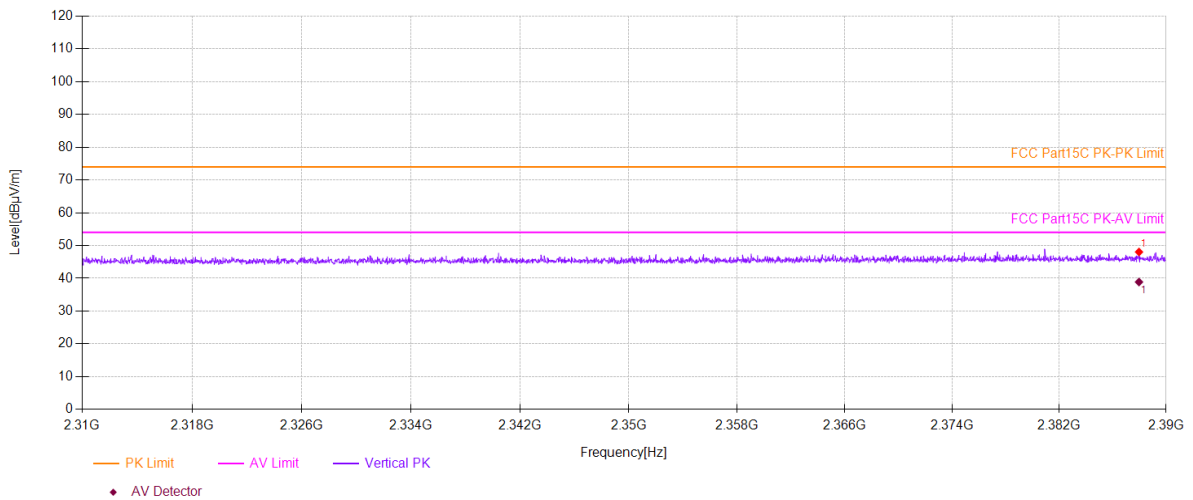

Test Model 802.11n(HT20) Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 11: 2462MHz Polarity: H

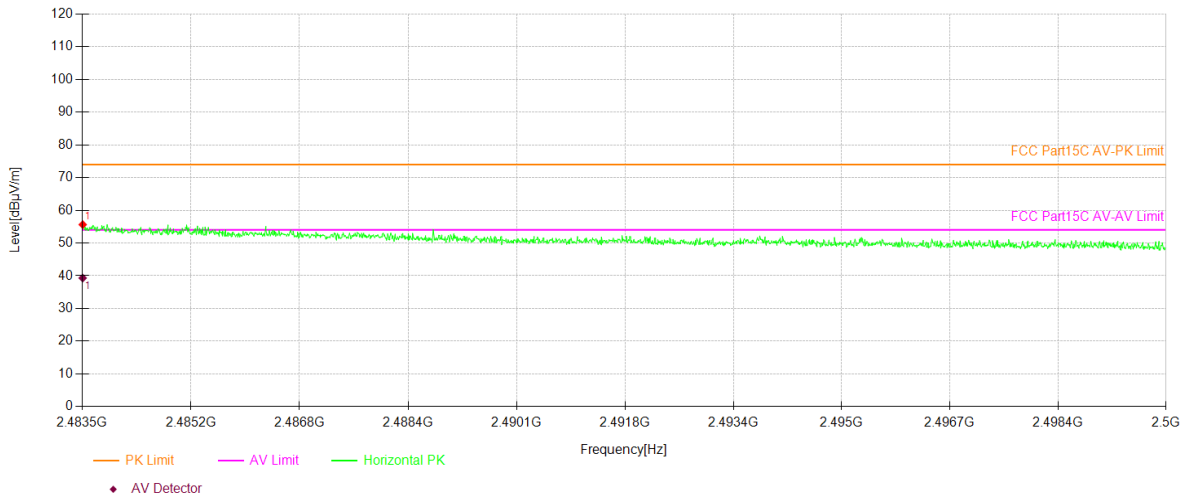


Test Model 802.11n(HT20) Spurious Emission in Restricted Band 2483.5-2500MHz
Channel 11: 2462MHz Polarity: V

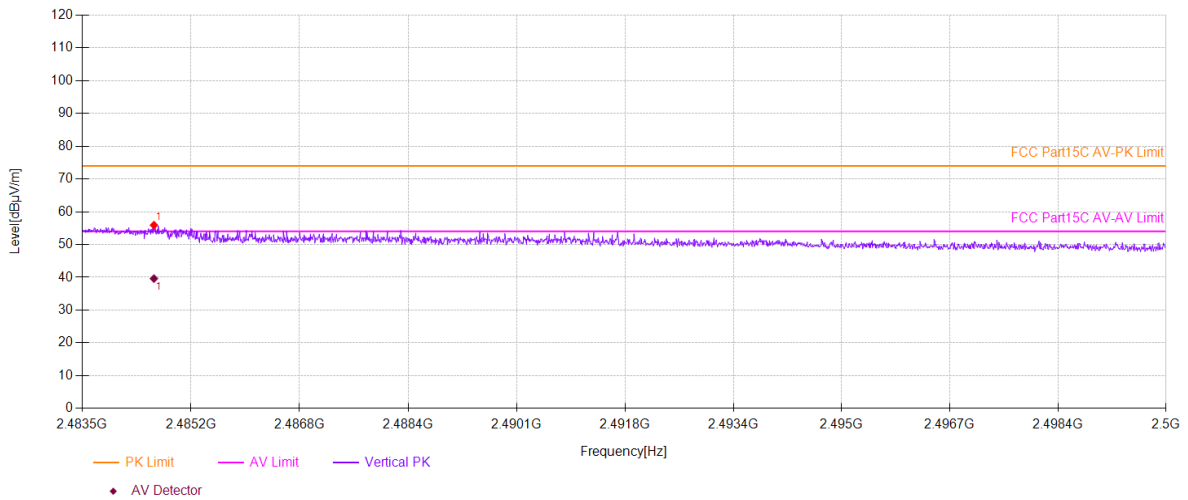

■ Spurious Emission below 1GHz (30MHz to 1GHz)


All the antenna(Antenna 1) and modes(802.11b/g/n/ax) have been tested and the worst(Antenna 1, 802.11b) result recorded was report as below:

2412

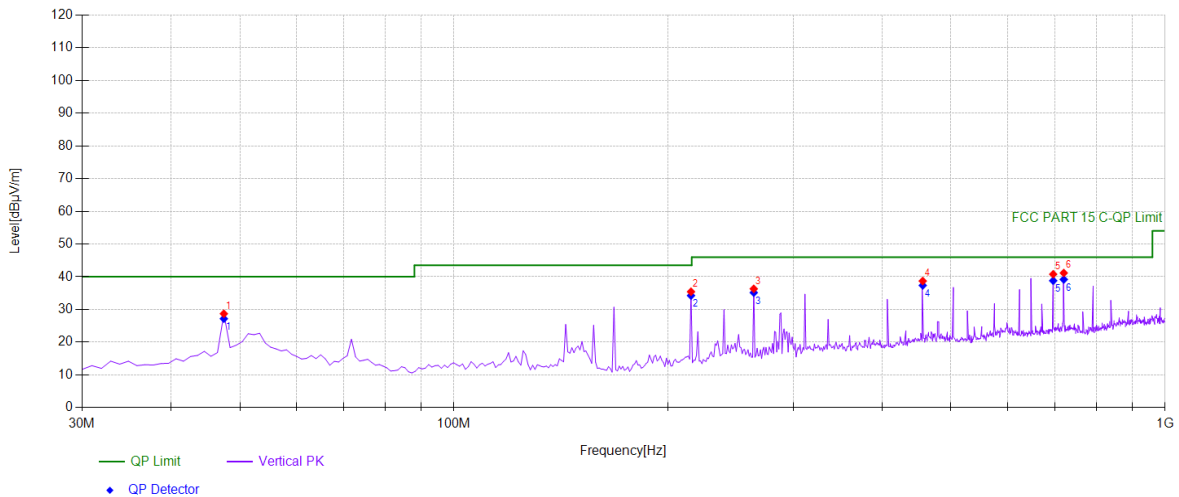

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	45.08	-16.37	28.71	PK	40.00	11.29	Vertical
2	215.455	52.01	-16.58	35.43	PK	43.50	8.07	Vertical
3	264.004	51.92	-15.60	36.32	PK	46.00	9.68	Vertical
4	456.256	49.18	-10.48	38.70	PK	46.00	7.30	Vertical
5	696.086	47.08	-6.30	40.78	PK	46.00	5.22	Vertical
6	720.360	47.27	-6.11	41.16	PK	46.00	4.84	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.37	27.18	40.00	12.82
2	215.4555	-16.58	34.26	43.50	9.24
3	264.004	-15.60	35.15	46.00	10.85
4	456.2563	-10.48	37.36	46.00	8.64
5	696.0861	-6.30	38.80	46.00	7.20
6	720.3604	-6.11	39.18	46.00	6.82

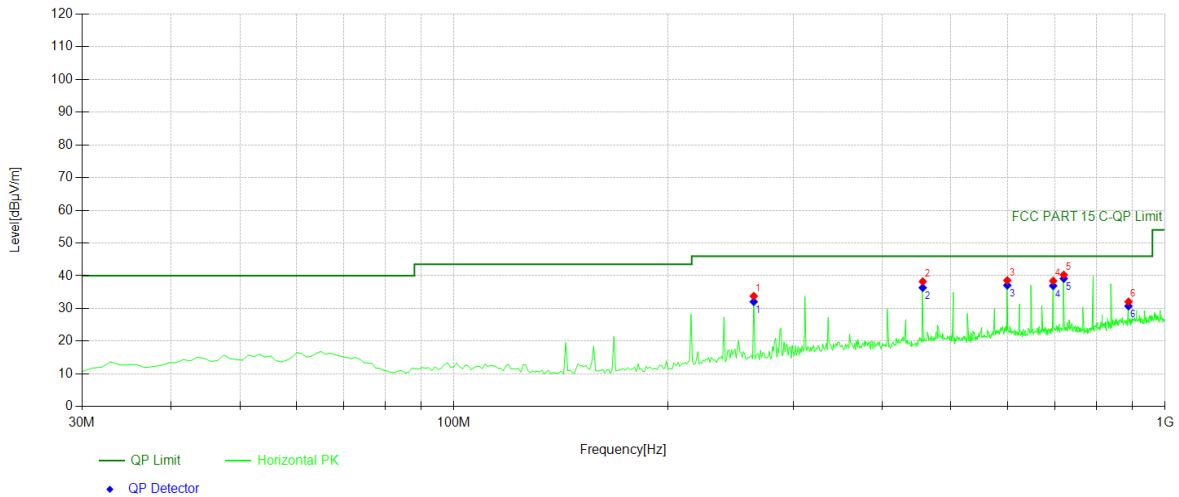


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	264.004	49.38	-15.60	33.78	PK	46.00	12.22	Horizontal
2	456.256	48.72	-10.48	38.24	PK	46.00	7.76	Horizontal
3	599.96	45.02	-6.44	38.58	PK	46.00	7.42	Horizontal
4	696.086	44.74	-6.30	38.44	PK	46.00	7.56	Horizontal
5	720.360	46.41	-6.11	40.30	PK	46.00	5.70	Horizontal
6	888.338	35.53	-3.47	32.06	PK	46.00	13.94	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	264.004	-15.60	32.07	46.00	13.93
2	456.2563	-10.48	36.37	46.00	9.63
3	599.96	-6.44	37.07	46.00	8.93
4	696.0861	-6.30	36.93	46.00	9.07
5	720.3604	-6.11	39.15	46.00	6.85
6	888.3383	-3.47	30.74	46.00	15.26

2437

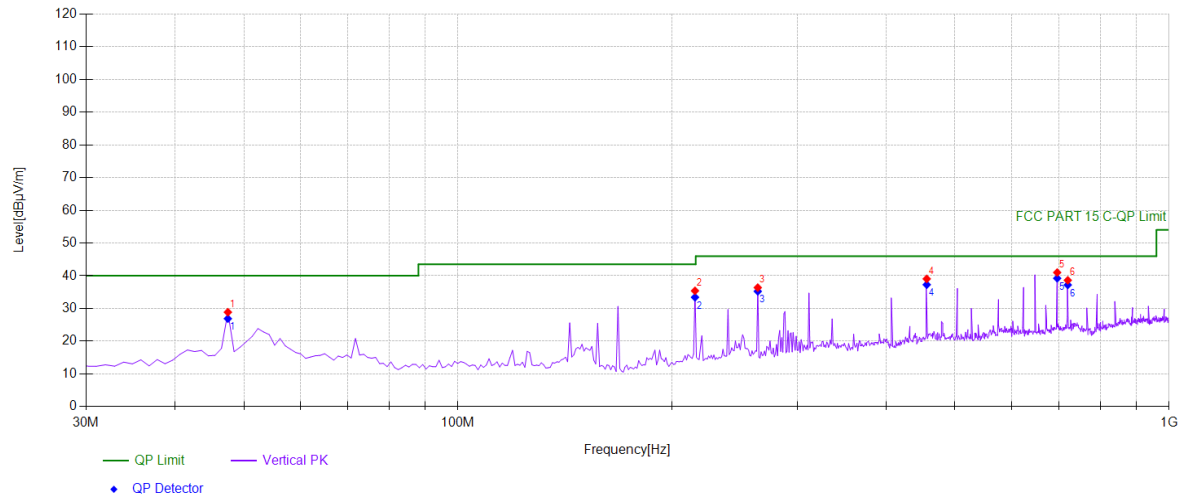


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	45.24	-16.37	28.87	PK	40.00	11.13	Vertical
2	215.455	51.99	-16.58	35.41	PK	43.50	8.09	Vertical
3	264.004	51.99	-15.60	36.39	PK	46.00	9.61	Vertical
4	456.256	49.54	-10.48	39.06	PK	46.00	6.94	Vertical
5	696.086	47.31	-6.30	41.01	PK	46.00	4.99	Vertical
6	720.360	44.73	-6.11	38.62	PK	46.00	7.38	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.37	26.90	40.00	13.10
2	215.4555	-16.58	33.44	43.50	10.06
3	264.004	-15.60	35.25	46.00	10.75
4	456.2563	-10.48	37.28	46.00	8.72
5	696.0861	-6.30	39.23	46.00	6.77
6	720.3604	-6.11	37.20	46.00	8.80

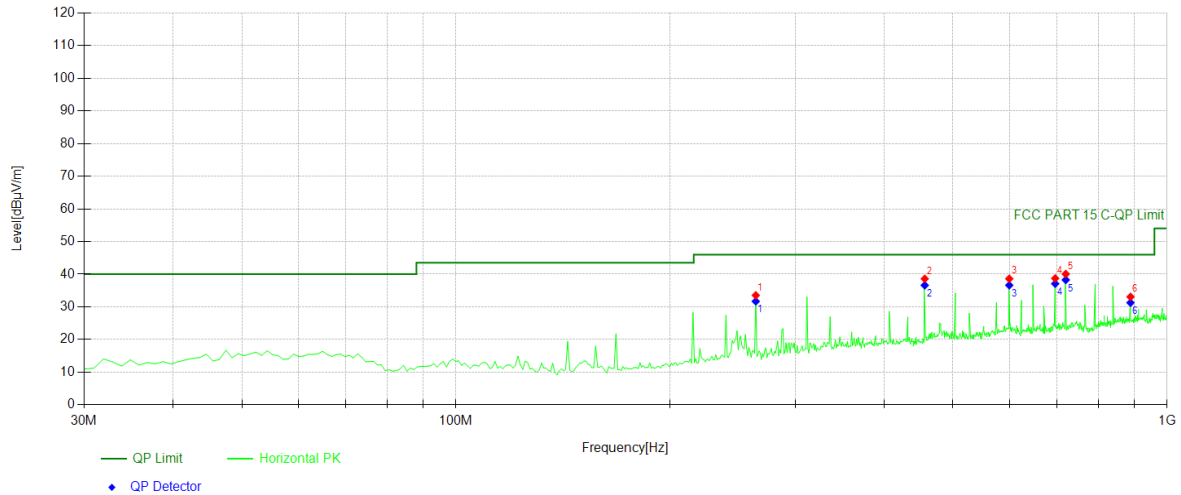


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	264.004	49.13	-15.60	33.53	PK	46.00	12.47	Horizontal
2	456.256	49.08	-10.48	38.60	PK	46.00	7.40	Horizontal
3	599.96	45.05	-6.44	38.61	PK	46.00	7.39	Horizontal
4	696.086	45.02	-6.30	38.72	PK	46.00	7.28	Horizontal
5	720.360	46.18	-6.11	40.07	PK	46.00	5.93	Horizontal
6	888.338	36.55	-3.47	33.08	PK	46.00	12.92	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	264.004	-15.60	31.70	46.00	14.30
2	456.2563	-10.48	36.61	46.00	9.39
3	599.96	-6.44	36.62	46.00	9.38
4	696.0861	-6.30	37.09	46.00	8.91
5	720.3604	-6.11	38.27	46.00	7.73
6	888.3383	-3.47	31.28	46.00	14.72

2462

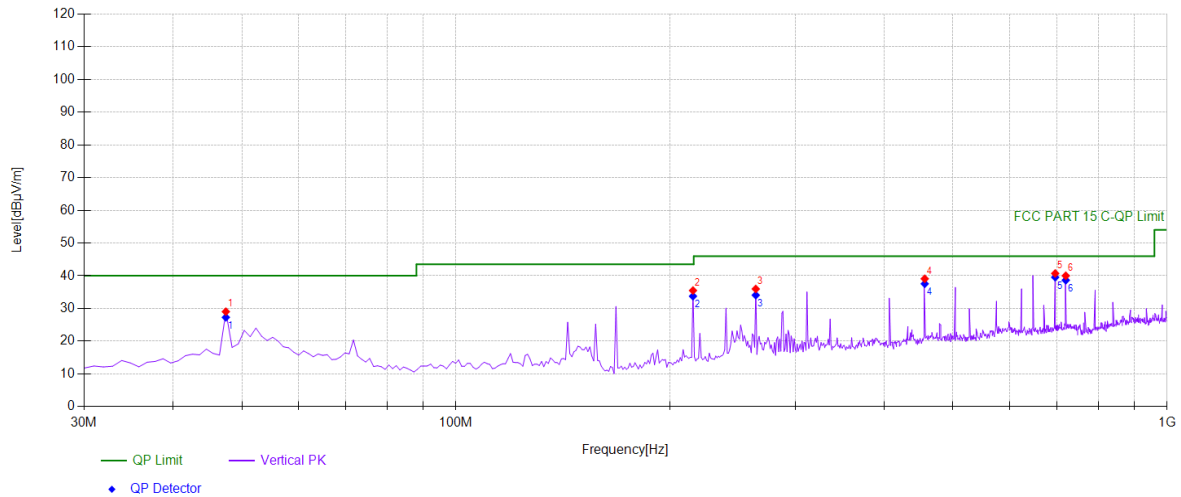


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	47.4775	45.41	-16.37	29.04	PK	40.00	10.96	Vertical
2	215.455	52.08	-16.58	35.50	PK	43.50	8.00	Vertical
3	264.004	51.57	-15.60	35.97	PK	46.00	10.03	Vertical
4	456.256	49.57	-10.48	39.09	PK	46.00	6.91	Vertical
5	696.086	47.02	-6.30	40.72	PK	46.00	5.28	Vertical
6	720.360	46.11	-6.11	40.00	PK	46.00	6.00	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	47.4775	-16.37	27.30	40.00	12.70
2	215.4555	-16.58	33.76	43.50	9.74
3	264.004	-15.60	34.07	46.00	11.93
4	456.2563	-10.48	37.55	46.00	8.45
5	696.0861	-6.30	39.54	46.00	6.46
6	720.3604	-6.11	38.65	46.00	7.35

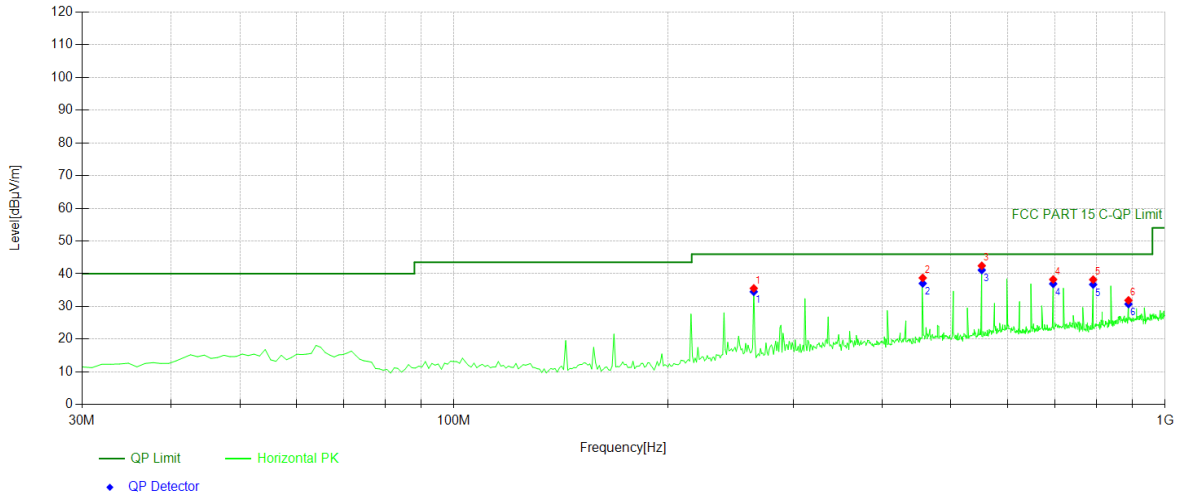

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	264.004	51.15	-15.60	35.55	PK	46.00	10.45	Horizontal
2	456.256	49.22	-10.48	38.74	PK	46.00	7.26	Horizontal
3	552.382	51.40	-8.95	42.45	PK	46.00	3.55	Horizontal
4	696.086	44.57	-6.30	38.27	PK	46.00	7.73	Horizontal
5	792.212	44.29	-6.08	38.21	PK	46.00	7.79	Horizontal
6	888.338	35.35	-3.47	31.88	PK	46.00	14.12	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	264.004	-15.60	34.50	46.00	11.50
2	456.2563	-10.48	37.05	46.00	8.95
3	552.3824	-8.95	41.12	46.00	4.88
4	696.0861	-6.30	36.94	46.00	9.06
5	792.2122	-6.08	36.72	46.00	9.28
6	888.3383	-3.47	30.74	46.00	15.26

8.8 CONDUCTED EMISSION TEST

8.8.1 Applicable Standard

According to FCC Part 15.207(a)
According to RSS-Gen 8.8

8.8.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.8.5 Test Results

N/A

8.9 ANTENNA APPLICATION

8.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
FCC 47 CFR Part 15.247 (b)	If transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.
RSS-Gen Section 6.8	The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.
RSS-247 Section 5.4	If the transmitter employs an antenna system that emits multiple directional beams, but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device (i.e. the sum of the power supplied to all antennas, antenna elements, staves, etc., and summed across all carriers or frequency channels) shall not exceed the applicable output power limit. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna/antenna array exceeds 6 dBi. The directional antenna gain shall be computed as the sum of 10 log (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

8.9.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

----- END OF REPORT -----