

## Partial FCC Test Report

### (PART 24)

**Report No.:** RF170822C16D-1

**FCC ID:** ZMOL850GL

**Test Model:** L850-GL

**Received Date:** Apr. 18, 2018

**Test Date:** May 24, 2018 ~ May 25, 2018

**Issued Date:** Jun. 27, 2018

**Applicant:** Fibocom Wireless Inc.

**Address:** 5/F, Tower A, Technology Building II, 1057#Nanhai Blvd, Shenzhen 518067, China

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan ( R.O.C )

**Test Location:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City 33383, Taiwan (R.O.C)

**FCC Registration /  
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record .....</b>	<b>3</b>
<b>1 Certificate of Conformity .....</b>	<b>4</b>
<b>2 Summary of Test Results.....</b>	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units .....	8
3.3 Test Mode Applicability and Tested Channel Detail .....	9
3.4 EUT Operating Conditions .....	10
3.5 General Description of Applied Standards.....	10
<b>4 Test Types and Results .....</b>	<b>11</b>
4.1 Output Power Measurement.....	11
4.1.1 Limits of Output Power Measurement .....	11
4.1.2 Test Procedures.....	11
4.1.3 Test Setup.....	12
4.1.4 Test Results .....	13
4.2 Radiated Emission Measurement.....	17
4.2.1 Limits of Radiated Emission Measurement .....	17
4.2.2 Test Procedure .....	17
4.2.3 Deviation from Test Standard .....	17
4.2.4 Test Setup.....	18
4.2.5 Test Results .....	19
<b>5 Pictures of Test Arrangements.....</b>	<b>43</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>44</b>

### Release Control Record

Issue No.	Description	Date Issued
RF170822C16D-1	Original Release	Jun. 27, 2018

## 1 Certificate of Conformity

**Product:** LTE module

**Brand:** Fibocom

**Test Model:** L850-GL

**Sample Status:** Production Unit

**Applicant:** Fibocom Wireless Inc.

**Test Date:** May 24, 2018 ~ May 25, 2018

**Standards:** FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Rona Chen, **Date:** Jun. 27, 2018  
Rona Chen / Specialist

**Approved by :** Dylan Chiou, **Date:** Jun. 27, 2018  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Effective Isotropic Radiated Power	Pass	Meet the requirement of limit.
2.1046 24.232(d)	Peak to Average Ratio	N/A	Refer to Note
2.1055 24.235	Frequency Stability	N/A	Refer to Note
2.1049 24.238(b)	Occupied Bandwidth	N/A	Refer to Note
24.238(b)	Band Edge Measurements	N/A	Refer to Note
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -27.91 dB at 39.45 MHz.

### Note:

This report is a partial report. Therefore, only test item of Effective Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to BV CPS report no.: RF170106C02-1 for module (Brand: Fibocom, Model: L850-GL)

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

## 2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 16, 2018	Mar. 15, 2019
Spectrum Analyzer Agilent	N9010A	MY52220314	Nov. 24, 2017	Nov. 23, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Jan. 11, 2018	Jan. 10, 2019
Double Ridge Guide Horn Antenna EMCO	3115	5619	Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 06, 2017	Dec. 05, 2018
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier EMCI	EMC 012645	980115	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 184045	980116	Oct. 20, 2017	Oct. 19, 2018
Preamplifier EMCI	EMC 330H	980112	Oct. 13, 2017	Oct. 12, 2018
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-80 00&3000	140811+170717	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 20, 2017	Oct. 19, 2018
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Oct. 20, 2017	Oct. 19, 2018
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 28, 2017	Dec. 27, 2018
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 08, 2017	Sep. 07, 2018
DC Power Supply Topward	33010D	807748	Oct. 25, 2016	Oct. 24, 2018
Digital Multimeter Fluke	87-III	70360742	Jun. 30, 2017	Jun. 29, 2018
HORN Antenna Schwarzbeck	BBHA 9120D	9120D-969	Dec. 12, 2017	Dec. 11, 2018

- Note:
1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.
  4. The IC Site Registration No. is IC7450F-10.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	LTE module	
<b>Brand</b>	Fibocom	
<b>Test Model</b>	L850-GL	
<b>Status of EUT</b>	Production Unit	
<b>Power Supply Rating</b>	5.0 Vdc (Host equipment)	
<b>Modulation Type</b>	WCDMA	QPSK
	LTE	QPSK, 16QAM
<b>Frequency Range</b>	WCDMA	1852.4 ~ 1907.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	1850.7 ~ 1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz)	1851.5 ~ 1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz)	1852.5 ~ 1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz)	1855.0 ~ 1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz)	1857.5 ~ 1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz)	1860.0 ~ 1900.0 MHz
<b>Max. EIRP Power</b>	WCDMA	235.50 mW
	LTE Band 2 (Channel Bandwidth: 1.4 MHz)	114.55 mW
	LTE Band 2 (Channel Bandwidth: 3 MHz)	119.95 mW
	LTE Band 2 (Channel Bandwidth: 5 MHz)	127.06 mW
	LTE Band 2 (Channel Bandwidth: 10 MHz)	136.46 mW
	LTE Band 2 (Channel Bandwidth: 15 MHz)	142.89 mW
	LTE Band 2 (Channel Bandwidth: 20 MHz)	153.11 mW
<b>Antenna Type</b>	Refer to Note as below	
<b>Accessory Device</b>	Refer to Note as below	
<b>Data Cable Supplied</b>	Refer to Note as below	

Note:

- The EUT is authorized for use in specific End-product. Please refer to below table for more details.

Product	Brand	Model
Convertible PC	Lenovo	TP00078C

- The End-product contains following accessory devices.

Product	Brand	Model	Description
Adapter	Lenovo	ADLX65NDC3A	I/P: 100-240 Vac, 50-60 Hz, 1.5 A O/P: 20 Vdc, 3.25 A
Battery	Lenovo	SB10K97589	15.2 Vdc, 3260 mAh


- The information of antenna of End-product is listed as below.

Antenna Type	Manufacturer	Part No.	Antenna Gain (dBi)
PIFA	HUA CHENG TECHNOLOGY Co., Ltd	Main Antenna: DC33001WM60 Aux. Antenna: DC33001WM10 (Rx only)	-0.41


- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

## 3.2 Configuration of System under Test

### <Radiated Emission Test>

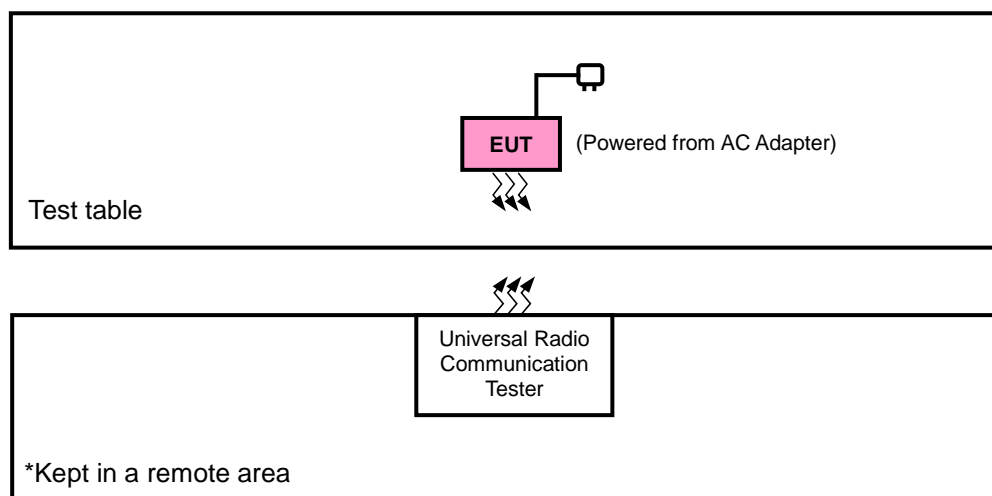

### <E.I.R.P. Test>

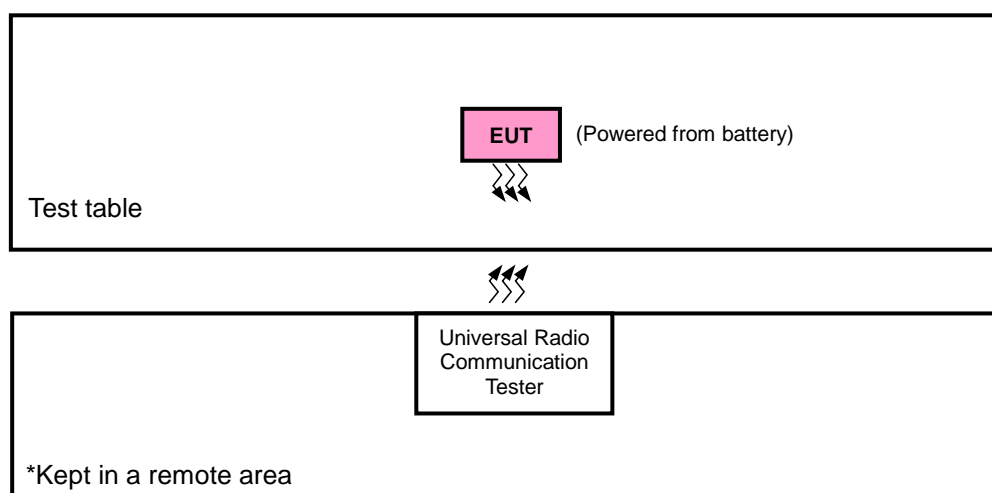

#### 3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Communications Tester-Wireless	Agilent	8960 Series 10	MY53201073	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Items 1 acted as communication partners to transfer data.



### 3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis & NB Mode, and antenna ports.

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	EIRP	Radiated Emission
WCDMA	Y-plane	Y-axis
LTE Band 2	Y-plane	X-axis

#### WCDMA

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262, 9400, 9538	WCDMA
-	Radiated Emission	9262 to 9538	9262, 9400, 9538	WCDMA

#### LTE Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18615 to 19185	18615, 18900, 19185	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18650 to 19150	18650, 18900, 19150	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18675 to 19125	18675, 18900, 19125	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	18607 to 19193	18607, 18900, 19193	1.4 MHz	QPSK	1 RB / 0 RB Offset
		18625 to 19175	18625, 18900, 19175	5 MHz	QPSK	1 RB / 0 RB Offset
		18700 to 19100	18700, 18900, 19100	20 MHz	QPSK	1 RB / 0 RB Offset

**Note:** This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

#### Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
EIRP	26 deg. C, 58 % RH	5 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang Jisysong Wang

### **3.4 EUT Operating Conditions**

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

### **3.5 General Description of Applied Standards**

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC 47 CFR Part 2**

**FCC 47 CFR Part 24**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

**NOTE:** All test items have been performed and recorded as per the above standards.

## 4 Test Types and Results

### 4.1 Output Power Measurement

#### 4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts e.i.r.p.

#### 4.1.2 Test Procedures

##### **EIRP / ERP Measurement:**

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 1 MHz for GSM, GPRS & EDGE, 5 MHz for WCDMA and CDMA, and 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d.  $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ . E.R.P power can be calculated from E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$ .


##### **Conducted Power Measurement:**

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


#### 4.1.3 Test Setup

##### EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

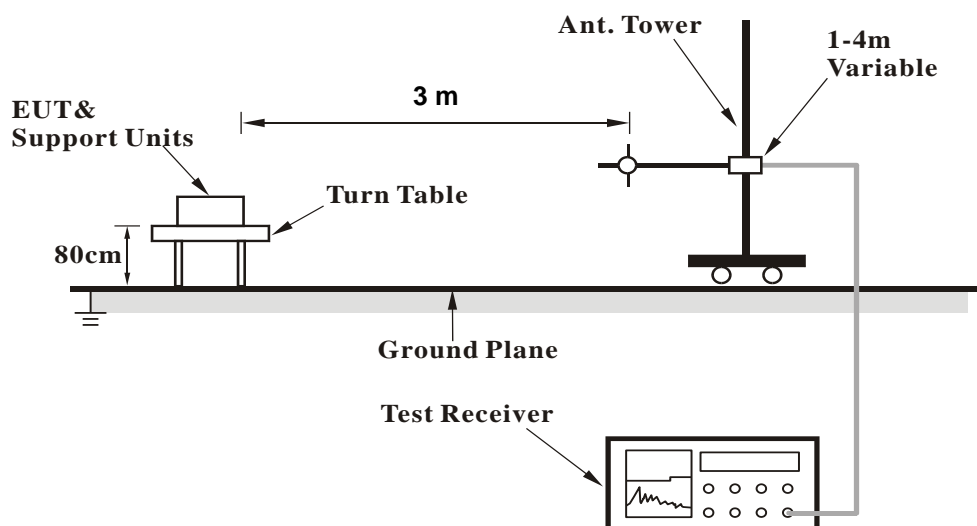


<Radiated Emission above 1 GHz>

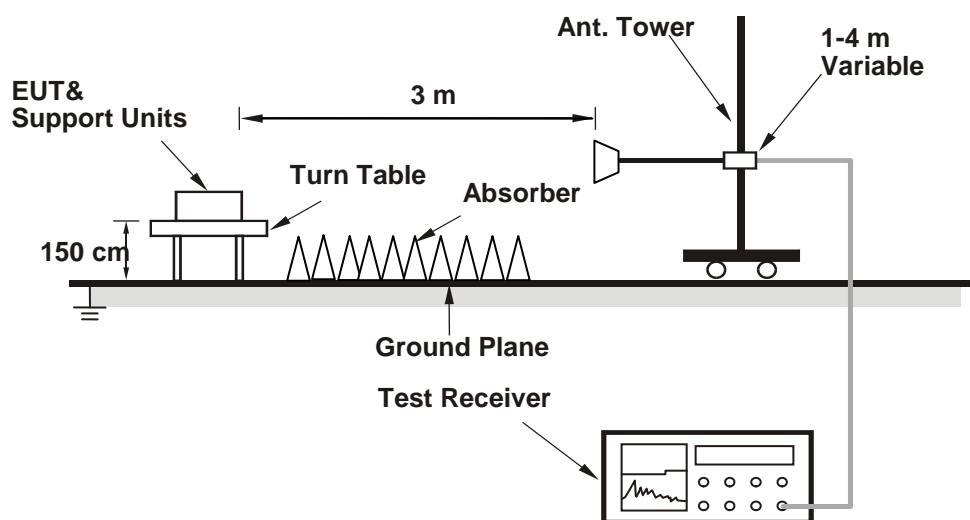

For the actual test configuration, please refer to the attached file (Test Setup Photo).

##### Conducted Power Measurement:



#### 4.1.4 Test Results

##### EIRP Power (dBm)

WCDMA							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	9262	1852.4	-17.26	36.57	19.31	85.31	H
	9400	1880.0	-18.04	37.22	19.18	82.79	
	9538	1907.6	-17.49	37.18	19.69	93.11	
	9262	1852.4	-14.14	37.65	23.51	224.39	V
	9400	1880.0	-14.43	37.58	23.15	206.54	
	9538	1907.6	-13.76	37.48	23.72	<b>235.50</b>	

LTE Band 2							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18607	1850.7	-19.04	36.57	17.53	56.62	H
	18900	1880.0	-20.43	37.22	16.79	47.75	
	19193	1909.3	-20.09	37.18	17.09	51.17	
	18607	1850.7	-17.06	37.65	20.59	<b>114.55</b>	V
	18900	1880.0	-17.69	37.58	19.89	97.50	
	19193	1909.3	-17.26	37.48	20.22	105.20	
Channel Bandwidth: 1.4 MHz / 16QAM							
Y	18607	1850.7	-20.03	36.57	16.54	45.08	H
	18900	1880.0	-21.42	37.22	15.80	38.02	
	19193	1909.3	-21.08	37.18	16.10	40.74	
	18607	1850.7	-18.05	37.65	19.60	91.20	V
	18900	1880.0	-18.68	37.58	18.90	77.62	
	19193	1909.3	-18.25	37.48	19.23	83.75	

LTE Band 2							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18615	1851.5	-18.84	36.57	17.73	59.29	H
	18900	1880.0	-20.23	37.22	16.99	50.00	
	19185	1908.5	-19.89	37.18	17.29	53.58	
	18615	1851.5	-16.86	37.65	20.79	<b>119.95</b>	V
	18900	1880.0	-17.49	37.58	20.09	102.09	
	19185	1908.5	-17.06	37.48	20.42	110.15	
Channel Bandwidth: 3 MHz / 16QAM							
Y	18615	1851.5	-19.87	36.57	16.70	46.77	H
	18900	1880.0	-21.26	37.22	15.96	39.45	
	19185	1908.5	-20.92	37.18	16.26	42.27	
	18615	1851.5	-17.89	37.65	19.76	94.62	V
	18900	1880.0	-18.52	37.58	19.06	80.54	
	19185	1908.5	-18.09	37.48	19.39	86.90	

LTE Band 2							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18625	1852.5	-18.59	36.57	17.98	62.81	H
	18900	1880.0	-19.98	37.22	17.24	52.97	
	19175	1907.5	-19.64	37.18	17.54	56.75	
	18625	1852.5	-16.61	37.65	21.04	<b>127.06</b>	V
	18900	1880.0	-17.24	37.58	20.34	108.14	
	19175	1907.5	-16.81	37.48	20.67	116.68	
Channel Bandwidth: 5 MHz / 16QAM							
Y	18625	1852.5	-19.57	36.57	17.00	50.12	H
	18900	1880.0	-20.96	37.22	16.26	42.27	
	19175	1907.5	-20.62	37.18	16.56	45.29	
	18625	1852.5	-17.59	37.65	20.06	101.39	V
	18900	1880.0	-18.22	37.58	19.36	86.30	
	19175	1907.5	-17.79	37.48	19.69	93.11	

LTE Band 2							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18650	1855.0	-18.28	36.57	18.29	67.45	H
	18900	1880.0	-19.67	37.22	17.55	56.89	
	19150	1905.0	-19.33	37.18	17.85	60.95	
	18650	1855.0	-16.30	37.65	21.35	<b>136.46</b>	V
	18900	1880.0	-16.93	37.58	20.65	116.14	
	19150	1905.0	-16.50	37.48	20.98	125.31	
Channel Bandwidth: 10 MHz / 16QAM							
Y	18650	1855.0	-19.30	36.57	17.27	53.33	H
	18900	1880.0	-20.69	37.22	16.53	44.98	
	19150	1905.0	-20.35	37.18	16.83	48.19	
	18650	1855.0	-17.32	37.65	20.33	107.89	V
	18900	1880.0	-17.95	37.58	19.63	91.83	
	19150	1905.0	-17.52	37.48	19.96	99.08	

LTE Band 2							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18675	1857.5	-18.08	36.57	18.49	70.63	H
	18900	1880.0	-19.47	37.22	17.75	59.57	
	19125	1902.5	-19.13	37.18	18.05	63.83	
	18675	1857.5	-16.10	37.65	21.55	<b>142.89</b>	V
	18900	1880.0	-16.73	37.58	20.85	121.62	
	19125	1902.5	-16.30	37.48	21.18	131.22	
Channel Bandwidth: 15 MHz / 16QAM							
Y	18675	1857.5	-19.07	36.57	17.50	56.23	H
	18900	1880.0	-20.46	37.22	16.76	47.42	
	19125	1902.5	-20.12	37.18	17.06	50.82	
	18675	1857.5	-17.09	37.65	20.56	113.76	V
	18900	1880.0	-17.72	37.58	19.86	96.83	
	19125	1902.5	-17.29	37.48	20.19	104.47	

LTE Band 2							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Y	18700	1860.0	-17.78	36.57	18.79	75.68	H
	18900	1880.0	-19.17	37.22	18.05	63.83	
	19100	1900.0	-18.83	37.18	18.35	68.39	
	18700	1860.0	-15.80	37.65	21.85	<b>153.11</b>	V
	18900	1880.0	-16.43	37.58	21.15	130.32	
	19100	1900.0	-16.00	37.48	21.48	140.60	
Channel Bandwidth: 20 MHz / 16QAM							
Y	18700	1860.0	-18.79	36.57	17.78	59.98	H
	18900	1880.0	-20.18	37.22	17.04	50.58	
	19100	1900.0	-19.84	37.18	17.34	54.20	
	18700	1860.0	-16.81	37.65	20.84	121.34	V
	18900	1880.0	-17.44	37.58	20.14	103.28	
	19100	1900.0	-17.01	37.48	20.47	111.43	



## 4.2 Radiated Emission Measurement

### 4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit is equal to -13 dBm.

### 4.2.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$ .
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole,  $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$ .


**NOTE:** The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

### 4.2.3 Deviation from Test Standard


No deviation.

#### 4.2.4 Test Setup

##### <Radiated Emission below or equal 1 GHz>

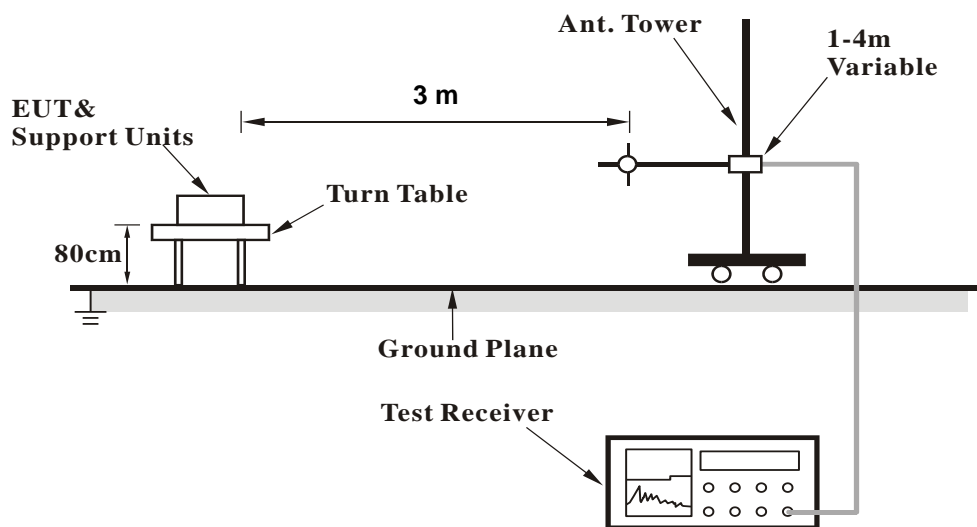

##### <Radiated Emission above 1 GHz>

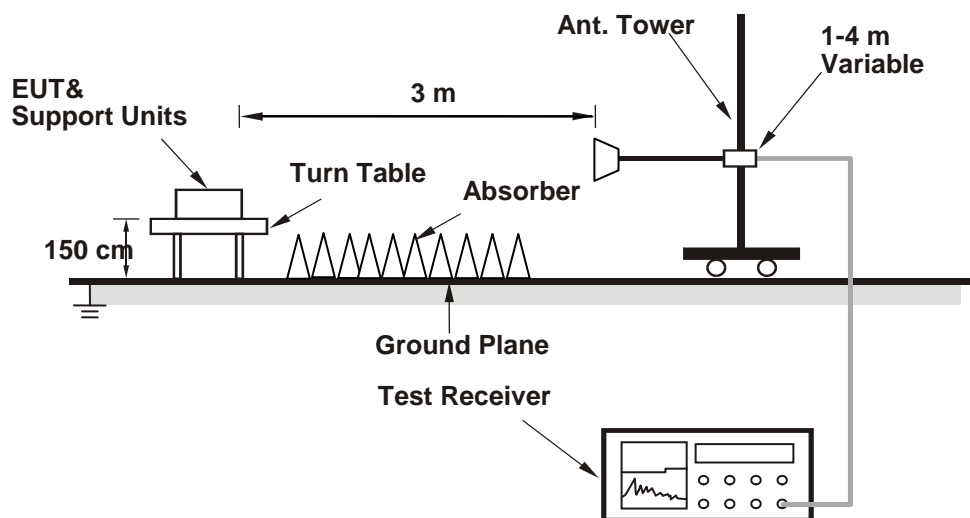

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.5 Test Results

WCDMA:


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

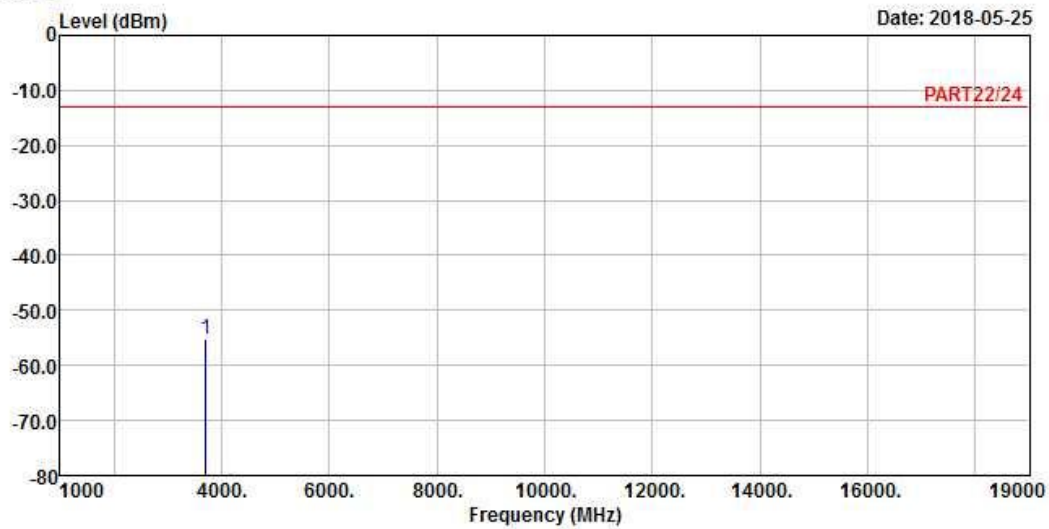

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remark : WCDMA Band 2 Link\_L-CH

Tested by: Getaz Yang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3704.80	-55.09	-48.16	-13.00	-42.09	-6.93	Peak



# Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 6

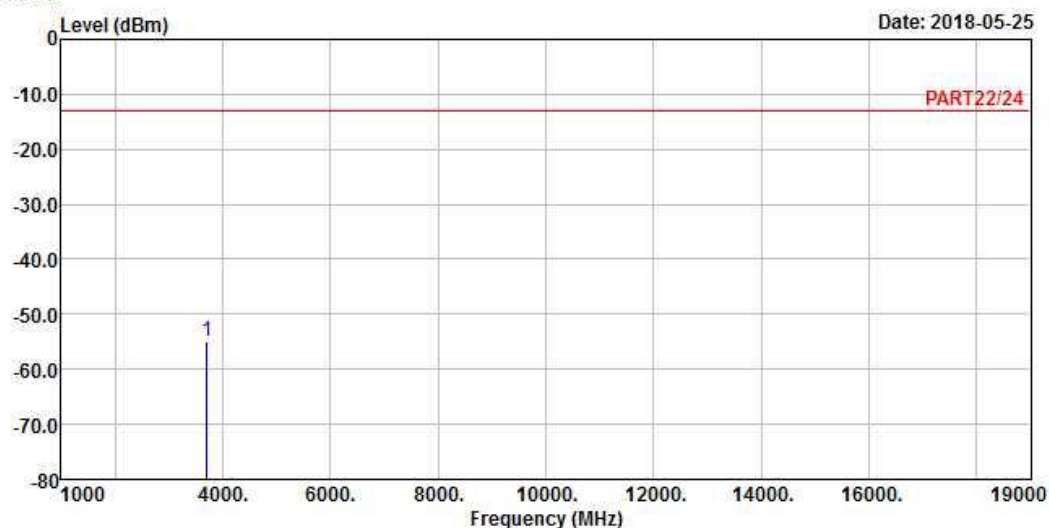

Site : 966 Chamber 5  
Condition: PART22/24 VERTICAL  
Remark : WCDMA Band 2 Link\_L-CH  
Tested by: Getaz Yang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3704.80	-55.03	-48.10	-13.00	-42.03	-6.93	Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

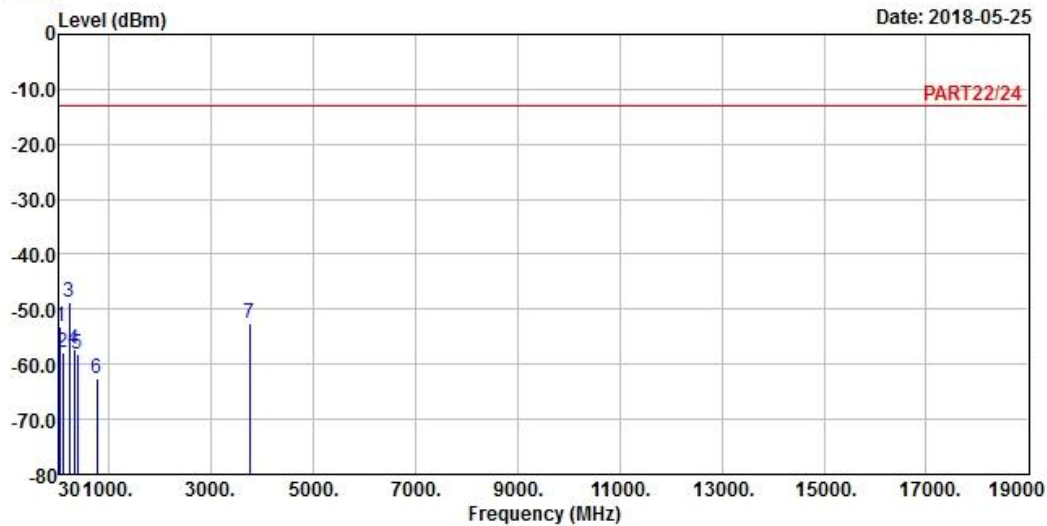

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remark : WCDMA Band 2 Link\_M-CH  
 Tested by: Getaz Yang


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	43.50	-53.05	-51.58	-13.00	-40.05	-1.47	Peak
2	97.77	-57.85	-47.18	-13.00	-44.85	-10.67	Peak
3 pp	232.23	-48.83	-42.10	-13.00	-35.83	-6.73	Peak
4	323.80	-57.38	-50.74	-13.00	-44.38	-6.64	Peak
5	377.70	-58.28	-52.20	-13.00	-45.28	-6.08	Peak
6	765.50	-62.63	-63.47	-13.00	-49.63	0.84	Peak
7	3760.00	-52.69	-46.04	-13.00	-39.69	-6.65	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 10

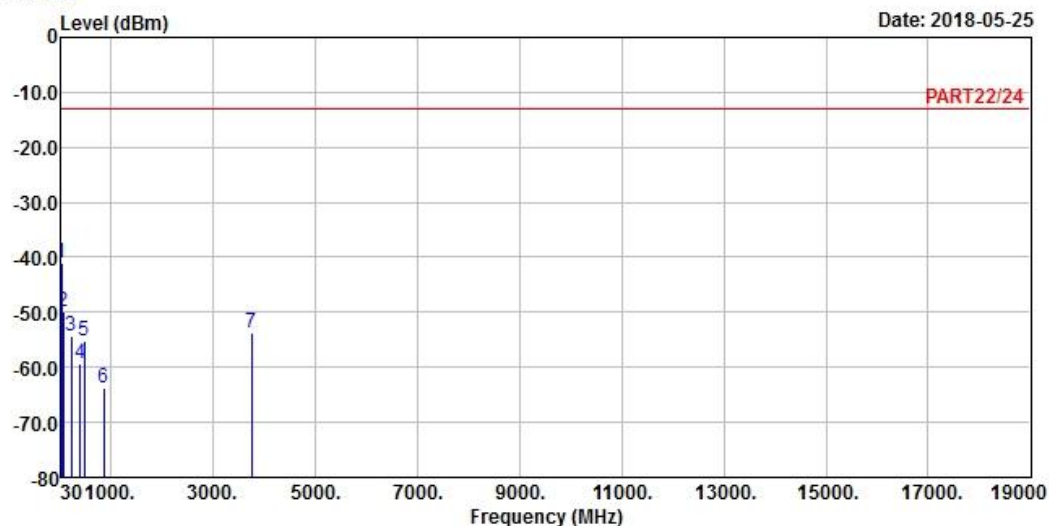

Site : 966 Chamber 5  
Condition: PART22/24 VERTICAL  
Remark : WCDMA Band 2 Link\_M-CH  
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	39.72	-40.95	-41.59	-13.00	-27.95	0.64	Peak
2	68.34	-49.97	-41.65	-13.00	-36.97	-8.32	Peak
3	227.91	-54.31	-47.42	-13.00	-41.31	-6.89	Peak
4	405.00	-59.31	-53.41	-13.00	-46.31	-5.90	Peak
5	477.80	-55.23	-50.20	-13.00	-42.23	-5.03	Peak
6	858.60	-63.69	-64.03	-13.00	-50.69	0.34	Peak
7	3760.00	-53.82	-47.17	-13.00	-40.82	-6.65	Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

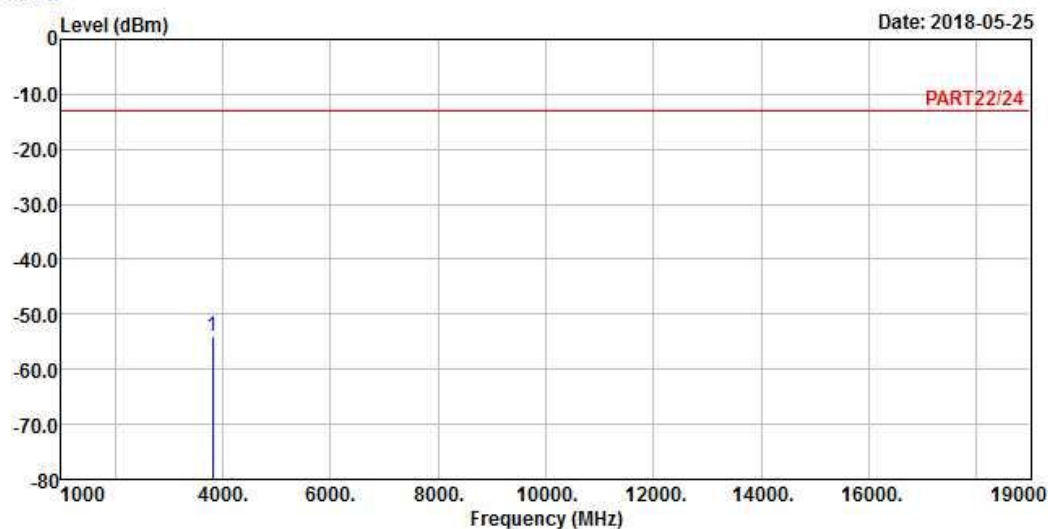

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remark : WCDMA Band 2 Link\_H-CH  
 Tested by: Getaz Yang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.20	-54.15	-47.75	-13.00	-41.15	-6.40	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

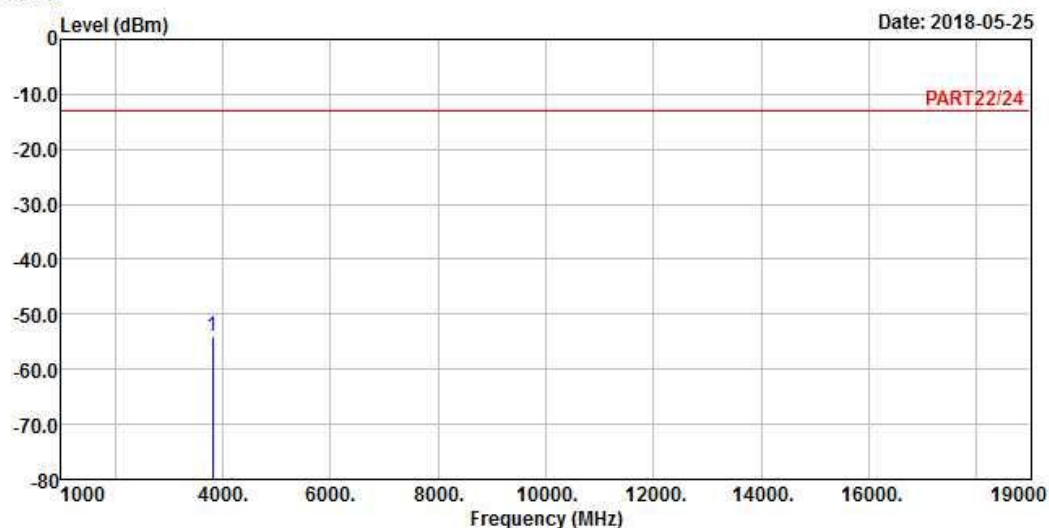

Site : 966 Chamber 5  
 Condition: PART22/24 VERTICAL  
 Remark : WCDMA Band 2 Link\_H-CH  
 Tested by: Getaz Yang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.20	-53.92	-47.52	-13.00	-40.92	-6.40	Peak




LTE Band 2  
Channel Bandwidth: 1.4 MHz / QPSK  
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

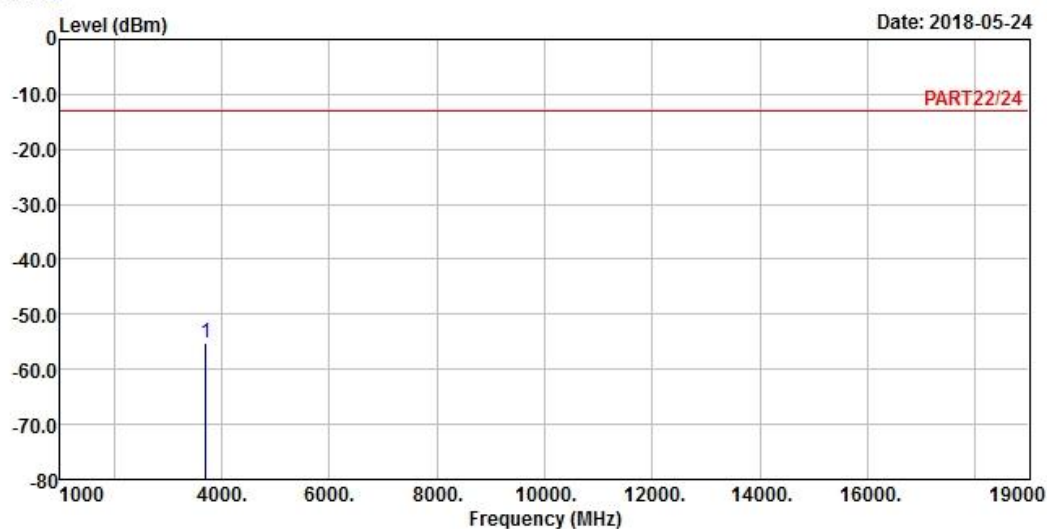

Site : 966 Chamber 5  
Condition: PART22/24 HORIZONTAL  
Remak : LTE Band 2 QPSK\_1.4M Link\_L-CH  
Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3701.40	-55.20	-48.27	-13.00	-42.20	-6.93	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

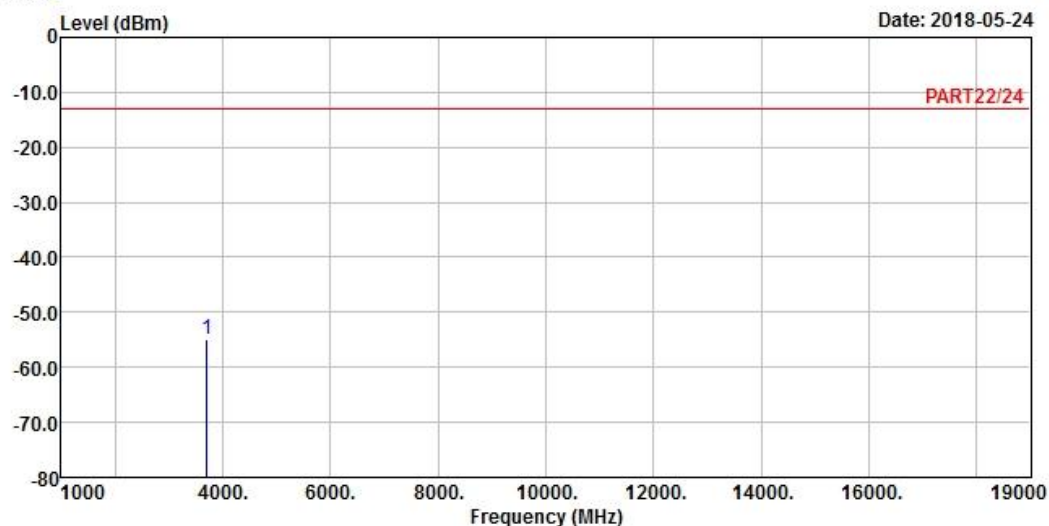

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_1.4M Link\_L-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3701.40	-54.81	-47.88	-13.00	-41.81	-6.93	Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

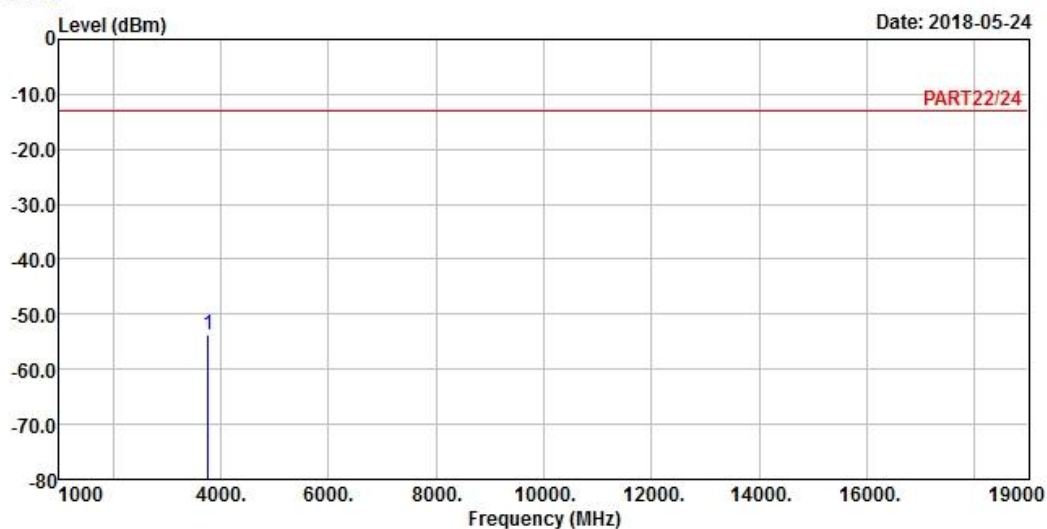

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : LTE Band 2 QPSK\_1.4M Link\_M-CH  
 Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-53.76	-47.11	-13.00	-40.76	-6.65	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

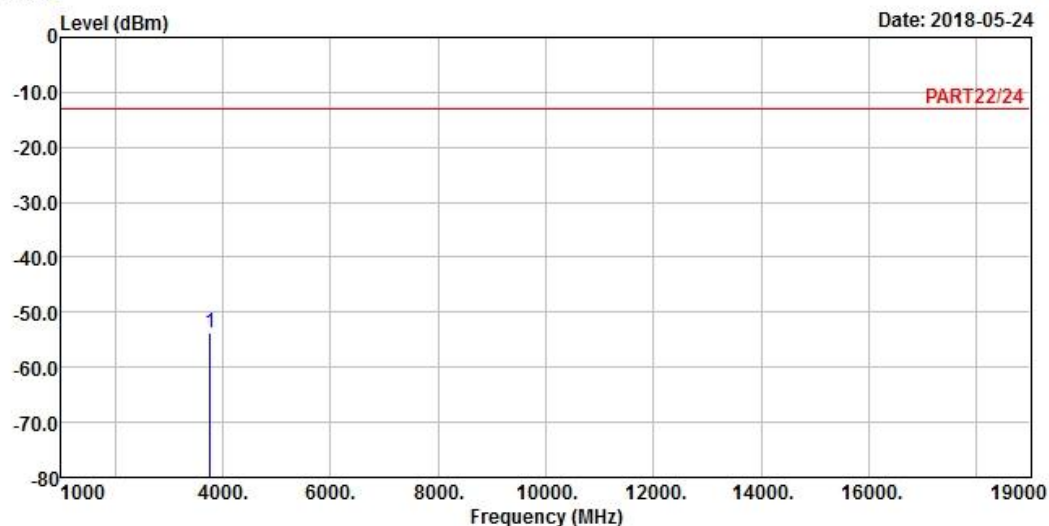

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_1.4M Link\_M-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-53.81	-47.16	-13.00	-40.81	-6.65	Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

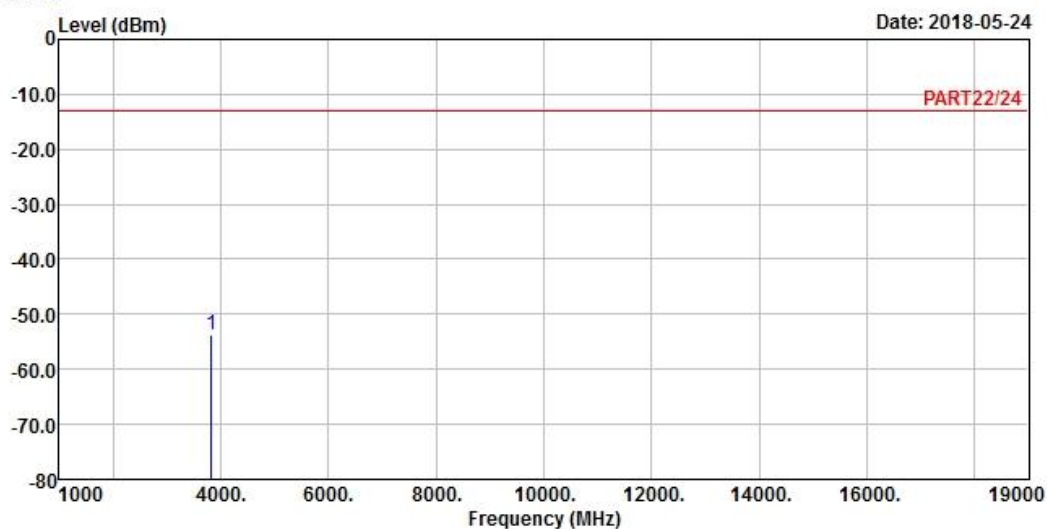

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : LTE Band 2 QPSK\_1.4M Link\_H-CH  
 Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3818.60	-53.62	-47.22	-13.00	-40.62	-6.40	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

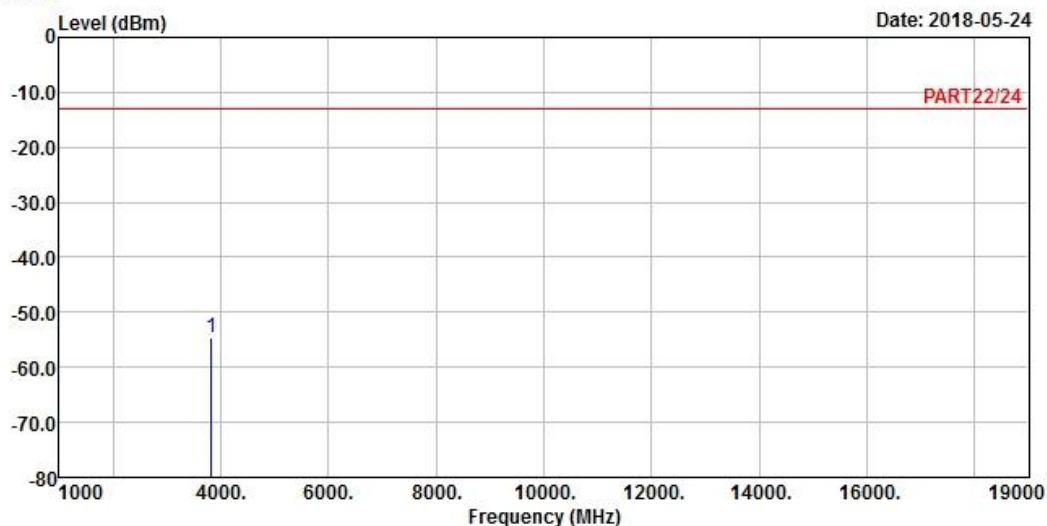

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_1.4M Link\_H-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3818.60	-54.50	-48.10	-13.00	-41.50	-6.40	Peak


Channel Bandwidth: 5 MHz / QPSK  
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

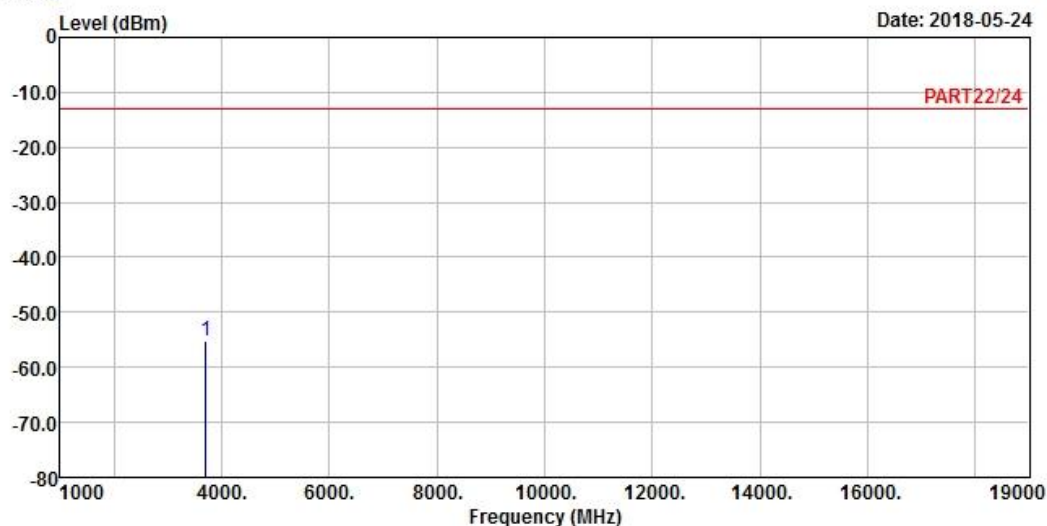

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3705.00	-55.20	-48.27	-13.00	-42.20	-6.93	Peak



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

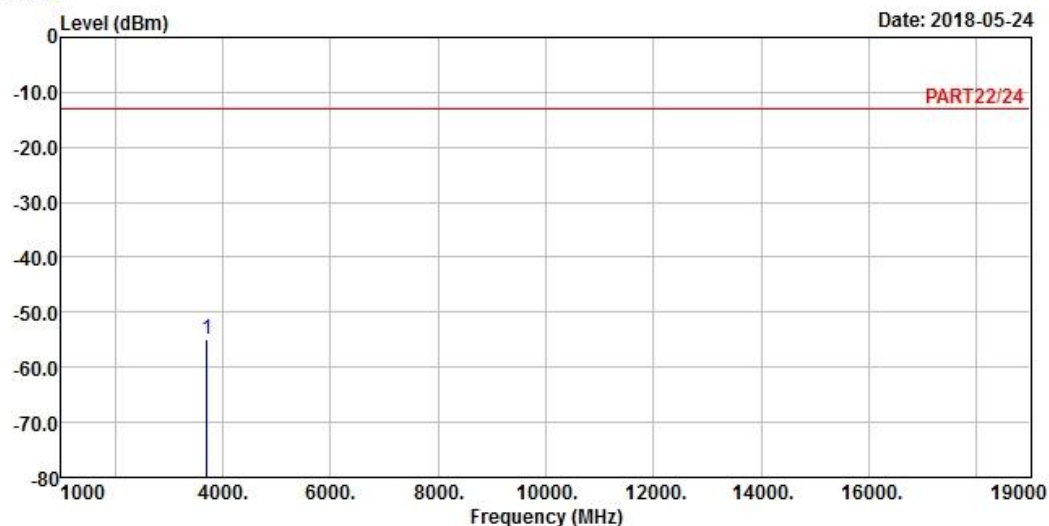

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_5M Link\_L-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3705.00	-54.81	-47.88	-13.00	-41.81	-6.93	Peak




## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

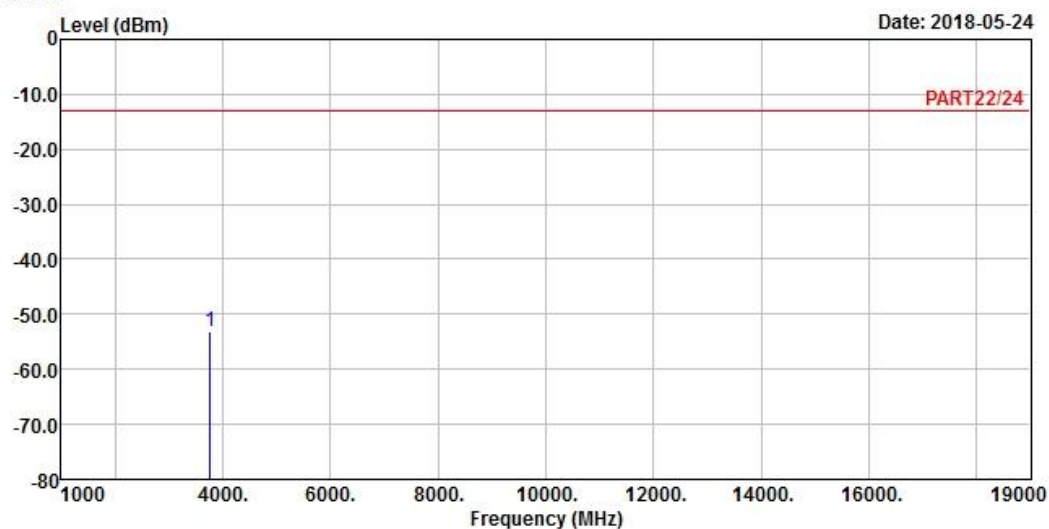

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-53.11	-46.46	-13.00	-40.11	-6.65	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

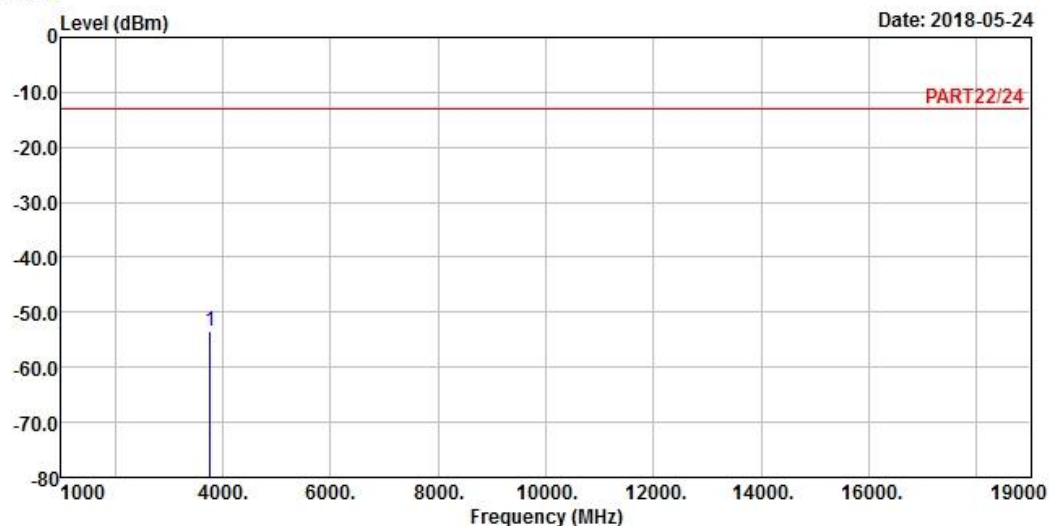

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_5M Link\_M-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3760.00	-53.38	-46.73	-13.00	-40.38	-6.65	Peak


## High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

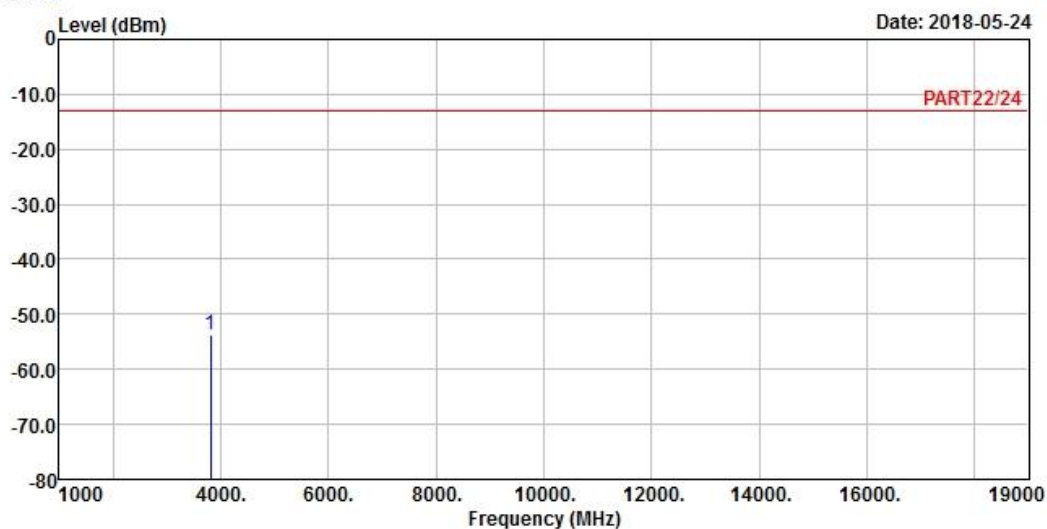

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.00	-53.62	-47.22	-13.00	-40.62	-6.40	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

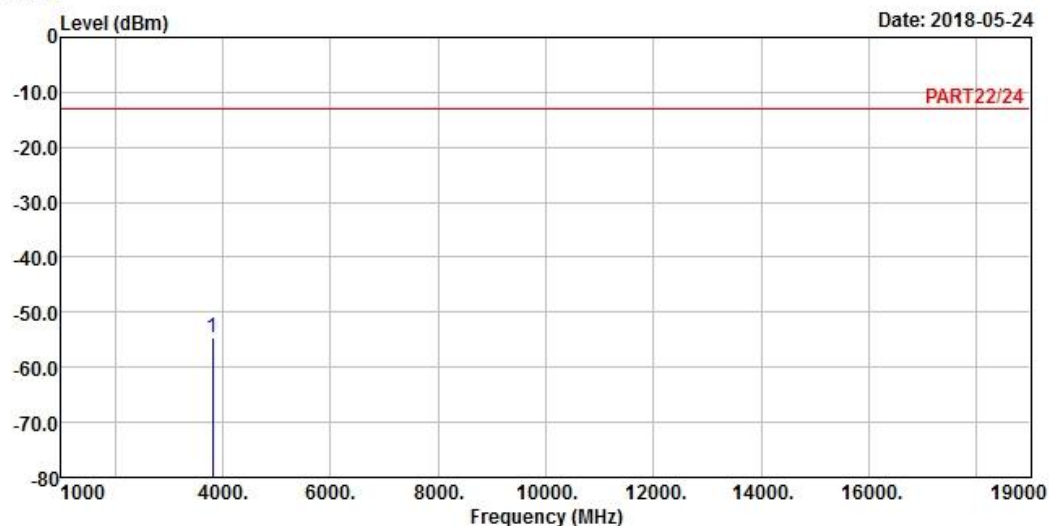

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_5M Link\_H-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3815.00	-54.50	-48.10	-13.00	-41.50	-6.40	Peak

Channel Bandwidth: 20 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

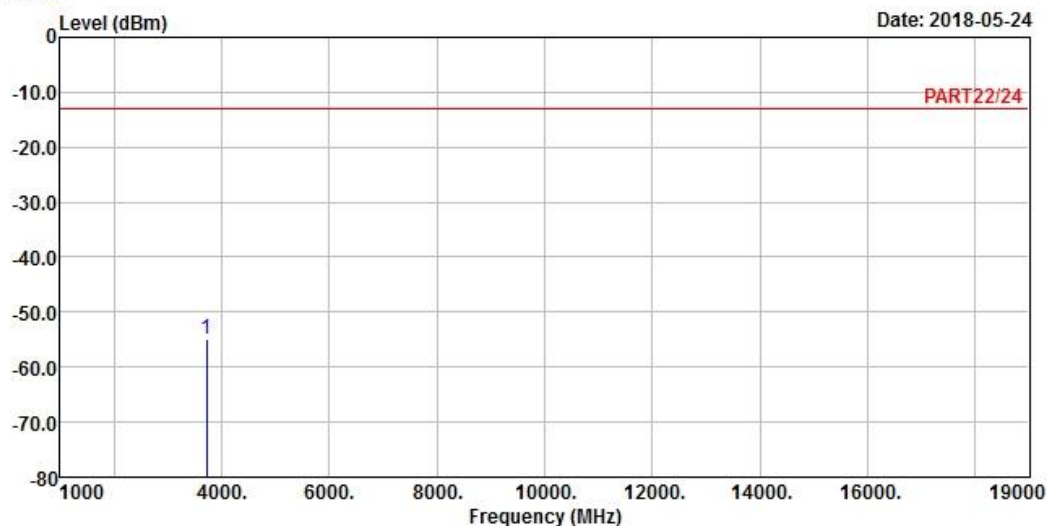

Site : 966 Chamber 5

Condition: PART22/24 HORIZONTAL

Remak : LTE Band 2 QPSK\_20M Link\_L-CH

Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3720.00	-54.76	-47.94	-13.00	-41.76	-6.82	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

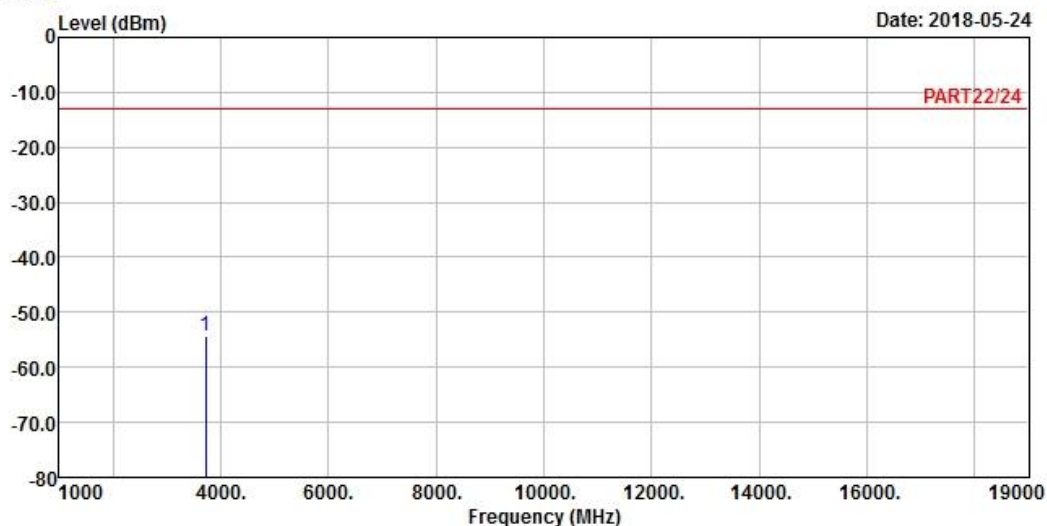

Site : 966 Chamber 5  
Condition: PART22/24 VERTICAL  
Remak : LTE Band 2 QPSK\_20M Link\_L-CH  
Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3720.00	-54.46	-47.64	-13.00	-41.46	-6.82	Peak


## Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 7

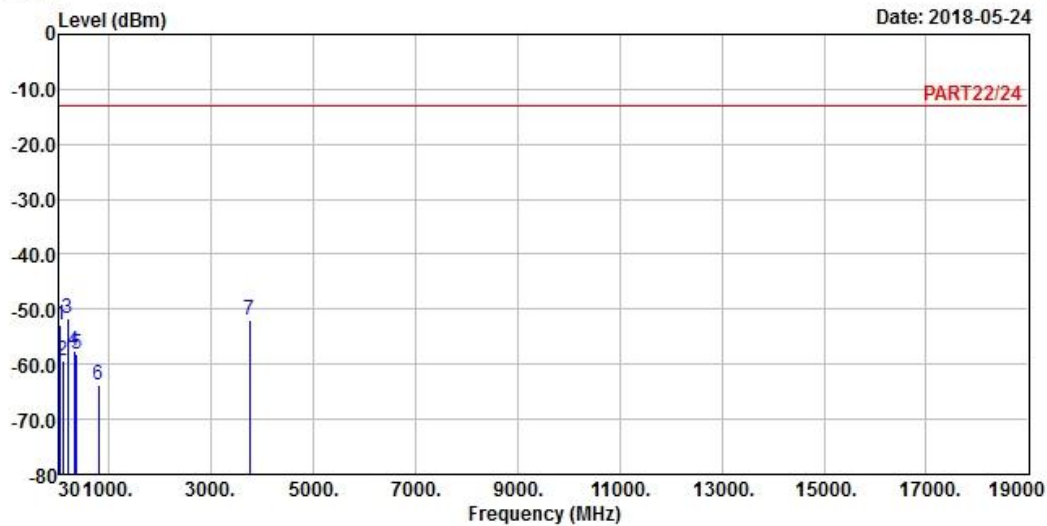

Site : 966 Chamber 5  
 Condition: PART22/24 HORIZONTAL  
 Remak : LTE Band 2 QPSK\_20M Link\_M-CH  
 Tested by: Jisyong Wang


			Read	Limit	Over		
	Freq	Level	Level	Line	Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	44.85	-52.99	-51.00	-13.00	-39.99	-1.99	Peak
2	100.20	-59.37	-48.81	-13.00	-46.37	-10.56	Peak
3 pp	197.94	-51.77	-43.94	-13.00	-38.77	-7.83	Peak
4	326.60	-57.64	-51.04	-13.00	-44.64	-6.60	Peak
5	375.60	-58.10	-52.01	-13.00	-45.10	-6.09	Peak
6	790.70	-63.65	-64.41	-13.00	-50.65	0.76	Peak
7	3760.00	-52.01	-45.36	-13.00	-39.01	-6.65	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 8

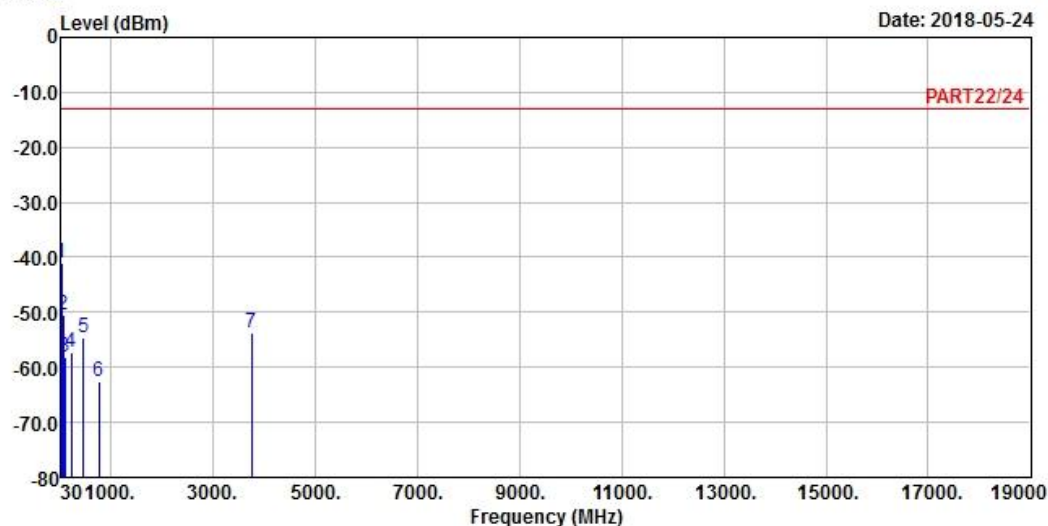

Site : 966 Chamber 5  
Condition: PART22/24 VERTICAL  
Remak : LTE Band 2 QPSK\_20M Link\_M-CH  
Tested by: Jisyong Wang

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	39.45	-40.91	-41.55	-13.00	-27.91	0.64	Peak
2	68.34	-50.53	-42.21	-13.00	-37.53	-8.32	Peak
3	97.77	-58.05	-47.38	-13.00	-45.05	-10.67	Peak
4	218.19	-57.29	-50.01	-13.00	-44.29	-7.28	Peak
5	458.90	-54.67	-49.28	-13.00	-41.67	-5.39	Peak
6	765.50	-62.71	-63.55	-13.00	-49.71	0.84	Peak
7	3760.00	-53.86	-47.21	-13.00	-40.86	-6.65	Peak




# High Channel



Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 3

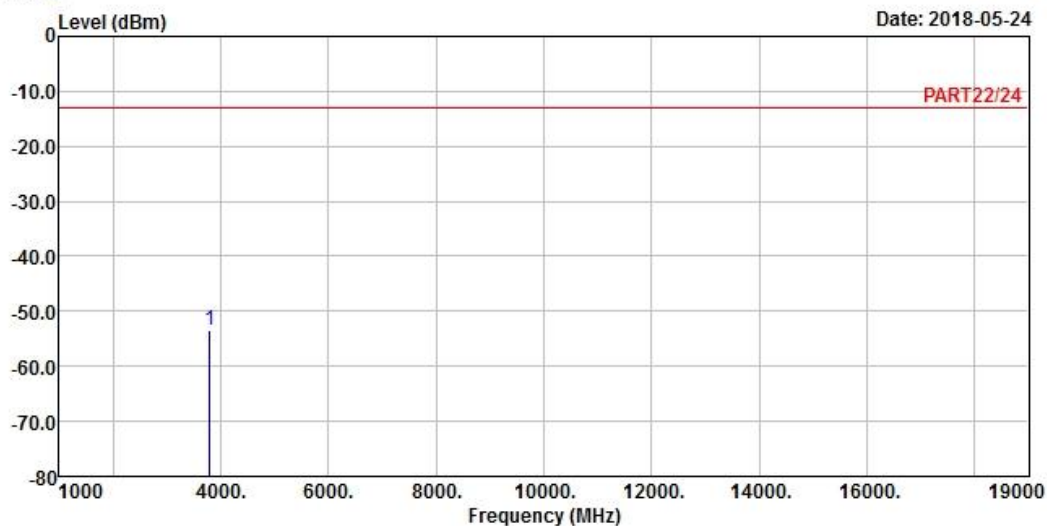

Site : 966 Chamber 5  
Condition: PART22/24 HORIZONTAL  
Remak : LTE Band 2 QPSK\_20M Link\_H-CH  
Tested by: Jisyong Wang


		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3800.00	-53.53	-47.10	-13.00	-40.53	-6.43	Peak



# Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

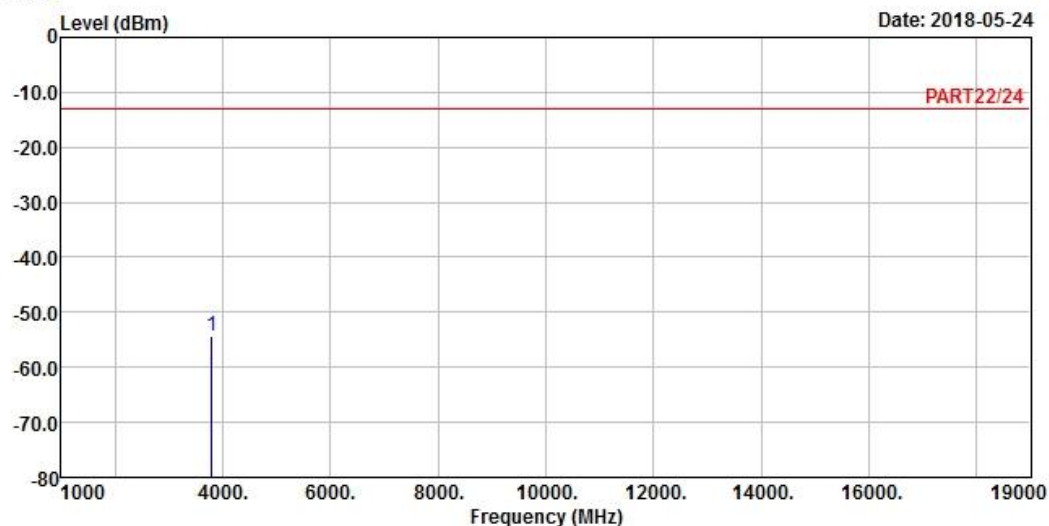

Site : 966 Chamber 5

Condition: PART22/24 VERTICAL

Remak : LTE Band 2 QPSK\_20M Link\_H-CH

Tested by: Jisyong Wang

		Read	Limit	Over		
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3800.00	-54.28	-47.85	-13.00	-41.28	-6.43	Peak

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---