

TEST REPORT

Nr. R23171601

Federal Communication Commission (FCC)

Report Reference No.	R23171601
Date of issue:	15.03.2024
Total number pages:	58
Customer name	Elca S.r.l.
Address	Via del Commercio, 7/B – 36065 Mussolente (VI) – Italy
Test specification:	
Standard(s)	FCC Rules & Regulations, Title 47:2022 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247
Non-standard test method	N/A
Test Report Form No.	15-247_Hopping_DEKRA
Test Report Form(s) Originator ...	DEKRA Testing and Certification S.r.l.
Master TRF	2024-03
General disclaimer:	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l.	
(*) Test item description	Transceiver unit
(*) Trademark	Elca
(*) Manufacturer	Elca S.r.l.
(*) Model / Type reference	AT E29-VETTA
(*) FCC ID	2ABS7-ATE29VETTA
(*) Rating(s)	3,7 Vdc from battery
Report	
Tested by (name + signature)	G. Gandini
Approved by (name + signature)	F. Marenda

(*) information provided by the customer

1 Summary

1	Summary.....	2
2	Reference standard(s)	3
3	List of attachments.....	3
4	Deviation(s) from test specification	3
5	Testing location.....	3
6	General description of tested item and testing condition(s)	5
6.1	Photos of the test item.....	6
7	Verdict summary section	10
8	Test conditions	11
8.1	General	11
9	Test results	12
9.1	Antenna requirements	12
9.2	Emissions in restricted frequency bands and in unrestricted frequency bands	13
9.3	20 dB bandwidth.....	33
9.4	Channel separation	37
9.5	Number of hopping channels.....	40
9.6	Time of occupancy	43
9.7	Band edge	46
9.8	Peak Output Power	52

2 Reference standard(s)	
FCC Rules and Regulation Title 47 part 15:2022 KDB 558074 D01 15.247 Meas Guidance v05r02	-- Guidance for compliance measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC rules
ANSI C63.4:2014	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
3 List of attachments	
Attachment 1: Measurement uncertainty, judgement of compliance and quality manual references	
4 Deviation(s) from test specification	
None	
5 Testing location	
DEKRA Testing and Certification S.r.l. Via della Fisica, 20 – 36016 Thiene (VI) – Italy Test site facility's FCC registration number: 182474	


Revision index	Date	Change history
1.0	15.03.2024	--




Testing and sampling:	
Date of receipt of test item	27.09.2023
Testing start date	27.09.2023
Testing end date	06.03.2024
Sampling procedure	Sample used for testing chosen by the customer; DEKRA Testing and Certification S.r.l. cannot be considered responsible for the selection of the sample
Internal identification	Adhesive label with the product number P230850
General remarks:	
This report shall not be reproduced, except in full, without the written approval of DEKRA Testing and Certification S.r.l. The test results presented in this report relate only to the object tested. “(see appended table)”: refers to a table appended to the report. Throughout this report a comma is used as the decimal separator. Tests reported in this test report marked by wording: “Test not accredited by ACCREDIA” are not part of the ACCREDIA accreditation of this laboratory.	
Possible test case verdicts:	
Test case does not apply to the test object:	N/A (Not Applicable)
Test object meets the requirement:	P (Pass)
Test object does not meet the requirement:	F (Fail)
Test object was not evaluated for the requirement:	N/E (Not Executed)
Definition of symbols used in this test report:	
☒ Indicates that the listed condition, standard or equipment is applicable for this report. ☐ Indicates that the listed condition, standard or equipment is not applicable for this report.	



6 General description of tested item and testing condition(s)


Description	Transceiver unit						
Model Number	AT E29-VETTA						
FCC ID	2ABS7-ATE29VETTA						
Serial Number	E900002						
Brand name	Elca						
Frequency band	902 – 928 MHz						
Nominal frequencies	FL: 915,05 MHz		FM: 921,40 MHz		FH: 927,80 MHz		
Test power supply		Voltage and Frequency	Reference poles				
			N	L1	L2	L3	PE
	☐	AC:	☐	☐	☐	☐	☐
	☐	AC:	☐	☐	☐	☐	☐
	☒	DC: 3,7 V from battery					☐
Pseudo randomly ordered list of hopping frequencies	See document OPERATIONAL DESCRIPTION FOR AT E29-VETTA						
Type of equipment	☒ Transmitter unit ☒ Receiver unit						
Type of station	☒ Portable station ☐ Mobile station						
Test arrangements of EUT	<i>Intended operational arrangement(s) of EUT</i>		<i>Test arrangement (see basic standard)</i>				
	☐ Table-top only		Table-top				
	☐ Floor-standing only		Floor-standing				
	☐ Can be floor-standing or table-top		Table-top				
	☐ Rack mounted		In rack or table-top				
	☒ Other, for example wall mounted, ceiling mounted, handheld, body worn		Table-top				
Operating modes	No.	Operating mode of test item					
	1	EUT in continuous transmission at maximum power					
Declination of responsibility	Information relating to the description of the sample, components list, and software/hardware version (if reported) are provided by the customer. DEKRA Testing and Certification S.r.l. cannot be considered responsible for this information, for any other document sent by the customer and for any difference between the software version present in the tested sample and that present in the object intended for final sale. In some cases, the software in the tested sample is in a version dedicated exclusively to the test, and therefore does not represent the software installed in the final version of the product.						

6.1 Photos of the test item

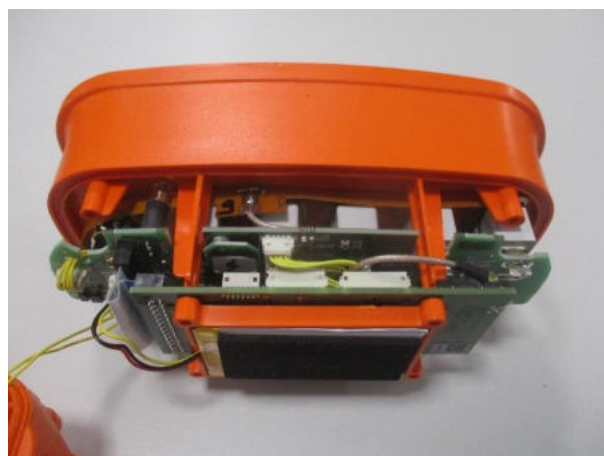

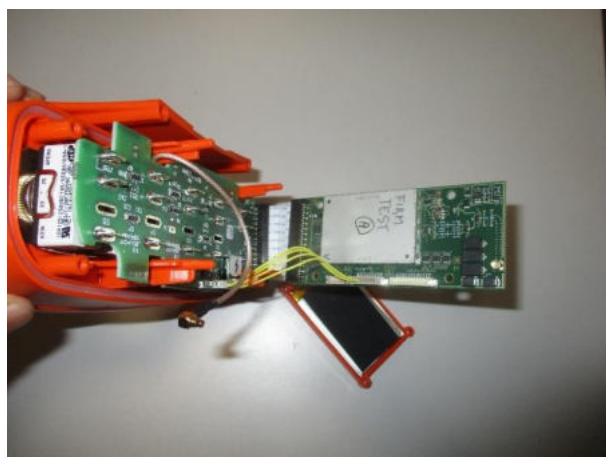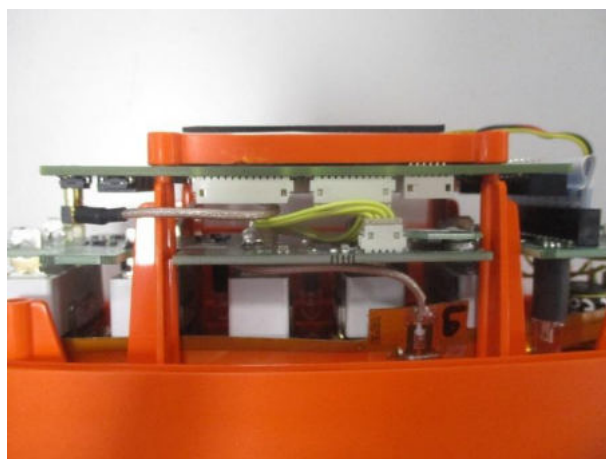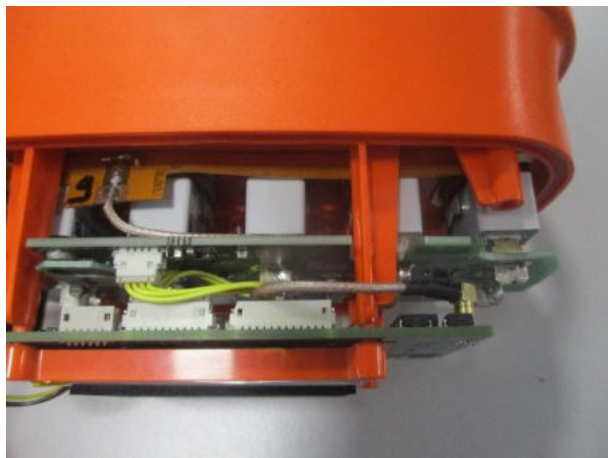

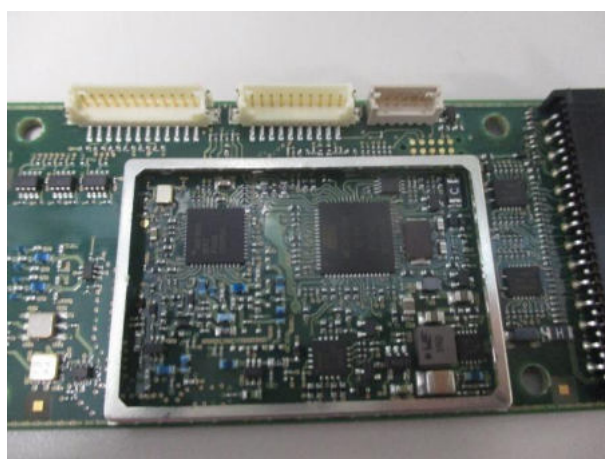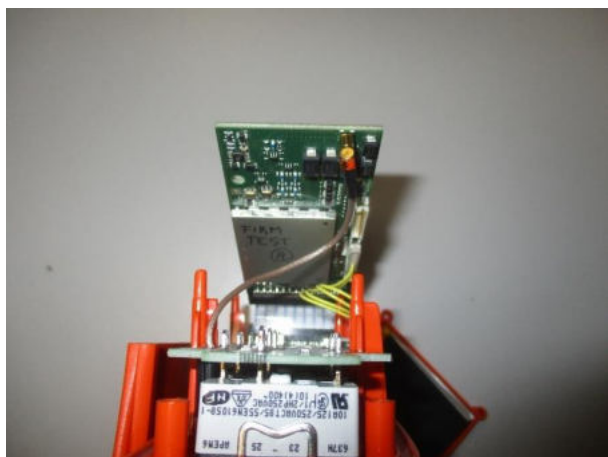

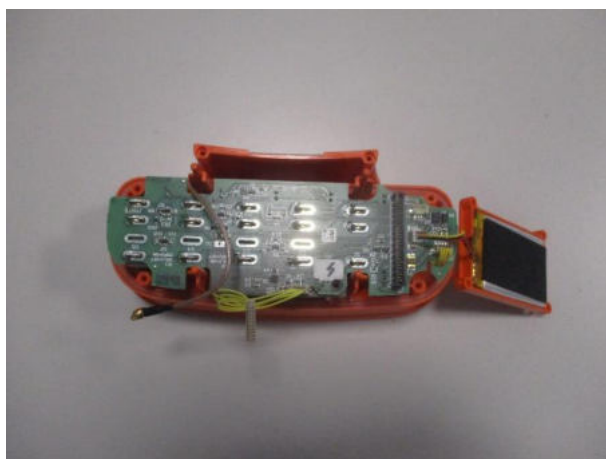

7 Verdict summary section

FCC Rules & Regulations, Title 47:2022 Part 15 paragraph(s): 203, 204, 205, 207, 209, 215 and 247			
Clause	Requirement – Test case	Basic standard	Verdict
Part 15.247 (a) (1)	Pseudo randomly ordered list of hopping frequencies	--	P
Part 15.203	Antenna requirements	ANSI C63.10	P
Part 15.207	Conducted emissions	ANSI C63.10	N/A (+)
Part 15.209	Radiated emissions and spurious emissions	ANSI C63.10	P
Part 15.247	20 dB Bandwidth	ANSI C63.10	P
Part 15.247	Channel Separation	ANSI C63.10	P
Part 15.247	Number of Hopping Channel	ANSI C63.10	P
Part 15.247	Time of occupancy	ANSI C63.10	P
Part 15.247	Band edge	ANSI C63.10	P
Part 15.209 and 15.247	Peak Output Power	ANSI C63.10	P

(+) Devices which only employ battery power. See FCC Part 15.207 (c)

8 Test conditions

8.1 General

Environmental reference conditions..... :	The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:																			
	Temperature		Humidity		Atmospheric pressure															
	15 °C – 35 °C		30 % - 60 %		800 hPa – 1060 hPa															
	If explicitly required in the basic standard or applied product standard the climatic values are recorded and documented separately in this test report. Environmental conditions have been monitored with the following instrument.																			
	<table><tr><td><i>Id. Number</i></td><td><i>Manufacturer</i></td><td><i>Model</i></td><td><i>Serial number</i></td><td><i>Description</i></td><td><i>Last calibration date</i></td><td><i>Calibration expiration</i></td></tr><tr><td>CMC S302</td><td>Testo</td><td>175H1</td><td>40370182610</td><td>Data Logger</td><td>May 2023</td><td>May 2024</td></tr></table>							<i>Id. Number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial number</i>	<i>Description</i>	<i>Last calibration date</i>	<i>Calibration expiration</i>	CMC S302	Testo	175H1	40370182610	Data Logger	May 2023
<i>Id. Number</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial number</i>	<i>Description</i>	<i>Last calibration date</i>	<i>Calibration expiration</i>														
CMC S302	Testo	175H1	40370182610	Data Logger	May 2023	May 2024														
Measurement uncertainties :	Attachment 1																			

9 Test results

9.1 Antenna requirements

Tested by	G. Gandini	
Test date	27.09.2023	
Basic standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.203 and 15.204	
Test specification	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded	
Antenna type	☒	Integral antenna
	☐	External antenna
Antenna gain	-5,0 dBi	
External R.F. power amplifier.....	Not Present	

9.2 Emissions in restricted frequency bands and in unrestricted frequency bands

Tested by	G. Gandini	
Test date	27.09.2023	
Test location (stand)	Semi-anechoic chamber (CMC A070)	
Basic standard(s)	ANSI C63.10 cl. 6.3, 6.4, 6.5 and 6.6	
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.209	
Test set-up description.....	☒	Table top equipment set-up (80 cm above the reference ground plane)
	☐	Floor standing equipment set-up (insulating material up to 12 mm thick)
	☐	False floor installation equipment set-up (insulating material up to 34 cm above the reference ground plane)
Supplementary test set-up description.....	--	
Test method applied	OATS or SAC with measurement distance [m]: 10 m for frequencies below 1 GHz 3 m for frequencies above 1 GHz	
Supplementary information	--	

Acceptance limits

Acceptance limits for emissions in restricted frequency bands ($f < 1000$ MHz)		
Frequency range (MHz)	Test distance (m)	Limits [dB(μ V/m)]
0,009 to 0,490	300	$20\log(2400/F(\text{kHz}))$
0,490 to 1,705	30	$20\log(24000/F(\text{kHz}))$
1,705 to 30	30	$20\log(30)$
30 to 88	3	$20\log(100)^{**}$
88 to 216	3	$20\log(150)^{**}$
216 to 960	3	$20\log(200)^{**}$
Above 960	3	$20\log(500)$

** : except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54 – 72 MHz, 76 – 88 MHz, 174 – 216 MHz or 470 – 806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

Perimeter protection systems may operate in the 54 – 72 MHz and 76 – 88 MHz bands under the provisions of this section. The use of such perimeter protection systems is limited to industrial, business and commercial applications.

Remarks: the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9 – 90 kHz and 110 – 490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector. The results have been extrapolated to the specified distance using an extrapolation factor.

Acceptance limits for emissions in restricted frequency bands ($f \geq 1000$ MHz)			
Frequency (MHz)	Test distance (m)	AV limits [dB(μ V/m)]	Peak limits [dB(μ V/m)]
> 1000	3	54	74

The restricted frequency bands are listed in the following table:


MHz	MHz	MHz	GHz
0,090 – 0,110	16,42 – 16,423	399,9 – 410	4,5 – 5,15
0,495 – 0,505	16,69475 – 16,69525	608 – 614	5,35 – 5,46
2,1735 – 2,1905	16,80425 – 16,80475	960 – 1240	7,25 – 7,75
4,125 – 4,128	25,5 – 25,67	1300 – 1427	8,025 – 8,5
4,17725 – 4,17775	37,5 – 38,25	1435 – 1626,5	9,0 – 9,2
4,20725 – 4,20775	73 – 74,6	1645,5 – 1646,5	9,3 – 9,5
6,215 – 6,218	74,8 – 75,2	1660 – 1710	10,6 – 12,7
6,26775 – 6,26825	108 – 121,94	1718,8 – 1722,2	13,25 – 13,4
6,31175 – 6,31225	123 – 138	2200 – 2300	14,47 – 14,5
8,291 – 8,294	149,9 – 150,05	2310 – 2390	15,35 – 16,2
8,362 – 8,366	156,52475 – 156,52525	2483,5 – 2500	17,7 – 21,4
8,37625 – 8,38675	156,7 – 156,9	2690 – 2900	22,01 – 23,12
8,41425 – 8,41475	162,0125 – 167,17	3260 – 3267	23,6 – 24,0
12,29 – 12,293	167,72 – 173,2	3332 – 3339	31,2 – 31,8
12,51975 – 12,52025	240 – 285	3345,8 – 3358	36,43 – 36,5
12,57675 – 12,57725	322 – 335,4	3600 – 4400	Above 38,6
13,36 – 13,41			

Acceptance limits for emissions in non-restricted frequency bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test setup


Frequency ≤ 30 MHz

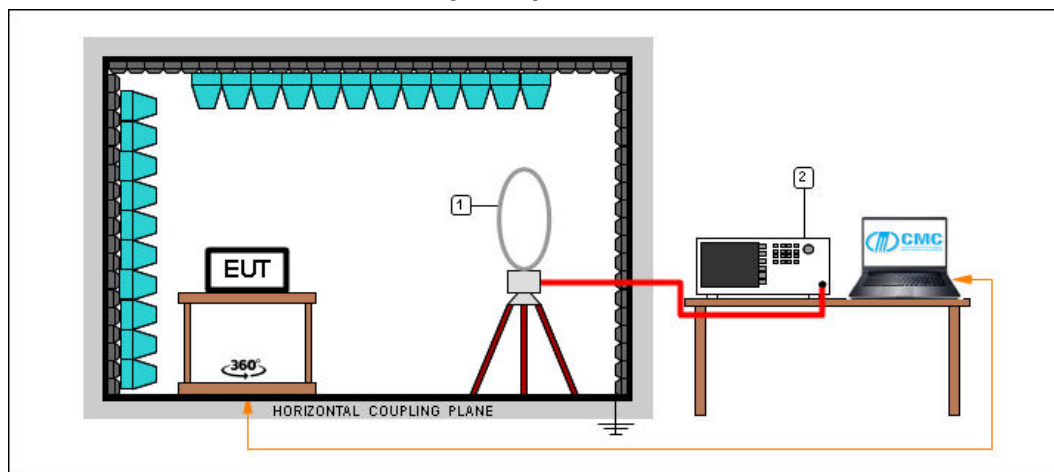

Test setup PE004_01

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S353	Rohde & Schwarz	ESW26	101492	Emi Test Receiver	December 2023	December 2024
1	CMC S127	Schaffner	HLA6120	1191	Loop Antenna 9kHz - 30MHz	May 2023	May 2024

Frequency ≤ 1 GHz

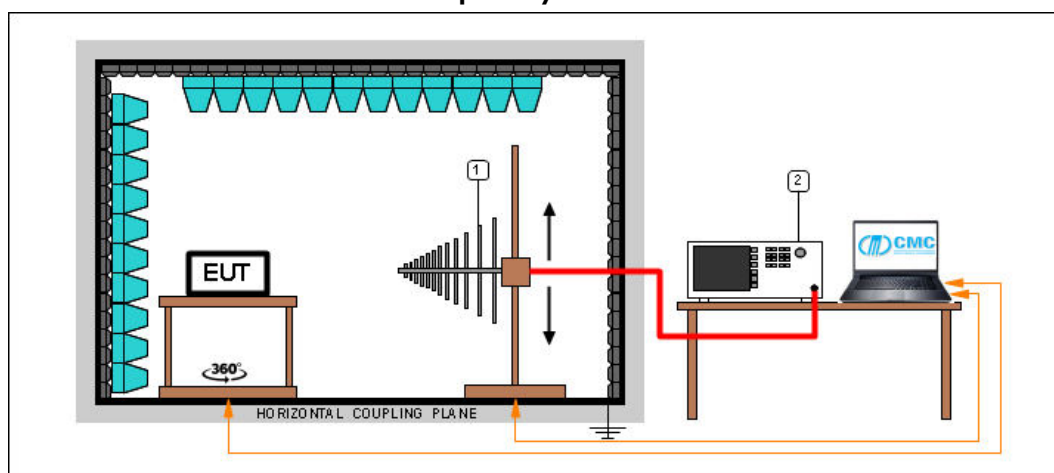


Test setup PE004_02

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S353	Rohde & Schwarz	ESW26	101492	Emi Test Receiver	December 2023	December 2024
1	CMC S271	Schwarzbeck	BBA 9106 + VHBB 9124	831	Broadband Antenna	August 2022	August 2025

Test setup PE004_03

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S353	Rohde & Schwarz	ESW26	101492	Emi Test Receiver	December 2023	December 2024
1	CMC S287	Schwarzbeck	VUSLP 9111B	9111B-203	Broadband Antenna	August 2022	August 2025

Frequency > 1 GHz

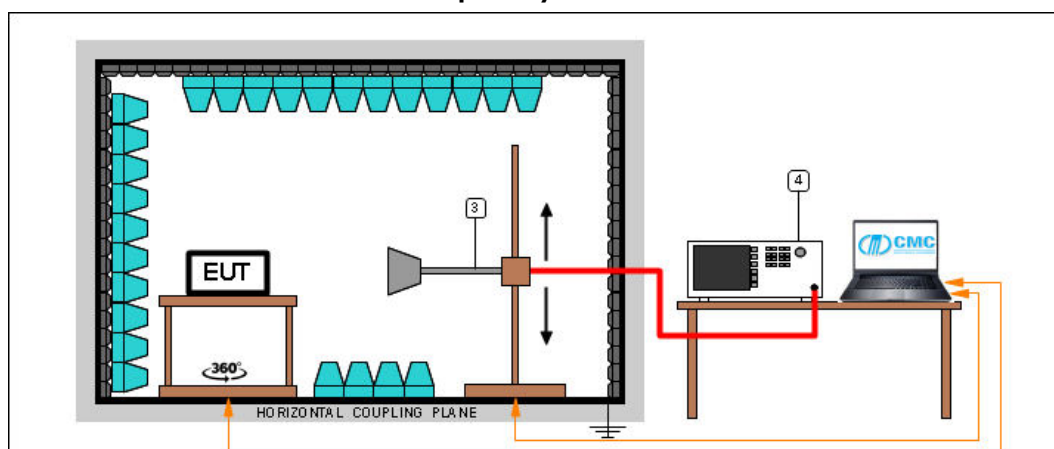

Test setup PE004_04

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
4	CMC S353	Rohde & Schwarz	ESW26	101492	Emi Test Receiver	December 2023	December 2024
3	CMC S108	Emco	3115	9811-5622	Waveguide antenna	August 2022	August 2025

Test setup PE004_05

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
4	CMC S353	Rohde & Schwarz	ESW26	101492	Emi Test Receiver	December 2023	December 2024
3	CMC S290	Schwarzbeck	BBHA 9170	733	Horn Antenna	October 2021	October 2026

Result

Transmission frequency (MHz)	Polarization	Frequency Range (MHz)	Graphs	Result
915,05	V	300 – 1000	G23171601	P
915,05	H	300 – 1000	G23171602	P
Worst case	H	30 – 300	G23171603	P
Worst case	V	30 – 300	G23171604	P
Worst case	Loop	0,009 – 30	G23171605	P
927,80	H	300 – 1000	G23171606	P
927,80	V	300 – 1000	G23171607	P
921,40	V	300 – 1000	G23171608	P
921,40	H	300 – 1000	G23171609	P
927,80	H	1000 – 10000	G23171610	P
927,80	V	1000 – 10000	G23171611	P
921,40	V	1000 – 10000	G23171612	P
921,40	H	1000 – 10000	G23171613	P
915,05	H	1000 – 10000	G23171618	P
915,05	V	1000 – 10000	G23171619	P


Remarks: EUT was tested in 3 orthogonal planes, graphs are related to the highest detected levels. Measurements at frequencies lower than 30 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $40\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Measurements at frequencies higher than 30 MHz and lower than 1000 MHz have been performed with an EUT – antenna distance of 10 m. Measured values have been corrected with conversion factor $20\log(\text{test distance}/10)$ based on the measuring distance provided by the standard. Peaks above the limits are caused by the nominal transmitting frequencies.

Graphs Legend

PK: Peak; QP [1s] (quasi-peak at 1 second) values are marked with a +
AV: Average; AV [1s] (average at 1 second) values are marked with a X

Graphs

Gandini 23171601

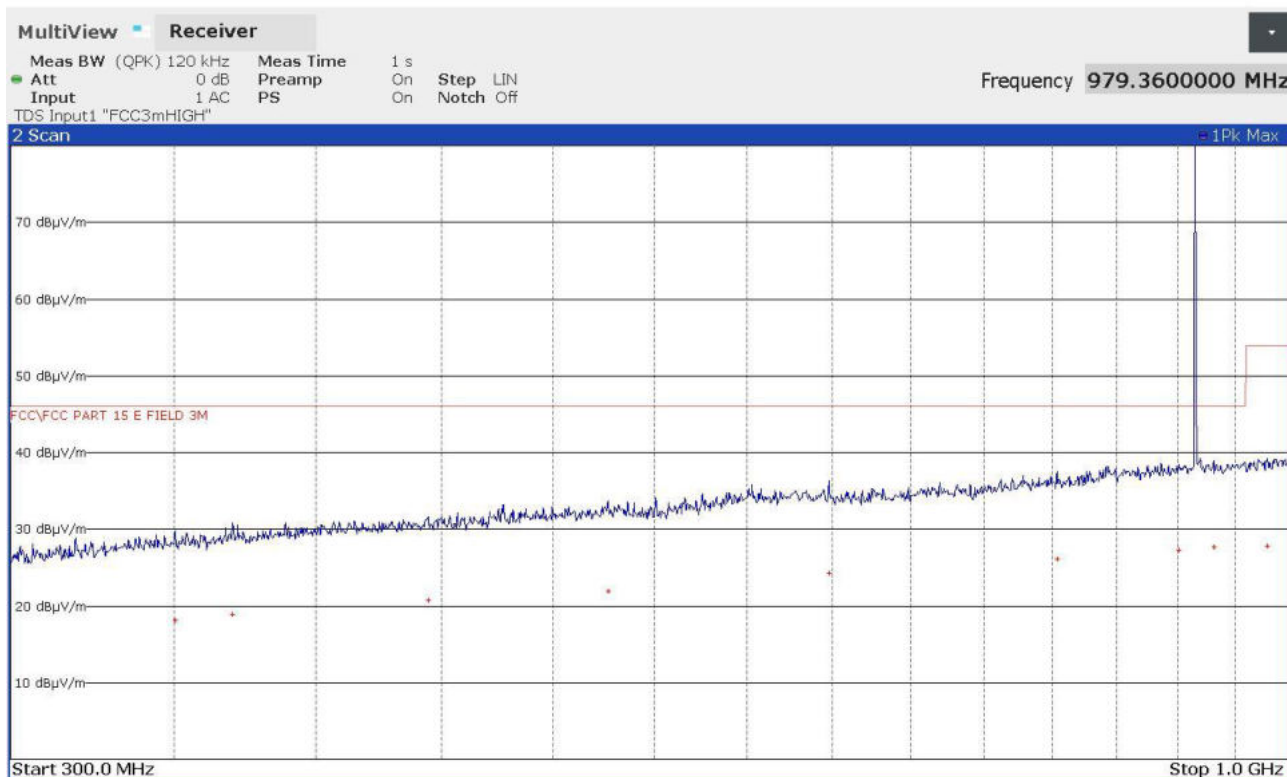


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
350200000	+18,06	-27,94
369840000	+18,93	-27,07
444480000	+20,75	-25,25
526480000	+21,87	-24,13
648320000	+24,27	-21,73
803400000	+26,13	-19,87
900960000	+27,28	-18,72
931160000	+27,63	-18,37
979360000	+27,77	-26,13

23171601_2

Gandini 23171602

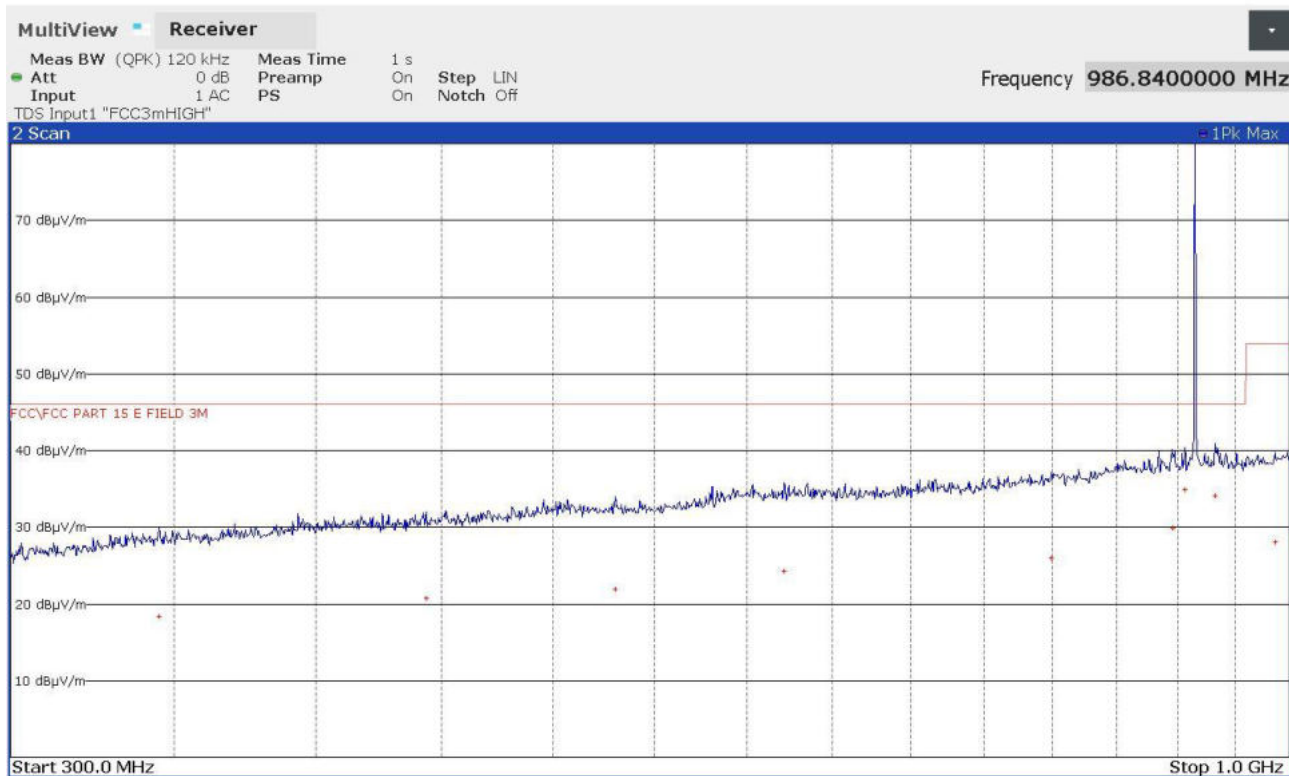


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
345120000	+18,36	-27,64
443640000	+20,68	-25,32
530200000	+21,91	-24,09
621680000	+24,30	-21,70
799400000	+26,01	-19,99
896160000	+29,94	-16,06
906560000	+34,90	-11,10
932320000	+34,10	-11,90
986840000	+28,02	-25,88

23171602_2

Gandini 23171603

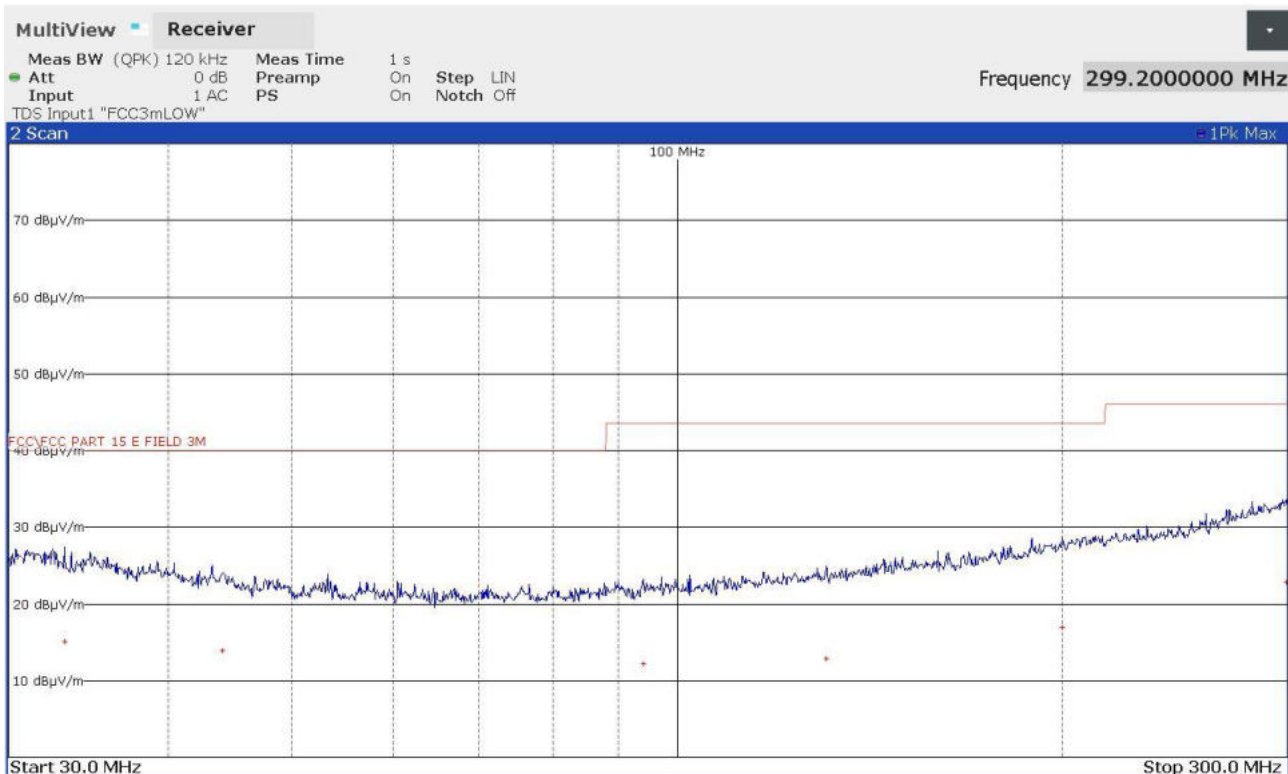


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
33200000	+15,11	-24,89
44080000	+13,92	-26,08
94040000	+12,19	-31,31
130880000	+12,89	-30,61
200040000	+16,95	-26,55
299200000	+22,87	-23,13

23171603_2

Gandini 23171604

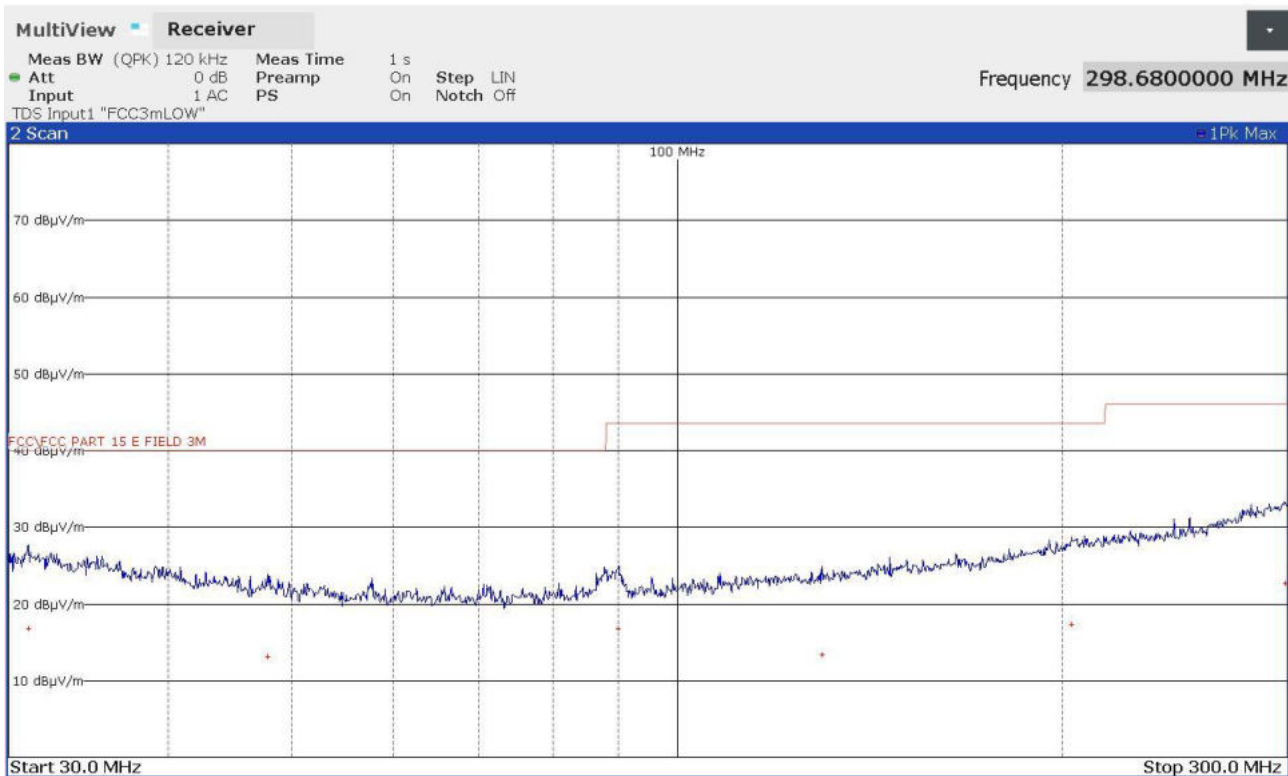


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
31080000	+16,83	-23,17
47880000	+13,07	-26,93
90000000	+16,74	-26,76
129760000	+13,39	-30,11
203280000	+17,29	-26,21
298680000	+22,69	-23,31

23171604_2

Gandini 23171605

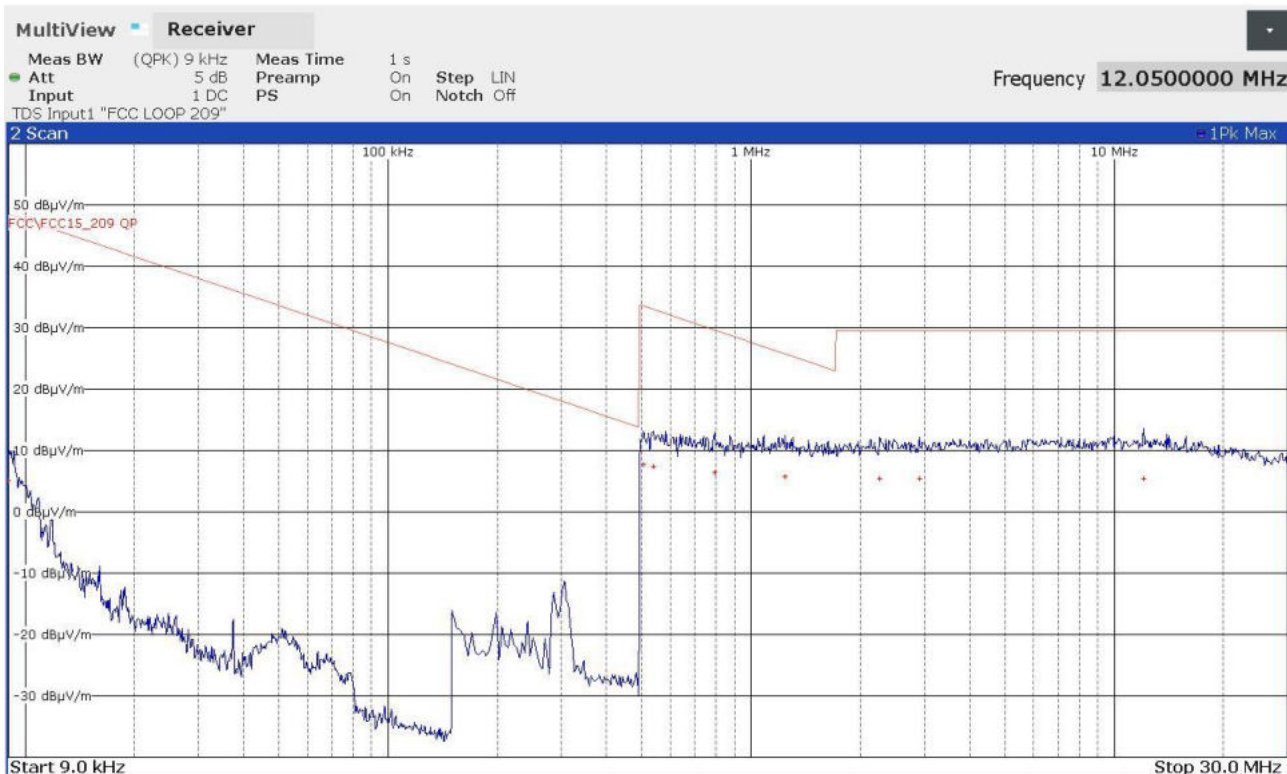


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
9000	+5,01	-43,51
506000	+7,70	-25,82
538000	+7,43	-25,56
794000	+6,36	-23,25
1238000	+5,77	-19,98
2262000	+5,49	-24,05
2906000	+5,37	-24,17
12050000	+5,41	-24,13

23171605_2

Gandini 23171606

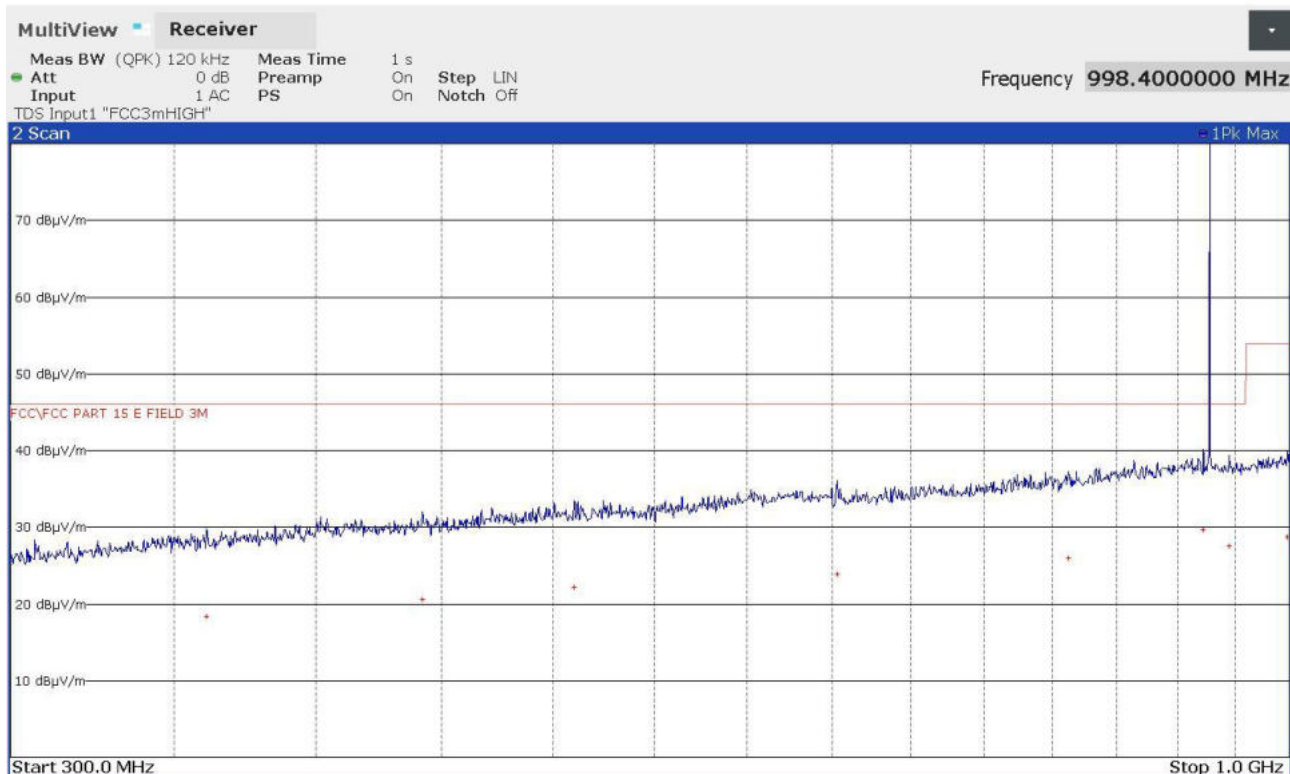


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
360840000	+18,31	-27,69
442200000	+20,63	-25,37
510200000	+22,10	-23,90
653320000	+23,81	-22,19
812200000	+26,00	-20,00
922200000	+29,68	-16,32
944920000	+27,55	-18,45
998400000	+28,67	-25,23

23171606_2

Gandini 23171607

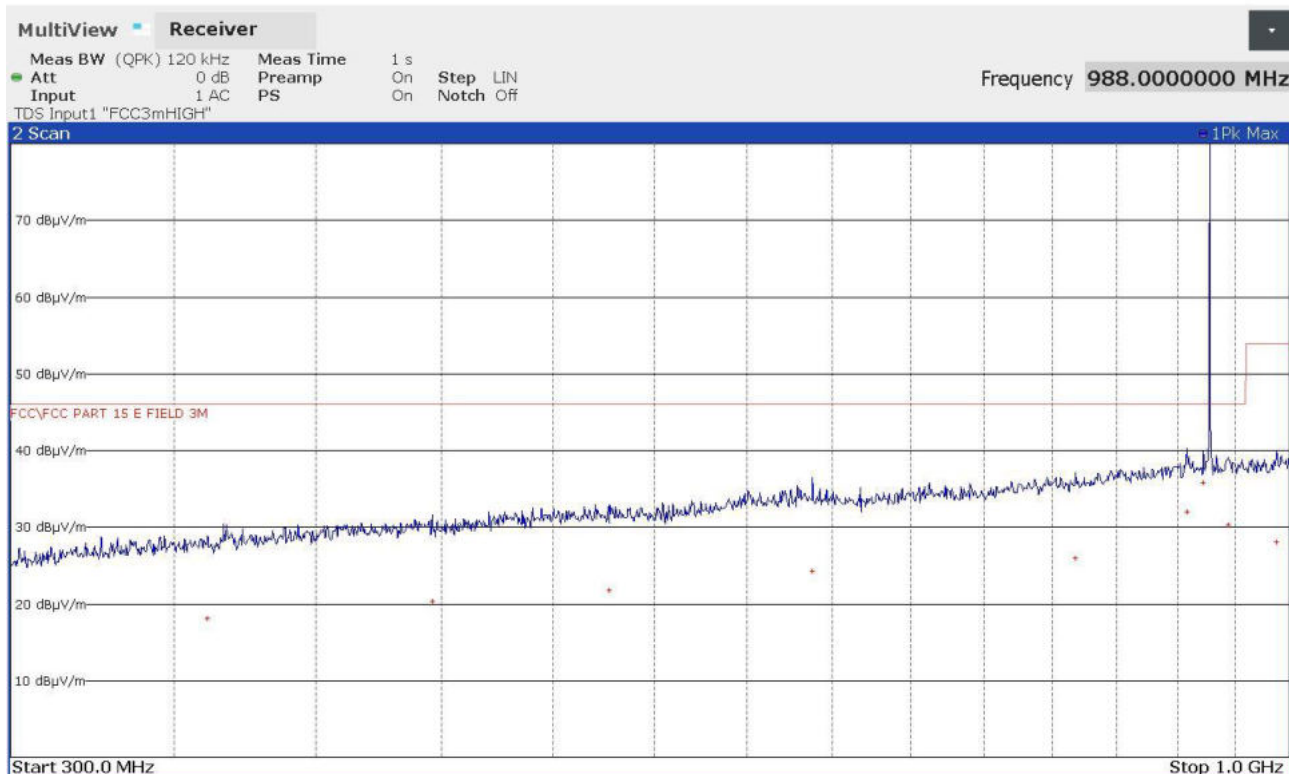


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
361240000	+18,11	-27,89
446200000	+20,35	-25,65
526960000	+21,77	-24,23
638320000	+24,29	-21,71
817440000	+25,92	-20,08
908040000	+32,01	-13,99
922200000	+35,74	-10,26
943800000	+30,27	-15,73
988000000	+28,05	-25,85

23171607_2

Gandini 23171608

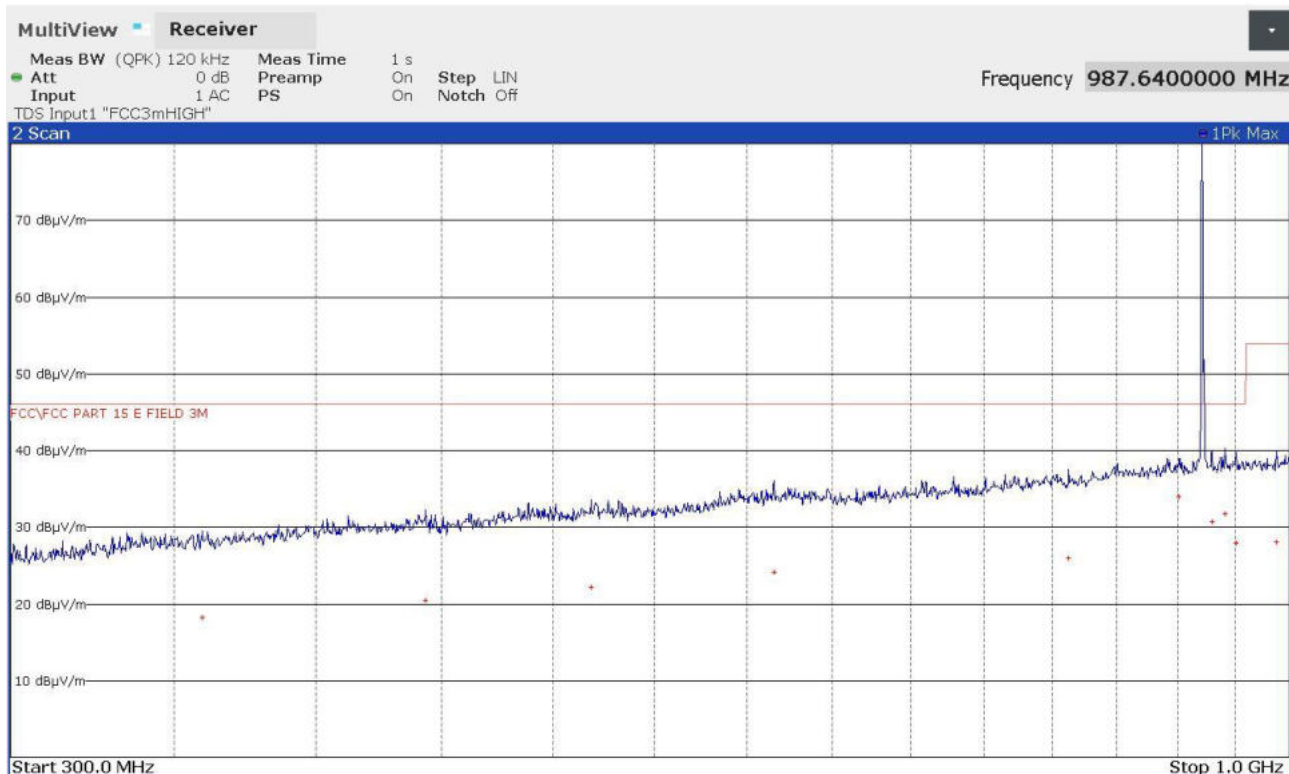


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
359480000	+18,19	-27,81
443440000	+20,48	-25,52
518360000	+22,22	-23,78
615360000	+24,10	-21,90
812080000	+25,95	-20,05
901600000	+33,95	-12,05
929400000	+30,68	-15,32
941160000	+31,80	-14,20
950920000	+27,98	-18,02
987640000	+28,12	-25,78

23171608_2

Gandini 23171609

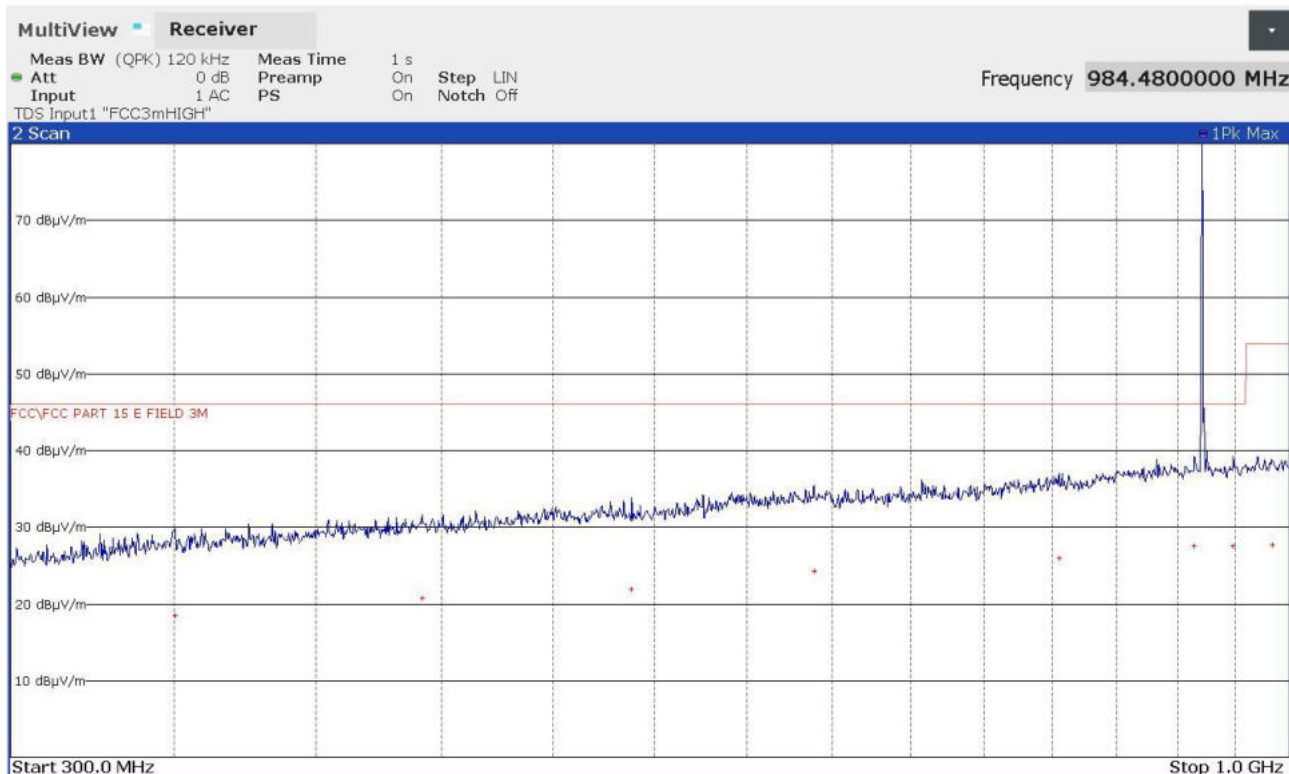


FINAL RESULT TABLE

QUASI PEAK

Freq Hz	Lev dBuV/m	Margin dB
350280000	+18,52	-27,48
442000000	+20,68	-25,32
538320000	+21,89	-24,11
639040000	+24,29	-21,71
804960000	+26,02	-19,98
914360000	+27,57	-18,43
948480000	+27,58	-18,42
984480000	+27,63	-26,27

23171609_2

Gandini 23171610

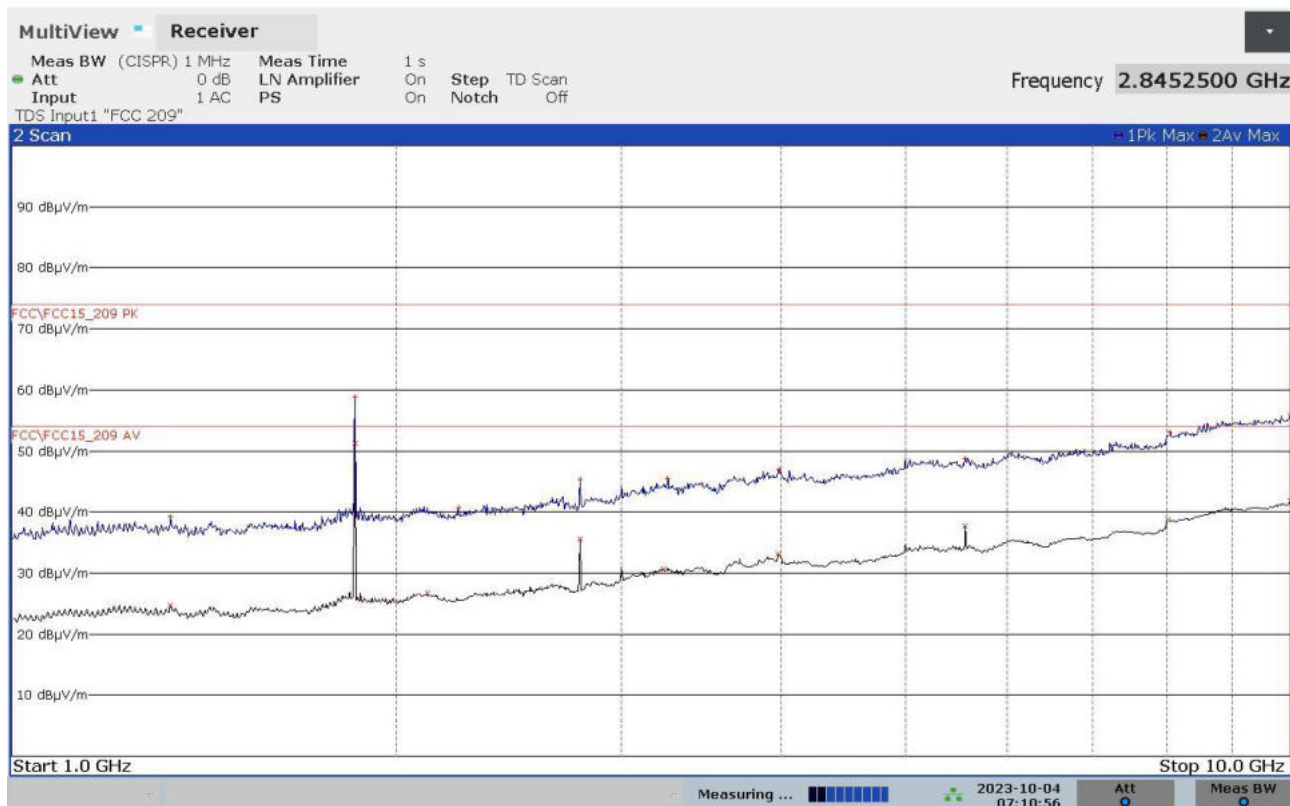


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1330750000	+39,19	-34,79	1331500000	+24,64	-29,34
1855500000	+58,83	-15,15	1855500000	+51,31	-2,67
2235000000	+40,65	-33,33	2113000000	+26,74	-27,24
2783250000	+45,24	-28,74	2783500000	+35,58	-18,40
3260750000	+45,55	-28,43	3235000000	+30,69	-23,29
3979000000	+47,02	-26,96	3977000000	+33,06	-20,92
5566750000	+48,76	-25,22	5566750000	+37,74	-16,24
8054500000	+53,10	-20,88	8020000000	+38,67	-15,31
9997500000	+56,04	-17,94	10000000000	+41,79	-12,19

23171610_2

Gandini 23171611

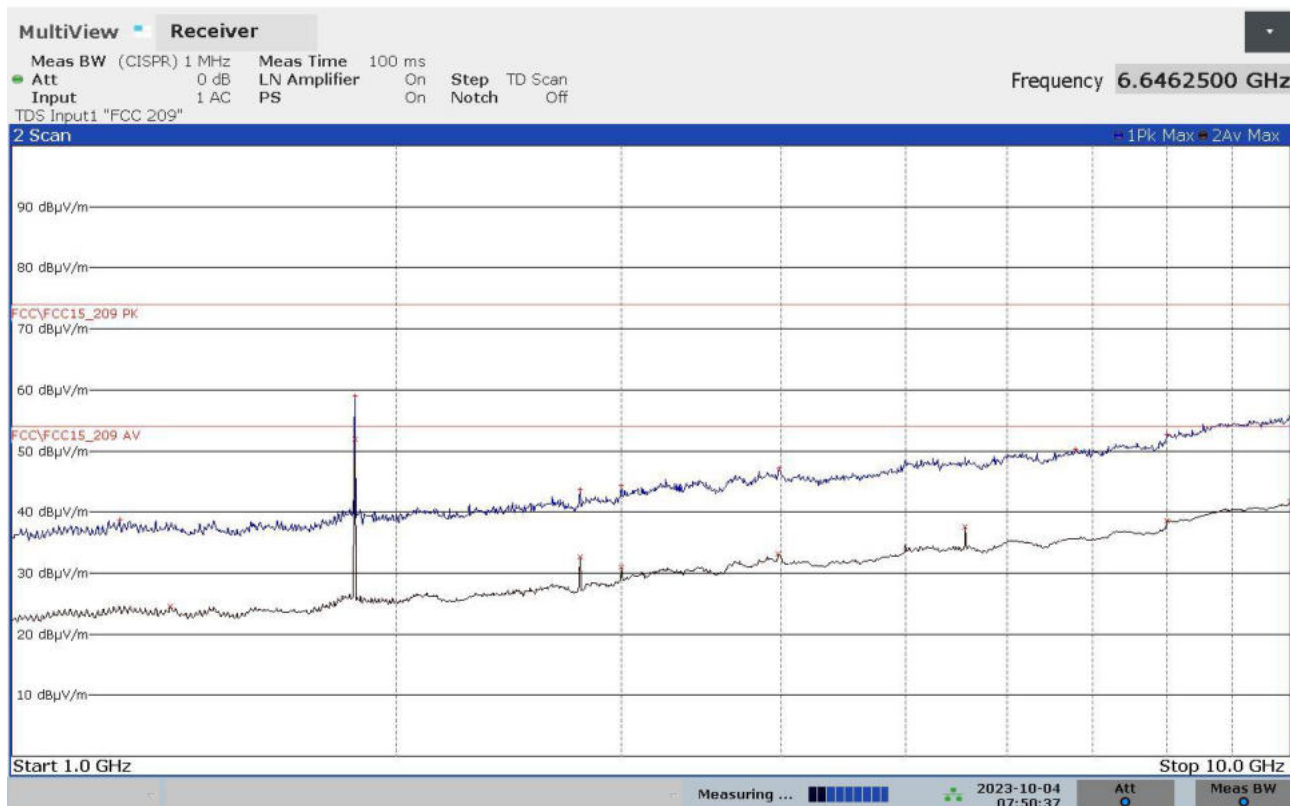


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1215000000	+38,79	-35,19	1331250000	+24,60	-29,38
1855500000	+59,05	-14,93	1855500000	+51,89	-2,09
2783500000	+43,63	-30,35	2783500000	+32,69	-21,29
2998250000	+44,34	-29,64	2998250000	+30,96	-23,02
3980250000	+47,09	-26,89	3977250000	+33,07	-20,91
6790500000	+50,27	-23,71	5566750000	+37,58	-16,40
8009250000	+52,67	-21,31	8010250000	+38,57	-15,41
9995250000	+55,67	-18,31	10000000000	+41,69	-12,29

23171611_2

Gandini 23171612

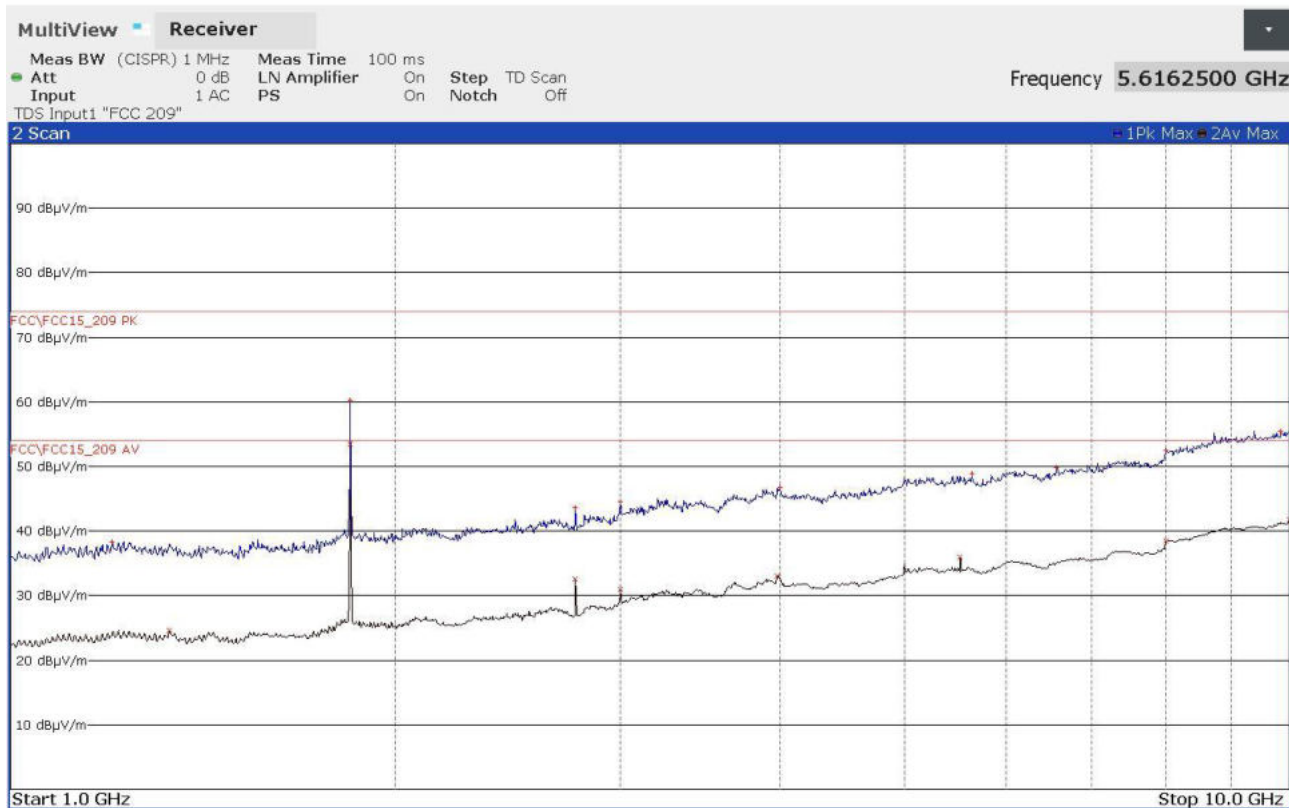


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1201000000	+38,33	-35,65	1331500000	+24,60	-29,38
1842750000	+60,26	-13,72	1842750000	+53,35	-0,63
2764250000	+43,55	-30,43	2764250000	+32,61	-21,37
2999250000	+44,56	-29,42	2998250000	+30,94	-23,04
3997250000	+46,74	-27,24	3977000000	+33,07	-20,91
5646250000	+48,84	-25,14	5528500000	+35,97	-18,01
6578250000	+49,79	-24,19	8010500000	+38,55	-15,43
8004750000	+52,47	-21,51	9999500000	+41,68	-12,30
9840000000	+55,48	-18,50			

23171612_2

Gandini 23171613

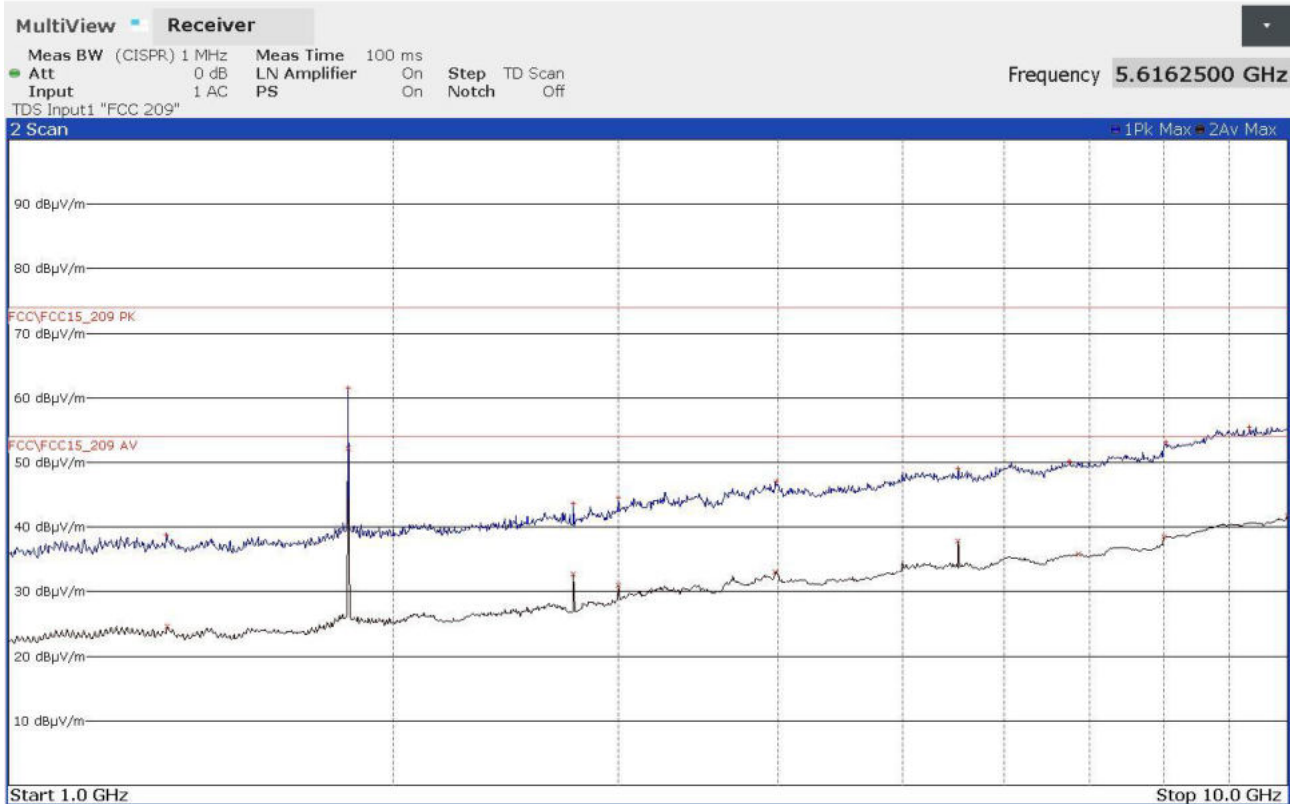


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1329250000	+38,79	-35,19	1331250000	+24,58	-29,40
1842750000	+61,57	-12,41	1842750000	+52,15	-1,83
2764250000	+43,58	-30,40	2764250000	+32,69	-21,29
2999250000	+44,50	-29,48	2998250000	+30,97	-23,01
3979750000	+47,09	-26,89	3977250000	+33,06	-20,92
5528250000	+49,02	-24,96	5528500000	+37,80	-16,18
6753750000	+50,14	-23,84	6866000000	+35,82	-18,16
8034000000	+53,17	-20,81	8010500000	+38,55	-15,43
9338500000	+55,42	-18,56	10000000000	+41,68	-12,30

23171613_2

Gandini 23171618

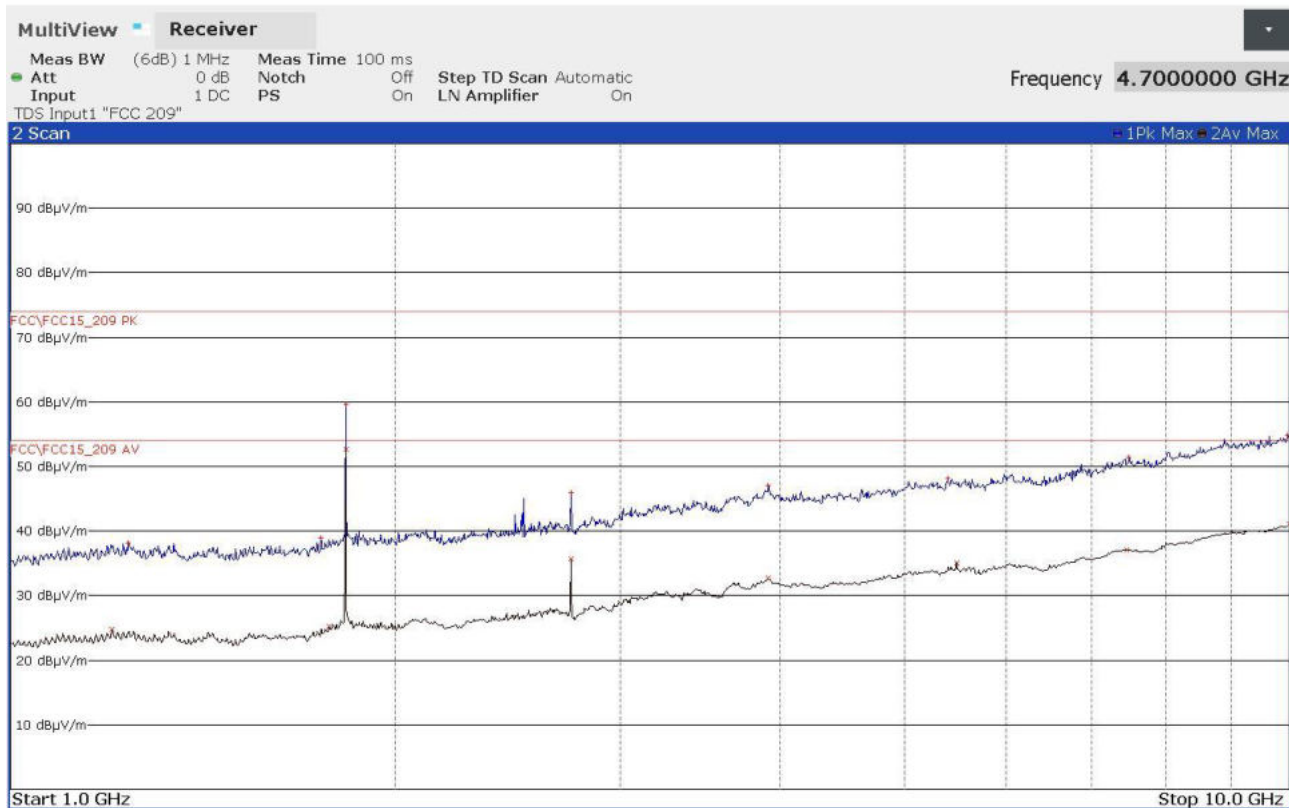


FINAL RESULT TABLE

MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1236500000	+38,18	-35,80	1201000000	+24,73	-29,25
1749750000	+38,90	-35,08	1774500000	+25,29	-28,69
1830000000	+59,70	-14,28	1830000000	+52,64	-1,34
2745250000	+45,91	-28,07	2745000000	+35,63	-18,35
3913500000	+47,03	-26,95	3912500000	+32,69	-21,29
5406250000	+48,08	-25,90	5490250000	+35,04	-18,94
7493500000	+51,39	-22,59	7465750000	+37,10	-16,88
9969750000	+54,79	-19,19	9991500000	+41,09	-12,89

23171618_2

Gandini 23171619

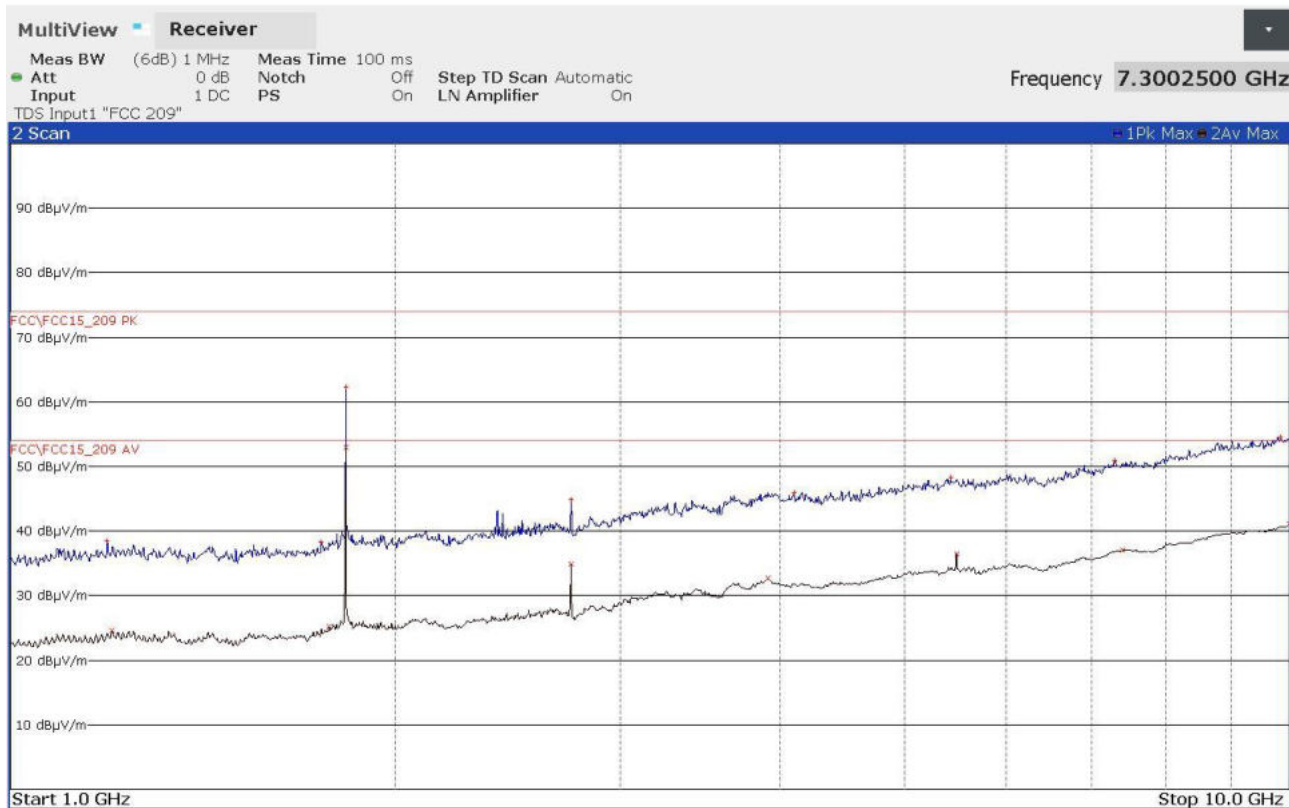

FINAL RESULT TABLE


MAX PEAK			AVERAGE		
Freq Hz	Lev dBuV/m	Margin dB	Freq Hz	Lev dBuV/m	Margin dB
1190500000	+38,40	-35,58	1201000000	+24,68	-29,30
1750250000	+38,24	-35,74	1774500000	+25,26	-28,72
1830000000	+62,25	-11,73	1830000000	+53,00	-0,98
2745250000	+44,87	-29,11	2745250000	+34,87	-19,11
4098750000	+45,95	-28,03	3913000000	+32,66	-21,32
5436500000	+48,21	-25,77	5490250000	+36,45	-17,53
7295250000	+50,88	-23,10	7410750000	+37,08	-16,90
9838000000	+54,49	-19,49	9991250000	+41,08	-12,90

23171619_2

9.3 20 dB bandwidth

Tested by	G. Gandini
Test date	07.02.2024
Test location (stand)	Laboratory
Basic standard(s)	ANSI C63.10 cl. 7.8.7
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.215 (c)
Supplementary test set-up description	--
Supplementary information	--

Test setup

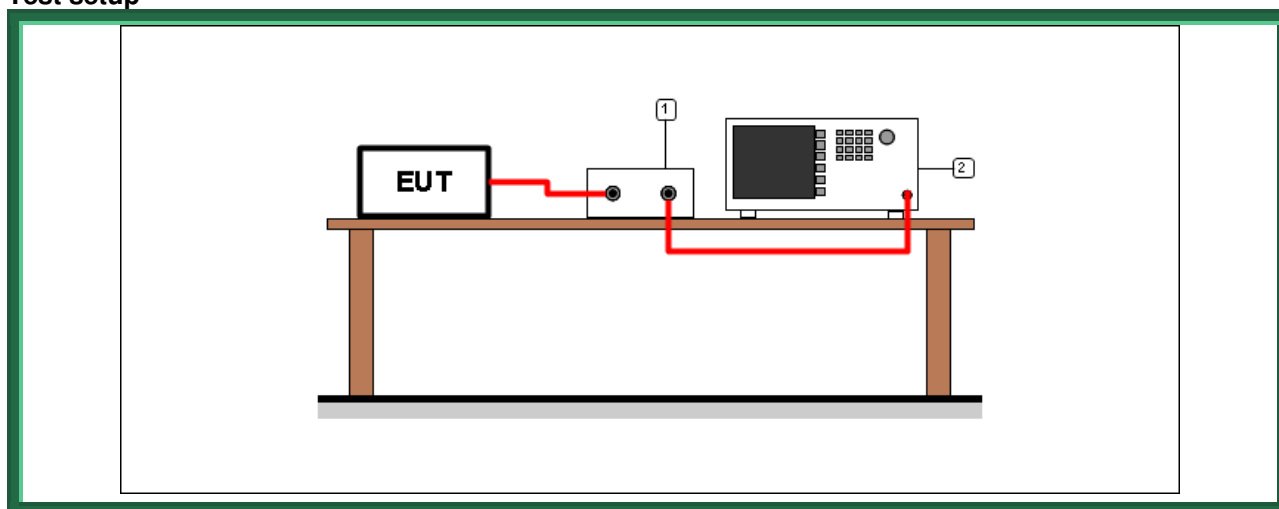

Test setup PR002_01							
Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test

Result

<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>20 dB bandwidth (kHz)</i>
915,05	G23171620	15,534
921,40	G23171626	15,534
927,80	G23171629	15,534

Graphs

Gandini 23171620



Gandini 23171626



Gandini 23171629




MultiView Spectrum

Ref Level 40.00 dBm Offset 20.50 dB RBW 300 Hz

Att 20 dB SWT 55.6 ms VBW 1 kHz Mode Sweep

1 Frequency Sweep

: 1Pk Max

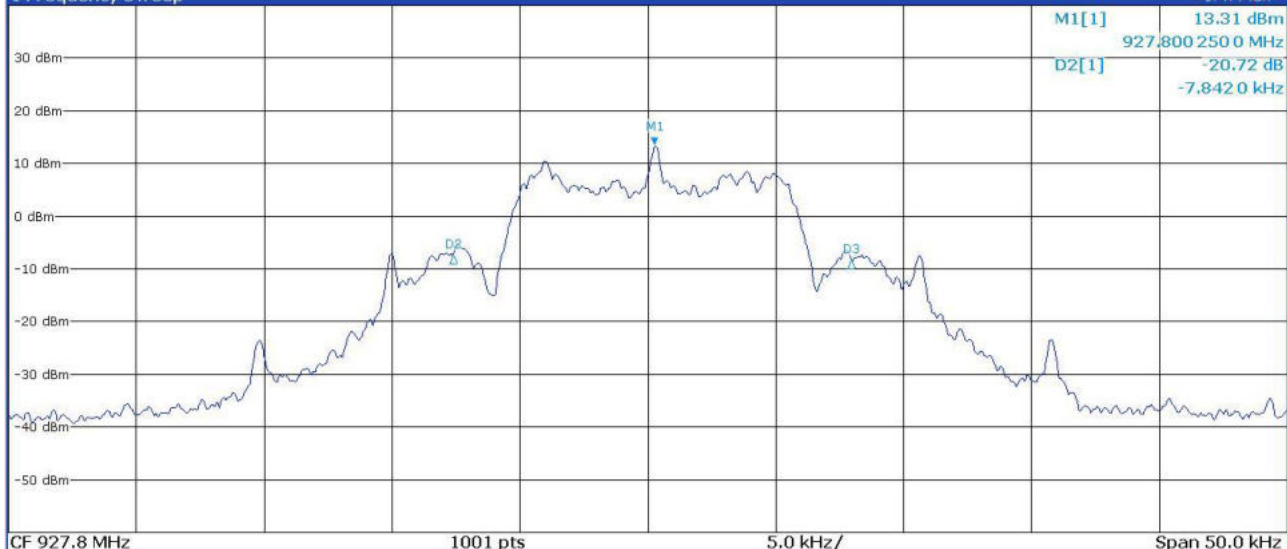

2 Marker Table

Type	Ref	Trc	X-Value	Y-Value	Function	Function Result
M1		1	927.80025 MHz	13.31 dBm		
D2	M1	1	-7.842 kHz	-20.72 dB		
D3	M1	1	7.692 kHz	-21.57 dB		

Aborted



2024-02-07 11:42:17


9.4 Channel separation

Tested by	G. Gandini
Test date	07.02.2024
Test location (stand)	Laboratory
Basic standard(s)	KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.2
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.247
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test setup

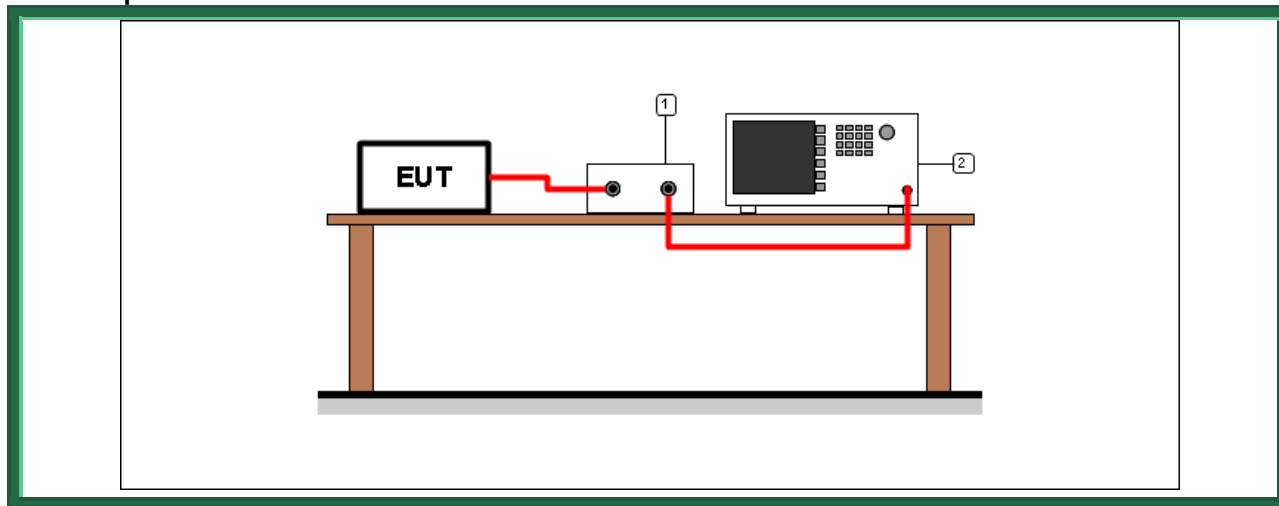

Test setup PR002_01


Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test

Result

<i>Frequency band (MHz)</i>	<i>Graphs</i>	<i>Channel separation (kHz)</i>	<i>Minimum channel separation required (kHz)</i>	<i>Results</i>
902 – 928	G23171643	100,5	25	Complies

Graphs

Gandini 23171643

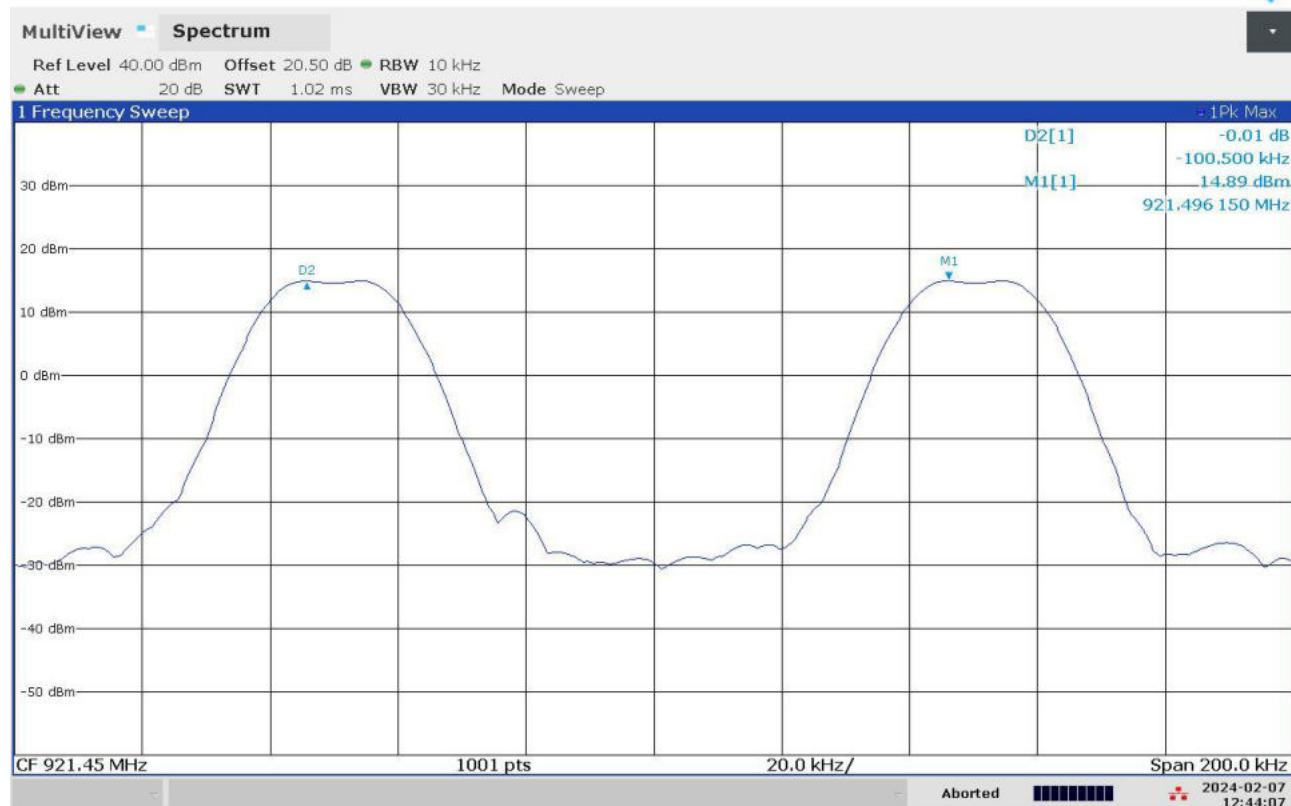


9.5 Number of hopping channels

Tested by	G. Gandini
Test date	07.02.2024
Test location (stand)	Laboratory
Basic standard(s)	KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.3
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.247
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

For frequency hopping systems operating in the 902 – 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test setup

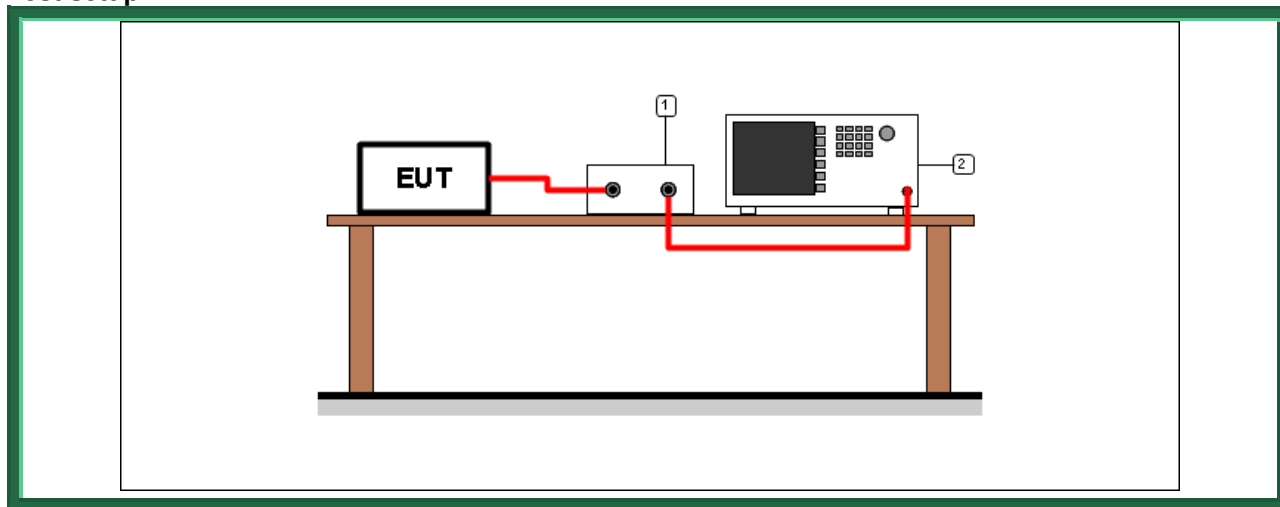

Test setup PR002_01


Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test

Result

<i>Frequency band (MHz)</i>	<i>Graphs</i>	<i>Number of hopping channels</i>	<i>Minimum number of hopping channels required</i>	<i>Results</i>
902 – 928	G23171637	128	50	Complies

Graphs

Gandini 23171637

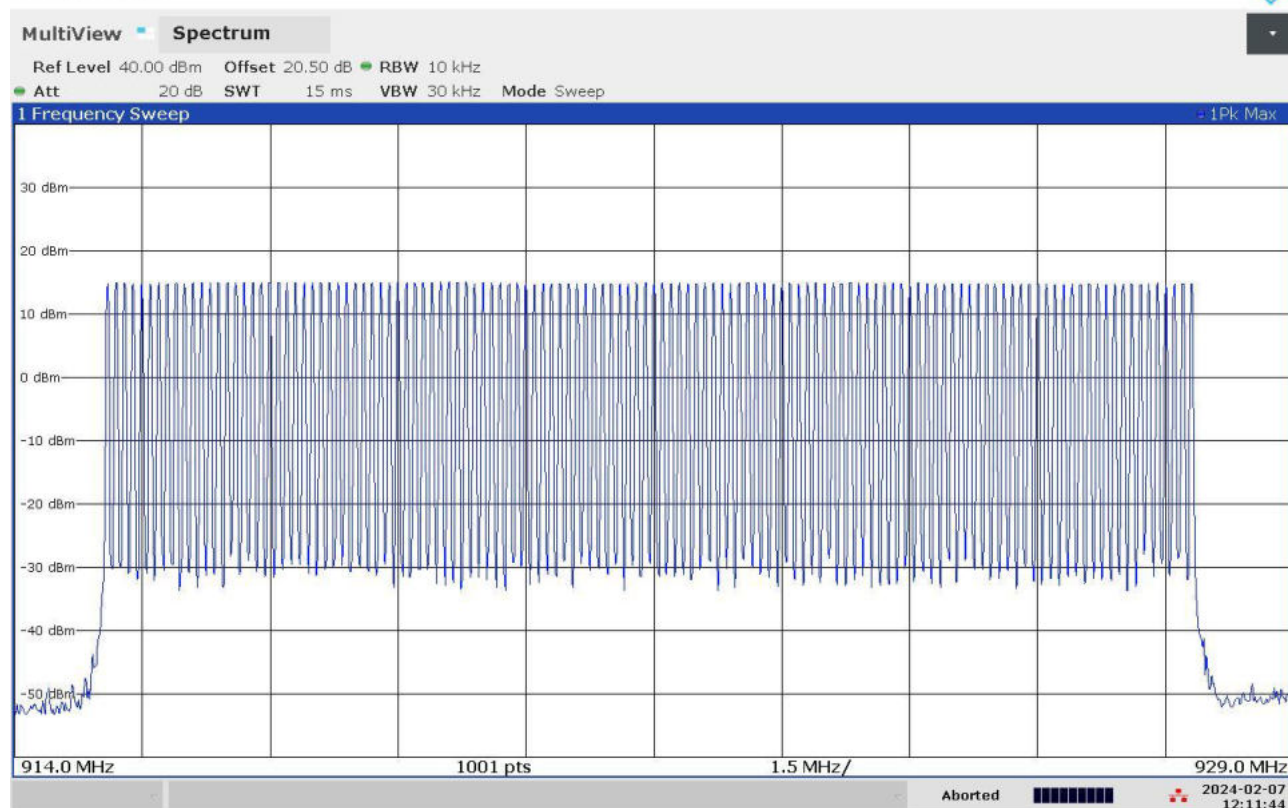


9.6 Time of occupancy

Tested by	G. Gandini
Test date	07.02.2024
Test location (stand)	Laboratory
Basic standard(s)	KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 9 b) ANSI C63.10 cl. 7.8.4
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.247
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

For frequency hopping systems operating in the 902 – 928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0,4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Test setup

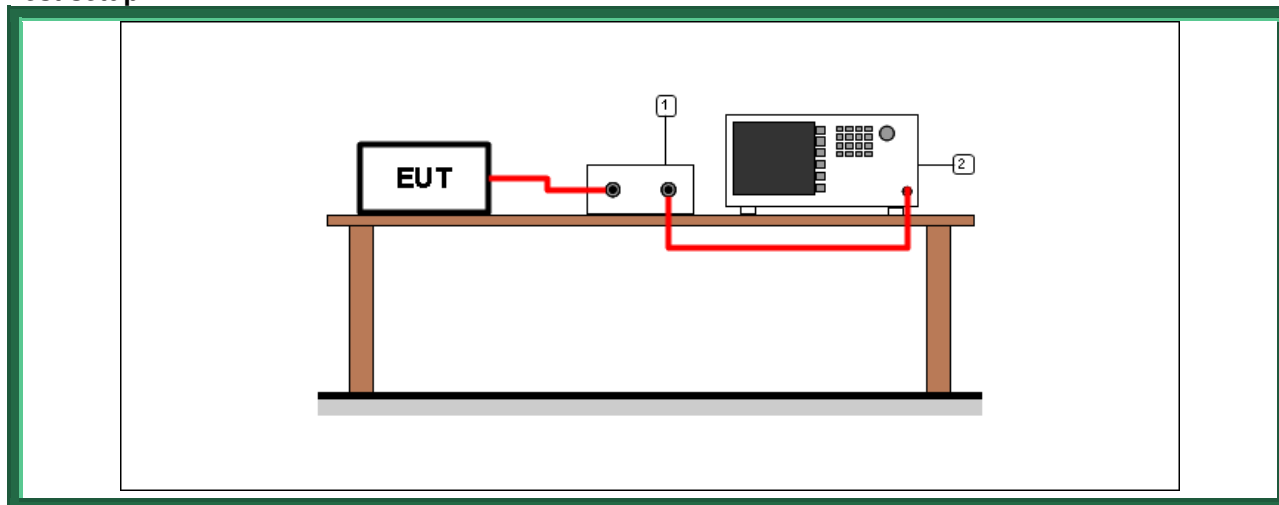

Test setup PR002_01

Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test

Result

<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Dwell time (ms)</i>
921,425	G23171644	24,20


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Number of transmissions</i>	<i>Period</i>
921,50	G23171643	3	20 s

Remarks: only the highest peaks have been considered. The lowest peaks are due to the auxiliary receiver unit.


<i>Time of occupancy (Dwell time x Nr. transmissions)</i>	<i>Maximum allowed time of occupancy</i>	<i>Results</i>
72,60 ms	400 ms	Complies

Graphs

Gandini 23171643

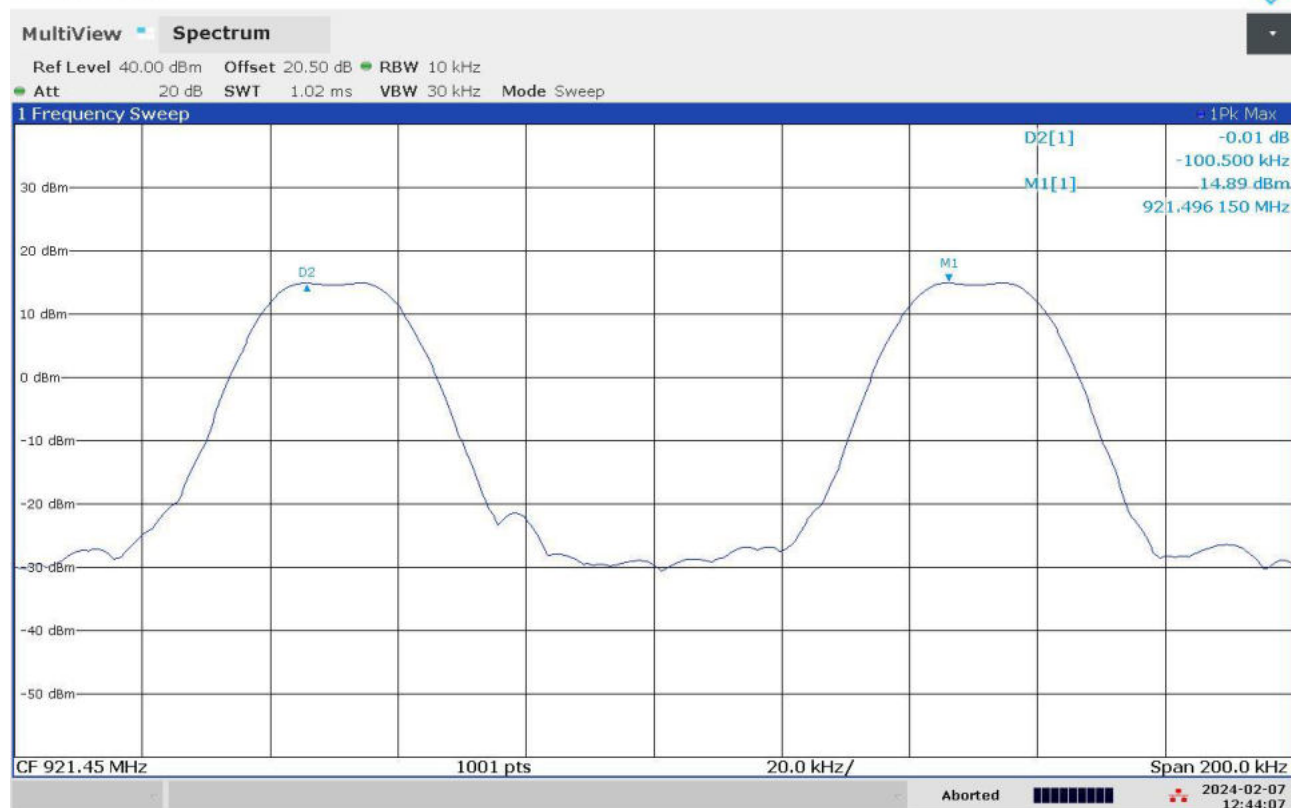

Gandini 23171644

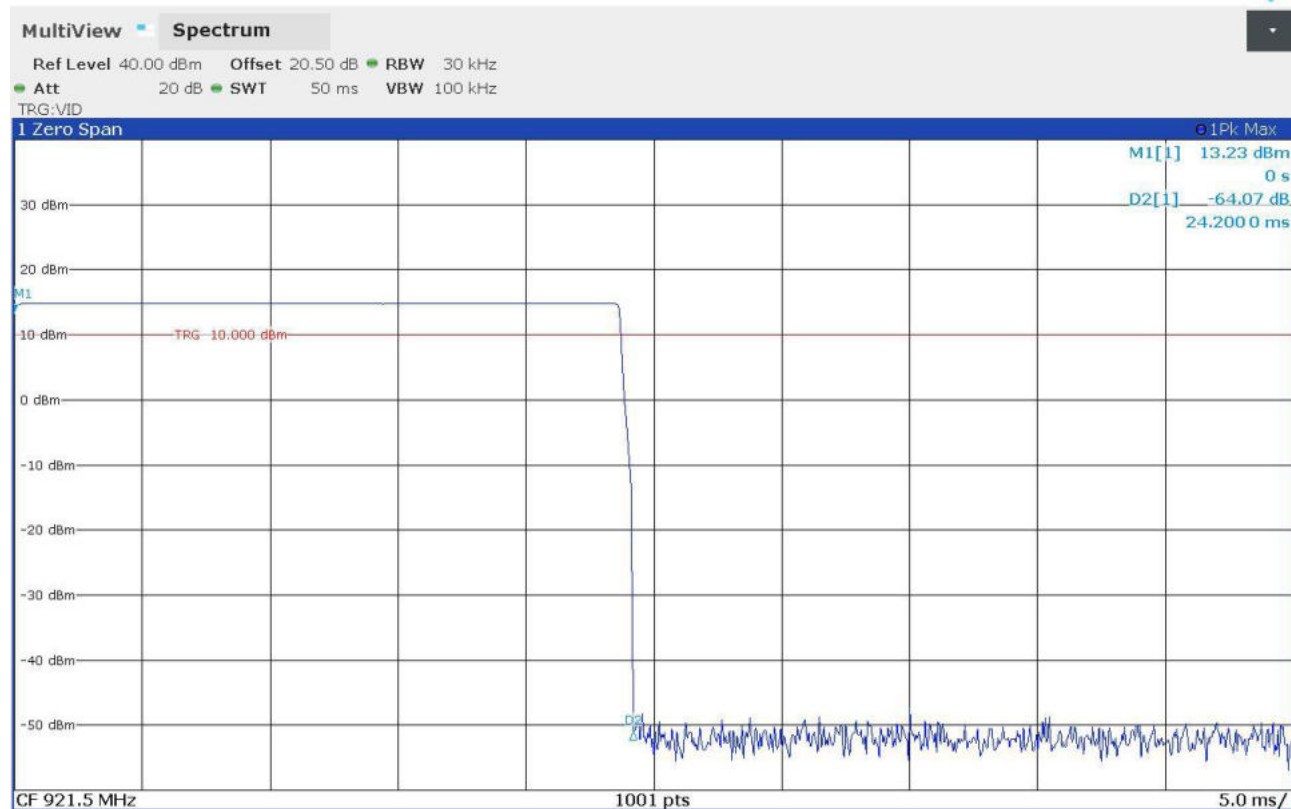

9.7 Band edge


Tested by	G. Gandini
Test date	06.03.2024
Test location (stand)	Laboratory
Basic standard(s)	ANSI C63.10 cl. 7.8.6
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.247
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Operation within the band 902 – 928 MHz $\pm$ RBW/2.

Test setup

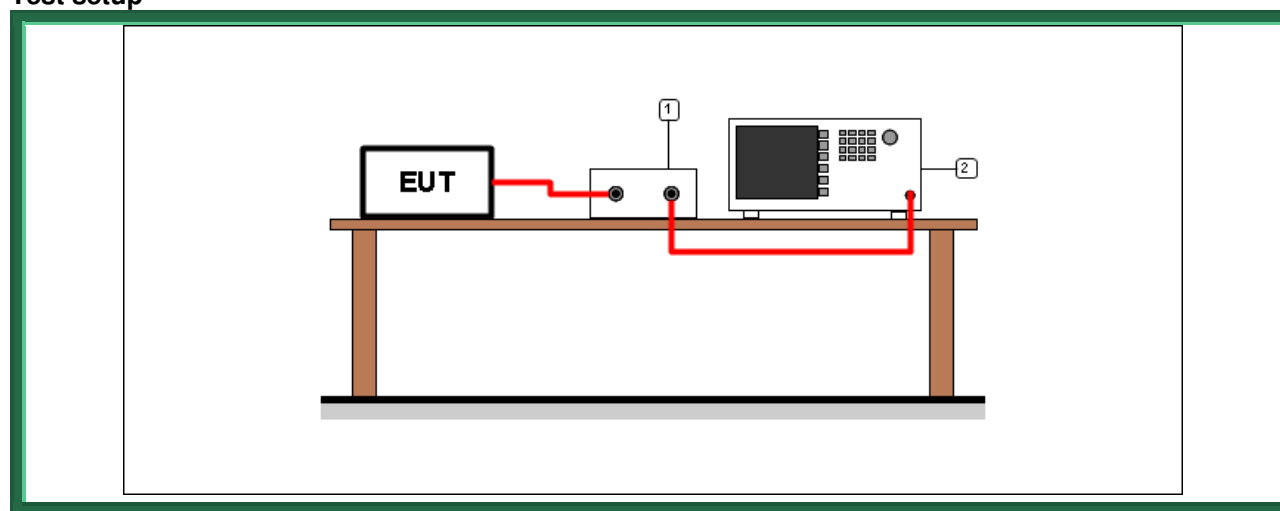

Test setup PR002_01							
Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test


Result

Frequency (MHz)	Bandwidth	Graph(s) – Hopping	Absolute power (dBm)	Power limit (dBm)	Frequency	Results
915,05	100 kHz	G23171633 G23171634	-5,50	-5,05	F _L : 914,9141 MHz	Complies
927,80	100 kHz	G23171635 G23171636	-5,78	-5,20	F _H : 927,9349 MHz	Complies


Frequency (MHz)	Bandwidth	Graph(s) – No hopping	Absolute power (dBm)	Power limit (dBm)	Frequency	Results
915,05	100 kHz	G23171623 G23171624	-5,66	-5,04	F _L : 914,913 MHz	Complies
927,80	100 kHz	G23171631 G23171632	-6,01	-5,20	F _H : 927,9381 MHz	Complies

Graphs


Gandini 23171623

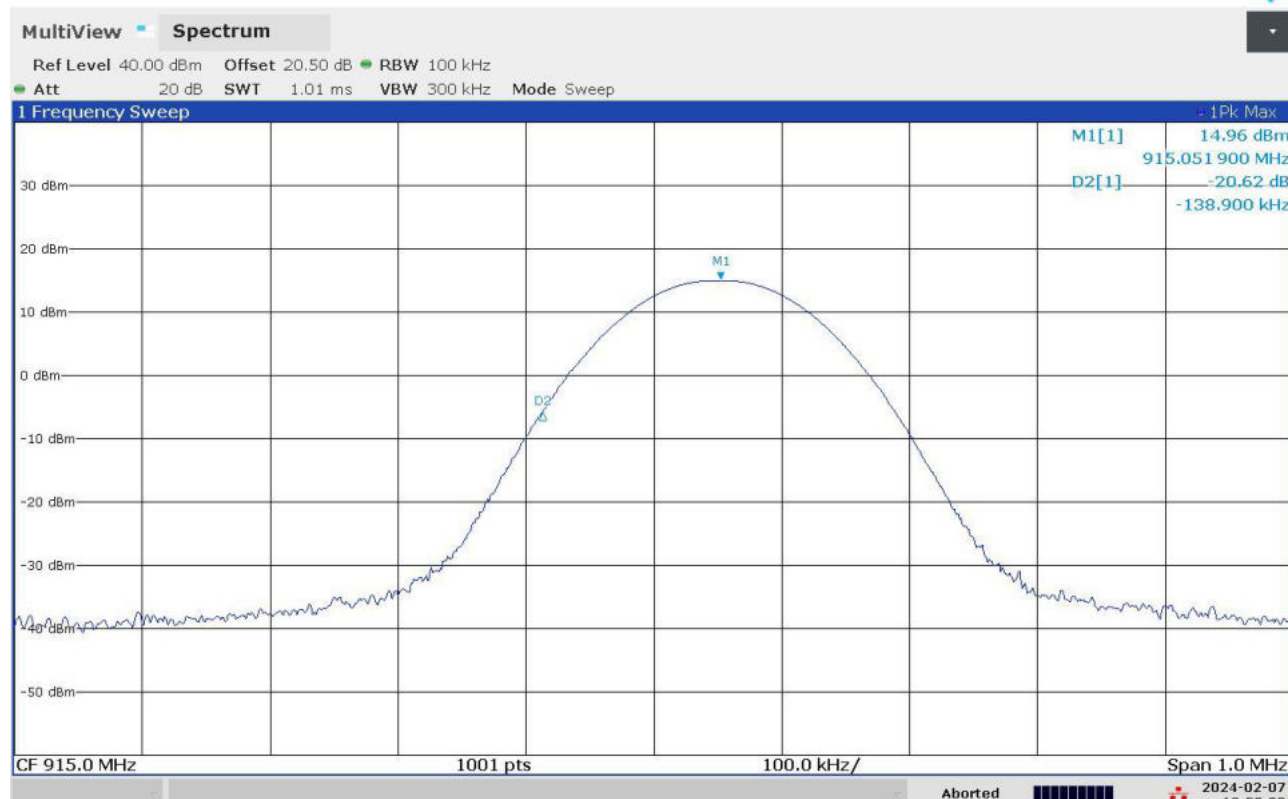


Gandini 23171624

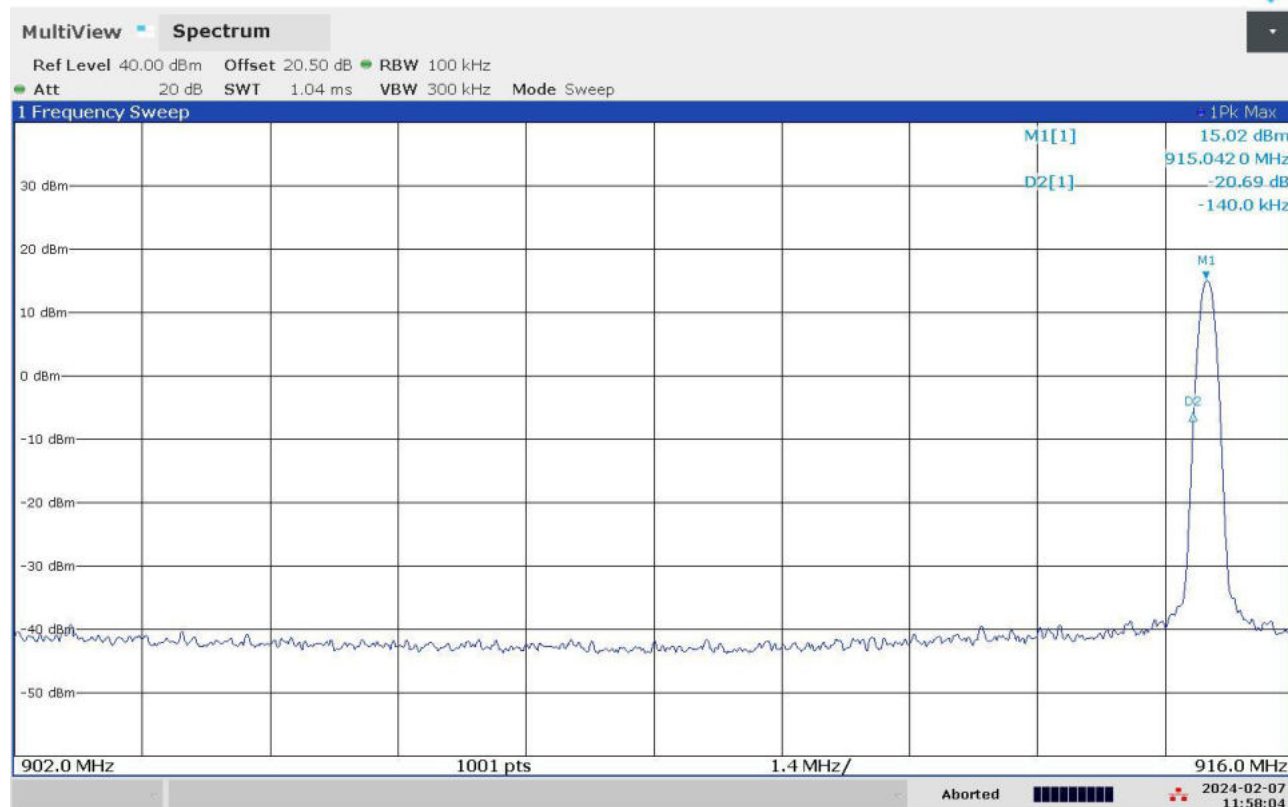


Gandini 23171631

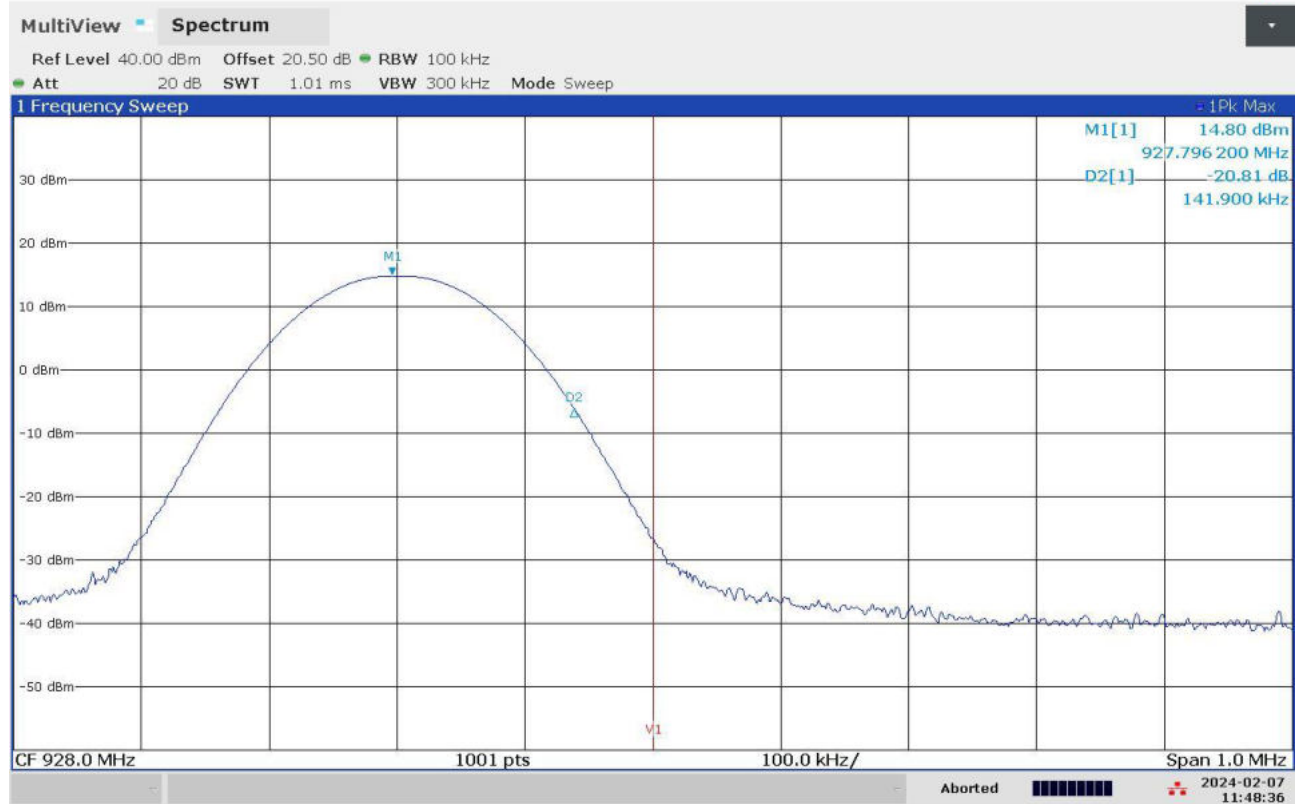


Gandini 23171632

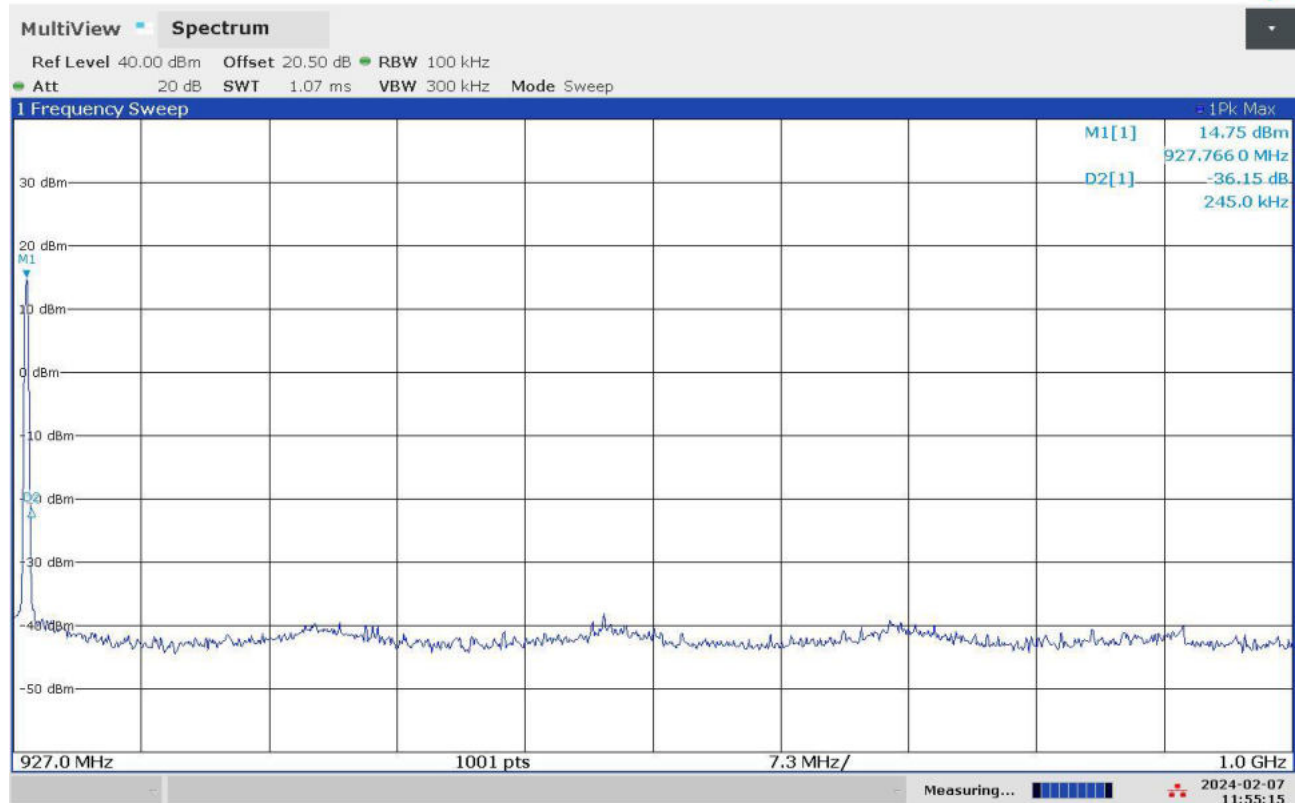


Gandini 23171633

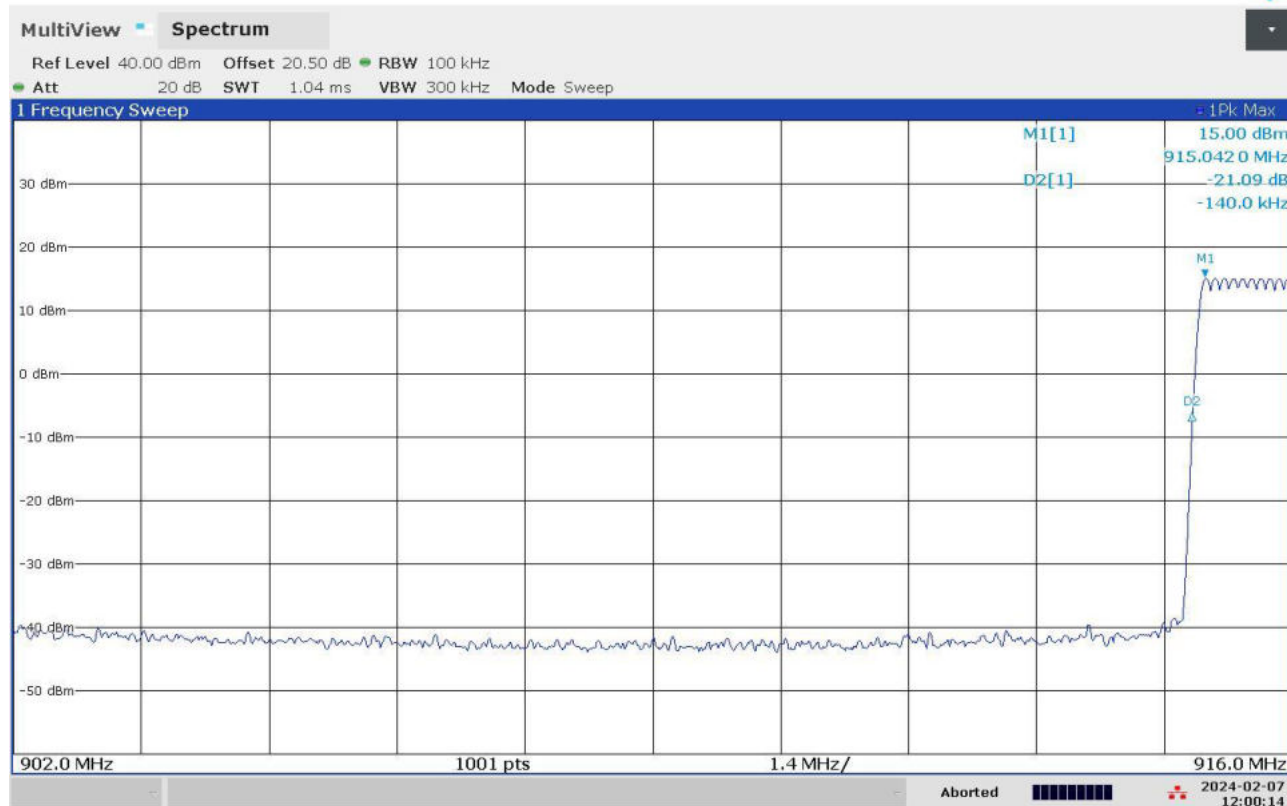


Gandini 23171634

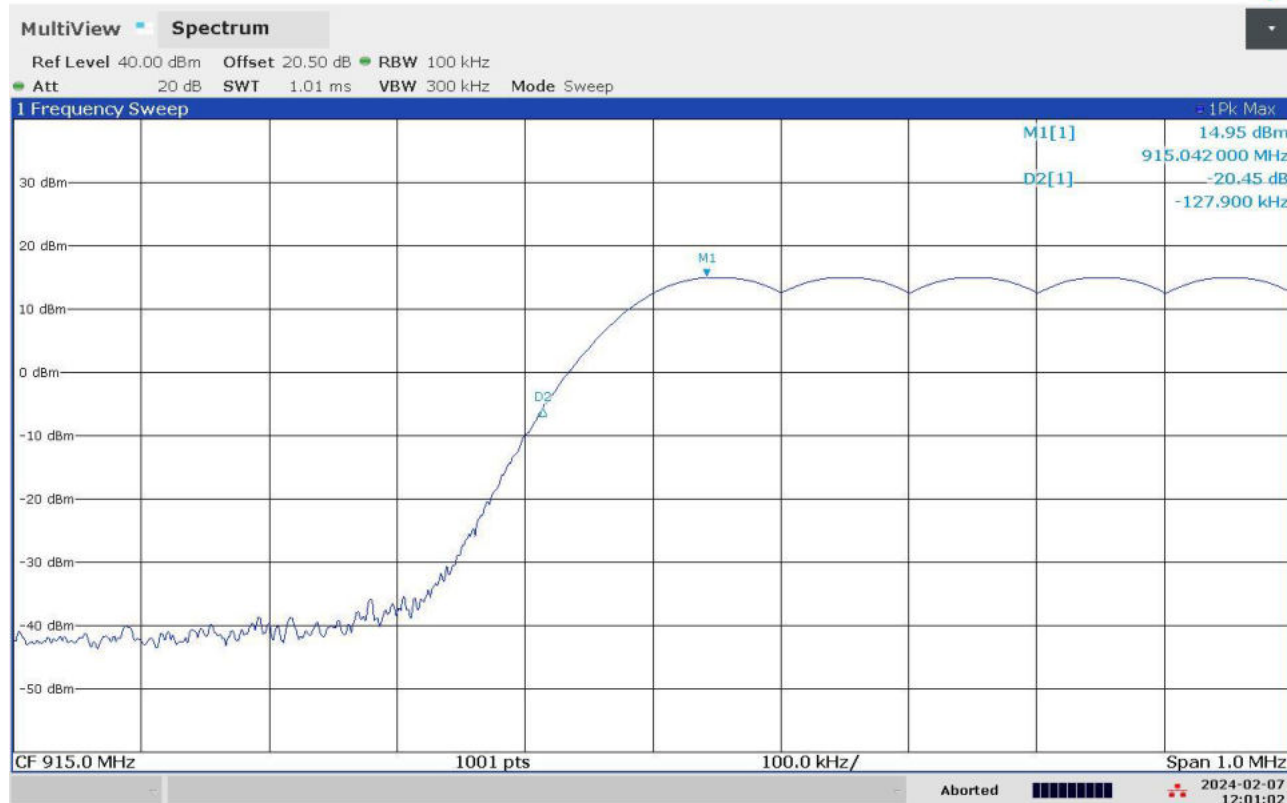

Gandini 23171635

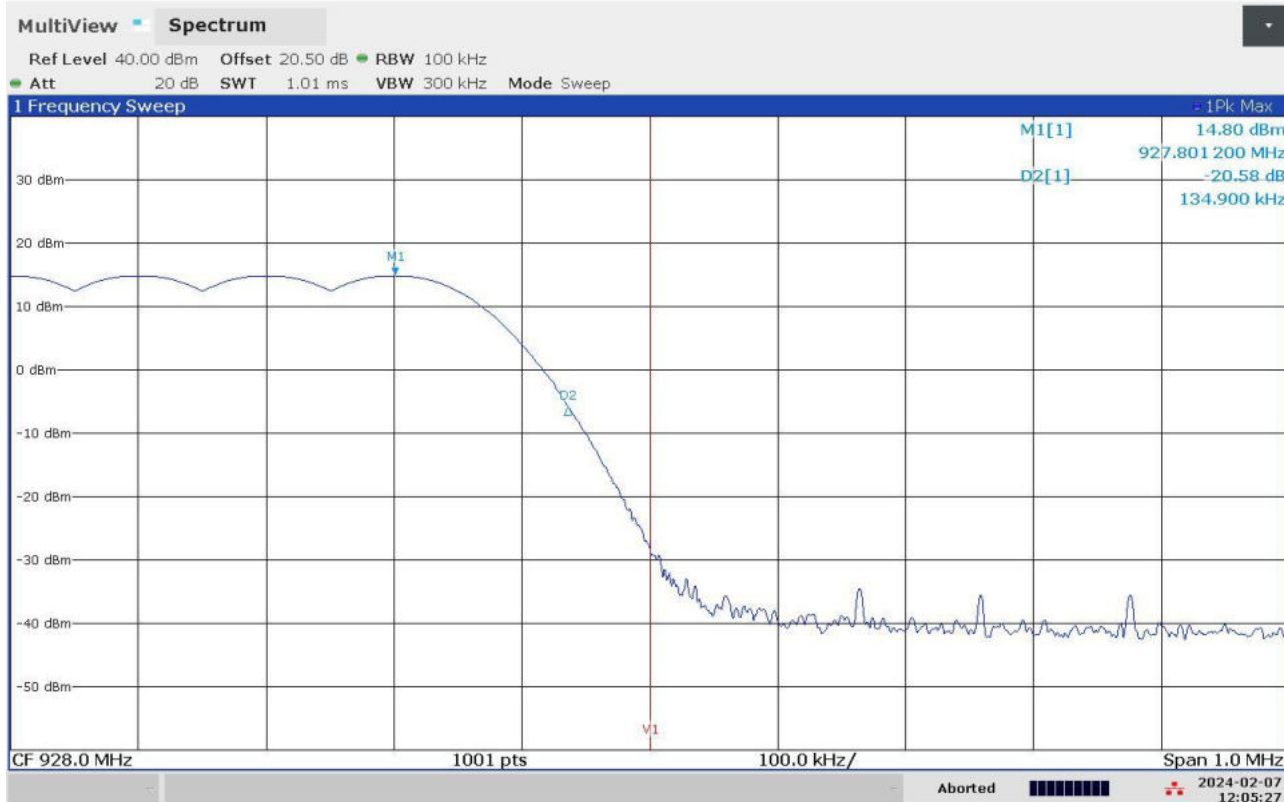

Gandini 23171636

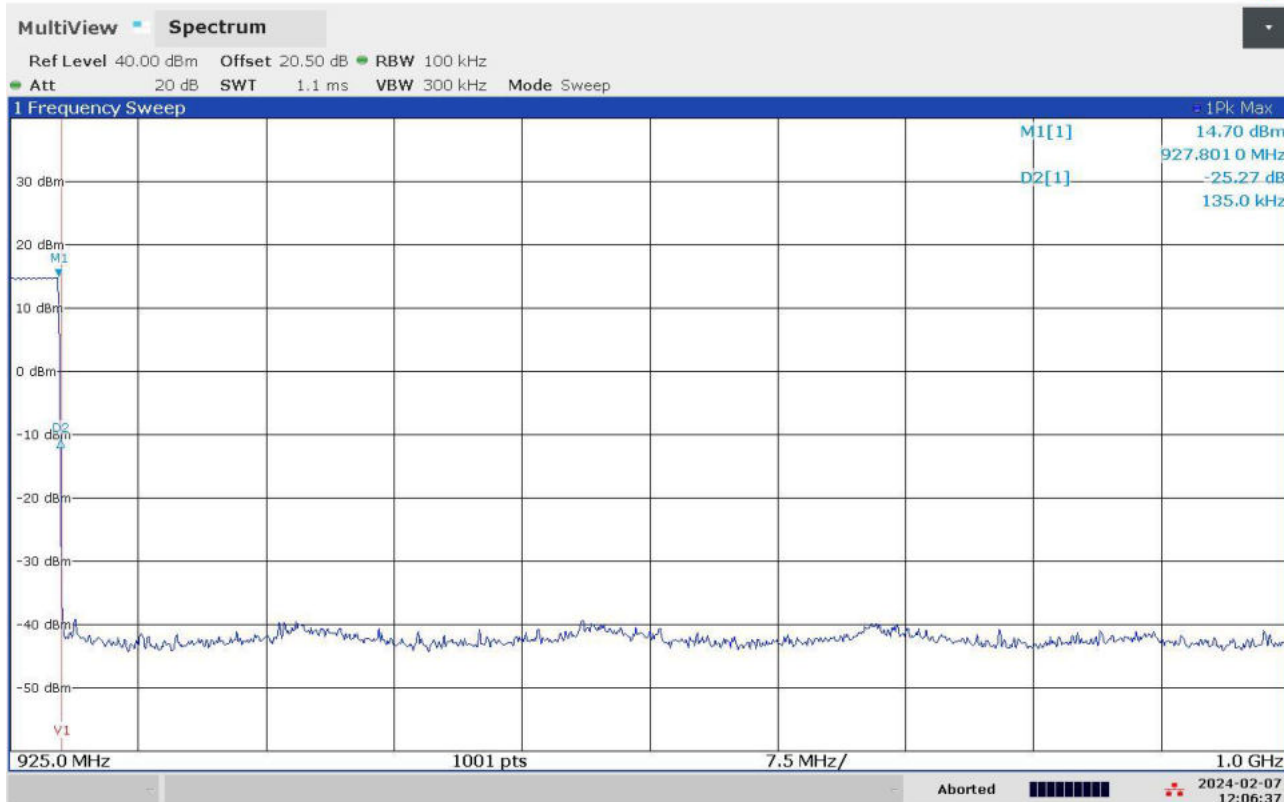

9.8 Peak Output Power


Tested by	G. Gandini
Test date	07.02.2024
Test location (stand)	Laboratory
Basic standard(s)	KDB 558074 D01 15.247 Meas Guidance v05r02 cl. 2.2 ANSI C63.10 cl. 7.8.5
Product standard(s)	FCC Rules and Regulation; Titles 47 Part. 15.247
Supplementary test set-up description	--
Supplementary information	--

Acceptance limits

For frequency hopping systems operating in the 2400–2483,5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483,5 MHz band: 0,125 watts.

For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and 0,25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels.

Test setup

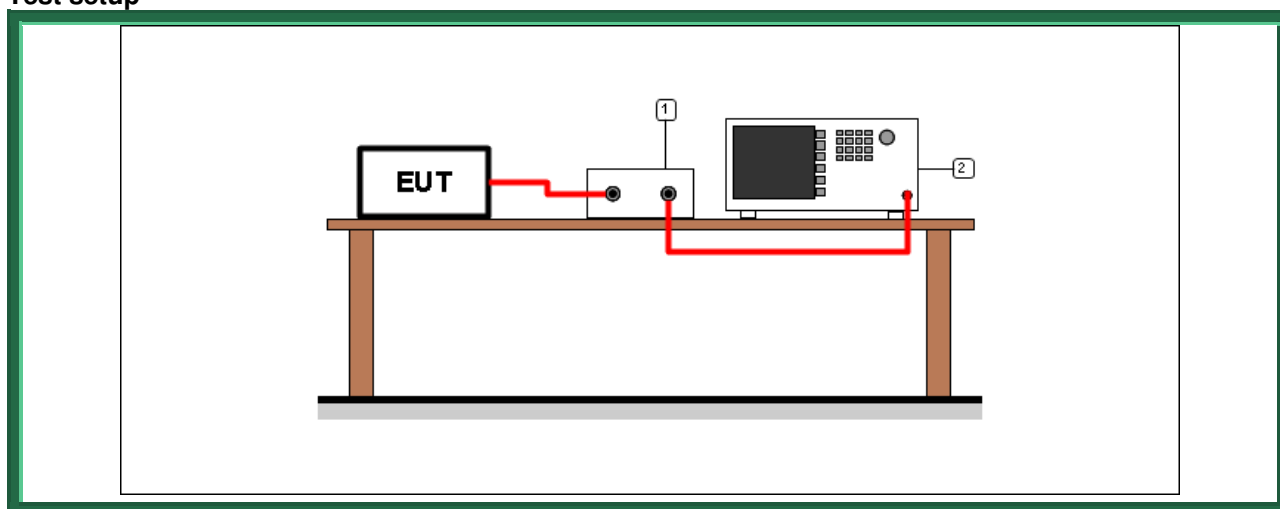


Test setup PR002_01							
Nr.	Id. Number	Manufacturer	Model	Serial number	Description	Last calibration date	Calibration expiration
2	CMC S295	Rohde & Schwarz	FSW43	104059	Spectrum Analyzer 43GHz	January 2023	January 2026
1	--	--	--	--	Cable + attenuator	Calibrated before the test	Calibrated before the test

Result


<i>Frequency (MHz)</i>	<i>Graphs</i>	<i>Peak Output Power (dBm)</i>	<i>Peak Output Power (mW)</i>	<i>Limit (mW)</i>
915,05	G23171622	14,97	31,41	1000
921,40	G23171625	14,89	30,83	1000
927,80	G23171628	14,80	30,20	1000

Graphs


Gandini 23171622

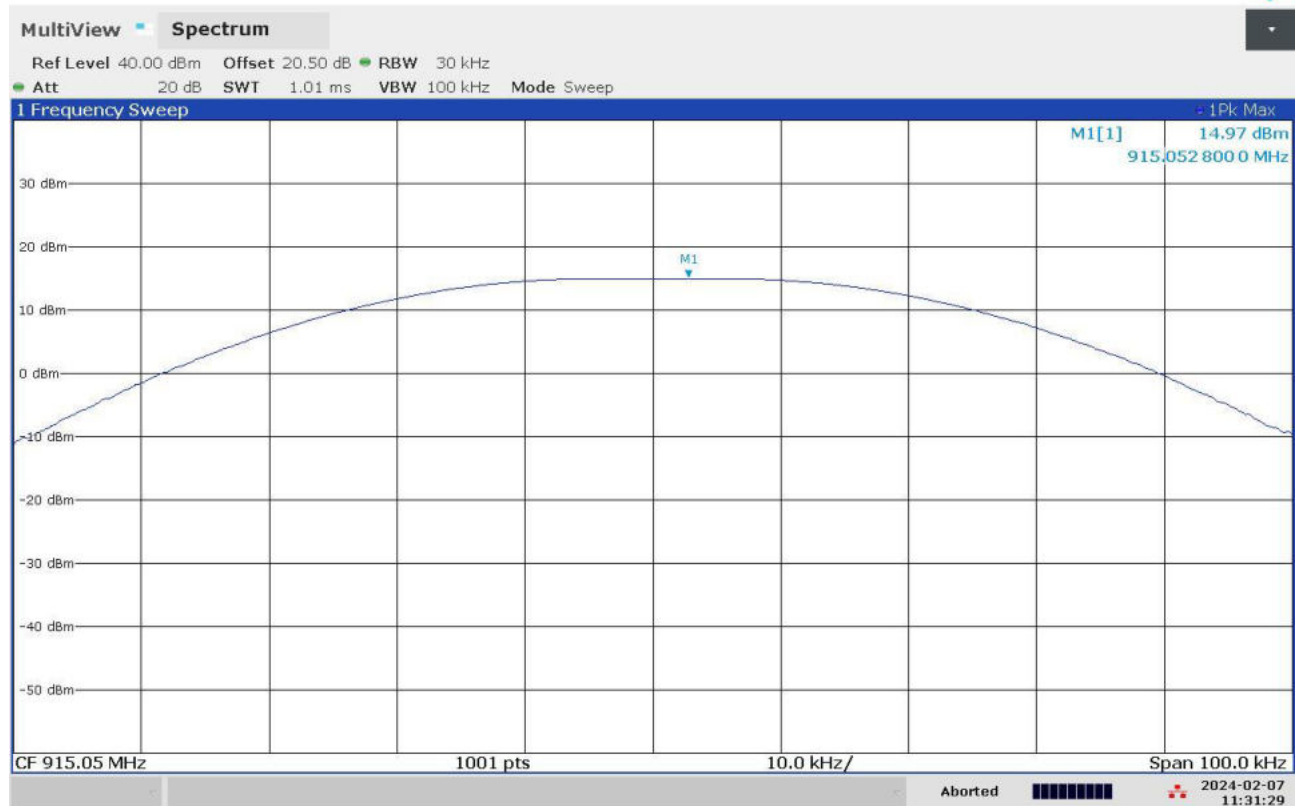

Gandini 23171625

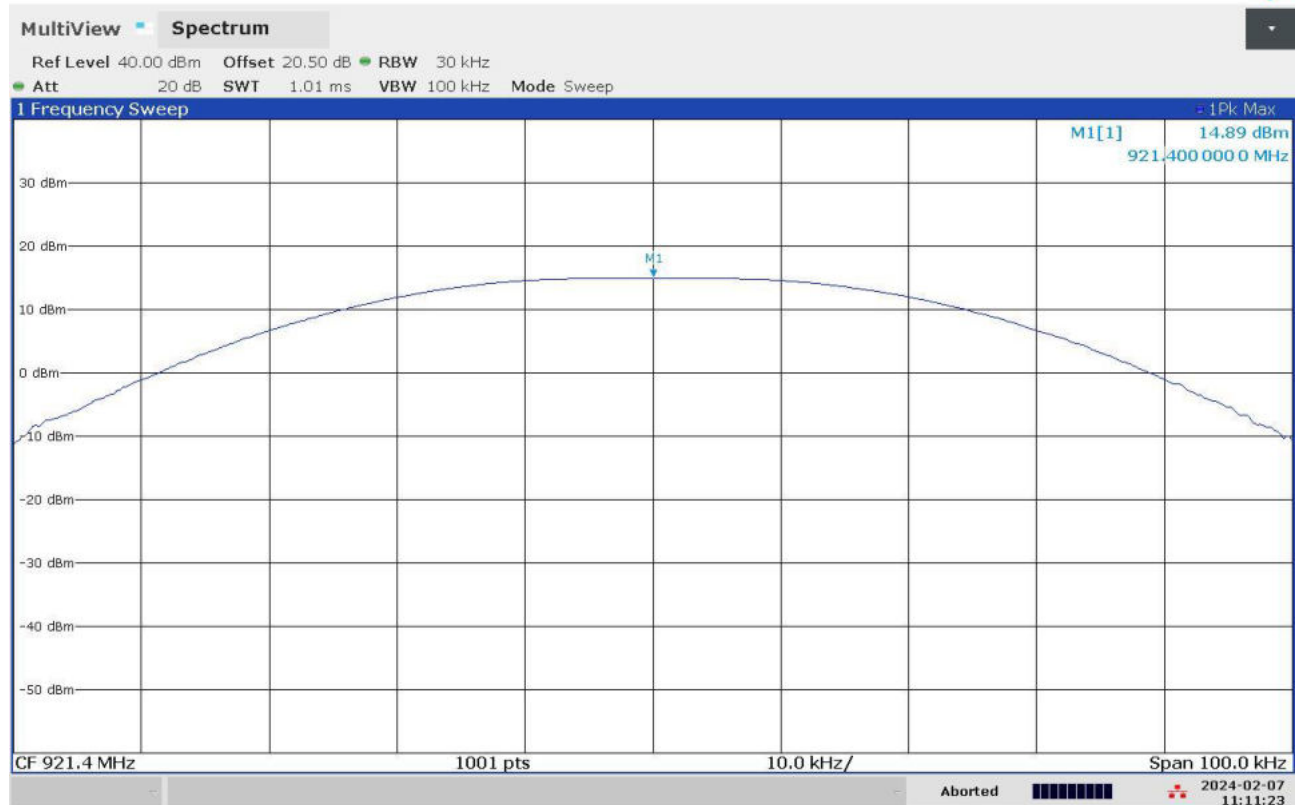

Gandini 23171628

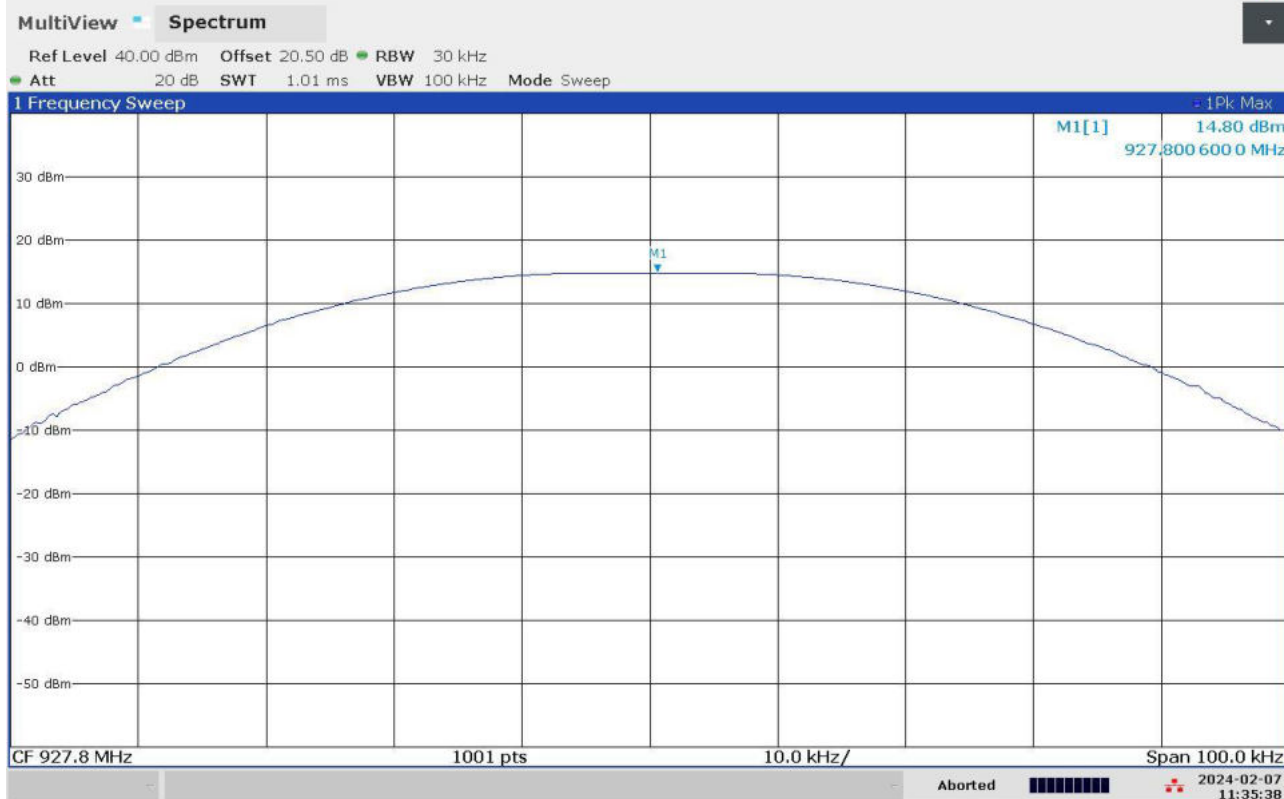

Attachment 1

Measurement uncertainty

Test	Test Setup	Expanded uncertainty			Note
Conducted emission CISPR 16 LISN 50uH 0,009-0,0150 MHz	PE001_01			3,6 dB	1
Conducted emission CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_01			2,9 dB	1
Conducted emission CISPR 16 Voltage Probe 0,15-30 MHz	PE001_02			2,3 dB	1
Conducted emission CISPR 16 Current Probe 0,15-30 MHz	PE001_03			2,5 dB	1
Conducted emission CISPR 16 ISN 0,15-30 MHz	PE001_04			4,7 dB	1
Clic CISPR 16 LISN 50uH 0,150-30,0 MHz	PE001_05			2,9 dB	1
Radiated Emission CDNE 30-300 MHz	PE001_06			3,3 dB	1
Disturbance Power 30-300 MHz	PE002_01			3,8 dB	1
Radiated Emission LAS 0,15-30 MHz	PE003_01			2,0 dB	1
Radiated Emission CISPR 16 Loop Ant. 0,15-30 MHz	PE004_01			4,1 dB	1
Radiated Emission CISPR 16 Bicon. Ant. 30-300 MHz	PE004_02			4,7 dB	1
Radiated Emission CISPR 16 LogP. Ant. 300-1000 MHz	PE004_03			4,6 dB	1
Radiated Emission CISPR 16 Horn Ant. 1-18 GHz	PE004_04			4,7 dB	1
Human Exposure to electromagnetic fields	PE005_01			14,2 %	1
Harmonics	PE006_01	10 mA	+	2,9 %	1
Flicker	PE007_01			3,40 %	1
Radiated Immunity 80 MHz - 6 GHz	PE102_XX	2,26 dB		0,89 V/m a 3V/m	1
Conducted Immunity 0,15 - 230 MHz	PE105_XX	1,26 dB		0,47 V a 3V	1
AC Magnetic field	PE106_01	1,55 %		0,15 A/m a 10A/m	1
Pulse Magnetic field	PE107_01	6,21 %		18,6 A/m a 300A/m	1
Dumped Magnetic field	PE108_01	6,21 %		1,86 A/m a 30A/m	1
Common mode conducted immunity	PE112_01	2,11 %		0,21 V a 10V	1

Attachment 1

Test	Test Setup	Expanded uncertainty	Note
Power/Spurious 9kHz-30MHz	PR001_01	4,1 dB	1
Power/Spurious ERP 30-1000MHz d=10m	PR001_02+03	4,8 dB	1
Misura della potenza EIRP 1-18GHz d=3m	PR001_04+05	4,7 dB	1
Misura della potenza EIRP 18-40GHz d=3m	PR001_06	5,1 dB	1
Frequency error	PR002_01+02	< 1x10 ⁻⁷	1
Timing zero span (1001pts.)	PR002_01+02	0,2 % SWT	1
Modulation bandwidth	PR002_01+02	< 1x10 ⁻⁷	1
Conducted RF power and spurious emission	PR002_01+02	1,1 dB	1
Adjacent channel power	PR002_01+02	1,1 dB	1
Blocking	PR002_01+02	1,1 dB	1

Test	Test Setup	Expanded uncertainty	Note
Electrostatic discharge immunity test	PE101_0X		2
Electrical fast transients / burst immunity test	PE103_0X		2
Surge immunity test	PE104_0X		2
Short interruption immunity test	PE109_01		2
Ring Wave immunity test	PE110_01		2
Low frequency immunity test	PE111_01		2
Dumped Oscillatory immunity test	PE113_01		2
Rev_24_01 date 03/02/2024			

Note 1:





The expanded uncertainty reported according to the document EA-4-02 is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of p = 95%

Note 2:

It has been demonstrated that the used test equipment meets the specified requirements in the standard with at least a 95% confidence, covering factor k=2

Attachment 1

Judgement of compliance

Case 1	Case 2	Case 3	Case 4
 The sample complies with the requirements. The measurement results is within the specification limit when the measurement uncertainty is taken into account.	 The sample complies with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty although the measurement result is below the limit.	 The sample does not comply with the requirements. It is not possible to state compliance using a 95% coverage probability for the expanded uncertainty also the measurement result is upper the limit.	 The sample does not comply with the requirements. The measurement results is outside the specification limit when the measurement uncertainty is taken into account.

In agreement with ILAC-G8:09/2019 cl.4.2.1 Guidelines on Decision Rules and Statements of Conformity

Quality manual references – Internal procedure

Internal Procedure PM001 rev. 4.0 (Quality Manual)	Measure procedure
Internal Procedure INC_M rev. 10.0 (Quality Manual)	Measurement uncertainty calculation