

Test Report
FOR
FCC Part 15 Subpart C & E

of

Notebook Personal Computer
(with Pro/Wireless 2100A LAN 3B MiniPCI Adapter & Ambit Bluetooth Wireless
Card T60M665 inside)

Model

TravelMate C300

(Brand: acer)

Applied by:

Wistron Corporation

21F, 88, Sec.1, Hsin Tai Wu Rd.,
Hsichih, Taipei Hsien 221,
Taiwan, R.O.C.



Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-03LR030FC

Test Date: 2003/12/19

NVLAP Lab. Code: 200234-0; VCCI: R-1435, C-1440; NEMKO Aut. No: ELA 113; BSMI Lab. Code: SL2-IN-E-0013

Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data.....	1
2.	Test Results Summary.....	2
3.	Description of Equipment Under Test (EUT).....	3
3.1	Test Standards and Procedure	6
3.2	General Test Conditions	6
4.	TEST RESULTS (802.11b).....	7
4.1	Powerline Conducted Emissions [Section 15.207]	7
4.1.1	EUT Configuration.....	7
4.1.2	Test Procedure	7
4.1.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	7
4.1.4	Test Data:.....	8
4.2	Bandwidth for DSSS [Section 15.247 (a)(2)].....	10
4.2.1	Test Procedure	10
4.2.2	Test Setup	10
4.2.3	Test Data.....	10
4.3	DSSS Maximum Peak Output Power [Section 15.247 (b)(1)].....	13
4.3.1	Test Procedure	13
4.3.2	Test Setup	13
4.3.3	Test Data:.....	13
4.4	Radiated Emission Measurement [Section [15.247(c)(4)]	14
4.4.1	EUT Configuration.....	14
4.4.2	Test Procedure	14
4.4.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	14
4.4.4	Test Data (30MHz – 1GHz) :.....	15
4.4.5	Test Data	16
4.5	Band Edge Measurement	19
4.5.1	Test Procedure (Conducted).....	19
4.5.2	Test Setup (Conducted).....	19
4.5.3	Test Data:.....	19
4.5.4	Band Edge measurement Test Procedure (Radiated).....	21
4.5.5	Test Setup (Radiated)	21
4.5.6	Test Data:.....	22
4.6	RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)].....	25
4.7	DSSS Peak Power Spectral Density [Section 15.247(d)]	26
4.7.1	Test Procedure	26
4.7.2	Test Setup	26
4.7.3	Test Data:.....	26
5.	TEST RESULTS (802.11a).....	29
5.1	Maximum Peak Output Power [Section 15.407 (a)(1)(2)(3)].....	29
5.1.1	Test Procedure	29
5.1.2	Test Setup	29
5.1.3	Test Data: (Normal Mode).....	29
5.2	Peak Power Spectral Density [Section 15.407(a)(1)(2)(3)]	32

5.2.1	Test Procedure	32
5.2.2	Test Setup	32
5.2.3	Test Data: (Normal Mode).....	32
5.3	Peak Power Excursion Measurement [Section 15.407(a)(6)].....	35
5.3.1	Test Procedure	35
5.3.2	Test Setup	35
5.3.3	Test Data: (Normal Mode).....	35
5.4	Powerline Conducted Emissions [Section 15.207 & 15.407 (b)(5)].....	38
5.4.1	EUT Configuration.....	38
5.4.2	Test Procedure	38
5.4.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	38
5.4.4	Test Data:.....	39
5.5	Radiated Emission Measurement [Section 15.209 & 15.407(b)(5)]	41
5.5.1	EUT Configuration.....	41
5.5.2	Test Procedure	41
5.5.3	EMI Receiver/Spectrum Analyzer Configuration.....	41
5.5.4	Test Data (30MHz – 1GHz)	42
5.5.5	Test Data (1GHz – 40 GHz, Transmitting)	43
5.6	Band Edge Measurement (Section 15.407 (b) (1) (2)).....	47
5.6.1	Test Procedure (Conducted).....	47
5.6.2	Test Setup (Conducted).....	47
5.6.3	Test Data (conducted):.....	47
5.6.4	Bandedge Measurement Test Procedure (Radiated).....	49
5.6.5	Test Setup (Radiated)	50
5.6.6	Test Data (Radiated):.....	51
5.7	RF Exposure Measurement [Section 15.407(f)(4) & 1.1307(b)]......	54
	Refer to SAR Test Report.....	54
5.8	Frequency Stability [Section 15.407(g)]	55
5.8.1	Limits of Frequency Stability Measurement	55
5.8.2	Test Procedure	55
5.8.3	Test Setup	55
5.8.4	Test Data.....	56
6.	TEST RESULTS (Bluetooth)	57
6.1	Maximum Peak Output Power [Section 15.247 (b)(1)]	57
6.1.1	Test Procedure	57
6.1.2	Test Setup	57
6.1.3	Test Data:.....	57
6.2	Radiated Emission Measurement [Section [15.247(c)(4)]	58
6.2.1	EUT Configuration.....	58
6.2.2	Test Procedure	58
6.2.3	EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested).....	58
6.2.4	Test Data (above 1GHz) :	59
6.3	Band Edge Measurement (when Bluetooth and WLAN are operating at the same time). 60	
6.3.1	Band Edge measurement Test Procedure (Radiated).....	60
6.3.2	Test Setup (Radiated)	60
6.3.3	Test Data:.....	61

7.	Appendix.....	64
7.1	Appendix A: Measurement Procedure for Power line Conducted Emissions	64
7.2	Appendix B: Test Procedure for Radiated Emissions.....	65
7.3	Appendix C: Test Equipment.....	66
7.3.1	Test Equipment List.....	66
7.3.2	Software for Controlling Spectrum/Receiver and Calculating Test Data.....	67
7.4	Appendix D: Layout of EUT and Support Equipment.....	68
7.4.1	General Conducted Test Configuration	68
7.4.2	General Radiation Test Configuration.....	69
7.5	Appendix E: Description of Support Equipment	70
7.5.1	Description of Support Equipment	70
7.5.2	Software for Controlling Support Unit.....	70
7.5.3	I/O Cable Condition of EUT and Support Units.....	71
7.6	Appendix F: Accuracy of Measurement.....	72
7.7	Appendix G: Photographs of EUT Configuration Test Set Up	74
7.8	Appendix H: Antenna Spec.....	76

1. . General

1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the test procedure specified in CFR 47 Part 15 Subpart C (Section 15.247), Subpart E (15.407) , and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

Equipment Tested: Notebook Personal Computer
(with Pro/Wireless 2100A LAN 3B MiniPCI Adapter &
Ambit Bluetooth Wireless Card T60M665 inside)
Model:TravelMate C300
Applied by Wistron Corporation

Sample received Date: 2003/11/05

Final test Date : 2003/12/19

Test Site: Chamber 02, Conduction 02

Temperature 20°C(Conduction Test); 22°C (Radiation Test)

Humidity: 50% (Conduction Test); 51% (Radiation Test)

Test Engineer: Jerry Chiou

The results show that the sample equipment tested as described in this report is in compliance with the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B, and the limit of Part Subpart C Sec. 15.247; and the limits of FCC Part 15 Subpart E (Section 15.407).

Approve & Signature

Eddy Hsiung

Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 80 pages, including 1 cover page, 3 contents page, and 76 pages for the test description. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard.
International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b and 802.11g functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	SAR report attached
15.247 (d)	Power Spectral Density	Pass	

The 802.11a functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart E			
Standard Section	Test Type	Result	Remarks
15.407 (a)(1)(2)(3)	Peak Transmit Power	Pass	
15.407 (a)(1)(2)(3)	Peak Power Spectral Density	Pass	
15.407 (a)(6)	Peak Power Excursion	Pass	
15.407 (b)(5)	AC Power Line Emissions	Pass	
15.407 (b)(5)	Radiated Emissions 30MHz – 40 GHz	Pass	
15.407(f)	Radiation exposure	Pass	SAR report attached
15.407 (g)	Frequency Stability	Pass	

The Bluetooth of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C	
Please see the bluetooth test report	

3. Description of Equipment Under Test (EUT)

Description:	Notebook Personal Computer (with Intel Pro/Wireless 2100A LAN 3B MiniPCI Adapter & Ambit Bluetooth Wireless Card T60M665 inside)
Model No.:	TravelMate C300
FCC ID:	PU5MS2140AB
Brand:	acer
Wireless LAN Module:	Intel, Model: WM3B2100A
Bluetooth Wireless Card:	Ambit, Model: T60M665
Frequency Range of 802.11a:	5180 - 5320 MHz
Frequency Range of 802.11b:	2412 - 2462 MHz
Frequency Range of bluetooth:	2402 - 2480 MHz
Support channel:	
802.11a Normal mode	8 Channels
802.11b	11 Channels
bluetooth	79 Channels
Modulation Skill:	
802.11a Normal mode	OFDM (6 Mbps – 54 Mbps)
802.11b	DBPSK(1Mbps), DQPSK(2Mbps), CCK(5.5/11Mbps)
bluetooth	GFSK
Antennas Type:	PIFA Type made by Hannatar
Antenna Connected:	Connected to RF connector on the PCB of the 802.11a/b WLAN Adapter and bluetooth card. The user is not possible to change the antenna without disassembling the notebook computer.
Antenna peak Gain:	
Main antenna	2.42 dBi (11b), -0.09 dBi(11a)
Aux antenna	0.91 dBi (11b), 0.60 dBi(11a)
Bluetooth antenna	-0.268dBi
Power Type of wireless module:	3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The channel and the operation frequency of 802.11a Normal Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5180	02	5200
03	5220	04	5240
05	5260	06	5280
07	5300	08	5320

The channel and the operation frequency of bluetooth is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	01	2403
02	2404	03	2405
.....			
.....			
77	2479	78	2480

The notebook with this bluetooth card have been tested and granted , the FCC ID is MCLT60M665, please see the attached report R0301173 & R0309231.

In this report about bluetooth, we will show the peak output power of the bluetooth card. Then, the Radiated Emission above1GHz and the Radiated Band-Edge are also shown when the bluetooth device is co-located with the WLAN device.

Adapter Type:

Liteon 70W(Model:PA-1700-02) 3pins

SDRAM:

Nanya 128MB

(Model: NT128D64SH4BBGM-6K) or

Infineon 256MB

(Model: HYS64D32020GDL-6-B) or

Nanya 256MB

(Model: NT256D64SH8BAGM-6K) or

Elpida 256MB

(Model: W30256AAEP1652A) or

Micron 256MB

(Model: MT8VDDT3264HDG-335C3) or

Infineon 512MB

(Model: HYS64D64020GBDL-6-B) or

Elpida 512MB

(Model: EBD52UC8AARA6B) or

Micron 512MB

(Model: MT16VDDF6464HG-335C2)

Hard Disk Driver:	HGST 20G (Model: IC25N020ATMR04-0) or HGST 30G (Model: IC25N030ATMR04-0) or HGST 40G (Model: IC25N040ATMR04-0) or HGST 60G (Model: IC25N060ATMR04-0) or HGST 80G (Model: IC25N080ATMR04-0) or Toshiba 30GB (Model: MK3021GAS) or Toshiba 40GB (Model: MK4021GAS) or Toshiba 60GB (Model: MK6021GAS)
DVD-ROM:	MKE (Model: SR-8177-BAA3) or Liteon (Model: XJ-SD081D)
CD-ROM:	Mitsumi (Model: SR244W1 A6) or
Combo:	Sony (Model: CRX-830) or QSI (Model: SBW-242U) or Pioneer (Model: DVR-K12D)
FDD Driver:	Y-E Data (Model: YD-8U10) (Optional module)
Modem Module:	Ambit (Model: T60M283.10) or
Battery:	Sanyo 8 cell Li+ (Model: BTP-63D1)
Power In Port:	one
USB Port:	two 4-pin (USB 2.0)
VGA Port:	one
TV-Out Port	one
1394 Connector:	one 4-pin
Line Out Port:	one
Line In Port:	one
LAN Connector:	one 8-pin (10Mbps/100Mbps)
Modem Connector:	one
PCMCIA:	one
Mini-PCI:	one
Port Replicator:	one 100-pin
Power Cord:	Shielded
LCD:	CMO 14.1" XGA (Model: CHIME/N141X9-L01) or AU 14.1" XGA (Model: B141XG08)

3.1 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart E (Section 15.407) and/or CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247, Sec. 15.407 as detailed in Appendices

3.2 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of 802.11b of EUT were all tested.
3. The channel 1, 4, 5, 8 of Normal Mode of 802.11a were also all tested.
4. "Normal mode" of 802.11a allows data rates up to 54 Mbps. The EUT was tested in the data rate that produced the highest output power (6 Mbps)
5. Both Main antenna and Aux antenna of EUT are able to be used as the Transmitting Antenna. Both antennas have been tested respectively, and the worst data is showed in the report.

4. TEST RESULTS (802.11b)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150 KHz--30MHz
Detector Function:	Quasi-Peak/Average
Bandwidth (RBW):	9KHz

4.1.4 Test Data:

Table Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.4176	0.10	0.03	30.87	58.35	-27.49	24.66	48.35	-23.69
0.6327	0.14	0.04	30.71	56.00	-25.29	26.75	46.00	-19.25
0.63578	0.14	0.04	30.12	56.00	-25.88	25.63	46.00	-20.37
0.77348	0.16	0.05	26.01	56.00	-29.99	18.61	46.00	-27.39
0.88971	0.18	0.06	21.27	56.00	-34.73	1.49	46.00	-44.51
2.32323	0.22	0.10	31.09	56.00	-24.91	26.28	46.00	-19.72
2.60597	0.23	0.11	32.23	56.00	-23.77	25.92	46.00	-20.08
2.67224	0.23	0.11	30.66	56.00	-25.34	23.75	46.00	-22.25
2.81536	0.24	0.11	33.78	56.00	-22.22	26.46	46.00	-19.54
3.02623	0.25	0.11	29.16	56.00	-26.84	24.63	46.00	-21.37


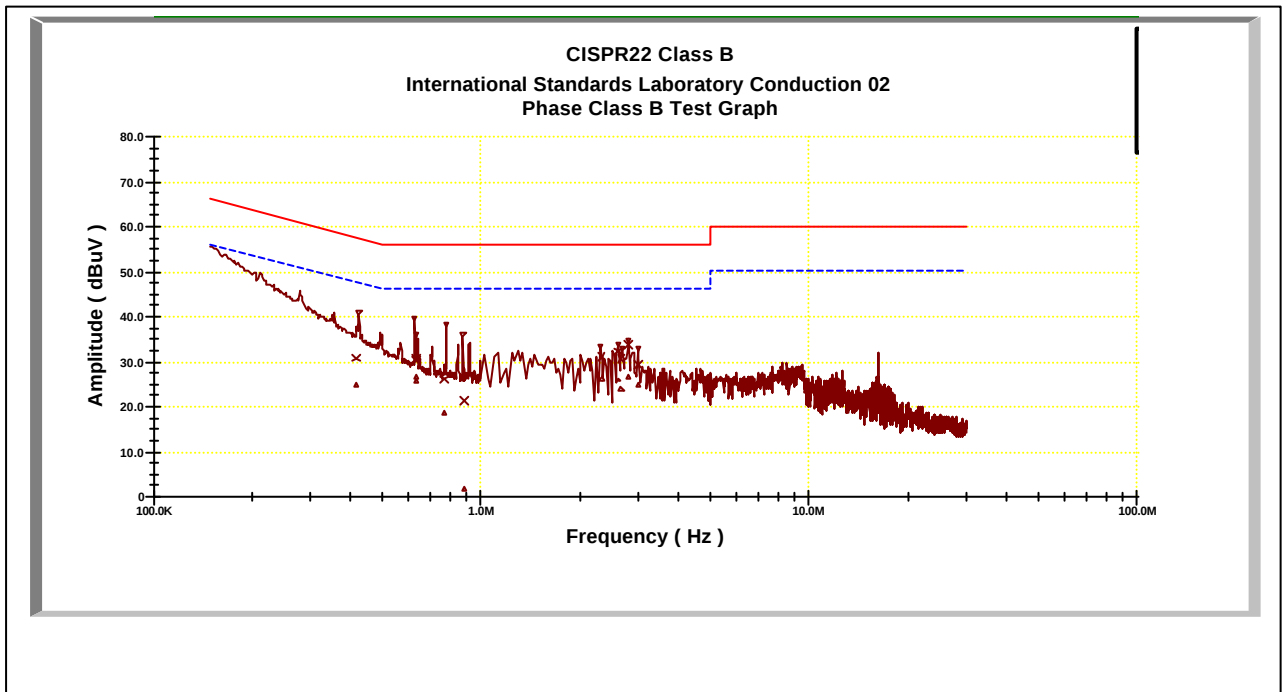


Table Power Line Conducted Emissions (Neutral) Channel 1, 6, 11

Frequency (MHz)	Corrective Factor		Quasi-Peak			Average		
	LISN Loss (dB)	Cable Loss (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
0.36185	0.10	0.02	31.18	59.95	-28.76	12.66	49.95	-37.28
0.4232	0.10	0.03	34.63	58.19	-23.56	31.17	48.19	-17.02
0.59751	0.13	0.04	24.73	56.00	-31.27	4.74	46.00	-41.26
0.63513	0.14	0.04	31.07	56.00	-24.93	27.55	46.00	-18.45
0.91466	0.19	0.06	30.45	56.00	-25.55	26.95	46.00	-19.05
1.04974	0.30	0.07	23.89	56.00	-32.11	14.33	46.00	-31.67
1.08999	0.29	0.07	22.99	56.00	-33.01	6.59	46.00	-39.41
2.39521	0.20	0.10	30.98	56.00	-25.02	26.19	46.00	-19.81
2.67711	0.20	0.11	31.66	56.00	-24.34	24.21	46.00	-21.79
2.81747	0.20	0.11	32.21	56.00	-23.79	23.24	46.00	-22.76

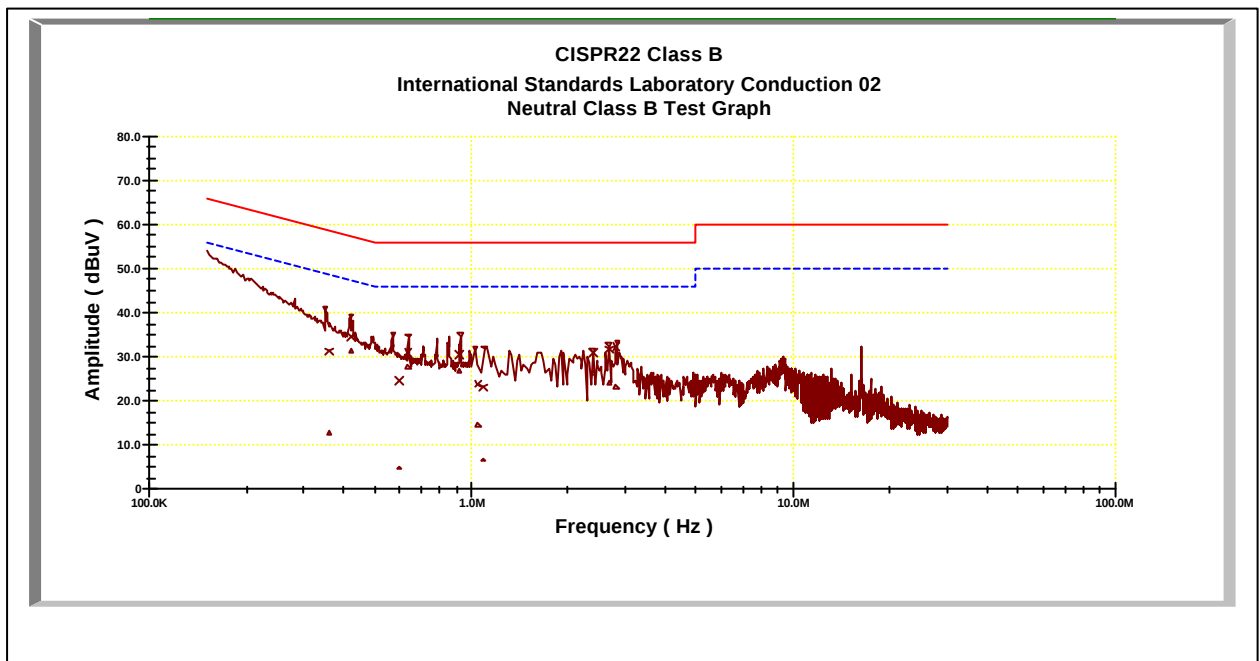

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1 , 6, 11 to get the maximum reading of all these channels .
 Margin = Amplitude + Insertion Loss- Limit
 A margin of -8dB means that the emission is 8dB below the limit


4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 RBW: 100KHz
 VBW: 100KHz

4.2.2 Test Setup

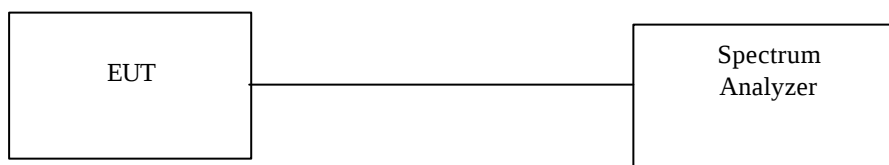


4.2.3 Test Data


Table 6dB Bandwidth

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	12	0.5	Pass
6	2437	12	0.5	Pass
11	2462	12	0.5	Pass


Channel1:

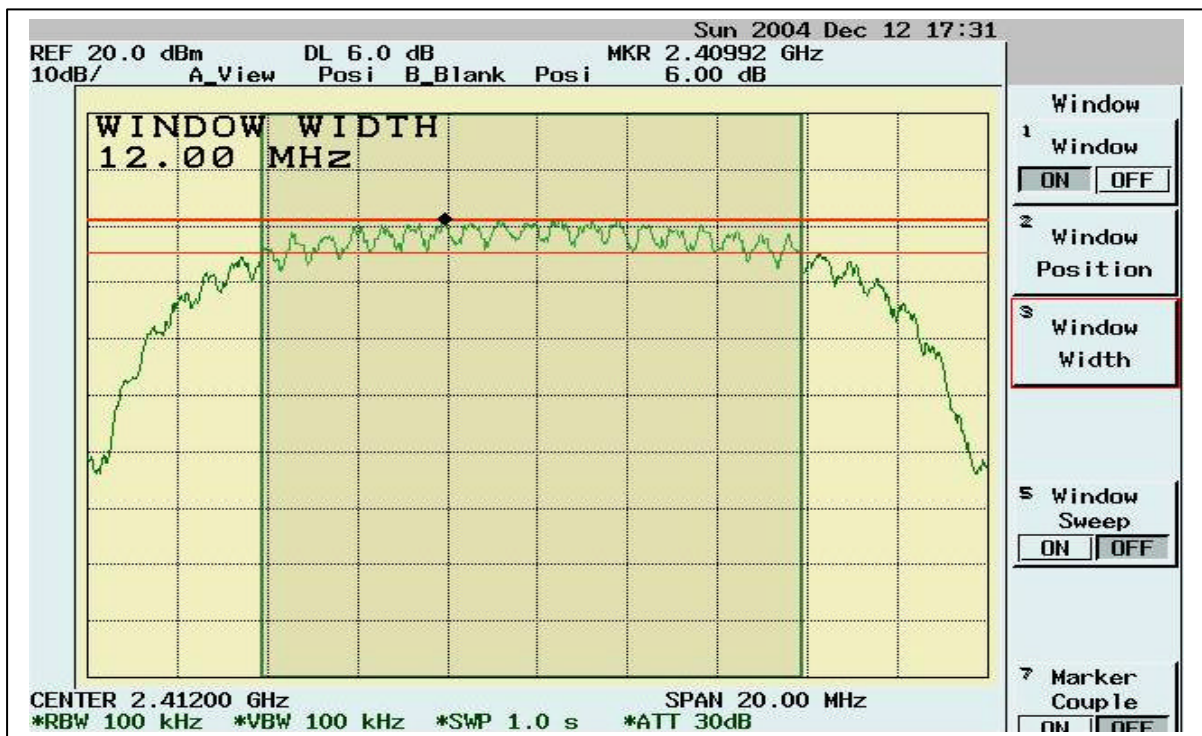

Channel6:

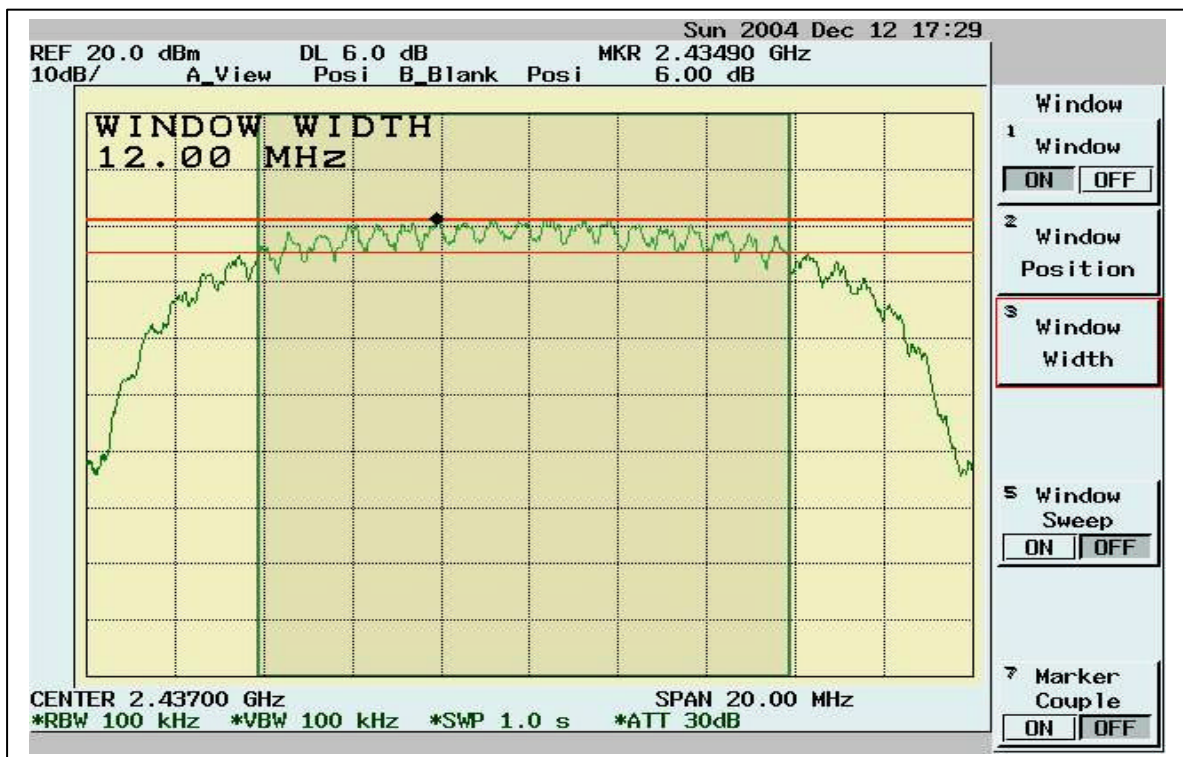

Channel11:

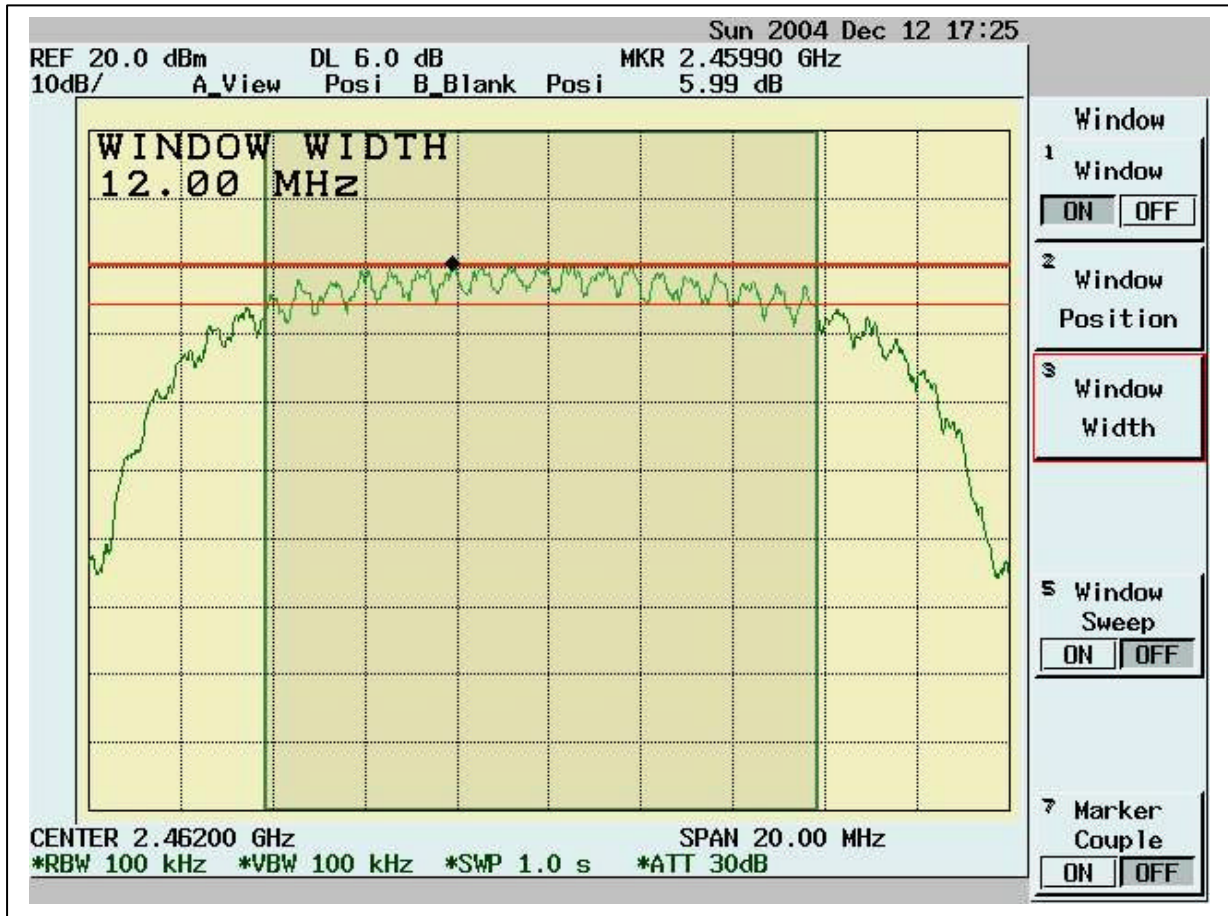

4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer.

4.3.2 Test Setup



4.3.3 Test Data:

Table Maximum Peak Output Power

Chennel	Frequency (MHz)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	56.467	17.518	30	Pass
6	2437	56.221	17.499	30	Pass
11	2462	45.321	16.562	30	Pass

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies, the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	1MHz
Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz) :.**30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11**

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
42.61	16.84	11.04	1.76	0.00	29.64	40.00	-10.36	100.00	72.00
333.61	13.31	13.54	4.78	0.00	31.63	46.00	-14.37	150.00	23.00
431.58	11.12	15.85	5.39	0.00	32.36	46.00	-13.64	150.00	88.00
455.83	12.57	16.13	5.52	0.00	34.22	46.00	-11.78	100.00	250.00
719.67	6.53	19.18	6.86	0.00	32.57	46.00	-13.43	200.00	169.00
815.7	12.88	19.86	7.34	0.00	40.08	46.00	-5.92	200.00	169.00
833.16	3.78	19.93	7.40	0.00	31.11	46.00	-14.89	200.00	217.00
864.2	3.91	20.06	7.50	0.00	31.47	46.00	-14.53	100.00	284.00
911.73	14.12	20.27	7.72	0.00	42.10	46.00	-3.90	100.00	234.00
944.71	3.03	20.47	7.83	0.00	31.33	46.00	-14.67	150.00	349.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
106.63	15.59	11.20	2.74	0.00	29.52	43.50	-13.98	100.00	253.00
194.9	18.29	8.75	3.72	0.00	30.76	43.50	-12.74	100.00	156.00
431.58	10.87	15.85	5.39	0.00	32.11	46.00	-13.89	100.00	352.00
455.83	17.40	16.13	5.52	0.00	39.05	46.00	-6.95	100.00	285.00
497.54	10.04	17.05	5.77	0.00	32.86	46.00	-13.14	200.00	301.00
601.33	7.91	18.31	6.33	0.00	32.55	46.00	-13.45	100.00	285.00
635.28	7.54	18.58	6.48	0.00	32.60	46.00	-13.40	250.00	320.00
719.67	8.15	19.18	6.86	0.00	34.18	46.00	-11.82	150.00	320.00
815.7	10.01	19.86	7.34	0.00	37.21	46.00	-8.79	100.00	220.00
911.73	14.11	20.27	7.72	0.00	42.10	46.00	-3.90	100.00	139.00

* NOTE:

During the test, the EUT was set to Channel 1, 6, 11 respectively to get the maximum reading of all the critical emission frequencies.

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data .

1GHz~ 25 GHz (Horizontal), Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
3326.67	43.16	31.19	1.46	46.63	29.18	54.00	-24.82	110	110
7130.87	43.54	39.84	2.34	46.25	39.47	54.00	-14.53	100	183
7895.10	29.98	40.82	2.48	44.24	29.05	54.00	-24.95	100	275
10816.2	26.38	40.10	2.93	40.63	28.79	54.00	-25.21	102	112
11393.6	25.44	42.00	3.01	41.36	29.08	54.00	-24.92	100	193
14688.3	30.31	44.22	3.43	42.34	35.63	54.00	-18.37	105	226

1GHz~ 25 GHz (Vertical), , Channel 1 : 2412 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Am pl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
7130.87	42.20	39.84	2.34	46.25	38.13	54.00	-15.87	105	110
7453.55	37.73	39.46	2.40	46.11	33.47	54.00	-20.53	100	129
7691.31	35.09	40.09	2.44	45.19	32.43	54.00	-21.57	100	138
7878.12	33.55	40.76	2.48	44.32	32.46	54.00	-21.54	100	112
14688.3	31.79	44.22	3.43	42.34	37.11	54.00	-16.89	101	200
15299.7	26.61	43.12	3.50	43.26	29.96	54.00	-24.04	100	191

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -
Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), , Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Am pl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Position (°)
7147.85	42.57	39.82	2.35	46.24	38.49	54.00	-15.51	100	123
7589.41	37.28	39.72	2.43	45.67	33.76	54.00	-20.24	100	184
7878.12	33.43	40.76	2.48	44.32	32.35	54.00	-21.65	103	122
7963.04	31.65	41.07	2.49	43.92	31.28	54.00	-22.72	101	192
14688.3	30.88	44.22	3.43	42.34	36.20	54.00	-17.80	100	205
15656.3	27.23	43.30	3.53	42.27	31.80	54.00	-22.20	100	246

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin*	Height (cm)	Position (°)
7130.87	41.91	39.84	2.34	46.25	37.84	54.00	-16.16	100	115
7538.46	35.22	39.54	2.42	45.91	31.26	54.00	-22.74	100	294
7912.09	30.20	40.88	2.48	44.16	29.40	54.00	-24.60	105	198
11427.6	25.63	42.12	3.02	41.43	29.34	54.00	-24.66	100	289
14688.3	31.01	44.22	3.43	42.34	36.33	54.00	-17.67	101	121
15333.7	26.09	43.07	3.50	43.18	29.47	54.00	-24.53	100	305

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss -

Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
7147.85	42.27	39.82	2.35	46.24	38.19	54.00	-15.81	103	108
11427.6	26.13	42.12	3.02	41.43	29.83	54.00	-24.17	100	292
13618.4	26.13	42.14	3.31	42.00	29.57	54.00	-24.43	105	148
14688.3	32.42	44.22	3.43	42.34	37.74	54.00	-16.26	100	283
15248.8	26.15	43.20	3.49	43.38	29.46	54.00	-24.54	101	205
15707.3	26.38	43.46	3.54	42.10	31.28	54.00	-22.72	100	103

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Meter Reading		Correction Factor			Corrected Emissions			Antenna	Turntable
Freq. (MHz)	Ampl. (dBuV)	Ant. (dB/m)	Cable (dB)	Pre-Ampl. (dB)	Ampl. (dBuV/m)	Limit (dBuV/m)	Margin* (dB)	Height (cm)	Position (°)
7130.87	42.00	39.84	2.34	46.25	37.93	54.00	-16.07	100	345
11410.6	25.75	42.06	3.01	41.40	29.43	54.00	-24.57	100	114
14127.9	27.01	43.33	3.37	42.52	31.20	54.00	-22.80	100	38
14688.3	30.62	44.22	3.43	42.34	35.93	54.00	-18.07	100	99
15333.7	26.19	43.07	3.50	43.18	29.57	54.00	-24.43	101	344
15690.3	27.05	43.41	3.54	42.16	31.84	54.00	-22.16	100	135

Note:

The Spectrum noise level + Correction Factor < Limit - 6 dB

Margin = Corrected Amplitude – Limit

Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit


All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
Sweep time= 200ms sec.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

4.5.2 Test Setup (Conducted)

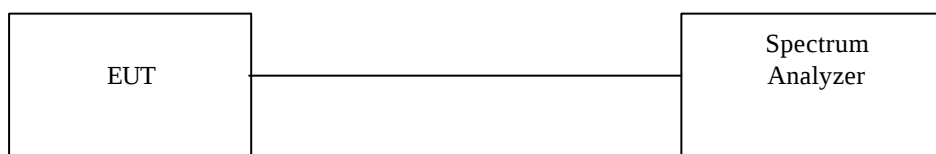

4.5.3 Test Data:

Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2409.9	108.48	---	---
Outside band	2396.9	69.34	39.14	Pass
11	2459.9	107.26	---	---
Outside band	2474.8	65.52	41.74	Pass

.

Band Edge Conducted measurement



Band Edge Conducted Measurement



4.5.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data:**Band Edge measurement (Radiated)**

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
1(peak mode)	2412.1	62.12	31.67	93.79	---	---	1MHz	---
Outside band	2395.8	23.00	31.67	54.67	39.12	---	1MHz	Pass
1(average mode)	2412.4	51.62	31.67	83.29	---	---	10Hz	---
Restricted band	2390.0	4.91	31.67	36.58	-----	54	10Hz	Pass
11(peak mode)	2463.2	61.27	31.64	92.91	----	---	1MHz	---
Outside band	2478.0	21.64	31.64	53.28	39.63	---	1MHz	Pass
11(average mode)	2462.5	51.24	31.64	82.88	----	---	10Hz	---
Restricted band	2483.8	4.64	31.64	36.28	-----	54	10Hz	Pass

Note: The Spectrum plot of emission level measurement in Restricted band is attached.

Emission Level = Spectrum Reading + Correction Factor

Correction Factor = Antenna Factor + cable loss – amplifier gain


**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 1)**



**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 1)**



**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Peak Mode (Channel 11)**

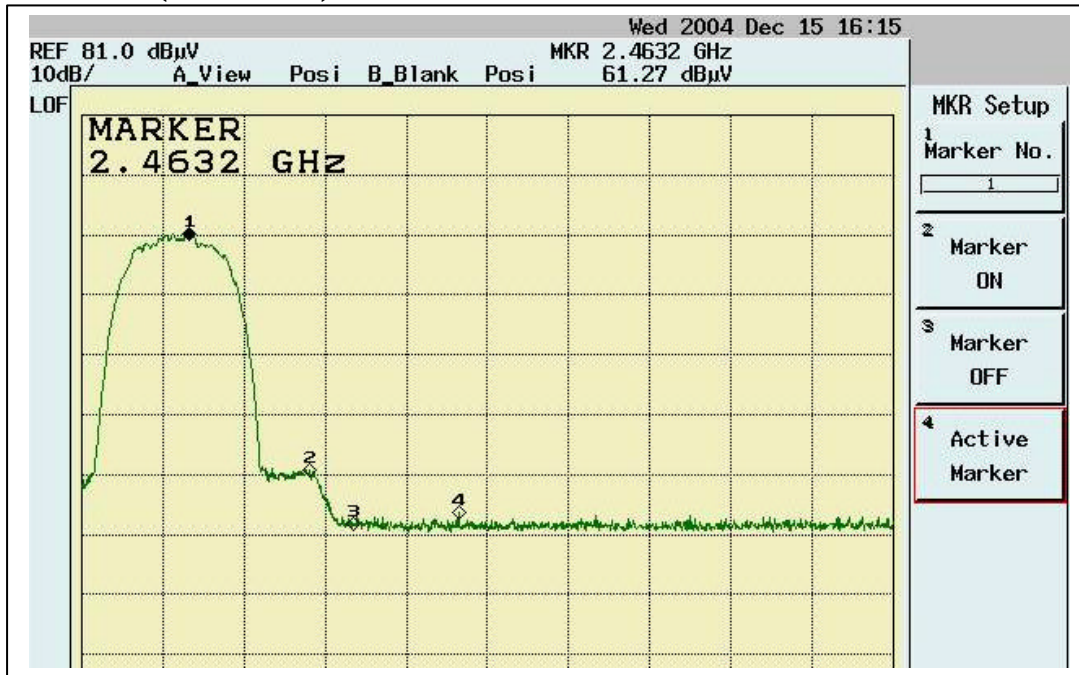

**Band Edge measurement for radiated emission in Restricted Band(Radiated)
Average Mode (Channel 11)**



4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

Refer to SAR Test Report attached

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.7.2 Test Setup




4.7.3 Test Data:


Maximum Peak Output Power Density

Chennel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-6.67	1.09	-5.58	8	Pass
6	2437	-7.02	1.09	-5.93	8	Pass
11	2462	-7.91	1.09	-6.82	8	Pass


Channel 1

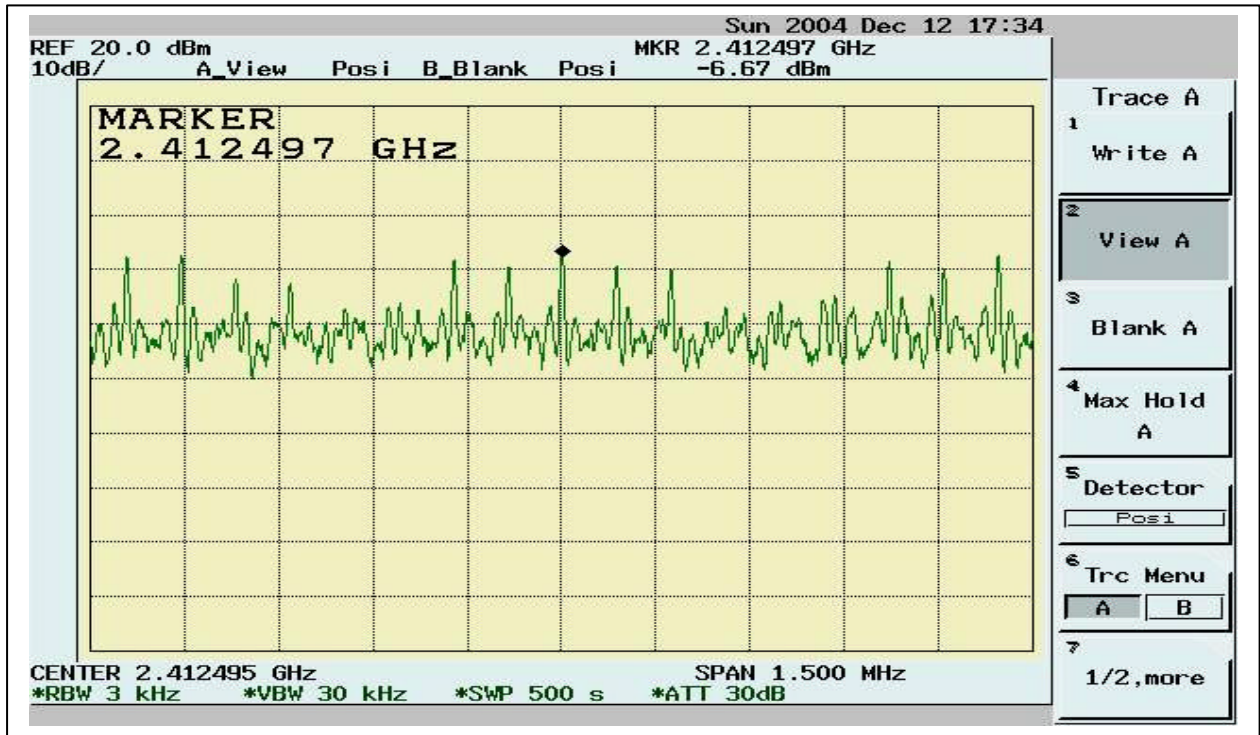

Channel6

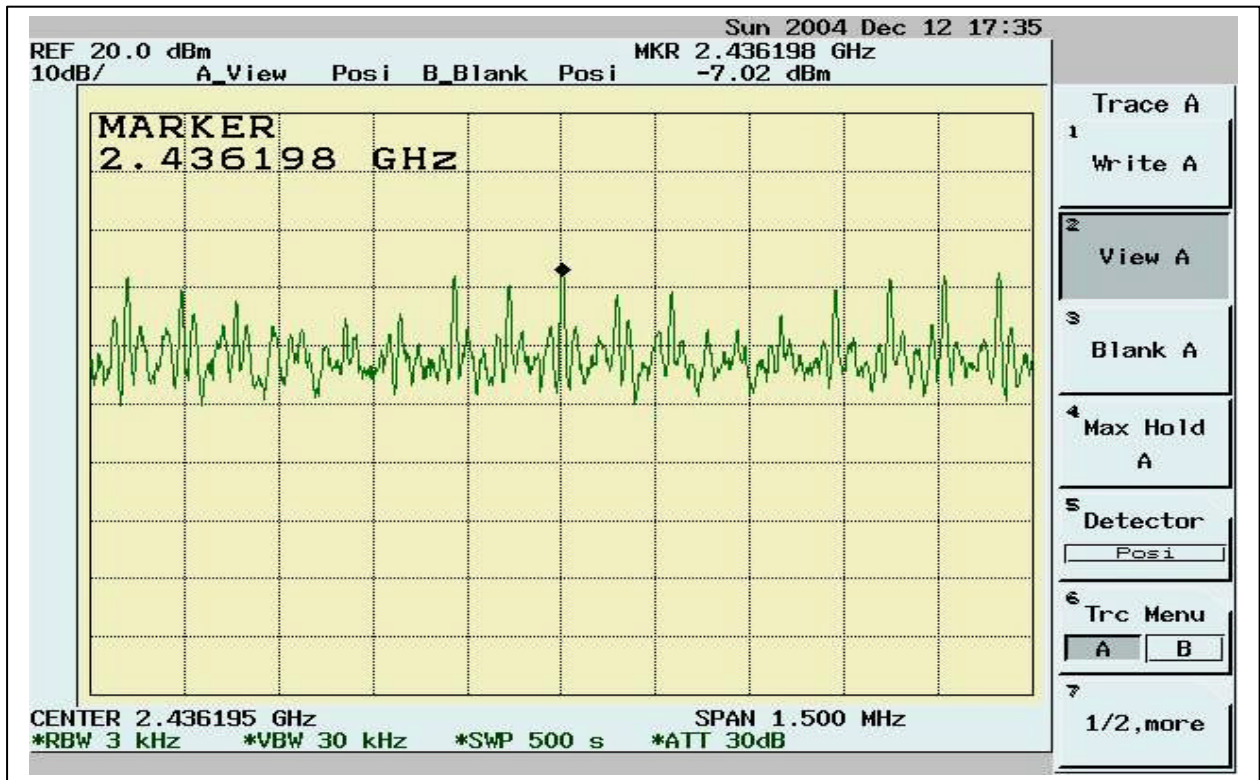

Channel 11

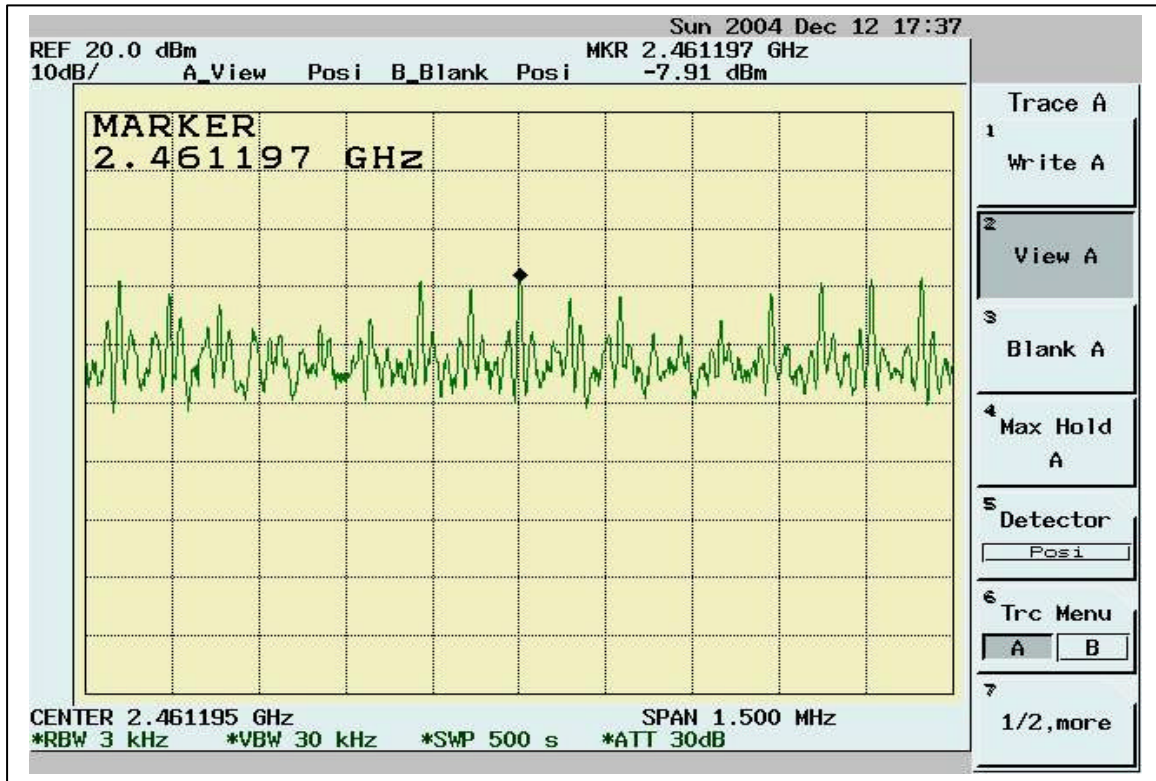

5. TEST RESULTS (802.11a)

5.1 Maximum Peak Output Power [Section 15.407 (a)(1)(2)(3)]

5.1.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

5.1.2 Test Setup




Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW (17dBm) or 4dBm+10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm+10logB



Note: B is the 26dB emission bandwidth in MHz

5.1.3 Test Data: (Normal Mode)

Maximum Peak Output Power

Chennel	Frequency (MHz)	Peak Power Output (dBm)	26 dBc Bandwidth/Limit (MHz)/(dBm)	The lesser Limit (dBm)	Pass/Fail
1	5180	16.250	37.53/19.74	17	Pass
4	5240	16.156	38.25/19.82	17	Pass
5	5260	16.437	37.62/26.75	24	Pass
8	5320	16.312	37.26/26.71	24	Pass

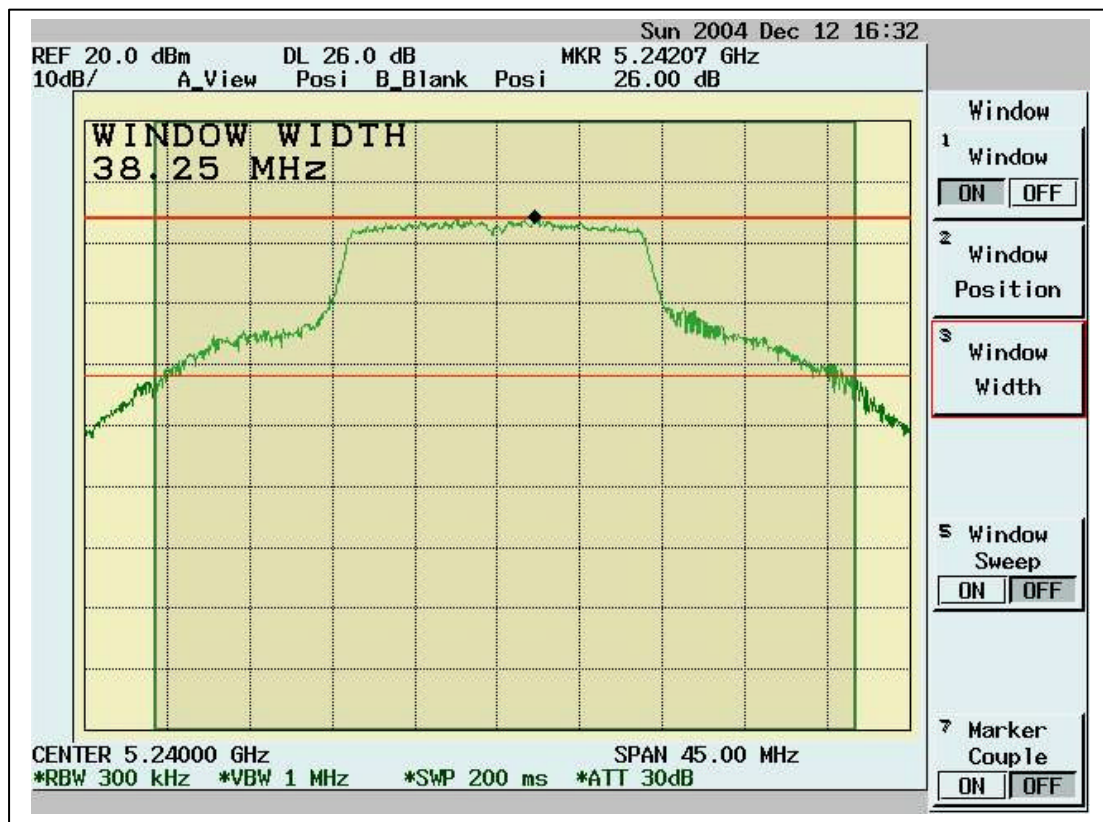

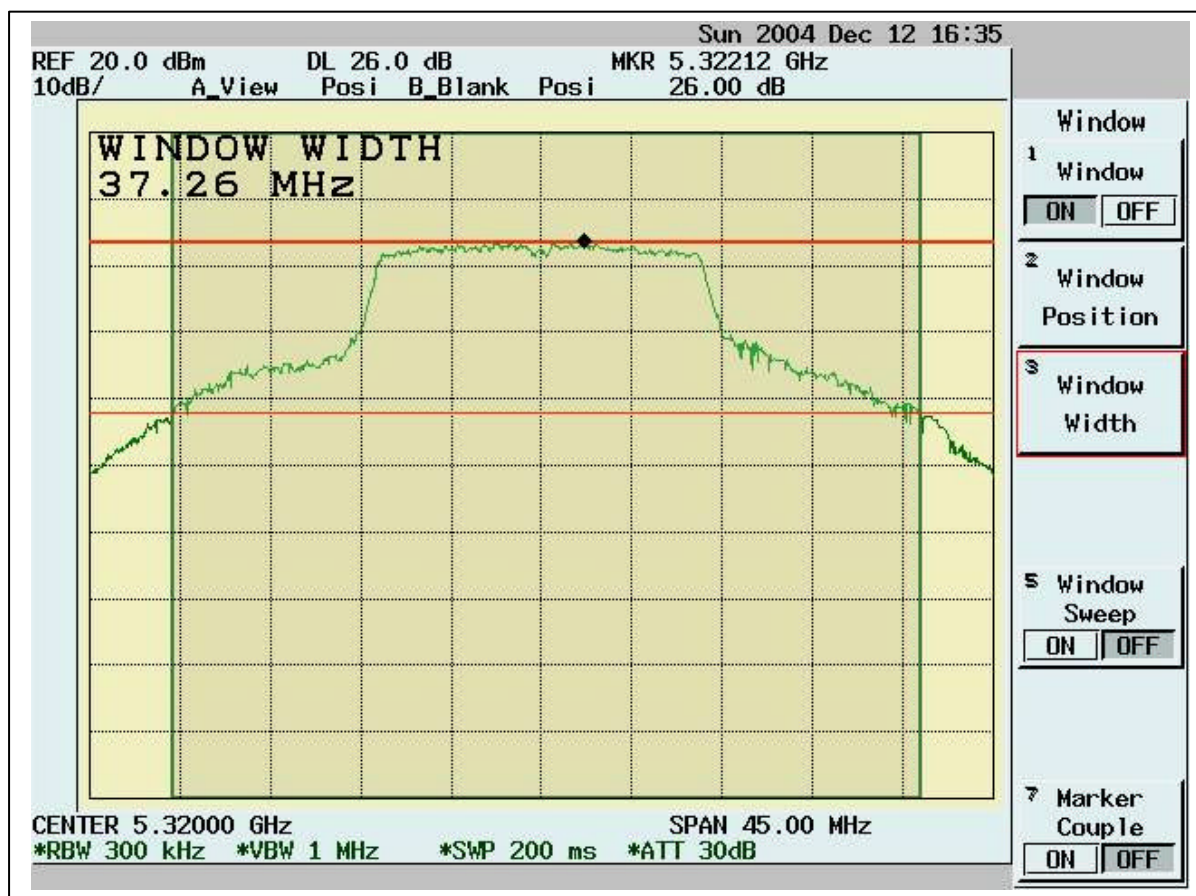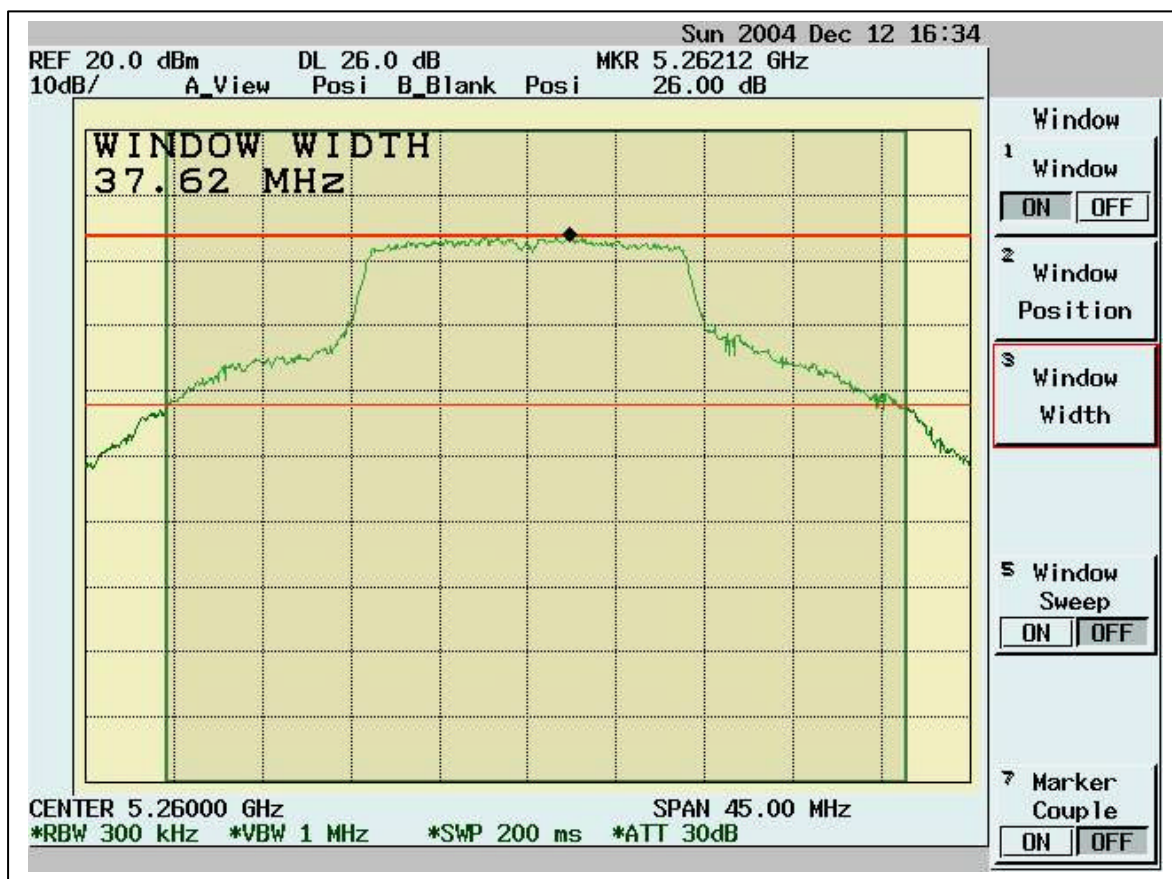


5.2 Peak Power Spectral Density [Section 15.407(a)(1)(2)(3)]

5.2.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 30MHz or 50MHz
 RBW: 1MHz
 VBW: 3MHz
 Center frequency: fundamental frequency tested.
 Sweep time= 30 or 50 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.



5.2.2 Test Setup

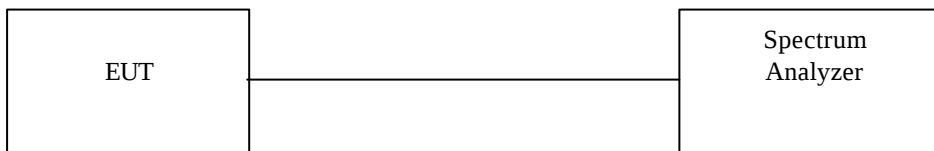


5.2.3 Test Data: (Normal Mode)

Maximum Peak Output Power Density

Chennel	Frequency (MHz)	spectrum Reading (dBm)	Cable loss(dB)	Peak Power Output (dBm/MHz)	Limit (dBm/MHz)	Pass/Fail
1	5180	2.13	1.2	3.33	4	Pass
4	5240	2.23	1.2	3.43	4	Pass
5	5260	2.77	1.2	3.97	11	Pass
8	5320	3.98	1.2	5.18	11	Pass

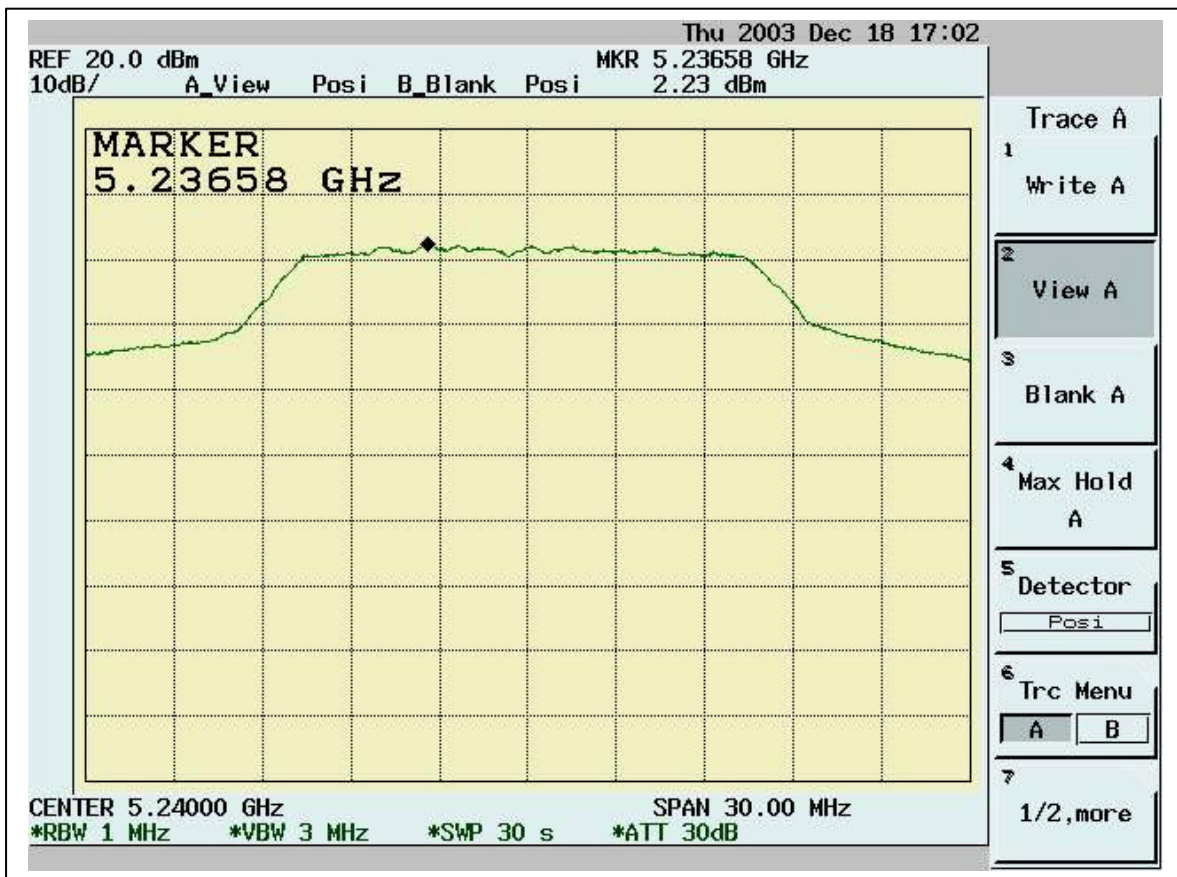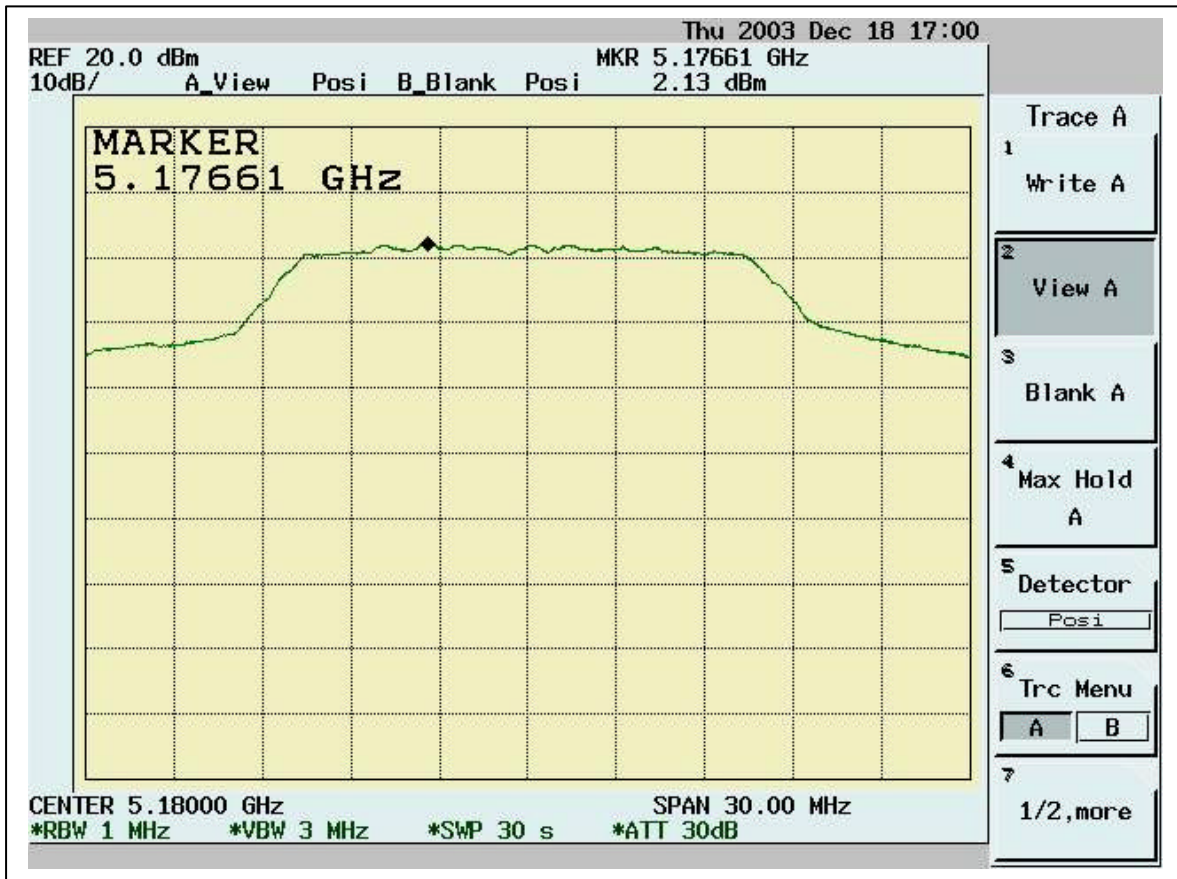

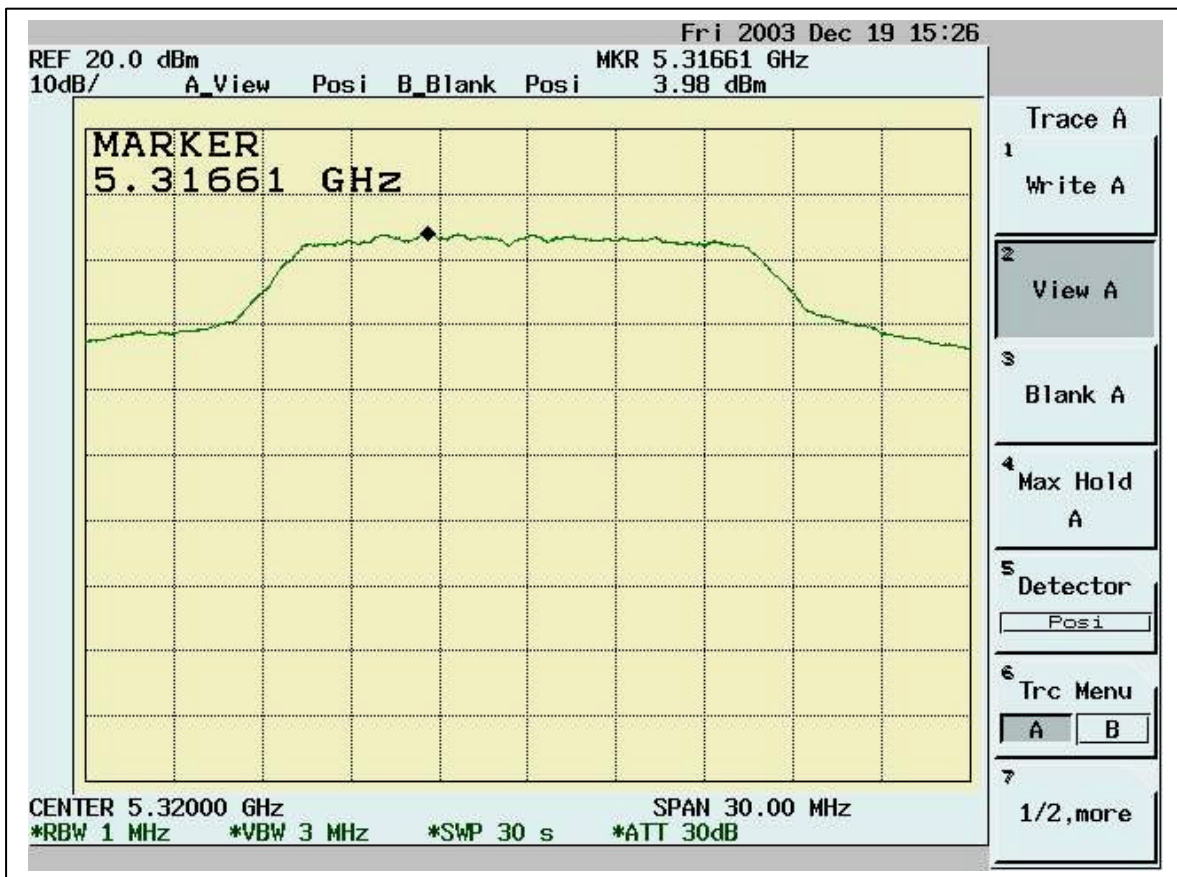

5.3 Peak Power Excursion Measurement [Section 15.407(a)(6)]

5.3.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
2. Frequency SPAN of Spectrum: 30MHz or 50MHz.
3. Trace 1 : RBW: 1MHz, VBW: 1MHz. Using peak detector and Max -hold
4. Trace 2 : RBW: 1MHz, VBW:30KHz. Using peak detector and Max-hold
5. Record the largest difference between Trace 1 and Trace 2.

5.3.2 Test Setup



5.3.3 Test Data: (Normal Mode)

Peak Power Excursion				
Chennel	Frequency (MHz)	Peak Power Excursion (dB)	Limit (dB)	Pass/Fail
1	5180	7.44	13	Pass
4	5240	7.28	13	Pass
5	5260	7.40	13	Pass
8	5320	7.24	13	Pass

