



TEST REPORT

Report Reference No. : **TRE1708012001** R/C.....: 57660

FCC ID : **2AHYVEPIC3**

Applicant's name : **PEAG,LLC dba JLab Audio**

Address : 3402 Piazza DOro Way,Suite 230,Oceanside,California,United States 92056

Manufacturer.....: Cosonic Intelligent Technologies Co., Ltd.

Address.....: 506, 1st Building,No.6, South Industry Road,Songshan Lake National High-tech Industrial Development Zone,Dongguan City, Guangdong, 523808 China

Test item description.....: **EPIC 3**

Trade Mark.....: JLab

Model/Type reference.....: EPIC 3

Listed Model(s): -

Standard: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample.....: Aug. 21, 2017

Date of testing.....: Aug. 22, 2017- Aug. 29, 2017

Date of issue.....: Sep.13, 2017

Result.....: **PASS**

Compiled by
(position+printedname+signature) .. : File administrators Candy Liu

Candy Liu

Supervised by
(position+printedname+signature) ... : Project Engineer Lion Cai

Lion Cai

Approved by
(position+printedname+signature) ... : RF Manager Hans Hu

Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Contents

<u>1.</u>	<u>TEST STANDARDS AND TEST DESCRIPTION</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	<u>4</u>
<u>3.</u>	<u>SUMMARY</u>	<u>5</u>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<u>4.</u>	<u>TEST ENVIRONMENT</u>	<u>7</u>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	<u>10</u>
5.1.	Antenna requirement	10
5.2.	Conducted Emission (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	20dB Emission Bandwidth	18
5.5.	Carrier Frequencies Separation	22
5.6.	Hopping Channel Number	24
5.7.	Dwell Time	26
5.8.	Pseudorandom Frequency Hopping Sequence	30
5.9.	Restricted band (radiated)	31
5.10.	Bandedge and Spurious Emission (conducted)	33
5.11.	Spurious Emission (radiated)	49
<u>6.</u>	<u>TEST SETUP PHOTOS OF THE EUT</u>	<u>53</u>
<u>7.</u>	<u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u>	<u>55</u>

1. TEST STANDARDS AND TEST DESCRIPTION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Version No.	Date of issue	Description
00	Sep. 13, 2017	Original

2. Test Description

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Restricted band	15.247(d)/15.205	Pass
Radiated Emission	15.247(d)/15.209	Pass

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	PEAG,LLC dba JLab Audio
Address:	3402 Piazza DOro Way,Suite 230,Oceanside,California,United States 92056
Manufacturer:	Cosonic Intelligent Technologies Co., Ltd.
Address:	506, 1st Building,No.6, South Industry Road,Songshan Lake National High-tech Industrial Development Zone,Dongguan City,Guangdong, 523808 China

3.2. Product Description

Name of EUT:	EPIC 3
Trade Mark:	JLab
Model No.:	EPIC 3
Listed Model(s):	-
Power supply:	DC 3.7V From internal battery
Adapter information:	-
Hardware version:	V0.1
Software version:	A01
Bluetooth	
Version:	Supported BT4.1+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Chip Antenna
Antenna gain:	0 dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
0	2402
1	2403
:	:
39	2441
:	:
77	2479
78	2480

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For RF test axis
EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

	Length (m):	/
	Shield:	/
	Detachable:	/
	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

4.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 762235

IC-Registration No.: 5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter Power Conducted	0.57 dB	(1)
Transmitter Power Radiated	2.20 dB	(1)
Conducted Spurious Emission 9 kHz ~ 40 GHz	1.60 dB	(1)
Radiated Spurious Emission 9 kHz ~ 40 GHz	2.20 dB	(1)
Conducted Emission 9 kHz ~ 30 MHz	3.39 dB	(1)
Radiated Emission 30 ~ 1000 MHz	4.24 dB	(1)
Radiated Emission 1 ~ 18 GHz	5.16 dB	(1)
Radiated Emission 18 ~ 40 GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

4.5. Equipments Used during the Test

Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Artificial Mains	Rohde&Schwarz	ESH2-Z5	100028	2016/11/13
2	EMI Test Receiver	Rohde&Schwarz	ESCI3	100038	2016/11/13
3	Pulse Limiter	Rohde&Schwarz	ESHSZ2	100044	2016/11/13
4	EMI Test Software	Rohde&Schwarz	ES-K1 V1.71	N/A	N/A

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
2	EMI TEST RECEIVER	Rohde&Schwarz	ESI 26	100009	2016/11/13
3	EMI TEST Software	Audix	E3	N/A	N/A
4	TURNTABLE	ETS	2088	2149	N/A
5	ANTENNA MAST	ETS	2075	2346	N/A
6	EMI TEST Software	Rohde&Schwarz	ESK1	N/A	N/A
7	HORNANTENNA	ShwarzBeck	9120D	1011	2016/11/13
8	Amplifer	Sonoma	310N	E009-13	2016/11/13
9	JS amplifer	Rohde&Schwarz	JS4-00101800-28-5A	F201504	2016/11/13
10	High pass filter	Compliance Direction systems	BSU-6	34202	2016/11/13
11	HORNANTENNA	ShwarzBeck	9120D	1012	2016/11/13
12	Amplifer	Compliance Direction systems	PAP1-4060	120	2016/11/13
13	Loop Antenna	Rohde&Schwarz	HFH2-Z2	100020	2016/11/13
14	TURNTABLE	MATURO	TT2.0	----	N/A
15	ANTENNA MAST	MATURO	TAM-4.0-P	----	N/A
16	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2016/11/13
17	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2016/11/13

RF Conducted					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	2016/11/13

The Cal.Interval was one year

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

☒ **Passed**

☐ **Not Applicable**

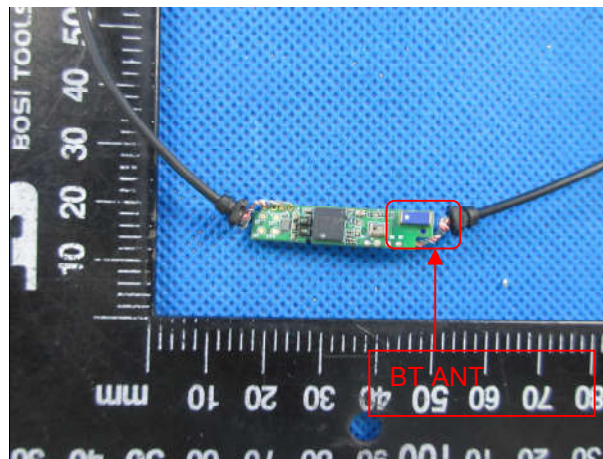

5.2. Conducted Emission (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

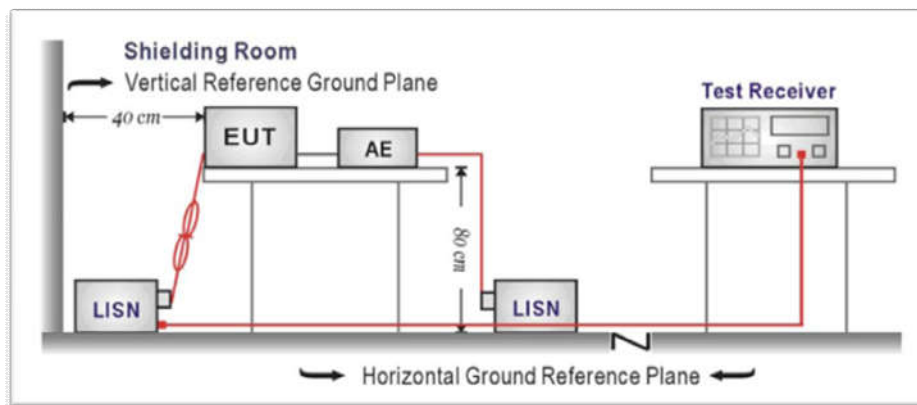

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.
- 9.

TEST RESULTS


☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line:

L

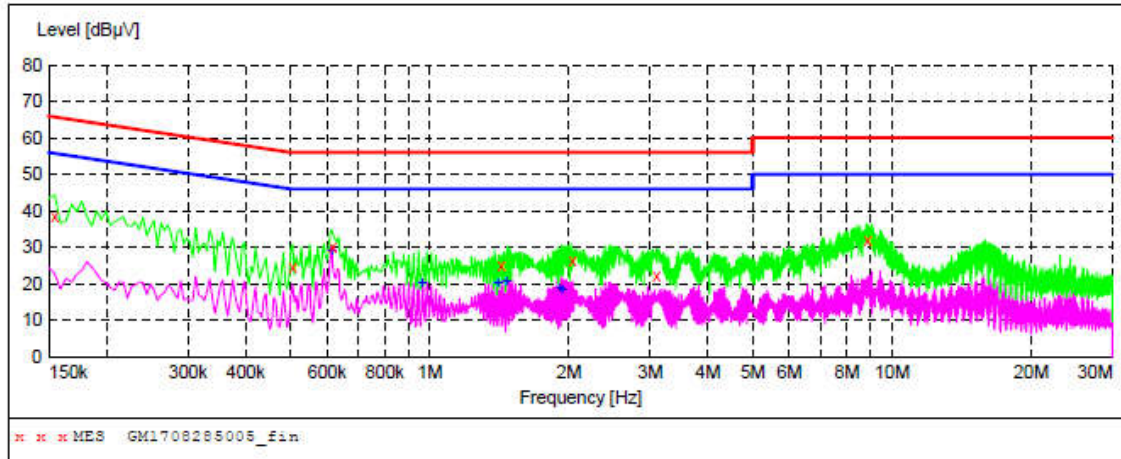

MEASUREMENT RESULT: "GM1708285005_fin"

8/28/2017 10:12AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	38.50	10.4	66	27.3	QP	L1	GND
0.505500	24.40	10.2	56	31.6	QP	L1	GND
0.618000	30.30	10.2	56	25.7	QP	L1	GND
1.428000	25.00	10.2	56	31.0	QP	L1	GND
2.035500	26.30	10.2	56	29.7	QP	L1	GND
3.097500	22.40	10.2	56	33.6	QP	L1	GND
8.853000	32.00	10.5	60	28.0	QP	L1	GND


MEASUREMENT RESULT: "GM1708285005_fin2"

8/28/2017 10:12AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.613500	29.10	10.2	46	16.9	AV	L1	GND
0.964500	20.30	10.2	46	25.7	AV	L1	GND
1.405500	20.50	10.2	46	25.5	AV	L1	GND
1.468500	20.60	10.2	46	25.4	AV	L1	GND
1.909500	18.80	10.2	46	27.2	AV	L1	GND
1.932000	18.50	10.2	46	27.5	AV	L1	GND

Test Line:

N

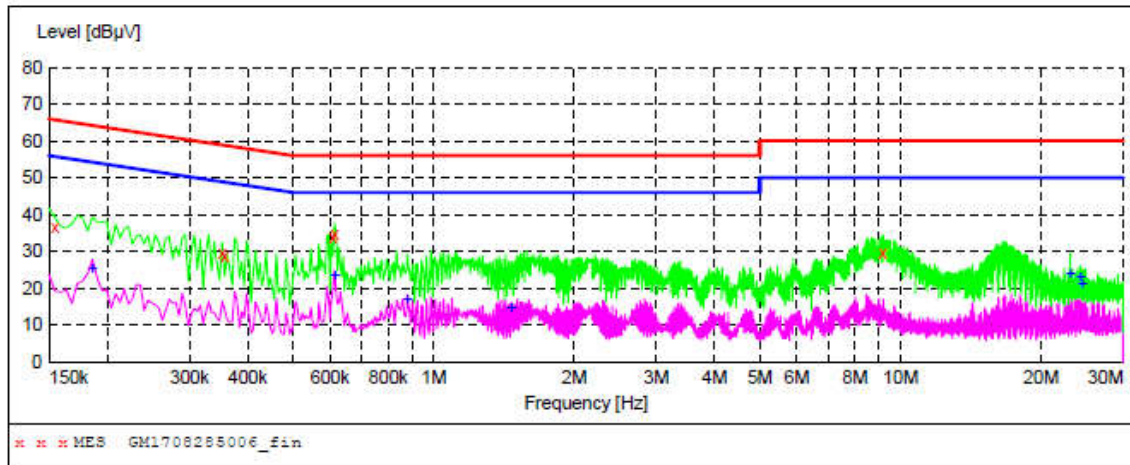**MEASUREMENT RESULT: "GM1708285006_fin"**

8/28/2017 10:15AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154500	36.60	10.4	66	29.2	QP	N	GND
0.352500	29.70	10.2	59	29.2	QP	N	GND
0.357000	28.90	10.2	59	29.9	QP	N	GND
0.609000	34.00	10.2	56	22.0	QP	N	GND
0.613500	34.70	10.2	56	21.3	QP	N	GND
9.150000	29.60	10.5	60	30.4	QP	N	GND

MEASUREMENT RESULT: "GM1708285006_fin2"

8/28/2017 10:15AM


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.186000	25.60	10.3	54	28.6	AV	N	GND
0.613500	23.80	10.2	46	22.2	AV	N	GND
0.879000	16.90	10.1	46	29.1	AV	N	GND
1.468500	15.00	10.2	46	31.0	AV	N	GND
23.127000	24.00	10.7	50	26.0	AV	N	GND
24.346500	23.00	10.7	50	27.0	AV	N	GND
24.531000	21.10	10.7	50	28.9	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**

TEST CONFIGURATION

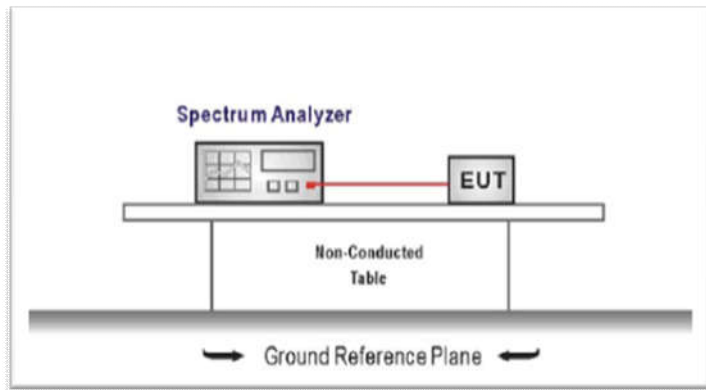

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 RBW \geq the 20 dB bandwidth of the emission being measured, VBW \geq RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	5.845	≤ 30.00	Pass
	39	5.271		
	78	3.175		
$\pi/4$ DQPSK	00	4.297	≤ 21.00	Pass
	39	4.523		
	78	2.632		
8DPSK	00	4.587	≤ 21.00	Pass
	39	4.637		
	78	2.743		


GFSK




CH00



CH39

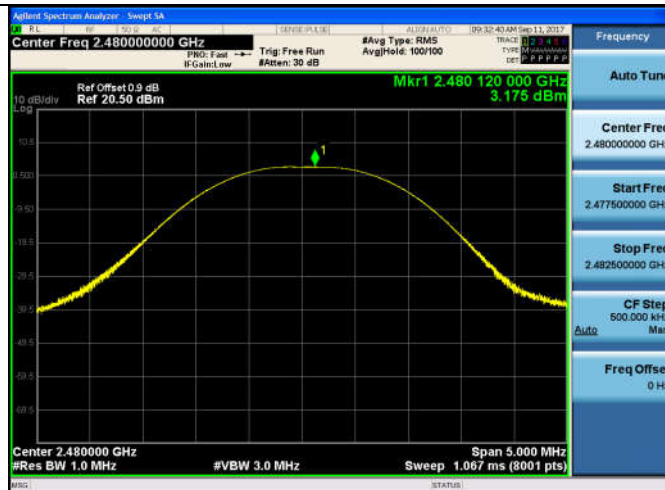

CH78

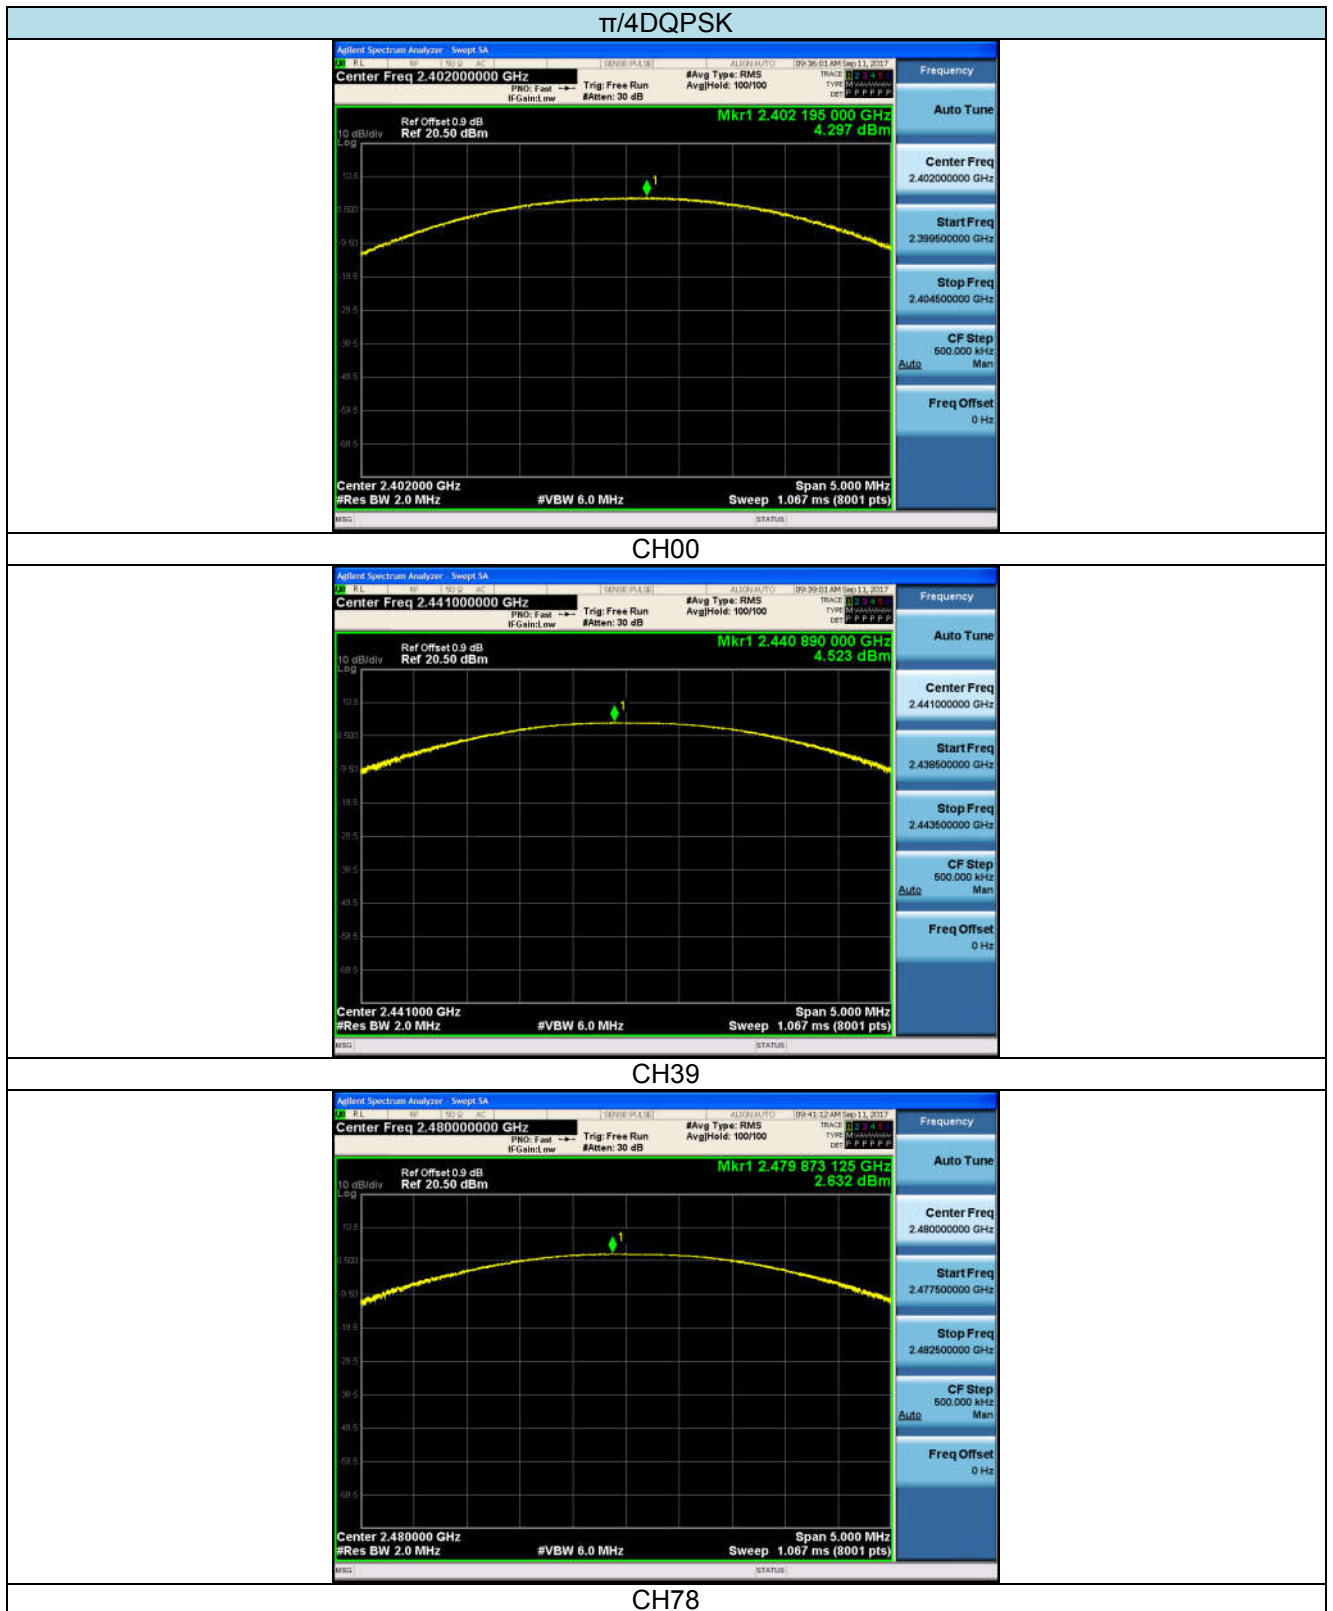


8DPSK



CH00



CH39

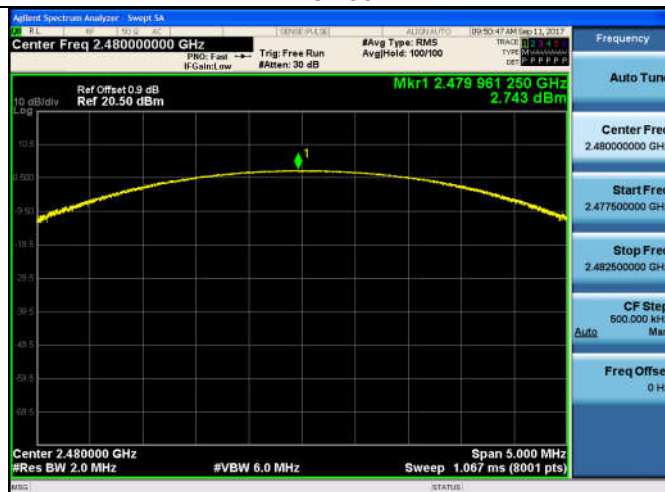


CH78

5.4. 20dB Emission Bandwidth

LIMIT

N/A

TEST CONFIGURATION

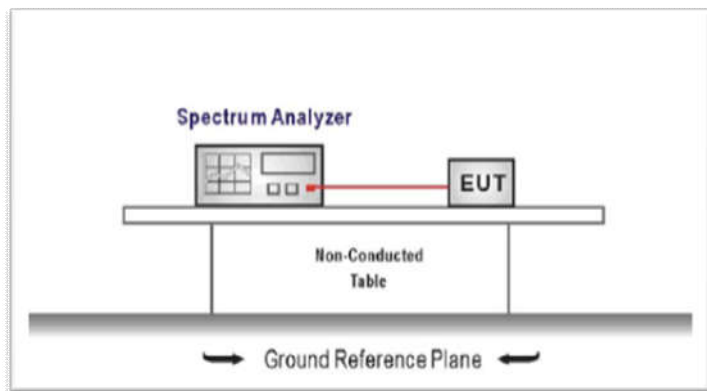

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:


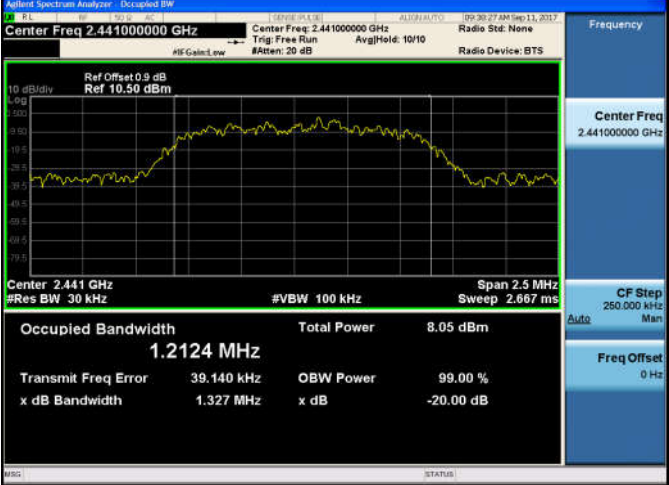
Please refer to the clause 3.3


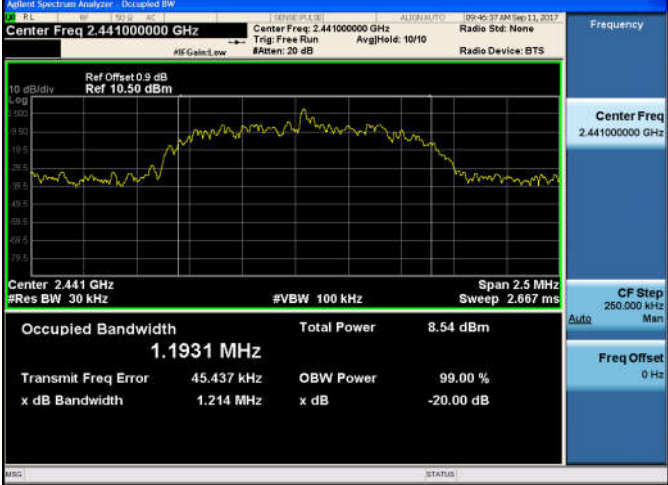
TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel	20dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.921	-	Pass
	39	0.927		
	78	0.917		
$\pi/4$ DQPSK	00	1.341	-	Pass
	39	1.327		
	78	1.327		
8DPSK	00	1.328	-	Pass
	39	1.214		
	78	1.294		

Modulation Type:		GFSK
CH00		
CH39		
CH78		

Modulation Type:		$\pi/4$ DQPSK
CH00		Frequency Center Freq 2.402000000 GHz CF Step 250.000 kHz Auto Man Freq Offset 0 Hz
CH39		Frequency Center Freq 2.441000000 GHz CF Step 250.000 kHz Auto Man Freq Offset 0 Hz
CH78		Frequency Center Freq 2.480000000 GHz CF Step 250.000 kHz Auto Man Freq Offset 0 Hz


Modulation Type:		8DPSK
CH00		
CH39		
CH78		

5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):
frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the $2/3 \times 20$ dB bandwidth of the hopping channel, whichever is greater.

TEST CONFIGURATION

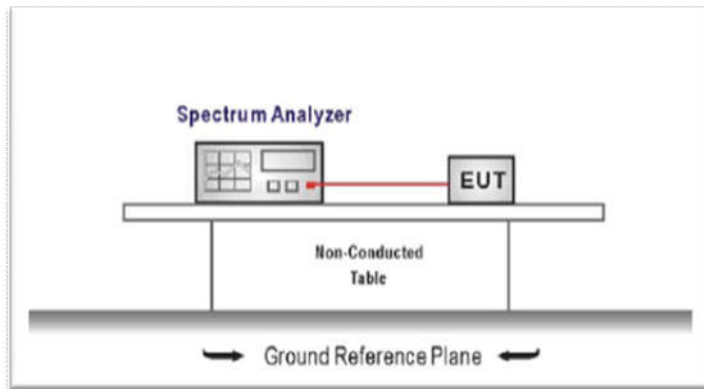

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels
RBW $\geq 1\%$ of the span, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3



TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz)	Result
GFSK	39	1.019	≥ 0.927	Pass
$\pi/4$ DQPSK	39	1.006	≥ 0.894	Pass
8DPSK	39	0.995	≥ 0.885	Pass



GFSK

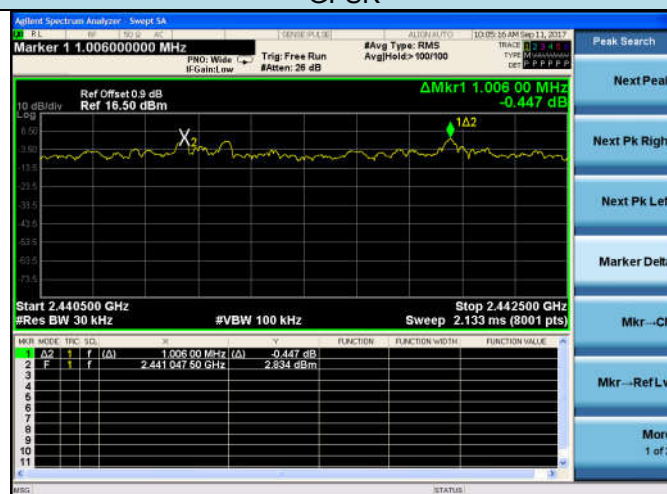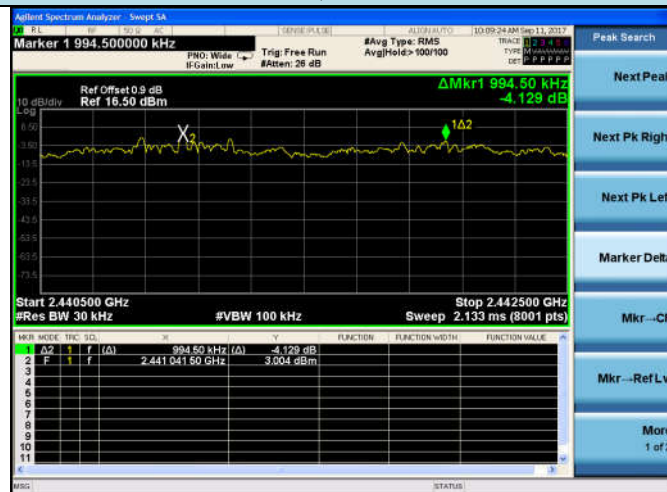 $\pi/4$ DQPSK/MCH

8DPSK


5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

TEST CONFIGURATION

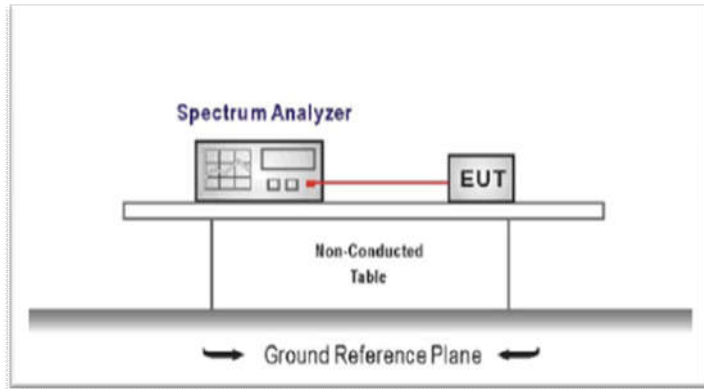

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = the frequency band of operation
 RBW \geq 1% of the span, VBW \geq RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.


TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Modulation type	Channel number	Limit	Result
GFSK	79	≥ 15.00	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		

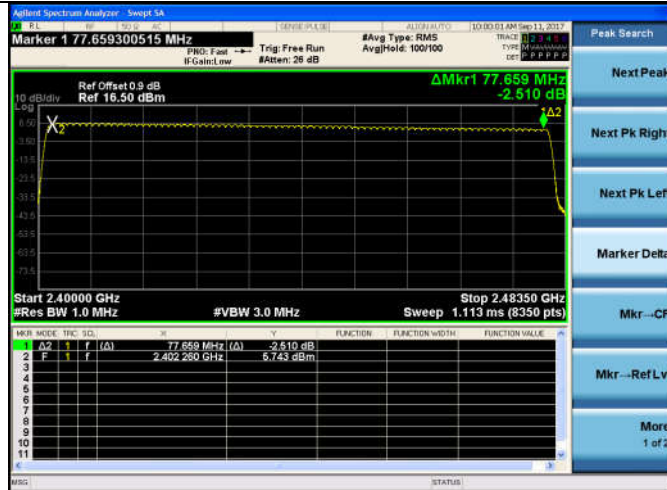

GFSK

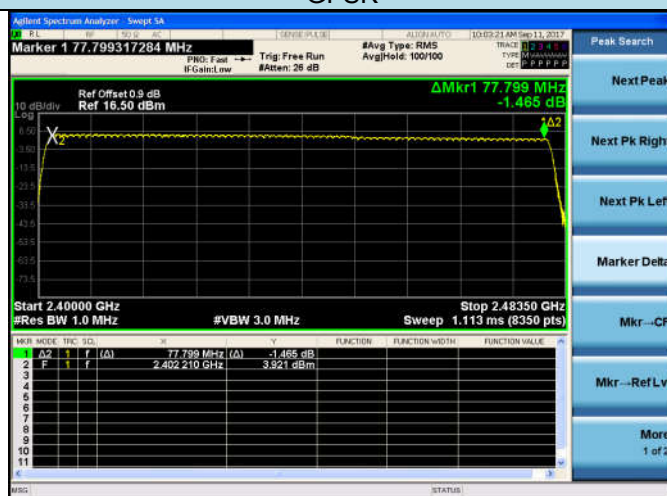 $\pi/4$ DQPSK/MCH

8DPSK


5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

TEST CONFIGURATION

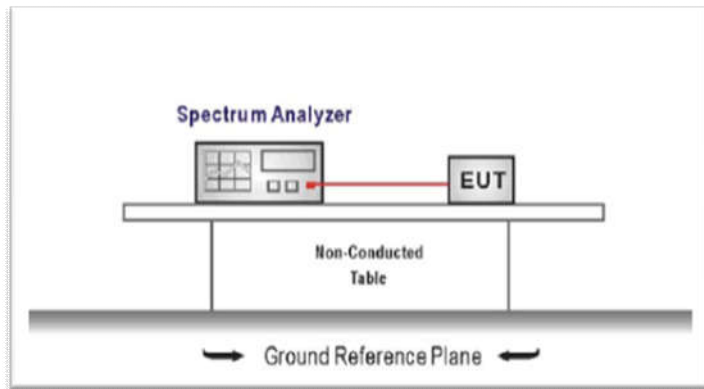

TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3



TEST RESULTS

☒ Passed ☐ Not Applicable

Modulation type	Channel	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.131	≤0.40	Pass
	DH3	0.267		
	DH5	0.310		
π/4DQPSK	2DH1	0.134	≤0.40	Pass
	2DH3	0.267		
	2DH5	0.312		
8DPSK	3DH1	0.134	≤0.40	Pass
	3DH3	0.267		
	3DH5	0.312		

Note:

1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2DH1, 3DH1
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2DH3, 3DH3
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2DH5, 3DH5

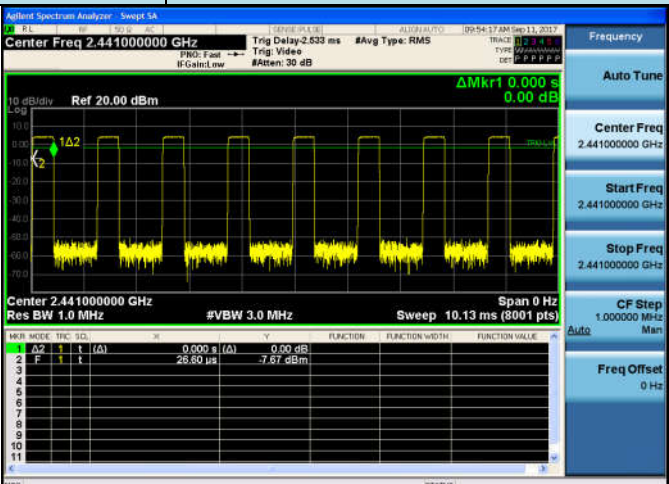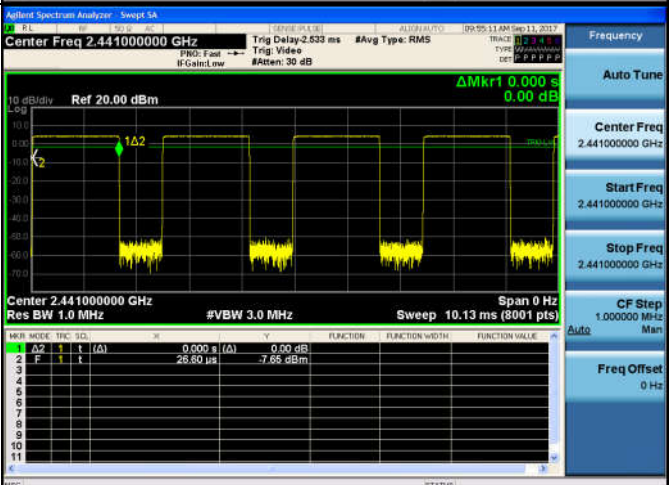Modulation Type:		GFSK																								
DH1	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>26.80 μs</td><td>-7.67 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB		2	F	1	t	(Δ)	26.80 μs	-7.67 dBm		<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz Man</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																				
2	F	1	t	(Δ)	26.80 μs	-7.67 dBm																				
DH3	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>26.80 μs</td><td>-7.66 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB		2	F	1	t	(Δ)	26.80 μs	-7.66 dBm		<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz Man</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																				
2	F	1	t	(Δ)	26.80 μs	-7.66 dBm																				
DH5	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s (Δ)</td><td>0.00 dB</td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>2.526 ms</td><td>-8.49 dBm</td><td></td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB		2	F	1	t	(Δ)	2.526 ms	-8.49 dBm		<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz Man</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	A2	1	t	(Δ)	0.000 s (Δ)	0.00 dB																				
2	F	1	t	(Δ)	2.526 ms	-8.49 dBm																				

Modulation Type:		$\pi/4$ DQPSK																								
2DH1	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>1.121 ms</td><td></td><td>-9.19 dBm</td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB	2	F	1	t	(Δ)	1.121 ms		-9.19 dBm	<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz</div> <div>Auto</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																			
2	F	1	t	(Δ)	1.121 ms		-9.19 dBm																			
2DH3	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>2.104 ms</td><td></td><td>-7.97 dBm</td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB	2	F	1	t	(Δ)	2.104 ms		-7.97 dBm	<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz</div> <div>Auto</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																			
2	F	1	t	(Δ)	2.104 ms		-7.97 dBm																			
2DH5	 <table><tr><th>MNR</th><th>MODE</th><th>TRF</th><th>SC</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>Δ2</td><td>1</td><td>t</td><td>(Δ)</td><td>0.000 s</td><td>(Δ)</td><td>0.00 dB</td></tr><tr><td>2</td><td>F</td><td>1</td><td>t</td><td>(Δ)</td><td>2.174 ms</td><td></td><td>-9.86 dBm</td></tr></table>	MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB	2	F	1	t	(Δ)	2.174 ms		-9.86 dBm	<div>Frequency</div> <div>Auto Tune</div> <div>Center Freq 2.441000000 GHz</div> <div>Start Freq 2.441000000 GHz</div> <div>Stop Freq 2.441000000 GHz</div> <div>CF Step 1.000000 MHz</div> <div>Auto</div> <div>Freq Offset 0 Hz</div>
MNR	MODE	TRF	SC	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																			
1	Δ2	1	t	(Δ)	0.000 s	(Δ)	0.00 dB																			
2	F	1	t	(Δ)	2.174 ms		-9.86 dBm																			

Modulation Type:		8DPSK
3DH1		
3DH3		
3DH5		

5.8. Pseudorandom Frequency Hopping Sequence

LIMIT


FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

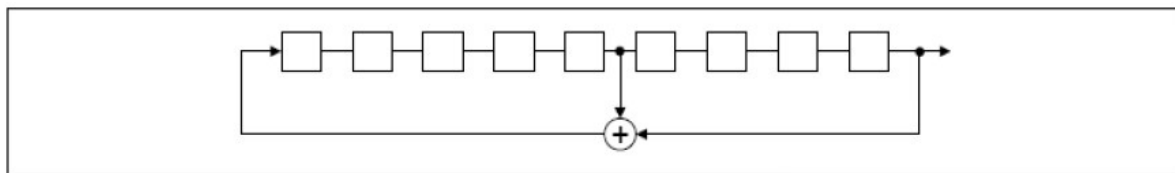

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

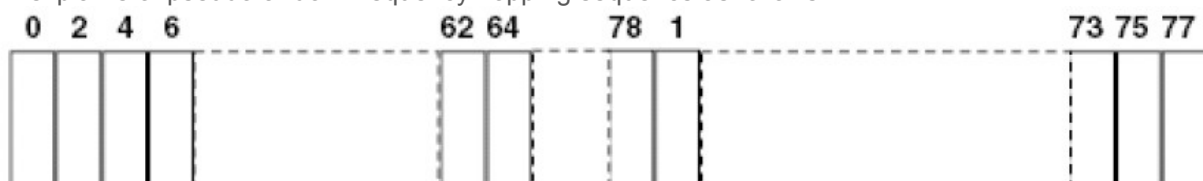

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.


5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

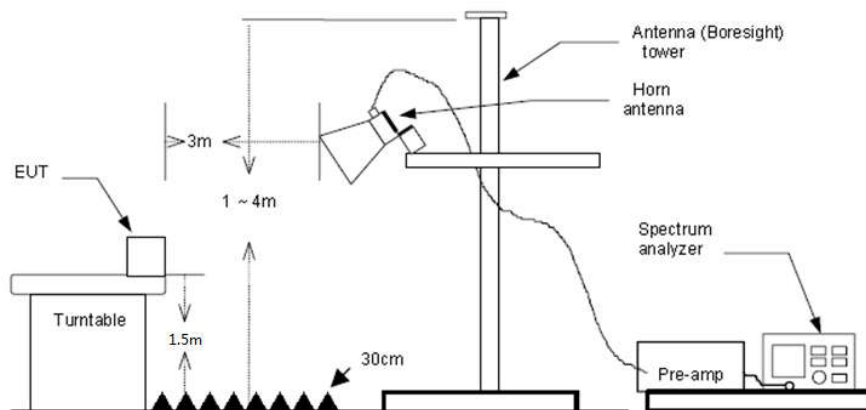

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1 MHz, VBW=3 MHz for Peak value
RBW=1 MHz, VBW=10 Hz for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

☒ **Passed** ☐ **Not Applicable**

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2310.00	33.40	28.05	6.62	37.65	30.42	74.00	-43.58	Vertical	Peak
2390.03	36.33	27.65	6.75	37.87	32.86	74.00	-41.14	Vertical	
2310.00	22.92	28.05	6.62	37.65	19.94	54.00	-34.06	Vertical	Average
2390.03	22.58	27.65	6.75	37.87	19.11	54.00	-34.89	Vertical	
2310.00	35.64	28.05	6.62	37.65	32.66	74.00	-41.34	Horizontal	Peak
2390.03	35.01	27.65	6.75	37.87	31.54	74.00	-42.46	Horizontal	
2310.00	22.67	28.05	6.62	37.65	19.69	54.00	-34.31	Horizontal	Average
2390.03	22.54	27.65	6.75	37.87	19.07	54.00	-34.93	Horizontal	

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2483.50	63.42	27.26	6.83	37.87	59.64	74.00	-14.36	Vertical	Peak
2500.00	37.67	27.20	6.84	37.87	33.84	74.00	-40.16	Vertical	
2483.50	31.65	27.26	6.83	37.87	27.87	54.00	-26.13	Vertical	Average
2500.00	23.46	27.20	6.84	37.87	19.63	54.00	-34.37	Vertical	
2483.50	61.86	27.26	6.83	37.87	58.08	74.00	-15.92	Horizontal	Peak
2500.00	38.44	27.20	6.84	37.87	34.61	74.00	-39.39	Horizontal	
2483.50	29.66	27.26	6.83	37.87	25.88	54.00	-28.12	Horizontal	Average
2500.00	22.54	27.20	6.84	37.87	18.71	54.00	-35.29	Horizontal	