

FN-LINK TECHNOLOGY Ltd.

Letter of admission

CUSTOMER APPROVED BY		
Approved by	Checked by	Prepared by

SUPPLIER APPROVED BY		
Approved by	Checked by	Prepared by

Supplier Name: Ouzhitong Technology Co., Ltd

Supplier Address: 14th Floor, Block B, Fenghuang Zhigu, No. 50 Tiezi Road, Gongle Community, Xixiang Street, Bao'an District, Shenzhen

Supplier Factory: No. 8 Litong Road, Liuyang Economic Development Zone, Changsha City, Hunan Province

Supplier's phone number: 86-755-2955-8186

Supplier website: [www.fn link.com](http://www.fnlink.com)

antenna testing

Customer	Cobos
Project Name	4A8-1000-1700
Customer NO.	
specification	FPC antenna 4A8-1000-1700 black oil white characters; Size 39.81X8MM; Line length 60MM Line diameter 1.13 gray; With 1 generation IPEX; ROHS 39.81*8.0
Supplier NO.	
Specification NO.	
Write by	Pan Yilin
REV.	Ver.1
Date	2024-1-29
Note	

Version change log				
Change date	Change content	version	Change person	Approved by

one. Recognition Letter Project Table (Index)


Number	content	Page number
–	Acknowledgment Letter Cover	one
–	Antenna test report	two
–	Version change record	three
1 one	Confirmation Letter Project Table	four
2 two	Test equipment and conditions	five
3 three	Prototype structure specification	six
4 four	Finished antenna diagram	seven
5 five	S11	eight
6 six	Gain/Efficiency/3D Graph	nine-ten
7 seven	packing	eleven

two. (Test Equipment & Conditions)

1.1 . Network Analyzers : KEYSIGHT P5002A **1.2 . Communications Test Set:** R&S CMW 500

1.3 . 3D Chamber Test System: 24探头测试系统 (24 probe testing system)

1. (Testing principle diagram of microwave anechoic chamber)

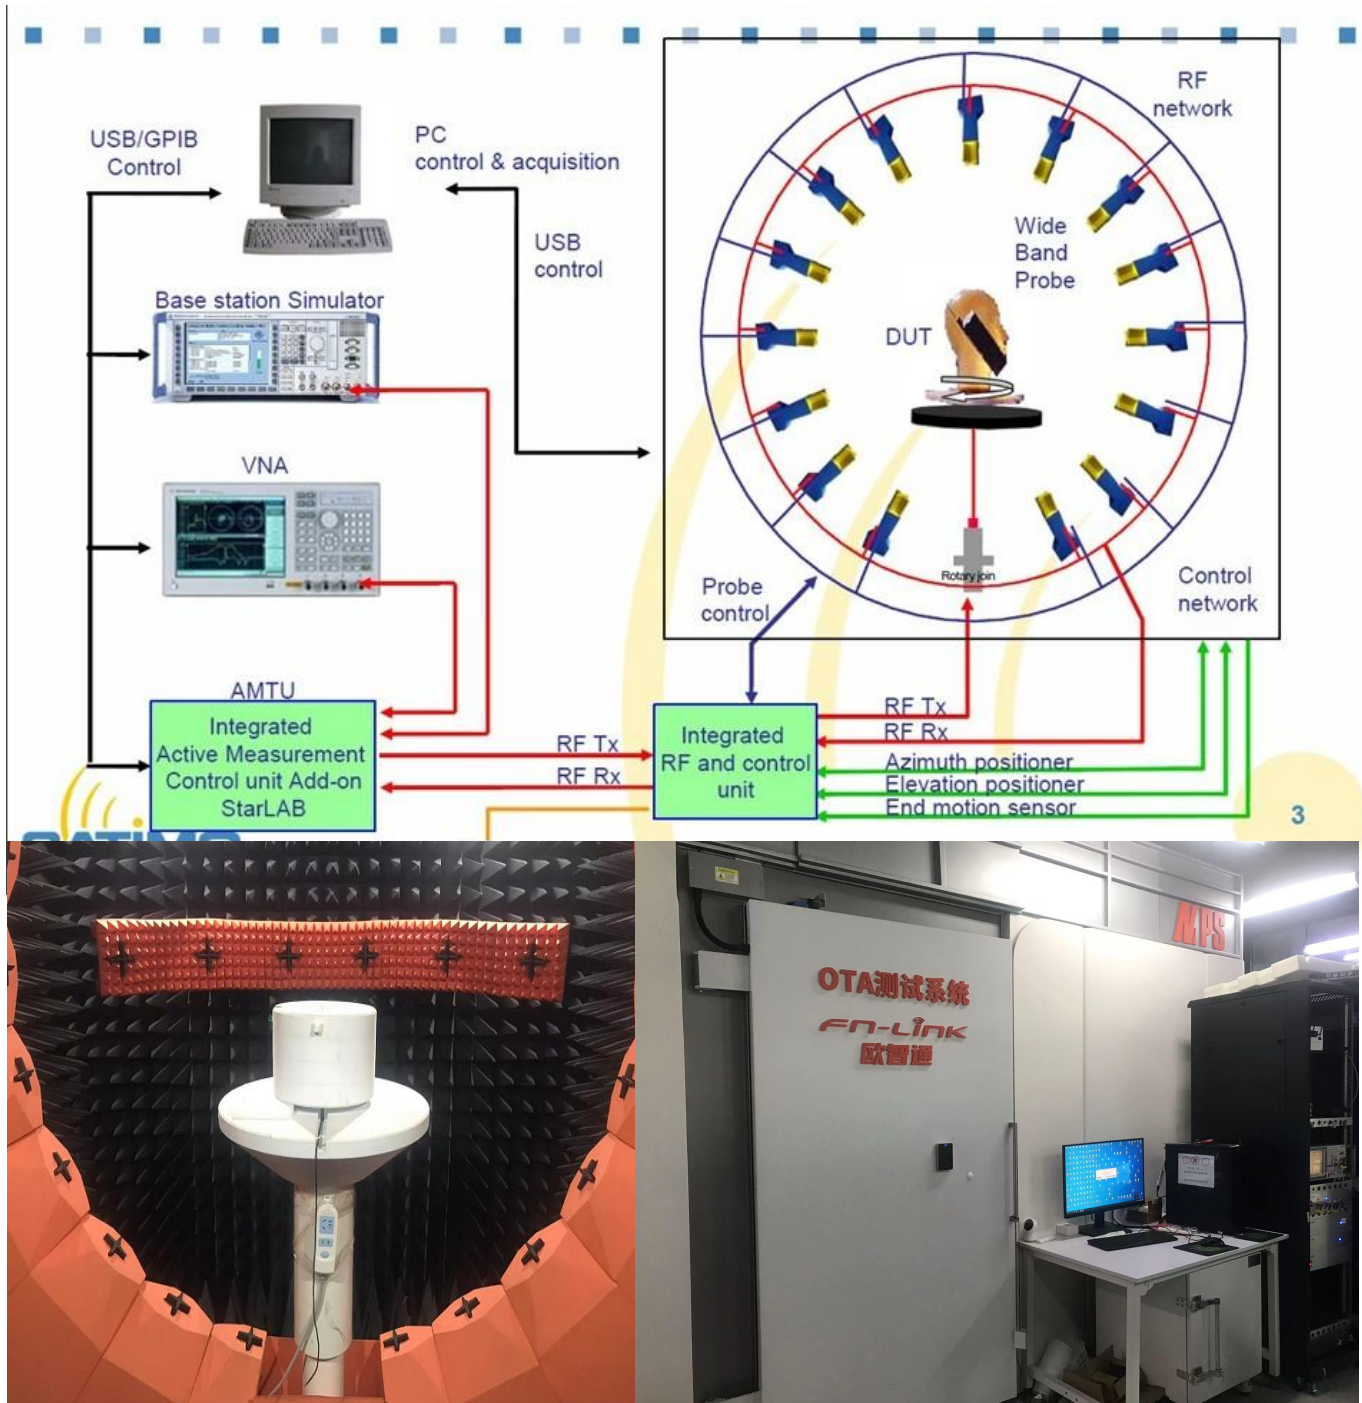


This report summarizes the electrical performance results of the antenna for the project, including the S11 parameters, Gain, and Efficiency of the antenna


catalogue

- one. Complete machine description
- two. Debugging data report
- three. Test data

Finished antenna diagram

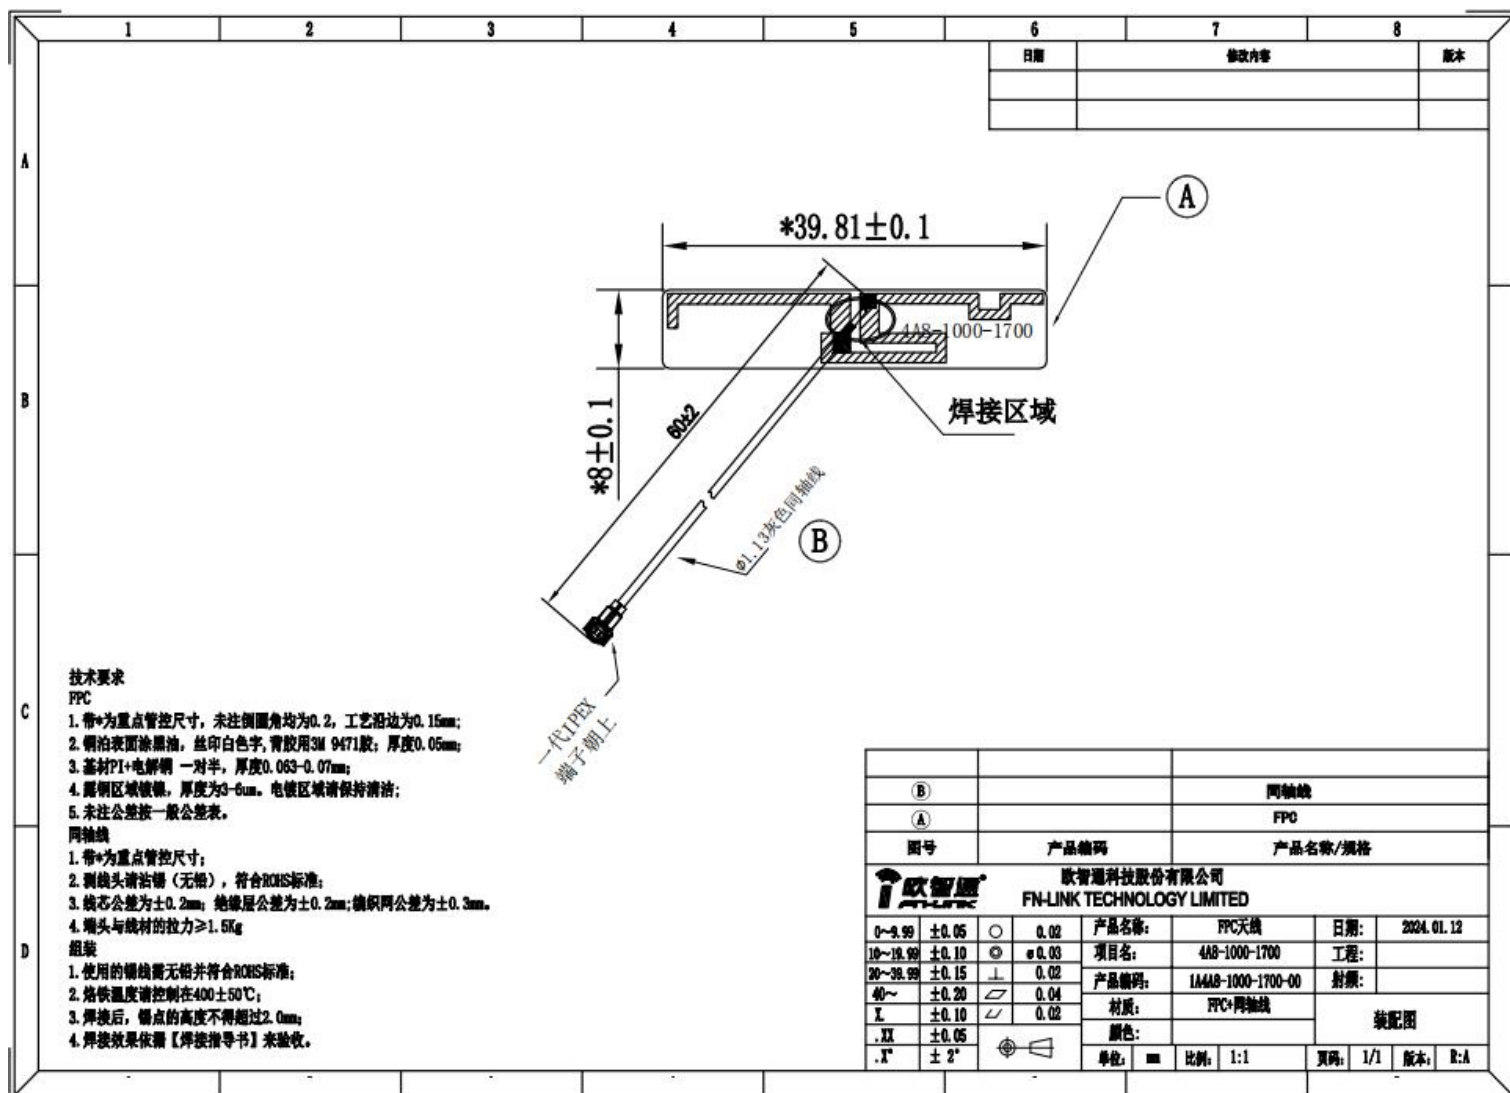

antennaS11

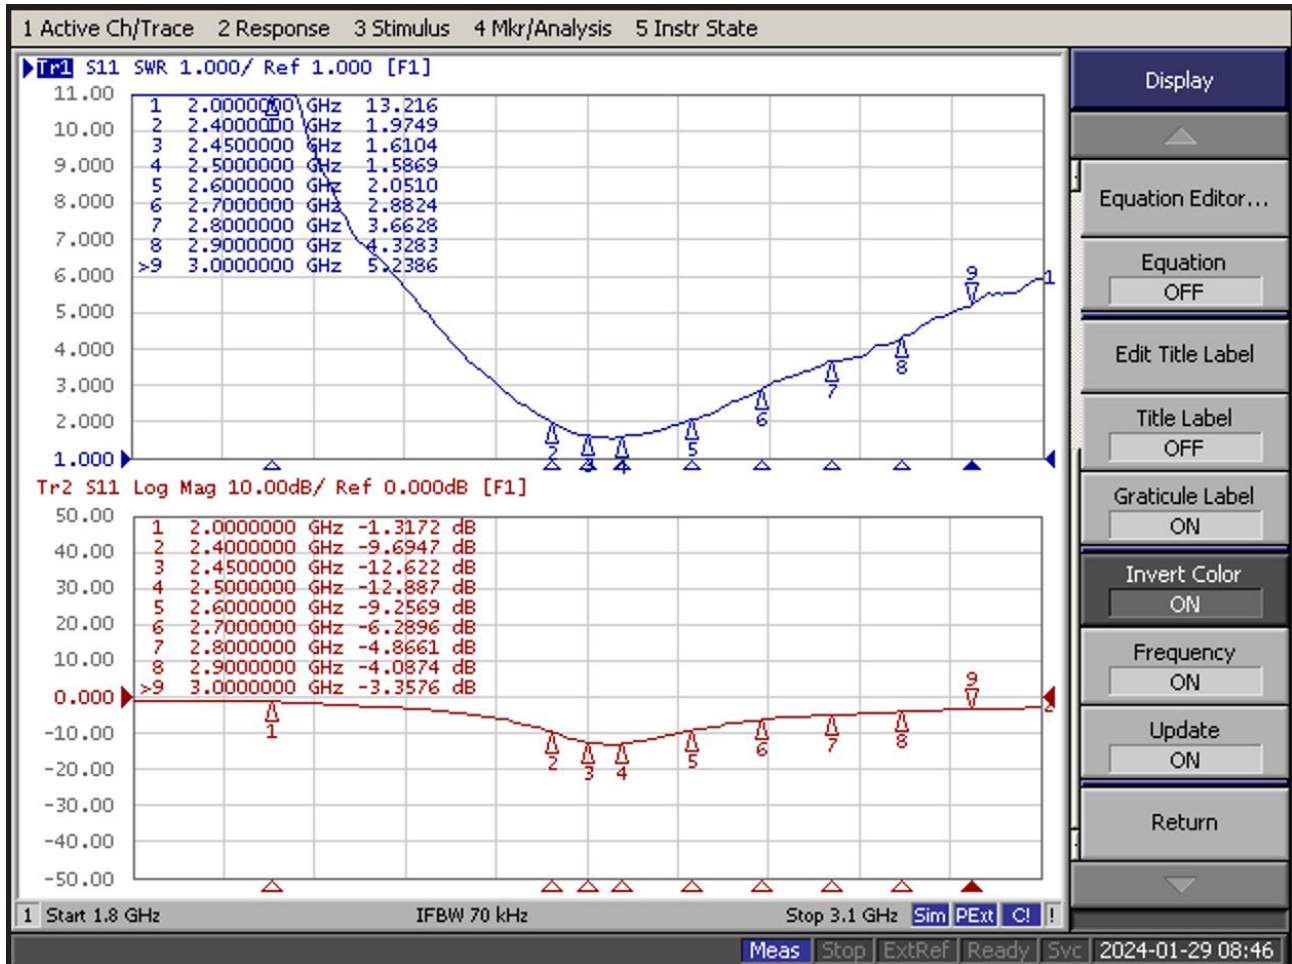


Freq/GHz	2400	2450	2500	2600	2700	2800
VSWR	1.9	1.6	1.5	2.0	2.8	3.6

antenna data

Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-2.02	62.74	4.54
2410	-1.93	64.13	4.61
2420	-1.74	66.94	4.69
2430	-1.86	65.11	4.52
2440	-1.88	64.82	4.69
2450	-1.77	66.60	4.83
2460	-1.80	66.06	4.79
2470	-1.74	66.97	4.84
2480	-1.67	68.02	4.92
2490	-1.63	68.68	4.86
2500	-1.68	67.96	4.50


2400-2500Mhz Diversity Antenna Apple Pattern Direction

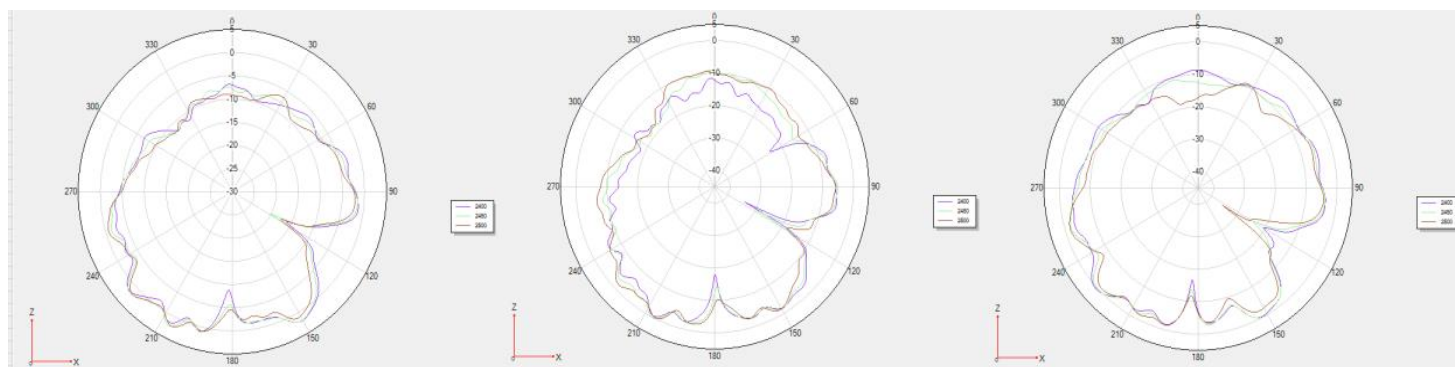

Z-X


Z-Y

X-Y

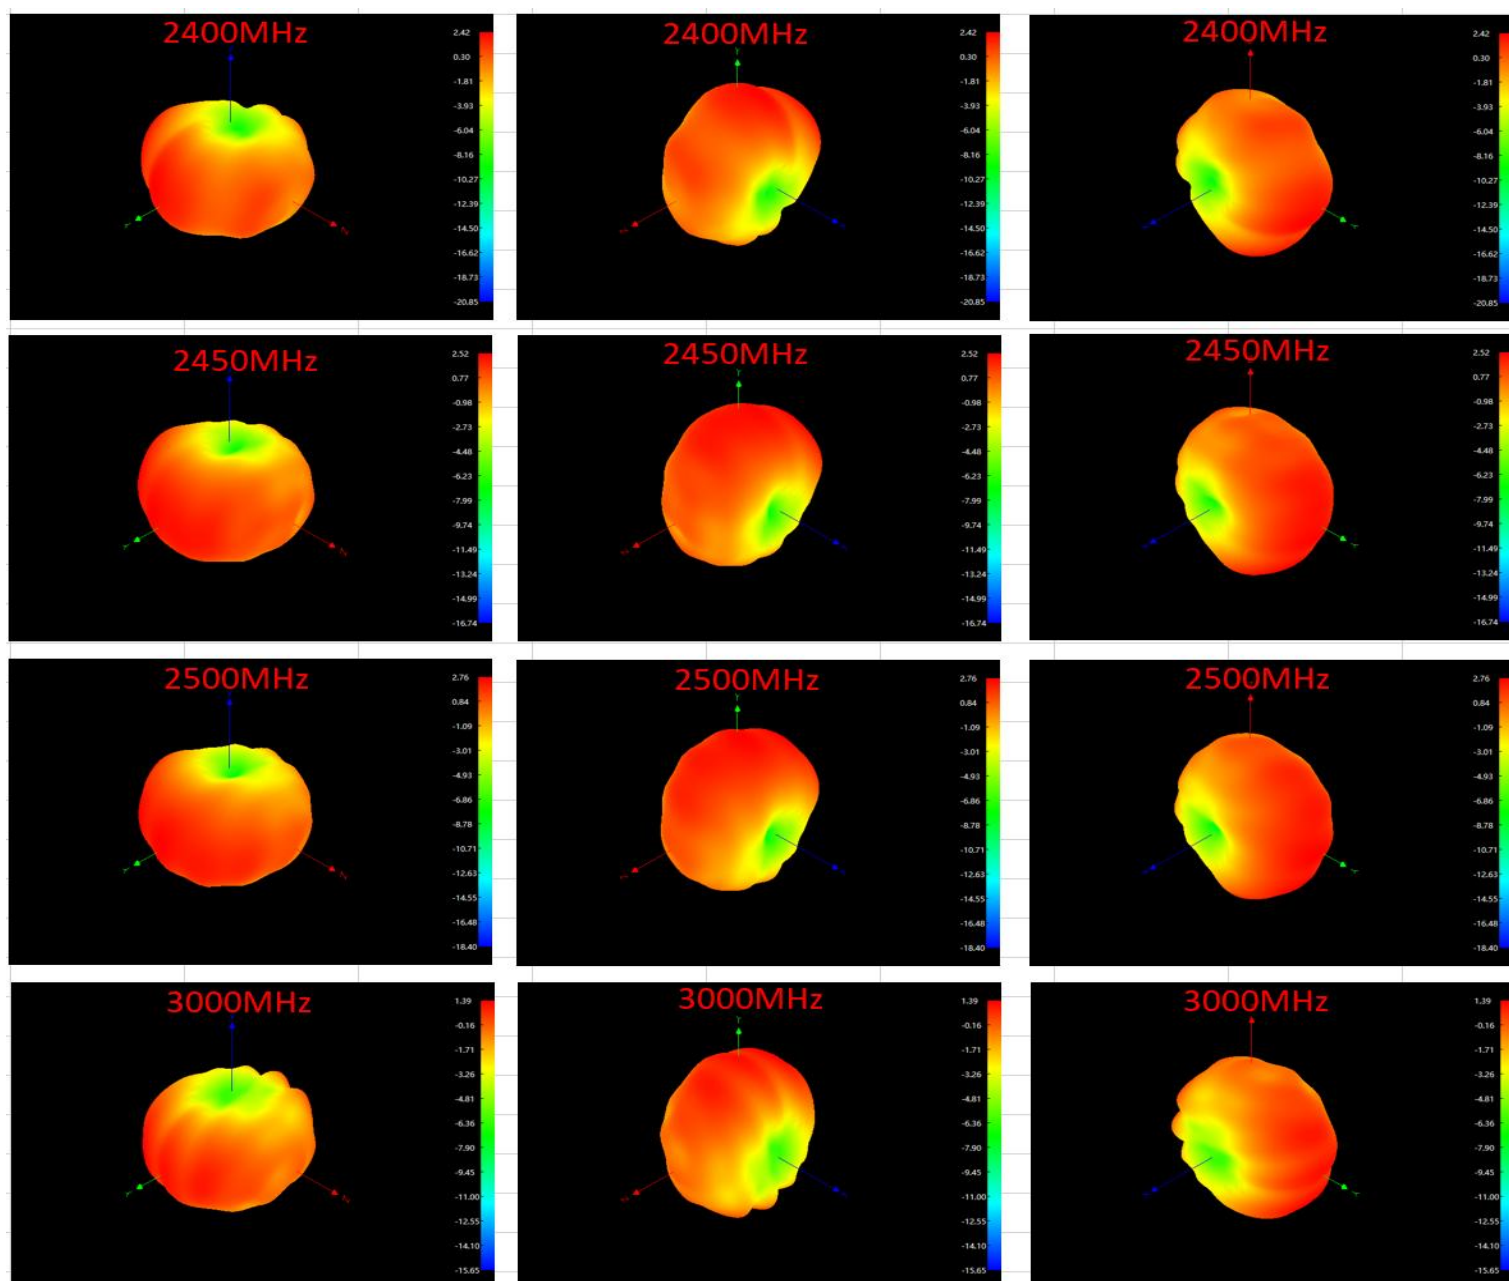

包装 packing

Label location




100PCS/bag

PE:L*W=150X200mm

Put 100PCS into PE bag

PE袋尺寸: 150*200mm

100PCS产品放入PE袋

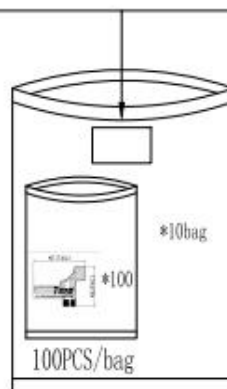


1000PCS/bag

PE:L*W=230X330mm

10 packages of products are
put into PE bags, 1000PCS per bag

PE袋尺寸: 230*330mm

10包产品放入PE袋, 每袋1000PCS

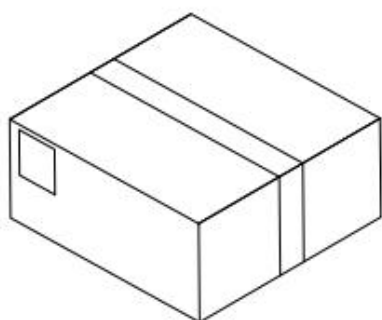


CARTON BOX:L*W*H=290X210X100mm

H seal and label

纸箱尺寸: 290*210*100mm

工字型封箱并贴标签

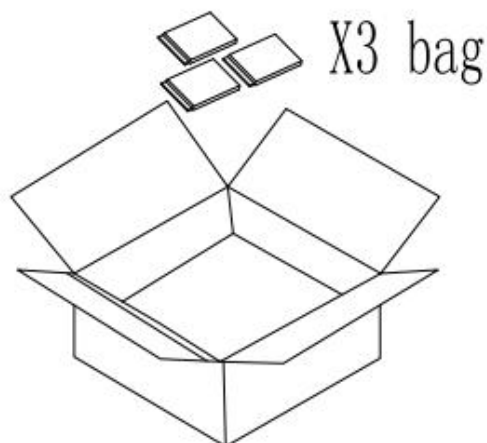

X3 bag

Put 3 packages of products into the carton
将3包产品放入纸箱, 每箱3000PCS