

Test Model

Band-edge Conducted Emissions  
Bluetooth with classic mode  
Channel 0: 2402MHz


GFSK



Test Model


Maximum Conducted Level RBW=100kHz  
Bluetooth with classic mode  
Channel 39: 2441MHz

GFSK

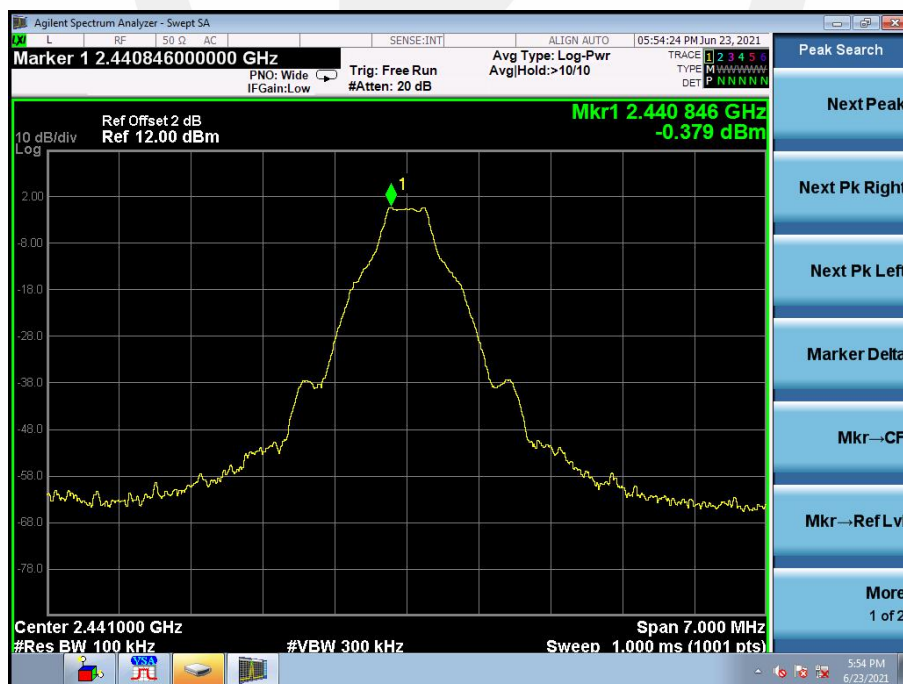


Test Model

Conducted Spurious RF Conducted Emission  
Bluetooth with classic mode  
Channel 39: 2441MHz GFSK

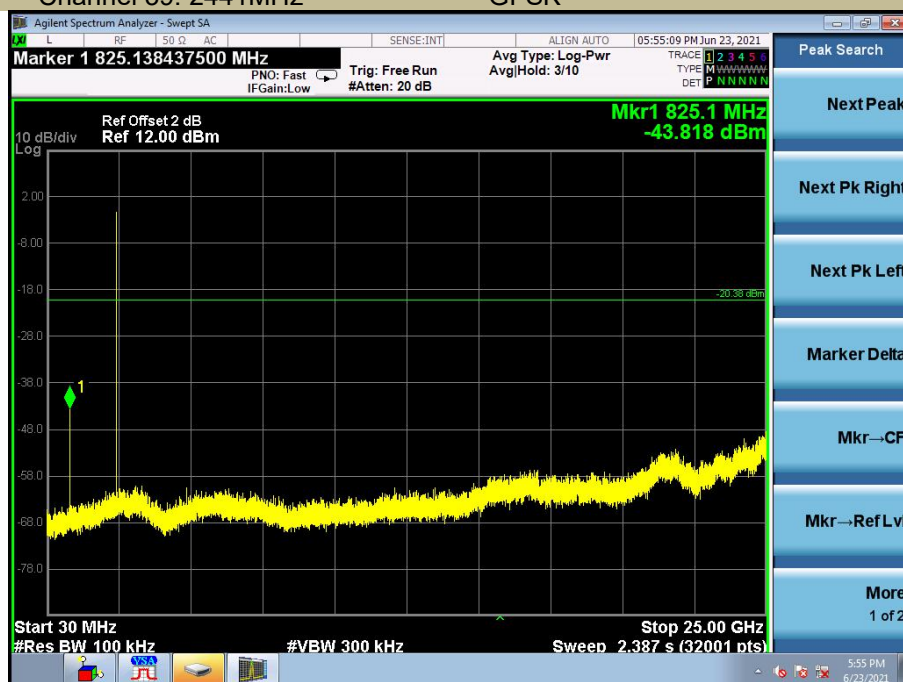


Test Model

Maximum Conducted Level RBW=100kHz  
Bluetooth with classic mode  
Channel 78: 2480MHz GFSK

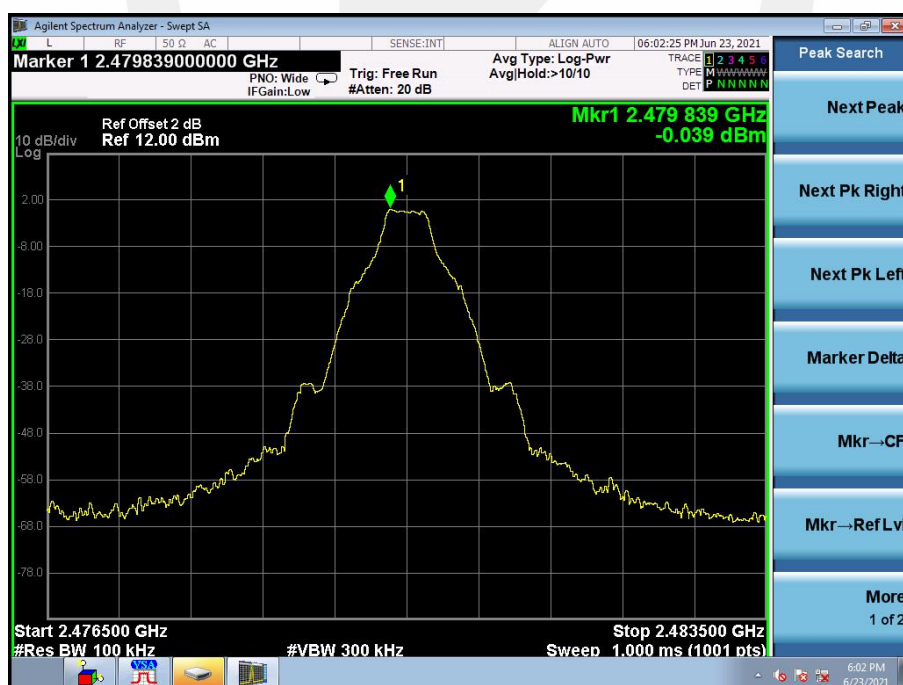


Test Model

Conducted Spurious RF Conducted Emission  
Bluetooth with classic mode  
Channel 78: 2480MHz GFSK

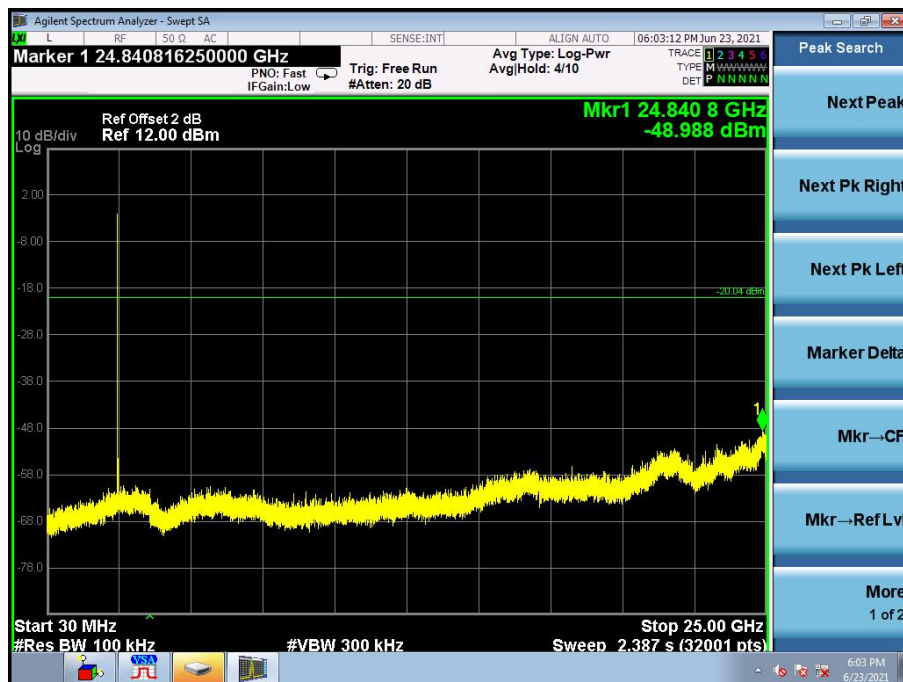


Test Model


Band-edge Conducted Emissions  
Bluetooth with classic mode  
Channel 78: 2480MHz GFSK

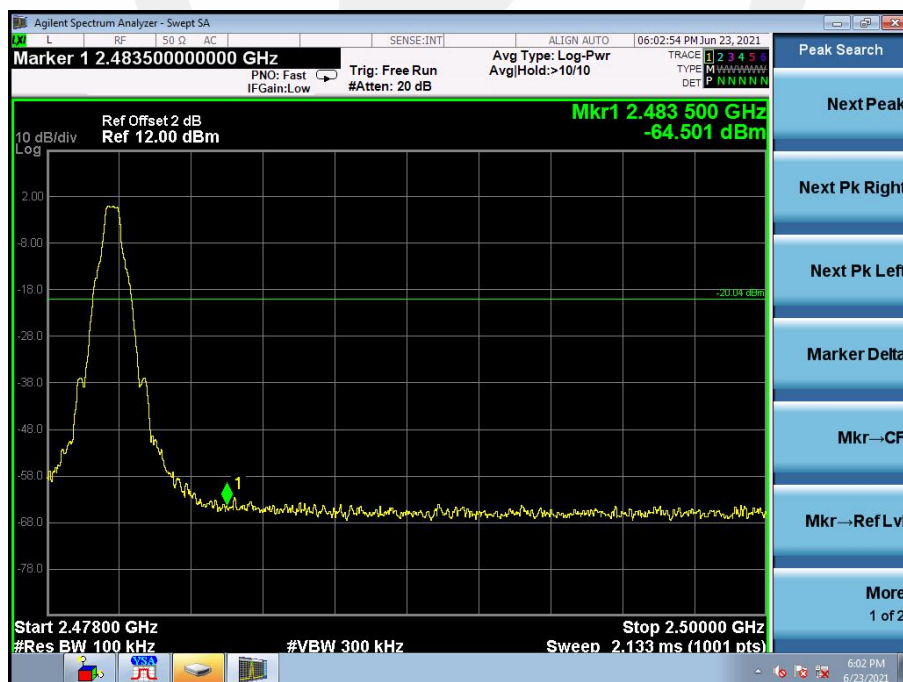

Test Model	Maximum Conducted Level RBW=100kHz Bluetooth with classic mode Hopping	GFSK
------------	--	------

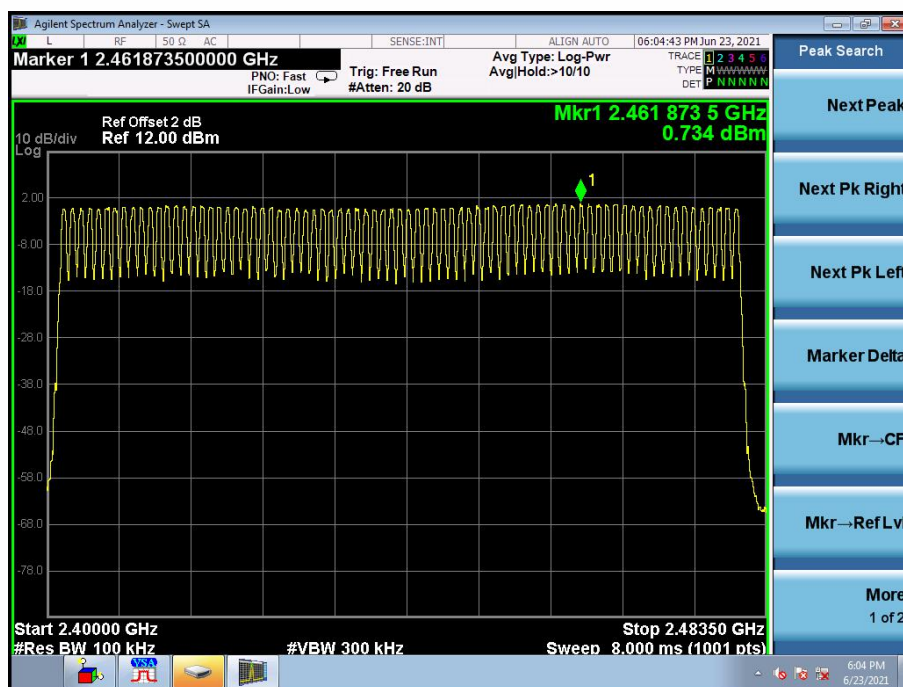


Test Model	Conducted Spurious RF Conducted Emission Bluetooth with classic mode Hopping	GFSK
------------	--	------

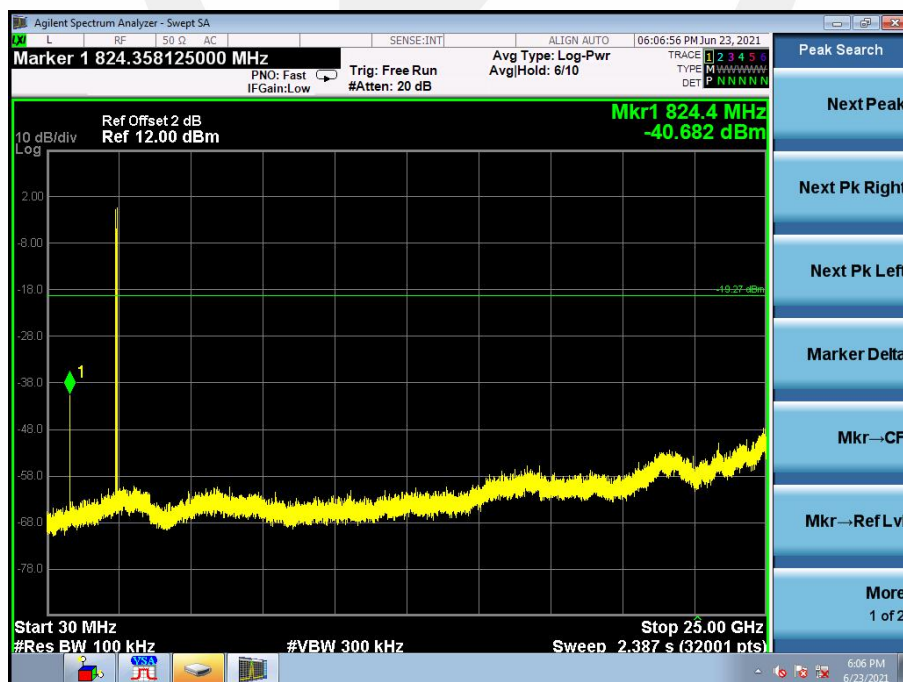

Test Model

Band-edge Conducted Emissions  
Bluetooth with classic mode  
Hopping


GFSK

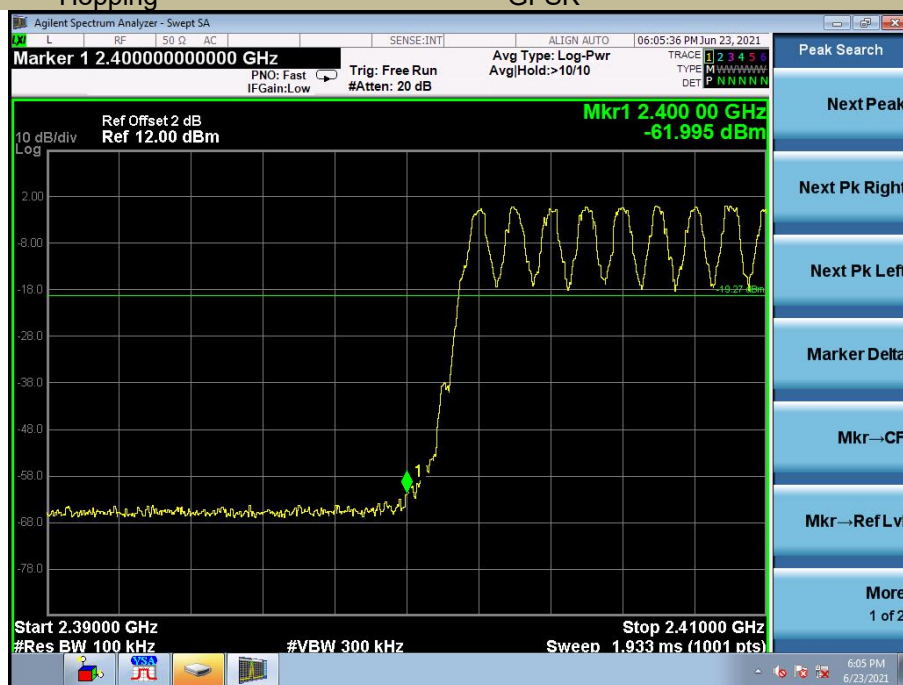

Test Model

Band-edge Conducted Emissions  
Bluetooth with classic mode  
Hopping

GFSK

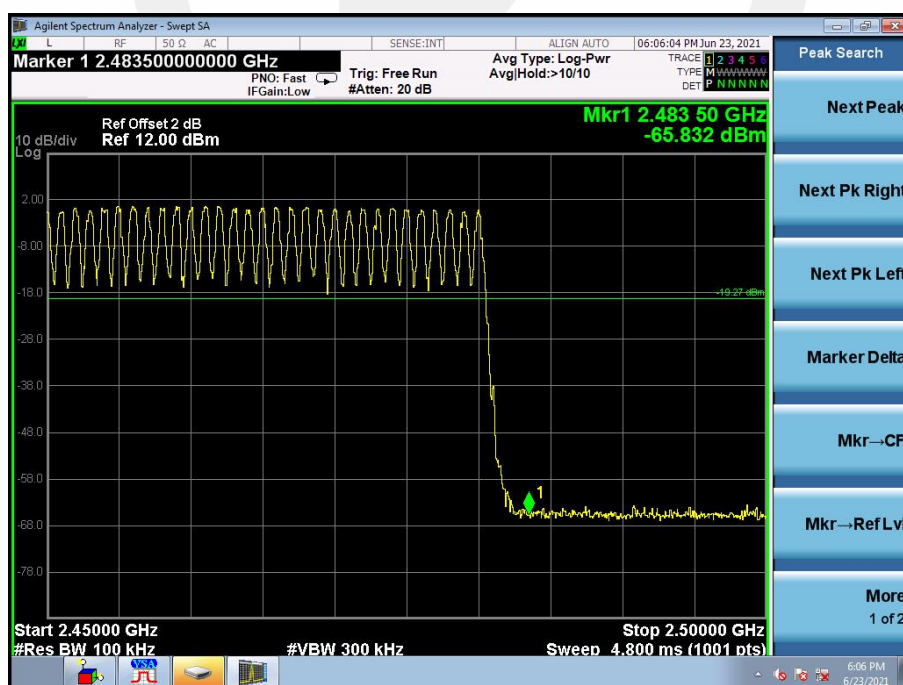



## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 MEAS GUIDANCE V05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).  
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 9.7.5 Test Results

#### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	26°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance}/\text{test distance})$  (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
5730.395	V	46.71	37.25	74	54	-27.29	-16.75
11428.95	V	56.69	45.19	74	54	-17.31	-8.81
14341.94	V	56.72	45.73	74	54	-17.28	-8.27
7201.349	H	51.15	40.36	74	54	-22.85	-13.64
12131.87	H	56.46	45.07	74	54	-17.54	-8.93
14656.24	H	58.02	46.36	74	54	-15.98	-7.64

Test mode: GFSK Frequency: Channel 39: 2441MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
7271.417	V	51.84	40.68	74	54	-22.16	-13.32
12049.74	V	56.26	45.26	74	54	-17.74	-8.74
14730.56	V	57.99	47.19	74	54	-16.01	-6.81
7237.867	H	51.40	41.35	74	54	-22.60	-12.65
11813.51	H	55.71	43.65	74	54	-18.29	-10.35
14818.1	H	58.27	46.79	74	54	-15.73	-7.21

Test mode: GFSK Frequency: Channel 78: 2480MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4801.334	V	48.31	37.56	74	54	-25.69	-16.44
7490.065	V	51.59	42.07	74	54	-22.41	-11.93
11085.7	V	56.44	45.32	74	54	-17.56	-8.68
4801.334	H	47.45	36.28	74	54	-26.55	-17.72
11116.18	H	56.28	45.13	74	54	-17.72	-8.87
14429.26	H	58.52	47.32	74	54	-15.48	-6.68

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



# Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2353.608	H	55.71	74	-18.29	45.39	54	-8.61
2354.044	V	44.40	74	-29.60	32.79	54	-21.21

Test mode: GFSK Frequency: Channel 78: 2480MHz


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2483.997	H	46.08	74	-27.92	35.76	54	-18.24
2484.092	V	40.98	74	-33.02	30.53	54	-23.47

Test mode: GFSK Frequency: Hopping


Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2390.000	H	54.46	74	-19.54	43.29	54	-10.71
2483.500	H	57.12	74	-16.88	45.67	54	-8.33
2390.000	V	38.21	74	-35.79	29.37	54	-24.63
2483.500	V	39.36	74	-34.64	30.13	54	-23.87

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4)The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	Bluetooth with classic mode		
	Channel 0: 2402MHz	GFSK	H
		Test By: XW	

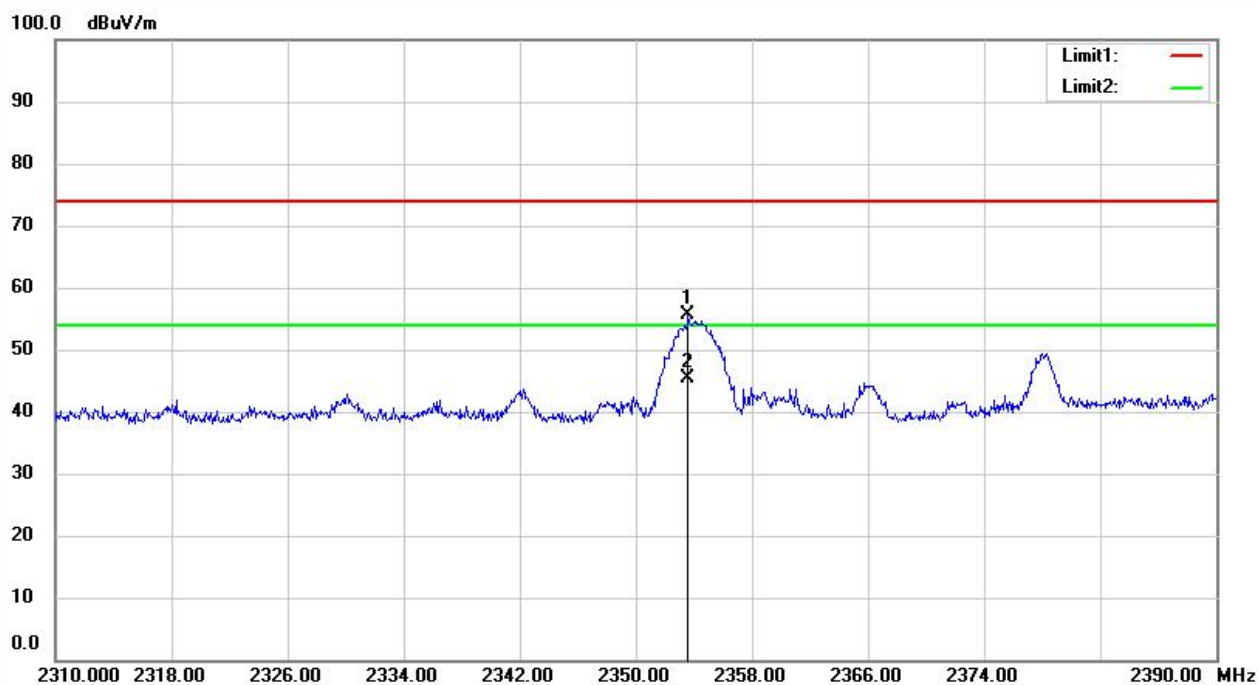


Test Model	Spurious Emission in Restricted Band 2310-2390MHz		
	Bluetooth with classic mode		
	Channel 0: 2402MHz	GFSK	V
		Test By: XW	

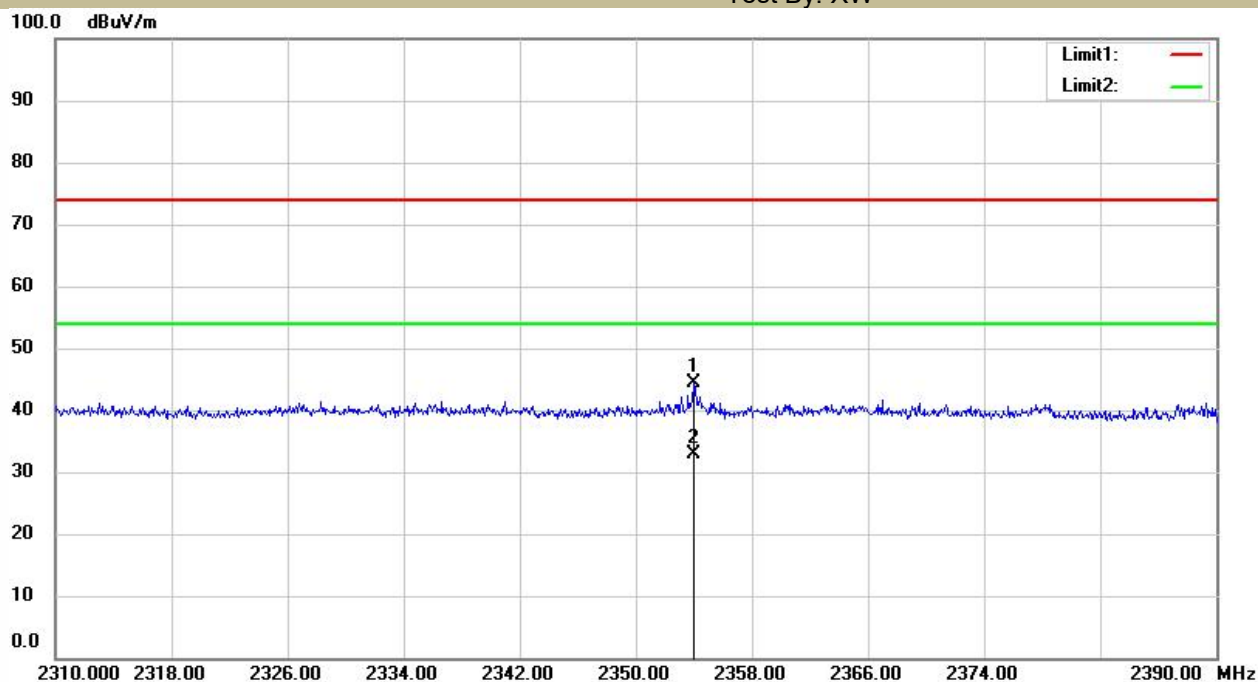


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	Bluetooth with classic mode		
	Channel 78: 2480MHz	GFSK	H
		Test By: XW	

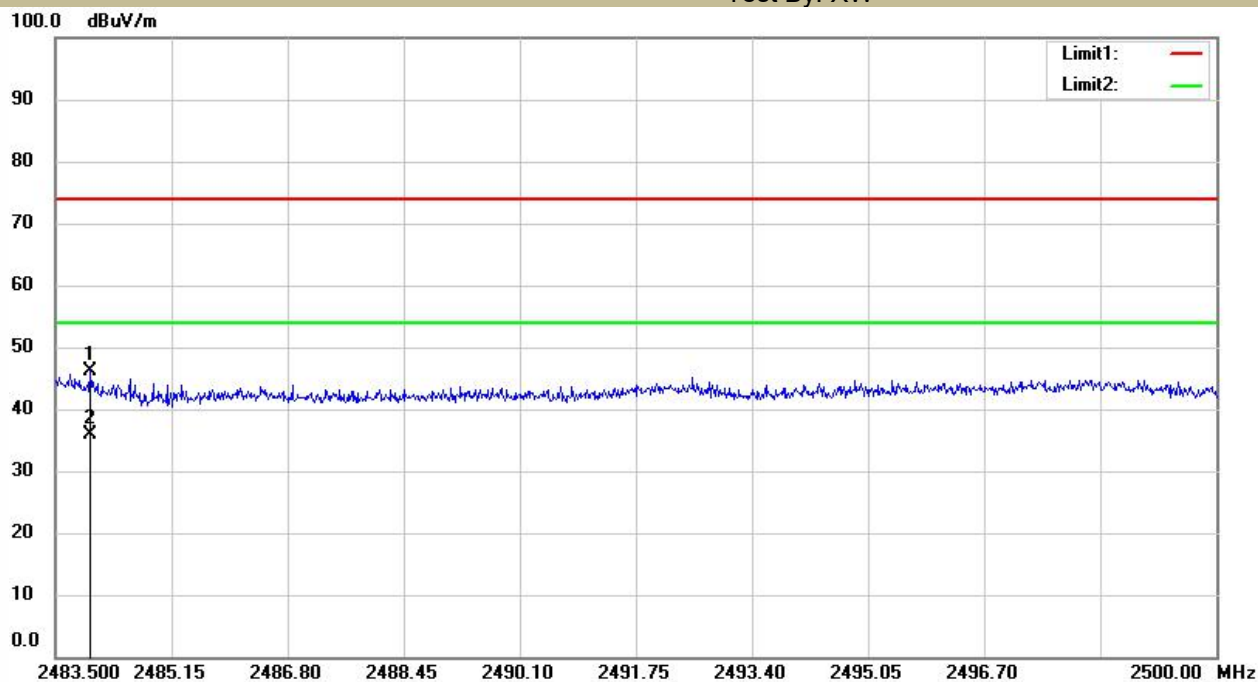


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz		
	Bluetooth with classic mode		
	Channel 78: 2480MHz	GFSK	V
		Test By: XW	

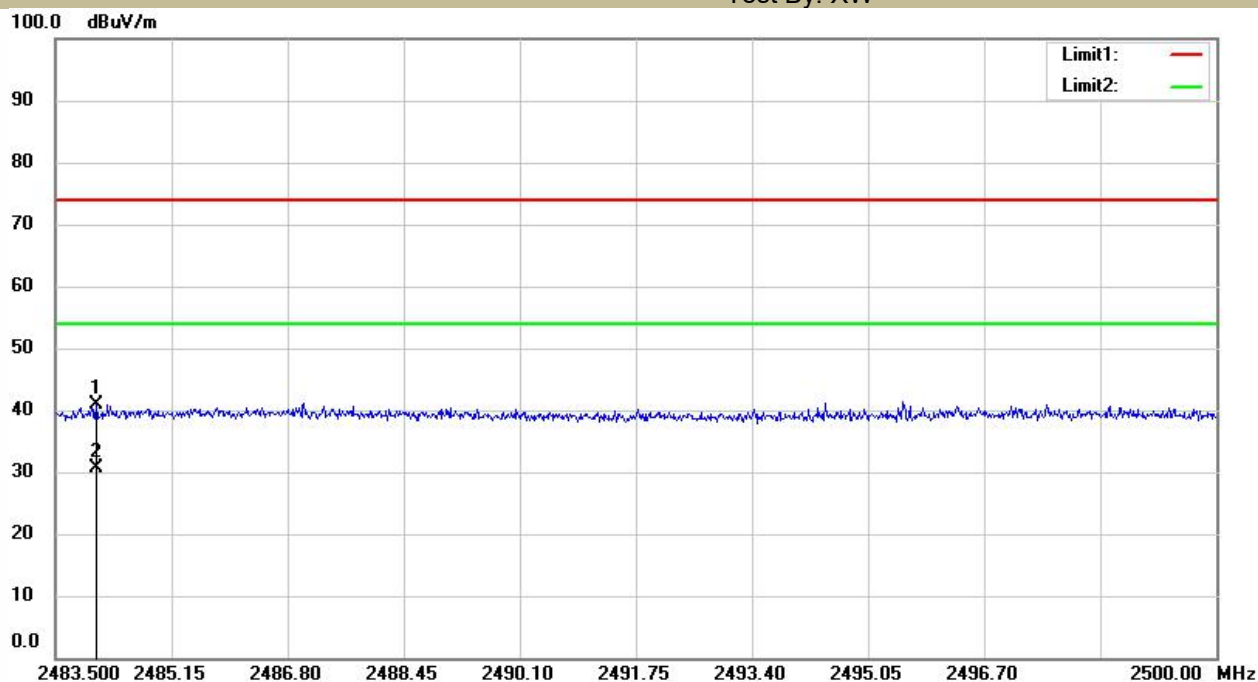

Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
	Bluetooth with classic mode
	Hopping
	GFSK
	Test By: XW
	H

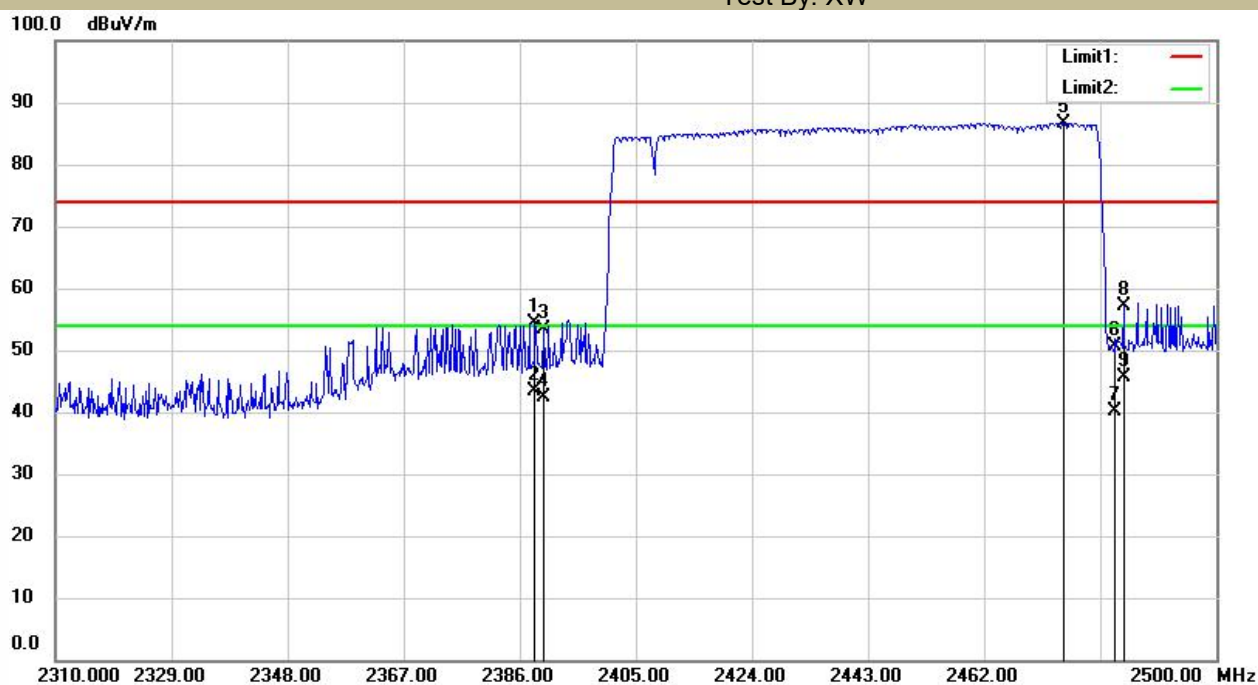


Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz
	Bluetooth with classic mode
	Hopping
	GFSK
	Test By: XW
	V

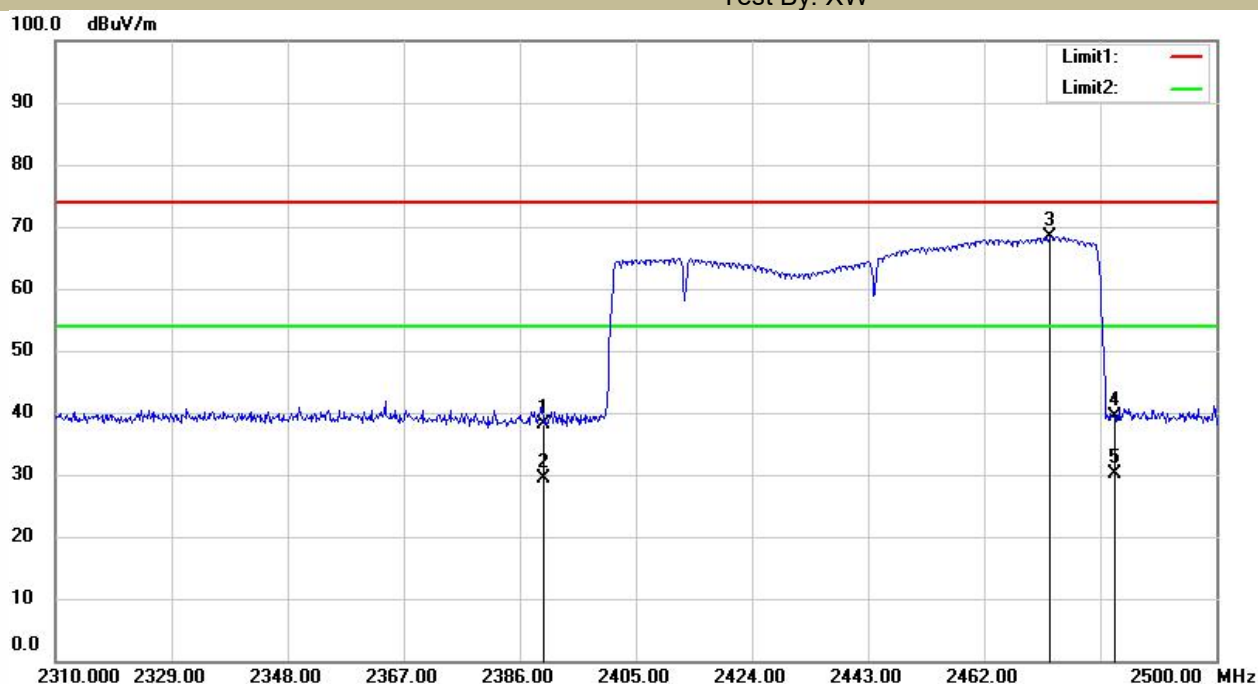

■ Spurious Emission below 1GHz(30MHz to 1GHz)

All Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) modes have been tested, and the worst results has been recorded on the follow page.

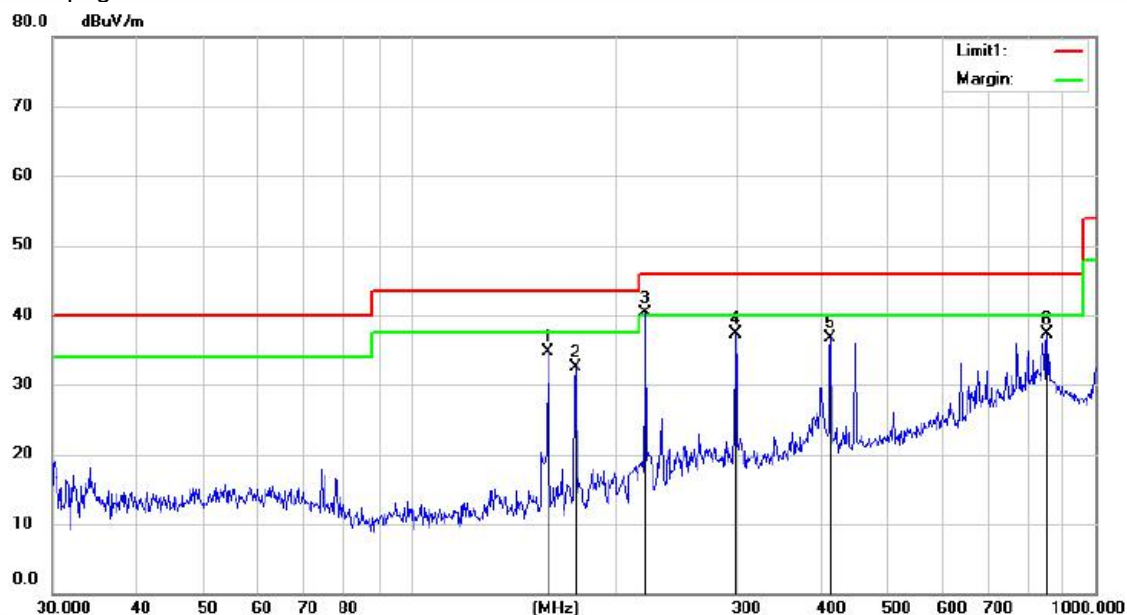

Site: 3m Chamber #1

Polarization: **Vertical**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz


Humidity: 48 %

Mode: BT-2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		159.0160	48.68	-13.88	34.80	43.50	-8.70	QP		
2		174.4241	46.29	-13.82	32.47	43.50	-11.03	QP		
3	*	221.0043	53.43	-13.09	40.34	46.00	-5.66	QP		
4		299.0536	46.31	-9.03	37.28	46.00	-8.72	QP		
5		411.1026	42.92	-6.20	36.72	46.00	-9.28	QP		
6		851.0353	34.47	2.85	37.32	46.00	-8.68	QP		



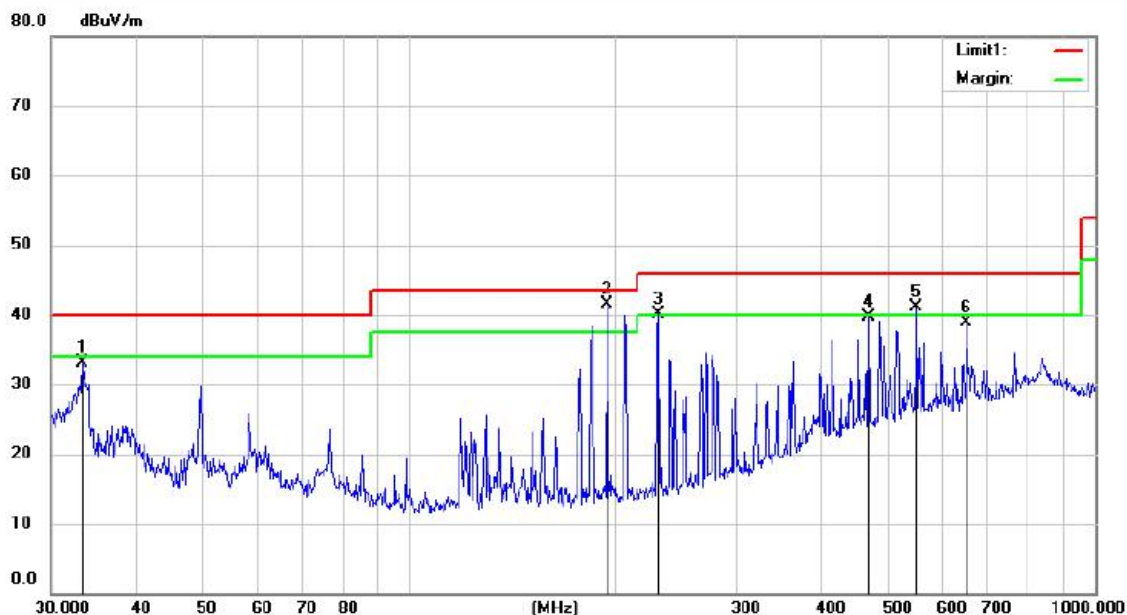

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 48 %

Mode:BT-2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		33.4156	47.37	-14.24	33.13	40.00	-6.87	QP		
2	*	194.7947	55.07	-13.49	41.58	43.50	-1.92	QP		
3	!	231.0080	52.74	-12.55	40.19	46.00	-5.81	QP		
4		467.4398	45.36	-5.71	39.65	46.00	-6.35	QP		
5	!	549.0195	45.16	-4.07	41.09	46.00	-4.91	QP		
6		651.0850	40.64	-1.77	38.87	46.00	-7.13	QP		

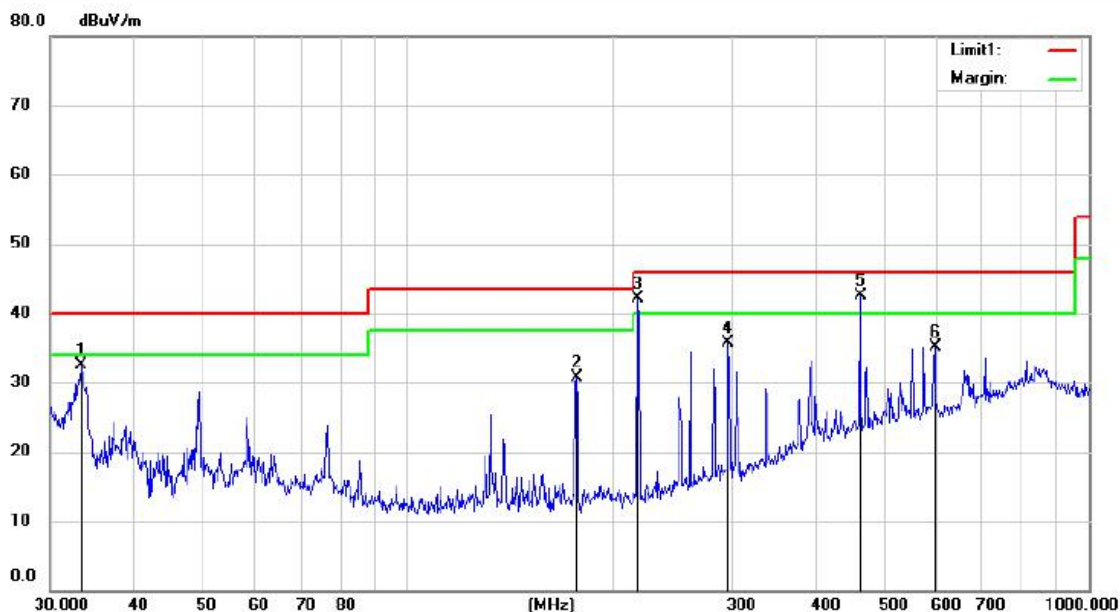

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 48 %

Mode:BT-2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.3864	46.82	-14.24	32.58	40.00	-7.42	QP		
2		177.5870	44.71	-13.94	30.77	43.50	-12.73	QP		
3	!	218.9793	55.28	-13.19	42.09	46.00	-3.91	QP		
4		297.0938	44.88	-9.16	35.72	46.00	-10.28	QP		
5	*	463.1570	48.40	-5.83	42.57	46.00	-3.43	QP		
6		595.1330	38.24	-3.08	35.16	46.00	-10.84	QP		

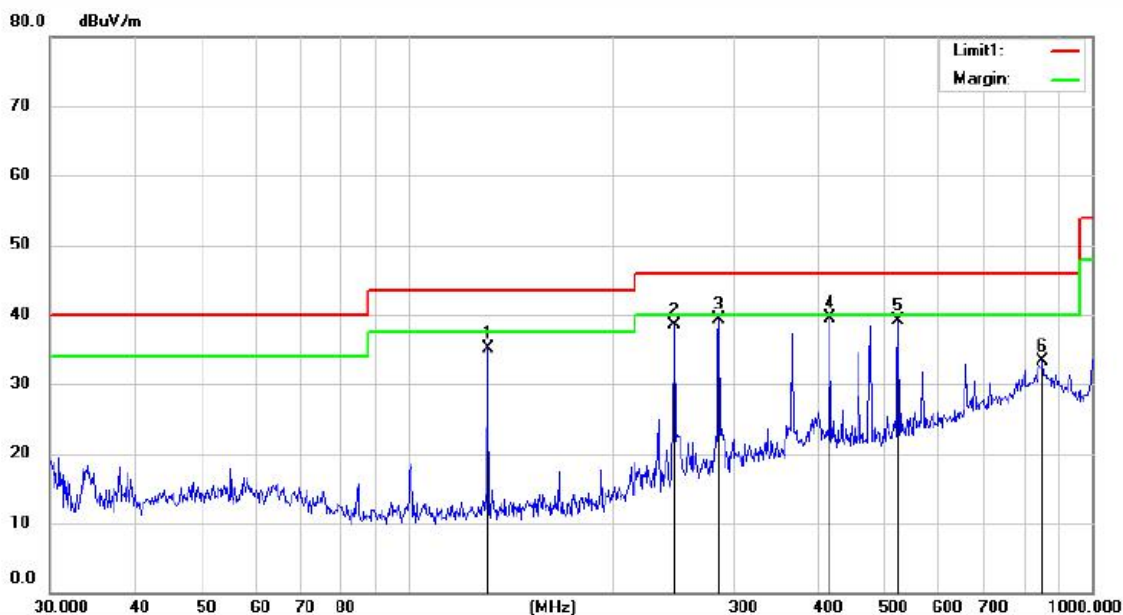

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 48 %

Mode: BT-2441

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		131.0091	49.43	-14.23	35.20	43.50	-8.30	QP		
2		245.1975	50.38	-11.91	38.47	46.00	-7.53	QP		
3		285.1017	49.09	-9.81	39.28	46.00	-6.72	QP		
4	*	414.7223	45.68	-6.16	39.52	46.00	-6.48	QP		
5		521.1166	44.00	-4.92	39.08	46.00	-6.92	QP		
6		848.8001	30.45	2.92	33.37	46.00	-12.63	QP		

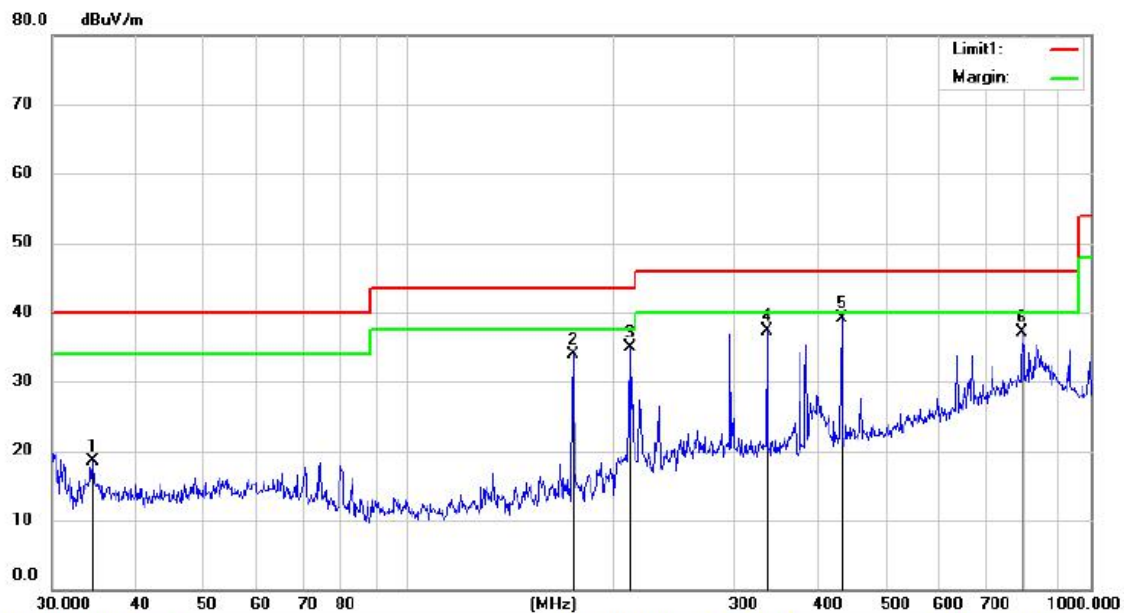

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B


Power: AC 120V/60Hz

Humidity: 48 %

Mode: BT-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		34.4115	32.58	-14.02	18.56	40.00	-21.44	QP		
2		174.4241	47.69	-13.82	33.87	43.50	-9.63	QP		
3		211.1560	48.29	-13.41	34.88	43.50	-8.62	QP		
4		335.0057	45.27	-8.03	37.24	46.00	-8.76	QP		
5	*	431.0316	44.77	-5.66	39.11	46.00	-6.89	QP		
6		794.7883	35.26	1.82	37.08	46.00	-8.92	QP		

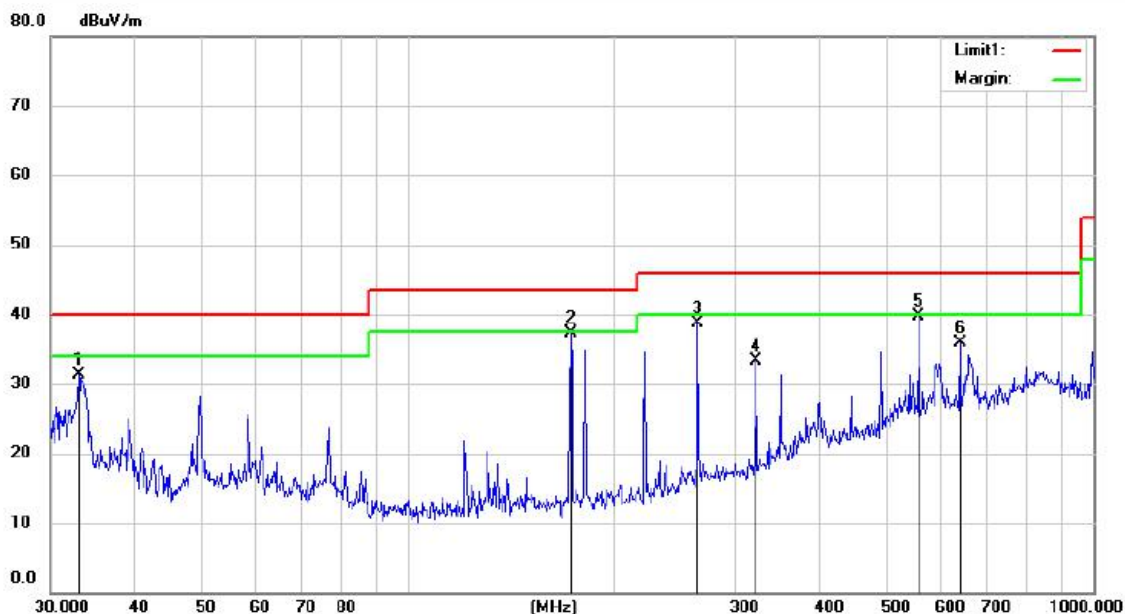

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 29.5 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 48 %

Mode:BT-2480

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		33.0515	45.64	-14.29	31.35	40.00	-8.65	QP		
2	*	172.9774	51.17	-13.88	37.29	43.50	-6.21	QP		
3		265.0941	49.49	-10.75	38.74	46.00	-7.26	QP		
4		322.4712	41.85	-8.63	33.22	46.00	-12.78	QP		
5		557.0185	43.64	-3.86	39.78	46.00	-6.22	QP		
6		638.9285	38.02	-2.21	35.81	46.00	-10.19	QP		



## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

### 9.8.3 Test Configuration


Test according to clause 7.3 conducted emission test setup

### 9.8.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

Pass

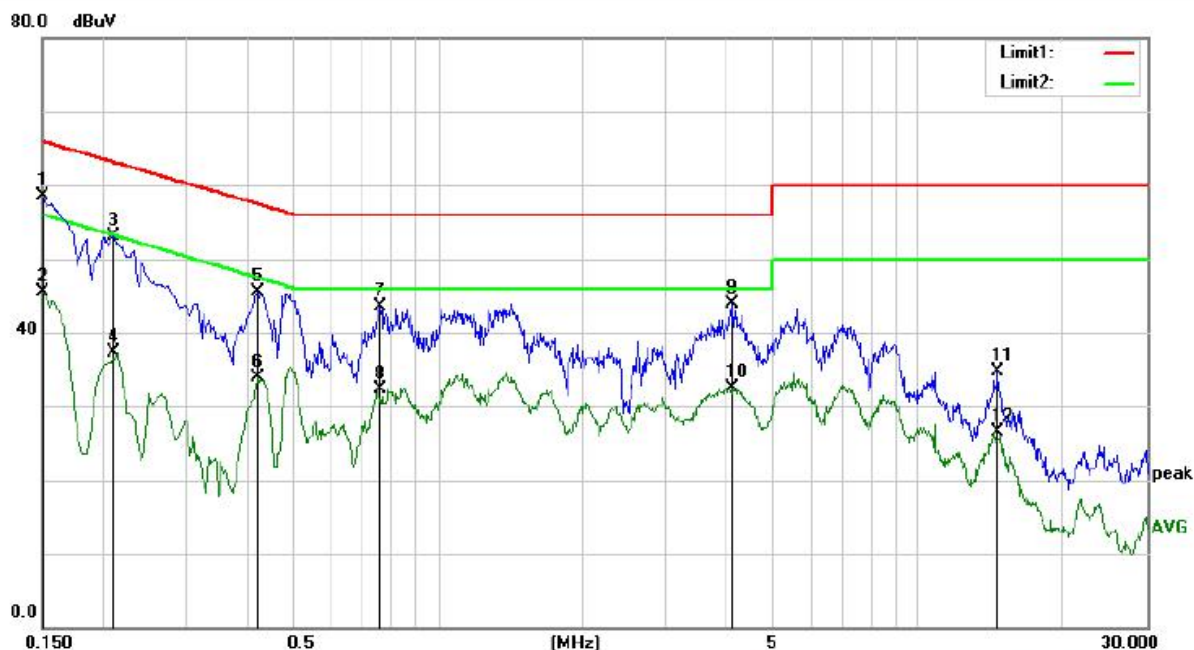

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	dBuV	Factor	ment	dBuV	dB	Detector	Comment
1	*	0.1500	48.05	10.48	58.53	65.91	-7.38	QP	
2		0.1500	35.11	10.48	45.59	56.00	-10.41	AVG	
3		0.2104	42.71	10.43	53.14	63.13	-9.99	QP	
4		0.2104	26.83	10.43	37.26	53.19	-15.93	AVG	
5		0.4213	35.04	10.38	45.42	57.41	-11.99	QP	
6		0.4213	23.43	10.38	33.81	47.42	-13.61	AVG	
7		0.7590	33.23	10.36	43.59	56.00	-12.41	QP	
8		0.7590	21.90	10.36	32.26	46.00	-13.74	AVG	
9		4.1135	33.53	10.45	43.98	56.00	-12.02	QP	
10		4.1135	21.99	10.45	32.44	46.00	-13.56	AVG	
11		14.6715	23.93	10.71	34.64	60.00	-25.36	QP	
12		14.6715	15.87	10.71	26.58	50.00	-23.42	AVG	

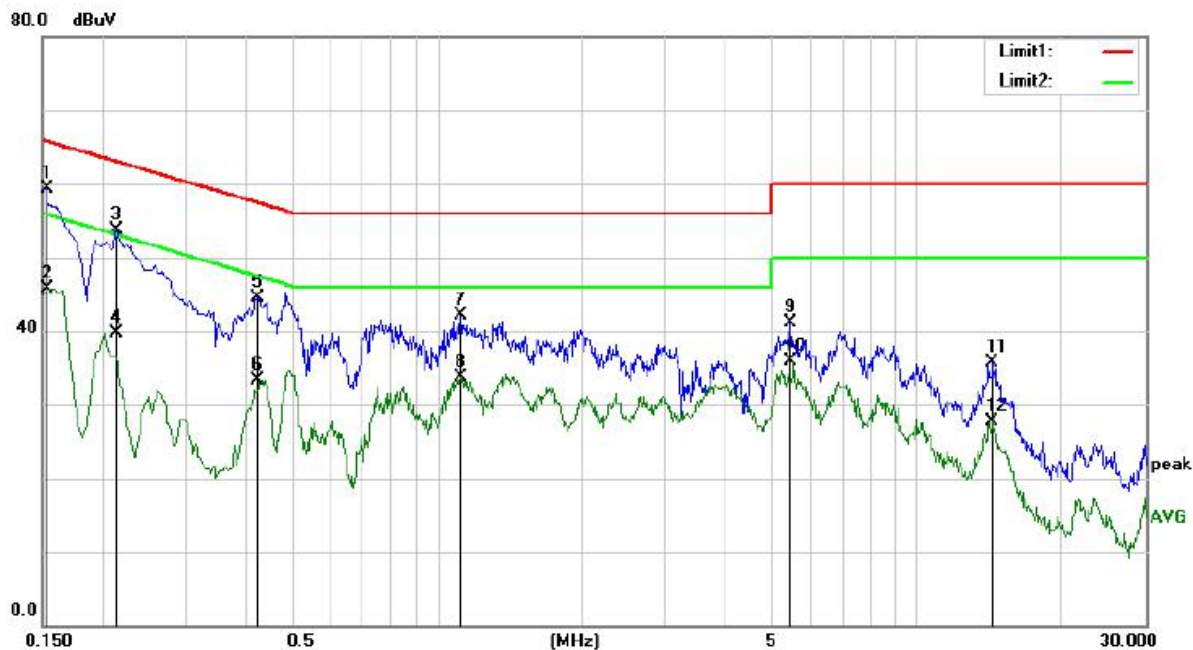

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1	*	0.1532	48.76	10.48	59.24	65.74	-6.50	QP	
2		0.1532	35.29	10.48	45.77	55.82	-10.05	AVG	
3		0.2140	43.37	10.43	53.80	62.99	-9.19	QP	
4		0.2140	29.24	10.43	39.67	53.05	-13.38	AVG	
5		0.4213	34.15	10.38	44.53	57.41	-12.88	QP	
6		0.4213	22.89	10.38	33.27	47.42	-14.15	AVG	
7		1.1171	31.73	10.40	42.13	56.00	-13.87	QP	
8		1.1171	23.27	10.40	33.67	46.00	-12.33	AVG	
9		5.4474	30.51	10.52	41.03	60.00	-18.97	QP	
10		5.4474	25.29	10.52	35.81	50.00	-14.19	AVG	
11		14.3640	25.04	10.71	35.75	60.00	-24.25	QP	
12		14.3640	16.95	10.71	27.66	50.00	-22.34	AVG	

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

PASS.

The EUT is LDS Antenna for BT, the gain is 0.89dBi.

Note: ☒ Antenna use a permanently attached antenna which is not replaceable.  
☐ Not using a standard antenna jack or electrical connector for antenna replacement  
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

\*\*\* End of Report \*\*\*