

FCC TEST REPORT

Product Name: Mobile Phone
Trade Mark: BLU
Model No.: G50 MEGA 2022
Add. Model No.: N/A
Report Number: 220222014EMC-1
Test Standards: FCC 47 CFR Part 15 Subpart B
Test Result: PASS
Date of Issue: April 1, 2022

Prepared for:

BLU Products, Inc
10814 NW 33rd St # 100 Doral, FL 33172, USA

Prepared by:


Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Calvin Chen
Senior Project Engineer

Reviewed by:



Eric Yu
Project Supervisor

Approved by:



Kevin Liang
Assistant Manager

Date:

April 1, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Version

Version No.	Date	Description
V1.0	April 1, 2022	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	4
1.4 TEST LOCATION	5
1.5 TEST FACILITY	5
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	6
2. TEST SUMMARY	6
3. EQUIPMENT LIST	7
4. TEST CONFIGURATION	8
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	8
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	8
4.1.2 RECORD OF NORMAL ENVIRONMENT	8
4.2 TEST MODES	8
4.3 TEST SETUP	9
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	9
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	10
4.4 SYSTEM TEST CONFIGURATION	10
5. REFERENCE DOCUMENTS FOR TESTING	11
6. EMC REQUIREMENTS SPECIFICATION	11
6.1 RADIATED EMISSION	11
6.2 CONDUCTED EMISSION	16
APPENDIX 1 PHOTOS OF TEST SETUP	19
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	19

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172, USA
Manufacturer:	BLU Products, Inc
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Mobile Phone
Model No.:	G50 MEGA 2022
Add. Model No.:	N/A
Trade Mark:	BLU
DUT Stage:	Production Unit
Rated Voltage:	<input checked="" type="checkbox"/> Powered by USB port (5Vdc) <input checked="" type="checkbox"/> 100-240V~50/60Hz, 0.2A and/or 3.85Vdc (1x3.85V Li-ion Rechargeable battery)
Classification of digital devices:	Class B
Highest Internal Frequency:	2600 MHz
Software Version:	BLU_G0670WW_V11.0.02.00_GENERIC_18-01-2022_0101 (Provided by the customer)
Hardware Version:	FS176-MB-V5.0(Provided by the customer)
Sample Received Date:	January 27, 2022
Sample Tested Date:	February 18, 2022 to February 19, 2022

1.2.2 Description of Accessories

Adapter	
Model No.:	US-JY-2000
Input:	100-240 V~50/60 Hz 0.4 A
Output:	5.0 V \equiv 2000 mA

Battery	
Model No.:	C926404400P
Battery Type:	Lithium-ion Polymer Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.45 Vdc
Rated Capacity:	4000 mAh

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.20 Meter

1.3 DESCRIPTION OF SUPPORT UNITS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	Lenovo	E450	SL10G10780	UnionTrust
AC/DC Adapter	Lenovo	ADLX65NLC3A	N/A	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust
Headphone	HYUNDAI	CJC-8213	N/A	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.2 dB
2	Conducted emission 150KHz-30MHz	±2.7 dB
3	Radiated emission 9KHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-26GHz	± 4.6 dB
7	Radiated emission 26GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Jan. 22, 2021	Jan. 21, 2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Nov. 05, 2021	Nov. 04, 2022
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Nov. 05, 2022	Nov. 04, 2022
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Apr. 30, 2021	Apr. 29, 2023
<input type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 05, 2021	Nov. 04, 2022
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Nov. 11, 2021	Nov. 10, 2023
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	Apr. 30, 2021	Apr. 29, 2023
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	Jun. 19, 2020	Jun. 18, 2022
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 14, 2020	Nov. 13, 2022
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Nov. 05, 2021	Nov. 04, 2022
<input type="checkbox"/>	LISN	ETS-Lindgren	3816/2SH	00201088	Nov. 05, 2021	Nov. 04, 2022
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	3.85	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Conducted Emission	24.5	46	101.14	220222014-A04/6	Asia Yan
Radiated Emission	23.1	52	100.20	220222014-A04/6	Lucas Ouyang

4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: Charging from 120 Vac + MP4 playing (With TF Card) + Earphone Test Mode 2: Charging from 120 Vac + Camera (Front)+ With TF Card Test Mode 3: Charging from 120 Vac + Camera (Rear) + With TF Card + Light on Test Mode 4: Charging from 120 Vac + FM (With Earphone) +Light on Test Mode 5: Charging from 240 Vac + Worse from mode 1~4 + GPS on Test Mode 6: Battery + Worse from mode 1~4 + GPS on Test Mode 7: USB Cable (data transfer with notebook) + With TF Card Test Mode 8: Single SIM phone + Worse from mode 1~7
Conducted Emission	Test Mode 1: Charging from 120 Vac + MP4 playing (With TF Card) + Earphone Test Mode 2: Charging from 120 Vac + Camera (Front)+ With TF Card Test Mode 3: Charging from 120 Vac + Camera (Rear) + With TF Card + Light on Test Mode 4: Charging from 120 Vac + FM (With Earphone) +Light on Test Mode 5: Charging from 240 Vac + Worse from mode 4 + GPS on Test Mode 6: USB Cable (data transfer with notebook) + With TF Card Test Mode 7: Single SIM phone + Worse from mode 1~6
Remark: The above test modes in boldface were the worst cases, only the test data of these modes were reported.	

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

Figure 1. 30MHz to 1GHz



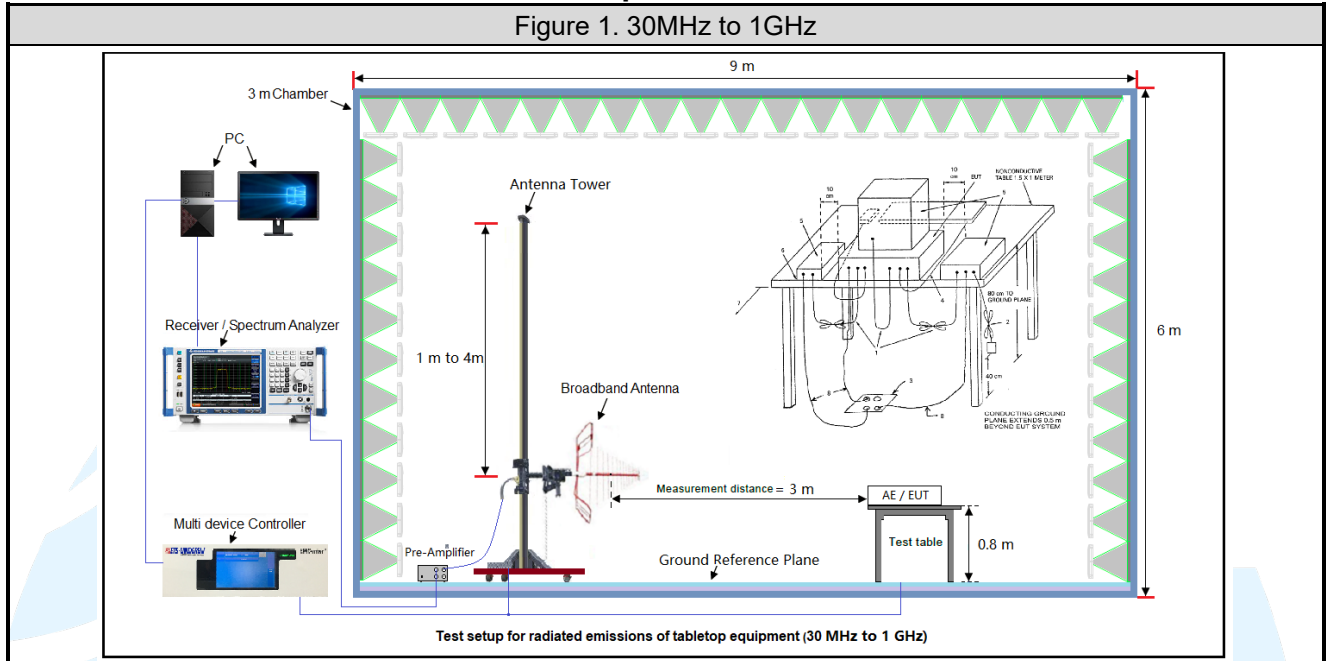


Figure 2. Above 1GHz

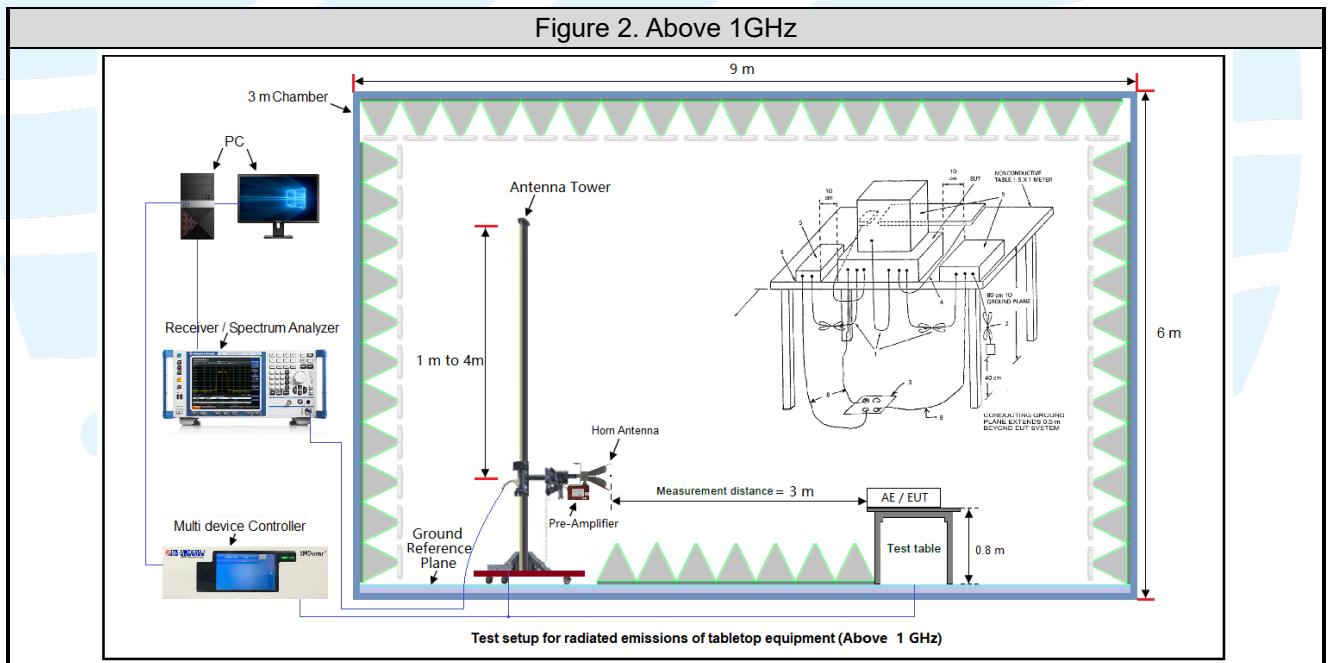

4.3.2 For Conducted Emissions test setup

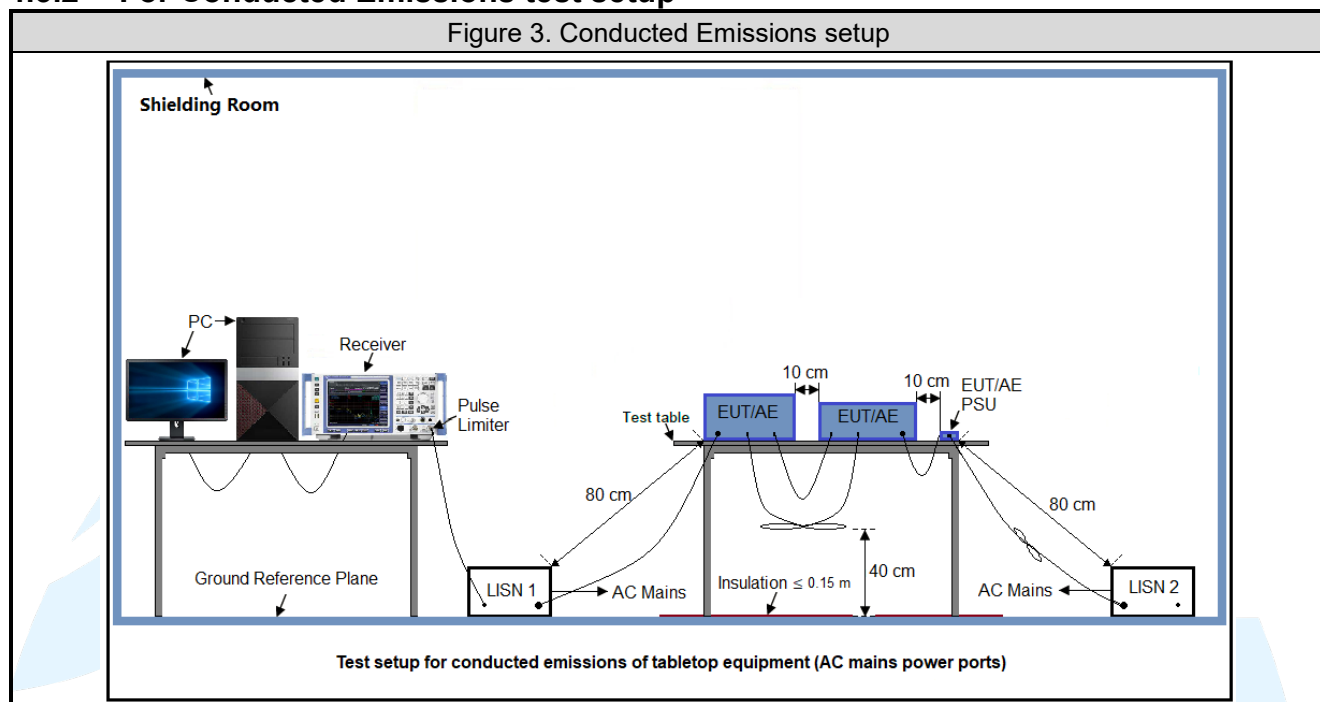

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
3	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
4	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class B devices

Frequency (MHz)	limits at 3m (dB μ V/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

2. Above 1GHz test procedure as below:

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Below 1GHz(Quasi Peak):

Test Mode 7: USB Cable (data transfer with notebook) + With TF Card (Worst Case)

Horizontal

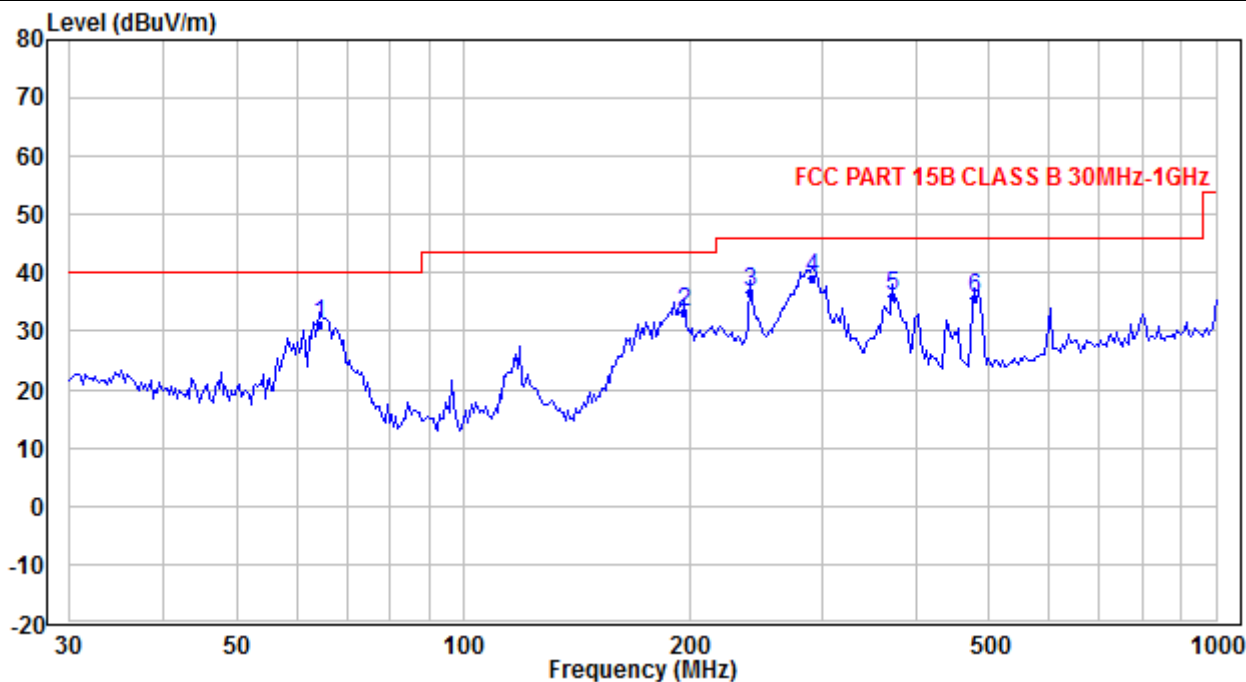

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	64.532	48.44	-17.07	31.37	40.00	-8.63	QP
2	195.870	43.73	-10.53	33.20	43.50	-10.30	QP
3	240.144	45.71	-9.09	36.62	46.00	-9.38	QP
4	290.317	45.78	-6.76	39.02	46.00	-6.98	QP
5	371.268	41.57	-5.47	36.10	46.00	-9.90	QP
6	478.139	38.96	-3.44	35.52	46.00	-10.48	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Vertical

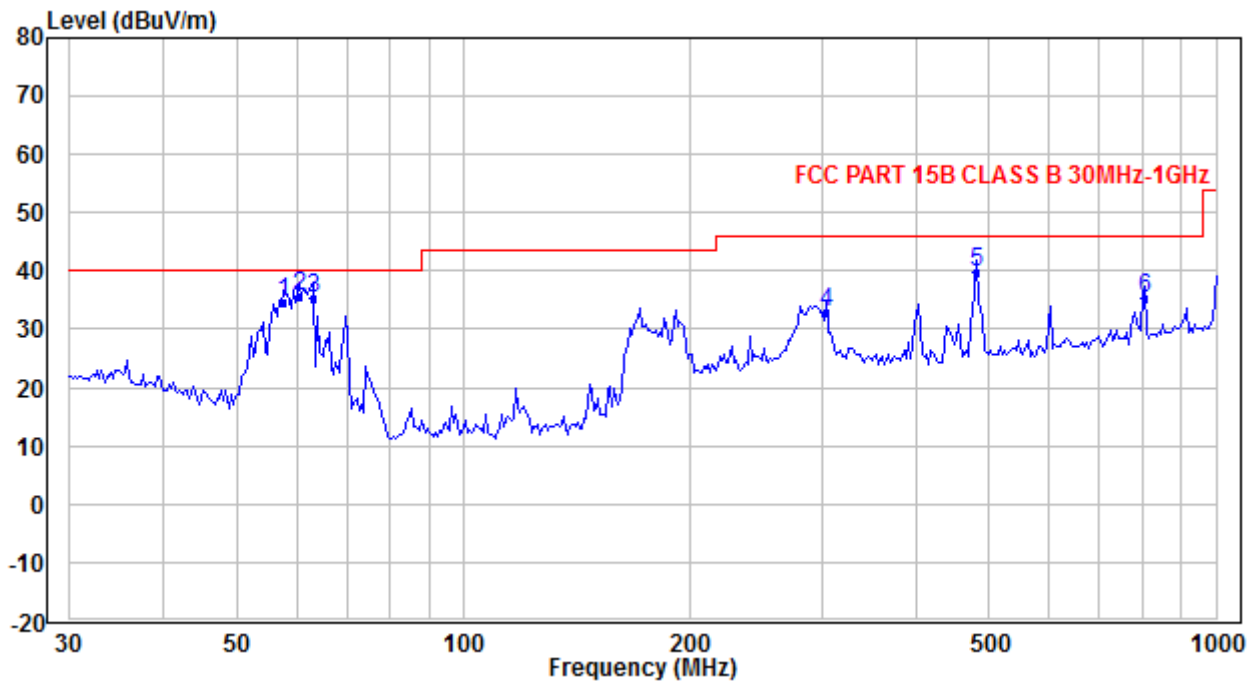

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	57.669	51.85	-17.30	34.55	40.00	-5.45	QP
2	60.577	53.19	-17.52	35.67	40.00	-4.33	QP
3	63.186	52.37	-17.19	35.18	40.00	-4.82	QP
4	302.819	39.35	-6.54	32.81	46.00	-13.19	QP
5	481.511	43.18	-3.32	39.86	46.00	-6.14	QP
6	804.252	32.90	2.60	35.50	46.00	-10.50	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Above 1GHz(Peak & Average)

Test Mode 7: USB Cable (data transfer with notebook) + With TF Card (Worst Case)

Horizontal

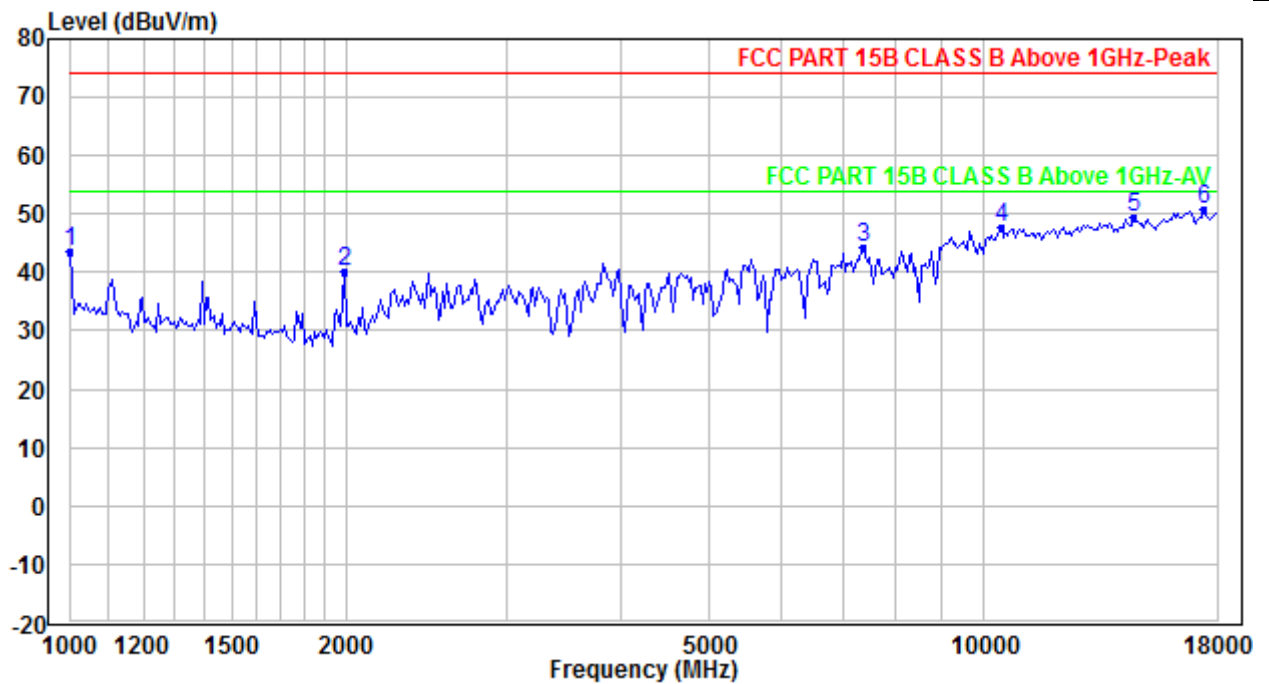

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.000	56.91	-13.51	43.40	74.00	-30.60	Peak
2	1992.295	49.75	-9.59	40.16	74.00	-33.84	Peak
3	7376.898	42.67	1.70	44.37	74.00	-29.63	Peak
4	10442.590	41.38	6.31	47.69	74.00	-26.31	Peak
5	14612.070	37.48	11.94	49.42	74.00	-24.58	Peak
6	17385.170	37.42	13.33	50.75	74.00	-23.25	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

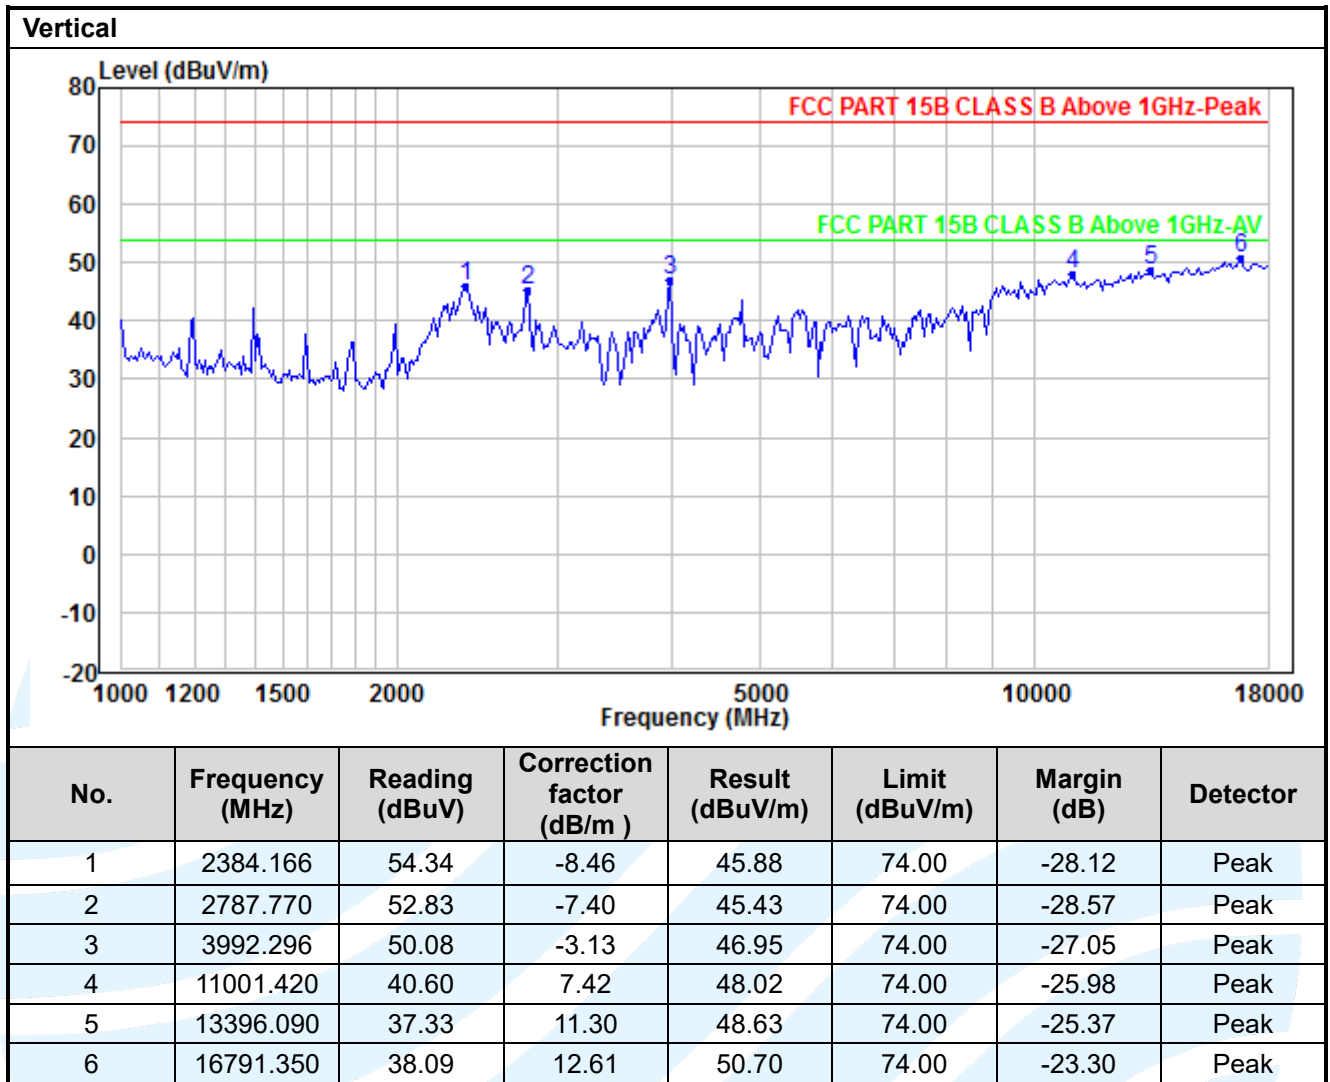

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst-case emissions reported.
5. For Radiated Emission above 18GHz, there was not any unwanted emission detected.
6. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107

Test Method: ANSI C63.4-2014

Limits:

Limits for Class B devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The measurement data as follows:

Quasi Peak and Average:

Test Mode 5: Charging from 240 Vac + Worse from mode 4 + GPS on (Worst Case)

Live Line

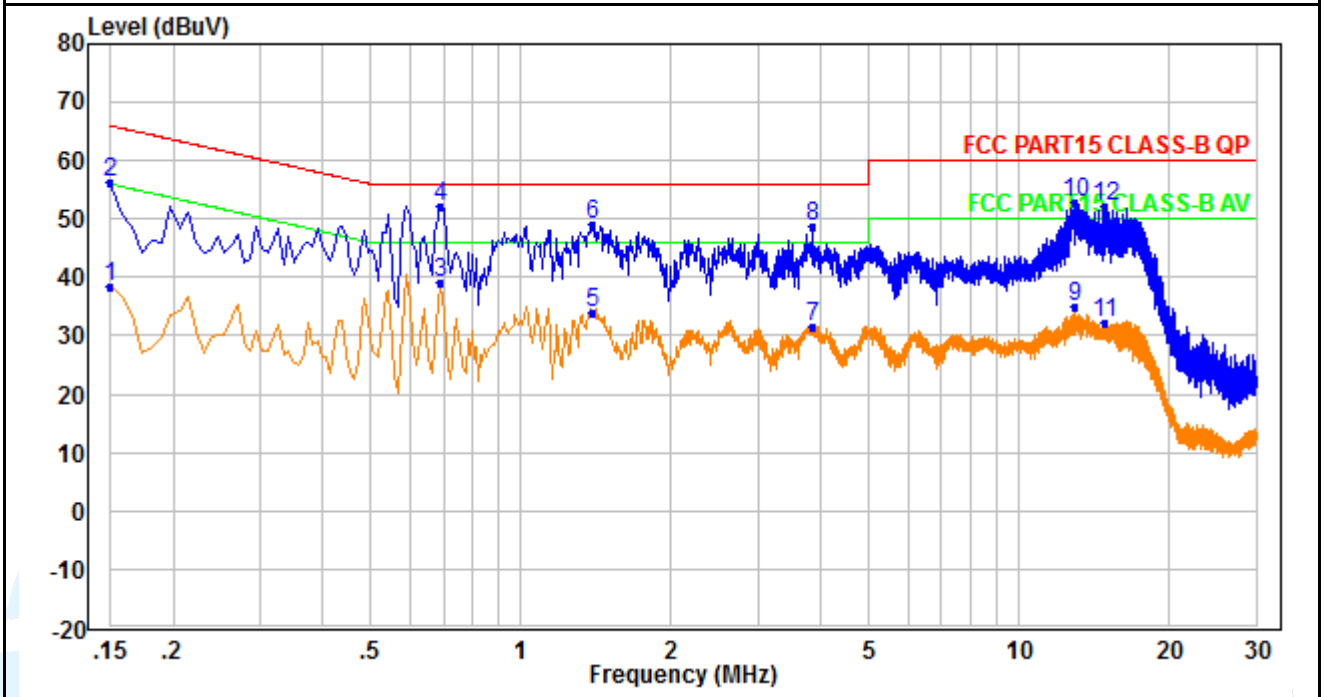

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.150	28.54	9.90	38.44	56.00	-17.56	Average
2	0.150	46.54	9.90	56.44	66.00	-9.56	QP
3	0.686	29.26	9.99	39.25	46.00	-6.75	Average
4	0.686	42.26	9.99	52.25	56.00	-3.75	QP
5	1.398	23.94	10.09	34.03	46.00	-11.97	Average
6	1.398	38.94	10.09	49.03	56.00	-6.97	QP
7	3.861	21.40	10.31	31.71	46.00	-14.29	Average
8	3.861	38.40	10.31	48.71	56.00	-7.29	QP
9	13.003	24.06	10.80	34.86	50.00	-15.14	Average
10	13.003	42.06	10.80	52.86	60.00	-7.14	QP
11	14.915	21.42	10.89	32.31	50.00	-17.69	Average
12	14.915	41.42	10.89	52.31	60.00	-7.69	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Neutral Line

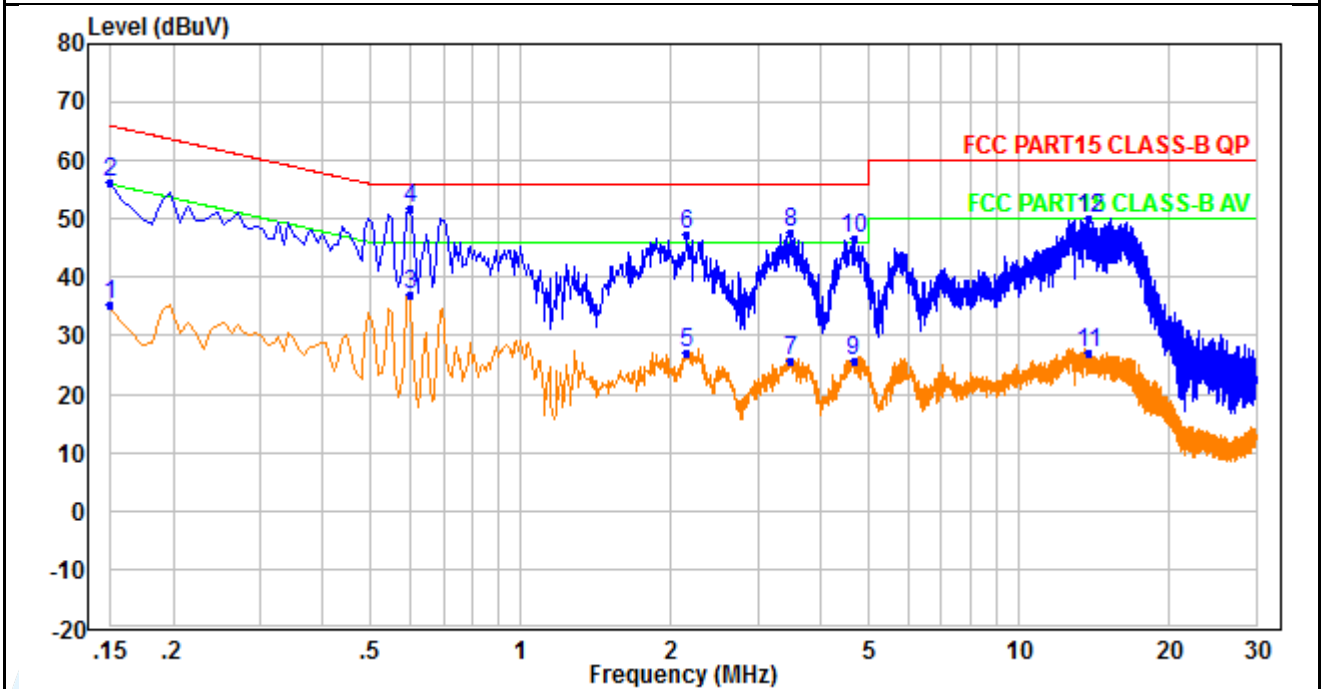

No.	Frequency (MHz)	Reading (dBUV)	Correction factor (dB)	Result (dBUV)	Limit (dBUV)	Margin (dB)	Detector
1	0.150	25.35	9.89	35.24	56.00	-20.76	Average
2	0.150	46.35	9.89	56.24	66.00	-9.76	QP
3	0.598	26.92	9.97	36.89	46.00	-9.11	Average
4	0.598	41.92	9.97	51.89	56.00	-4.11	QP
5	2.150	17.11	10.09	27.20	46.00	-18.80	Average
6	2.150	37.11	10.09	47.20	56.00	-8.80	QP
7	3.477	15.48	10.28	25.76	46.00	-20.24	Average
8	3.477	37.48	10.28	47.76	56.00	-8.24	QP
9	4.661	15.30	10.43	25.73	46.00	-20.27	Average
10	4.661	36.30	10.43	46.73	56.00	-9.27	QP
11	13.819	16.33	10.80	27.13	50.00	-22.87	Average
12	13.819	39.33	10.80	50.13	60.00	-9.87	QP

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V/50Hz and 120V/60Hz, only the worst-case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
