



# FCC RADIO TEST REPORT

**FCC ID** : QYLWP7610BC03  
**Equipment** : WWAN Module  
**Brand Name** : Getac  
**Model Name** : WP7610  
**Applicant** : Getac Technology Corporation.  
5F., Building A, No. 209, Sec.1, Nangang  
Rd., Nangang Dist., Taipei City 11568,  
Taiwan, R.O.C.  
**Standard** : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Dec. 10, 2019 and testing was started from Jan. 24, 2020 and completed on Feb. 06, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

*Louis Wu*

Approved by: Louis Wu

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards .....	5
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>6</b>
2.1 Test Mode.....	6
2.2 Connection Diagram of Test System .....	6
2.3 Support Unit used in test configuration .....	7
2.4 Frequency List of Low/Middle/High Channels .....	7
<b>3 Conducted Test Result .....</b>	<b>8</b>
3.1 Measuring Instruments.....	8
3.2 Conducted Output Power and ERP/EIRP .....	9
<b>4 Radiated Test Items .....</b>	<b>10</b>
4.1 Measuring Instruments.....	10
4.2 Test Setup .....	10
4.3 Test Result of Radiated Test.....	10
4.4 Field Strength of Spurious Radiation Measurement .....	11
<b>5 List of Measuring Equipment.....</b>	<b>12</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>13</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of ERP/EIRP and Radiated Test</b>	
<b>Appendix C. Test Setup Photographs</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FG9D1046A	01	Initial issue of report	Feb. 13, 2020

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)
3.2	§2.1046	Conducted Output Power	Pass
	§22.913 (a)(2)	Effective Radiated Power (WCDMA Band V)	
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)	
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)	
4.4	§2.1053 §24.238 (a)	Field Strength of Spurious Radiation (WCDMA Band II)	Pass

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by:** Wii Chang

**Report Producer:** Ching Chen



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

WCDMA and LTE.

Product Specification subjective to this standard	
Integrated into Host	Equipment Name: Body Worn Camera
	Brand Name: Getac
	Model Name: BC-03
Antenna Type	PIFA Antenna

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.3 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH05-HY	03CH07-HY
Test Engineer	Benjamin Lin	KenWu
Temperature	23~25°C	20~24°C
Relative Humidity	21~55%	48~58%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190

## 1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report..

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 19100 MHz for WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
WCDMA Band II	■ RMC 12.2Kbps Link

### 2.2 Connection Diagram of Test System

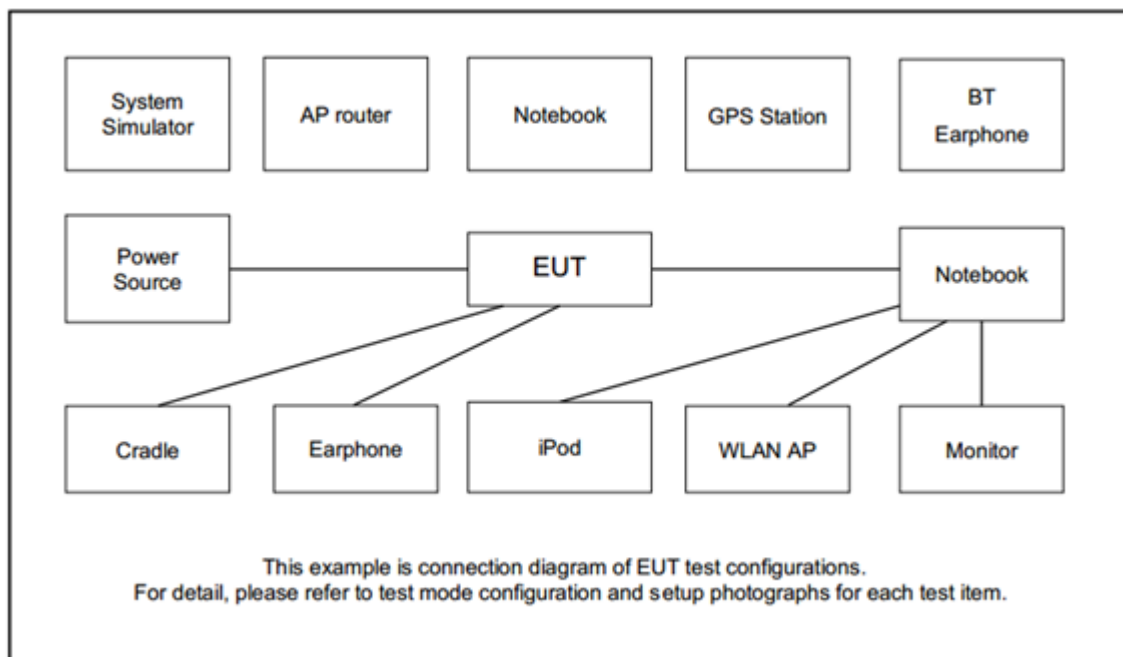



## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

## 2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


### 3 Conducted Test Result

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

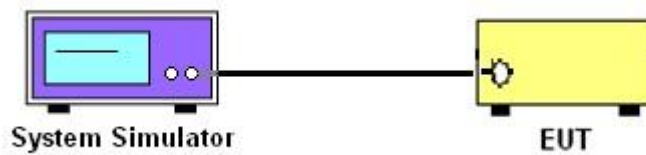

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

For radiated test from 30MHz to 1GHz

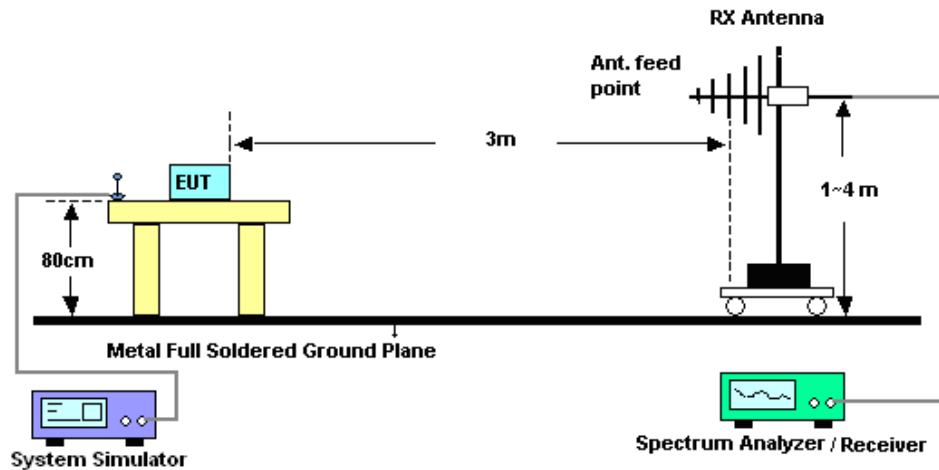

For radiated test above 1GHz

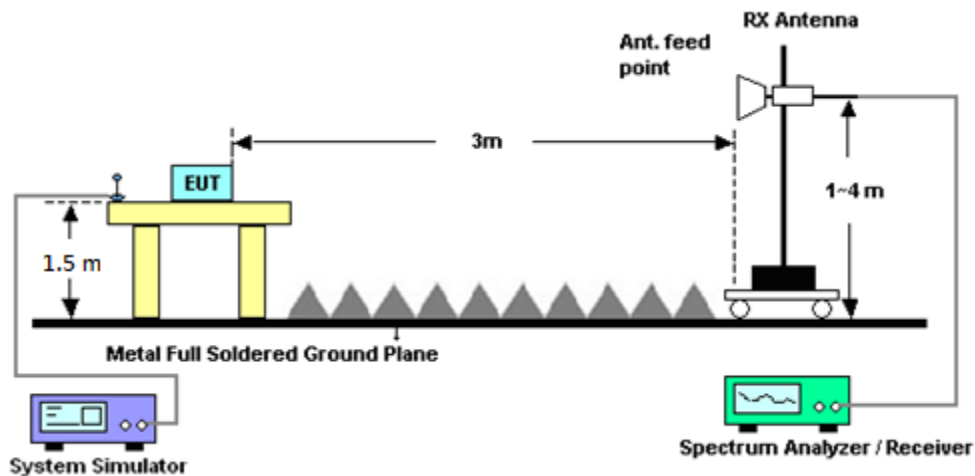

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 30, 2019	Jan. 24, 2020~Feb. 06, 2020	Apr. 29, 2020	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 12, 2019	Jan. 24, 2020~Feb. 06, 2020	Oct. 11, 2020	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 06, 2019	Jan. 24, 2020~Feb. 06, 2020	Dec. 05, 2020	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00066584	1GHz ~18GHz	Sep. 25, 2019	Jan. 24, 2020~Feb. 06, 2020	Sep. 24, 2020	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 14, 2019	Jan. 24, 2020~Feb. 06, 2020	May 13, 2020	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Dec. 06, 2019	Jan. 24, 2020~Feb. 06, 2020	Dec. 06, 2020	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Apr. 02, 2019	Jan. 24, 2020~Feb. 06, 2020	Apr. 01, 2020	Radiation (03CH07-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 28, 2019	Jan. 24, 2020~Feb. 06, 2020	Oct. 27, 2020	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 24, 2019	Jan. 24, 2020~Feb. 06, 2020	Apr. 23, 2020	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	May 20, 2019	Jan. 24, 2020~Feb. 06, 2020	May 19, 2020	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Nov. 01, 2019	Jan. 24, 2020~Feb. 06, 2020	Oct. 31, 2020	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 13, 2019	Jan. 24, 2020~Feb. 06, 2020	Dec. 12, 2020	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1GHz High Pass Filter	Nov. 01, 2019	Jan. 24, 2020~Feb. 06, 2020	Oct. 31, 2020	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3GHz High Pass Filter	Nov. 01, 2019	Jan. 24, 2020~Feb. 06, 2020	Oct. 31, 2020	Radiation (03CH07-HY)
Filter	Wainwright	WHNX7.0-26.5 G-6SS	SN7	7GHz High Pass Filter	Aug. 22, 2019	Jan. 24, 2020~Feb. 06, 2020	Aug. 21, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 26, 2019	Jan. 24, 2020~Feb. 06, 2020	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 26, 2019	Jan. 24, 2020~Feb. 06, 2020	Feb. 25, 2020	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 26, 2019	Jan. 24, 2020~Feb. 06, 2020	Feb. 25, 2020	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Jan. 24, 2020~Feb. 06, 2020	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jan. 24, 2020~Feb. 06, 2020	N/A	Radiation (03CH07-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Aug. 27, 2019	Jan. 24, 2020~Feb. 06, 2020	Aug. 26, 2020	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	8050400465 6H	N/A	N/A	Jan. 24, 2020~Feb. 06, 2020	N/A	Radiation (03CH07-HY)
Base Station(Measur e)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2019	Feb. 04, 2020	Aug. 22, 2020	Conducted (TH05-HY)

## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.23
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.63
-------------------------------------------------------------------------	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.70
-------------------------------------------------------------------------	------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	21.66	21.75	21.50	21.97	22.06	22.18
HSDPA Subtest-1	21.54	21.17	21.43	21.66	21.82	21.87
HSDPA Subtest-2	21.04	20.70	21.02	21.19	21.28	21.32
HSDPA Subtest-3	21.58	21.18	21.40	21.81	21.87	21.66
HSDPA Subtest-4	21.52	21.74	21.47	21.71	21.76	21.75
HSUPA Subtest-1	21.53	21.09	21.01	21.84	21.45	21.61
HSUPA Subtest-2	20.60	20.44	20.26	20.82	20.95	20.58
HSUPA Subtest-3	20.72	19.68	20.52	20.70	20.84	20.55
HSUPA Subtest-4	20.96	20.71	20.86	20.84	20.89	20.99
HSUPA Subtest-5	21.70	21.64	21.60	22.13	22.10	21.90

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	21.95	21.93	21.71
HSDPA Subtest-1	21.64	21.03	21.24
HSDPA Subtest-2	21.24	21.28	21.47
HSDPA Subtest-3	21.70	21.18	21.29
HSDPA Subtest-4	21.45	21.70	21.41
HSUPA Subtest-1	21.41	21.79	21.03
HSUPA Subtest-2	20.75	20.58	20.36
HSUPA Subtest-3	20.33	20.41	20.20
HSUPA Subtest-4	20.74	20.85	20.24
HSUPA Subtest-5	21.70	21.60	21.50



## Appendix B. Test Results of ERP/EIRP and Radiated Test

### ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	WCDMA Band V	21.66	0.1466	17.78	0.0600
Middle	RMC 12.2Kbps	21.75	0.1496	17.87	0.0612
Highest	GT - LC = -1.73 dB	21.50	0.1413	17.62	0.0578
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band II	21.97	0.1574	22.24	0.1675
Middle	RMC 12.2Kbps	22.06	0.1607	22.33	0.1710
Highest	GT - LC = 0.27 dB	22.18	0.1652	22.45	0.1758
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	21.95	0.1567	24.17	0.2612
Middle	RMC 12.2Kbps	21.93	0.1560	24.15	0.2600
Highest	GT - LC = 2.22 dB	21.71	0.1483	23.93	0.2472
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission****WCDMA 1900**

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	3815	-58.43	-13	-45.43	-78.79	-65.1	1.70	8.38	H
	5724	-53.86	-13	-40.86	-79.15	-60.9	2.75	9.79	H
	7632	-52.81	-13	-39.81	-80.78	-62.3	2.39	11.88	H
									H
									H
									H
									H
	3815	-57.63	-13	-44.63	-78.34	-64.3	1.70	8.38	V
	5724	-50.56	-13	-37.56	-75.48	-57.6	2.75	9.79	V
	7632	-52.71	-13	-39.71	-80.8	-62.2	2.39	11.88	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.