



TEST REPORT

FCC PART 15 SUBPART C 15.247

**Test report
On Behalf of
ComNav Technology Ltd.
For
R550 Data Collector
Model No.: R550**

FCC ID: 2ACHB-R550

Prepared for : ComNav Technology Ltd.
Building 2, No.618 Chengliu Middle Rd., Shanghai, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen City, China

Date of Test: Jun. 05, 2020 -- Jul. 20, 2020
Date of Report: Jul. 20, 2020
Report Number: HK2007011614-8E



TEST RESULT CERTIFICATION


Applicant's name: ComNav Technology Ltd.

Address: Building 2, No.618 Chengliu Middle Rd., Shanghai, China

Manufacture's Name: ComNav Technology Ltd.

Address: Building 2, No.618 Chengliu Middle Rd., Shanghai, China

Product description

Trade Mark: 
By ComNav Technology Ltd.

Product name: R550 Data Collector

Model and/or type reference ..: R550

Standards: **FCC Part 15 Subpart C 15.247**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


Date of Test:

Date (s) of performance of tests: Jun. 05, 2020 – Jul. 20, 2020

Date of Issue: Jul. 20, 2020


Test Result: **Pass**

Prepared by:




Project Engineer

Reviewed by:



Project Supervisor

Approved by:



Technical Director

**Table of Contents****Page**

| | |
|---|-----------|
| 1. SUMMARY | 4 |
| 1.1. TEST STANDARDS | 4 |
| 1.2. TEST DESCRIPTION | 4 |
| 1.3. TEST FACILITY | 5 |
| 1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY | 5 |
| 2. GENERAL INFORMATION | 6 |
| 2.1. ENVIRONMENTAL CONDITIONS | 6 |
| 2.2. GENERAL DESCRIPTION OF EUT | 6 |
| 2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY | 7 |
| 2.4. EQUIPMENTS USED DURING THE TEST | 8 |
| 2.5. RELATED SUBMITTAL(S) / GRANT (S) | 9 |
| 2.6. MODIFICATIONS | 9 |
| 2.7. DESCRIPTION OF TEST SETUP | 9 |
| 2.8. DESCRIPTION OF SUPPORT UNITS | 9 |
| 3. TEST CONDITIONS AND RESULTS | 10 |
| 3.1. CONDUCTED EMISSIONS TEST | 10 |
| 3.2. RADIATED EMISSIONS AND BAND EDGE | 13 |
| 3.3. MAXIMUM PEAK CONDUCTED OUTPUT POWER | 24 |
| 3.4. 20DB BANDWIDTH | 28 |
| 3.5. FREQUENCY SEPARATION | 32 |
| 3.6. NUMBER OF HOPPING FREQUENCY | 34 |
| 3.7. TIME OF OCCUPANCY (DWELL TIME) | 36 |
| 3.8. OUT-OF-BAND EMISSIONS | 40 |
| 3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 53 |
| 3.10. ANTENNA REQUIREMENT | 54 |
| 4. TEST SETUP PHOTOS OF THE EUT | 55 |
| 5. PHOTOS OF THE EUT | 57 |



1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#) : American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

| FCC PART 15.247 | | |
|--------------------------|--|------|
| FCC Part 15.207 | AC Power Conducted Emission | PASS |
| FCC Part 15.247(a)(1)(i) | 20dB Bandwidth& 99% Bandwidth | PASS |
| FCC Part 15.247(d) | Spurious RF Conducted Emission | PASS |
| FCC Part 15.247(b) | Maximum Peak Output Power | PASS |
| FCC part 15.247(a)(1) | Pseudorandom Frequency Hopping Sequence | PASS |
| FCC Part 15.247(a)(1) | Number of hopping frequency& Time of Occupancy | PASS |
| FCC Part 15.247(a)(1) | Frequency Separation | PASS |
| FCC Part 15.205/15.209 | Radiated Emissions | PASS |
| FCC Part 15.247(d) | Band Edge Compliance of RF Emission | PASS |



1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAKE Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAKE laboratory is reported:

| Test | Measurement Uncertainty | Notes |
|---|-------------------------|-------|
| Transmitter power conducted | ±0.57 dB | (1) |
| Transmitter power Radiated | ±2.20 dB | (1) |
| Conducted spurious emission 9KHz-40 GHz | ±2.20 dB | (1) |
| Occupied Bandwidth | ±0.01ppm | (1) |
| Radiated Emission 30~1000MHz | ±4.10dB | (1) |
| Radiated Emission Above 1GHz | ±4.32dB | (1) |
| Conducted Disturbance0.15~30MHz | ±3.20dB | (1) |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

| | |
|---------------------|---------|
| Normal Temperature: | 25°C |
| Relative Humidity: | 55 % |
| Air Pressure: | 101 kPa |

2.2. General Description of EUT

| | |
|-----------------------|--|
| Product Name: | R550 Data Collector |
| Model/Type reference: | R550 |
| Serial Model: | N/A |
| Trade Mark |  By ComNav Technology Ltd. |
| FCC ID | 2ACHB-R550 |
| Hardware Version: | Main board: SD55-D3_Main board_P3 8400347FA30 |
| Software Version: | V1.3 |
| Version: | Supported EDR/BDR |
| Modulation: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Operation frequency: | 2402MHz~2480MHz |
| Channel number: | 79CH |
| Channel separation: | 1MHz |
| Antenna type: | FPC Antenna |
| Antenna gain: | -3.1dBi |
| Power supply: | DC 3.8V from battery |
| Power Source | AC 120V/60Hz |

Note: 1. For more details, refer to the user's manual of the EUT.



2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

Operation Frequency :

| Channel | Frequency (MHz) |
|---------|-----------------|
| 00 | 2402 |
| 01 | 2403 |
| ⋮ | ⋮ |
| 38 | 2440 |
| 39 | 2441 |
| 40 | 2442 |
| ⋮ | ⋮ |
| 77 | 2479 |
| 78 | 2480 |

Note: The line display in grey were the channel selected for testing

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

| Test Items | Worst case |
|----------------------------------|---|
| Conducted Emissions | DH5 |
| Radiated Emissions and Band Edge | DH5 |
| Maximum Conducted Output Power | DH5/2DH5/3DH5 |
| 20dB Bandwidth&99% Bandwidth | DH5/2DH5/3DH5 |
| Frequency Separation | DH5/2DH5/3DH5 Middle channel |
| Number of hopping frequency | DH5/2DH5/3DH5 |
| Time of Occupancy (Dwell Time) | DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel DH5/2DH5/3DH5 Middle channel |
| Out-of-band Emissions | DH5/2DH5/3DH5 |



2.4. Equipments Used during the Test

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-----------------------------------|-----------------|------------------|------------|---------------|---------------|
| 1. | L.I.S.N. Artificial Mains Network | R&S | ENV216 | HKE-002 | Dec. 26, 2019 | 1 Year |
| 2. | Receiver | R&S | ESCI 7 | HKE-010 | Dec. 26, 2019 | 1 Year |
| 3. | RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Dec. 26, 2019 | 1 Year |
| 4. | Spectrum analyzer | R&S | FSP40 | HKE-025 | Dec. 26, 2019 | 1 Year |
| 5. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 26, 2019 | 1 Year |
| 6. | Preamplifier | Schwarzbeck | BBV 9743 | HKE-006 | Dec. 26, 2019 | 1 Year |
| 7. | EMI Test Receiver | Rohde & Schwarz | ESCI 7 | HKE-010 | Dec. 26, 2019 | 1 Year |
| 8. | Bilog Broadband Antenna | Schwarzbeck | VULB9163 | HKE-012 | Dec. 26, 2019 | 1 Year |
| 9. | Loop Antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Dec. 26, 2019 | 1 Year |
| 10. | Horn Antenna | Schwarzbeck | 9120D | HKE-013 | Dec. 26, 2019 | 1 Year |
| 11. | Pre-amplifier | EMCI | EMC051845 SE | HKE-015 | Dec. 26, 2019 | 1 Year |
| 12. | Pre-amplifier | Agilent | 83051A | HKE-016 | Dec. 26, 2019 | 1 Year |
| 13. | EMI Test Software EZ-EMC | Tonscend | JS1120-B Version | HKE-083 | Dec. 27, 2018 | N/A |
| 14. | Power Sensor | Agilent | E9300A | HKE-086 | Dec. 26, 2019 | 1 Year |
| 15. | Spectrum analyzer | Agilent | N9020A | HKE-048 | Dec. 26, 2019 | 1 Year |
| 16. | Signal generator | Agilent | N5182A | HKE-029 | Dec. 26, 2019 | 1 Year |
| 17. | Signal Generator | Agilent | 83630A | HKE-028 | Dec. 26, 2019 | 1 Year |
| 18. | Shielded room | Shiel Hong | 4*3*3 | HKE-039 | Dec. 27, 2017 | 3 Year |
| 19. | Power Meter | R&S | NRVD | SEL0069 | Dec. 26, 2019 | 1 Year |
| 20. | High Gain Antenna | Schwarzbeck | LB-180400K F | HKE-054 | Dec. 26, 2019 | 1 Year |

The calibration interval was one year



2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. RSS Gen and RSS 247 Rules.

2.6. Modifications


No modifications were implemented to meet testing criteria.

2.7. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing:



Operation of EUT during Radiation and Above1GHz Radiation testing:



2.8. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Description | Information | Manufacturer | Remark | Certificate |
|-------------|--|--|-------------------------|-------------|
| Adapter | MODEL:KA1801A-0902000DE INPUT:100-240V ~50/60Hz 0.55A max OUTPUT:9V 2000mA | Shenzhen Keyu Power Supply Technology Co.,Ltd | Provide by applicant | SDOC |
| / | / | / | / | / |



3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

According to FCC CFR Title 47 Part 15 Subpart C Section 15.207 and RSS Gen 8.8, AC Power Line Conducted Emissions Limits for Licence-Exempt Radio Apparatus as below:

| Frequency range (MHz) | Limit (dBuV) | |
|-----------------------|--------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

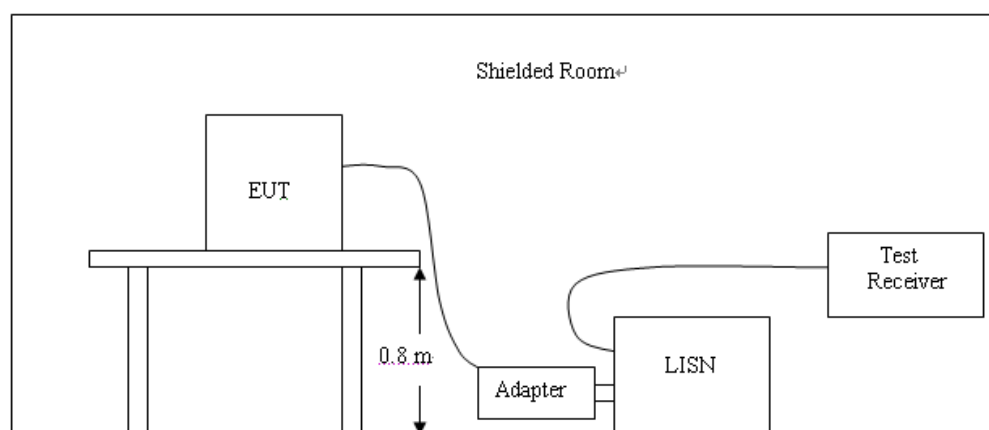


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.



TEST RESULTS

Test Specification: Line

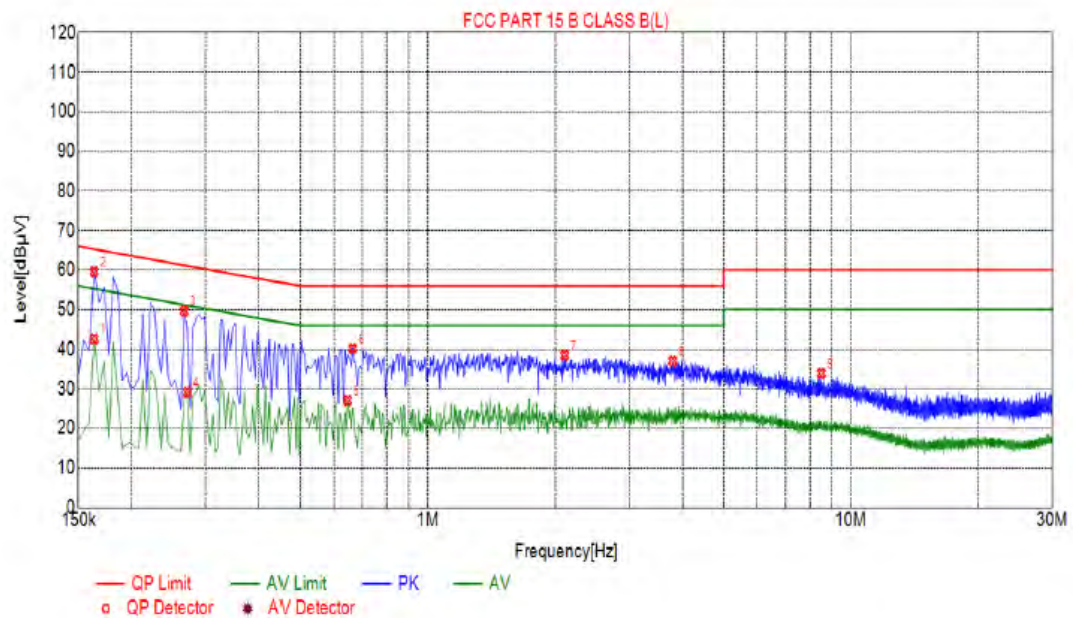

| Suspected List | | | | | | | | |
|----------------|----------------|-----------------|----------------|-----------------|----------------|-------------------|----------|------|
| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
| 1 | 0.1635 | 42.63 | 9.98 | 55.28 | 12.65 | 32.65 | AV | L |
| 2 | 0.1635 | 59.60 | 9.98 | 65.28 | 5.68 | 49.62 | PK | L |
| 3 | 0.2670 | 49.66 | 10.03 | 61.21 | 11.55 | 39.63 | PK | L |
| 4 | 0.2715 | 29.15 | 10.03 | 51.07 | 21.92 | 19.12 | AV | L |
| 5 | 0.6450 | 27.09 | 10.05 | 46.00 | 18.91 | 17.04 | AV | L |
| 6 | 0.6630 | 40.20 | 10.05 | 56.00 | 15.80 | 30.15 | PK | L |
| 7 | 2.1030 | 38.46 | 10.15 | 56.00 | 17.54 | 28.31 | PK | L |
| 8 | 3.7905 | 37.04 | 10.25 | 56.00 | 18.96 | 26.79 | PK | L |
| 9 | 8.5200 | 33.91 | 10.13 | 60.00 | 26.09 | 23.78 | PK | L |


Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor



Test Specification: Neutral

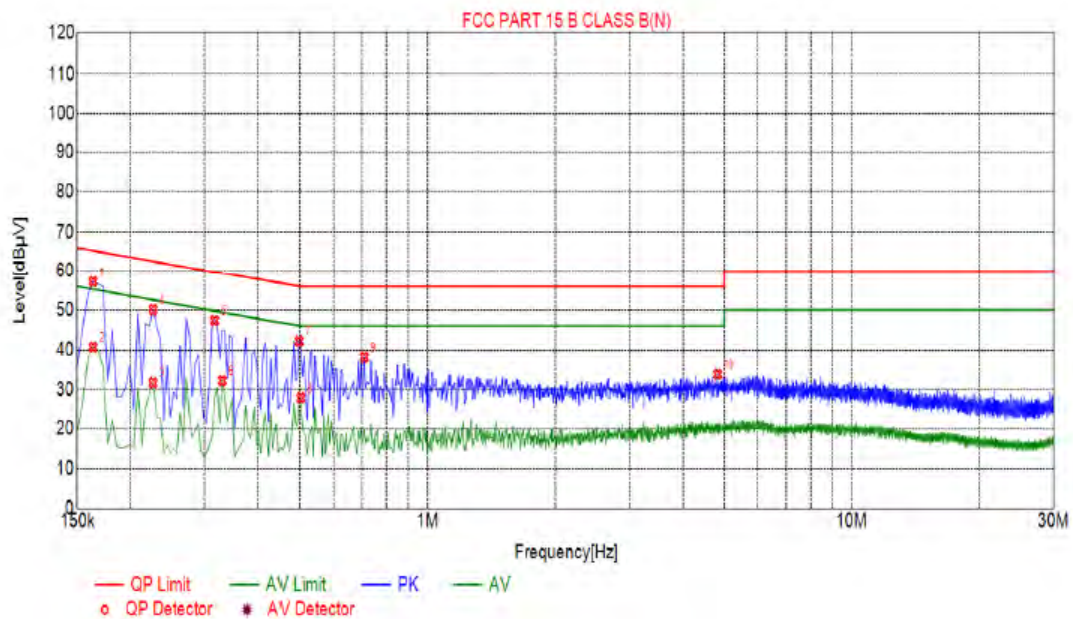

Suspected List

| NO. | Freq. [MHz] | Level [dBμV] | Factor [dB] | Limit [dBμV] | Margin [dB] | Reading [dBμV] | Detector | Type |
|-----|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| 1 | 0.1635 | 57.22 | 9.98 | 65.28 | 8.06 | 47.24 | PK | N |
| 2 | 0.1635 | 40.75 | 9.98 | 55.28 | 14.53 | 30.77 | AV | N |
| 3 | 0.2265 | 31.68 | 10.03 | 52.58 | 20.90 | 21.65 | AV | N |
| 4 | 0.2265 | 50.14 | 10.03 | 62.58 | 12.44 | 40.11 | PK | N |
| 5 | 0.3165 | 47.35 | 10.05 | 59.80 | 12.45 | 37.30 | PK | N |
| 6 | 0.3300 | 32.23 | 10.04 | 49.45 | 17.22 | 22.19 | AV | N |
| 7 | 0.4965 | 42.25 | 10.04 | 56.06 | 13.81 | 32.21 | PK | N |
| 8 | 0.5010 | 27.87 | 10.04 | 46.00 | 18.13 | 17.83 | AV | N |
| 9 | 0.7080 | 38.13 | 10.05 | 56.00 | 17.87 | 28.08 | PK | N |
| 10 | 4.8300 | 33.83 | 10.26 | 56.00 | 22.17 | 23.57 | PK | N |

Remark: Margin = Limit – Level

Correction factor = Cable lose + LISN insertion loss

Level=Test receiver reading + correction factor

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in table below.

Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission


Unwanted emissions that fall into restricted bands shall comply with the limits specified in RSS-Gen; and Unwanted emissions that do not fall within the restricted frequency bands shall comply either with the limits specified in the applicable RSS or with those specified in this RSS-Gen.

Radiated emission limits


| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/m) | Radiated (μ V/m) |
|-----------------|-------------------|--|-----------------------|
| 0.009-0.49 | 3 | $20\log(2400/F(\text{KHz}))+40\log(300/3)$ | $2400/F(\text{KHz})$ |
| 0.49-1.705 | 3 | $20\log(24000/F(\text{KHz}))+40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30 | 3 | $20\log(30)+40\log(30/3)$ | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

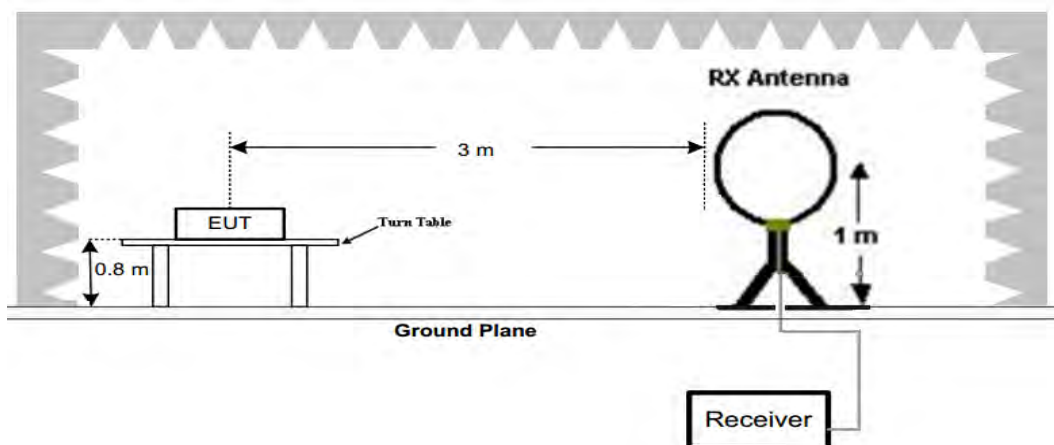

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

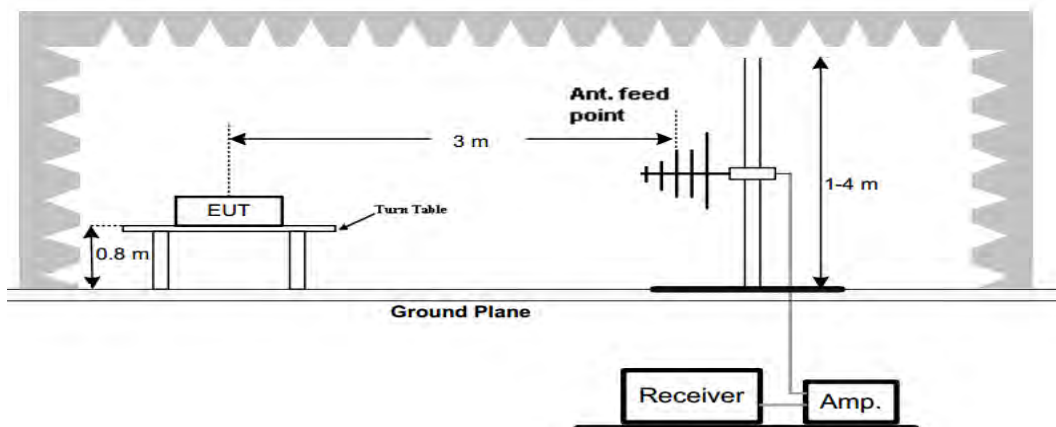

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

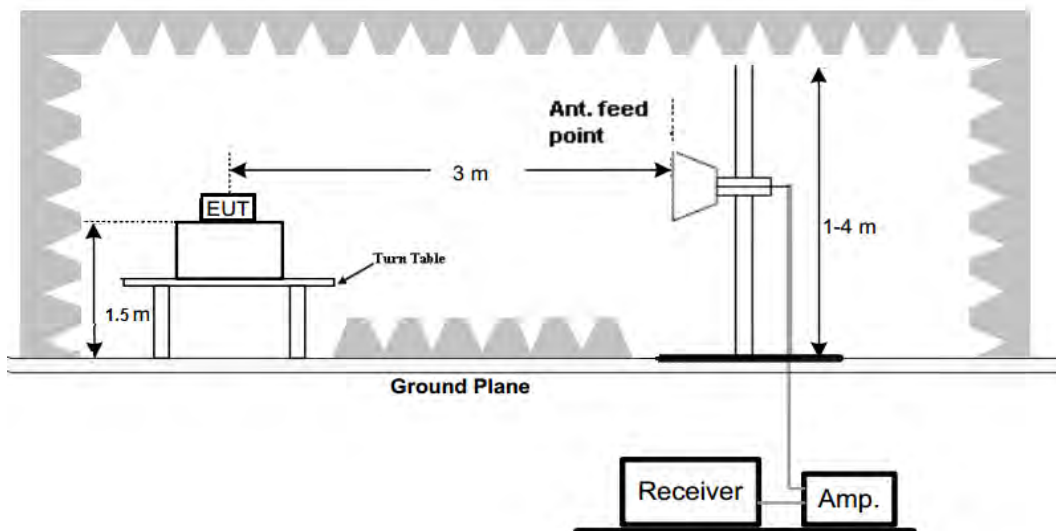

Test Procedure

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

Note: For the radiated emission test above 1GHz: Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.



The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Test the EUT in the lowest channel, the middle channel, the Highest channel

The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. Repeat above procedures until all frequencies measured was complete.

TEST RESULTS


Remark:

1. Radiated Emission measured at GFSK, $\pi/4$ DQPSK, 8DPSK from 9 KHz to 10th harmonic of fundamental and recorded worst case at GFSK -DH5 mode.
2. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor (more than 20dB below the limit) in 9KHz to 30MHz and not recorded in this report.
3. For below 1GHz testing recorded worst at GFSK -DH5 Low channel.

Below 1GHz Test Results:

Antenna polarity: H

Test Graph

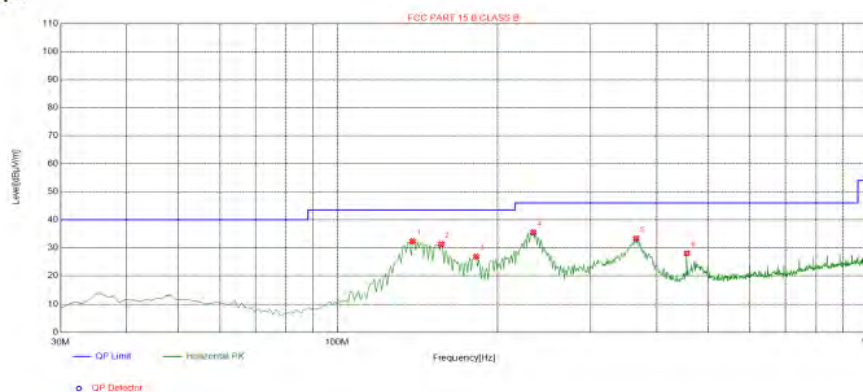

Suspected List

| Suspected List | | | | | | | | | |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 138.7487 | -19.10 | 51.40 | 32.30 | 43.50 | 11.20 | 100 | 182 | Horizontal |
| 2 | 157.1972 | -18.42 | 49.72 | 31.30 | 43.50 | 12.20 | 100 | 12 | Horizontal |
| 3 | 182.4424 | -16.65 | 43.45 | 26.80 | 43.50 | 16.70 | 100 | 298 | Horizontal |
| 4 | 233.9039 | -14.14 | 49.62 | 35.48 | 46.00 | 10.52 | 100 | 254 | Horizontal |
| 5 | 365.9560 | -11.14 | 44.43 | 33.29 | 46.00 | 12.71 | 100 | 78 | Horizontal |
| 6 | 456.2563 | -8.79 | 36.80 | 28.01 | 46.00 | 17.99 | 100 | 110 | Horizontal |

Remark: Margin = Limit – Level

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level= Test receiver reading + correction factor



Antenna polarity: V

Test Graph



Suspected List

| Suspected List | | | | | | | | | |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 139.7197 | -19.16 | 52.97 | 33.81 | 43.50 | 9.69 | 100 | 221 | Vertical |
| 2 | 153.3133 | -18.70 | 53.42 | 34.72 | 43.50 | 8.78 | 100 | 214 | Vertical |
| 3 | 179.5295 | -16.88 | 46.63 | 29.75 | 43.50 | 13.75 | 100 | 192 | Vertical |
| 4 | 231.9620 | -14.23 | 41.94 | 27.71 | 46.00 | 18.29 | 100 | 198 | Vertical |
| 5 | 300.9009 | -12.72 | 36.96 | 24.24 | 46.00 | 21.76 | 100 | 3 | Vertical |
| 6 | 482.4725 | -8.47 | 31.69 | 23.22 | 46.00 | 22.78 | 100 | 169 | Vertical |

Remark: Margin = Limit – Level

Correction Factor= Antenna Factor + Cable loss – Pre-amplifier

Level=Test receiver reading + correction factor

Page 17 of 72

DH5--CH Middle (2441MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4882.00 | 56.50 | -3.54 | 52.96 | 74 | -21.04 | Peak |
| 4882.00 | 33.88 | -3.54 | 30.34 | 54 | -23.66 | AVG |
| 7323.00 | 53.33 | -0.81 | 52.52 | 74 | -21.48 | Peak |
| 7323.00 | 32.38 | -0.81 | 31.57 | 54 | -22.43 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4882.00 | 56.48 | -3.54 | 52.94 | 74 | -21.06 | Peak |
| 4882.00 | 34.66 | -3.54 | 31.12 | 54 | -22.88 | AVG |
| 7323.00 | 52.87 | -0.81 | 52.06 | 74 | -21.94 | Peak |
| 7323.00 | 33.60 | -0.81 | 32.79 | 54 | -21.21 | AVG |
| Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |



DH5--CH High (2480MHz)

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4960.00 | 55.70 | -3.43 | 52.27 | 74 | -21.73 | Peak |
| 4960.00 | 35.34 | -3.43 | 31.91 | 54 | -22.09 | AVG |
| 7440.00 | 52.18 | -0.77 | 51.41 | 74 | -22.59 | Peak |
| 7440.00 | 32.27 | -0.77 | 31.50 | 54 | -22.50 | AVG |
| Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|-------------------------|----------------|----------------------------|--------------------|----------------|------------------|
| 4960.00 | 54.99 | -3.43 | 51.56 | 74 | -22.44 | Peak |
| 4960.00 | 34.56 | -3.43 | 31.13 | 54 | -22.87 | AVG |
| 7440.00 | 53.08 | -0.77 | 52.31 | 74 | -21.69 | Peak |
| 7440.00 | 33.52 | -0.77 | 32.75 | 54 | -21.25 | AVG |
| Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Remark :

(1) Measuring frequencies from 1 GHz to the 25 GHz .

(2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.

(3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(4) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.

(6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

(7) All modes of operation were investigated and the worst-case emissions are reported.



Radiated Band Edge Test:

Hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case: DH5)

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 61.27 | -5.81 | 55.46 | 74 | -18.54 | Peak |
| 2310 | 45.13 | -5.81 | 39.32 | 54 | -14.68 | AVG |
| 2390 | 59.59 | -5.84 | 53.75 | 74 | -20.25 | Peak |
| 2390 | 45.07 | -5.84 | 39.23 | 54 | -14.77 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 61.80 | -5.81 | 55.99 | 74 | -18.01 | Peak |
| 2310 | 45.00 | -5.81 | 39.19 | 54 | -14.81 | AVG |
| 2390 | 58.52 | -5.84 | 52.68 | 74 | -21.32 | Peak |
| 2390 | 44.74 | -5.84 | 38.90 | 54 | -15.10 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Page 21 of 72

NO hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case: DH5)

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 61.37 | -5.81 | 55.56 | 74 | -18.44 | Peak |
| 2310 | 44.08 | -5.81 | 38.27 | 54 | -15.73 | AVG |
| 2390 | 59.60 | -5.84 | 53.76 | 74 | -20.24 | Peak |
| 2390 | 44.50 | -5.84 | 38.66 | 54 | -15.34 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 58.98 | -5.81 | 53.17 | 74 | -20.83 | Peak |
| 2310 | 44.89 | -5.81 | 39.08 | 54 | -14.92 | AVG |
| 2390 | 59.17 | -5.84 | 53.33 | 74 | -20.67 | Peak |
| 2390 | 44.08 | -5.84 | 38.24 | 54 | -15.76 | AVG |

Remark :Factor= Antenna Factor + Cable Loss - Pre-amplifier

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case: DH5)

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.5 | 60.13 | -6.04 | 54.09 | 74 | -19.91 | Peak |
| 2483.5 | 43.37 | -6.04 | 37.33 | 54 | -16.67 | AVG |
| 2500 | 59.77 | -6.06 | 53.71 | 74 | -20.29 | Peak |
| 2500 | 45.92 | -6.06 | 39.86 | 54 | -14.14 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|--|---------------|--------|----------------|----------|--------|---------------|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.5 | 61.01 | -6.04 | 54.97 | 74 | -19.03 | Peak |
| 2483.5 | 45.79 | -6.04 | 39.75 | 54 | -14.25 | AVG |
| 2500 | 59.00 | -6.06 | 52.94 | 74 | -21.06 | Peak |
| 2500 | 45.52 | -6.06 | 39.46 | 54 | -14.54 | AVG |
| Remark : Factor= Antenna Factor + Cable Loss - Pre-amplifier | | | | | | |



3.3. Maximum Peak Conducted Output Power

Limit


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum..

Test Configuration



Test Results

| Type | Channel | Output power (dBm) | Limit (dBm) | Result |
|---------------|---------|--------------------|-------------|--------|
| GFSK | 00 | 7.136 | 21 | Pass |
| | 39 | 3.514 | | |
| | 78 | 4.674 | | |
| $\pi/4$ DQPSK | 00 | 6.085 | 21 | Pass |
| | 39 | 3.020 | | |
| | 78 | 4.005 | | |
| 8DPSK | 00 | 6.138 | 21 | Pass |
| | 39 | 3.097 | | |
| | 78 | 4.024 | | |

Note: 1.The test results including the cable lose.

Refer to the figure below:



GFSK Modulation



2402



2441



2480

 $\pi/4$ DQPSK Modulation

2402



2441



2480



8DPSK Modulation



2402



2441



2480



3.4. 20dB Bandwidth

Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW (1% to 5% of the OBW) and VBW is 3 X RBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

RBW=1% to 5% of the OBW


VBW=approximately 3 X RBW

Detector=Peak

Trace Mode: Max Hold

Use the 99% power bandwidth function of the instrument to measure the Occupied Bandwidth and recorded.

Test Configuration



Test Results

| Modulation | Channel | 20dB bandwidth (MHz) | Result |
|------------|---------|----------------------|--------|
| GFSK | CH00 | 0.9399 | Pass |
| | CH39 | 0.9449 | |
| | CH78 | 0.947 | |
| π/4DQPSK | CH00 | 1.285 | |
| | CH39 | 1.261 | |
| | CH78 | 1.262 | |
| 8DPSK | CH00 | 1.261 | |
| | CH39 | 1.291 | |
| | CH78 | 1.269 | |

Test plot as follows:



GFSK Modulation



CH00




CH39




CH78




$\pi/4$ DQPSK Modulation

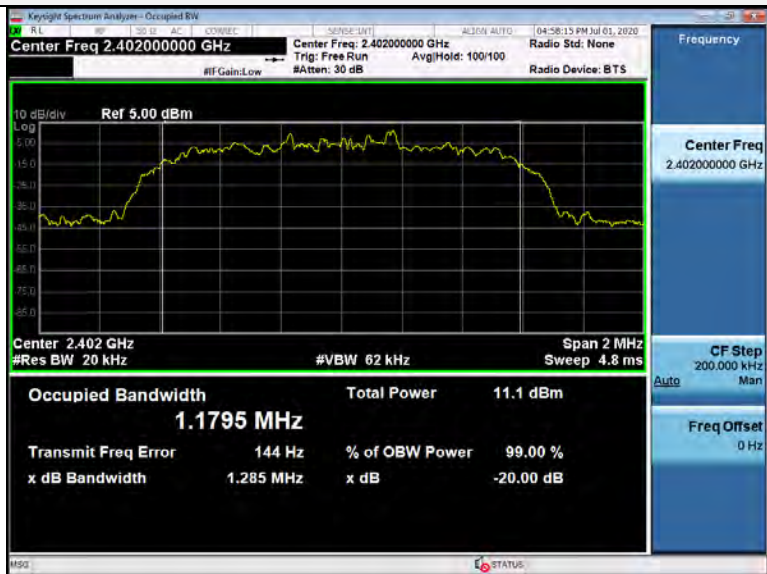

CH00

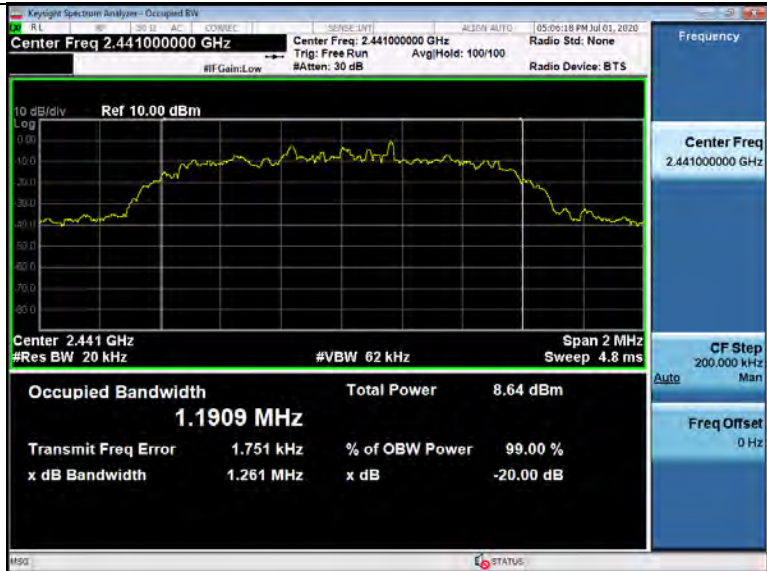

CH39

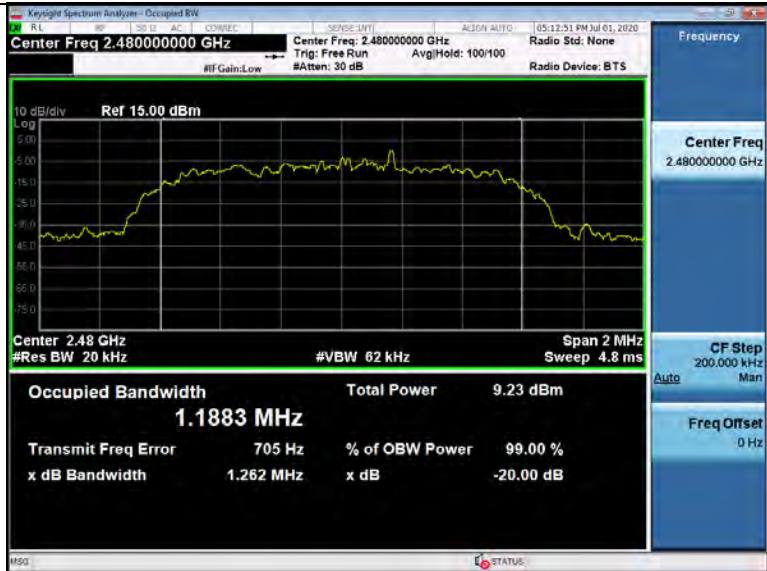

CH78



8DPSK Modulation



CH00



CH39



CH78



3.5. Frequency Separation


LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100KHz RBW and 300 KHz VBW.

TEST CONFIGURATION




TEST RESULTS


| Modulation | Channel | Channel Separation (MHz) | Limit(MHz) | Result |
|---------------|---------|--------------------------|------------------------------------|--------|
| GFSK | CH39 | 0.997 | $2/3 \times 20\text{dB}$ bandwidth | Pass |
| | CH40 | | | |
| $\pi/4$ DQPSK | CH39 | 0.997 | $2/3 \times 20\text{dB}$ bandwidth | Pass |
| | CH40 | | | |
| 8DPSK | CH39 | 0.997 | $2/3 \times 20\text{dB}$ bandwidth | Pass |
| | CH40 | | | |

Note: We have tested all mode at high, middle and low channel, and recorded worst case

Test plot as follows:

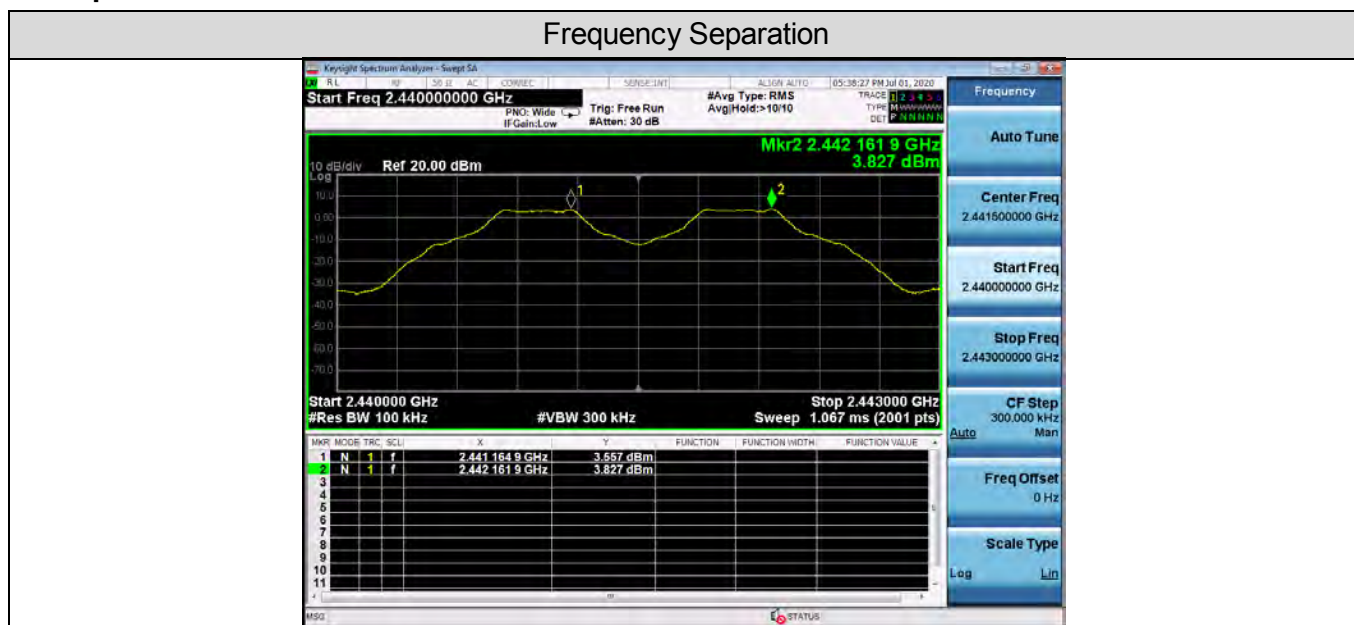

GFSK

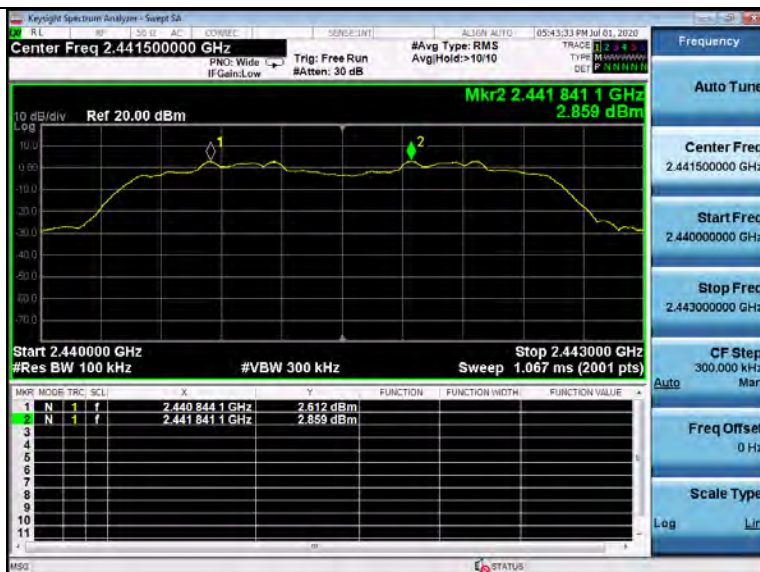

$\pi/4$ DQPSK



8DPSK



3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz.

Test Configuration





Test Results

| Modulation | Number of Hopping Channel | Limit | Result |
|------------|---------------------------|-------|--------|
| GFSK | 79 | ≥15 | Pass |
| π/4DQPSK | 79 | | |
| 8DPSK | 79 | | |

Test plot as follows:



GFSK Modulation

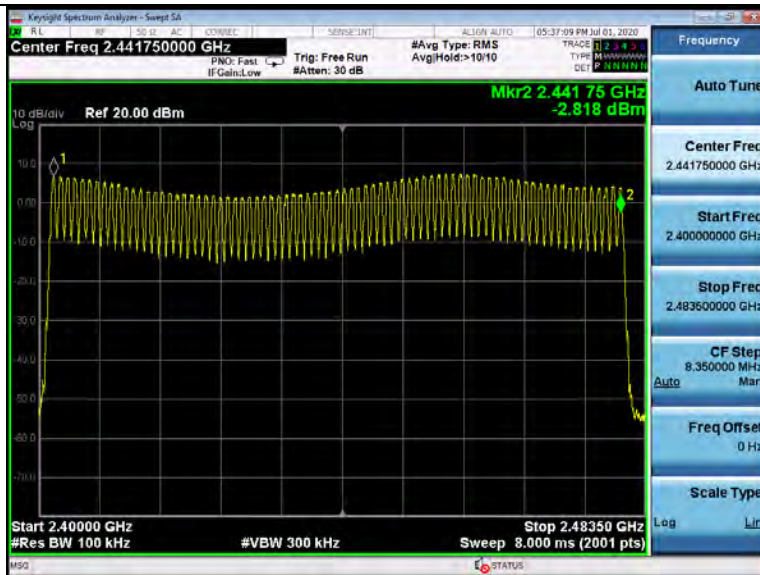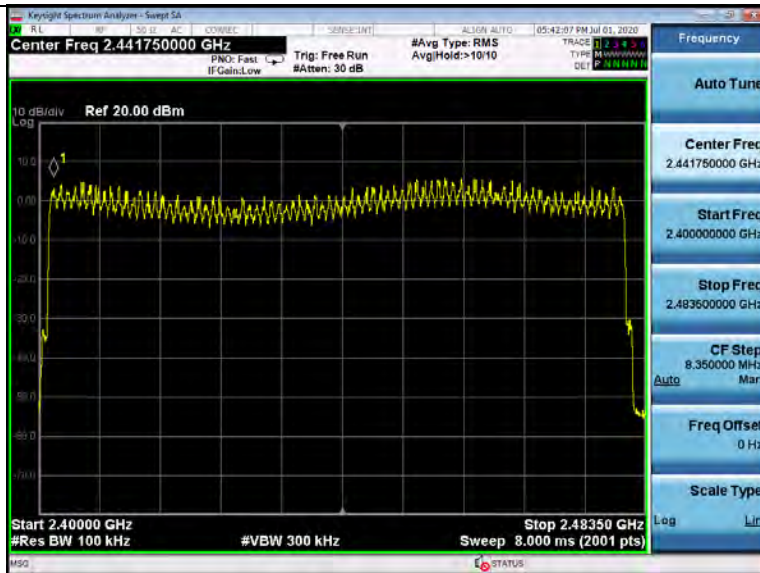 $\pi/4$ DQPSK Modulation

8DPSK Modulation





3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 3MHz VBW, Span 0Hz.

Test Configuration



Test Results

| Modulation | Packet | Pulse time (ms) | Dwell time (ms) | Limit (ms) | Result |
|---------------|--------|-----------------|-----------------|------------|--------|
| GFSK | DH1 | 0.3836 | 122.752 | 400 | Pass |
| | DH3 | 1.639 | 262.240 | | |
| | DH5 | 2.884 | 307.627 | | |
| $\pi/4$ DQPSK | 2-DH1 | 0.3886 | 124.352 | 400 | Pass |
| | 2-DH3 | 1.642 | 262.720 | | |
| | 2-DH5 | 2.889 | 308.160 | | |
| 8DPSK | 3-DH1 | 0.3887 | 124.384 | 400 | Pass |
| | 3-DH3 | 1.643 | 262.880 | | |
| | 3-DH5 | 2.893 | 308.587 | | |


Note:

- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5




Test plot as follows:


GFSK Modulation

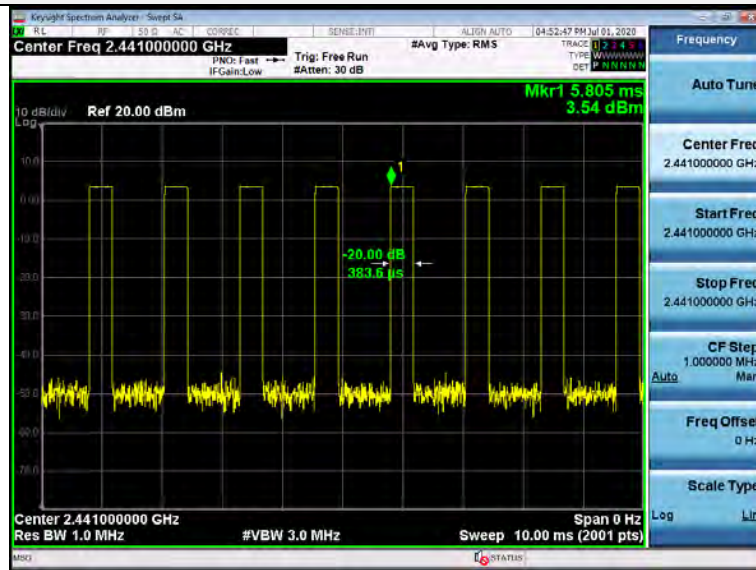


DH1

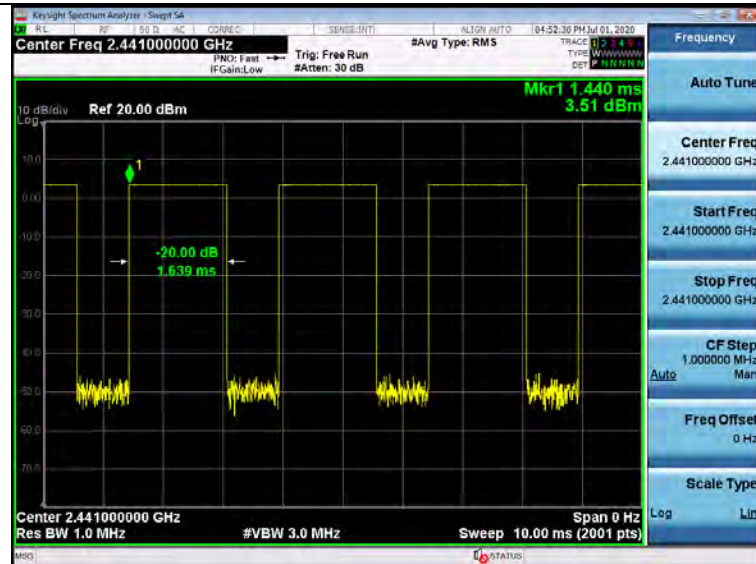


DH3

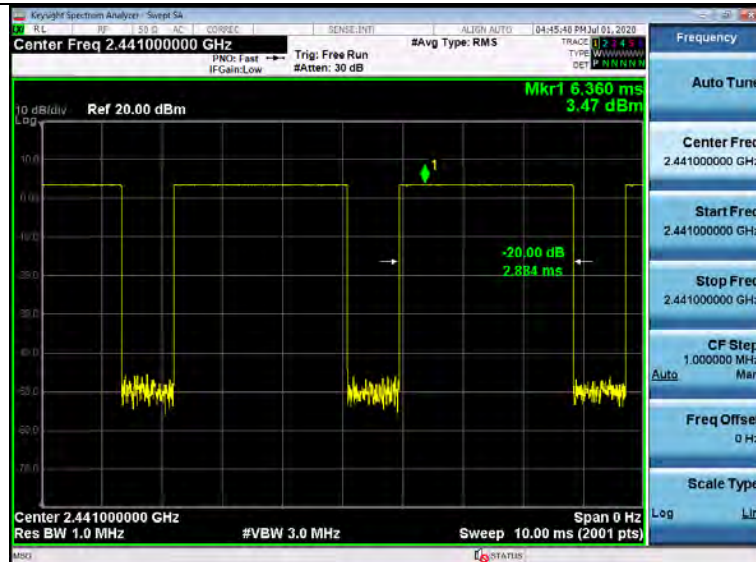


DH5

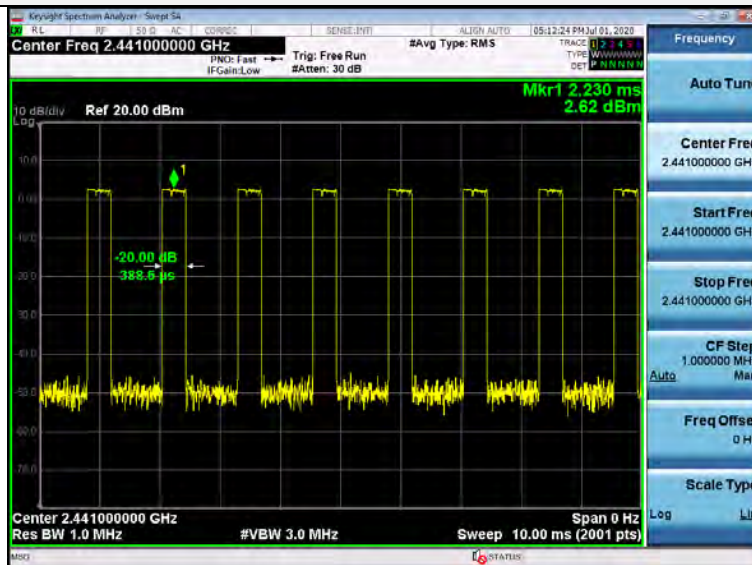 $\pi/4$ DQPSK Modulation

2-DH1

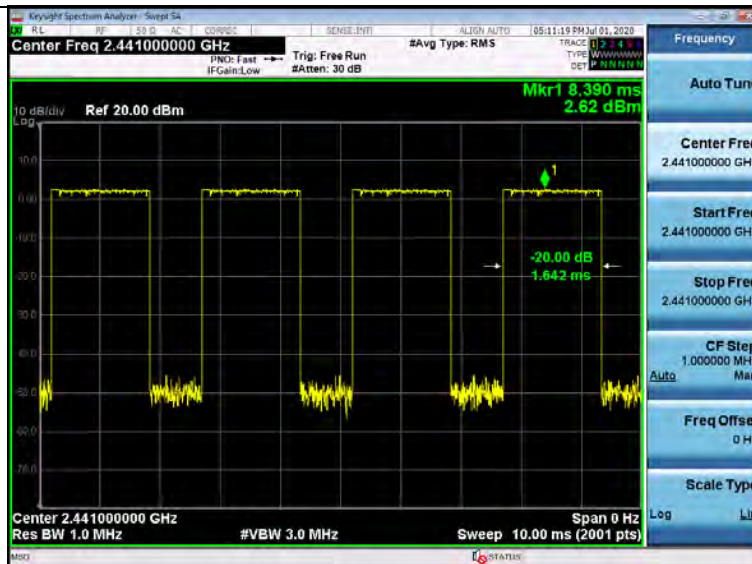


2-DH3

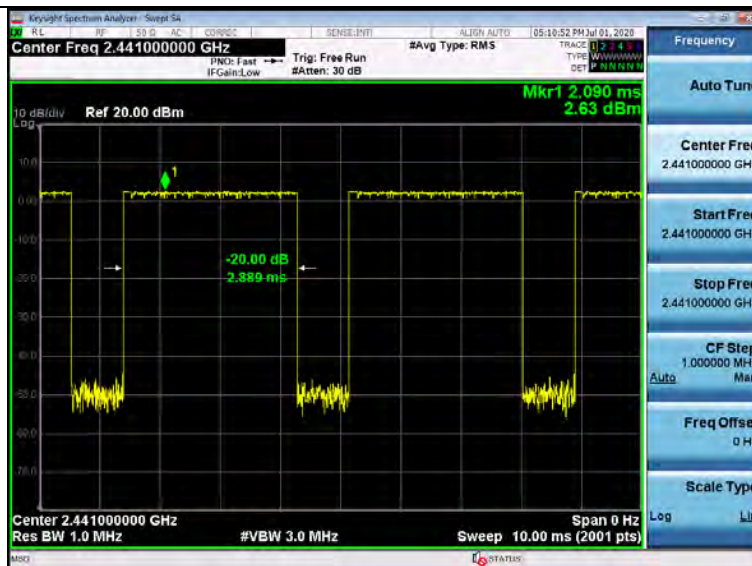


2-DH5




8DPSK Modulation

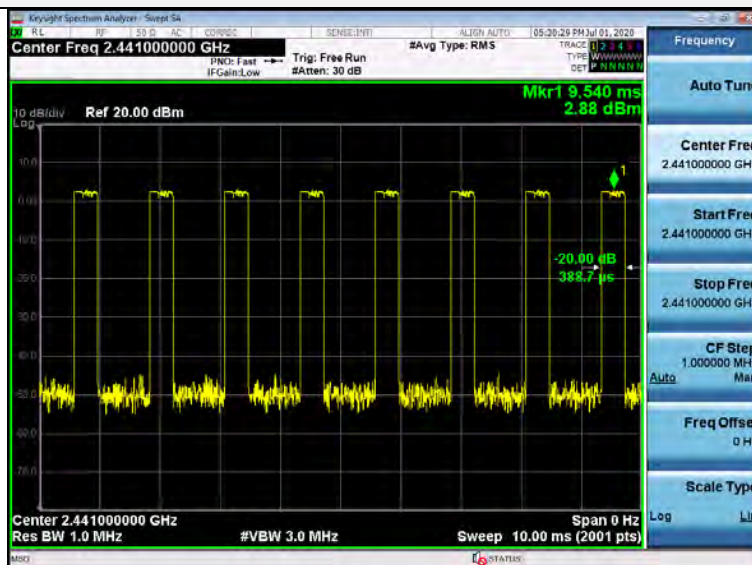

3-DH1

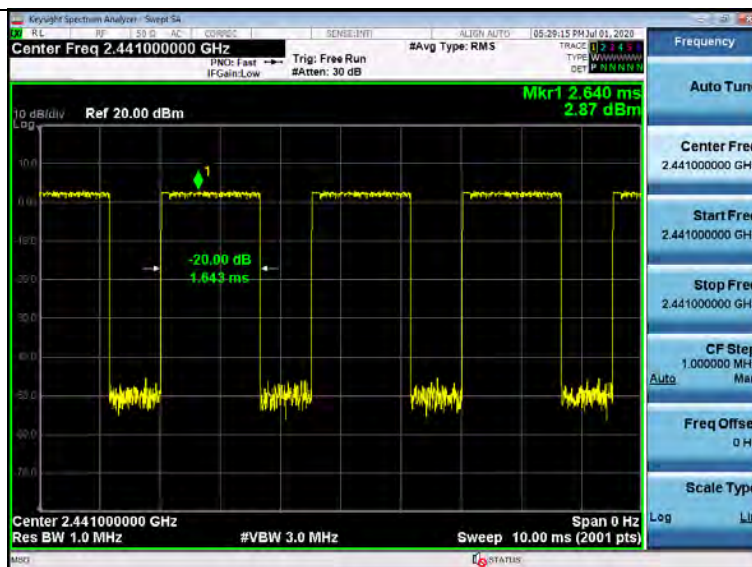

3-DH3

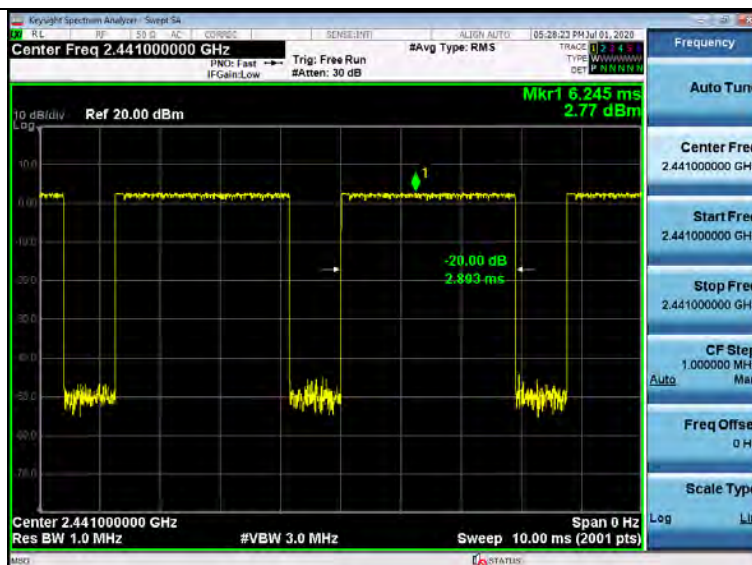

3-DH5



3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration




Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.



Test plot as follows:

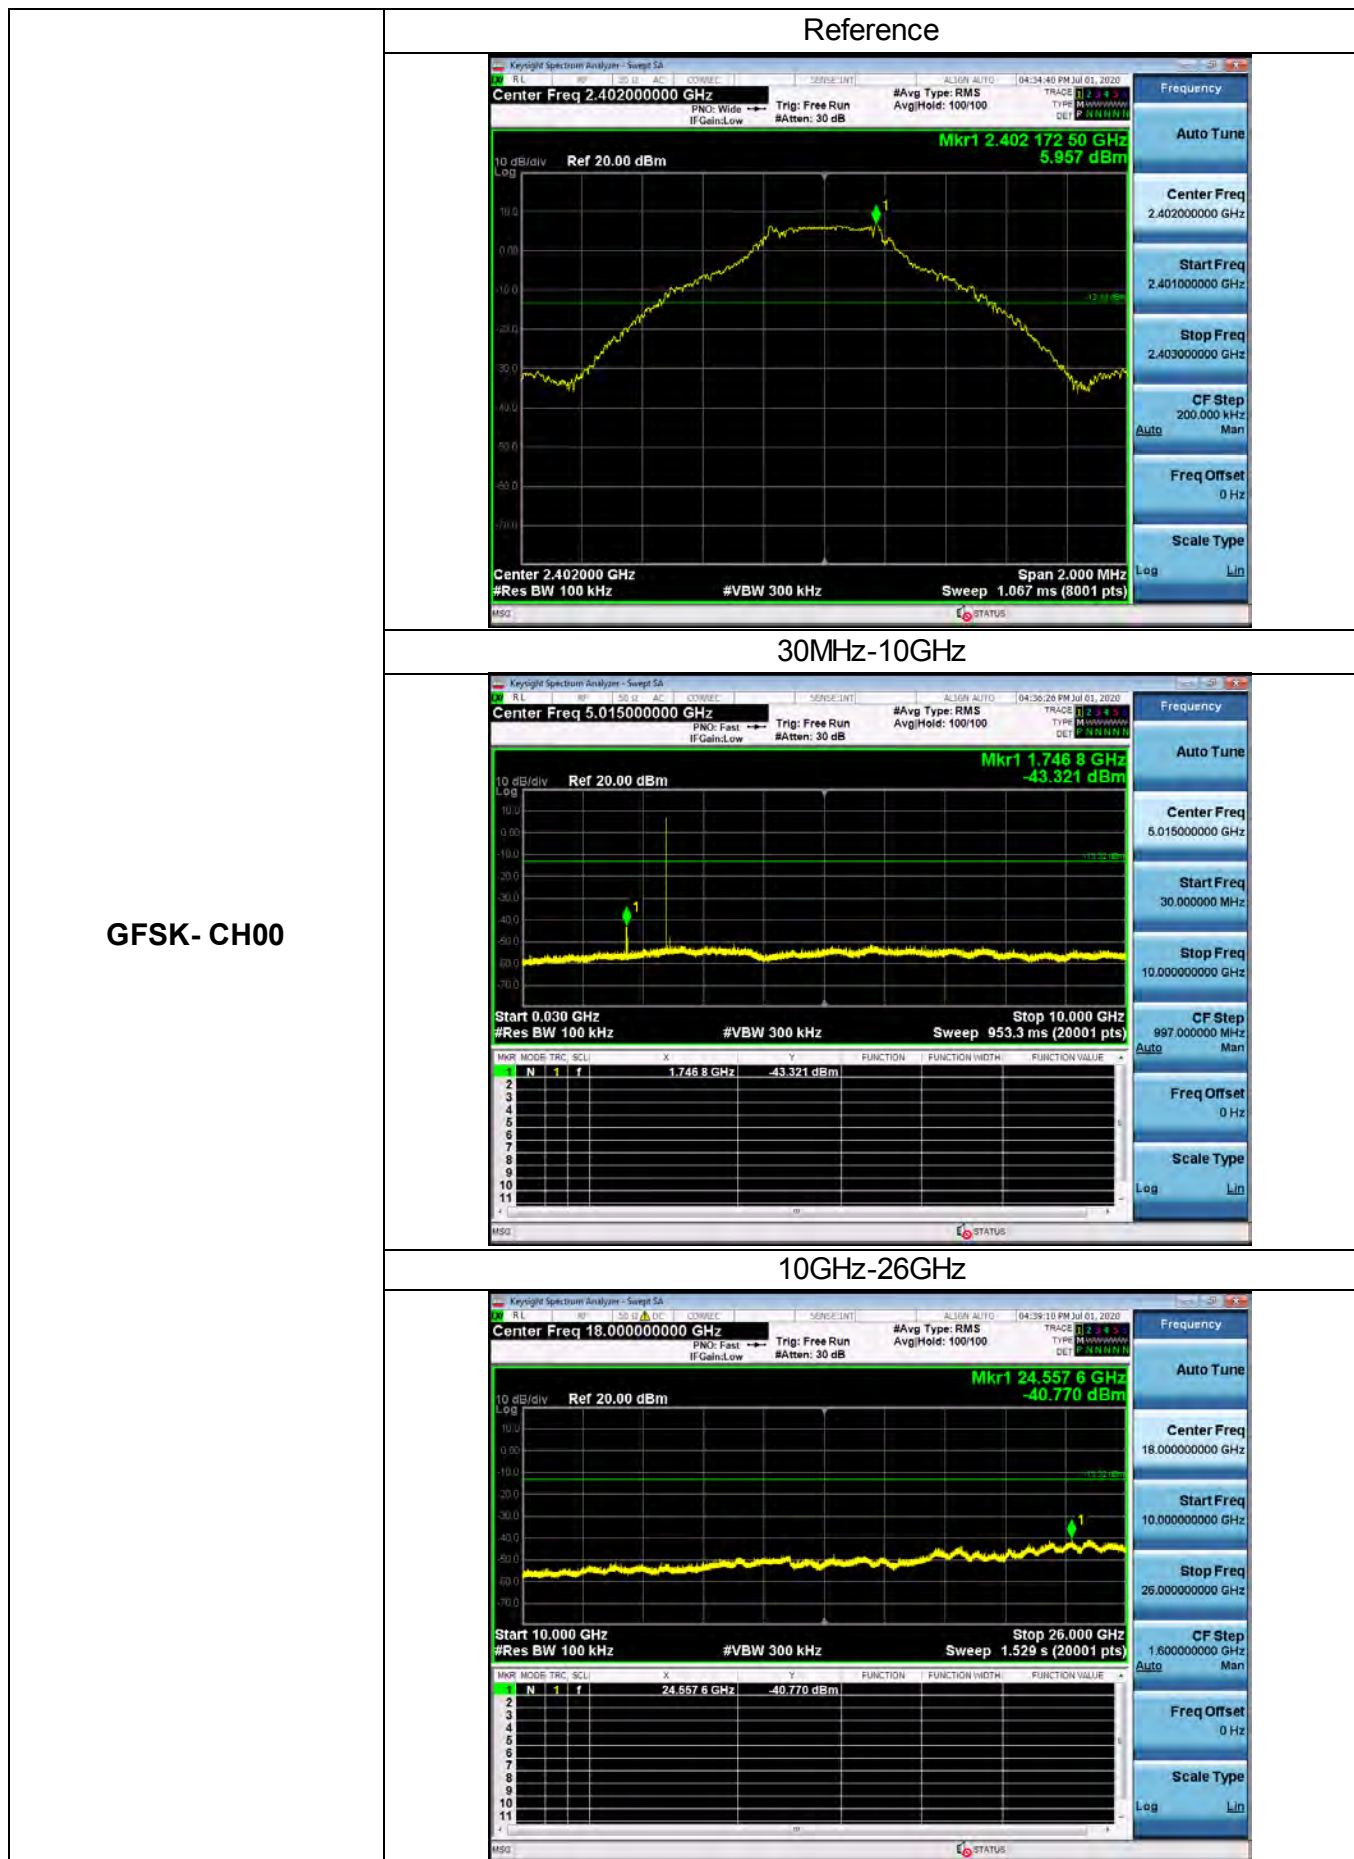




GFSK- CH39

Reference



30MHz-10GHz

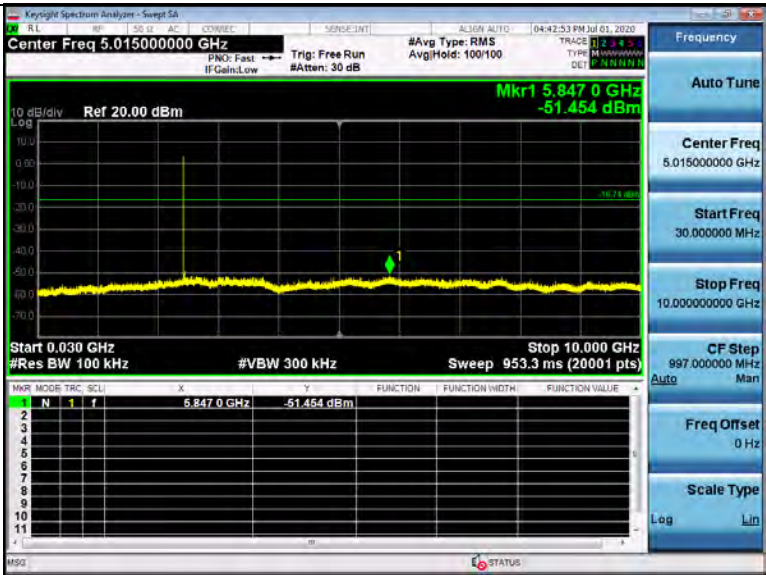

10GHz-26GHz






GFSK- CH78


Reference



30MHz-10GHz

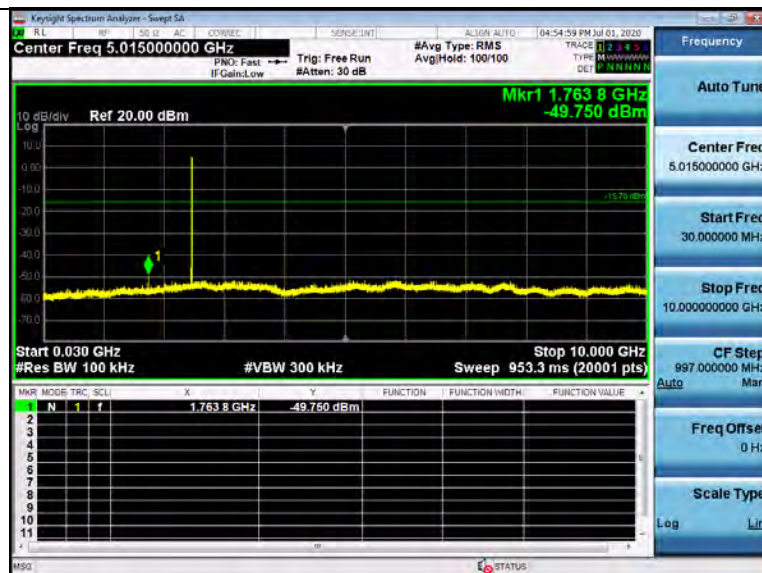


10GHz-26GHz

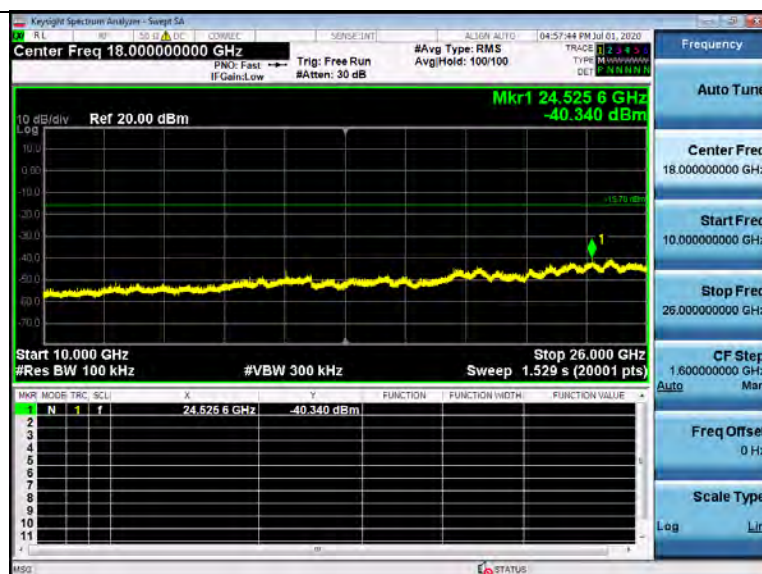





Left Band edge hopping off

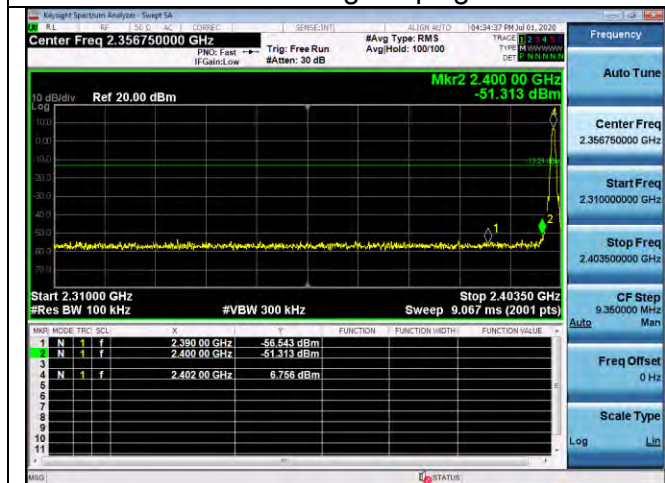


Right Band edge hopping off

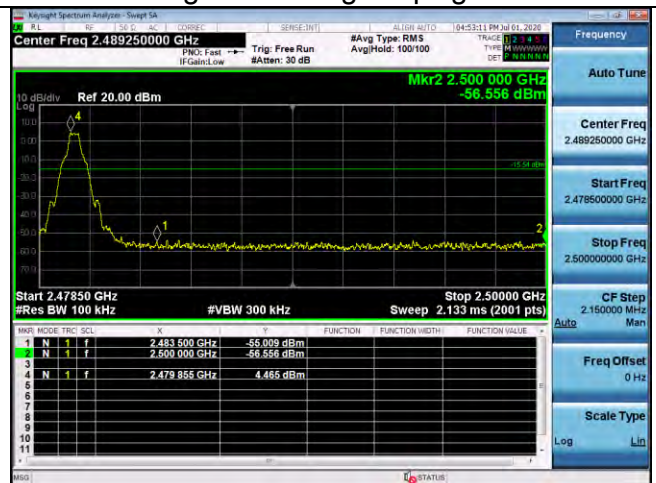

Left Band edge hopping on

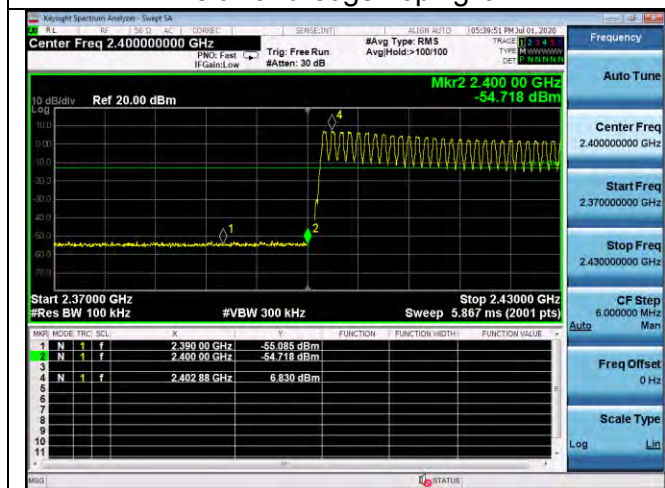

Right Band edge hopping on

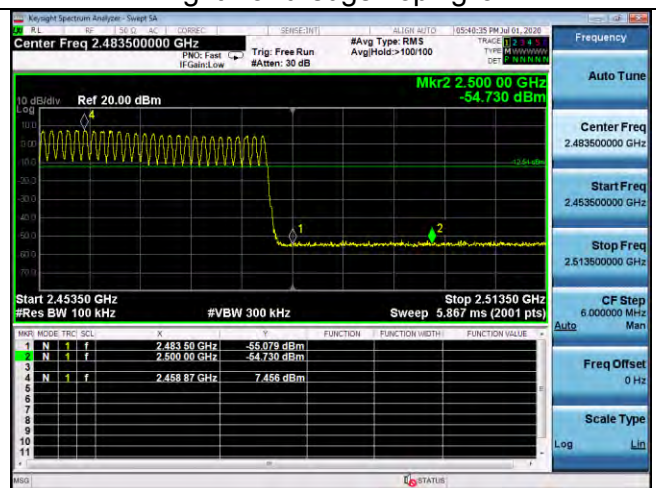





Reference



30MHz-10GHz

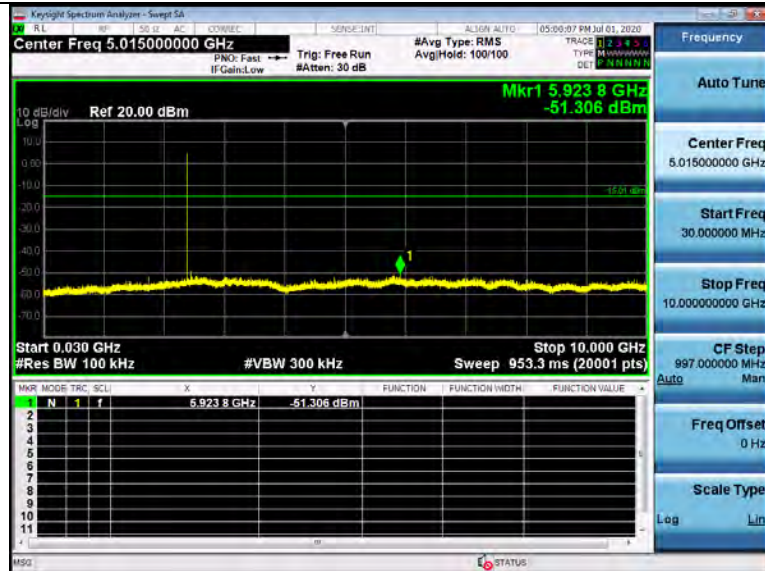

10GHz-26GHz

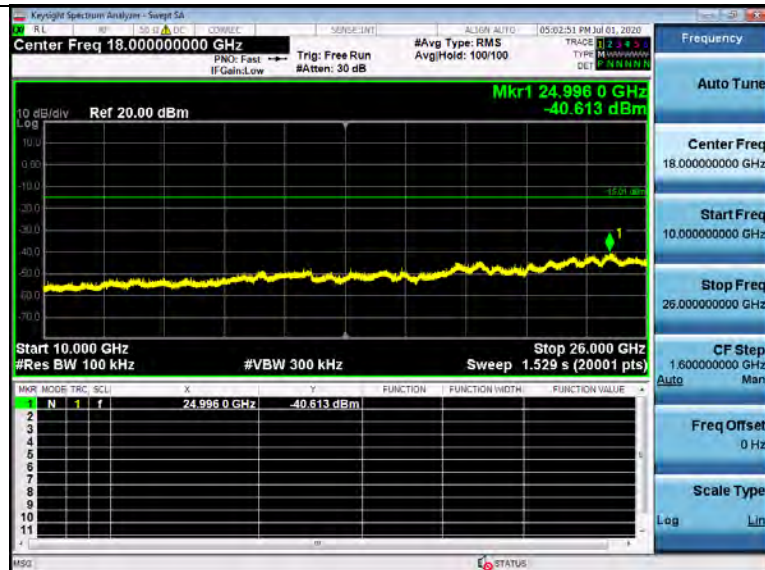
 π /4DQPSK - CH00




Reference



30MHz-10GHz

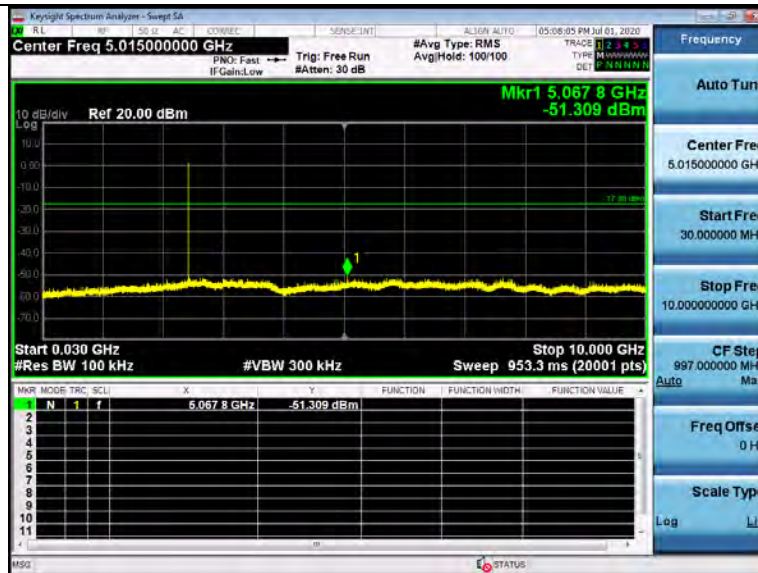


10GHz-26GHz

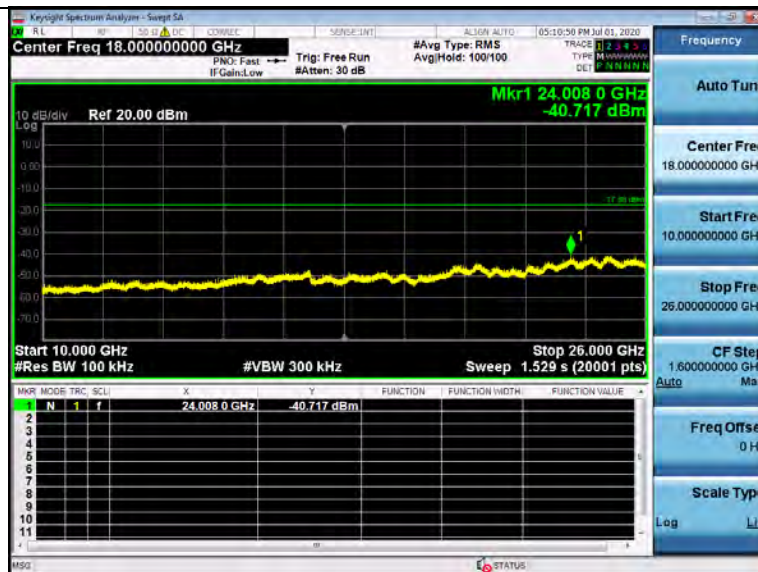
 π /4DQPSK - CH39

 π /4DQPSK – CH78

Reference

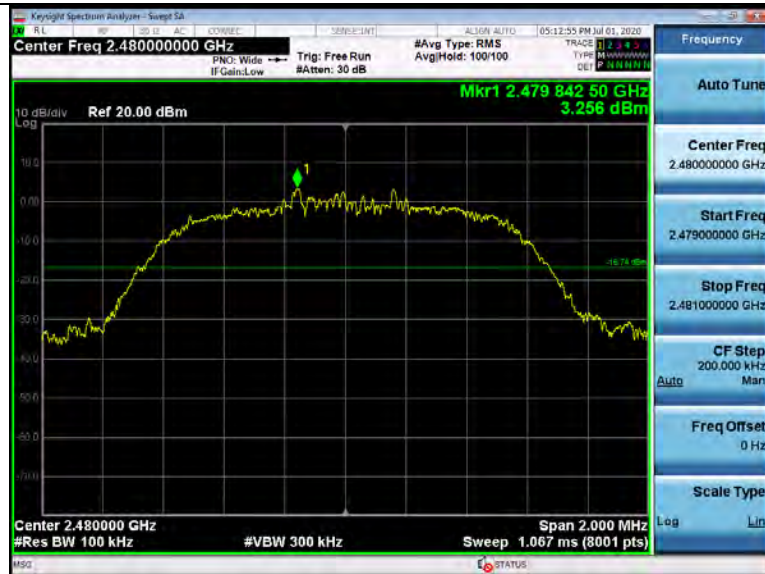

30MHz-10GHz

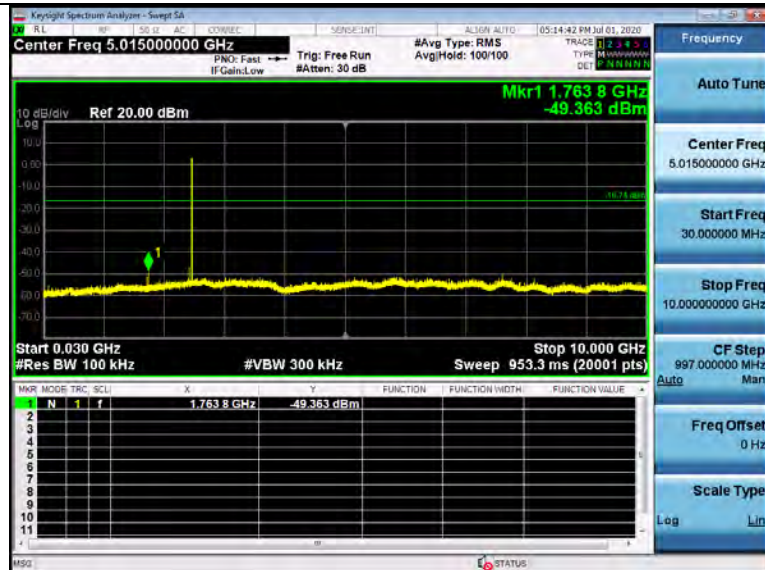


10GHz-26GHz







Left Band edge hopping off

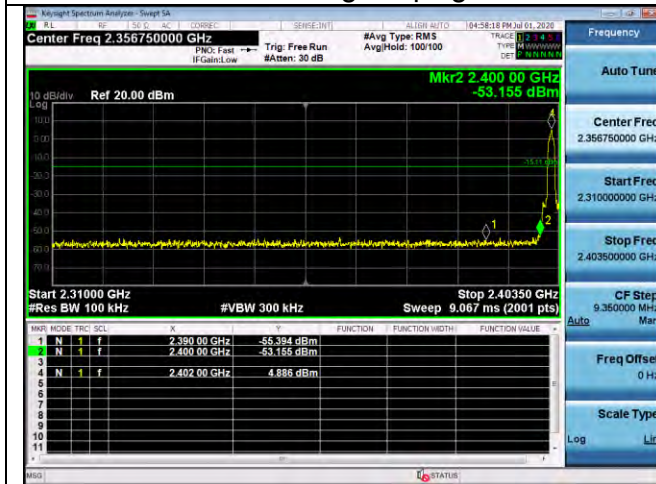


Right Band edge hopping off

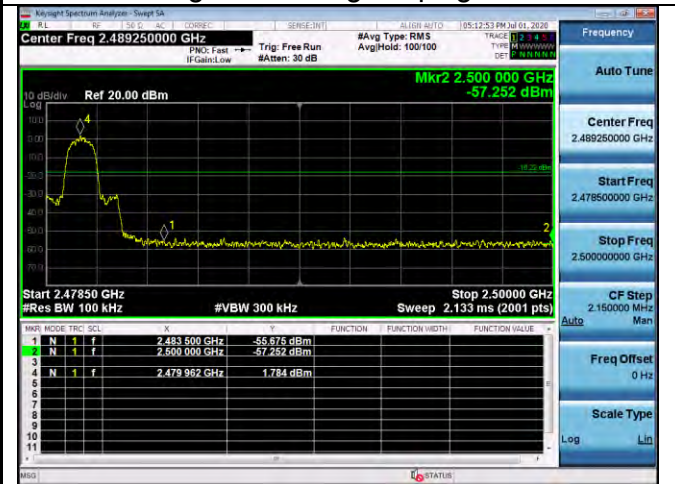

Left Band edge hopping on

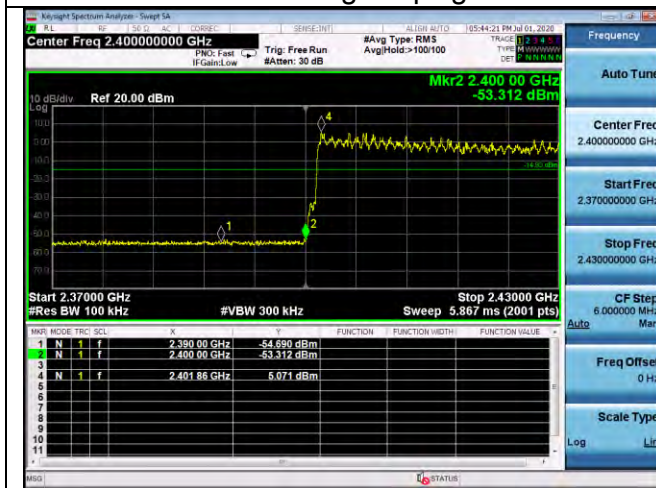


Right Band edge hopping on

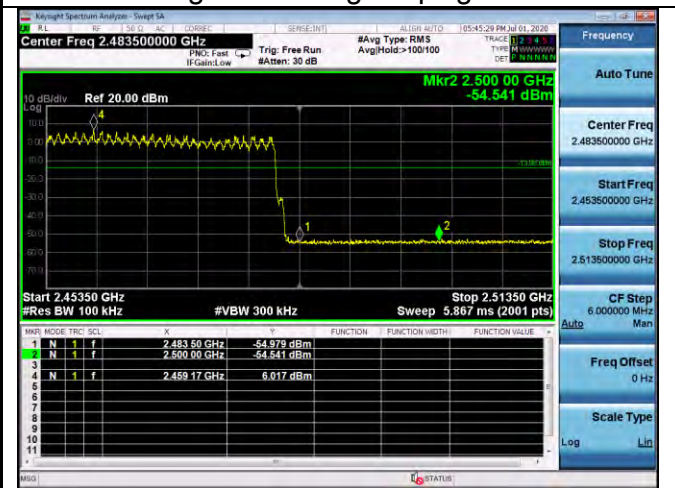





Reference

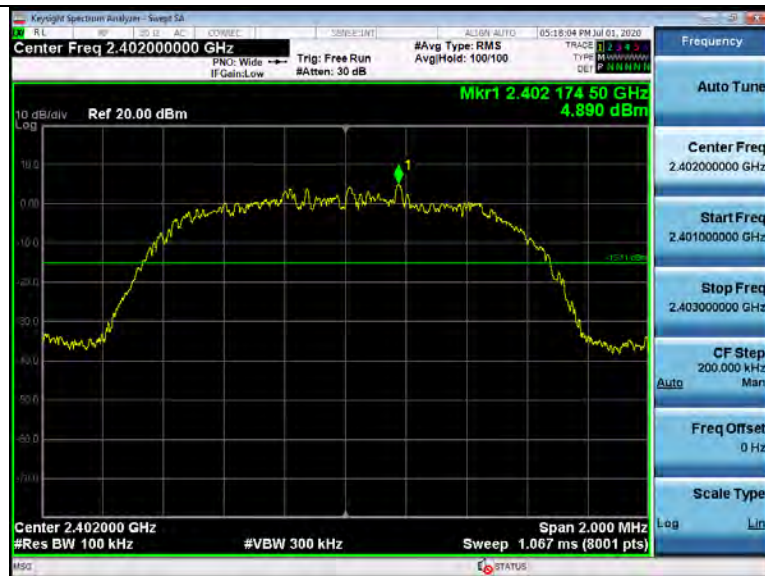

30MHz-10GHz

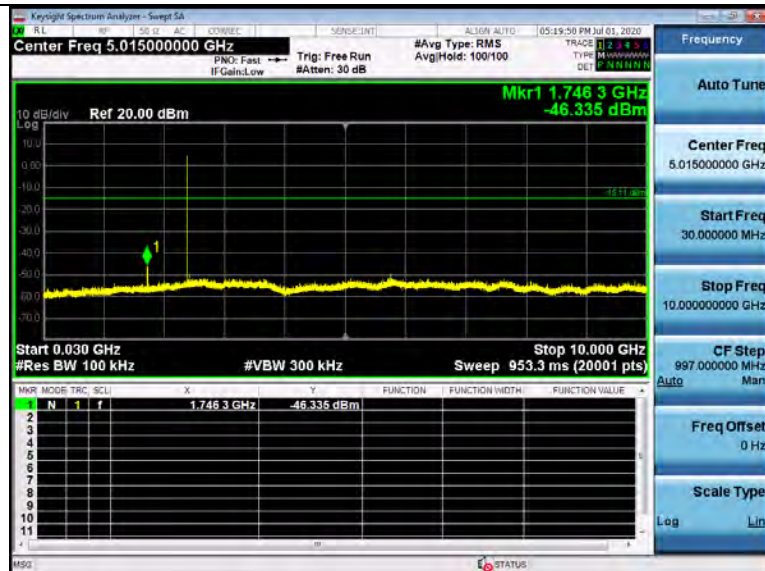

10GHz-26GHz

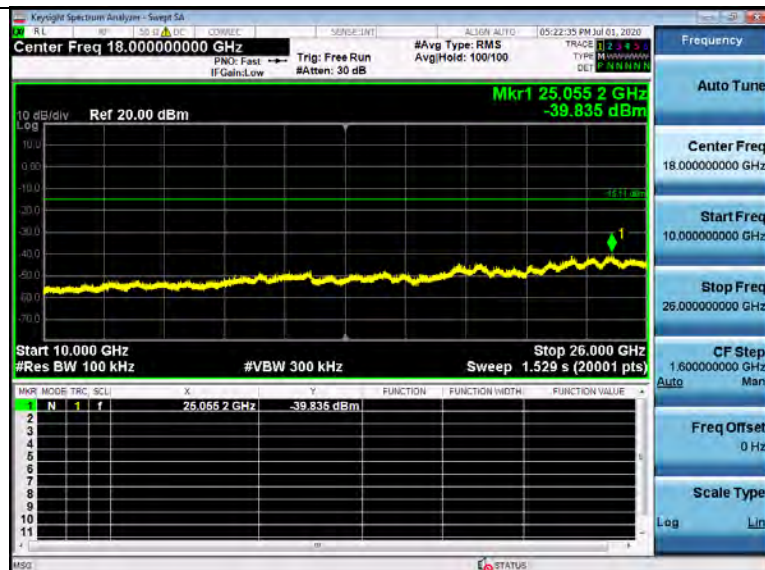


8DPSK - CH00




Reference



30MHz-10GHz

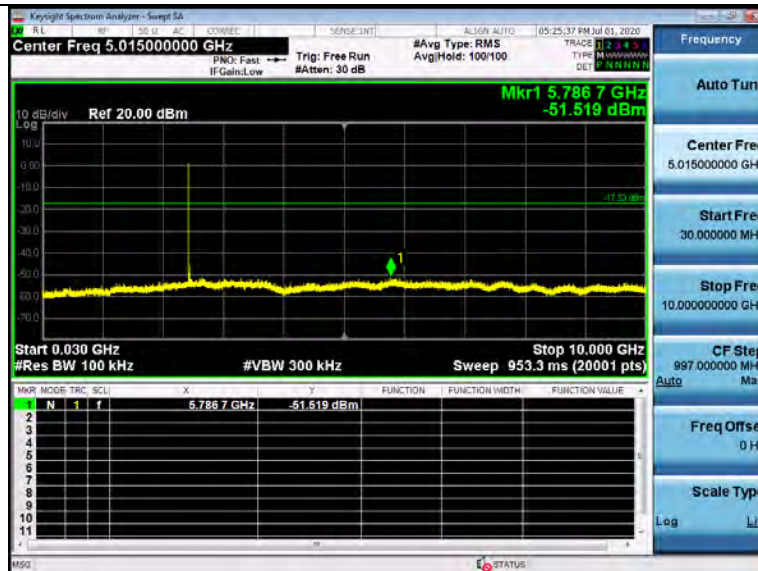

10GHz-26GHz

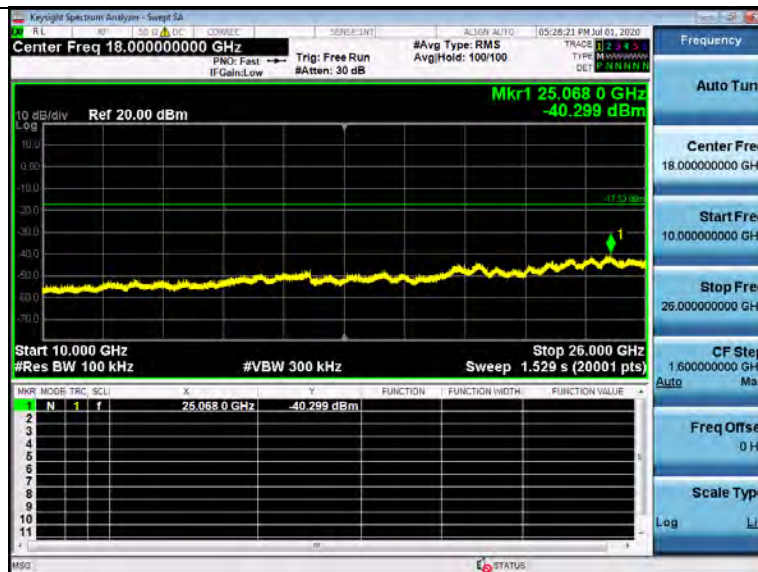

8DPSK – CH39




8DPSK – CH78


Reference



30MHz-10GHz

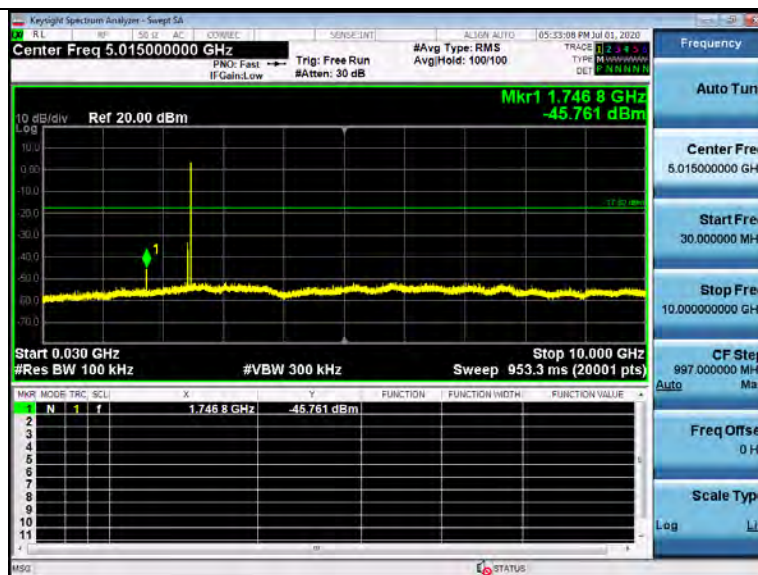


10GHz-26GHz

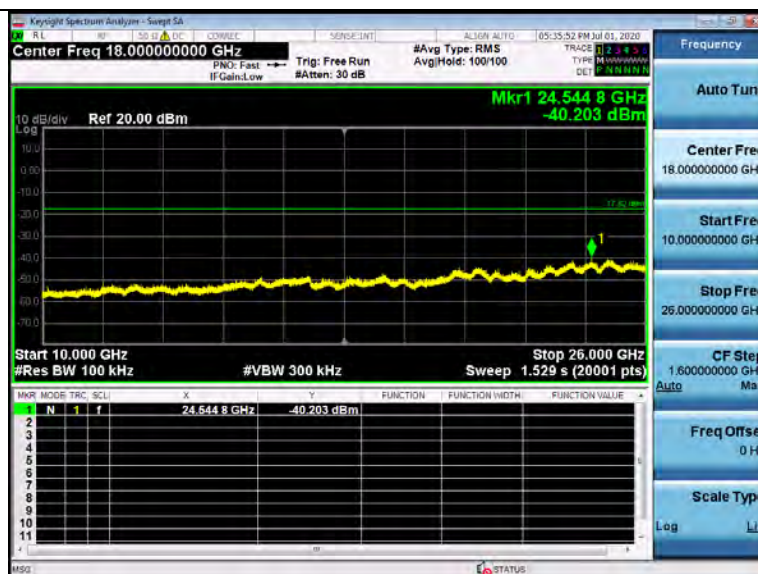





Left Band edge hopping off

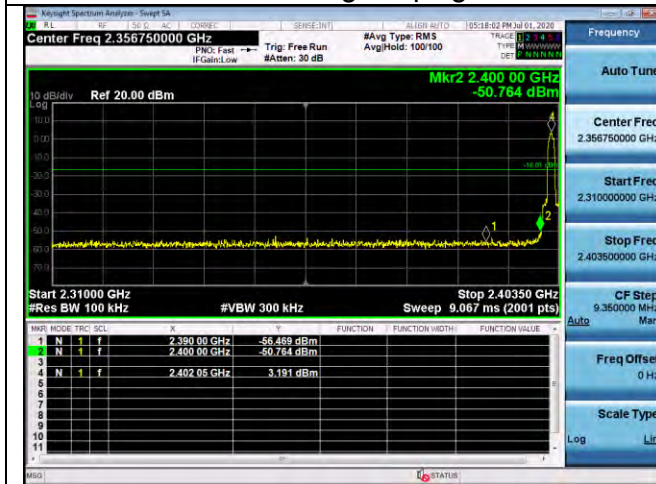


Right Band edge hopping off

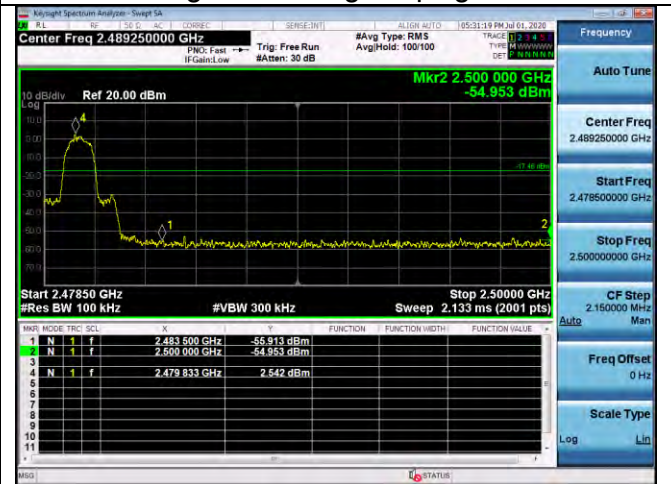

Left Band edge hopping on

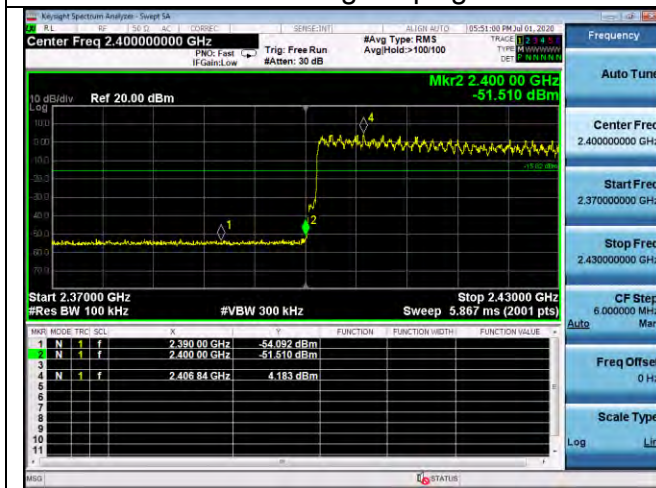

Right Band edge hopping on

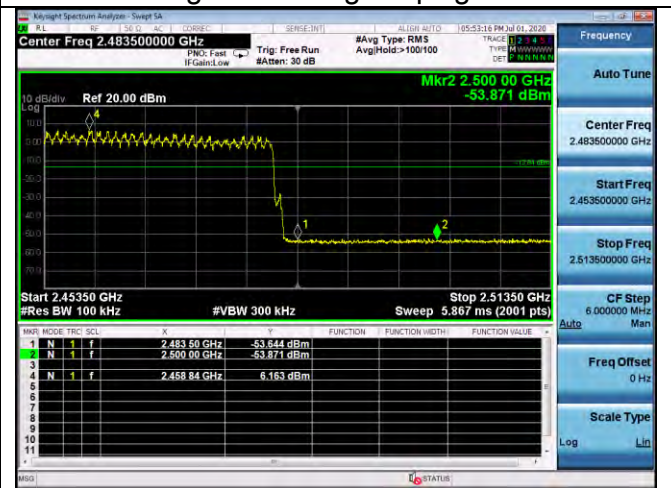

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

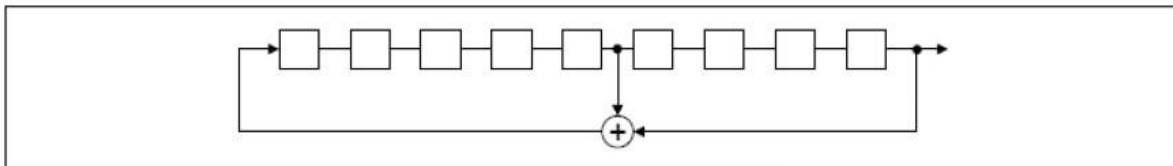

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

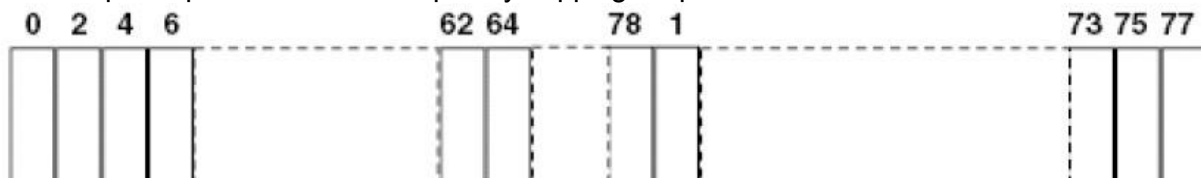

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The FPC Antenna used in the product is a permanently connected antenna that complies with the provisions of part 15.203 requirement in this section. The antenna used in this product is a FPC Antenna, The directional gains of antenna used for transmitting is -3.1dBi.


BT Antenna

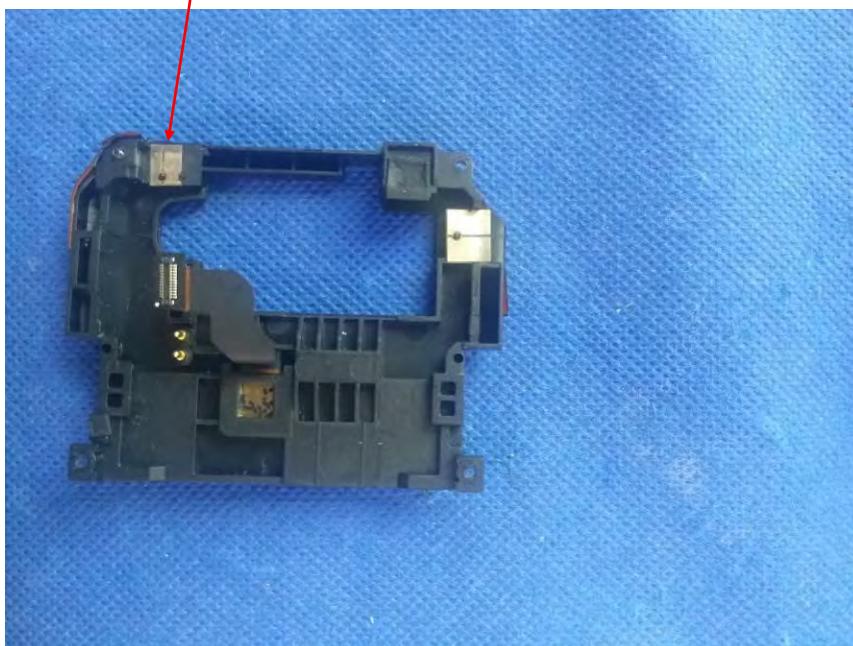




4. Test Setup Photos of the EUT

30MHz-1000MHz

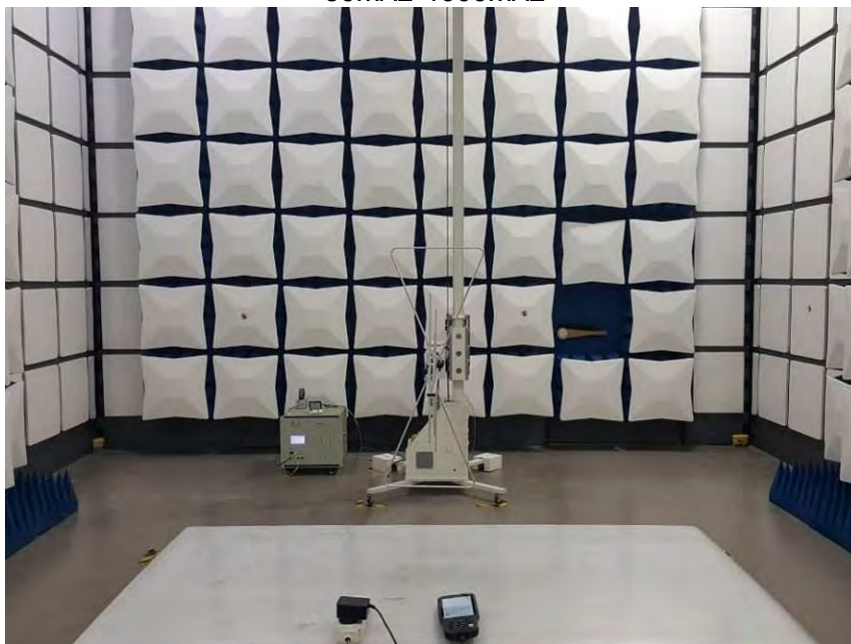

Above 1000MHz

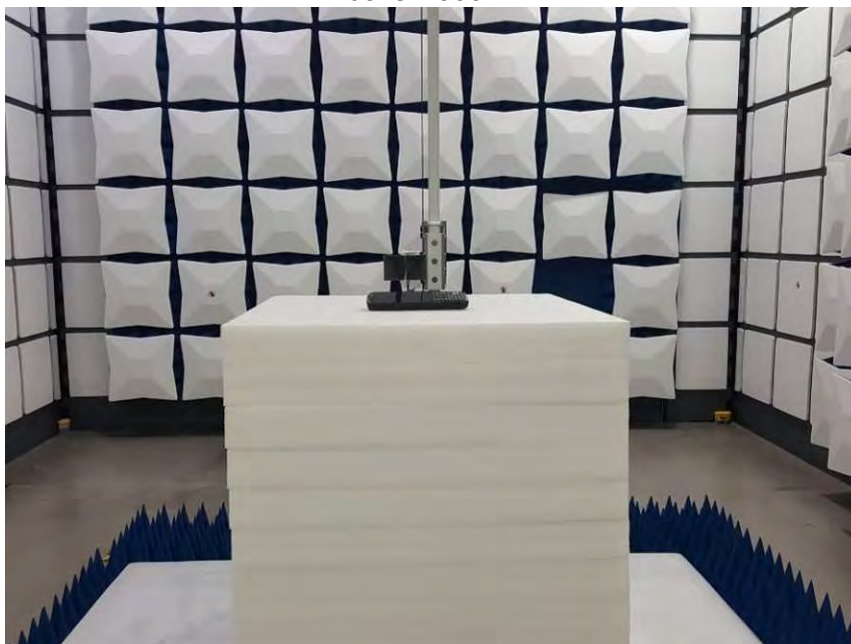



Conducted Emission




5. PHOTOS OF THE EUT

External Photos













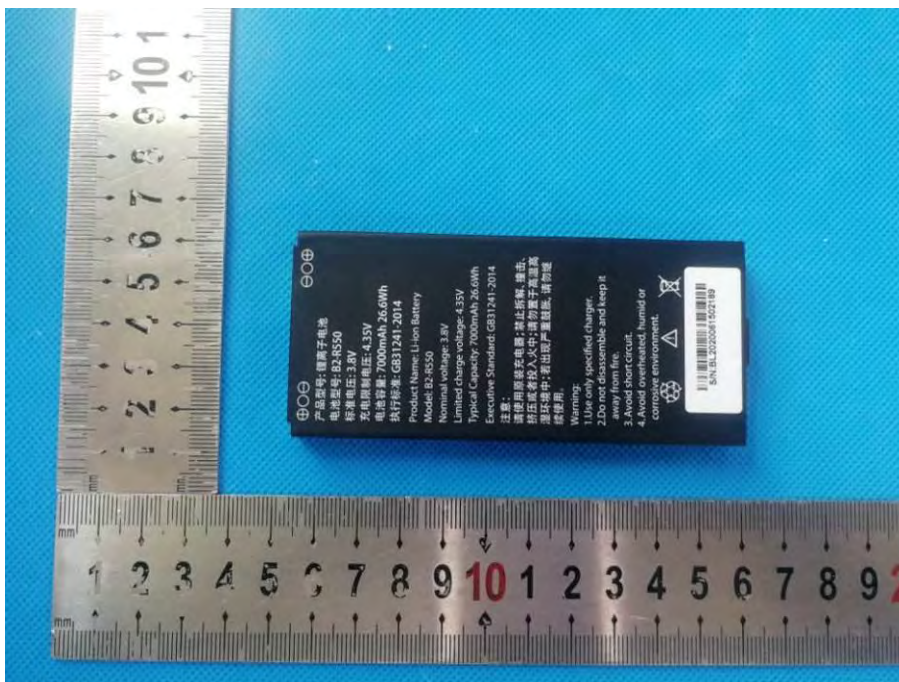




Internal Photos


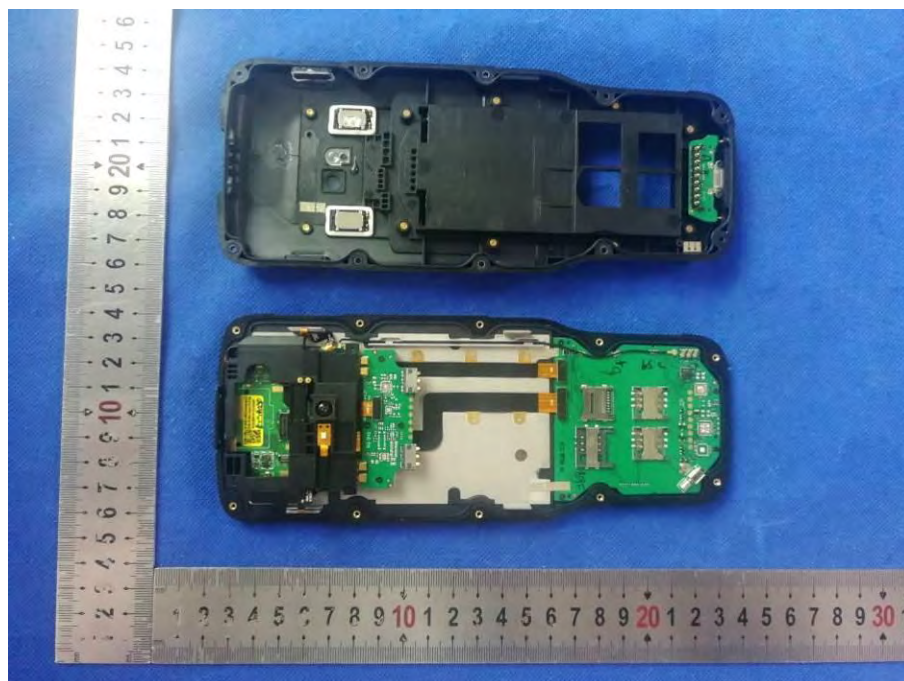


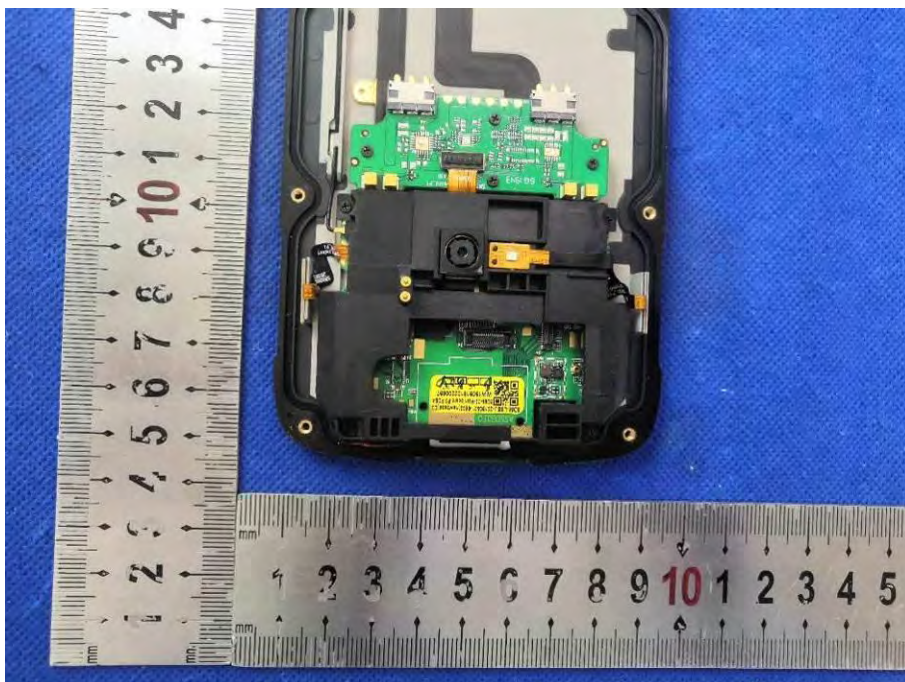
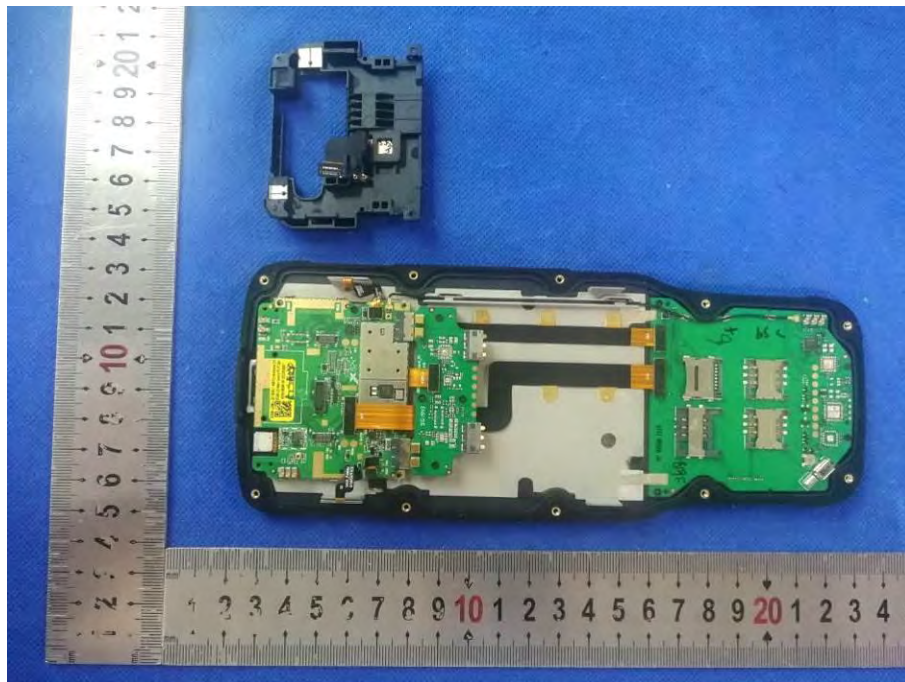



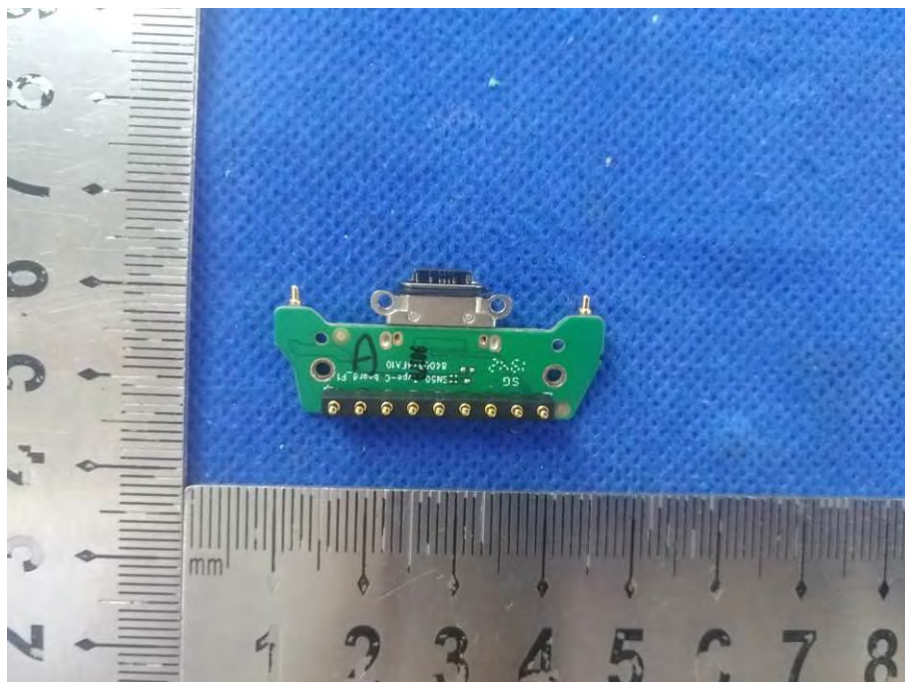
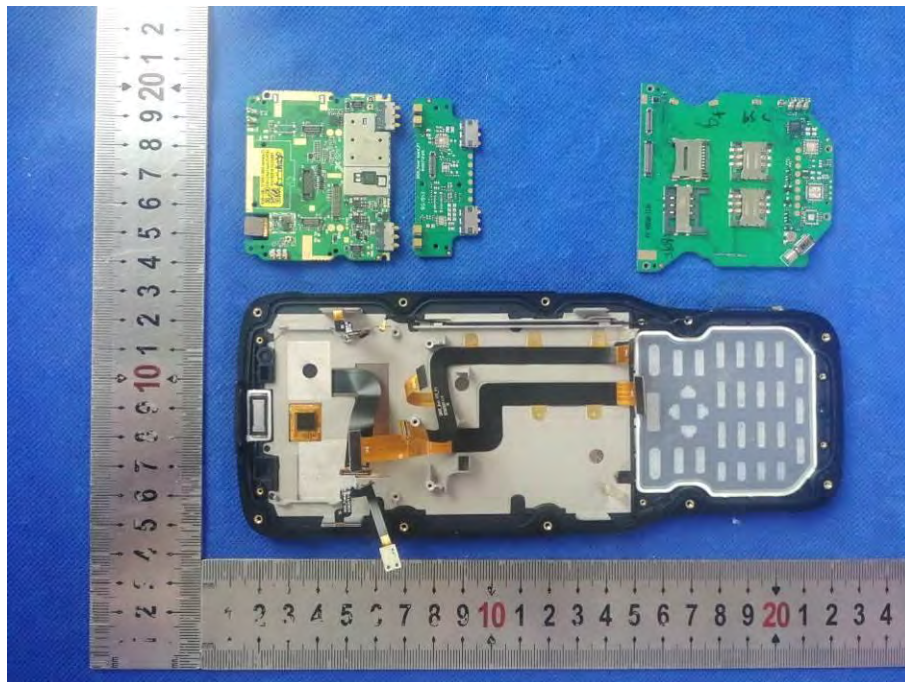


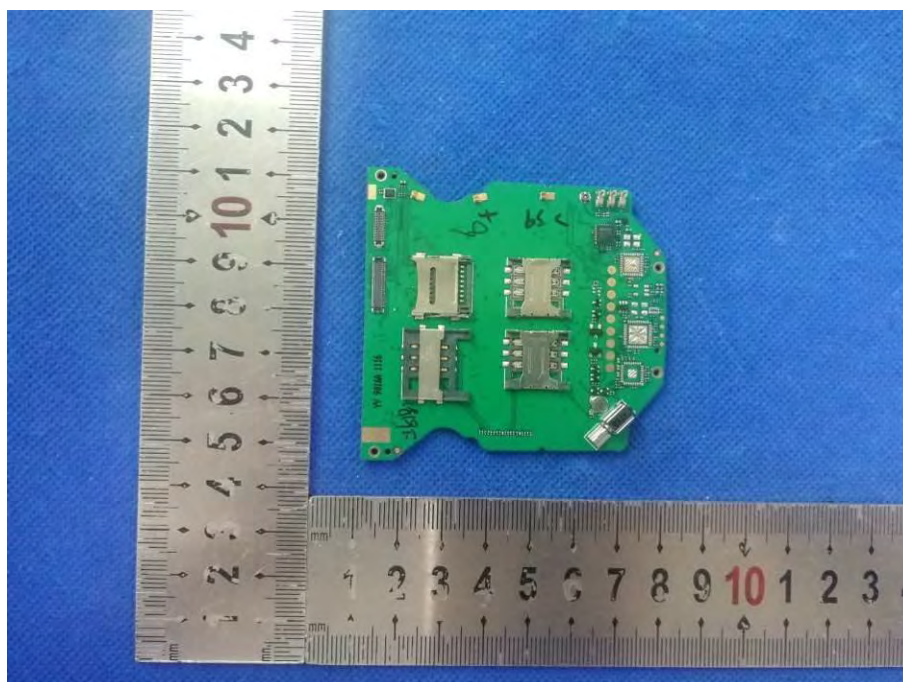
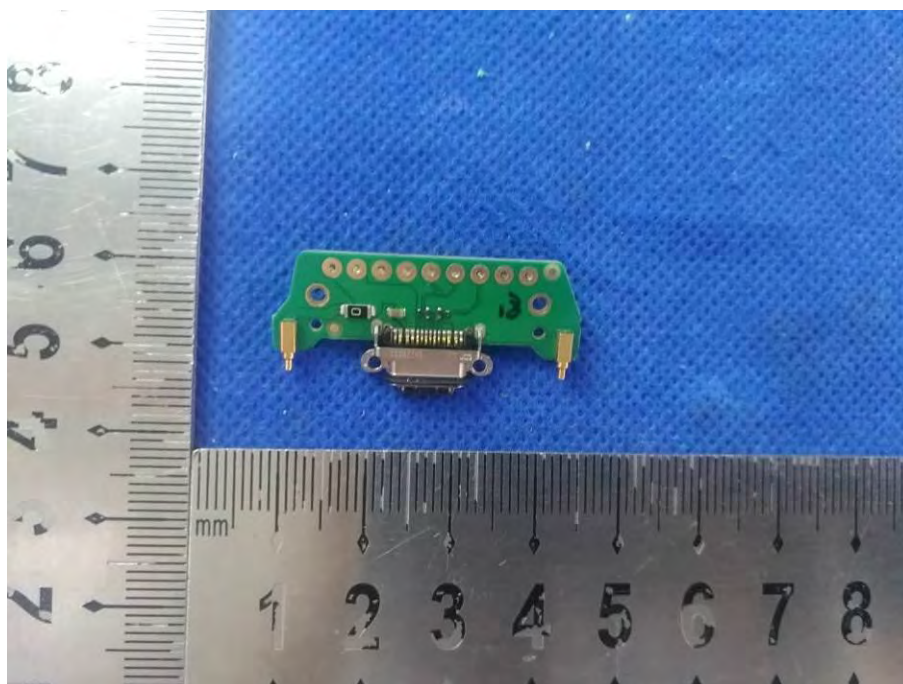


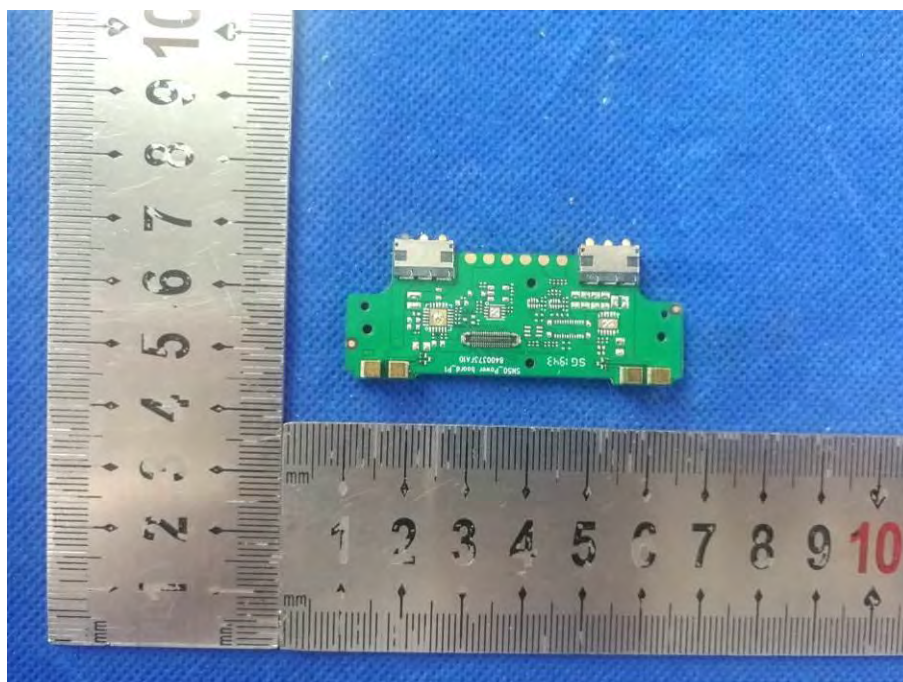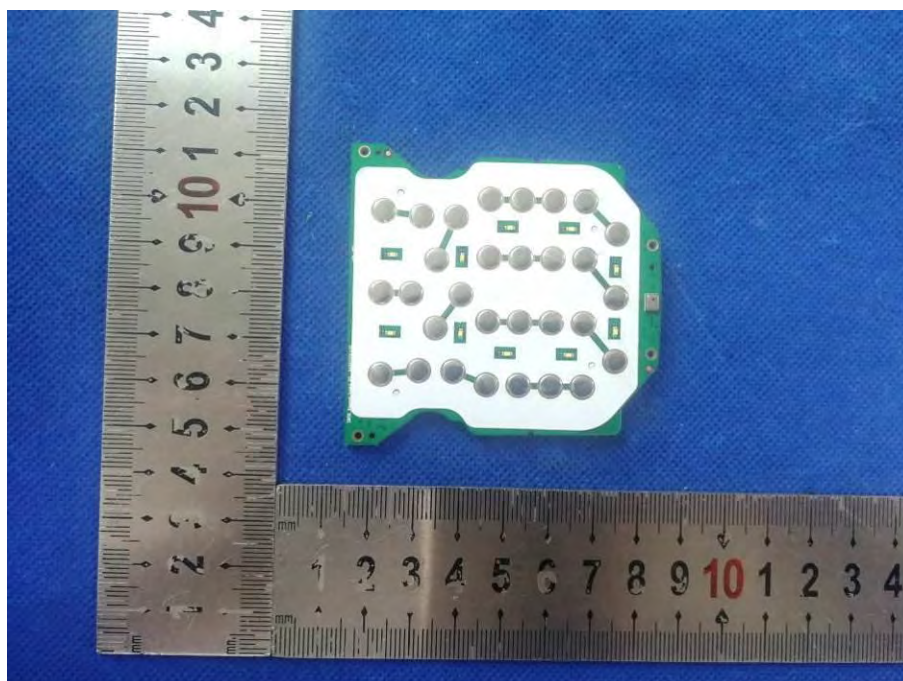

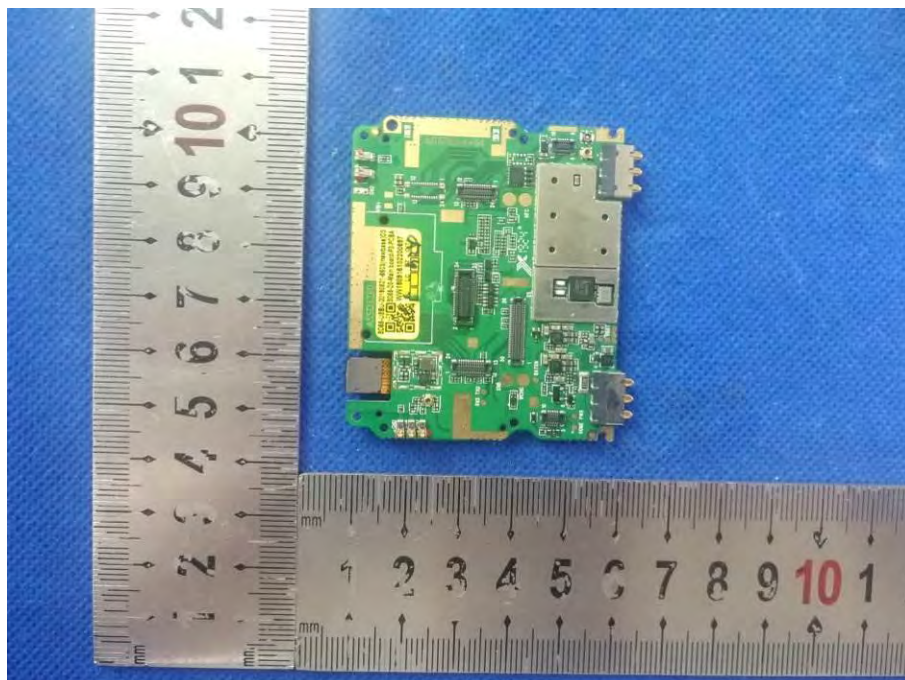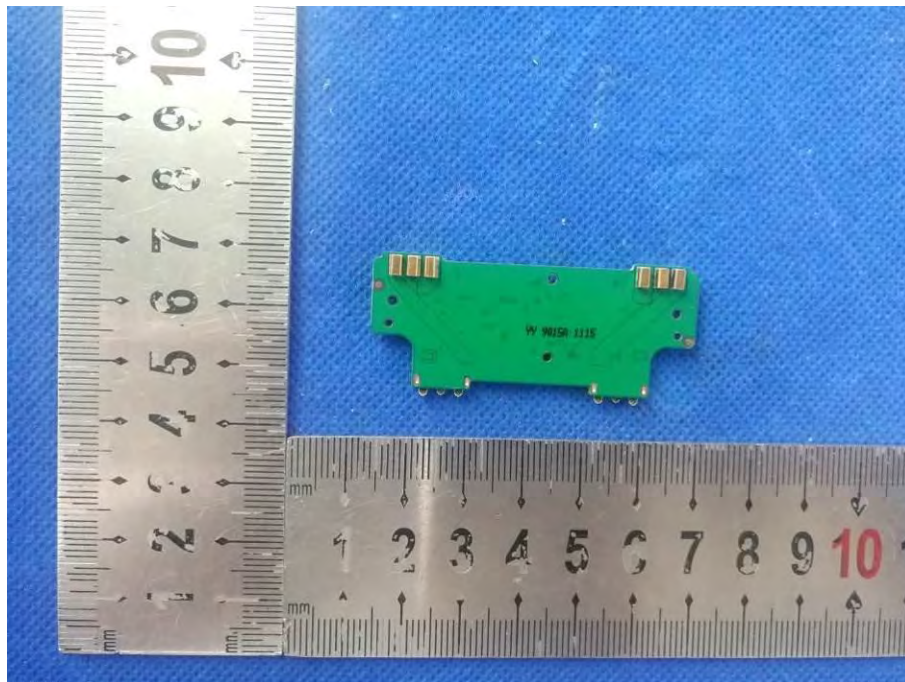

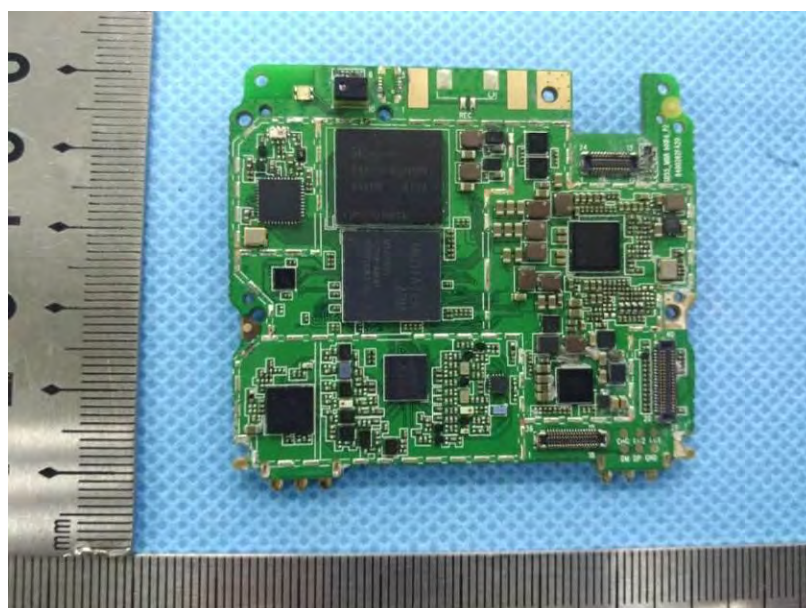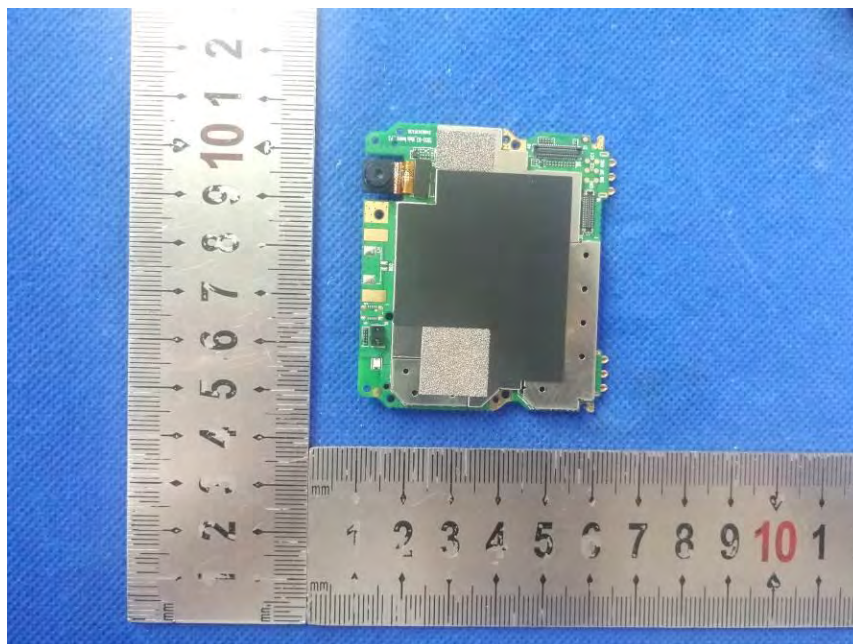

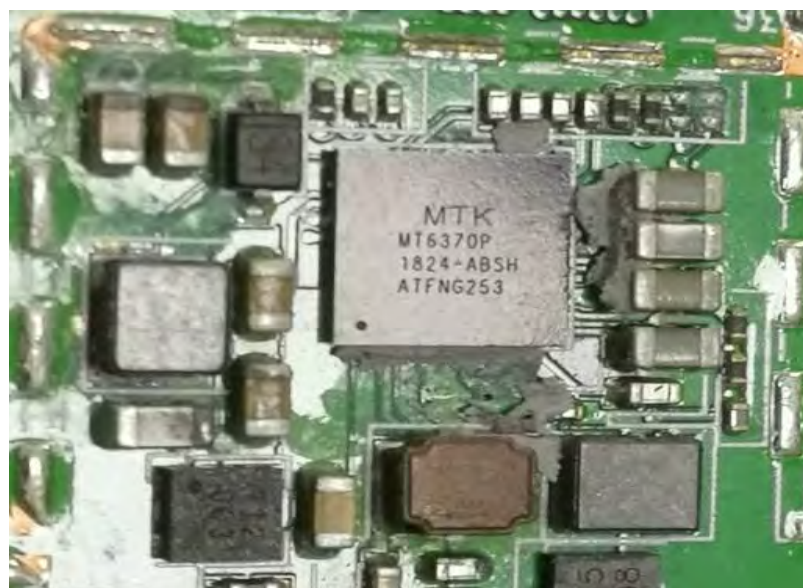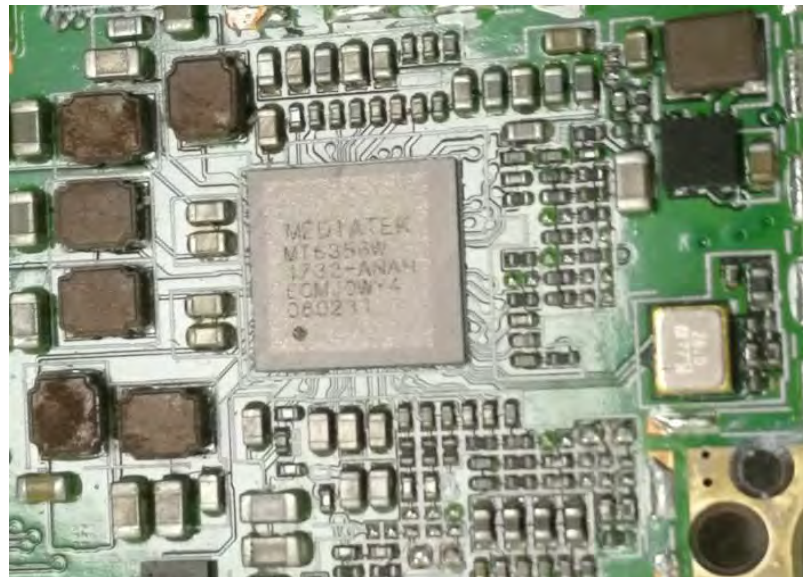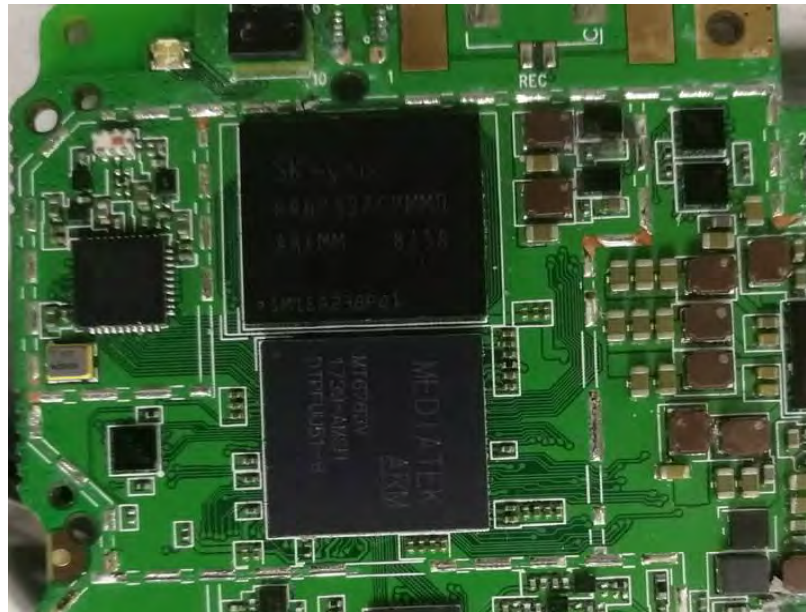

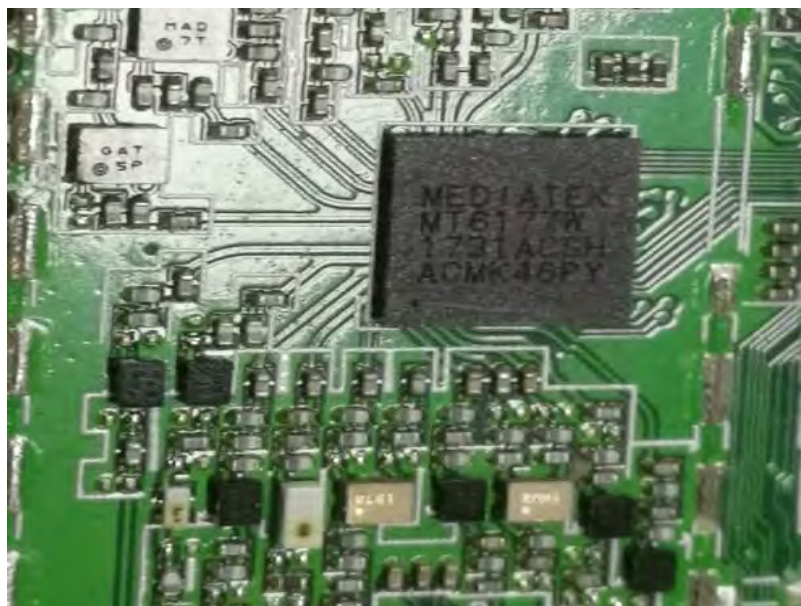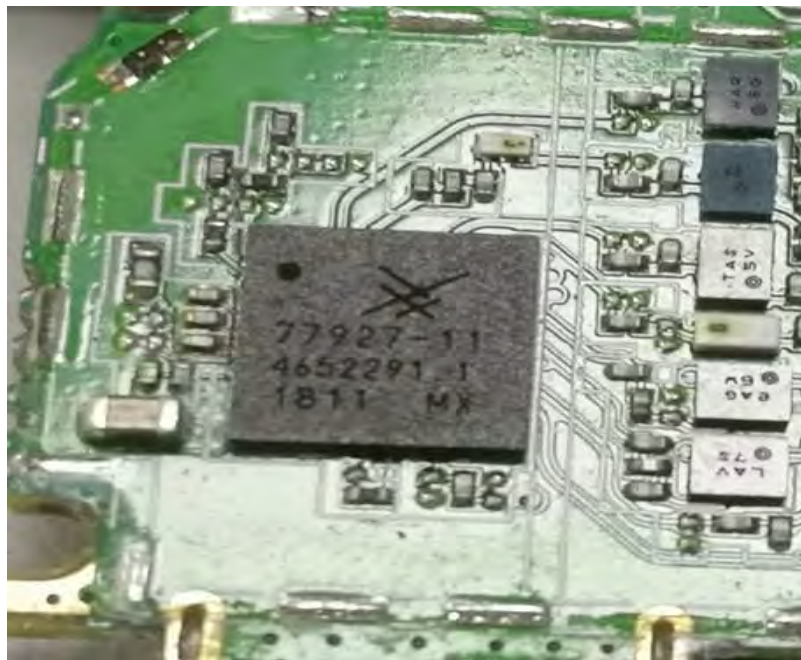







BT/WIFI ANT

GPS ANT

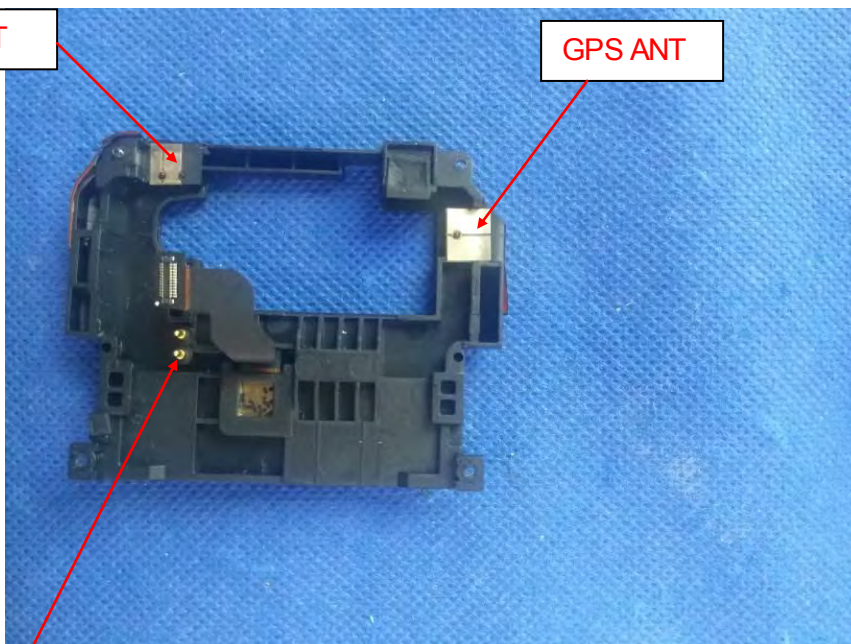

NFC ANT



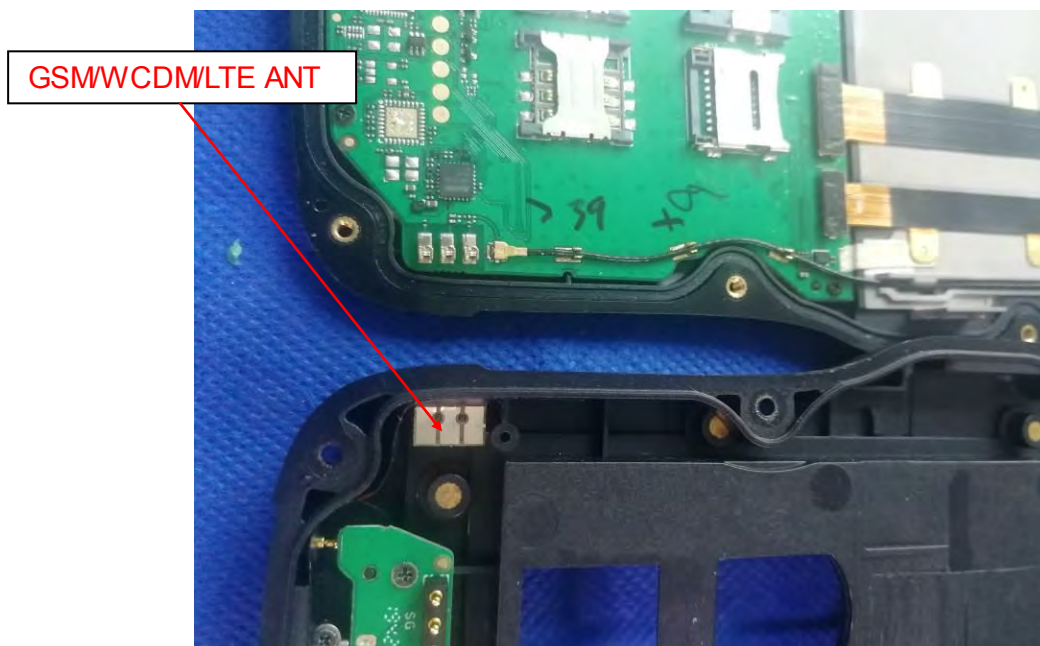

END