



CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel: +86-755- 27521059 Fax: +86-755- 27521011 Http://www.sz-ctc.org.cn

TEST REPORT

Report No.: **CTC20231599E03**
FCC ID.....: **2A2C7-MC07AR**
IC.....: **27313-MC07AR**
Applicant.....: **Clear Touch Solutions, Inc.**
Address.....: 1100 Thousand Oaks Blvd. Greenville, SC 29607, United States
Manufacturer.....: Clear Touch Solutions, Inc.
Address.....: 1100 Thousand Oaks Blvd. Greenville, SC 29607, United States
Product Name.....: **CR100 Microphone Receiver**
Trade Mark.....: Clear Touch
Model/Type reference.....: CTS-CR100-245G
Listed Model(s): /
Standard.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
RSS 247 Issue 2
Date of receipt of test sample...: Jul. 24, 2023
Date of testing.....: Jul. 25, 2023 ~ Aug. 18, 2023
Date of issue.....: Aug. 20, 2023
Result.....: **PASS**

Compiled by:

(Printed name+signature) Terry Su

Supervised by:

(Printed name+signature) Eric Zhang

Approved by:

(Printed name+signature) Totti Zhao

Testing Laboratory Name.....: **CTC Laboratories, Inc.**

Address.....: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park,
Shenzhen, Guangdong, China

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit. The test report merely correspond to the test sample.



Table of Contents

Page

1. TEST SUMMARY	3
1.1. TEST STANDARDS	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION	4
1.4. TEST FACILITY	5
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS	6
2. GENERAL INFORMATION.....	7
2.1. CLIENT INFORMATION	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. ACCESSORY EQUIPMENT INFORMATION.....	8
2.4. OPERATION STATE	9
2.5. MEASUREMENT INSTRUMENTS LIST	11
3. TEST ITEM AND RESULTS	13
3.1. CONDUCTED EMISSION	13
3.2. RADIATED EMISSION.....	16
3.3. BAND EDGE EMISSIONS (RADIATED).....	56
3.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	81
3.5. DTS BANDWIDTH	107
3.6. MAXIMUM CONDUCTED OUTPUT POWER.....	121
3.7. POWER SPECTRAL DENSITY	123
3.8. DUTY CYCLE.....	131
3.9. ANTENNA REQUIREMENT	139



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands of 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.

[RSS-247 Issue 2 February 2017](#) — Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices.

[RSS-Gen Issue 5](#): General Requirements for Compliance of Radio Apparatus.

1.2. Report version

Revised No.	Date of issue	Description
01	Aug. 20, 2023	Original



1.3. Test Description

FCC Part 15 Subpart C (15.247) / RSS 247 Issue 2				
Test Item	Standard Section		Result	Test Engineer
	FCC	IC		
Antenna Requirement	15.203	/	Pass	Alicia Liu
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Curry Ye
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS 247 5.5	Pass	Alicia Liu
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS 247 5.5	Pass	Alicia Liu
6dB Bandwidth	15.247(a)(2)	RSS 247 5.2 (a)	Pass	Alicia Liu
Conducted Max Output Power	15.247(b)(3)	RSS 247 5.4 (d)	Pass	Alicia Liu
Power Spectral Density	15.247(e)	RSS 247 5.2 (b)	Pass	Alicia Liu
Transmitter Radiated Spurious	15.209&15.247(d)	RSS 247 5.5&RSS-Gen 8.9	Pass	Alicia Liu

Note: The measurement uncertainty is not included in the test result.



1.4. Test Facility

CTC Laboratories, Inc.

Add: 1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.

1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.





Test Items	Measurement Uncertainty	Notes
DTS Bandwidth	$\pm 0.0196\%$	(1)
Maximum Conducted Output Power	± 0.686 dB	(1)
Maximum Power Spectral Density Level	± 0.743 dB	(1)
Band-edge Compliance	± 1.328 dB	(1)
Unwanted Emissions In Non-restricted Freq Bands	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	21°C ~ 27°C
Relative Humidity:	40% ~ 60%
Air Pressure:	101kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Clear Touch Solutions, Inc.
Address:	1100 Thousand Oaks Blvd. Greenville, SC 29607, United States
Manufacturer:	Clear Touch Solutions, Inc.
Address:	1100 Thousand Oaks Blvd. Greenville, SC 29607, United States

2.2. General Description of EUT

Product Name:	CR100 Microphone Receiver
Trade Mark:	Clear Touch
Model/Type reference:	CTS-CR100-245G
Listed Model(s):	/
Power supply:	5Vdc from USB Port
Hardware version:	B23073
Software version:	V0.1.9
WIFI 802.11b/ g/ n(HT20)/ n(HT40)/ ax(HE20)/ ax(HE40)	
Modulation:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/ n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
Operation frequency:	802.11b/ g/ n(HT20)/ ax(HE20): 2412MHz~2462MHz 802.11n(HT40)/ ax(HE40): 2422MHz~2452MHz
Channel number:	802.11b/ g/ n(HT20)/ ax(HE20): 11channels 802.11n(HT40)/ ax(HE40): 7channels
Channel separation:	5MHz
Antenna type:	PCB Antenna
Antenna gain:	5.08dBi Max



2.3. Accessory Equipment information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14G3 ACL	MP246QDR	Lenovo
/	/	/	/
Cable Information			
Name	Shielded Type	Ferrite Core	Length
/	/	/	/
Test Software Information			
Name	Versions	/	/
SecureCRTPortable	7.0.0.326	/	/



2.4. Operation state

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

Operation Frequency List:

Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

Note: CH 01~CH 11 for 802.11b/g/n(HT20)/ax(HE20), CH 03~CH 09 for 802.11n(HT40)/ax(HE40).

Data Rated

Preliminary tests were performed in different data rate, and found which the below bit rate is worst case mode, so only show data which it is a worst case mode.

Mode	Data rate (worst mode)
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)/ (HT40)	HT-MCS0
802.11ax(HE20)/ (HE40)	HE-MCS0

RU Configuration

Operating Mode	Resource Unit	242 Tone (20M)
802.11ax(HE20)	Specific Resource Unit	61
Operating Mode	Resource Unit	484 Tone (40M)
802.11ax(HE40)	Specific Resource Unit	65



Test mode

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.



2.5. Measurement Instruments List

Tonscend JS0806-2 Test system					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	MXA Signal Analyzer	Keysight	N9020A	MY46471737	Dec. 16, 2023
2	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
3	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
4	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 16, 2023
5	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 16, 2023
6	Power Sensor	Keysight	U2021XA	MY55130004	Mar. 14, 2024
7	Power Sensor	Keysight	U2021XA	MY55130006	Mar. 14, 2024
8	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 16, 2023
9	High and low temperature box	ESPEC	MT3035	/	Mar. 24, 2024
10	JS1120 RF Test system	TONSCEND	v2.6	/	/

Radiated emission(3m chamber 2)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-1013	Dec. 07, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 07, 2024
3	Loop Antenna	LAPLAC	RF300	9138	Dec. 16, 2023
4	Spectrum Analyzer	R&S	FSU26	100105	Dec. 16, 2023
5	Spectrum Analyzer	R&S	FSV40-N	101331	Mar. 14, 2024
6	Pre-Amplifier	SONOMA	310	186194	Dec. 16, 2023
7	Low Noise Pre-Amplifier	EMCI	EMC051835	980075	Dec. 16, 2023
8	Test Receiver	R&S	ESC17	100967	Dec. 16, 2023
9	3m chamber 2	Frankonia	EE025	/	Oct. 23, 2024

Radiated emission(3m chamber 3)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Dec. 01, 2024
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 16, 2023
4	Broadband Premplifier	SCHWARZBECK	BBV9743B	259	Dec. 16, 2023
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 16, 2023
6	Pre-Amplifier	R&S	SCU-26	10033	Dec. 16, 2023
7	Pre-Amplifier	R&S	SCU-40	10030	Dec. 16, 2023
8	Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	BBHA 9170-497	Dec. 16, 2023
9	3m chamber 3	YIHENG	EE106	/	Sep. 09, 2023



Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	R&S	ENV216	101112	Dec. 16, 2023
2	LISN	R&S	ENV216	101113	Dec. 16, 2023
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 16, 2023

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three year of the chamber

3. The cable loss has calculated in test result which connection between each test instruments.

3. TEST ITEM AND RESULTS

3.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207/ RSS - Gen 8.8:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

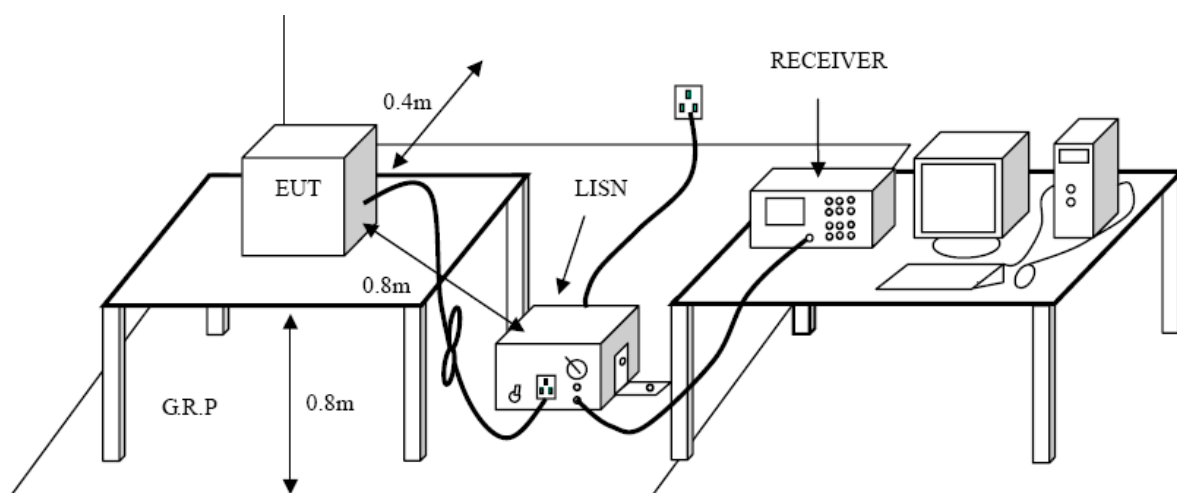



Test Procedure

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
4. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
5. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
6. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
7. During the above scans, the emissions were maximized by cable manipulation.

**Test Mode:**

Please refer to the clause 2.4.

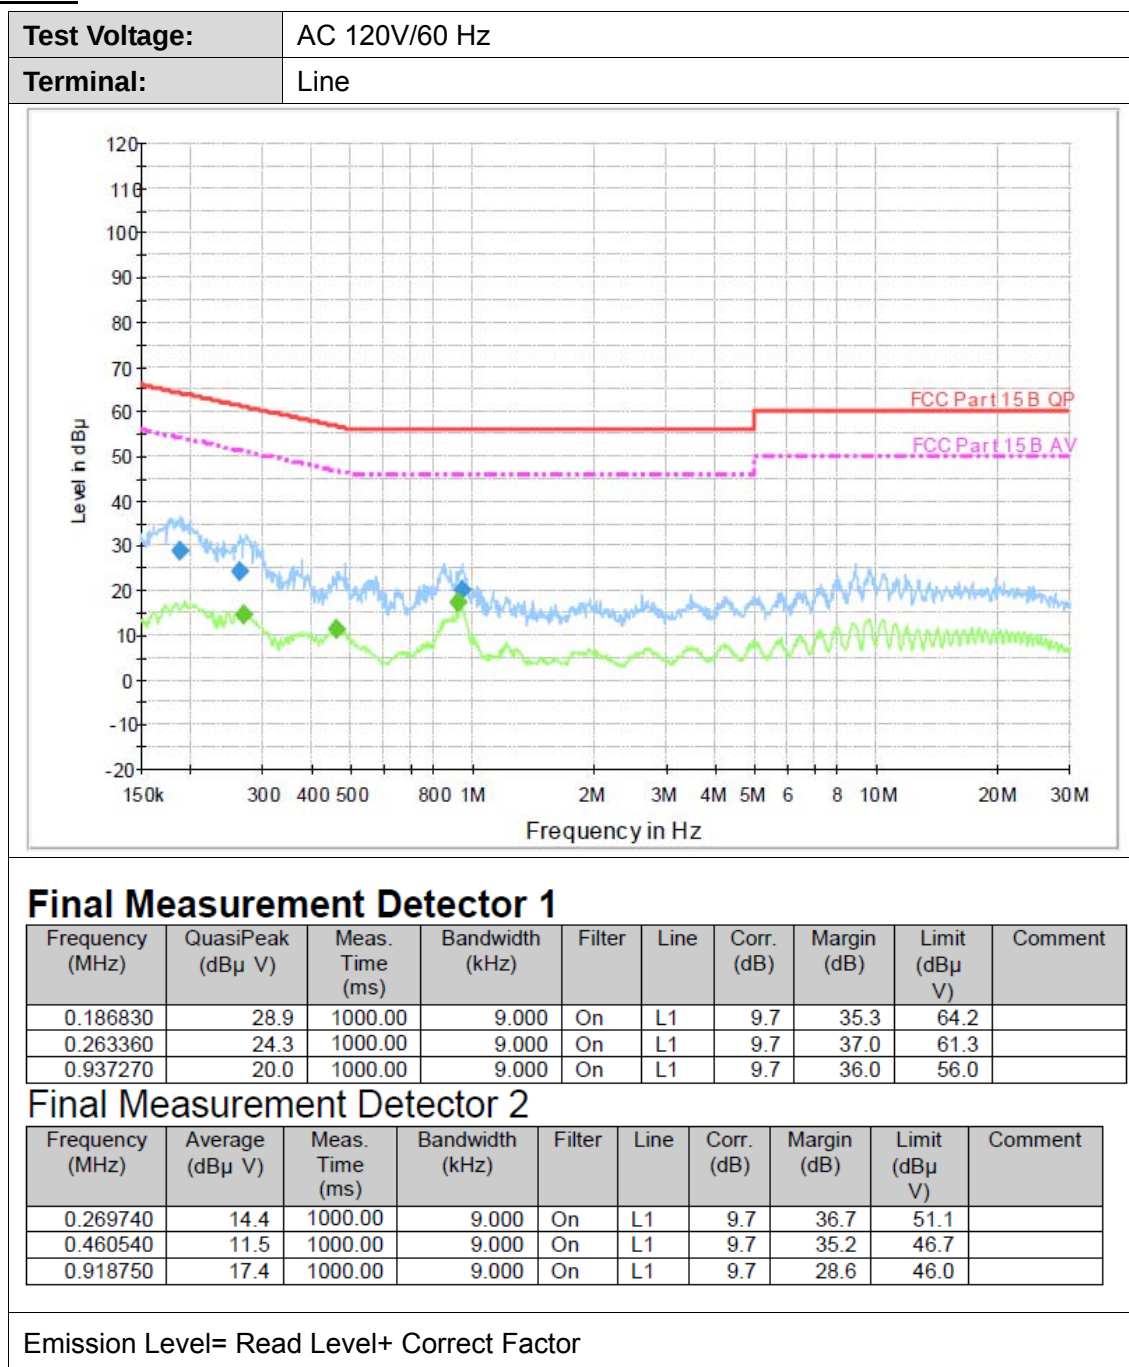Test Results

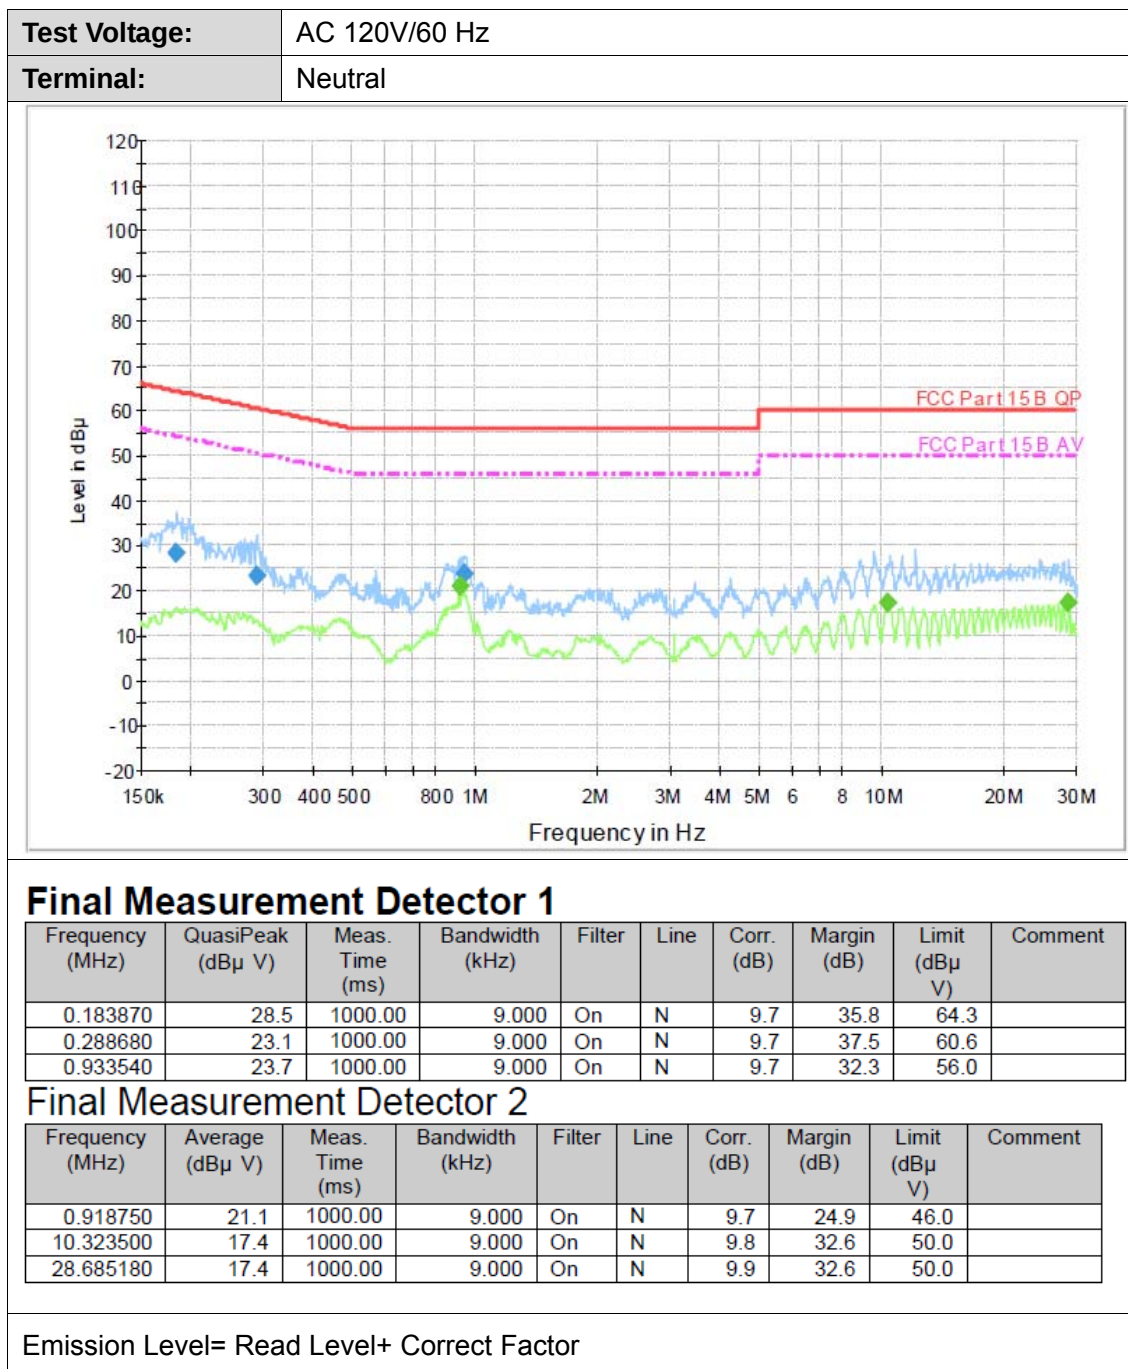

3.2. Radiated Emission

Limit


FCC CFR Title 47 Part 15 Subpart C Section 15.209/ RSS – Gen 8.9:

Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m).

Test Configuration

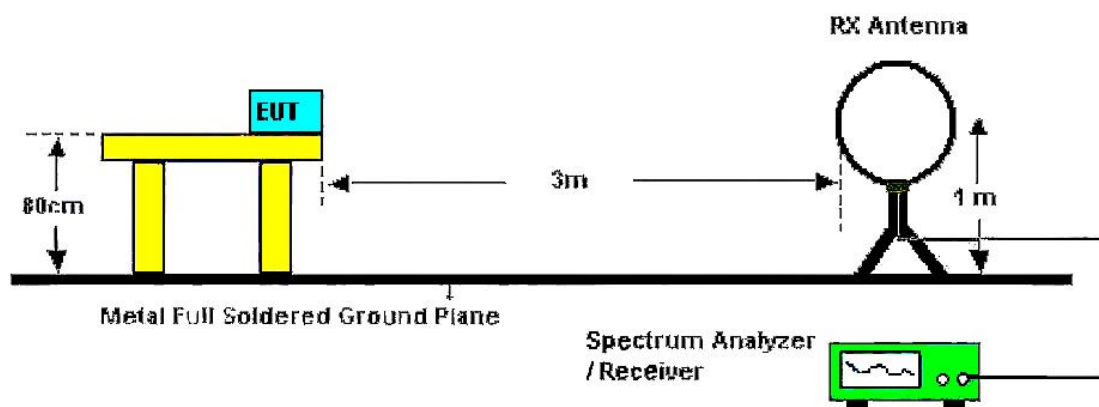

Below 30MHz Test Setup

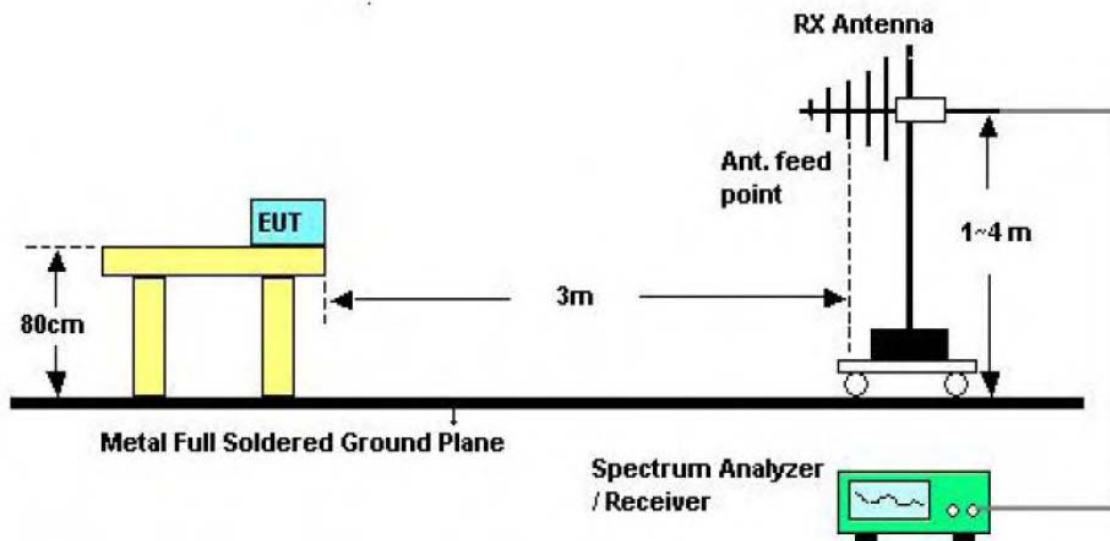

Below 1000MHz Test Setup


CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

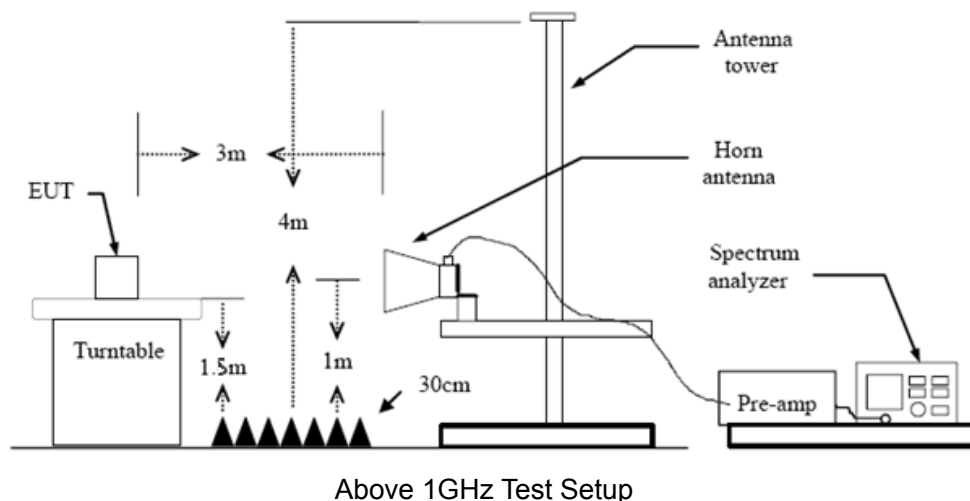

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013
 2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
 4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
 5. Set to the maximum power setting and enable the EUT transmit continuously.
 6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured
 - (2) Below 30 MHz:

9kHz – 150kHz, RBW=200Hz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold;

150kHz – 30MHz, RBW=9kHz, VBW $\geq$ RBW, Sweep=auto, Detector function=peak, Trace=max hold; If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) 30 MHz - 1 GHz:

RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;

If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (4) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW $\geq$ 1/T Peak detector for Average value.
- Note 1: For the 1/T& Duty Cycle please refer to clause 3.8 Duty Cycle.

Test Mode

Please refer to the clause 2.4.

Test Result

9 KHz~30 MHz


From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



30MHz-1GHz

Ant. Pol.	Horizontal
Test Mode:	802.11b Mode 2412MHz
Remark:	Only worse case is reported

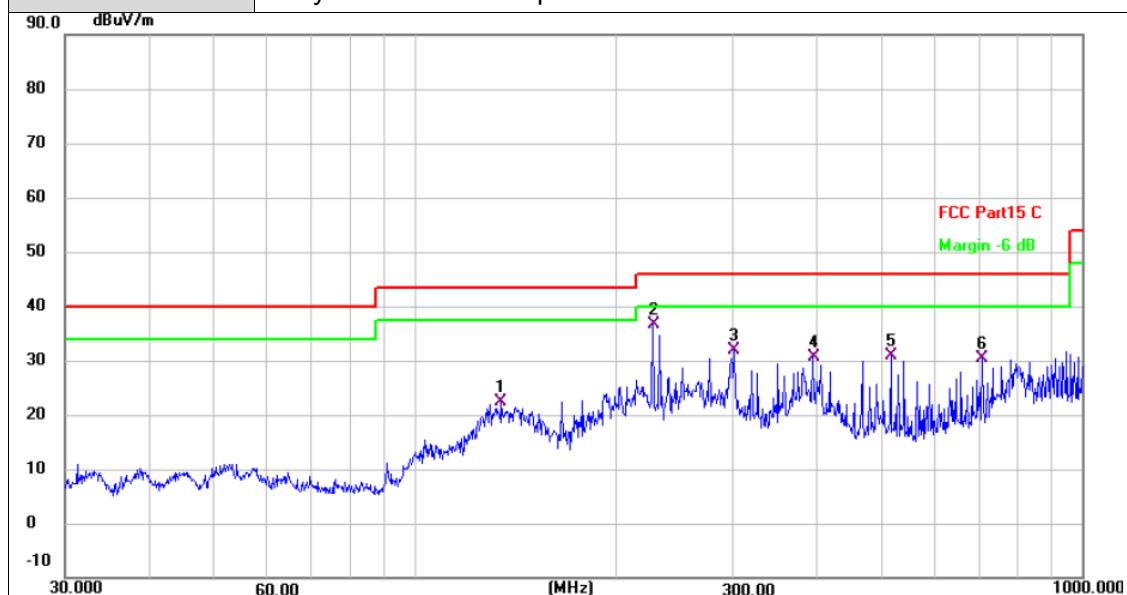


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	135.0318	40.46	-18.09	22.37	43.50	-21.13	QP
2 *	227.6906	56.00	-19.41	36.59	46.00	-9.41	QP
3	301.4223	49.10	-17.14	31.96	46.00	-14.04	QP
4	394.8545	45.53	-14.95	30.58	46.00	-15.42	QP
5	517.2479	43.11	-12.32	30.79	46.00	-15.21	QP
6	709.1821	39.70	-9.31	30.39	46.00	-15.61	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
2. Margin value = Level - Limit value



Ant. Pol.	Vertical
Test Mode:	802.11b Mode 2412MHz
Remark:	Only worse case is reported

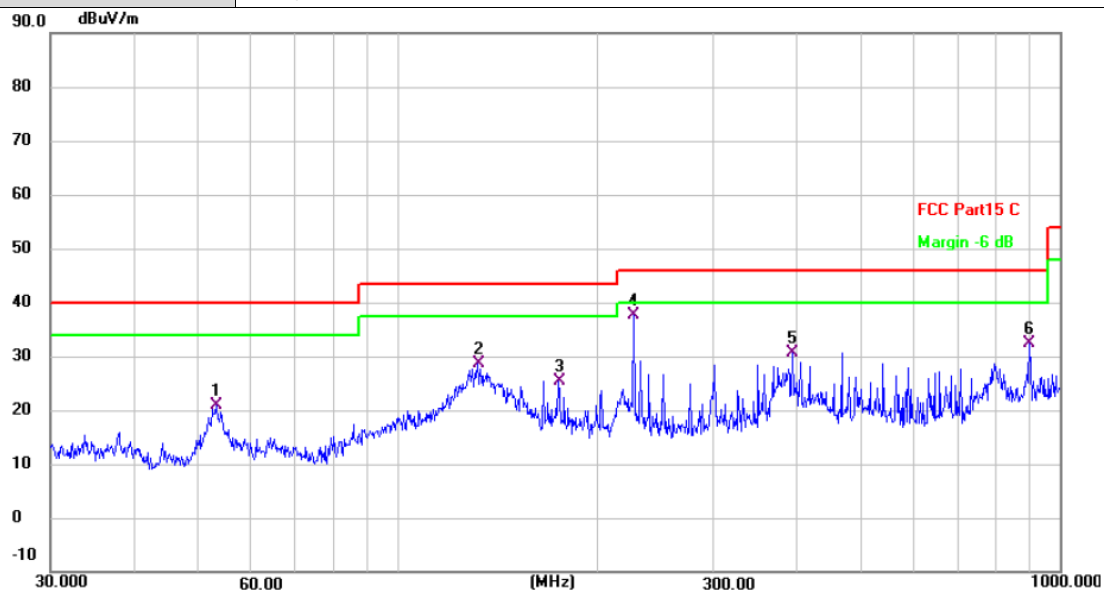

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	53.3179	38.75	-17.99	20.76	40.00	-19.24	QP
2	132.2206	46.90	-18.33	28.57	43.50	-14.93	QP
3	175.0368	43.84	-18.35	25.49	43.50	-18.01	QP
4 *	227.6906	57.04	-19.41	37.63	46.00	-8.37	QP
5	394.8545	45.46	-14.95	30.51	46.00	-15.49	QP
6	900.1474	38.22	-5.88	32.34	46.00	-13.66	QP

Remarks:


1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Adobe 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

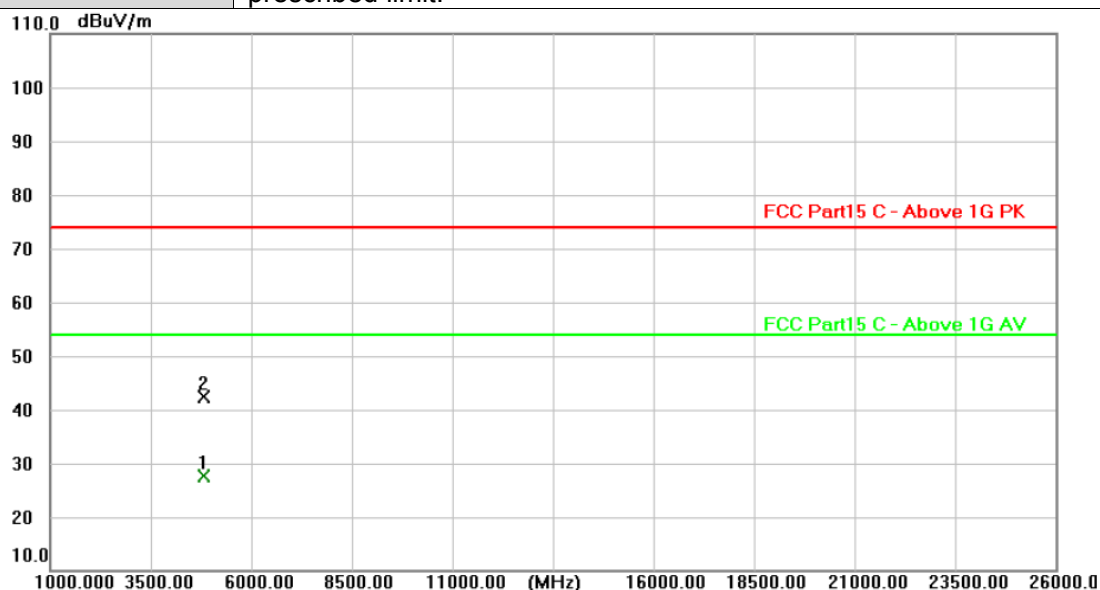


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4823.089	25.48	2.20	27.68	54.00	-26.32	AVG
2	4823.957	40.13	2.20	42.33	74.00	-31.67	peak

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

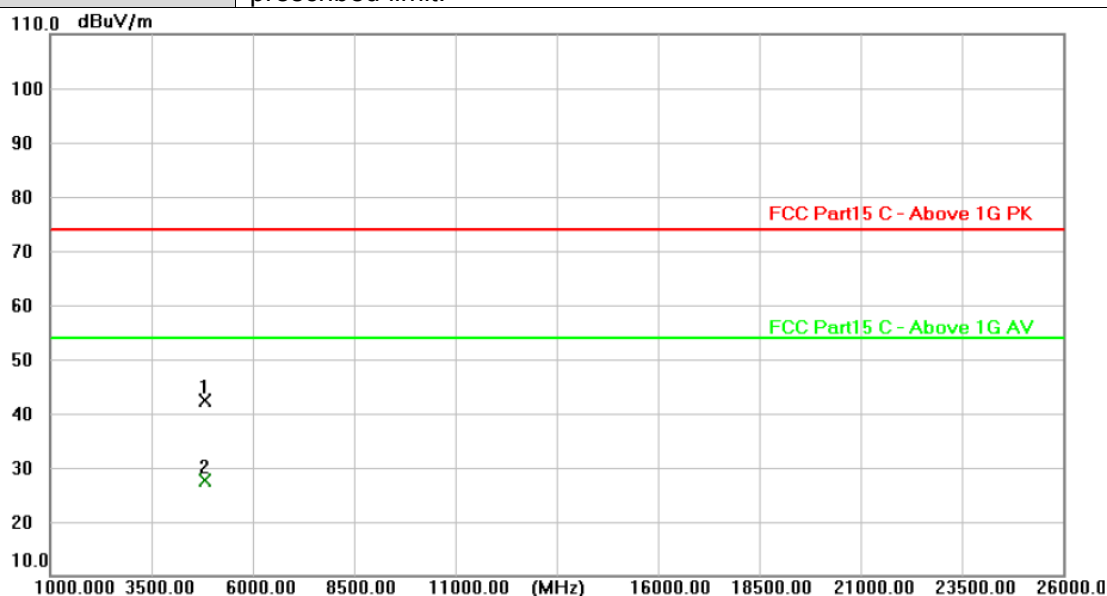

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.264	40.30	2.20	42.50	74.00	-31.50	peak
2 *	4823.957	25.38	2.20	27.58	54.00	-26.42	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value




Ant. Pol.	Horizontal						
Test Mode:	TX 802.11b Mode 2437MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						


110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.725	25.07	2.30	27.37	54.00	-26.63	AVG
2	4874.895	40.64	2.30	42.94	74.00	-31.06	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

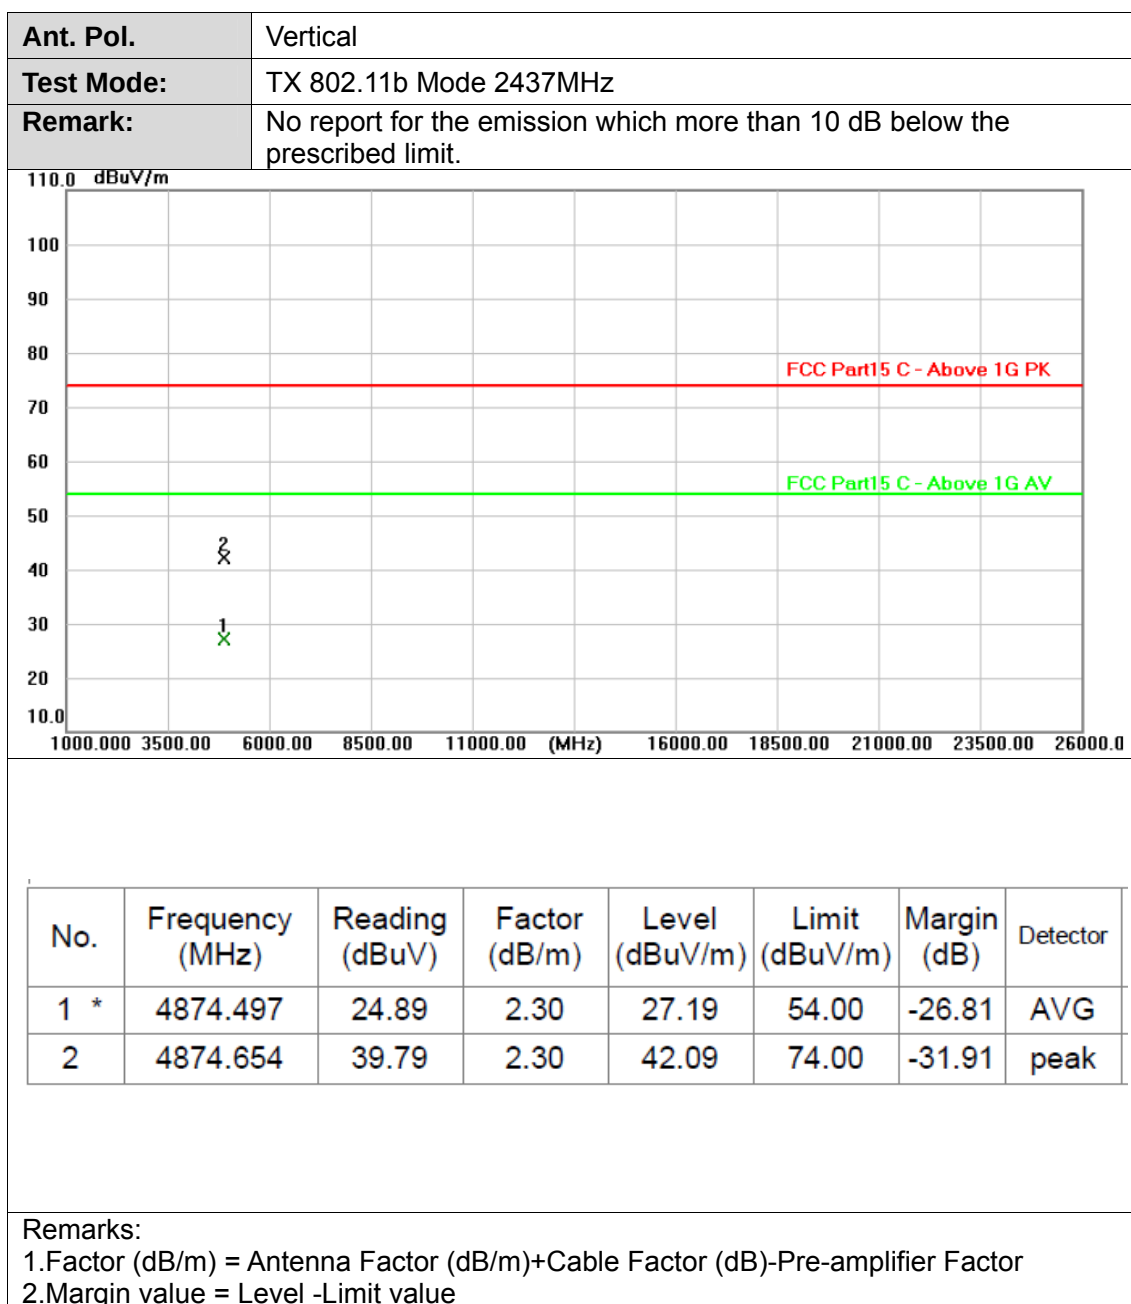


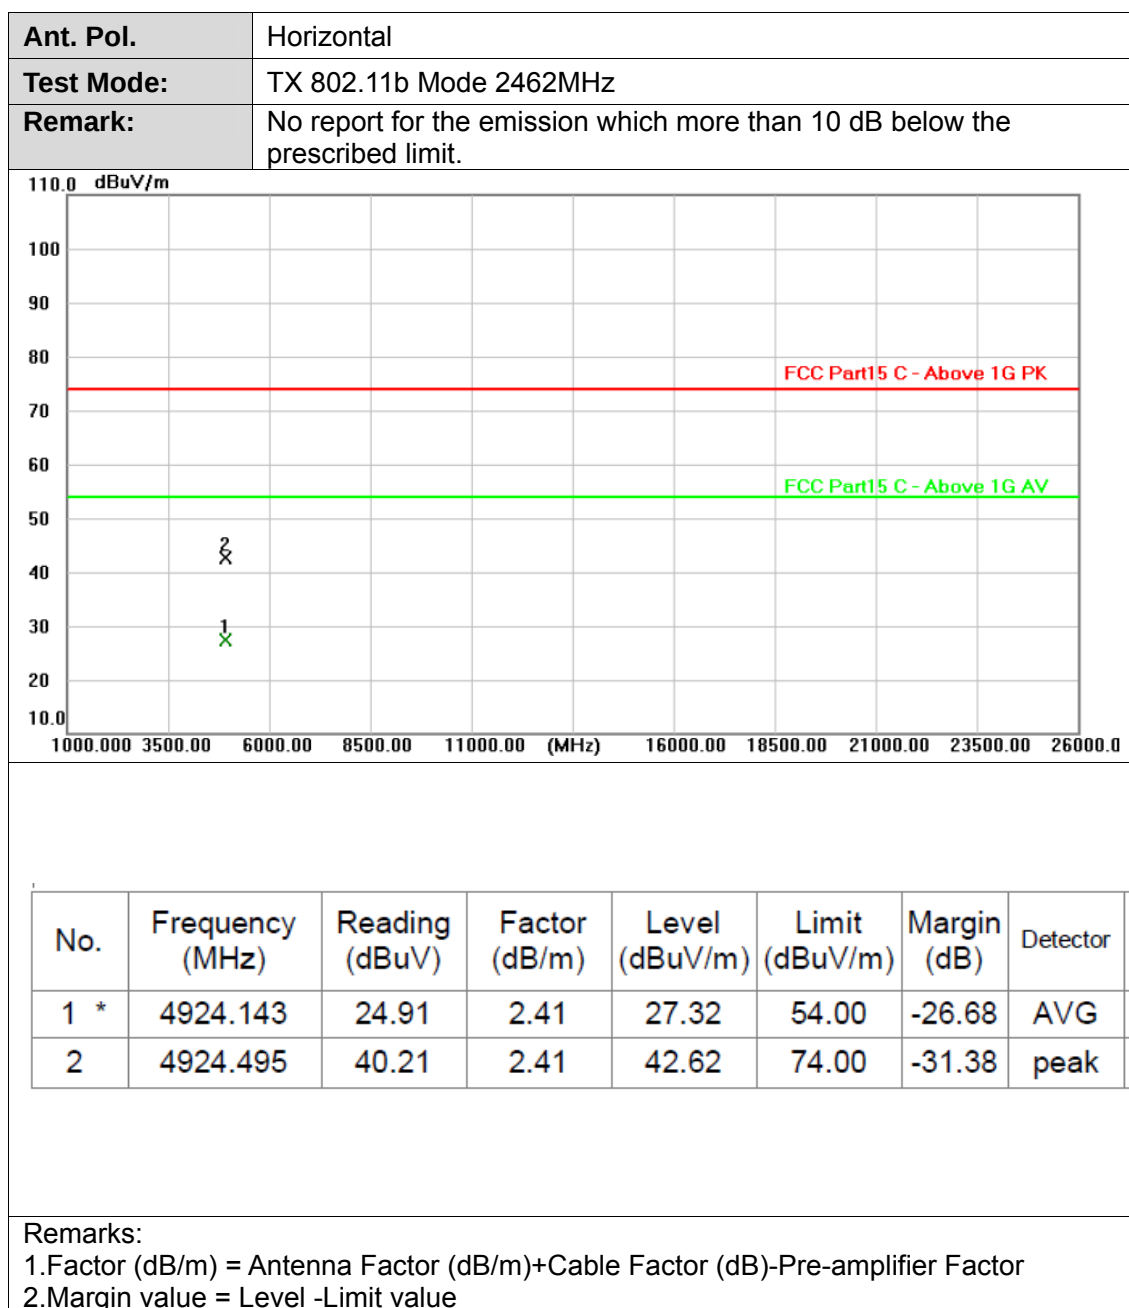



Ant. Pol.	Vertical
Test Mode:	TX 802.11b Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

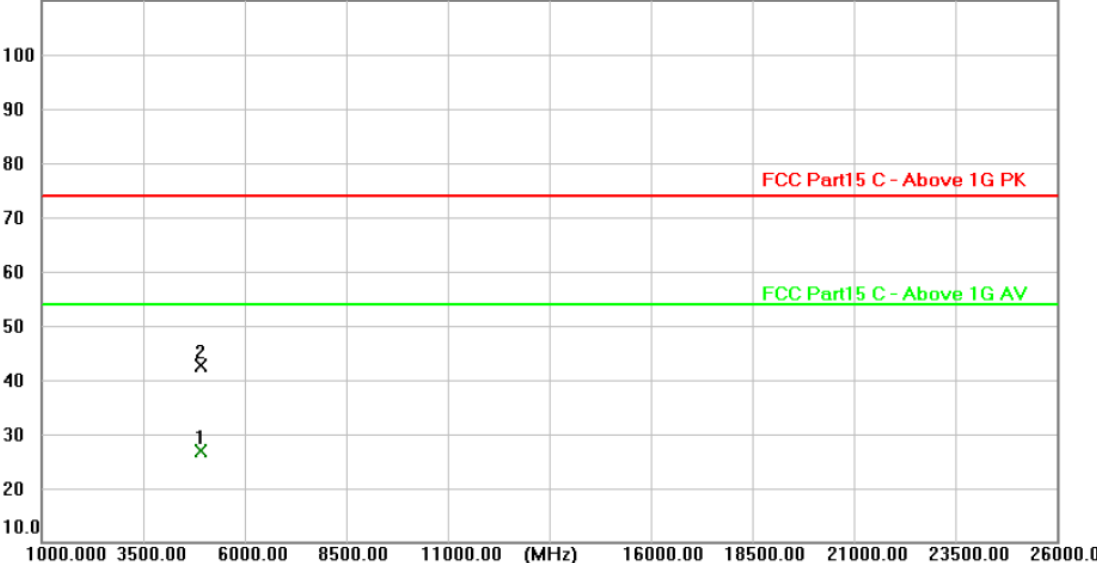

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.286	24.59	2.41	27.00	54.00	-27.00	AVG
2	4924.425	40.24	2.41	42.65	74.00	-31.35	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11g Mode 2412MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						

110.0 dBuV/m

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.326	40.35	2.20	42.55	74.00	-31.45	peak
2 *	4824.905	25.44	2.20	27.64	54.00	-26.36	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m


1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4823.777	40.87	2.20	43.07	74.00	-30.93	peak
2 *	4824.699	25.56	2.20	27.76	54.00	-26.24	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

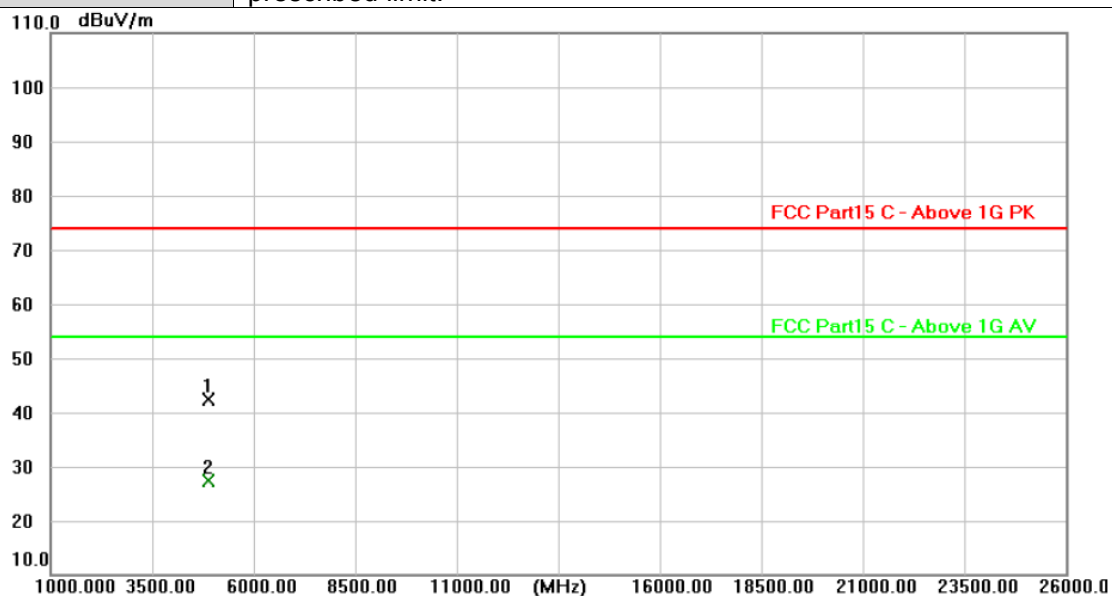

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.499	40.10	2.30	42.40	74.00	-31.60	peak
2 *	4873.689	25.01	2.30	27.31	54.00	-26.69	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

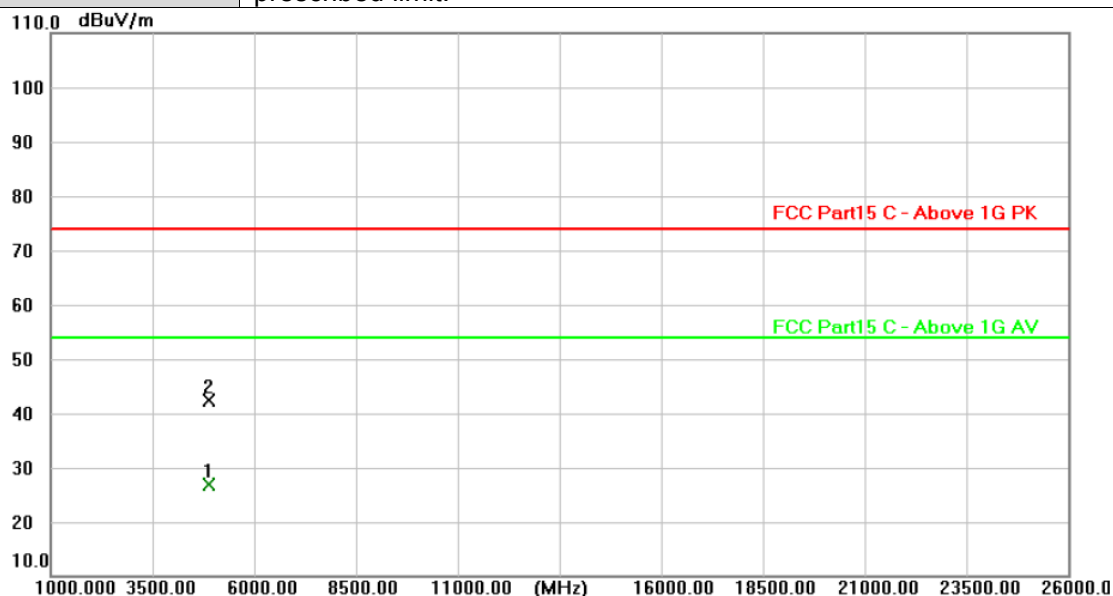

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.411	24.62	2.30	26.92	54.00	-27.08	AVG
2	4874.875	40.03	2.30	42.33	74.00	-31.67	peak

Remarks:

- 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- 2.Margin value = Level -Limit value



Ant. Pol.	Horizontal																														
Test Mode:	TX 802.11g Mode 2462MHz																														
Remark:	No report for the emission which more than 10 dB below the prescribed limit.																														
110.0 dBuV/m 1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0 <table><tr><th>No.</th><th>Frequency (MHz)</th><th>Reading (dBuV)</th><th>Factor (dB/m)</th><th>Level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th><th>Detector</th></tr><tr><td>1 *</td><td>4924.135</td><td>24.57</td><td>2.41</td><td>26.98</td><td>54.00</td><td>-27.02</td><td>AVG</td></tr><tr><td>2</td><td>4924.891</td><td>39.44</td><td>2.41</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>peak</td></tr></table> Remarks: 1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor 2.Margin value = Level -Limit value								No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	1 *	4924.135	24.57	2.41	26.98	54.00	-27.02	AVG	2	4924.891	39.44	2.41	41.85	74.00	-32.15	peak
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector																								
1 *	4924.135	24.57	2.41	26.98	54.00	-27.02	AVG																								
2	4924.891	39.44	2.41	41.85	74.00	-32.15	peak																								




Ant. Pol.	Vertical
Test Mode:	TX 802.11g Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4923.992	24.83	2.41	27.24	54.00	-26.76	AVG
2	4924.903	39.96	2.41	42.37	74.00	-31.63	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

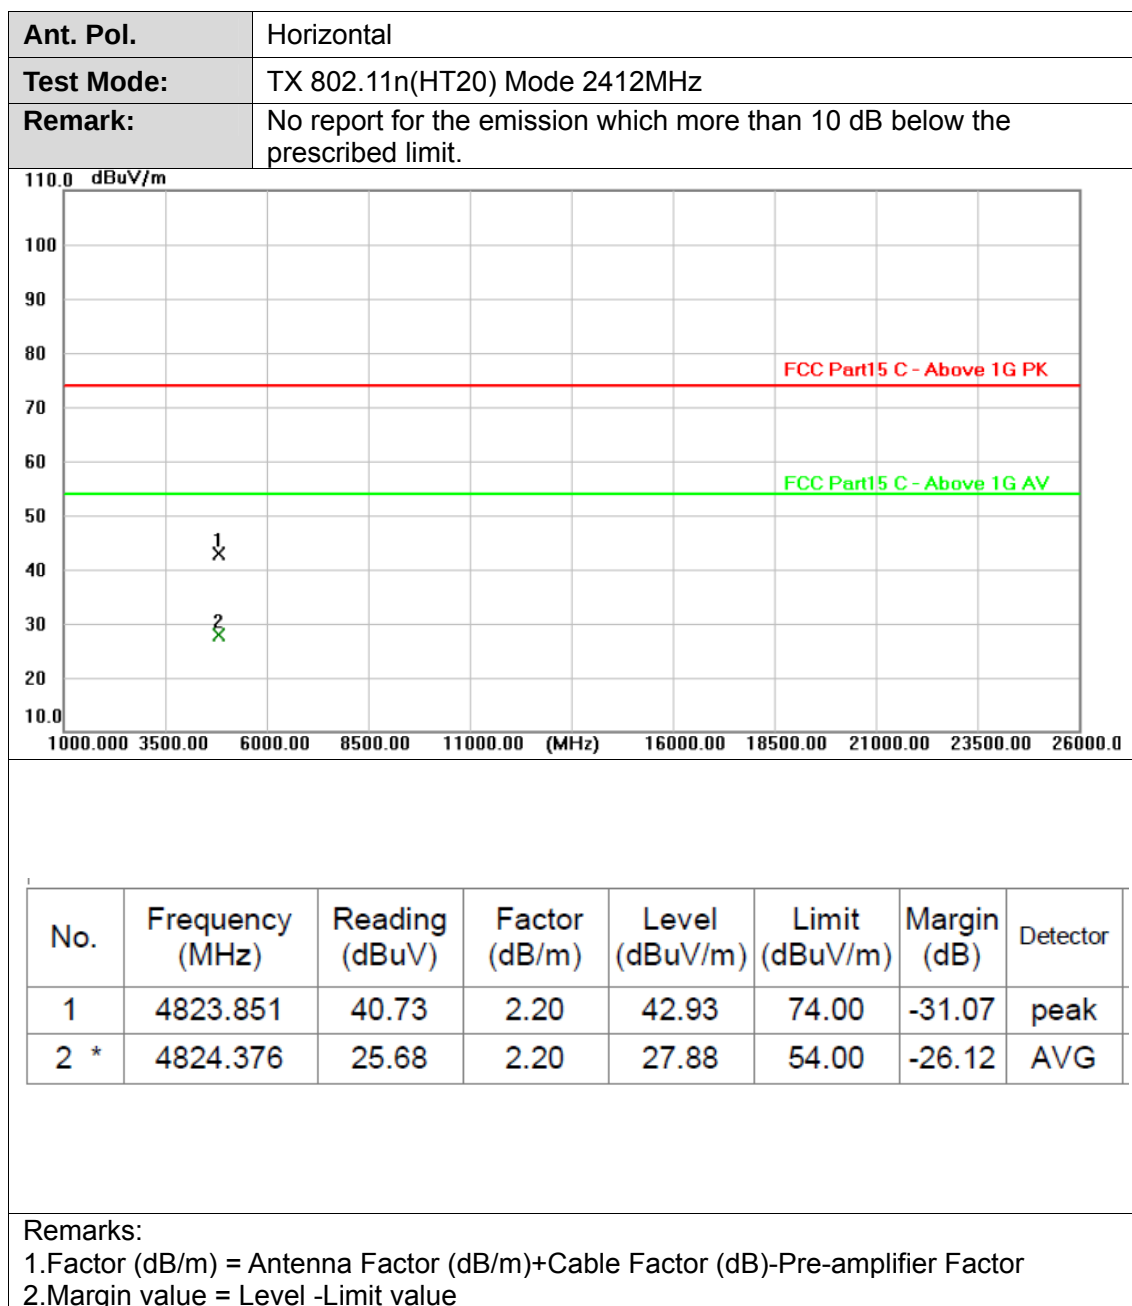



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

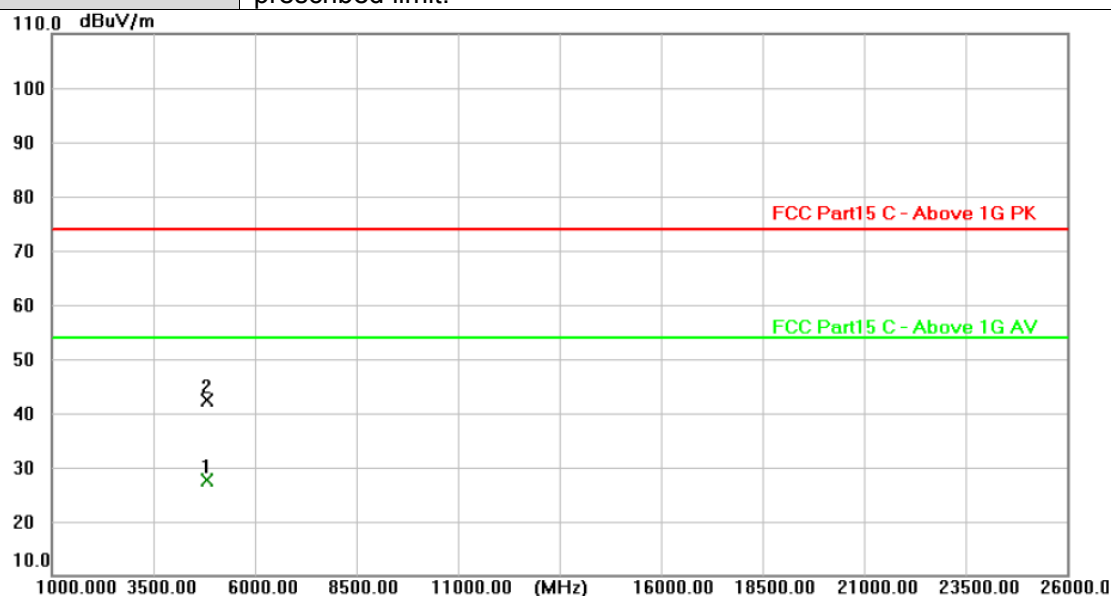

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4824.175	25.42	2.20	27.62	54.00	-26.38	AVG
2	4824.562	40.13	2.20	42.33	74.00	-31.67	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11n(HT20) Mode 2437MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						

110.0 dBuV/m


1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.267	40.29	2.30	42.59	74.00	-31.41	peak
2 *	4874.047	25.48	2.30	27.78	54.00	-26.22	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

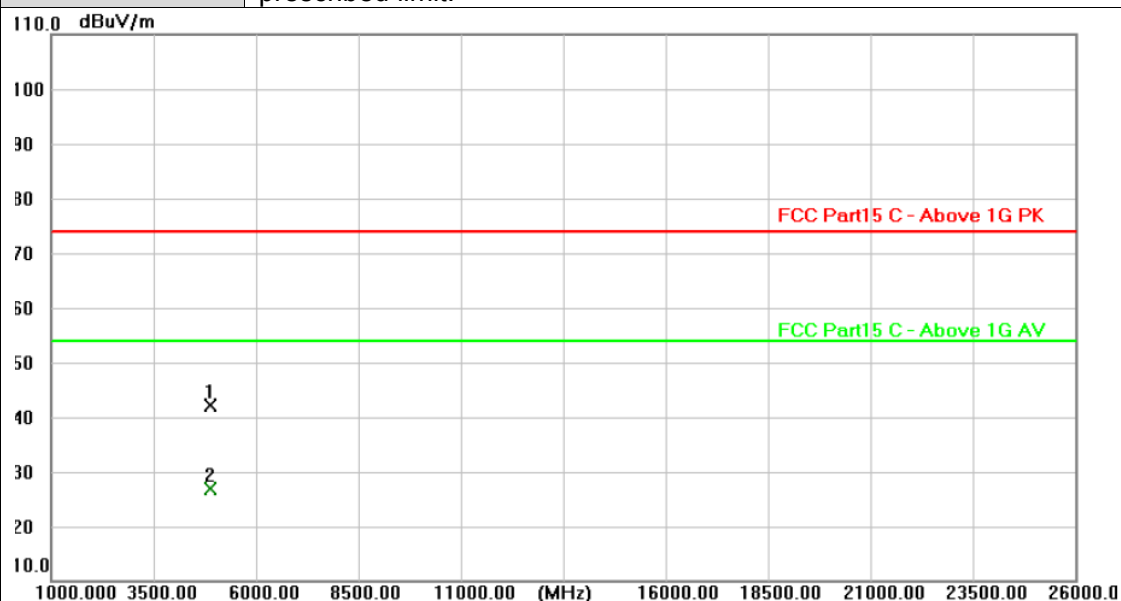


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.509	39.85	2.30	42.15	74.00	-31.85	peak
2 *	4874.370	24.67	2.30	26.97	54.00	-27.03	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

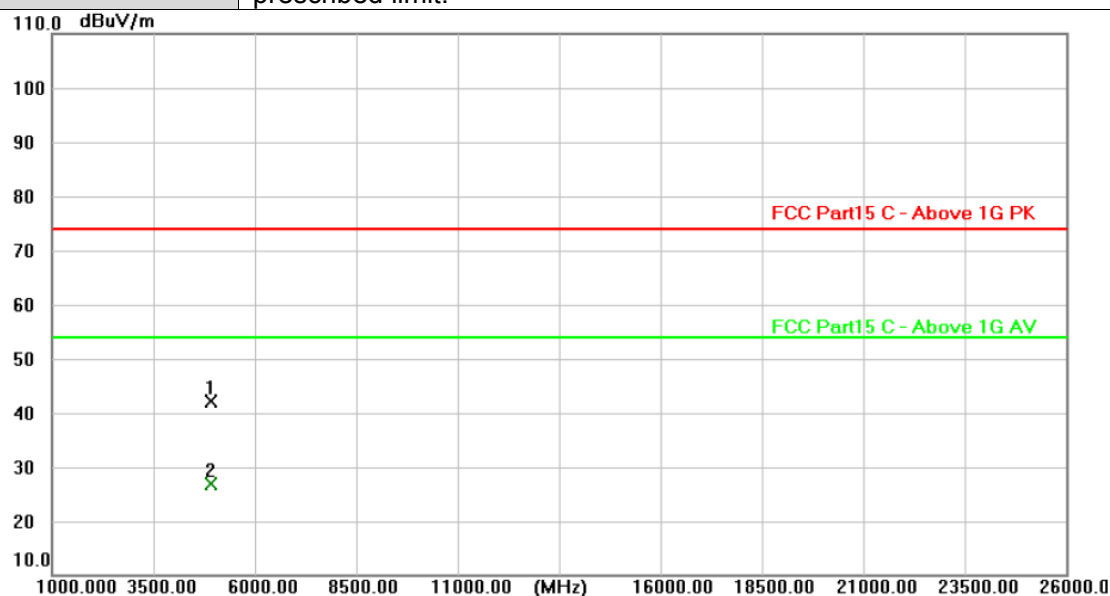

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.828	39.61	2.41	42.02	74.00	-31.98	peak
2 *	4924.214	24.48	2.41	26.89	54.00	-27.11	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT20) Mode 2462MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4923.772	40.48	2.41	42.89	74.00	-31.11	peak
2 *	4924.481	24.99	2.41	27.40	54.00	-26.60	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m


1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4843.678	26.04	2.24	28.28	54.00	-25.72	AVG
2	4844.279	40.90	2.24	43.14	74.00	-30.86	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value




Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2422MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

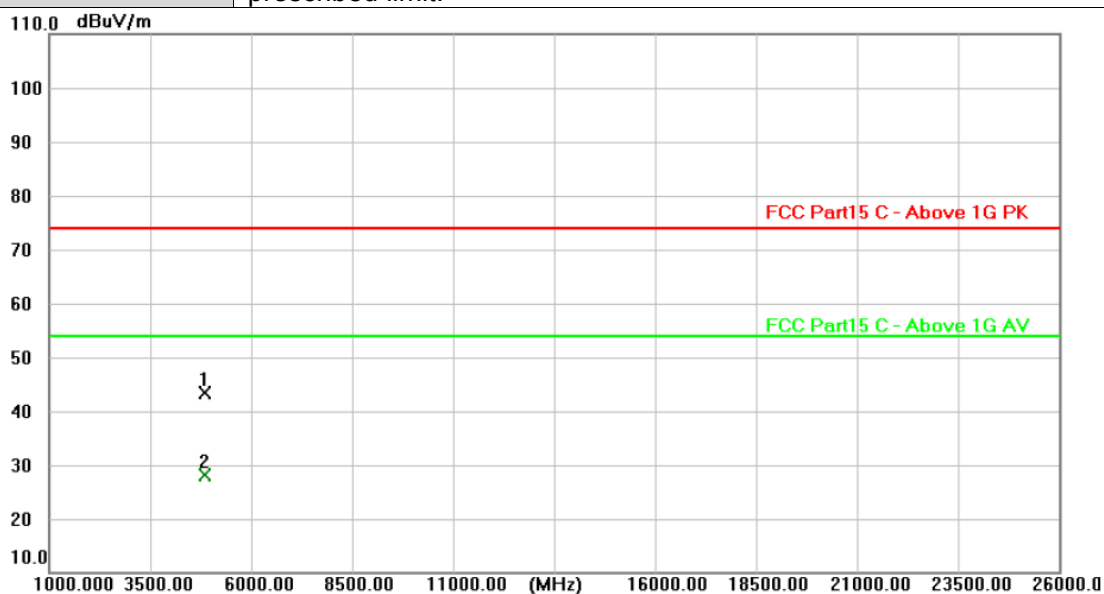

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4843.494	41.16	2.24	43.40	74.00	-30.60	peak
2 *	4843.694	25.77	2.24	28.01	54.00	-25.99	AVG


Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

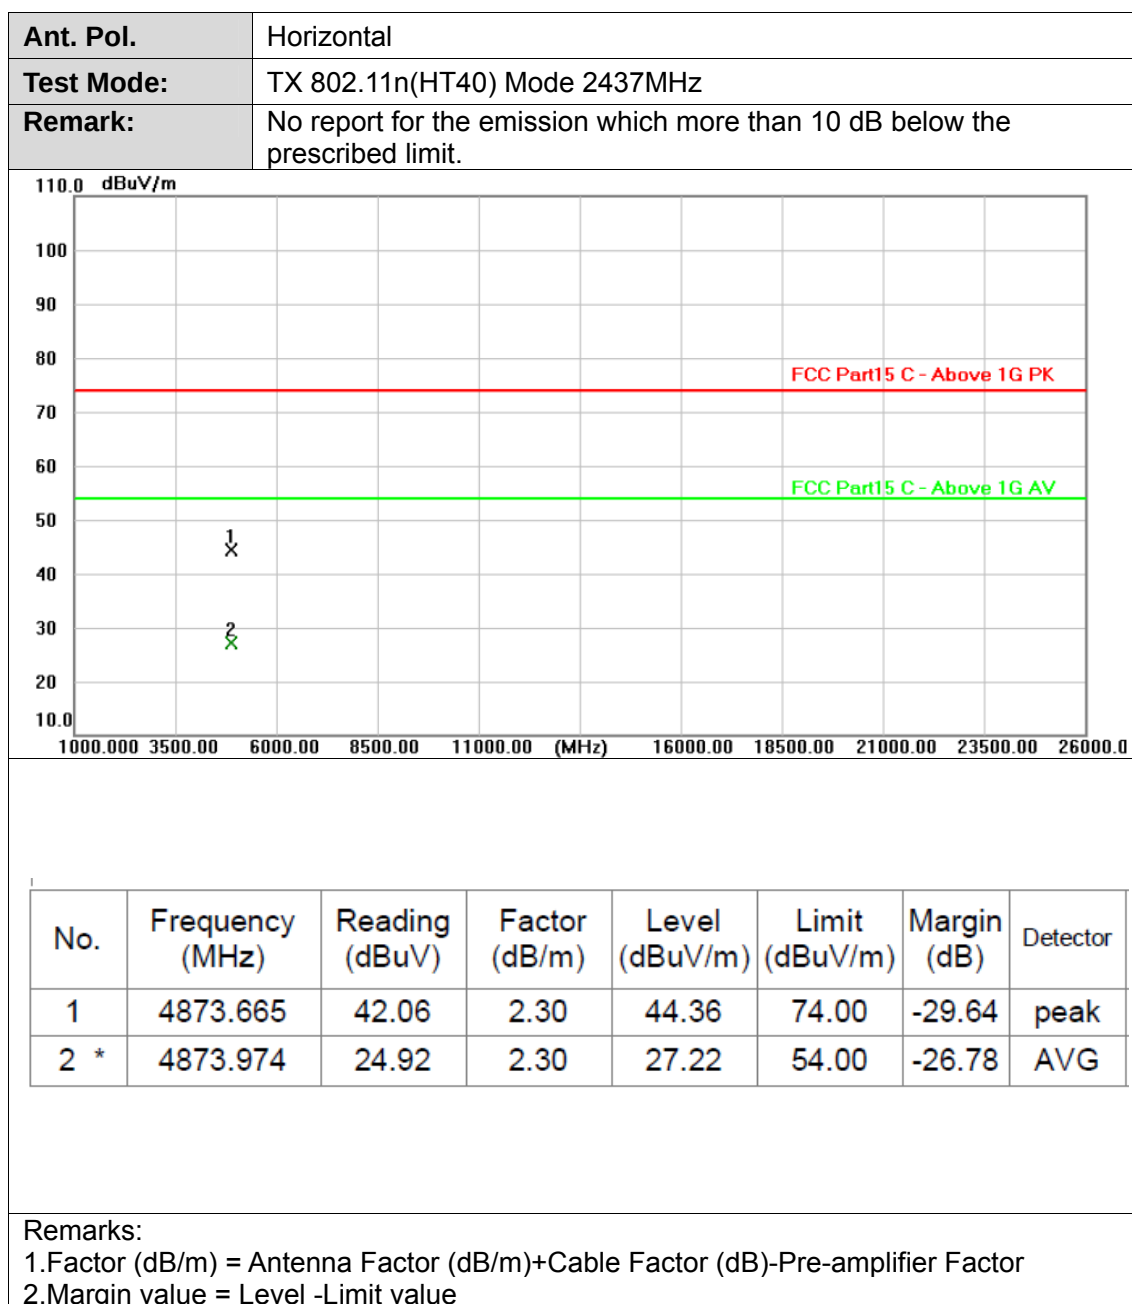




Ant. Pol.	Vertical
Test Mode:	TX 802.11n(HT40) Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

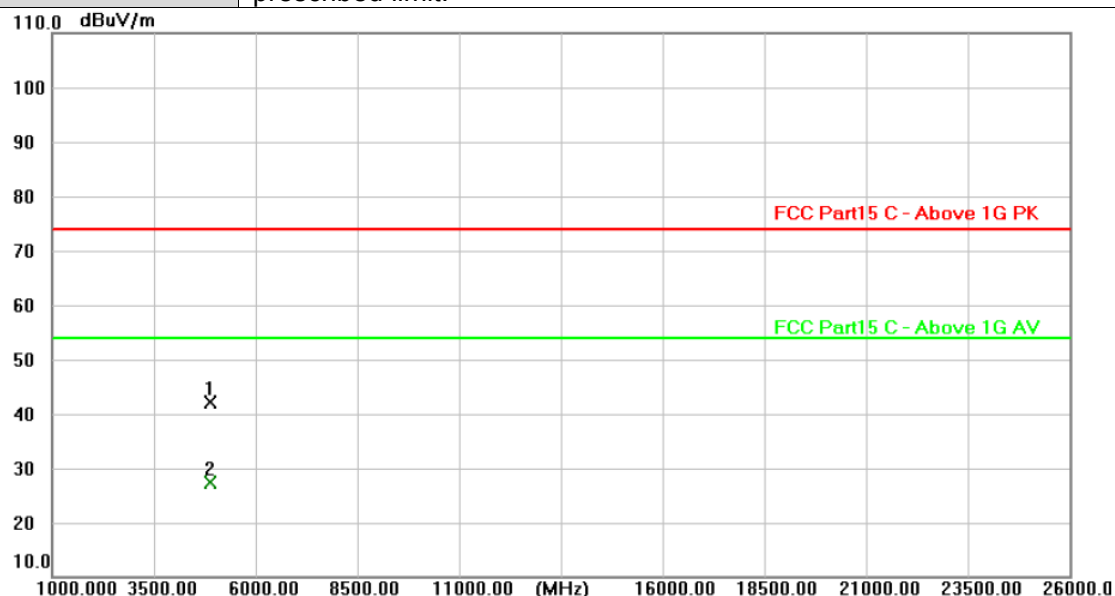


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4874.092	39.89	2.30	42.19	74.00	-31.81	peak
2 *	4874.576	25.06	2.30	27.36	54.00	-26.64	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value

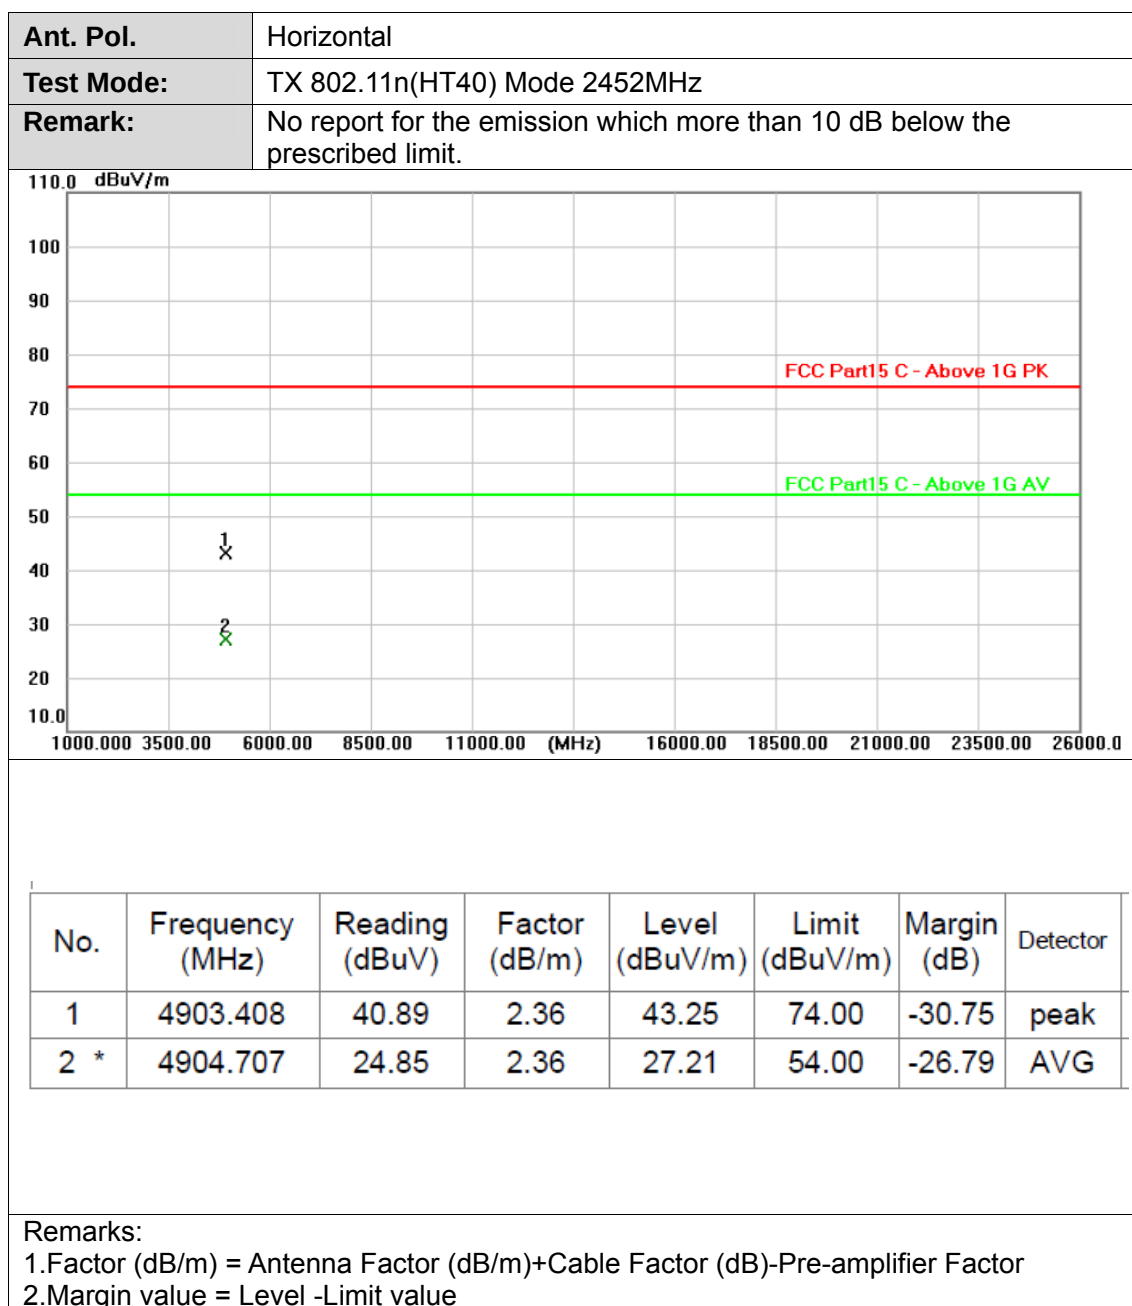

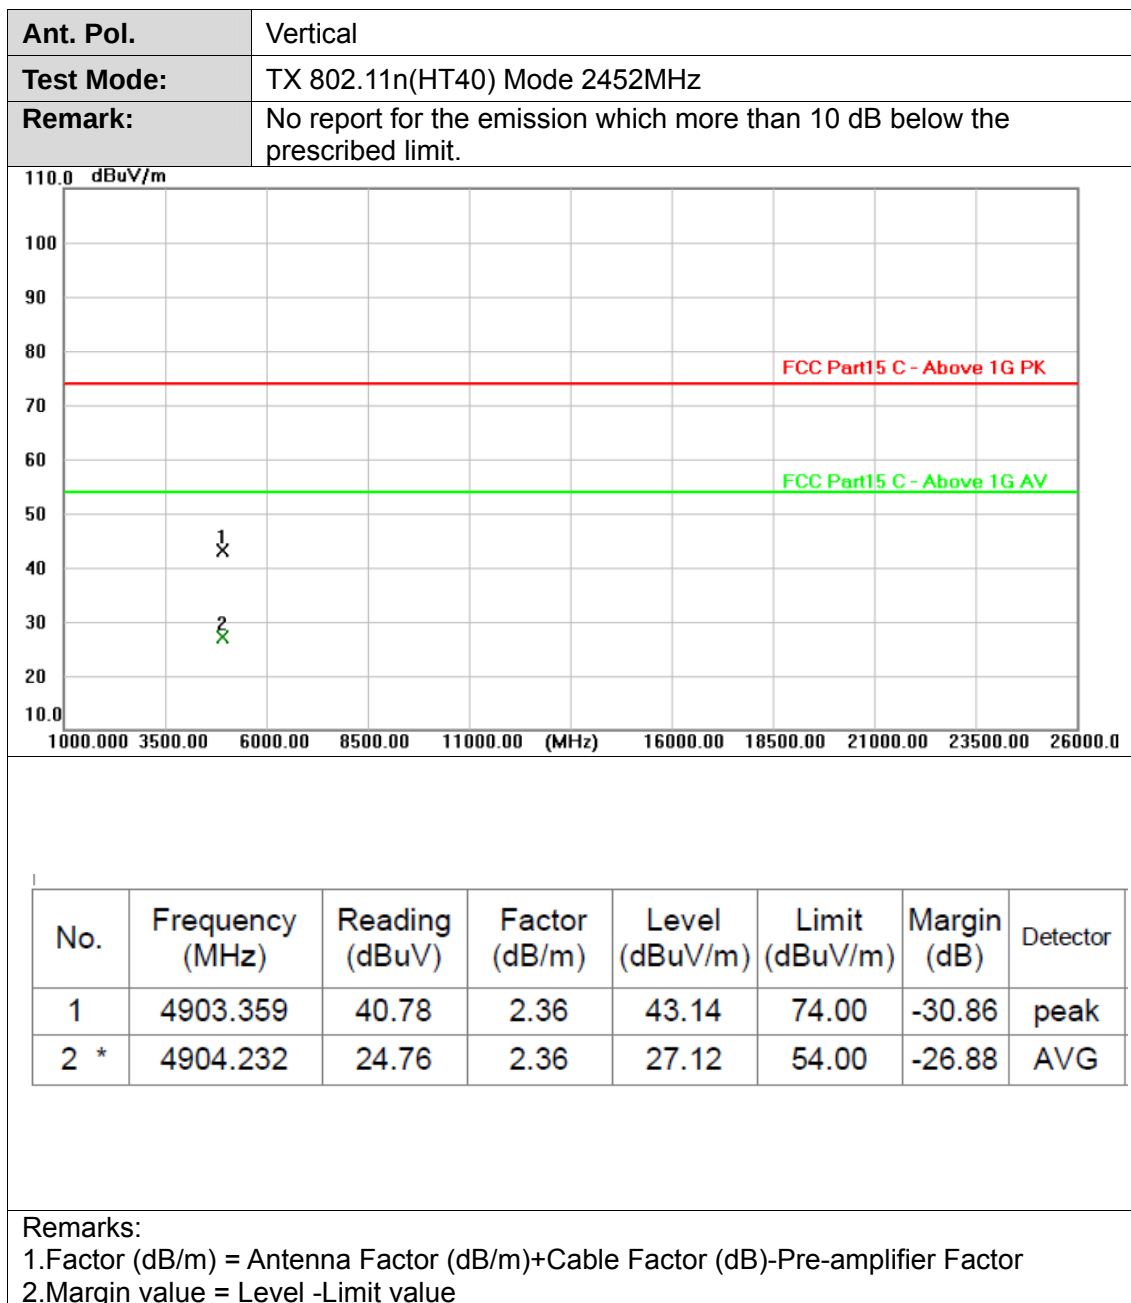



Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4824.235	40.63	2.20	42.83	74.00	-31.17	peak
2 *	4824.804	25.49	2.20	27.69	54.00	-26.31	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2412MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4824.575	25.84	2.20	28.04	54.00	-25.96	AVG
2	4824.830	41.56	2.20	43.76	74.00	-30.24	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.603	40.70	2.30	43.00	74.00	-31.00	peak
2 *	4874.717	25.02	2.30	27.32	54.00	-26.68	AVG

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE20) Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

100

90

80

70

60

50

40

30

20

10.0

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

2

1

FCC Part15 C - Above 1G PK

FCC Part15 C - Above 1G AV

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4873.805	24.91	2.30	27.21	54.00	-26.79	AVG
2	4874.775	40.26	2.30	42.56	74.00	-31.44	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value




Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE20) Mode 2462MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						

110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4924.521	24.51	2.41	26.92	54.00	-27.08	AVG
2	4924.603	40.25	2.41	42.66	74.00	-31.34	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value

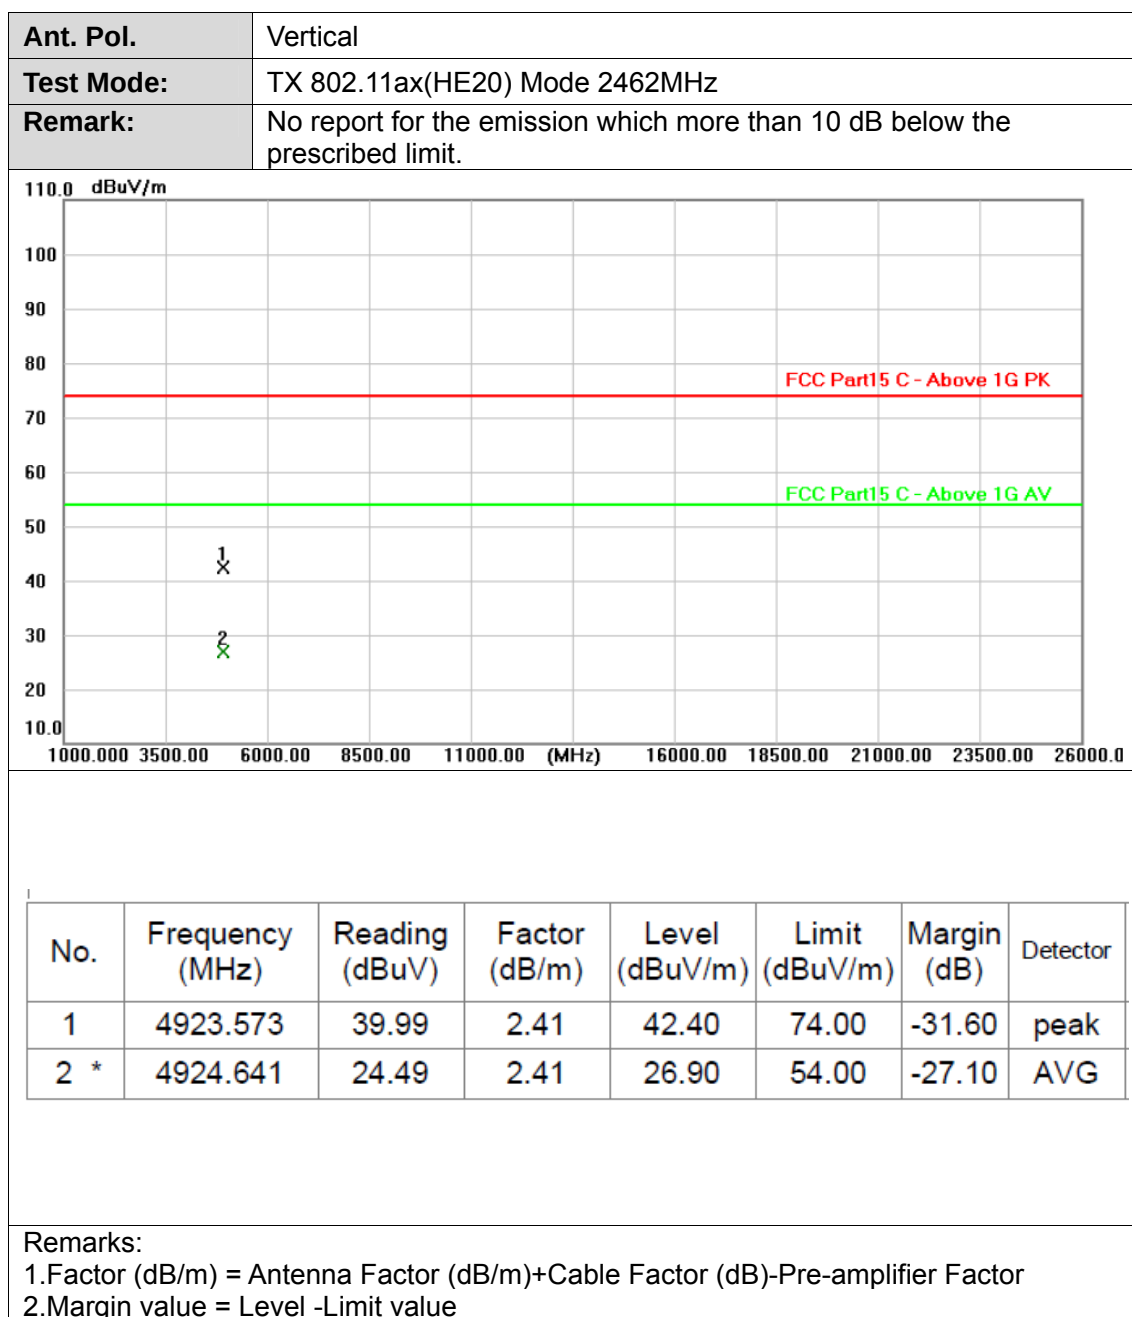



Ant. Pol.	Horizontal
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.000 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4844.063	25.53	2.24	27.77	54.00	-26.23	AVG
2	4844.994	40.36	2.24	42.60	74.00	-31.40	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2422MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	4844.103	26.11	2.24	28.35	54.00	-25.65	AVG
2	4844.209	40.83	2.24	43.07	74.00	-30.93	peak

Remarks:
1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2.Margin value = Level -Limit value



Ant. Pol.	Horizontal						
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz						
Remark:	No report for the emission which more than 10 dB below the prescribed limit.						

110.0 dBuV/m

1000.00 3500.00 6000.00 8500.00 11000.00 (MHz) 16000.00 18500.00 21000.00 23500.00 26000.0

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.536	39.94	2.30	42.24	74.00	-31.76	peak
2 *	4874.523	24.90	2.30	27.20	54.00	-26.80	AVG


Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2437MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

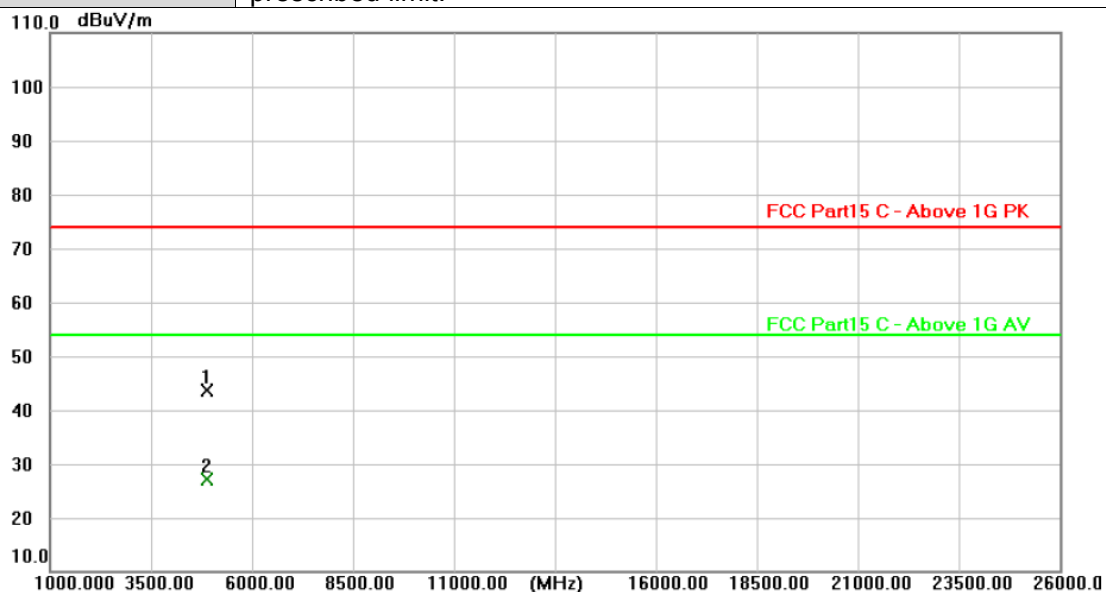


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4873.417	41.29	2.30	43.59	74.00	-30.41	peak
2 *	4873.501	24.93	2.30	27.23	54.00	-26.77	AVG

Remarks:


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

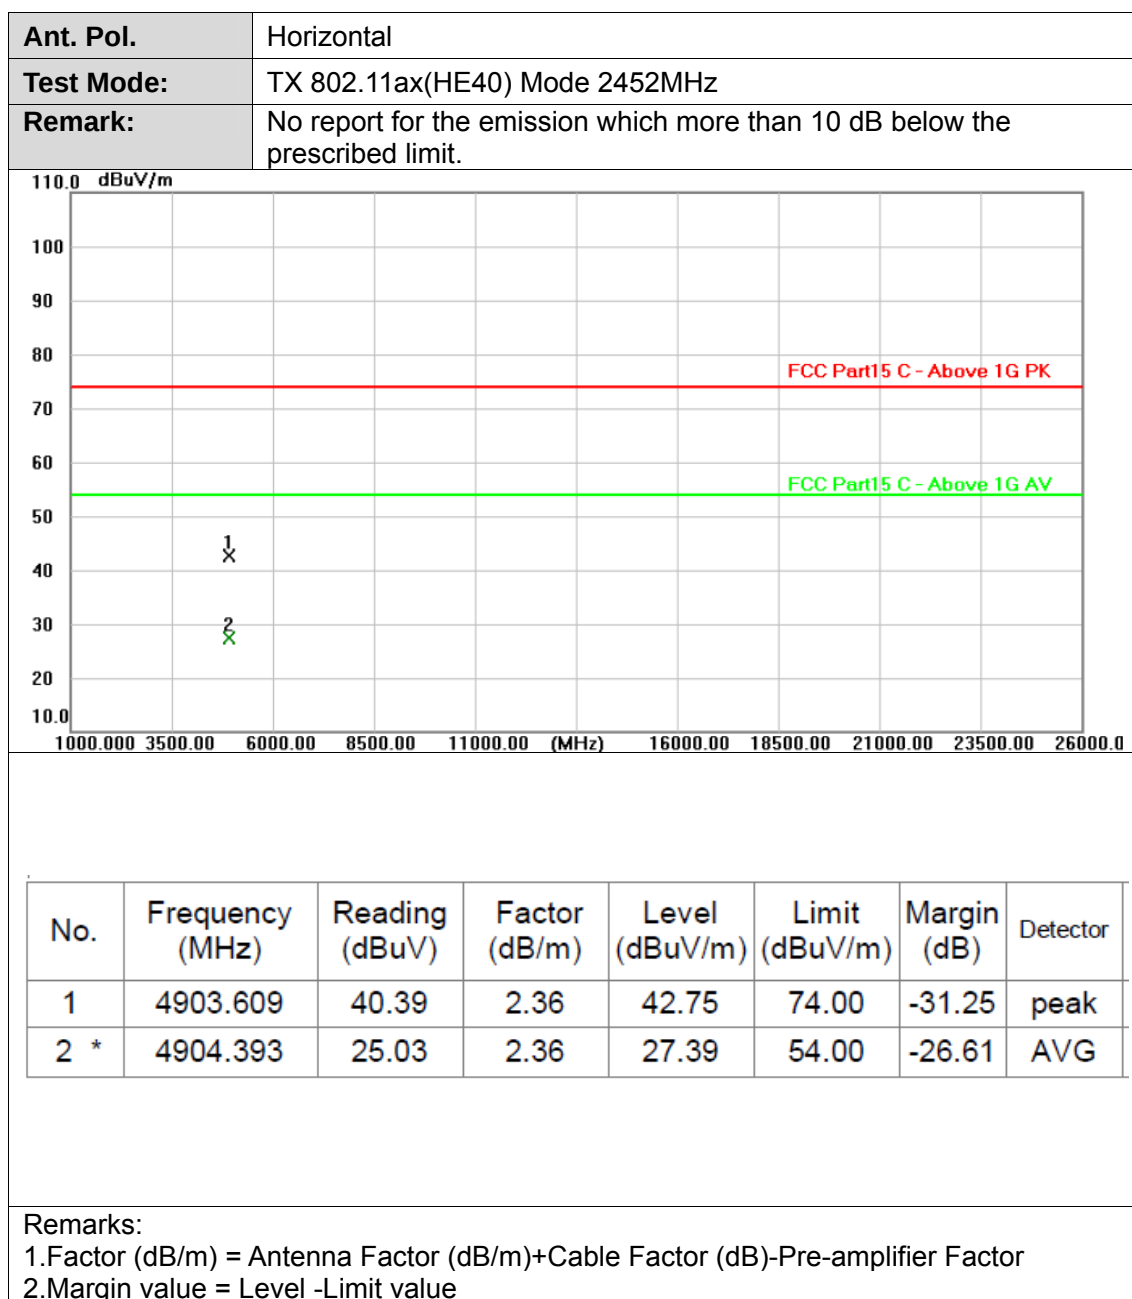



Ant. Pol.	Vertical
Test Mode:	TX 802.11ax(HE40) Mode 2452MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

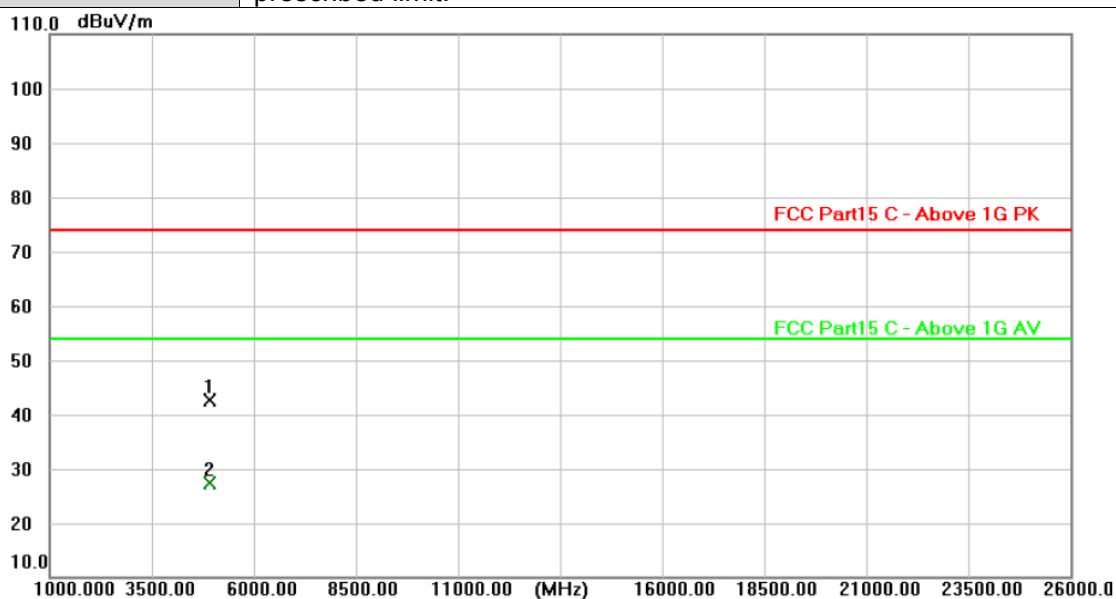

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4903.467	40.26	2.36	42.62	74.00	-31.38	peak
2 *	4904.489	24.94	2.36	27.30	54.00	-26.70	AVG

Remarks:

- Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
- Margin value = Level -Limit value


3.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)/ RSS 247 5.5:

Restricted Frequency Band (MHz)	(dBuV/m)(at 3m)	
	Peak	Average
2310 ~2390	74	54
2483.5 ~2500	74	54

Test Configuration

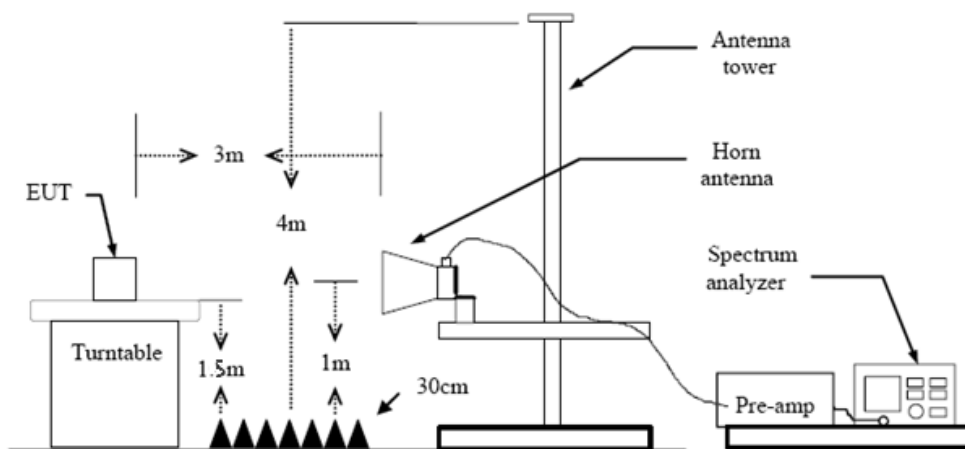

Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.8 Duty Cycle.


Test Mode


Please refer to the clause 2.4.


Test Results

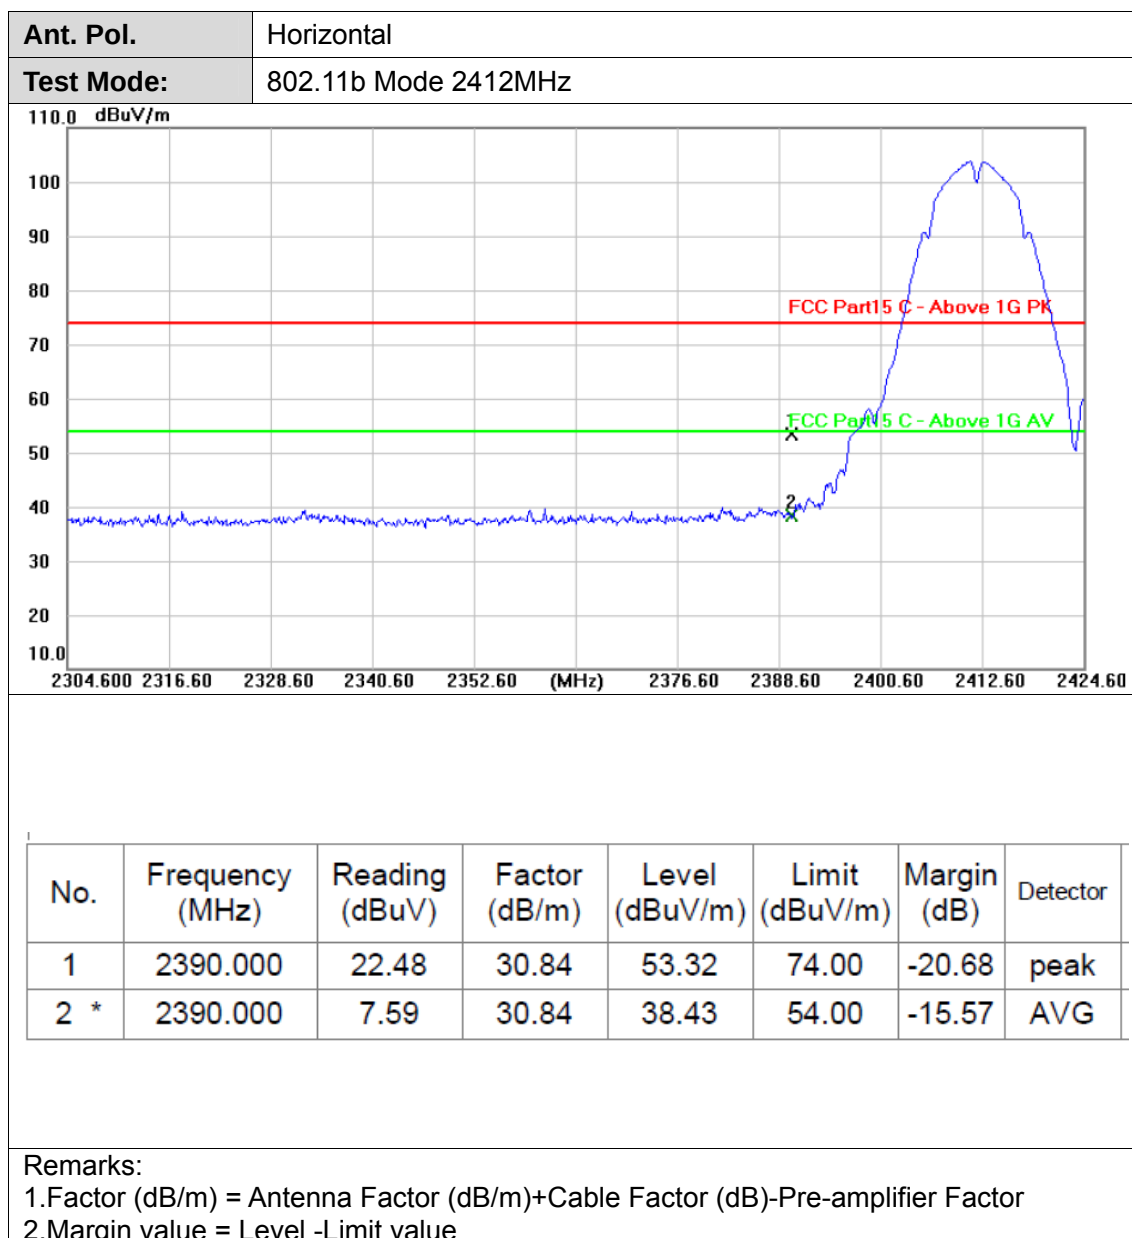


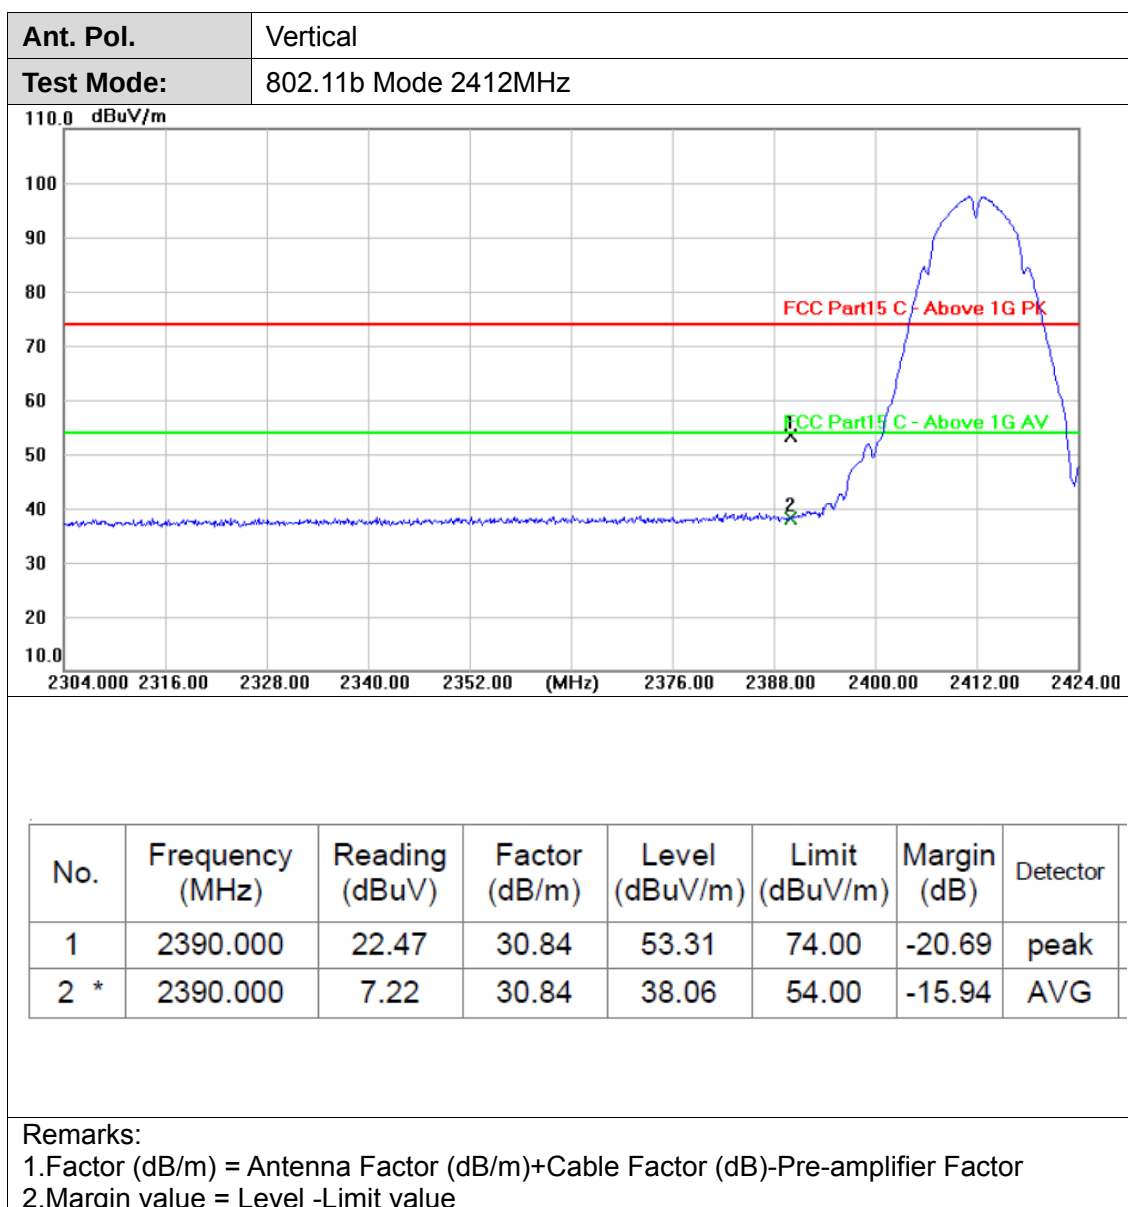


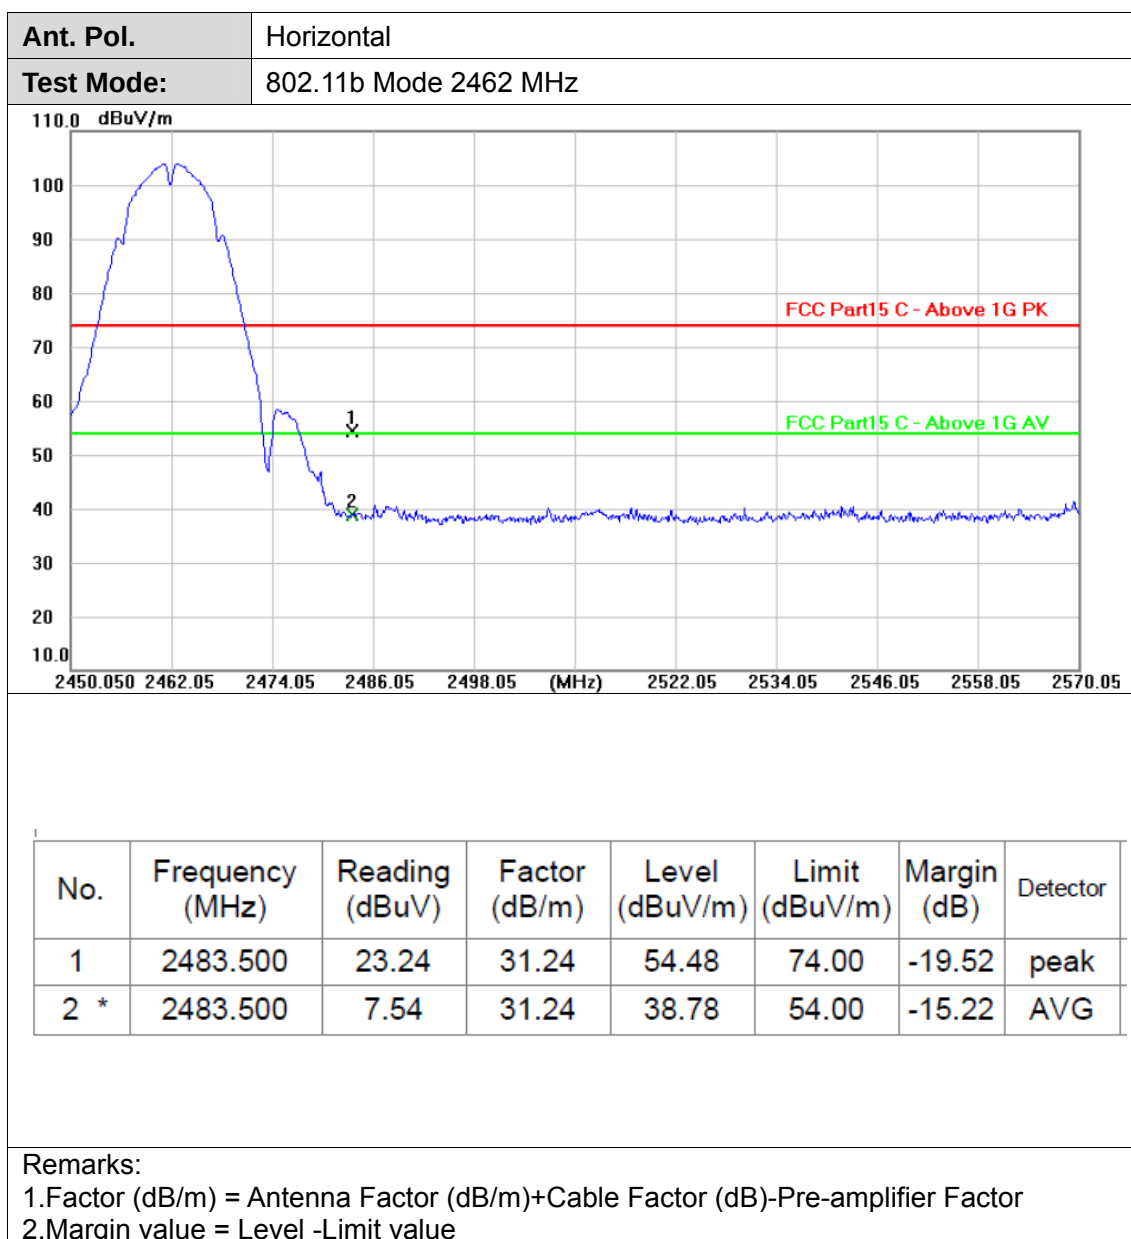


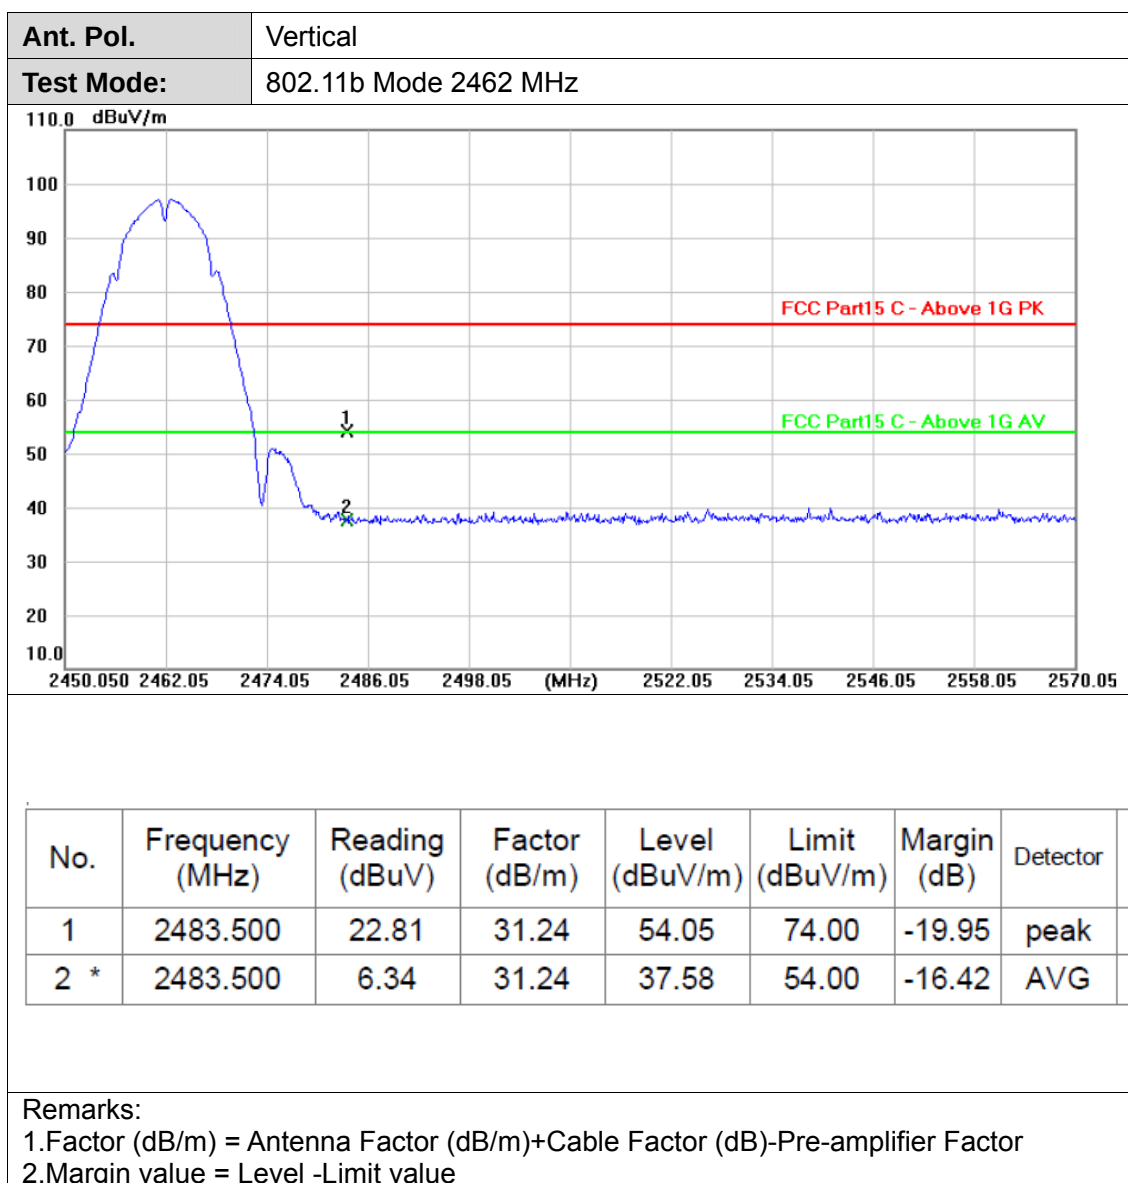


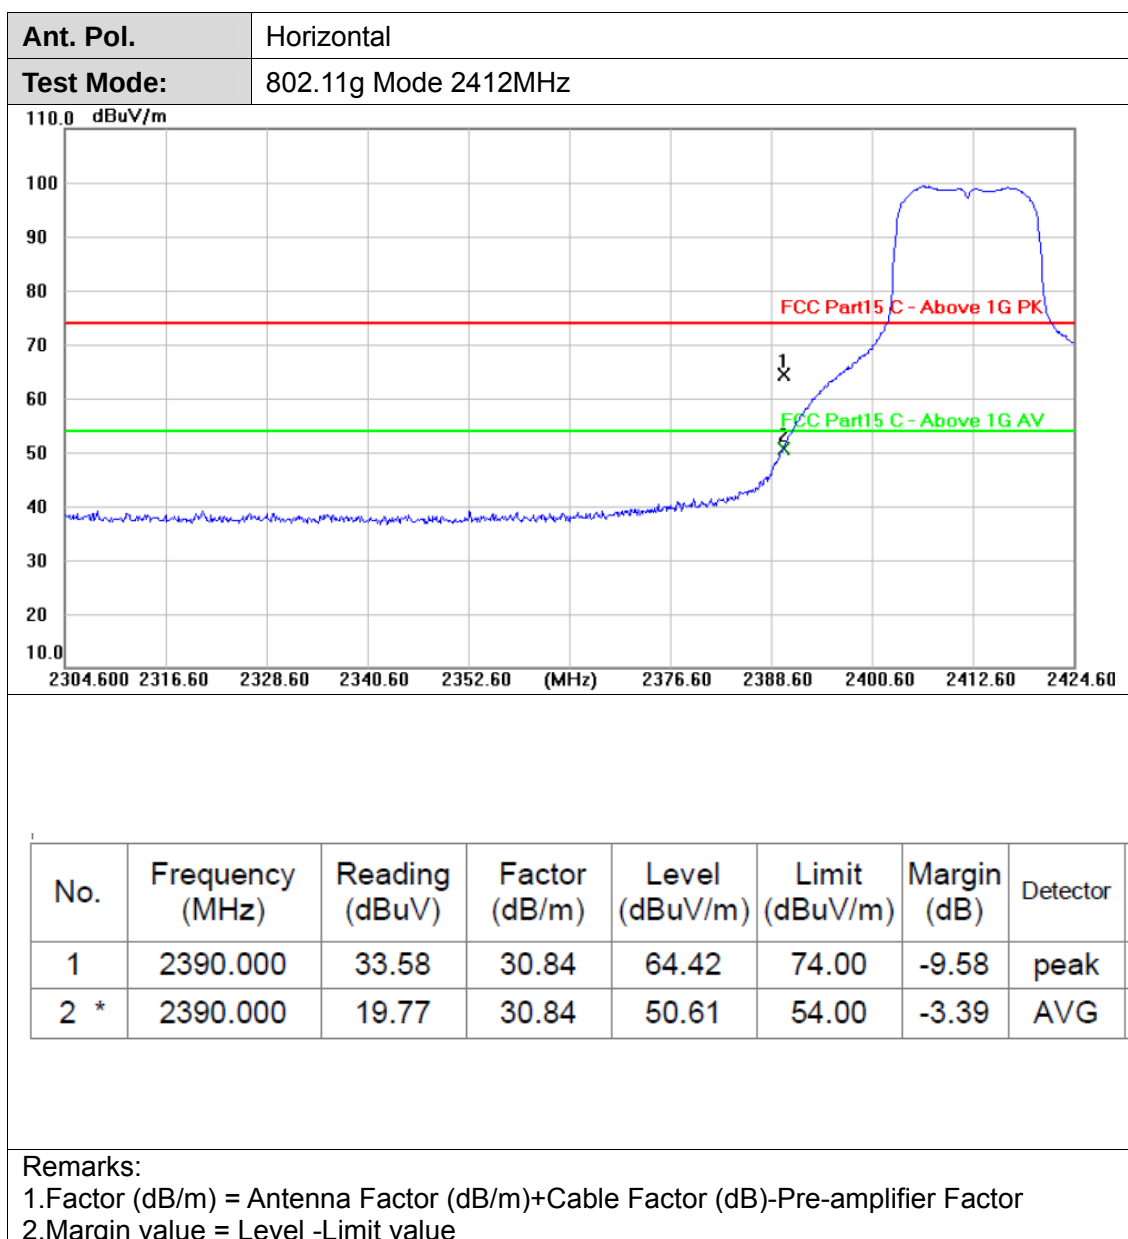


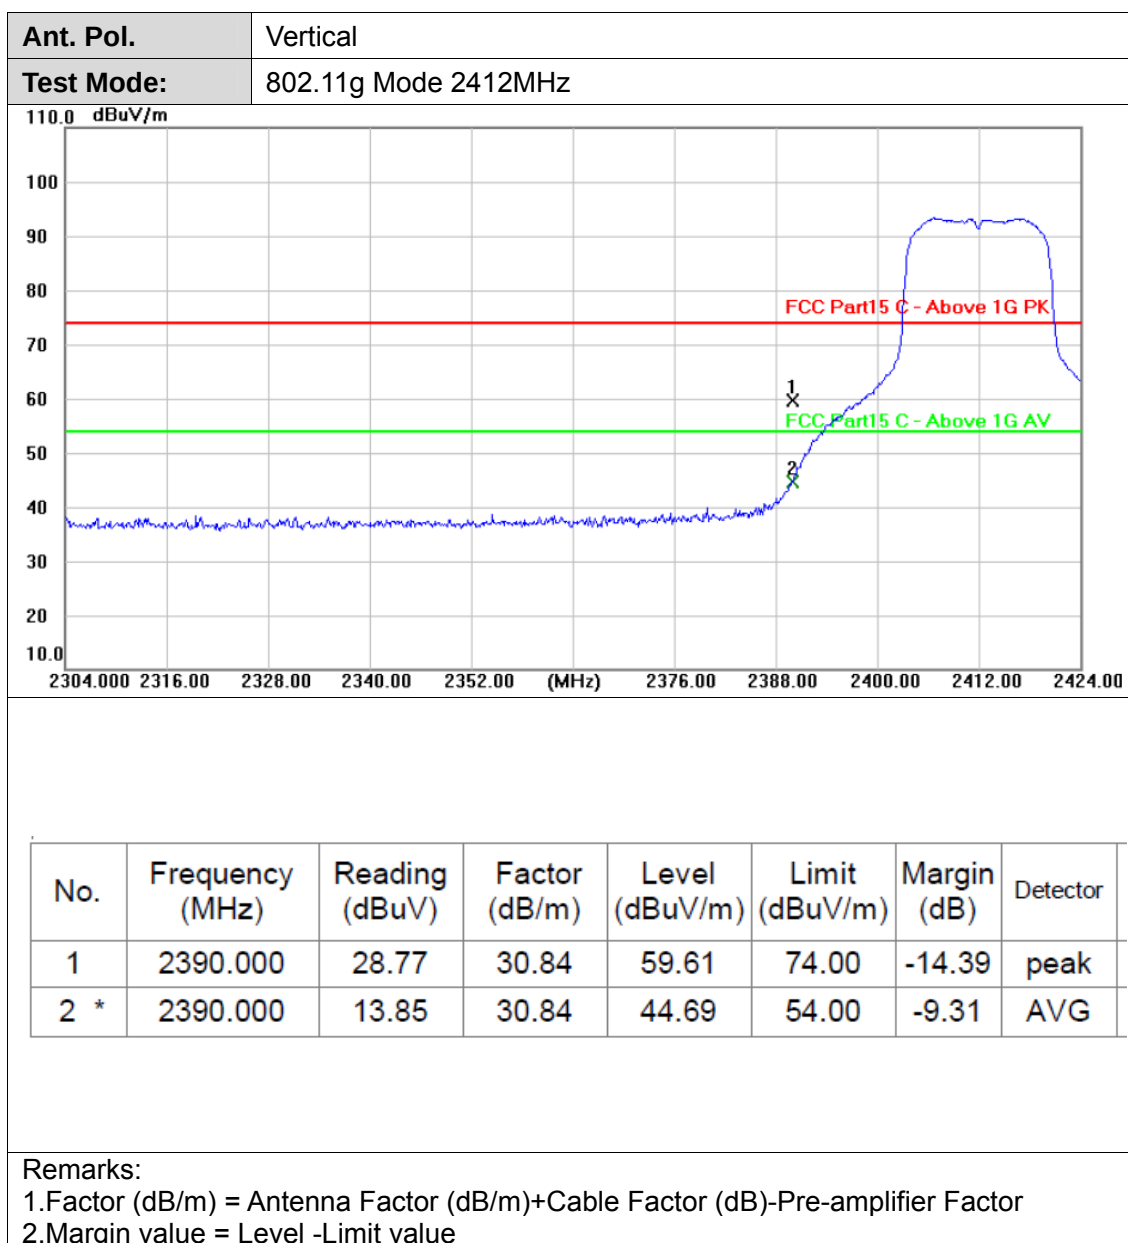


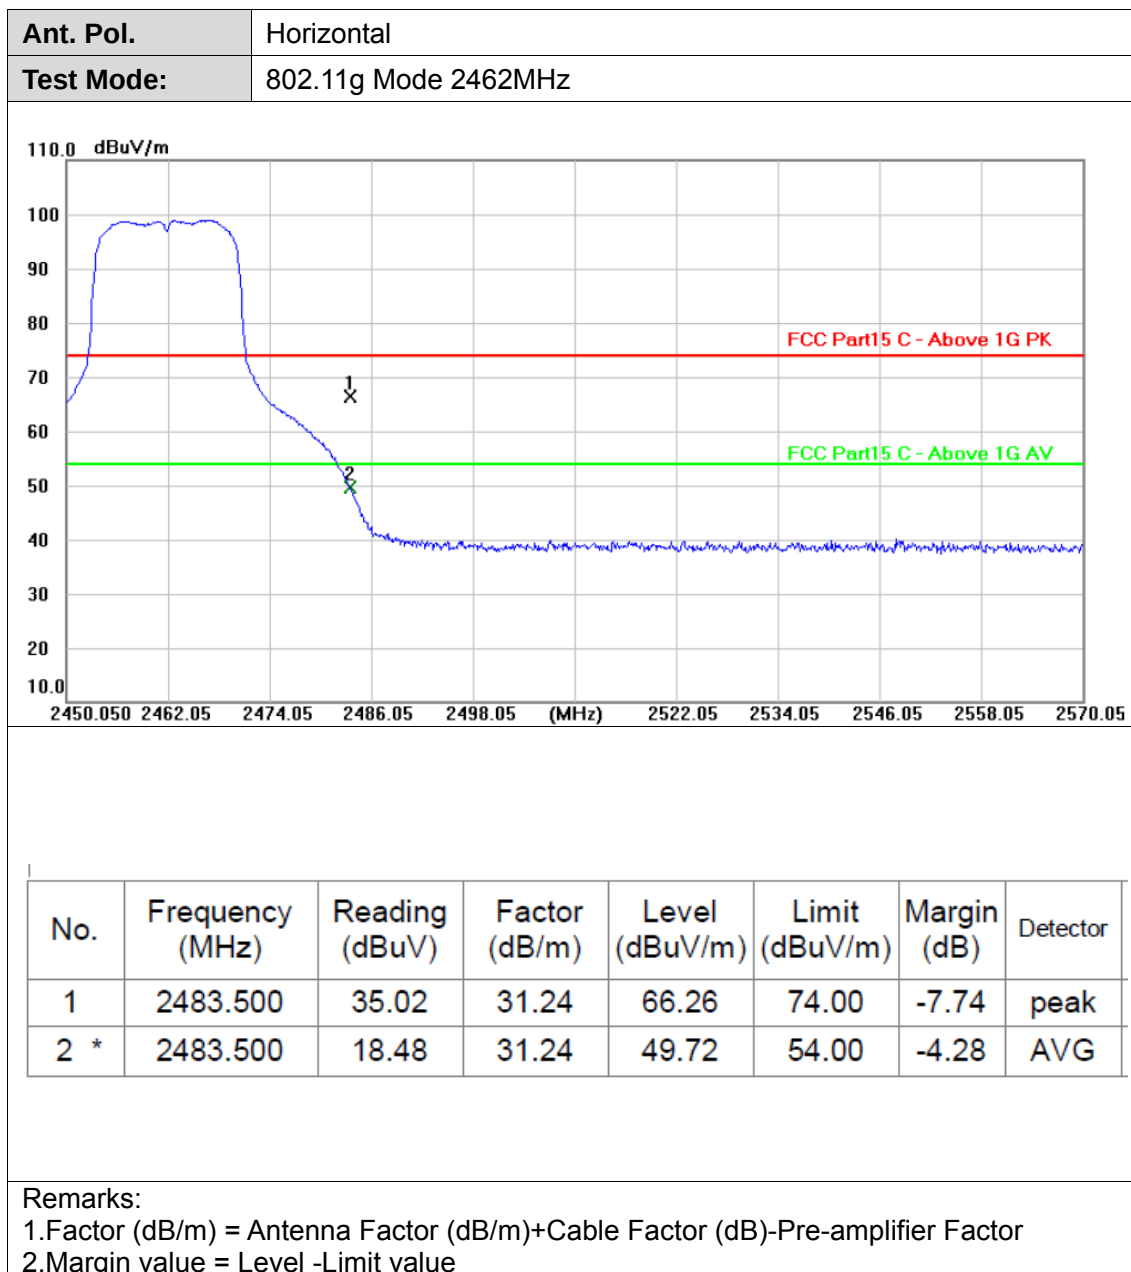


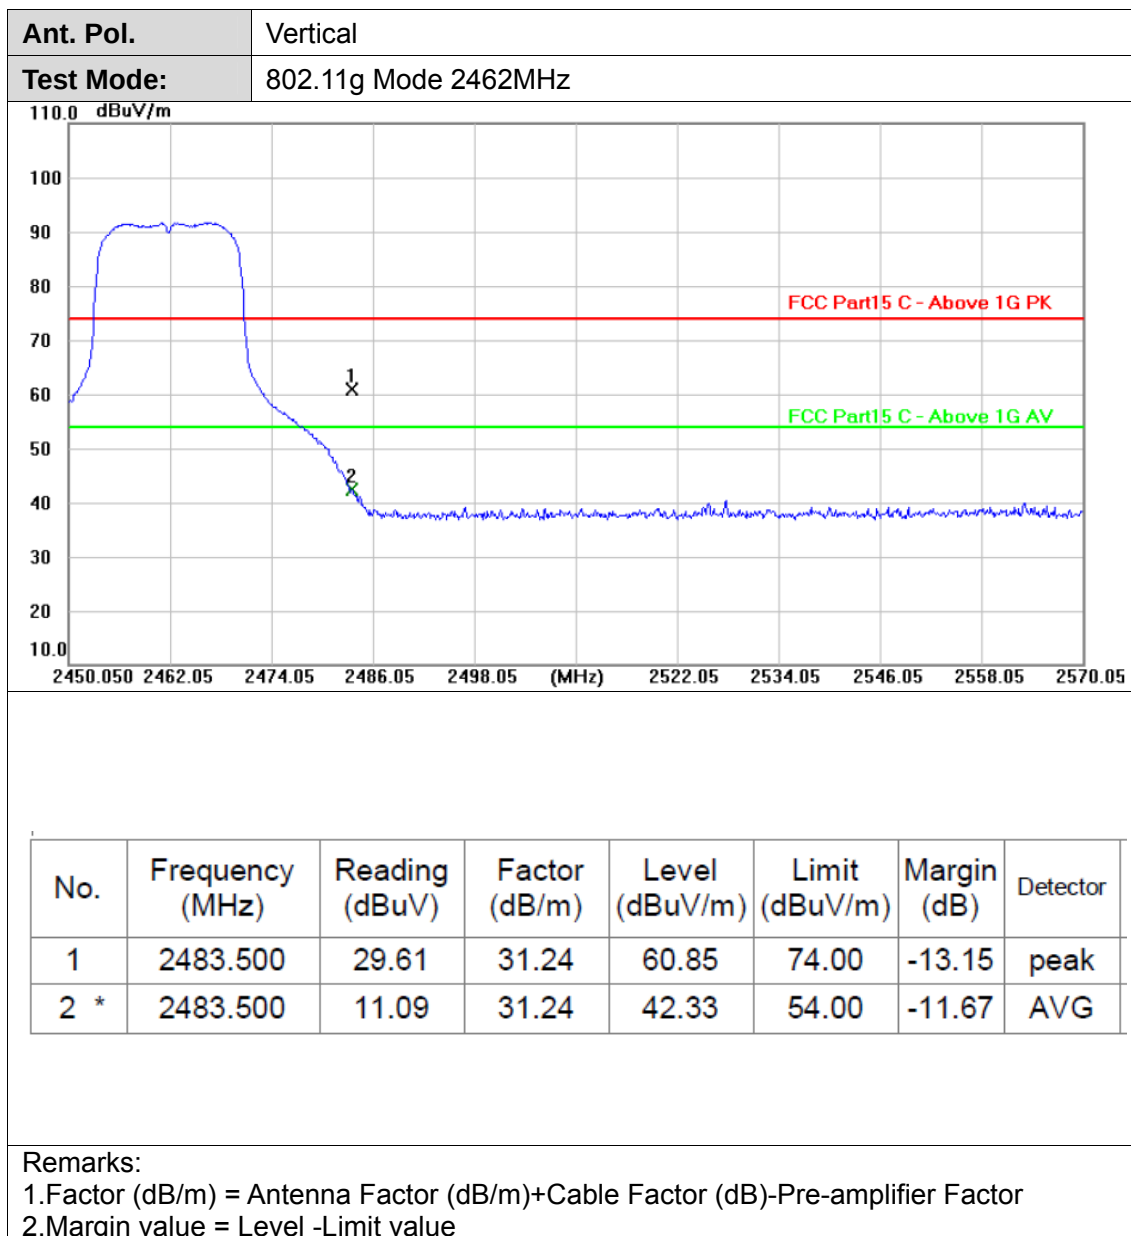


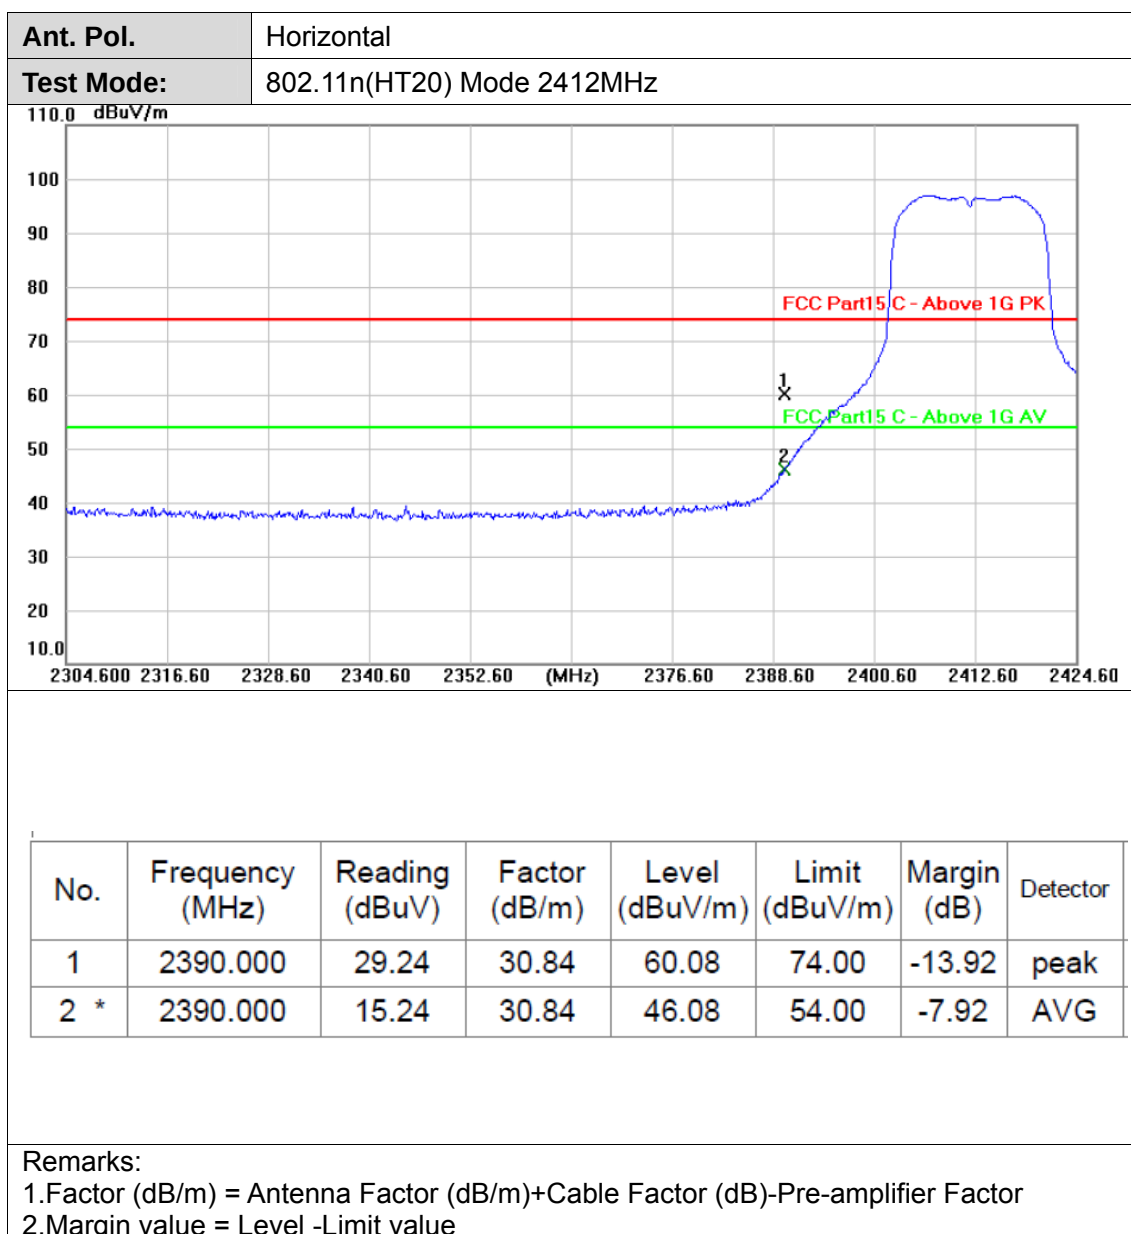


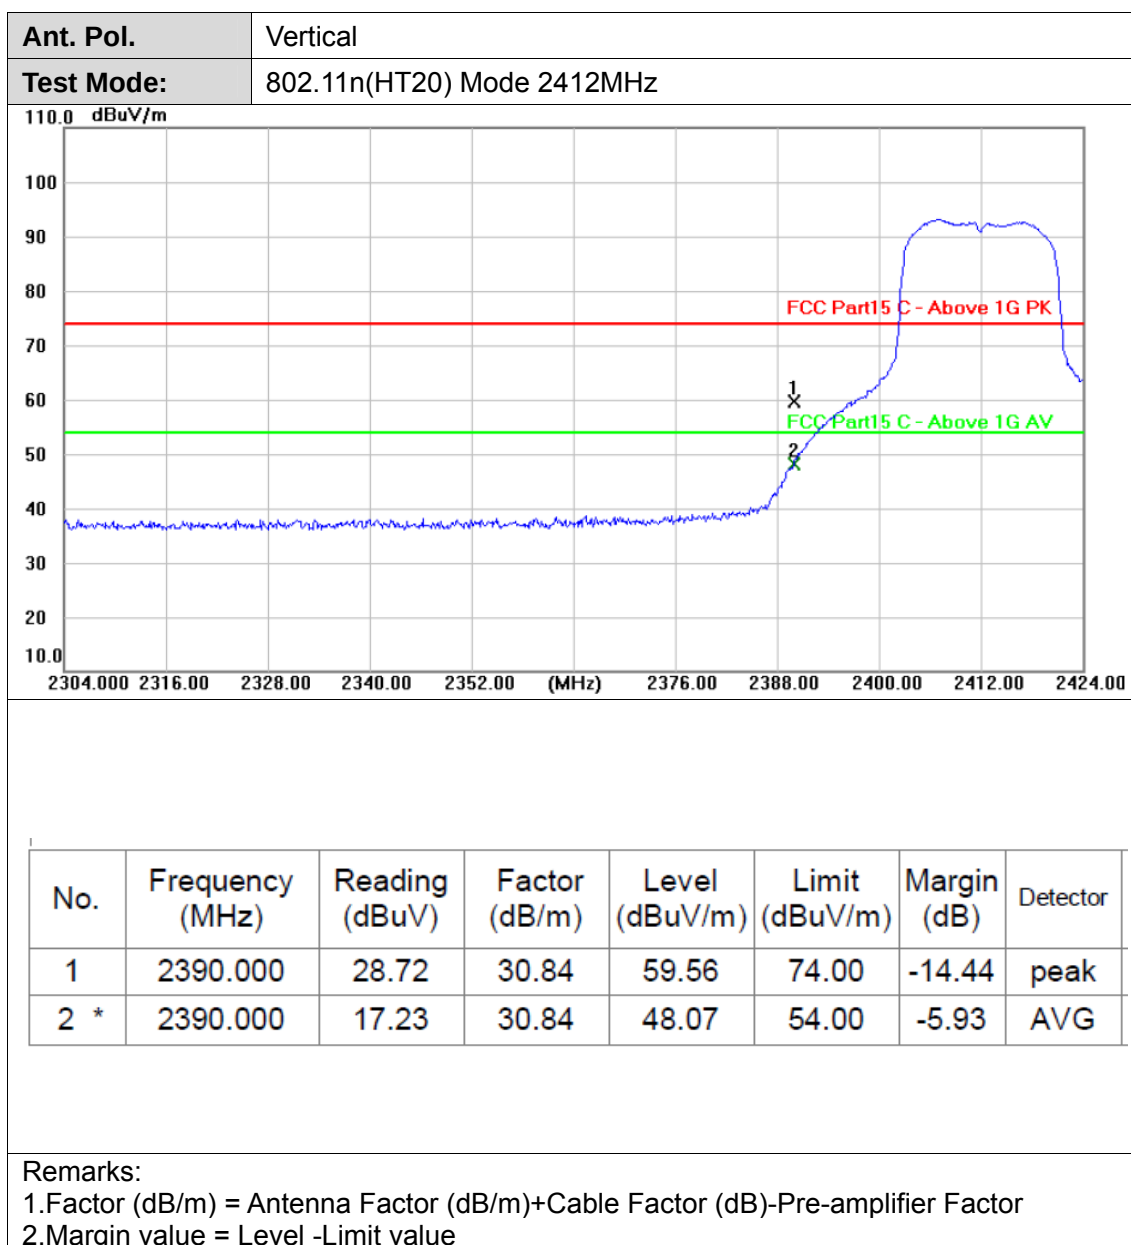


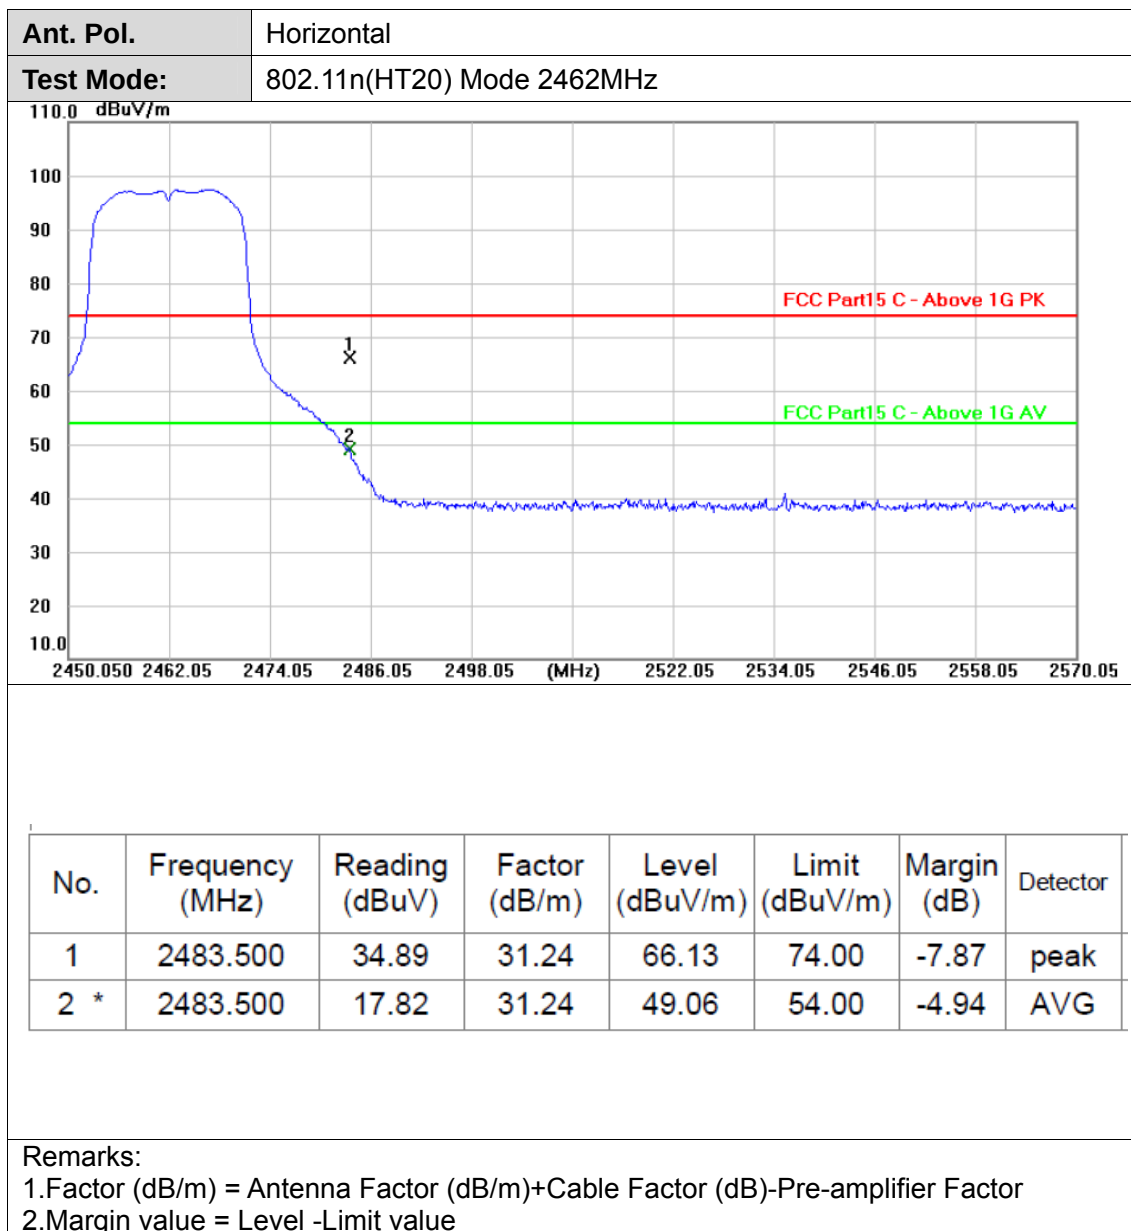


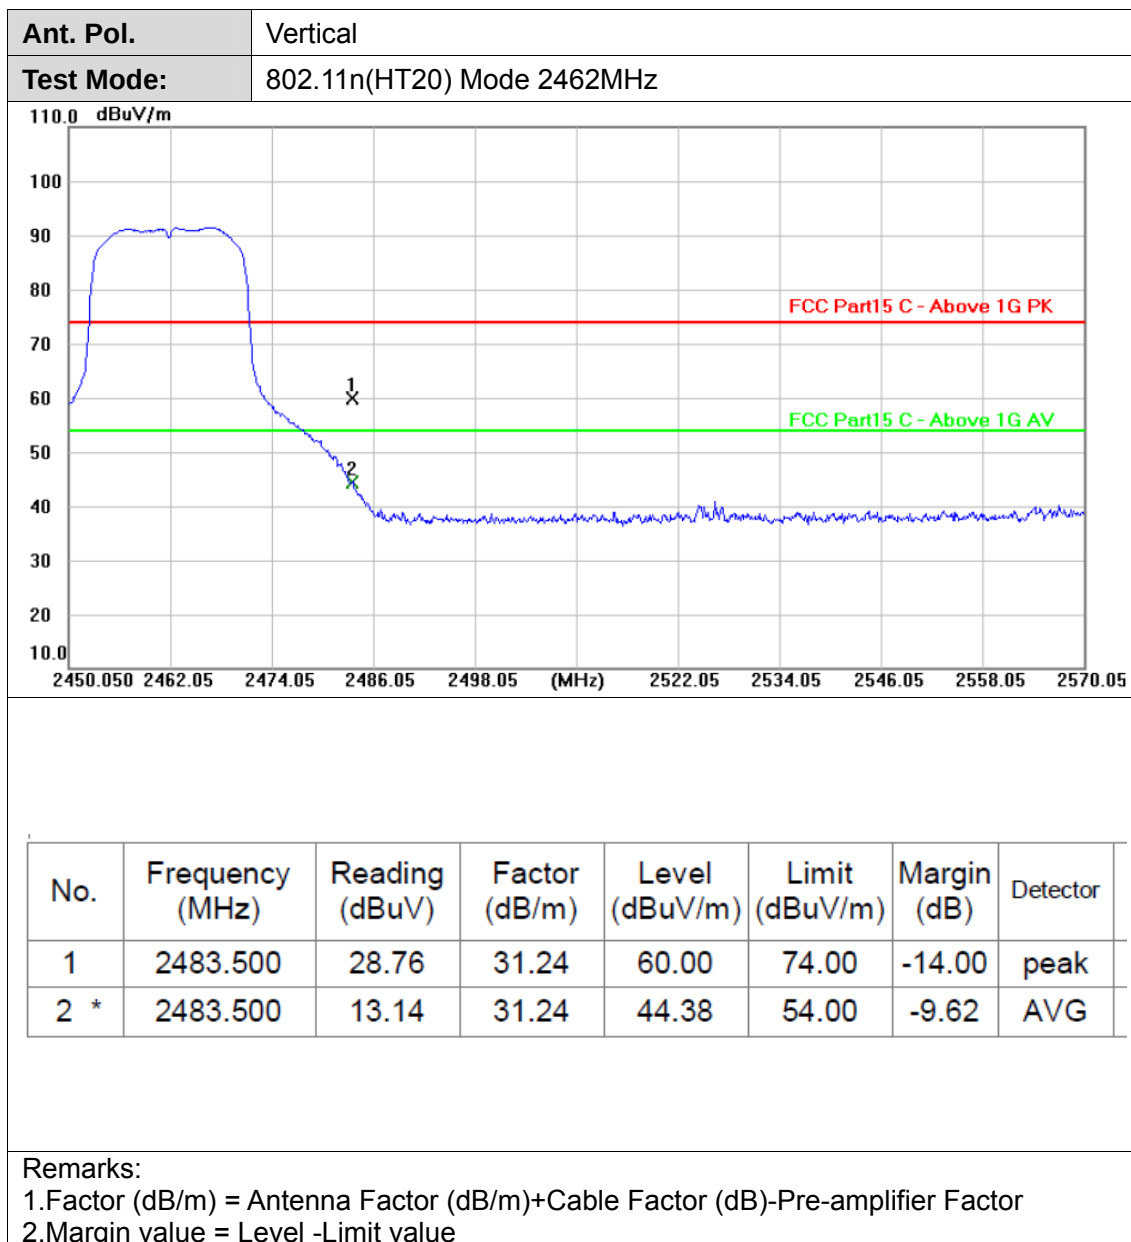


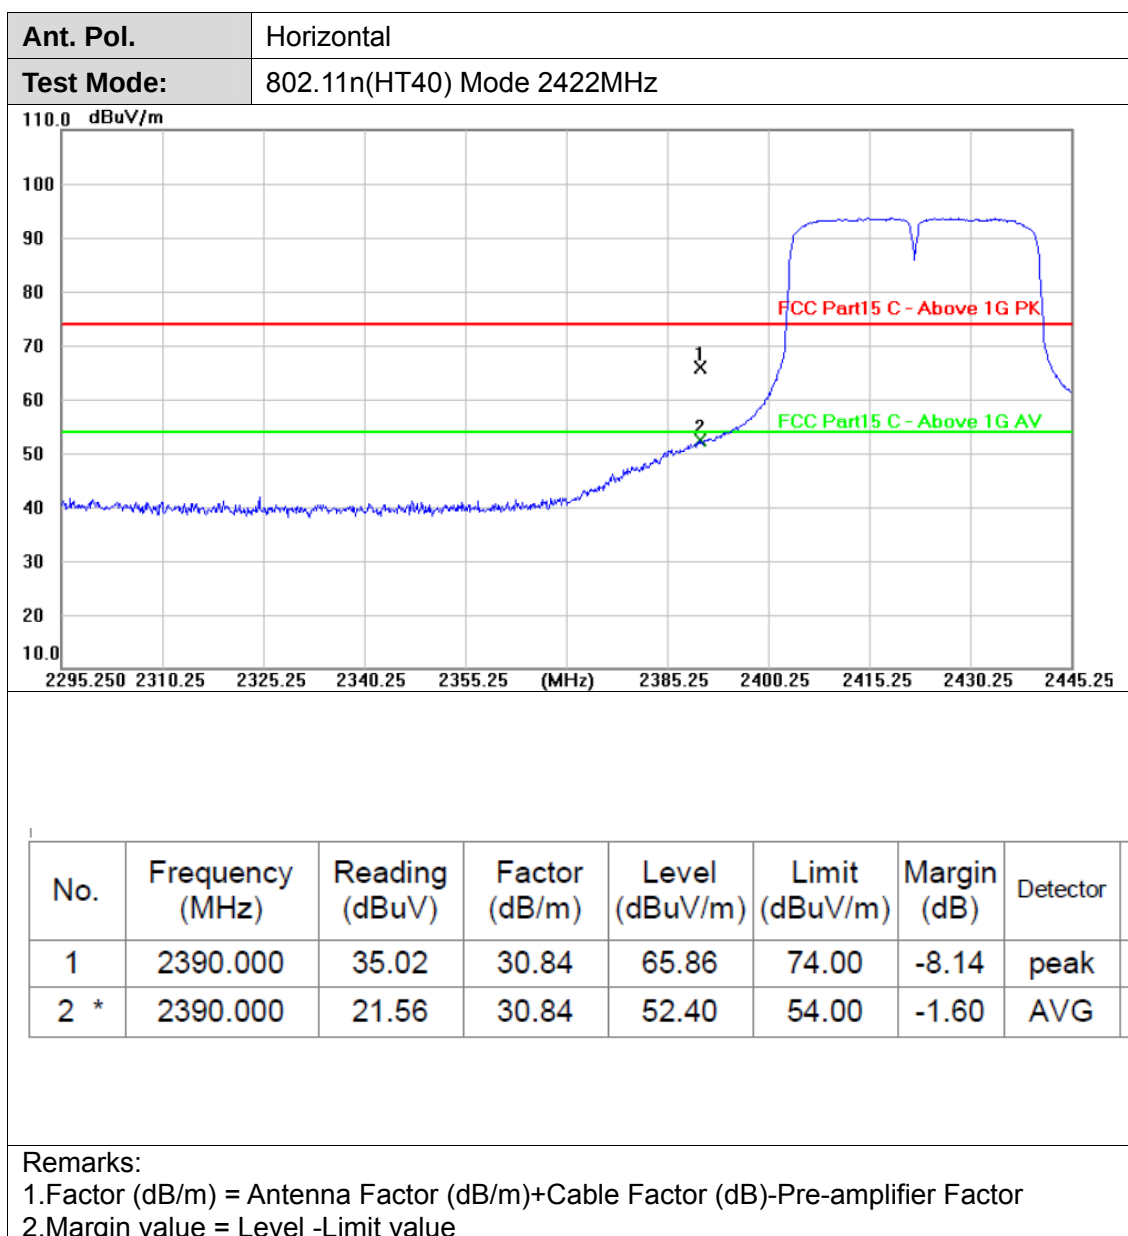


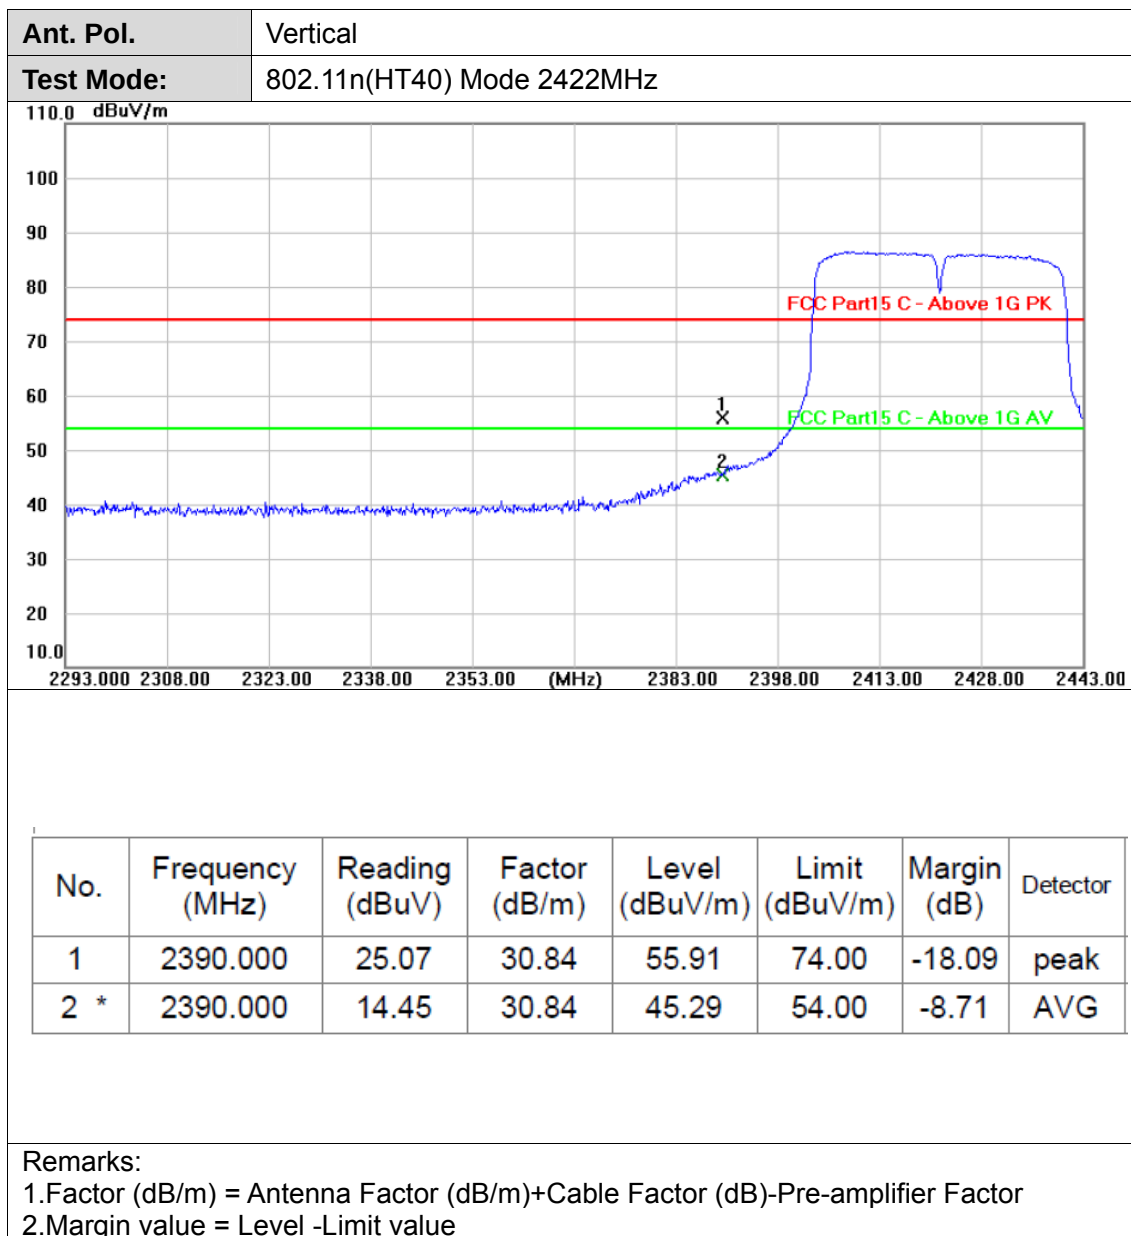


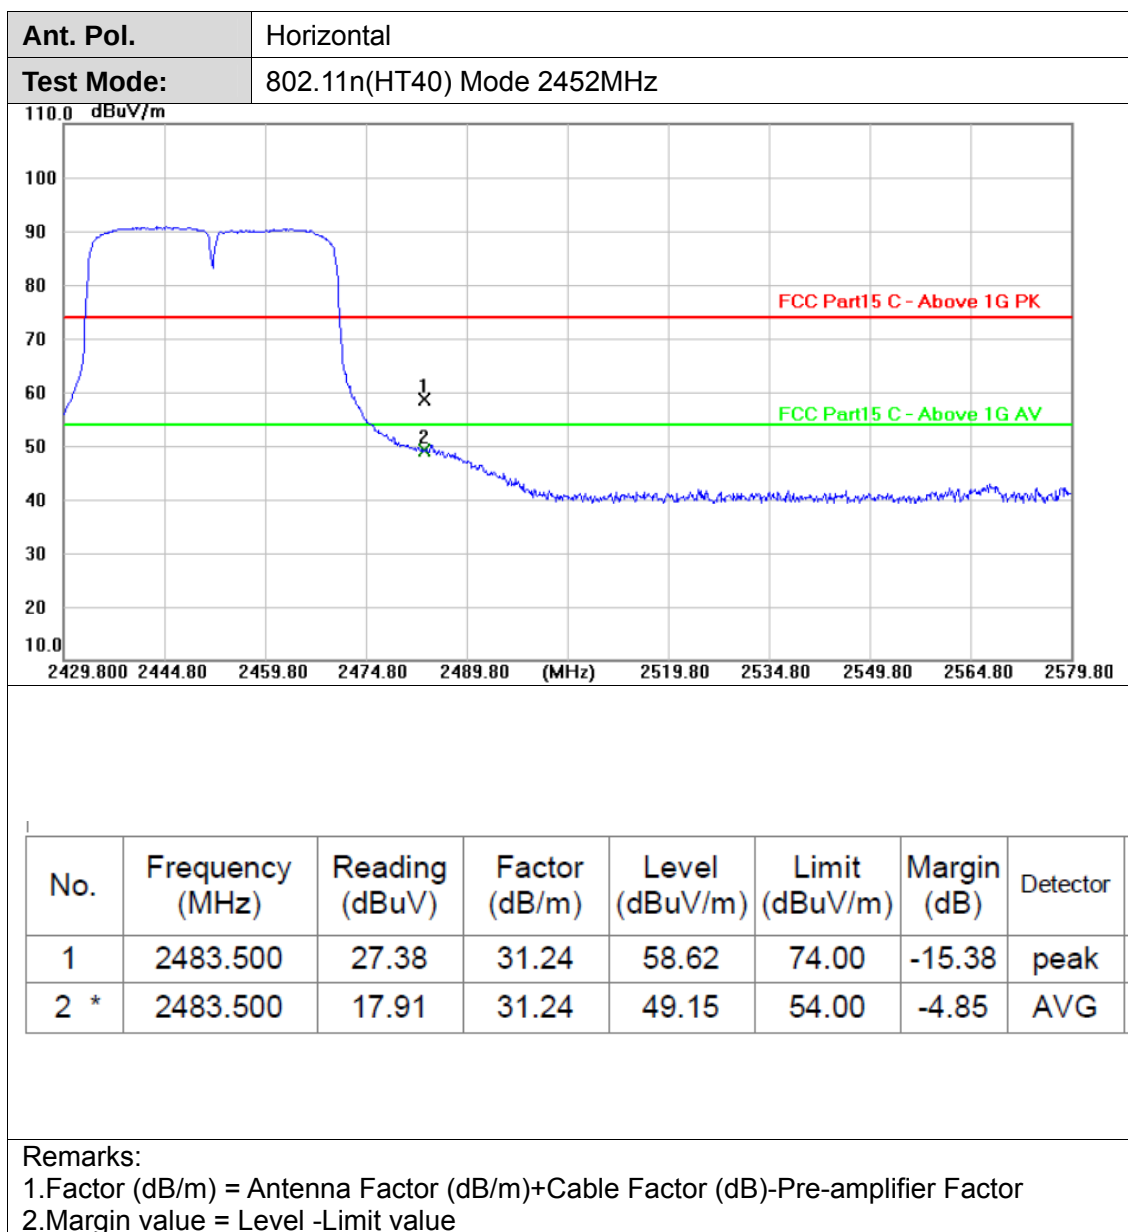


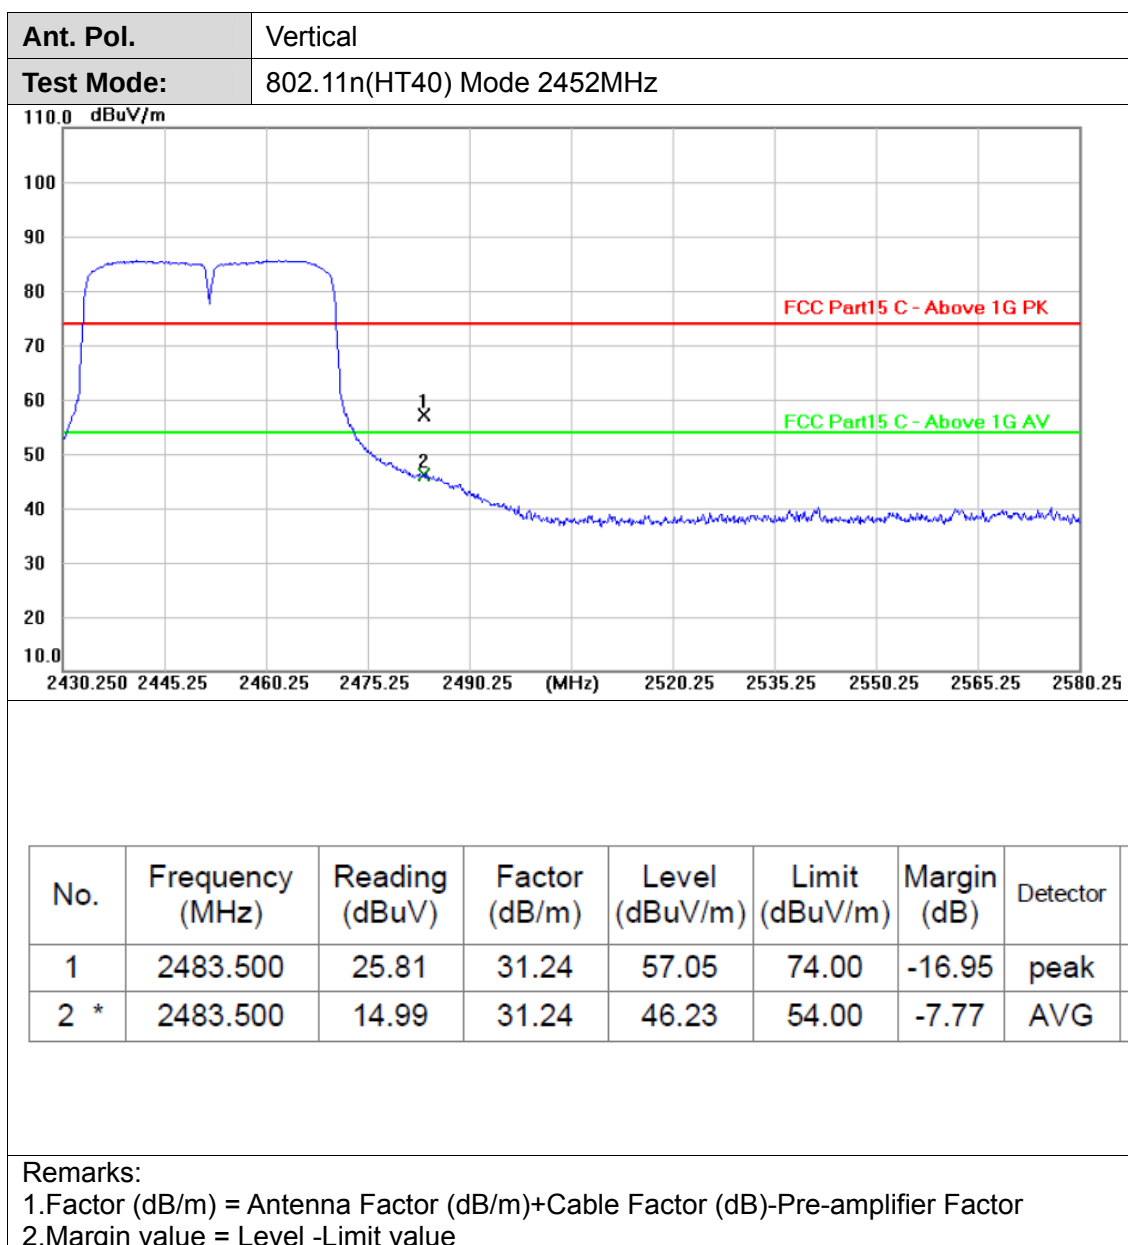


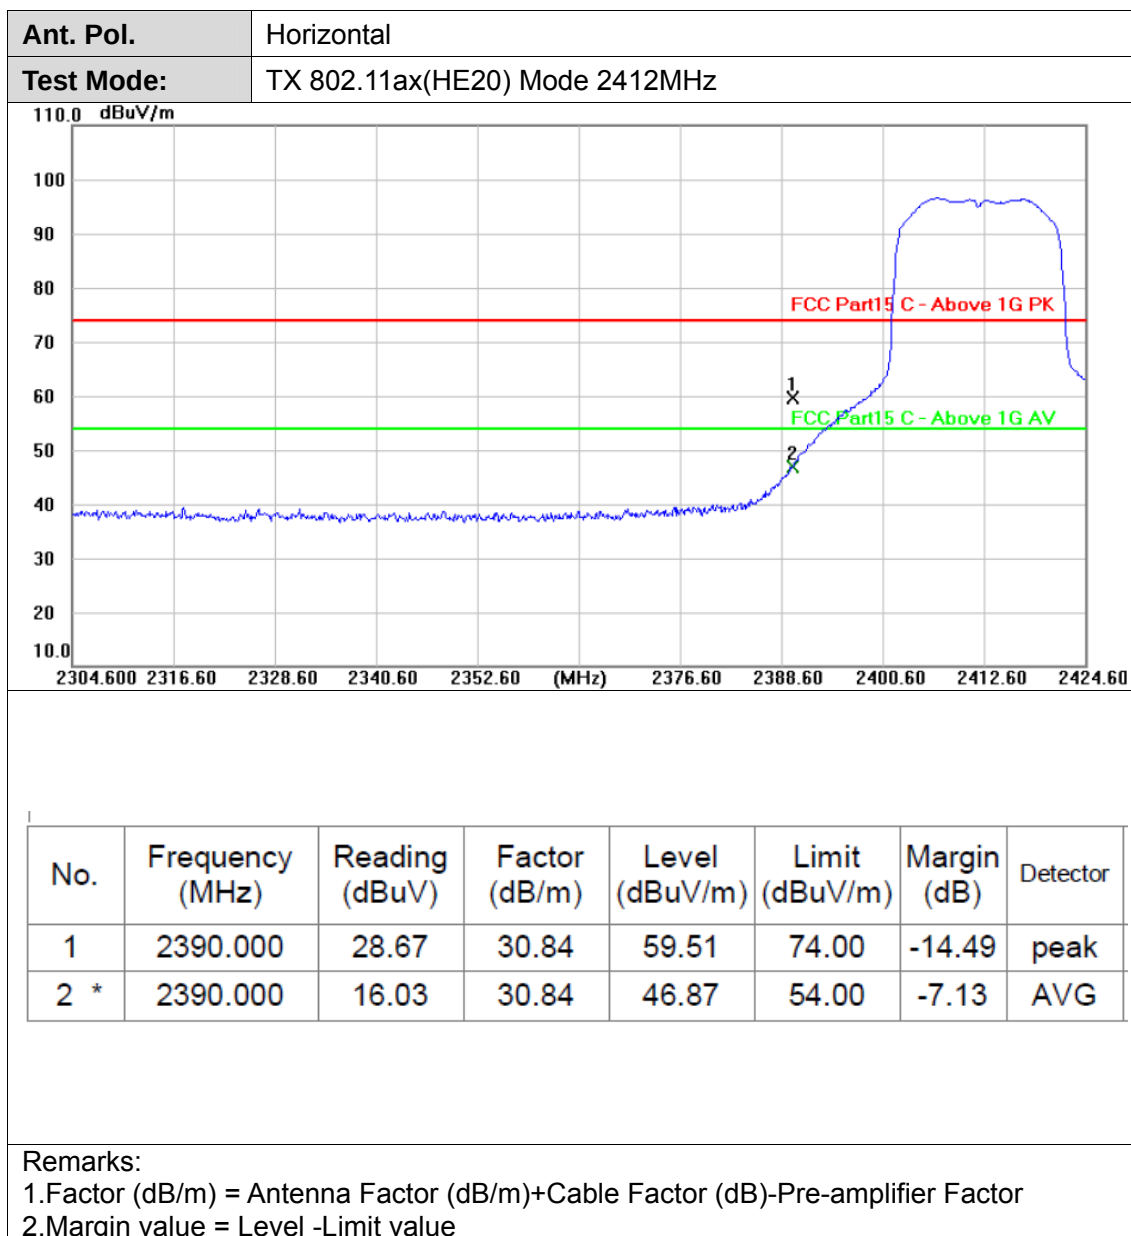


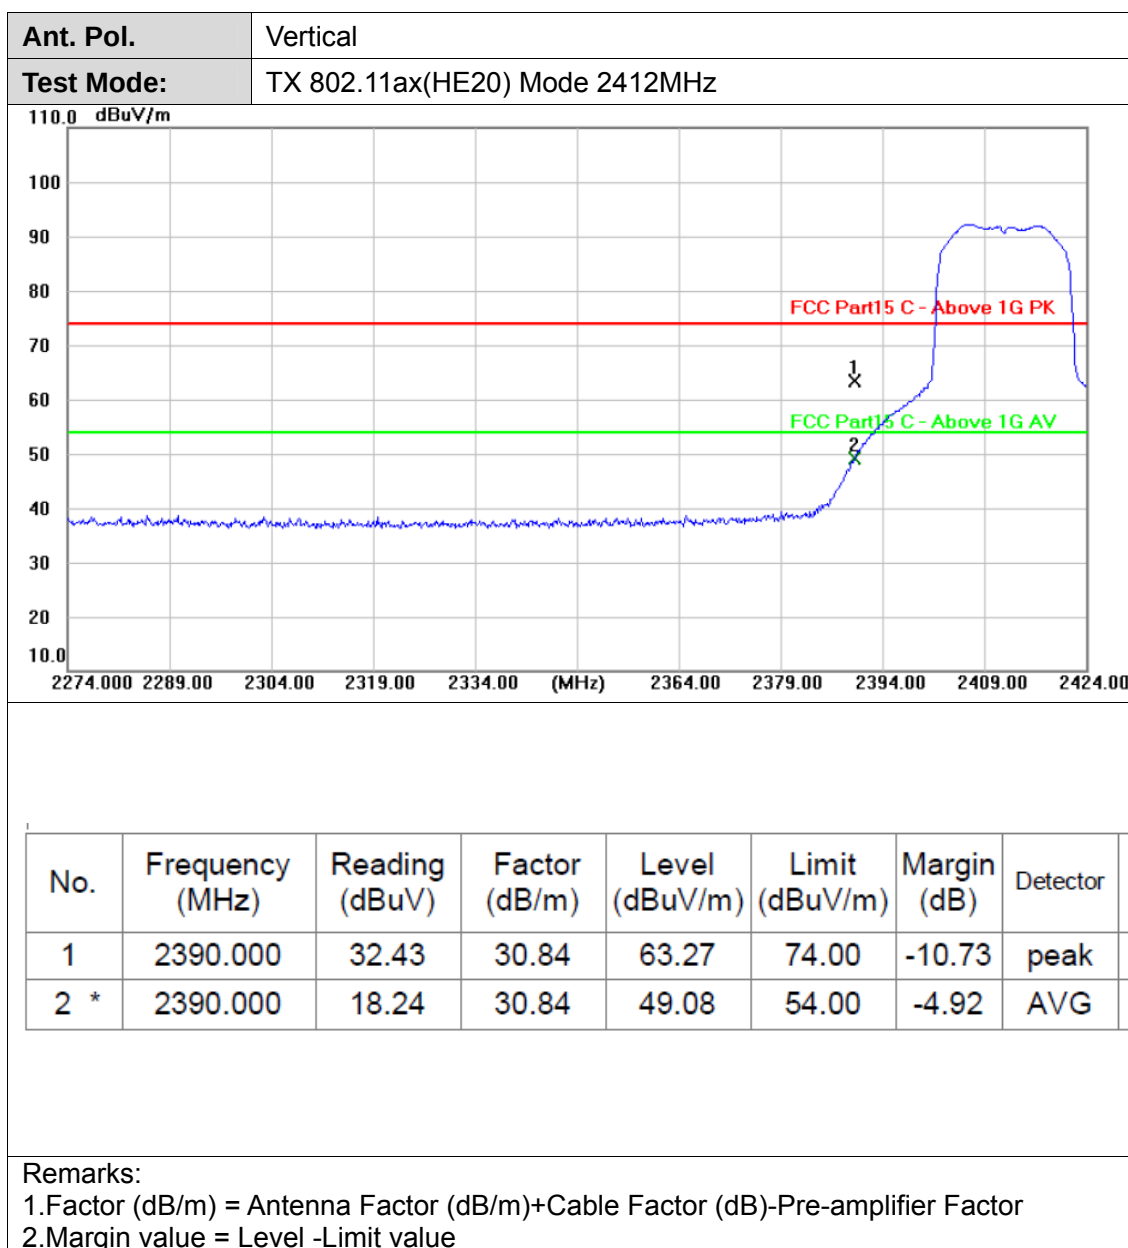


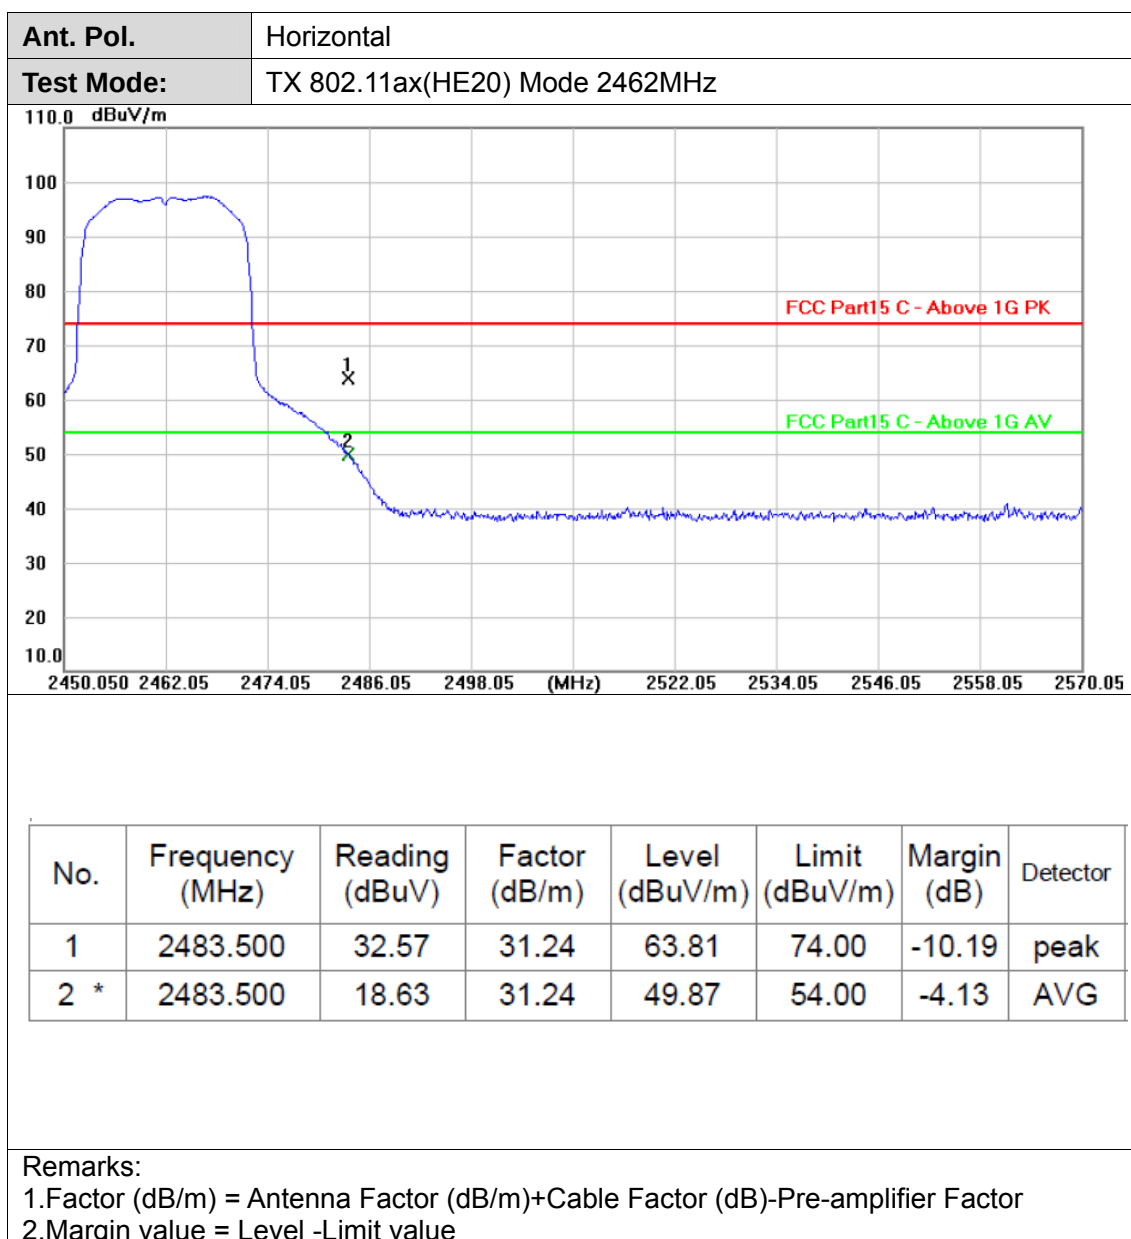


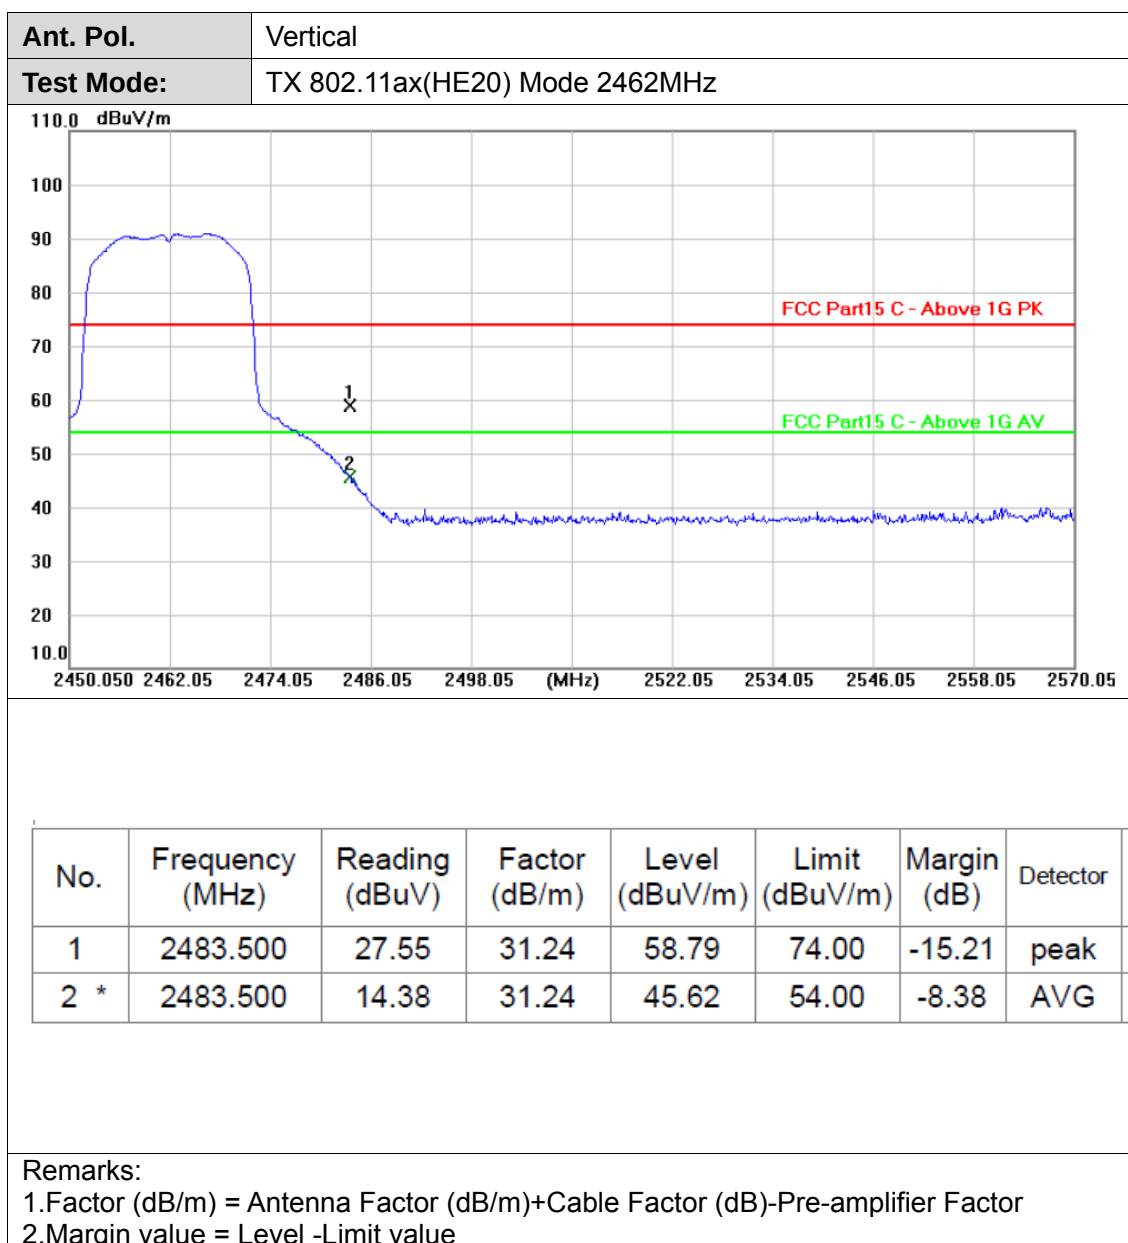

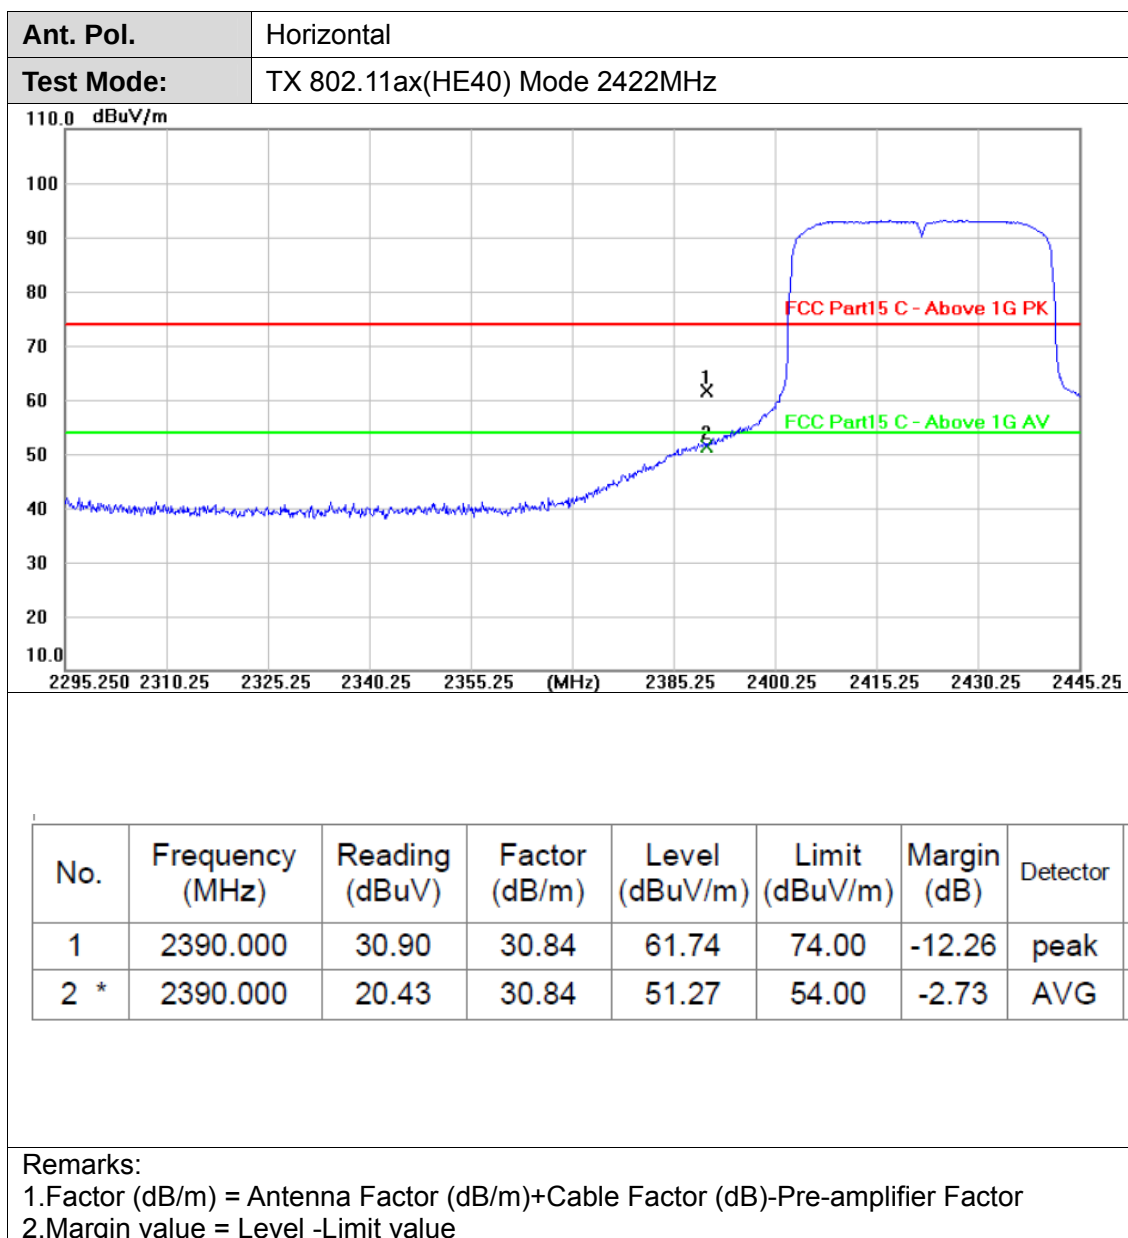

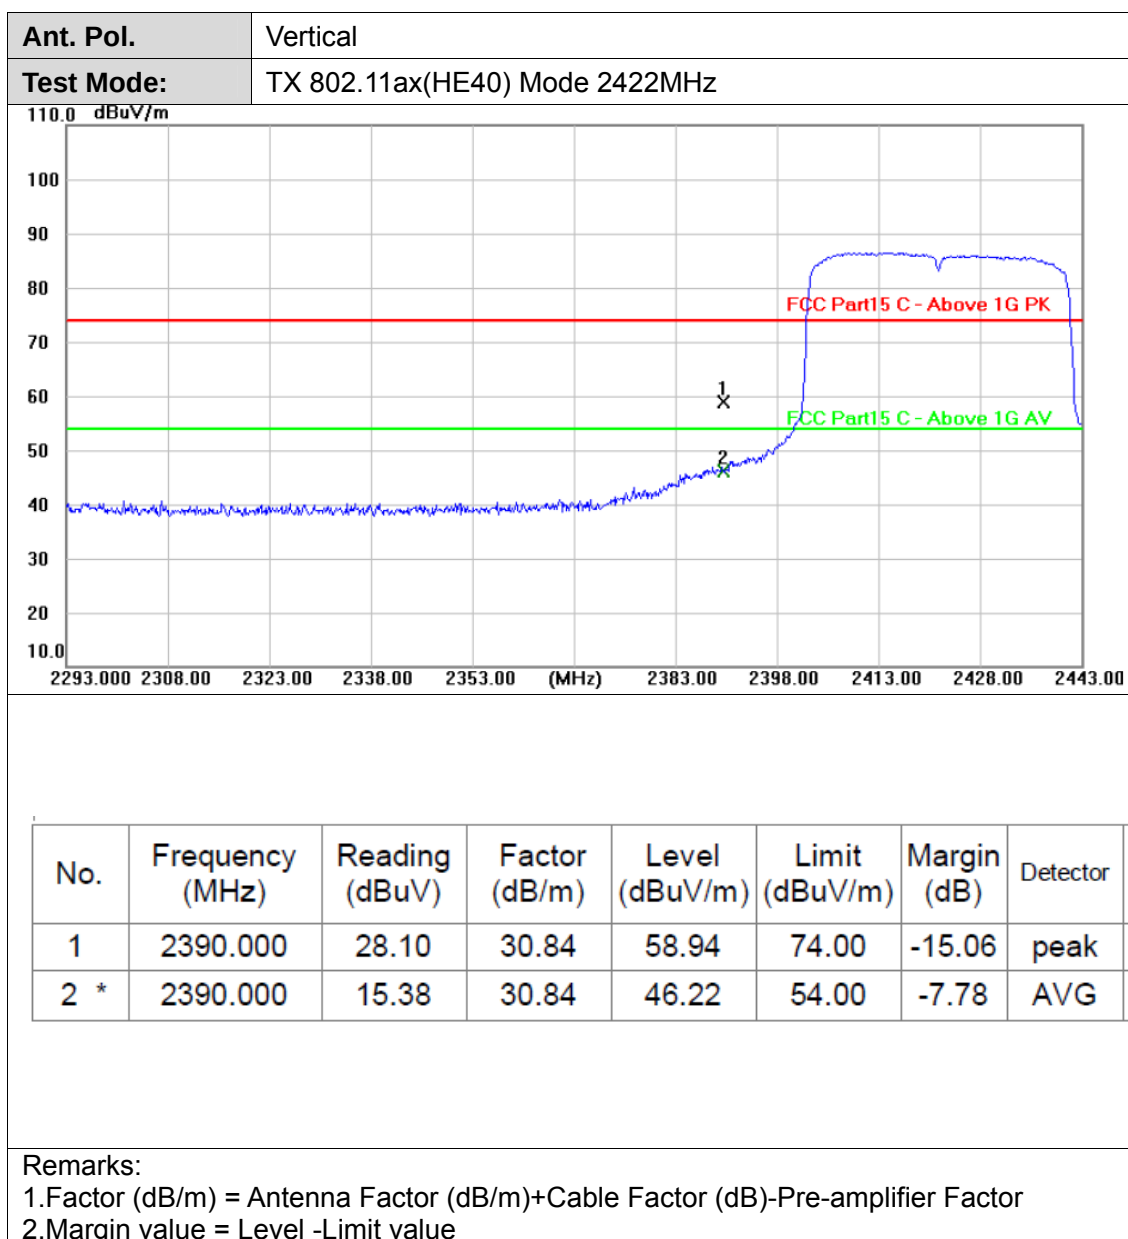

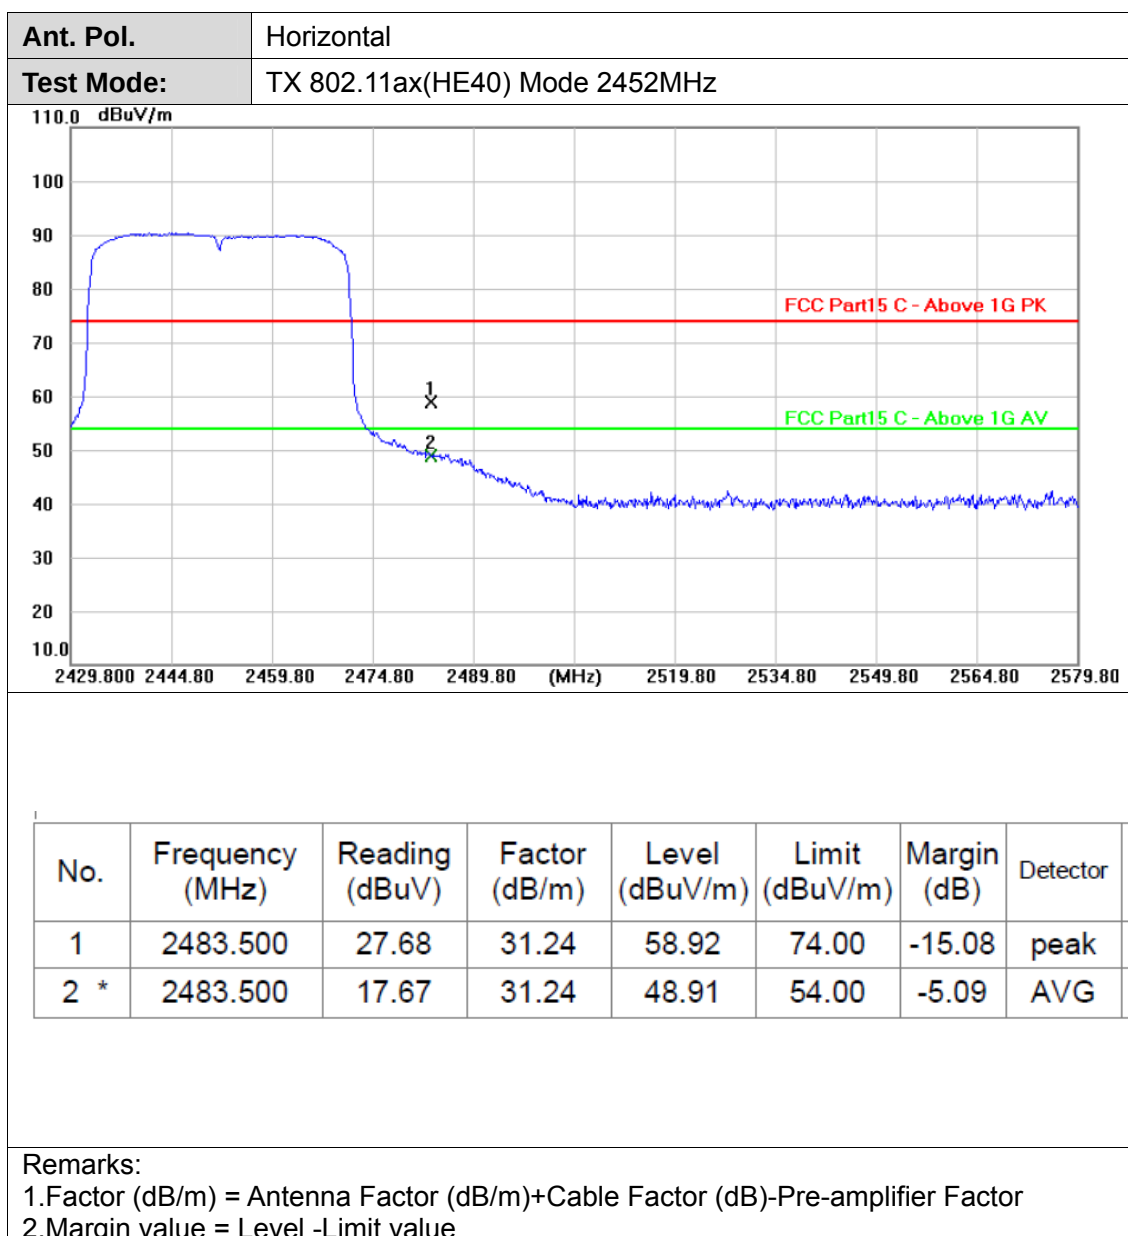

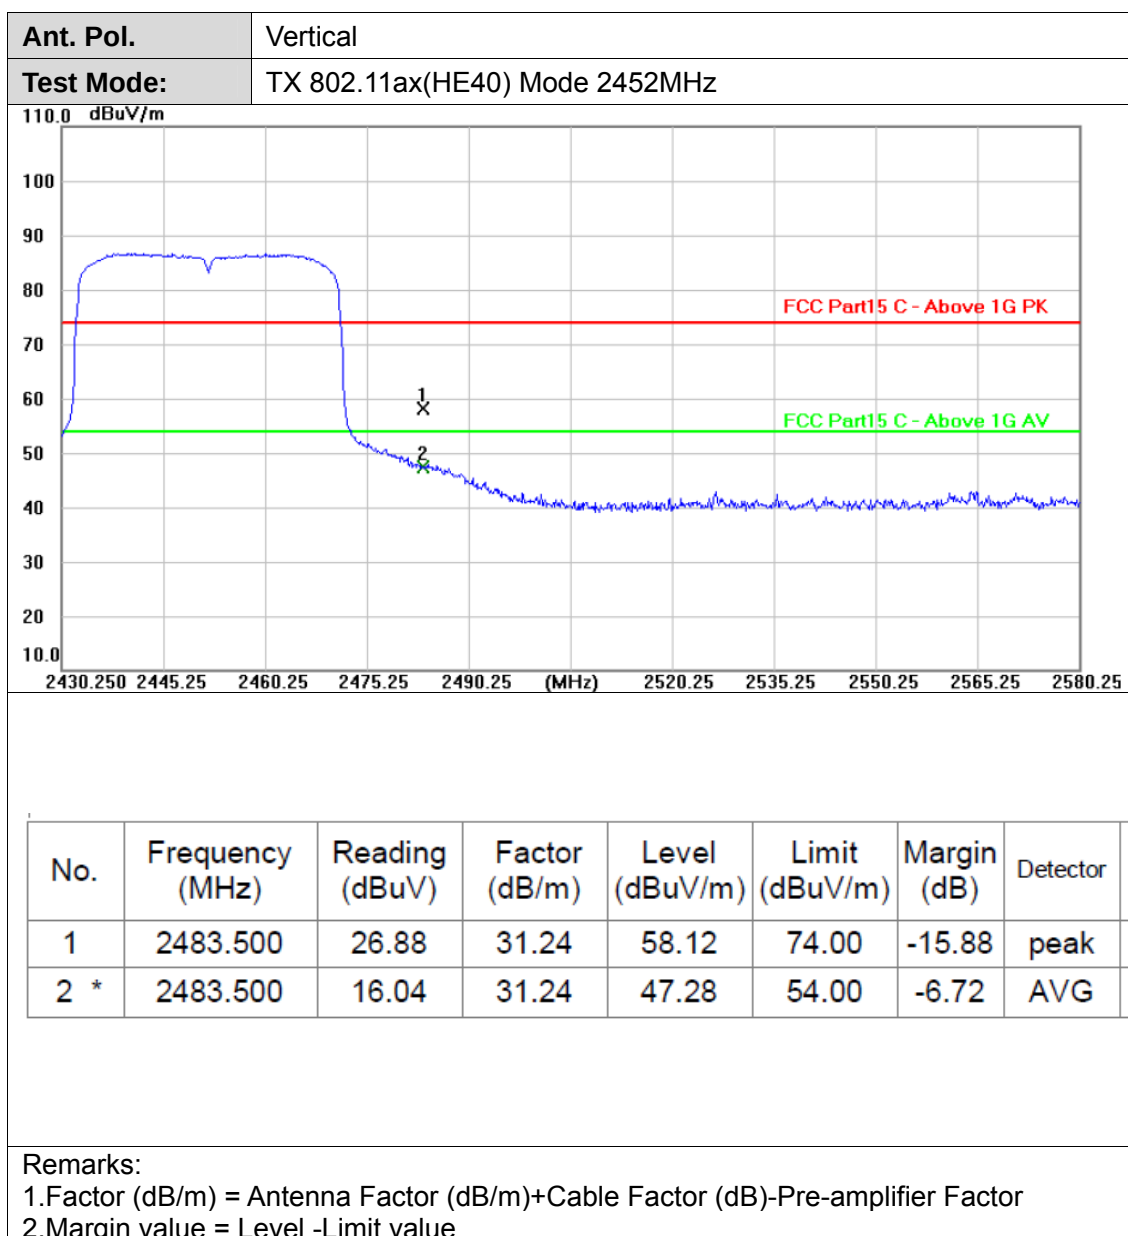




3.4. Band edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW $\geq$ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.


Test Results

**(1) Band edge Conducted Test**


Test Mode	Test Frequency	Ref Level[dBm]	Result[dBm]	Limit[dBm]	Verdict
802.11b	2412	9.16	-37.61	≤ -20.84	PASS
	2462	8.14	-55.62	≤ -21.86	PASS
802.11g	2412	2.53	-33.40	≤ -27.47	PASS
	2462	1.13	-48.16	≤ -28.87	PASS
802.11n(HT20)	2412	4.24	-30.75	≤ -25.76	PASS
	2462	4.00	-45.99	≤ -26.00	PASS
802.11n(HT40)	2422	0.67	-33.10	≤ -29.33	PASS
	2452	0.13	-36.55	≤ -29.87	PASS
802.11ax(HE20)	2412	3.87	-31.34	≤ -26.13	PASS
	2462	1.76	-45.08	≤ -28.24	PASS
802.11ax(HE40)	2422	1.81	-32.57	≤ -28.19	PASS
	2452	-1.53	-43.10	≤ -31.53	PASS




802.11b_Low_2412

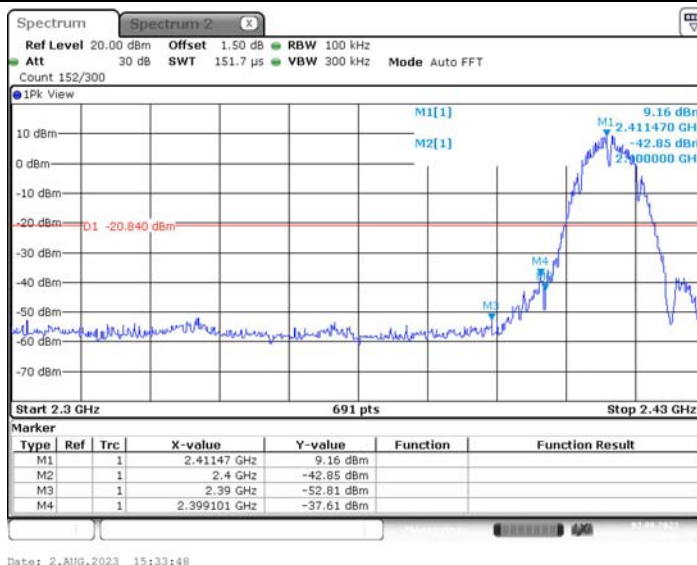

802.11b_High_2462

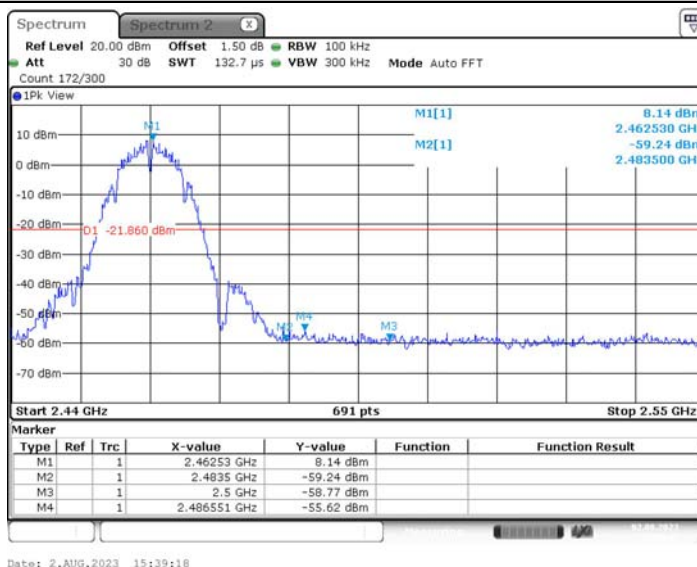

802.11g_Low_2412

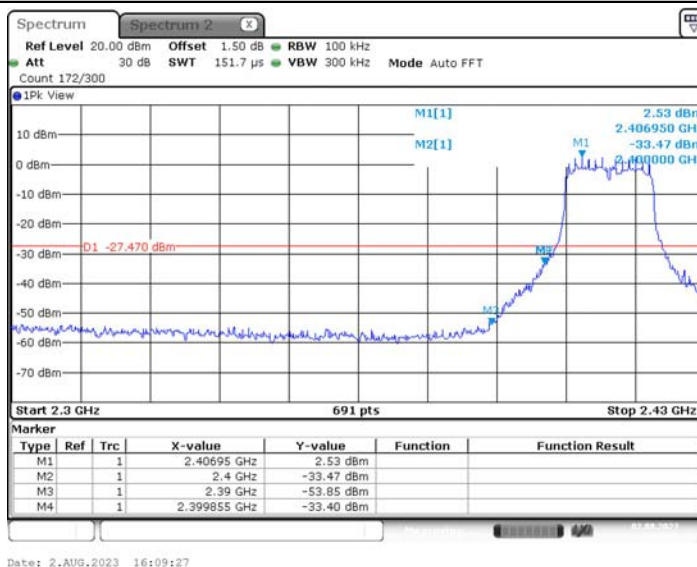

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of ChinaFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




802.11g_High_2462

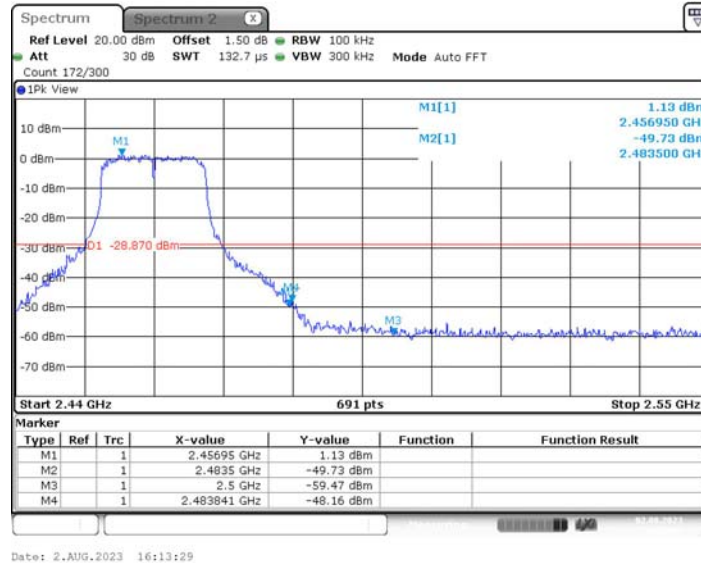

802.11n(HT20)_Low_2412

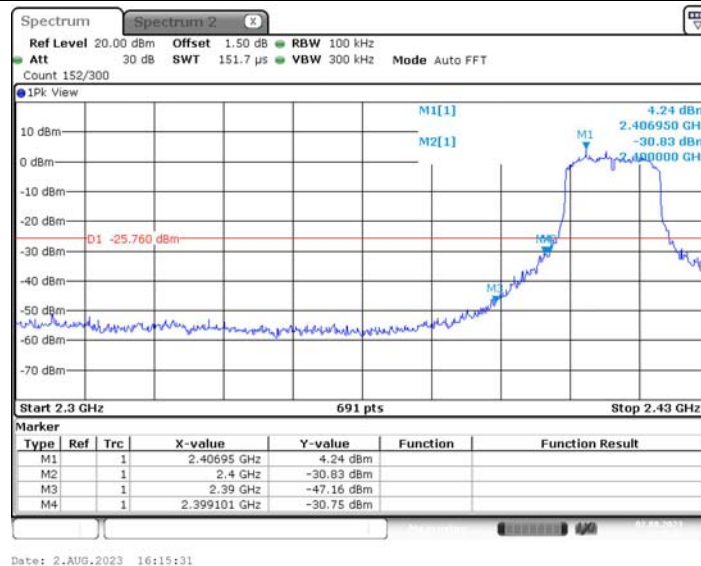

802.11n(HT20)_High_2462

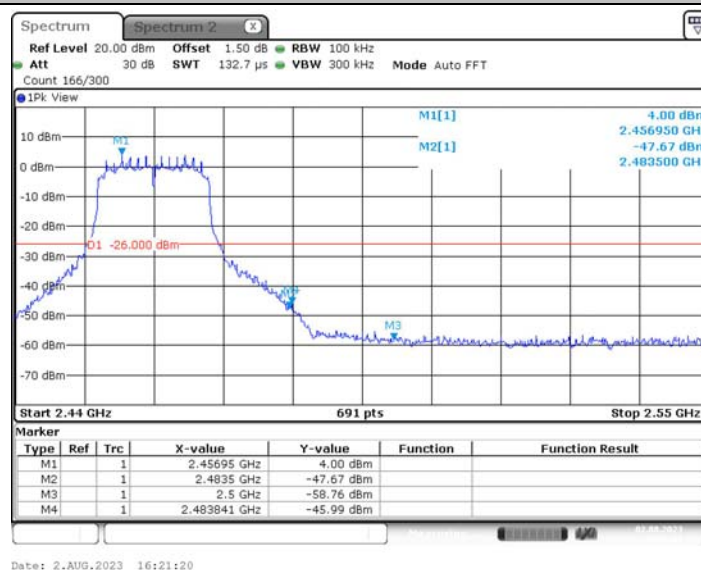


CTC Laboratories, Inc.


1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




802.11n(HT40)_Low_2422

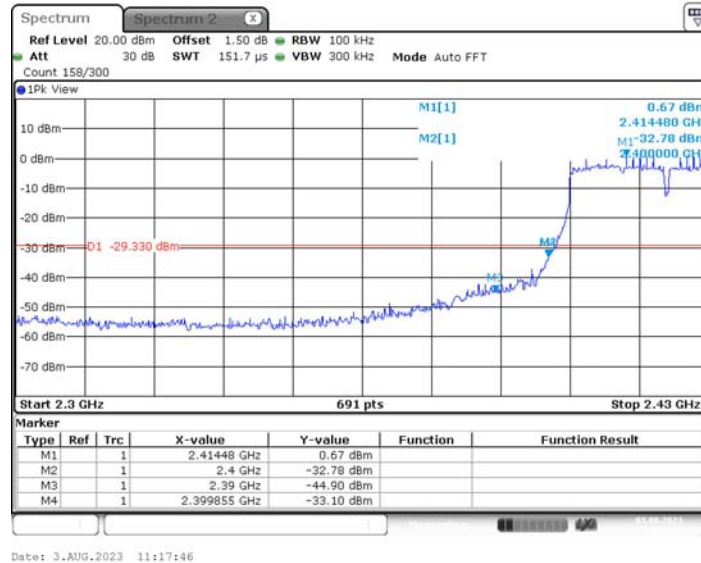

802.11n(HT40)_High_2452

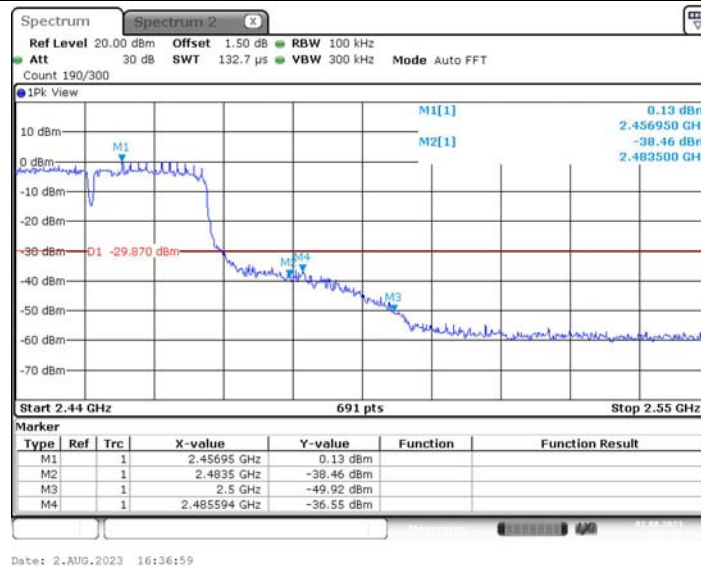

802.11ax(HE20)_Low_2412

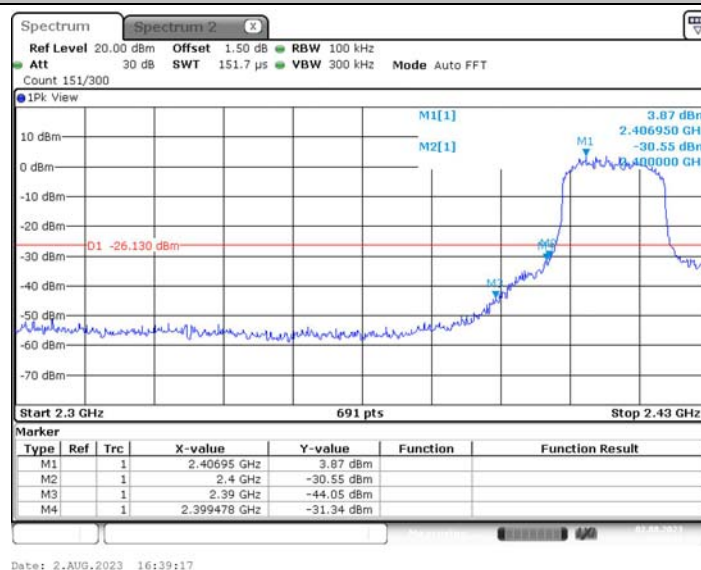

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




802.11ax(HE20)_High_2462

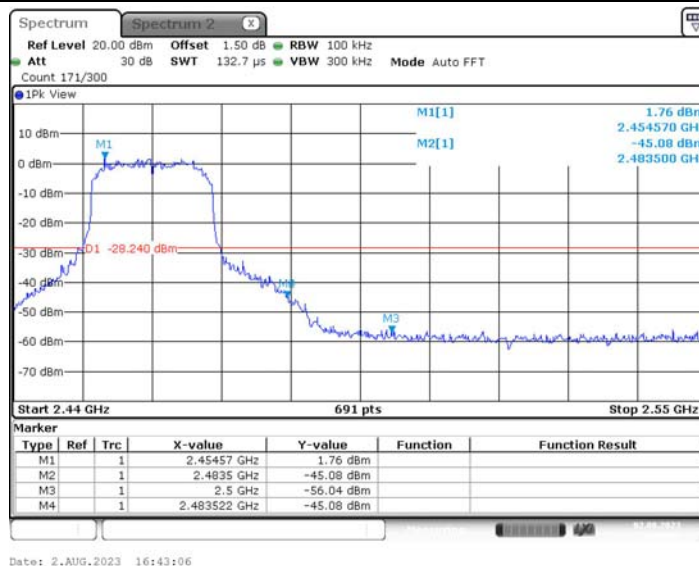

802.11ax(HE40)_Low_2422

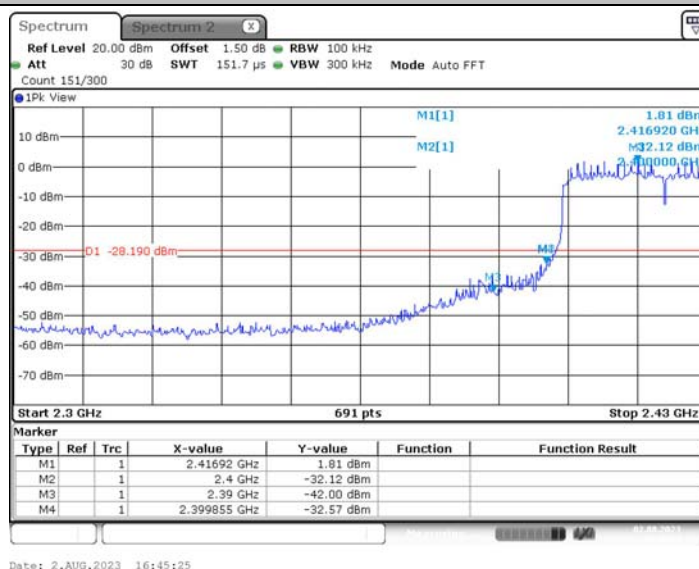

802.11ax(HE40)_High_2452

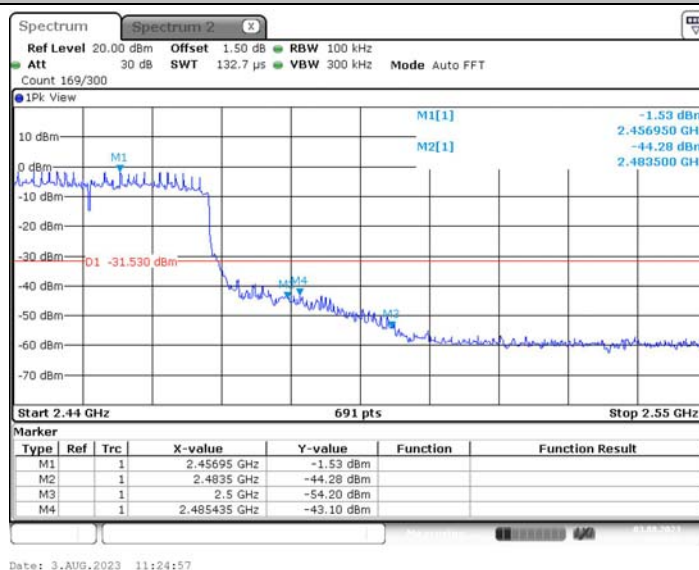

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cnFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn



(2) Conducted Spurious Emissions Test

Test Mode	Channel	Freq Range [Mhz]	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
802.11b	2412	Reference	9.22	9.22	---	PASS
		30~1000	9.22	-59.45	≤-20.78	PASS
		1000~26500	9.22	-45.53	≤-20.78	PASS
	2437	Reference	8.11	8.11	---	PASS
		30~1000	8.11	-59.17	≤-21.89	PASS
		1000~26500	8.11	-48.00	≤-21.89	PASS
	2462	Reference	8.09	8.09	---	PASS
		30~1000	8.09	-58.87	≤-21.91	PASS
		1000~26500	8.09	-47.89	≤-21.91	PASS
802.11g	2412	Reference	2.45	2.45	---	PASS
		30~1000	2.45	-59.02	≤-27.55	PASS
		1000~26500	2.45	-49.04	≤-27.55	PASS
	2437	Reference	5.04	5.04	---	PASS
		30~1000	5.04	-59.18	≤-24.96	PASS
		1000~26500	5.04	-49.11	≤-24.96	PASS
	2462	Reference	2.19	2.19	---	PASS
		30~1000	2.19	-58.78	≤-27.81	PASS
		1000~26500	2.19	-49.08	≤-27.81	PASS
802.11n(HT20)	2412	Reference	5.63	5.63	---	PASS
		30~1000	5.63	-59.36	≤-24.37	PASS
		1000~26500	5.63	-49.39	≤-24.37	PASS
	2437	Reference	1.60	1.60	---	PASS
		30~1000	1.60	-59.54	≤-28.4	PASS
		1000~26500	1.60	-49.24	≤-28.4	PASS
	2462	Reference	4.08	4.08	---	PASS
		30~1000	4.08	-58.15	≤-25.92	PASS
		1000~26500	4.08	-49.47	≤-25.92	PASS
802.11n(HT40)	2422	Reference	0.54	0.54	---	PASS
		30~1000	0.54	-59.04	≤-29.46	PASS
		1000~26500	0.54	-49.55	≤-29.46	PASS
	2437	Reference	0.96	0.96	---	PASS
		30~1000	0.96	-59.31	≤-29.04	PASS
		1000~26500	0.96	-48.97	≤-29.04	PASS
	2452	Reference	0.94	0.94	---	PASS
		30~1000	0.94	-59.64	≤-29.06	PASS
		1000~26500	0.94	-49.00	≤-29.06	PASS
802.11ax(HE20)	2412	Reference	6.02	6.02	---	PASS
		30~1000	6.02	-58.99	≤-23.98	PASS
		1000~26500	6.02	-49.63	≤-23.98	PASS
	2437	Reference	5.08	5.08	---	PASS
		30~1000	5.08	-59.10	≤-24.92	PASS

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of ChinaFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China: yz.cnca.cn




		1000~26500	5.08	-49.30	≤ -24.92	PASS
	2462	Reference	2.61	2.61	---	PASS
		30~1000	2.61	-58.38	≤ -27.39	PASS
		1000~26500	2.61	-48.71	≤ -27.39	PASS
802.11ax(HE40)	2422	Reference	1.39	1.39	---	PASS
		30~1000	1.39	-58.03	≤ -28.61	PASS
		1000~26500	1.39	-49.78	≤ -28.61	PASS
	2437	Reference	1.37	1.37	---	PASS
		30~1000	1.37	-58.77	≤ -28.63	PASS
		1000~26500	1.37	-48.54	≤ -28.63	PASS
	2452	Reference	-1.88	-1.88	---	PASS
		30~1000	-1.88	-59.29	≤ -31.88	PASS
		1000~26500	-1.88	-48.96	≤ -31.88	PASS




802.11b_2412_0~Reference

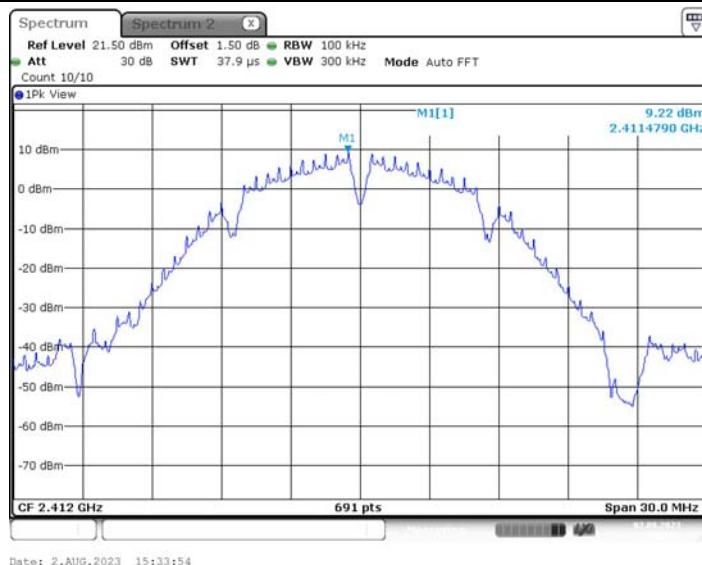

802.11b_2412_30~1000

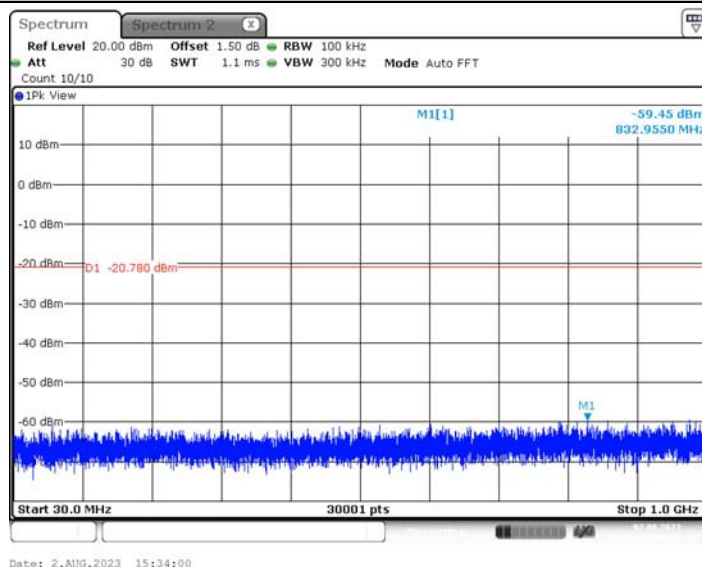

802.11b_2412_1000~26500

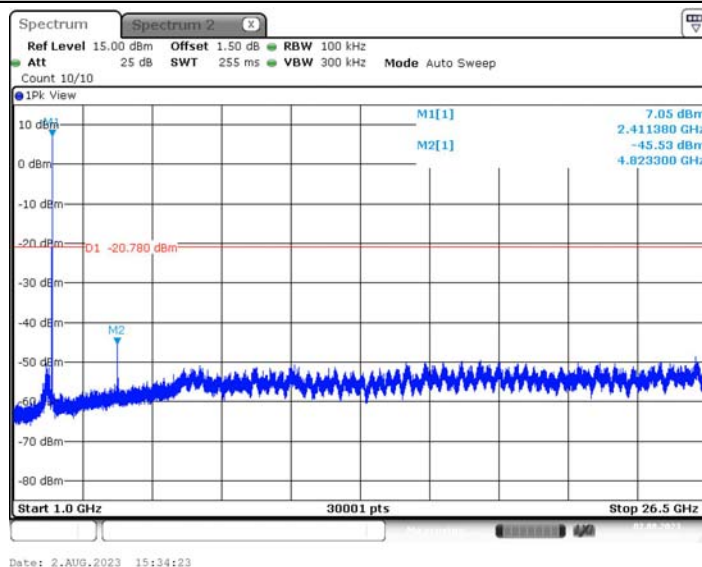

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11b_2437_0~Reference

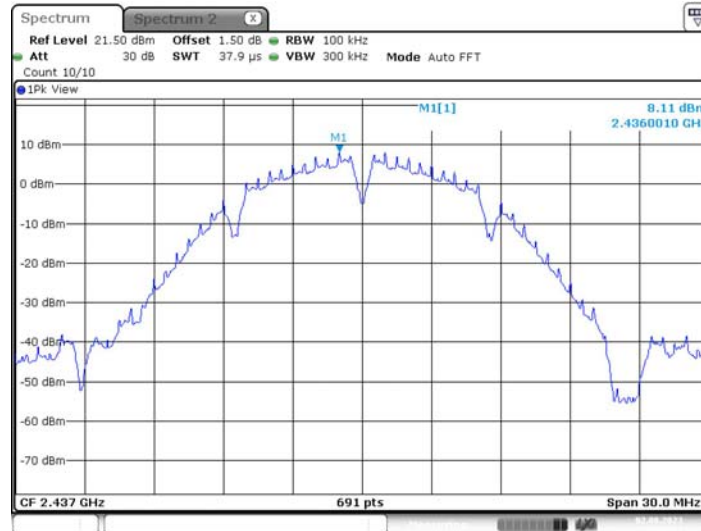


Date: 2.AUG.2023 15:37:10

802.11b_2437_30~1000

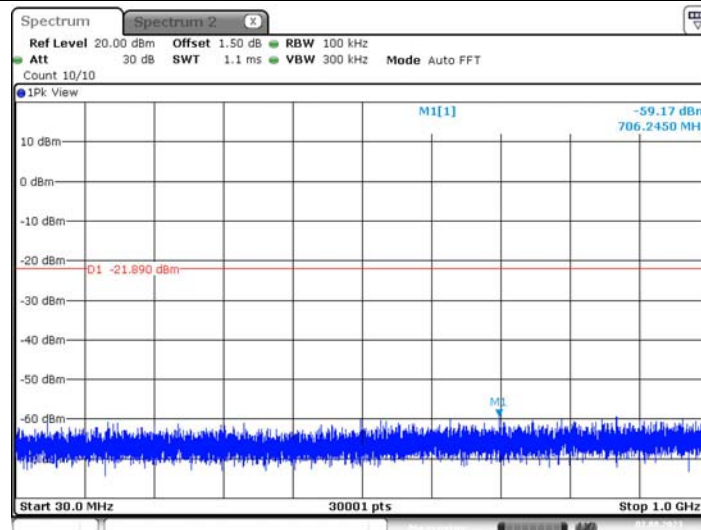

Date: 2.AUG.2023 15:37:16

802.11b_2437_1000~26500

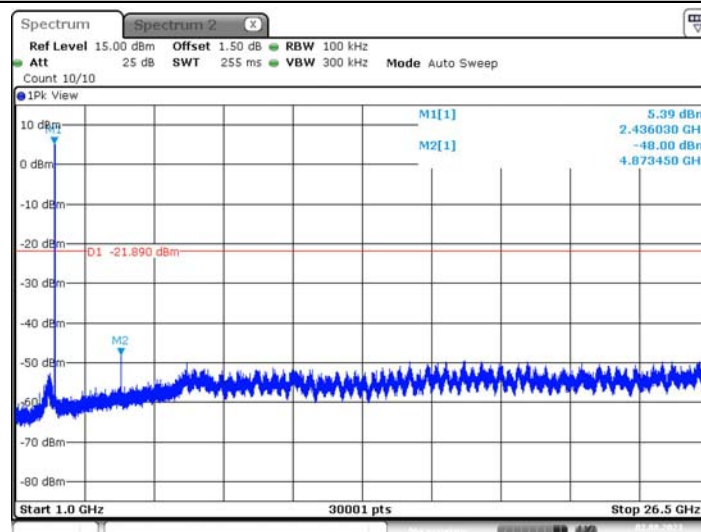

Date: 2.AUG.2023 15:37:39

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11b_2462_0~Reference



802.11b_2462_30~1000

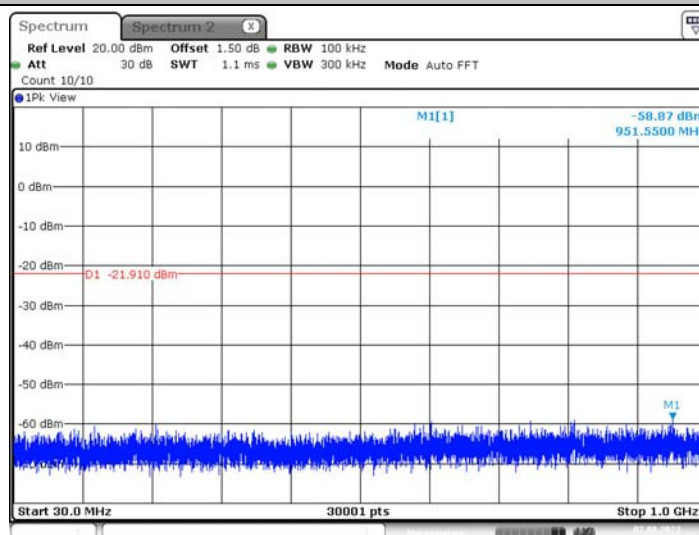

802.11b_2462_1000~26500

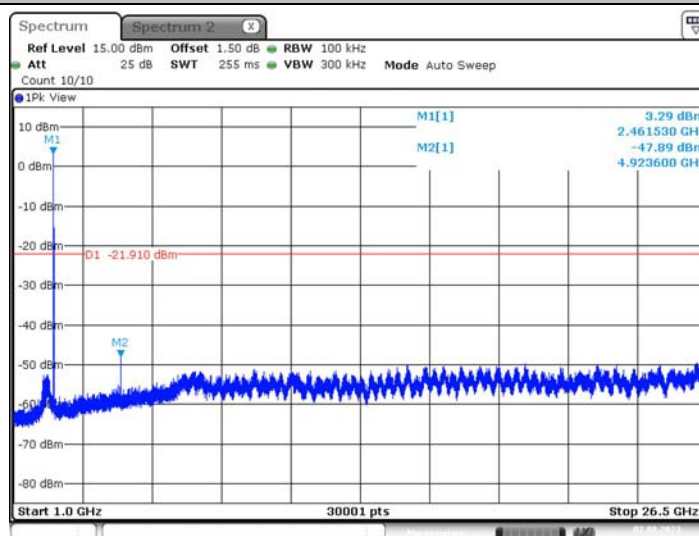

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11g_2412_0~Reference




Date: 2.AUG.2023 16:09:34

802.11g_2412_30~1000

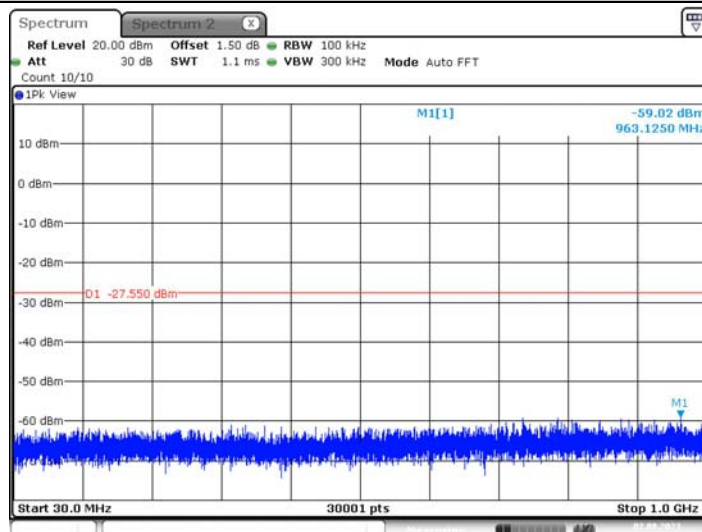

Date: 2.AUG.2023 16:09:40

802.11g_2412_1000~26500

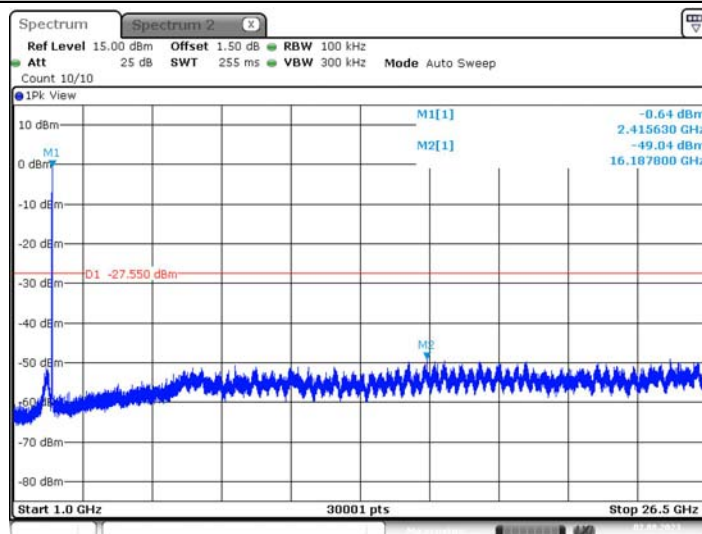

Date: 2.AUG.2023 16:10:03

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11g_2437_0~Reference

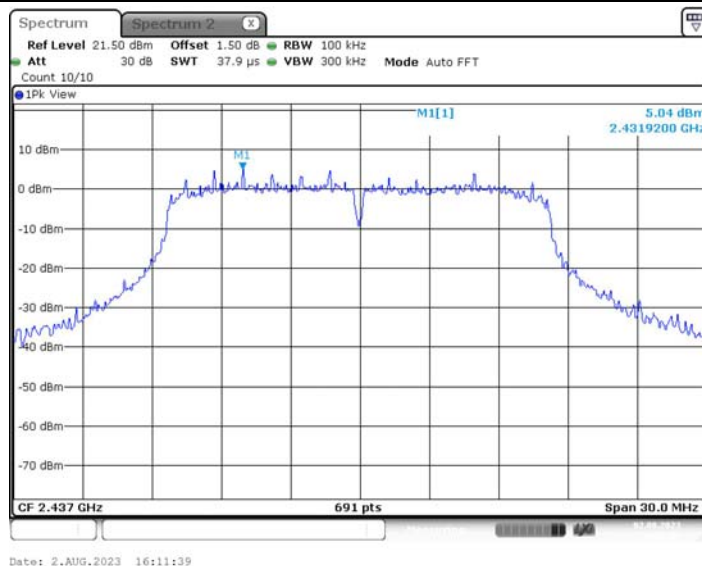

802.11g_2437_30~1000

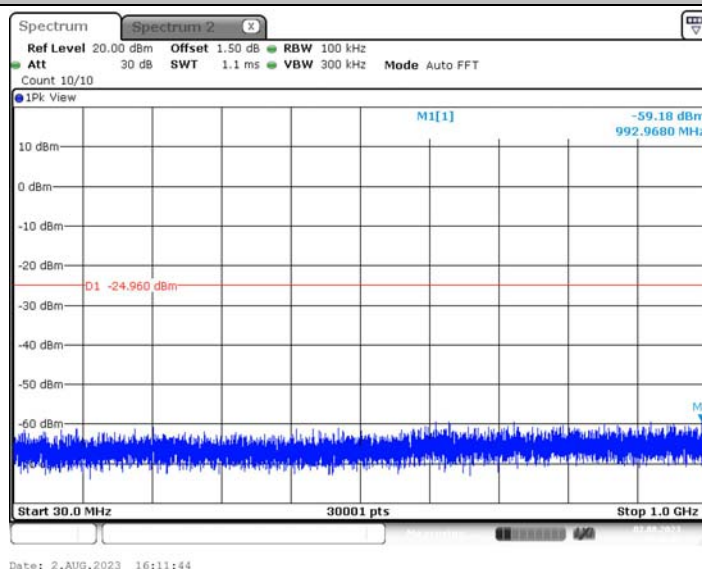

802.11g_2437_1000~26500

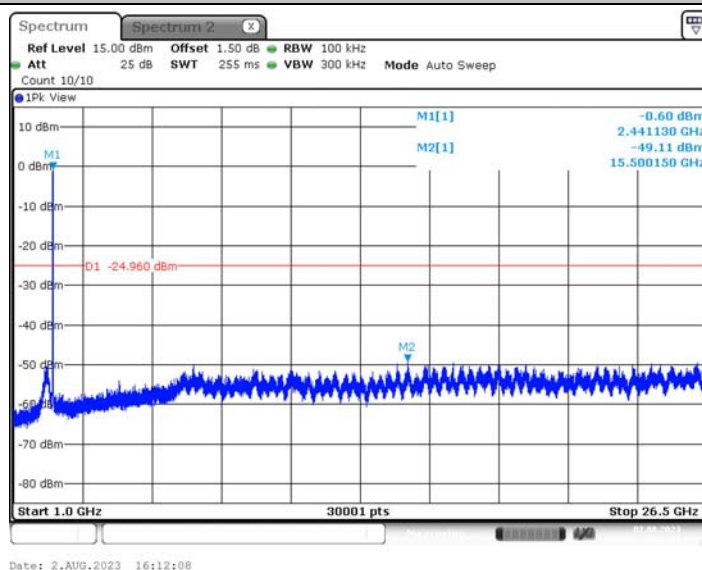

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of ChinaFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11g_2462_0~Reference




Date: 2.AUG.2023 16:13:36

802.11g_2462_30~1000

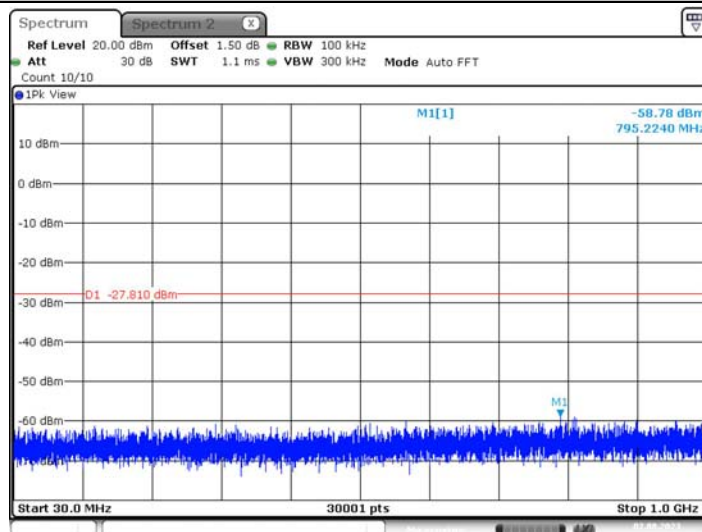

Date: 2.AUG.2023 16:13:41

802.11g_2462_1000~26500

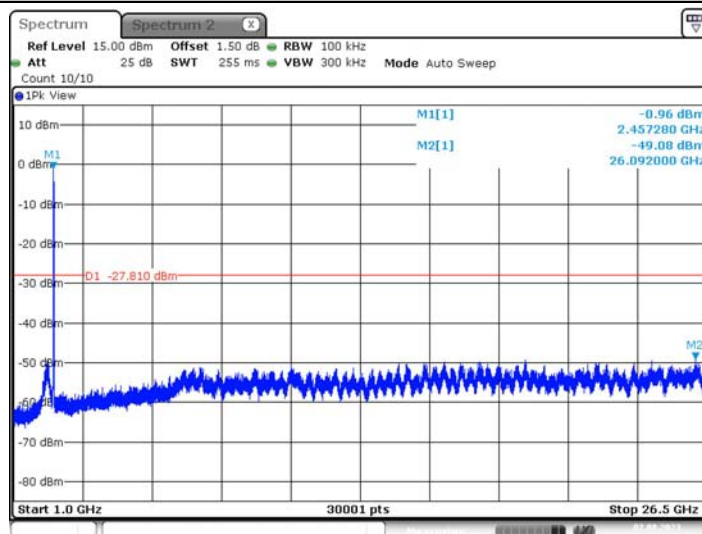

Date: 2.AUG.2023 16:14:04

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT20)_2412_0~Reference

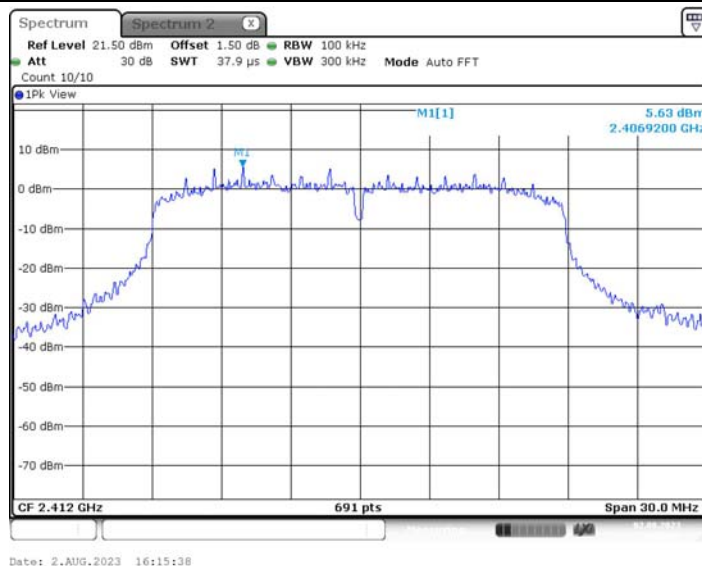


Date: 2.AUG.2023 16:15:38

802.11n(HT20)_2412_30~1000

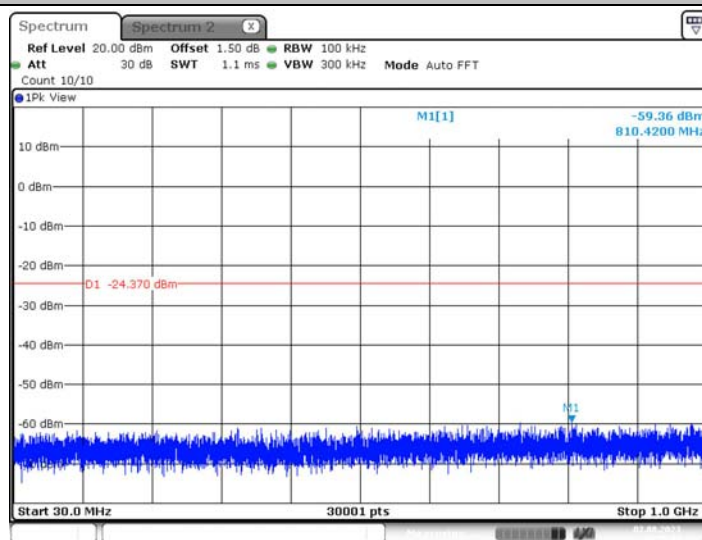

Date: 2.AUG.2023 16:15:43

802.11n(HT20)_2412_1000~26500

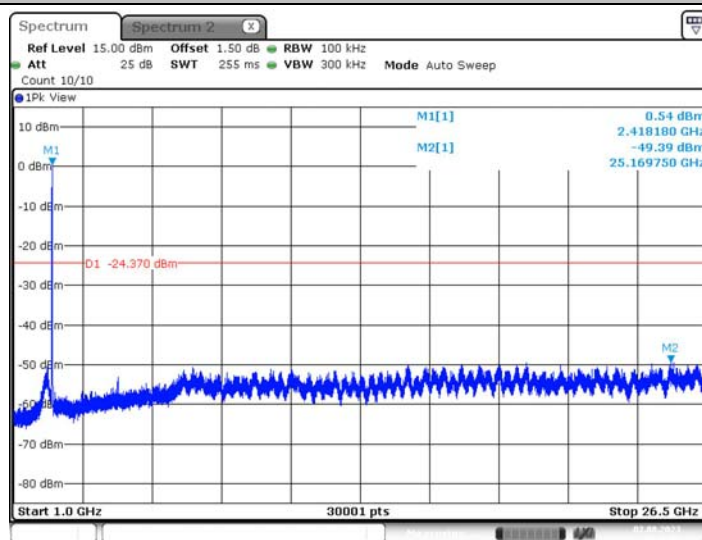

Date: 2.AUG.2023 16:16:07

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT20)_2437_0~Reference

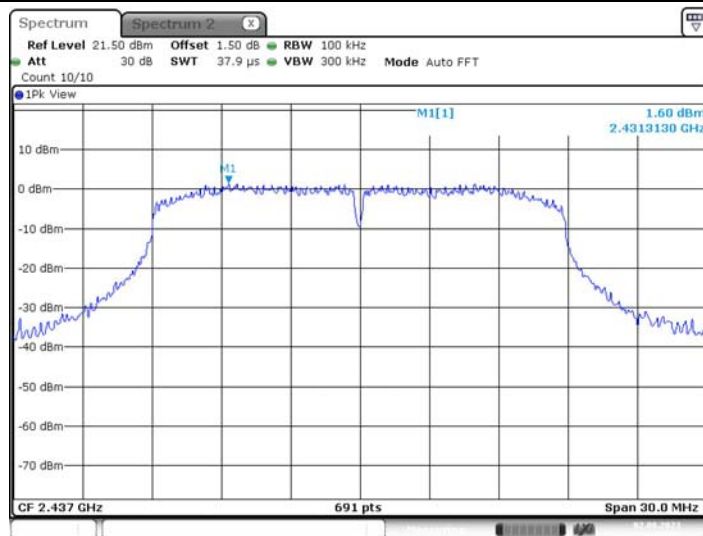

802.11n(HT20)_2437_30~1000

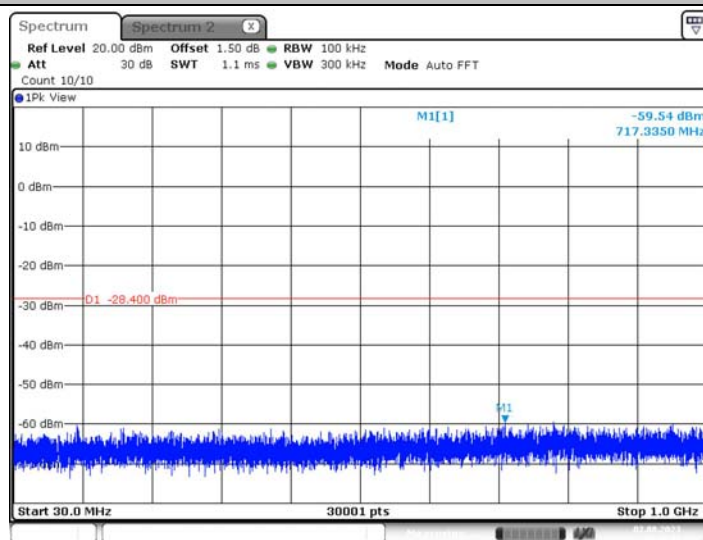

802.11n(HT20)_2437_1000~26500

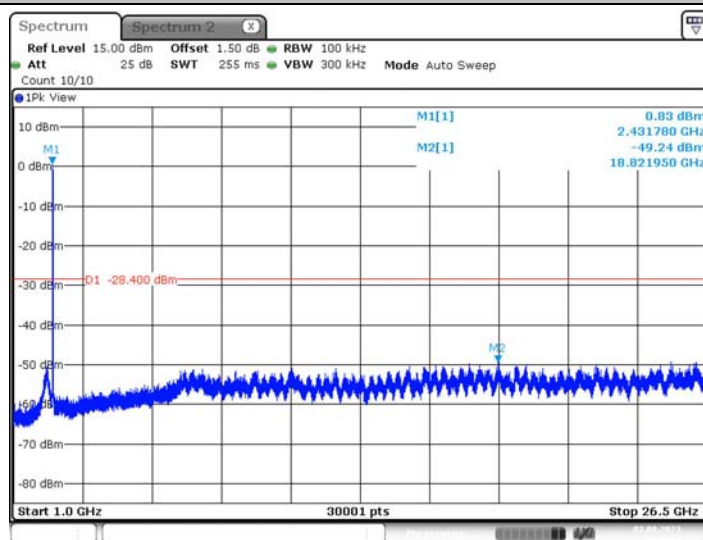

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT20)_2462_0~Reference

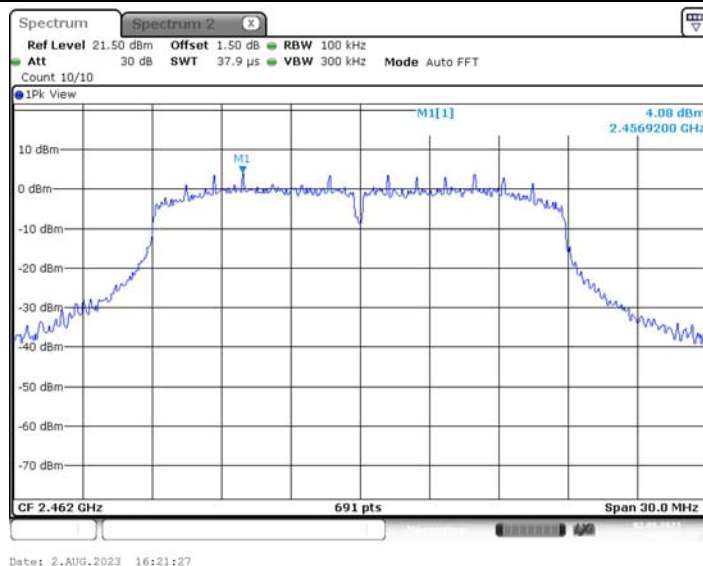

802.11n(HT20)_2462_30~1000

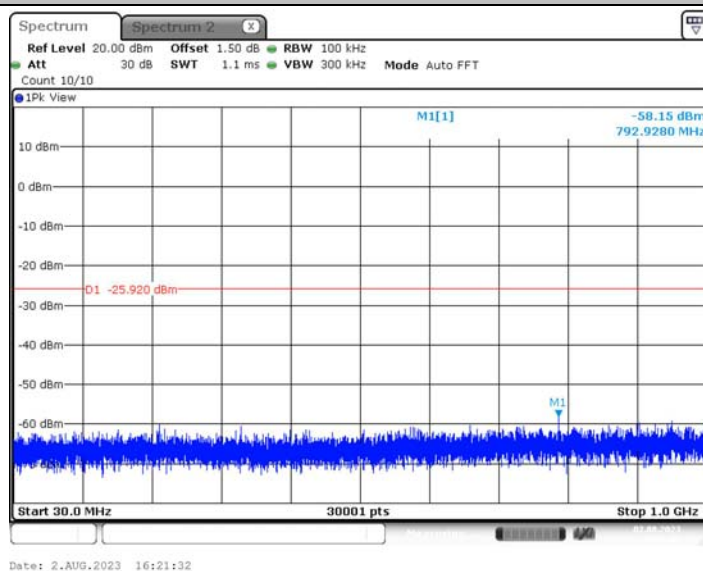

802.11n(HT20)_2462_1000~26500

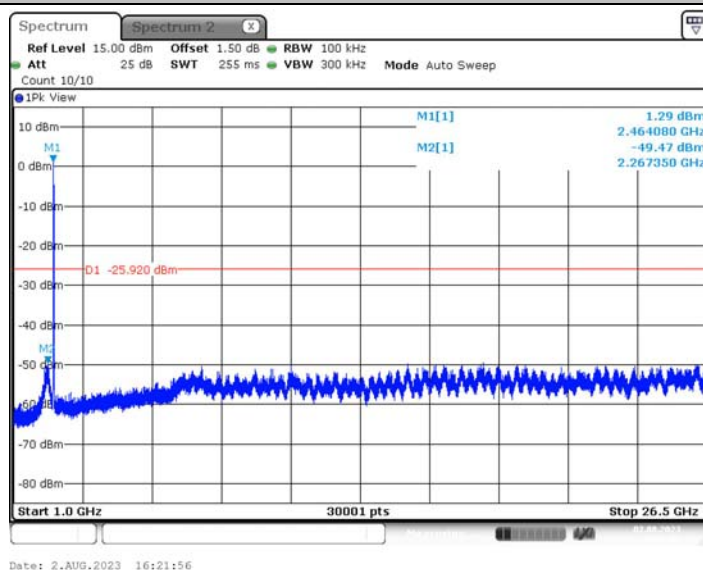

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT40)_2422_0~Reference

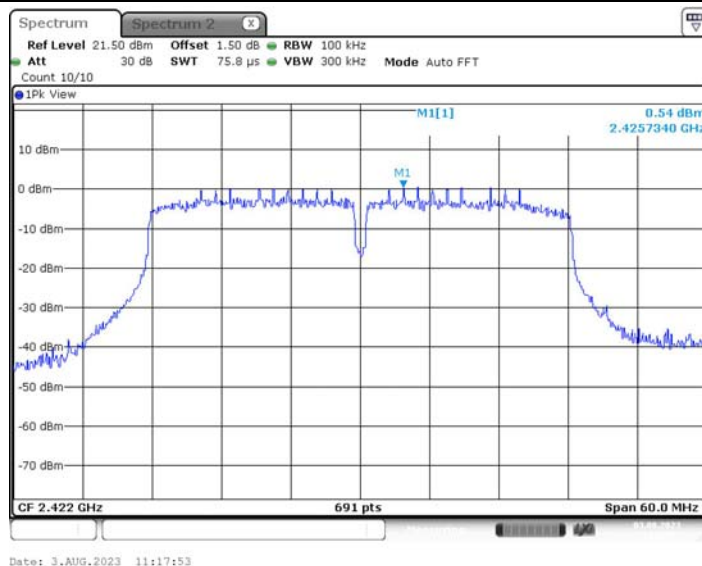

802.11n(HT40)_2422_30~1000

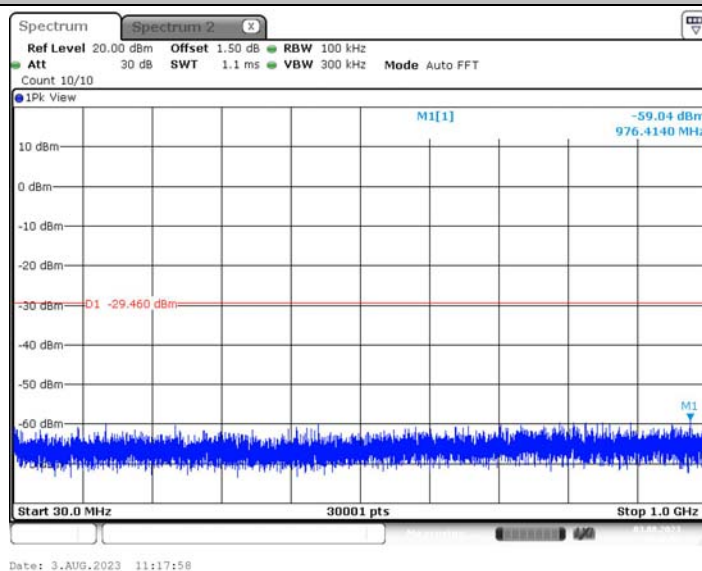

802.11n(HT40)_2422_1000~26500

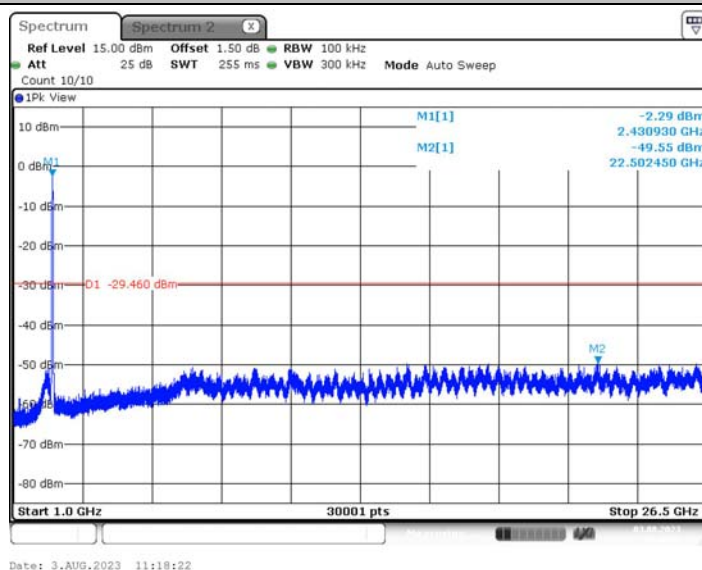

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT40)_2437_0~Reference

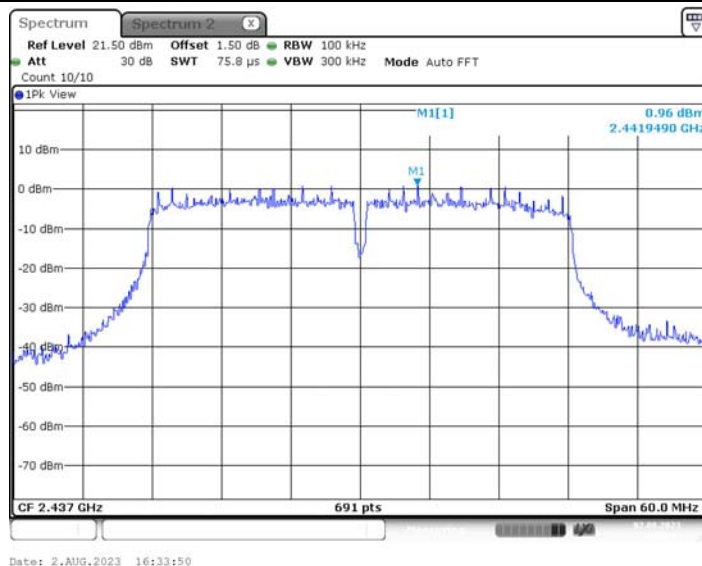

802.11n(HT40)_2437_30~1000

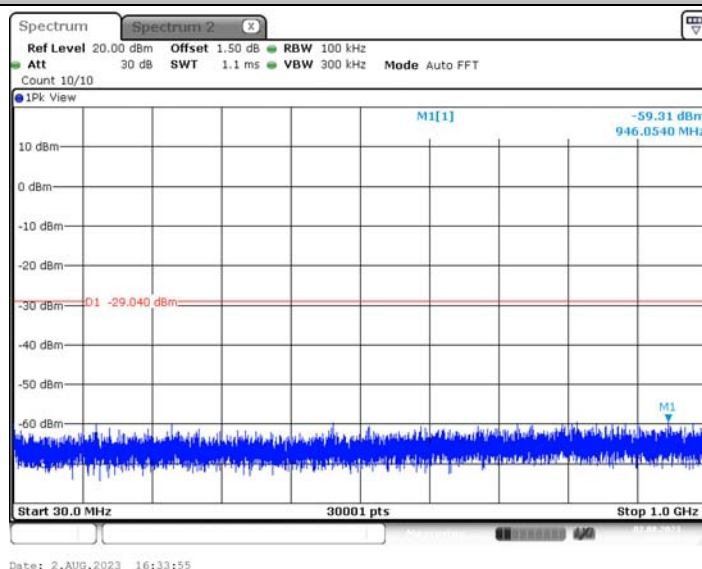

802.11n(HT40)_2437_1000~26500

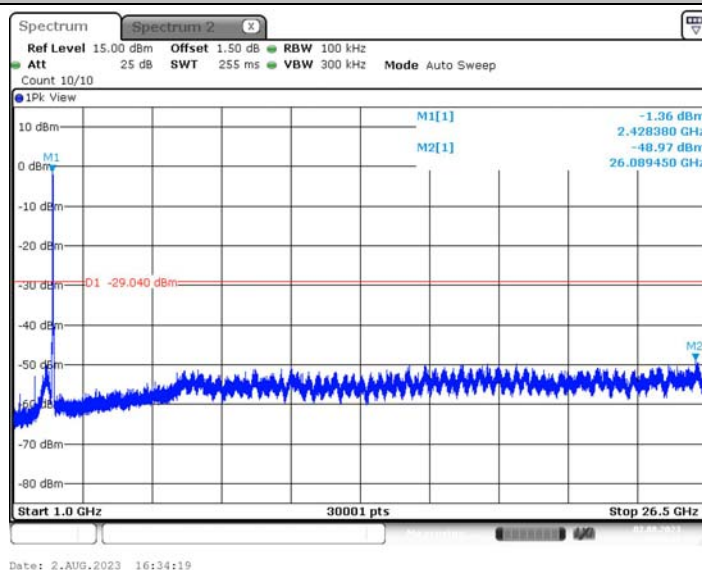

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of ChinaFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11n(HT40)_2452_0~Reference

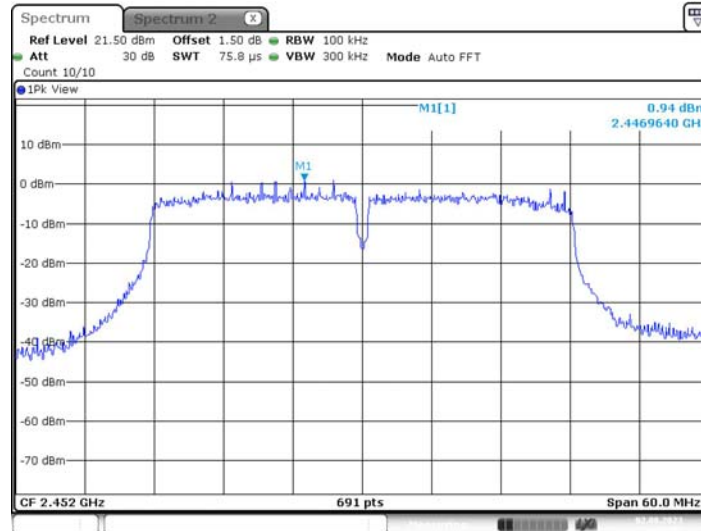


Date: 2.AUG.2023 16:37:05

802.11n(HT40)_2452_30~1000

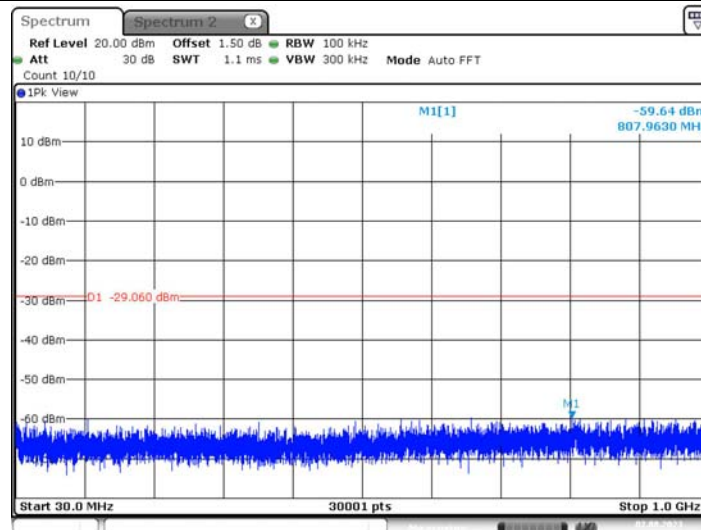

Date: 2.AUG.2023 16:37:11

802.11n(HT40)_2452_1000~26500

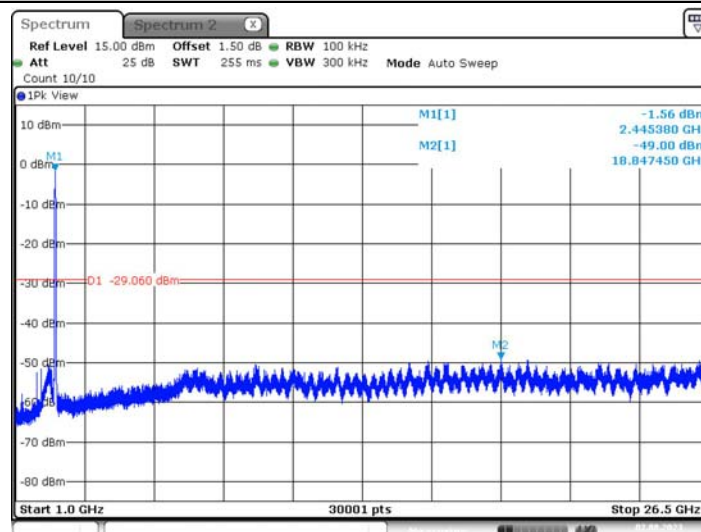

Date: 2.AUG.2023 16:37:34

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11ax(HE20)_2412_0~Reference

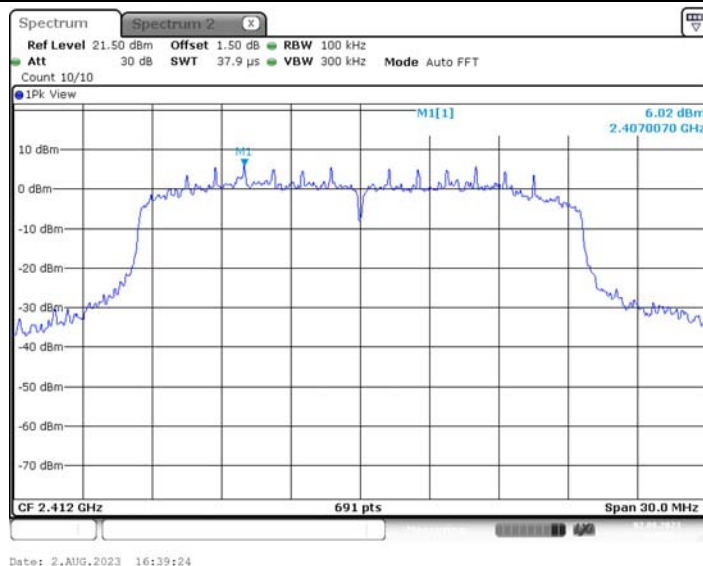

802.11ax(HE20)_2412_30~1000

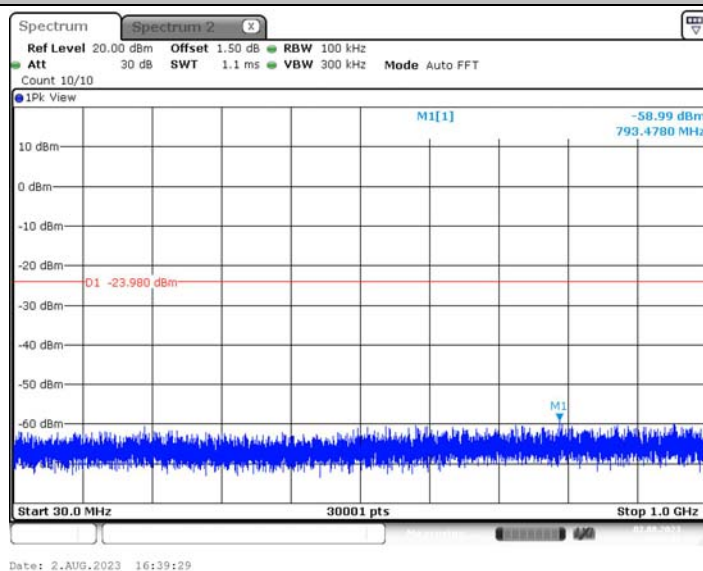

802.11ax(HE20)_2412_1000~26500

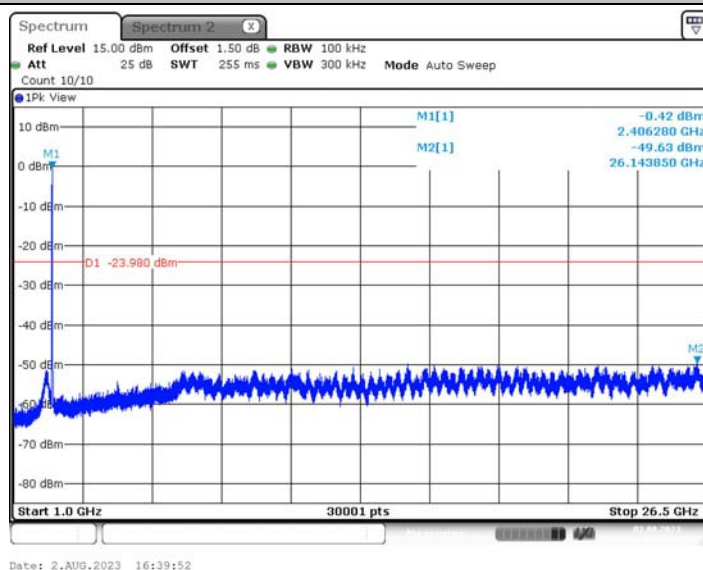

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


中国国家认证认可监督管理委员会
Certification and Accreditation Administration of the People's Republic of ChinaFor anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11ax(HE20)_2437_0~Reference

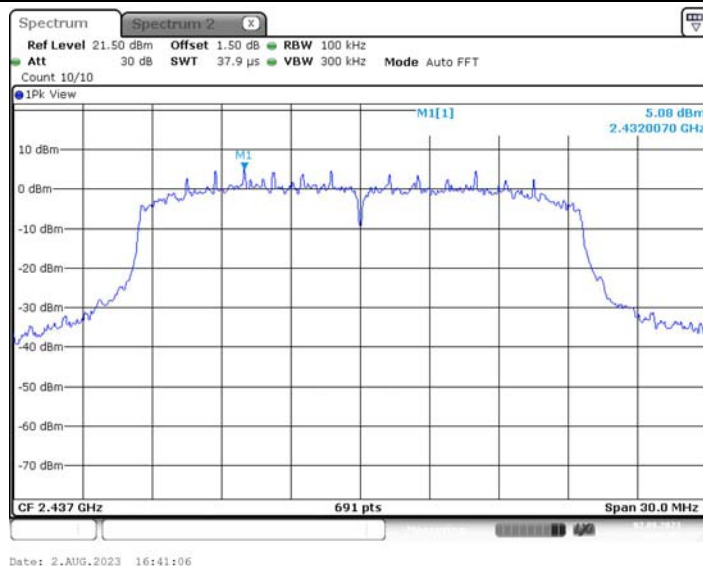

802.11ax(HE20)_2437_30~1000

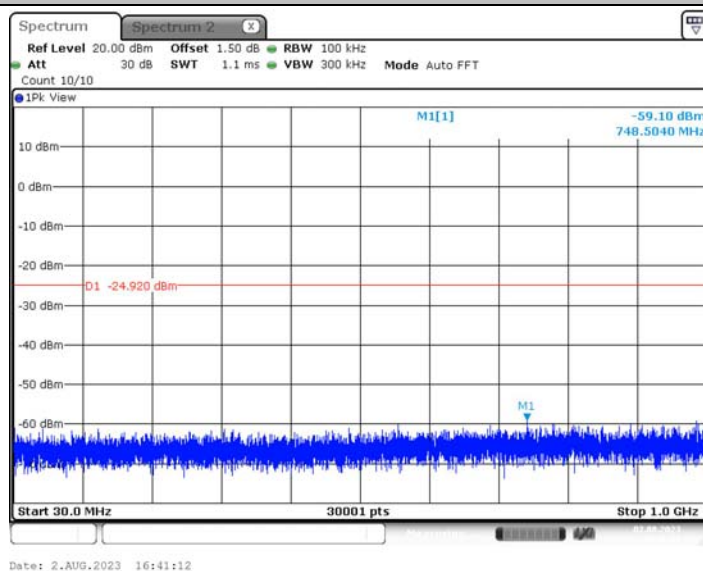

802.11ax(HE20)_2437_1000~26500

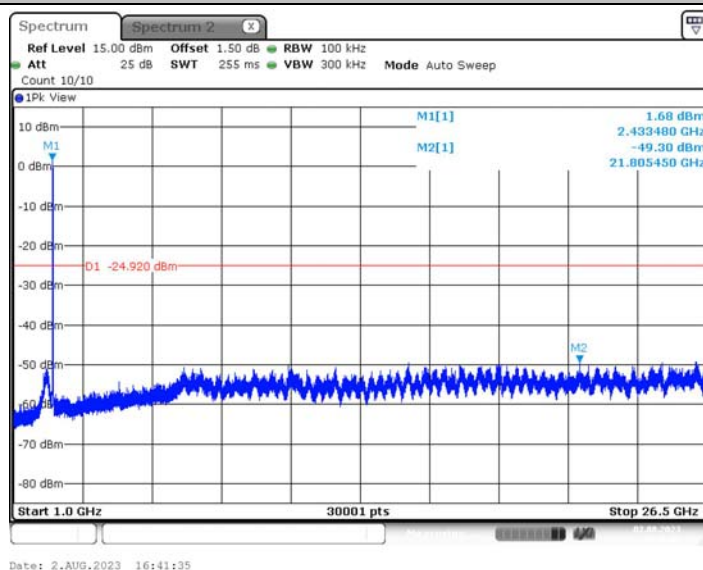

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059


Fax: (86)755-27521011

Http://www.sz-ctc.org.cn


For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn




802.11ax(HE20)_2462_0~Reference

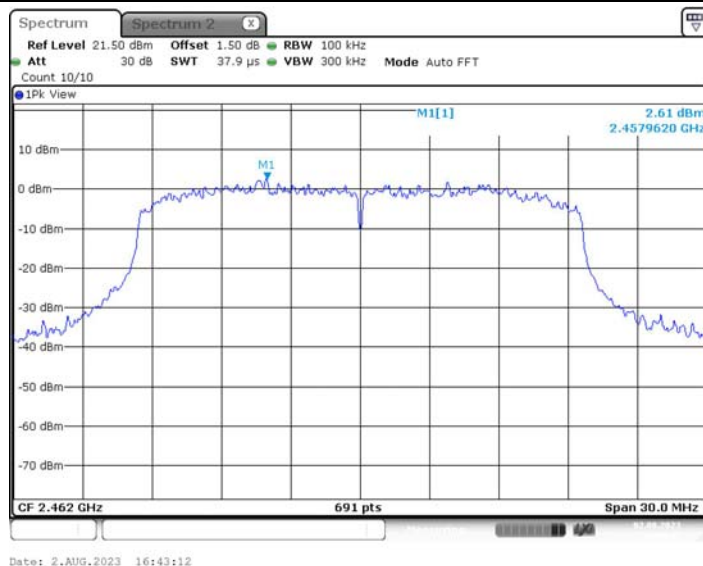

802.11ax(HE20)_2462_30~1000

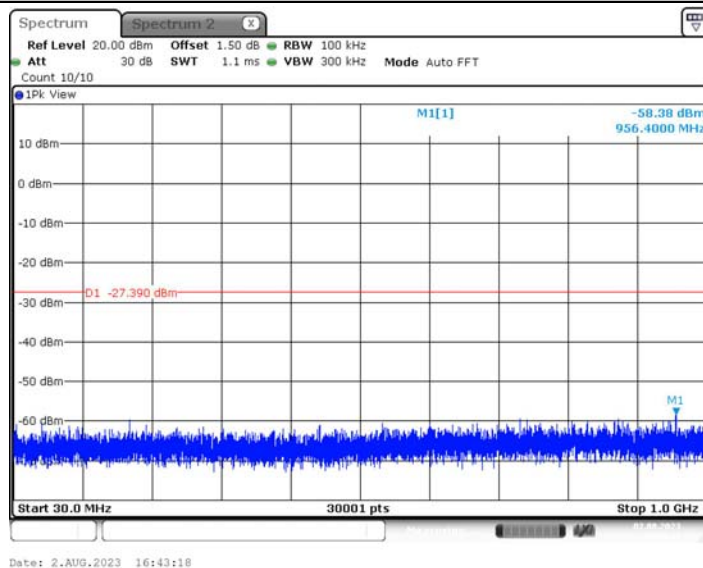

802.11ax(HE20)_2462_1000~26500

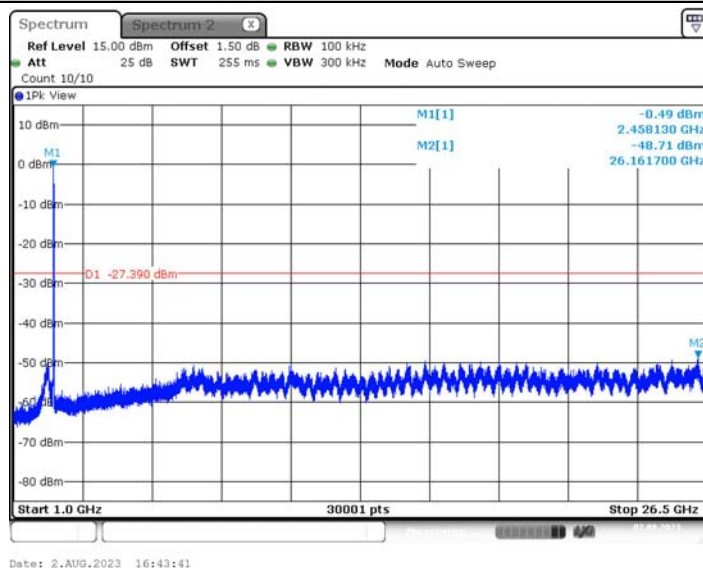

CTC Laboratories, Inc.

1-2/F., Building 2, Jiaquan Building, Guanlan High-Tech Park, Shenzhen, Guangdong, China

Tel.: (86)755-27521059

Fax: (86)755-27521011

Http://www.sz-ctc.org.cn

For anti-fake verification, please visit the official website of Certification and Accreditation Administration of the People's Republic of China : yz.cnca.cn