




FCC RADIO TEST REPORT

FCC ID : A4RGD2WG
Equipment : Wireless Device
Model Name : GD2WG
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, California, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Mar. 17, 2023 and testing was performed from Mar. 28, 2023 to Jul. 04, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	5
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements.....	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR330714C	01	Initial issue of report	Jun. 26, 2023
FR330714C	02	Revise Test Mode, Support Unit used in test configuration and system, List of Measuring Equipment and Appendix A This report is an updated version, replacing the report issued on Jun. 26, 2023.	Jul. 06, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	3.48 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	14.14 dB under the limit at 0.161 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Clio Lo

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	GD2WG
FCC ID	A4RGD2WG
EUT supports Radios application	WCDMA/HSPA/LTE WLAN 11b/g/n HT20 Bluetooth BR/EDR/LE

Remark: The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
232640500000026	RF Conducted Measurement
32251RUJWN0655	Radiated Spurious Emission
32251RUJWN068A	Conducted Emission

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b: 21.65 dBm (0.1462 W) 802.11g: 22.76 dBm (0.1888 W) 802.11n HT20: 22.71 dBm (0.1866 W)
99% Occupied Bandwidth	802.11b: 14.14 MHz 802.11g: 18.03 MHz 802.11n HT20: 19.03 MHz
Antenna Type / Gain	PIFA Antenna with gain -5.90 dBi
Type of Modulation	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane with Adapter as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		



2.2 Test Mode

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :Bluetooth Link + WLAN (2.4GHz) Link + Battery + USB Cable (Charging from Adapter)

Ch. #	2400-2483.5 MHz		
	802.11b	802.11g	802.11n HT20
Low	01	01	01
Middle	06	06	06
High	11	11	11


Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

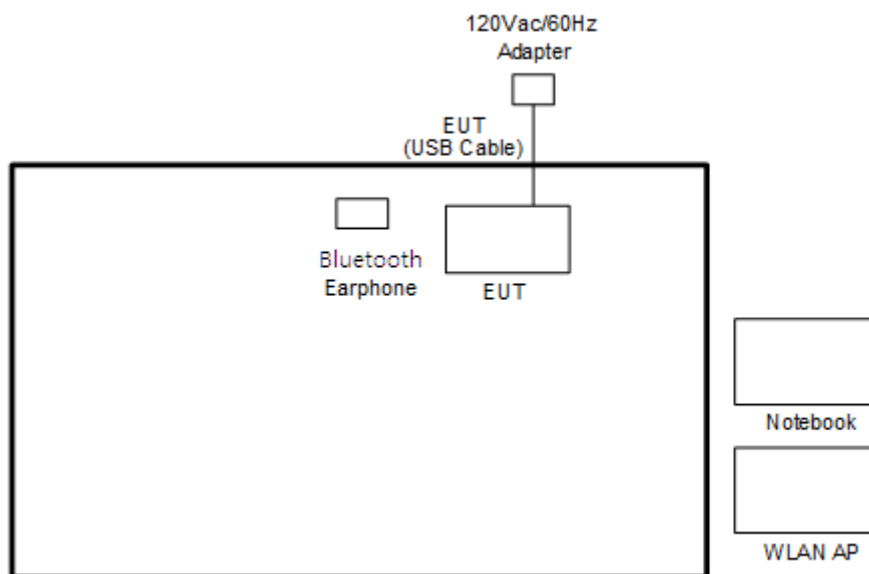

<WLAN Tx Mode>

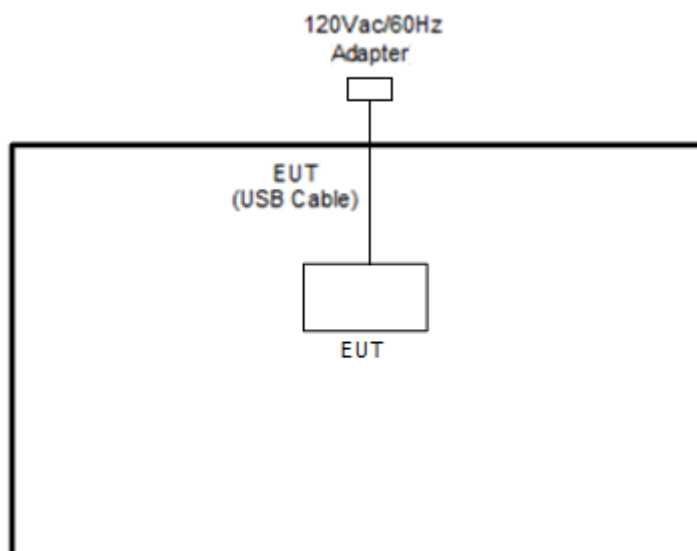

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	Google	G1000	N/A	N/A	N/A
2.	Bluetooth Earphone	Kinyo	BTE-3622	N/A	N/A	N/A
3.	WLAN AP	ASUS	RT-AC52	N/A	N/A	Unshielded, 1.8 m
4.	Notebook	Dell	P79G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	USB Cable	Google	GQ6H2	N/A	Unshielded, 0.98 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility "QRCT Version 4.0.00158.0" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

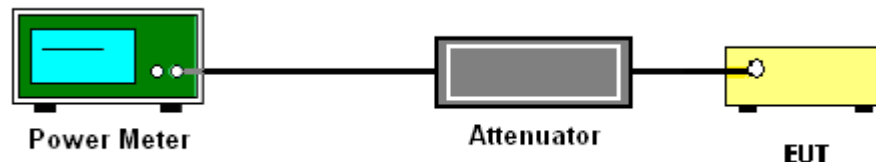

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

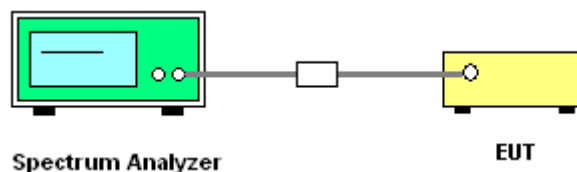

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

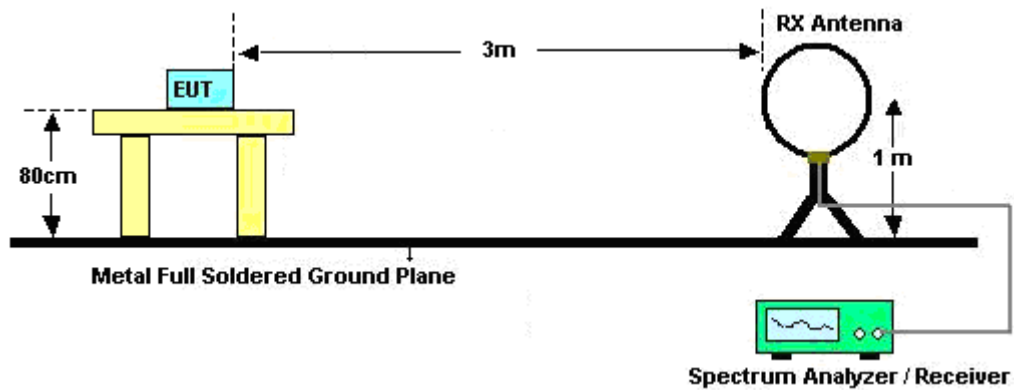


For radiated emissions from 30MHz to 1GHz

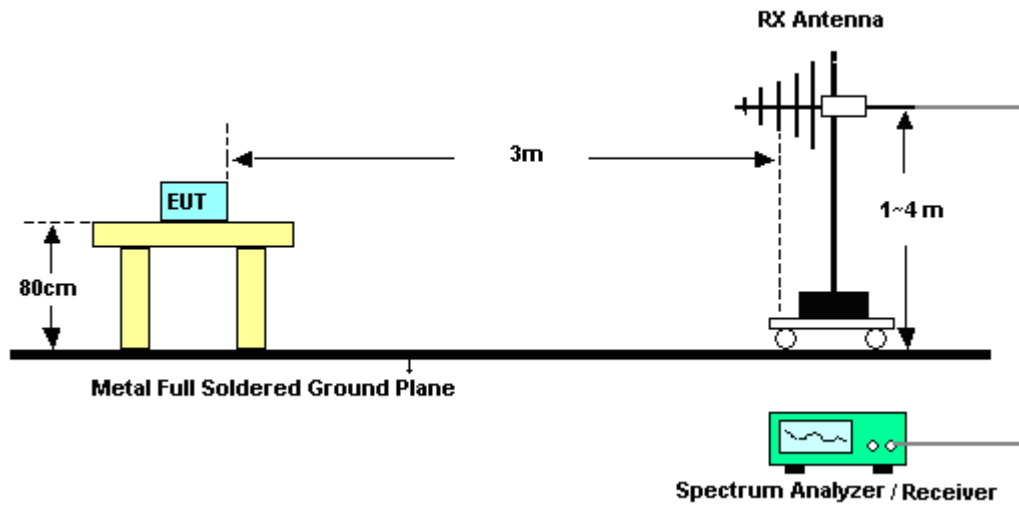

For radiated test from 1GHz to 18GHz

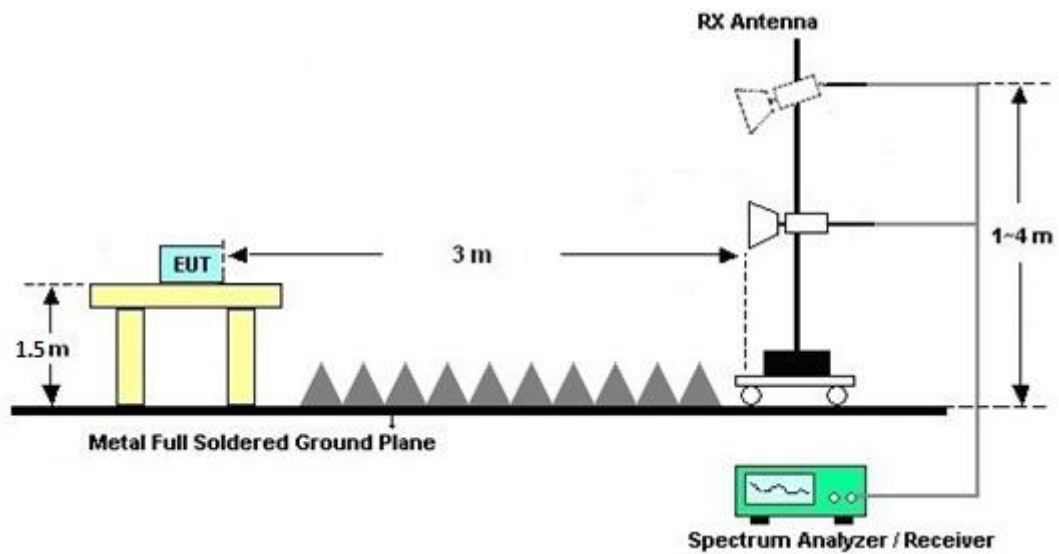

For radiated test above 18GHz

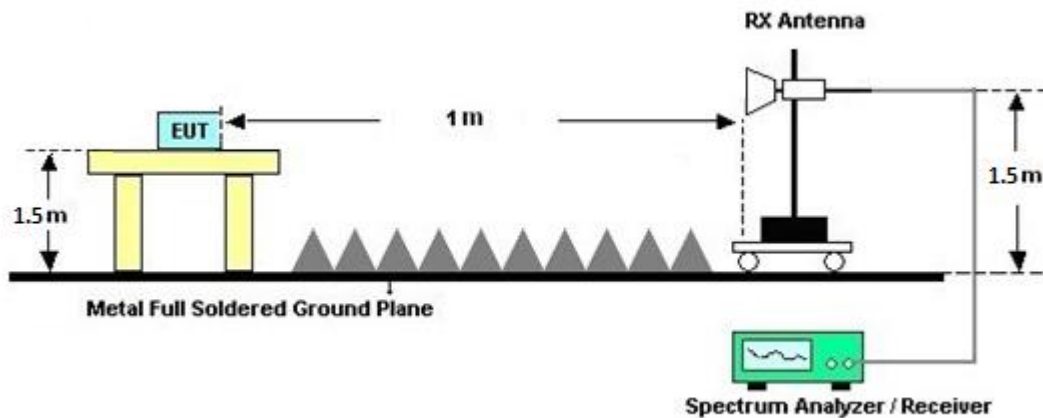

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

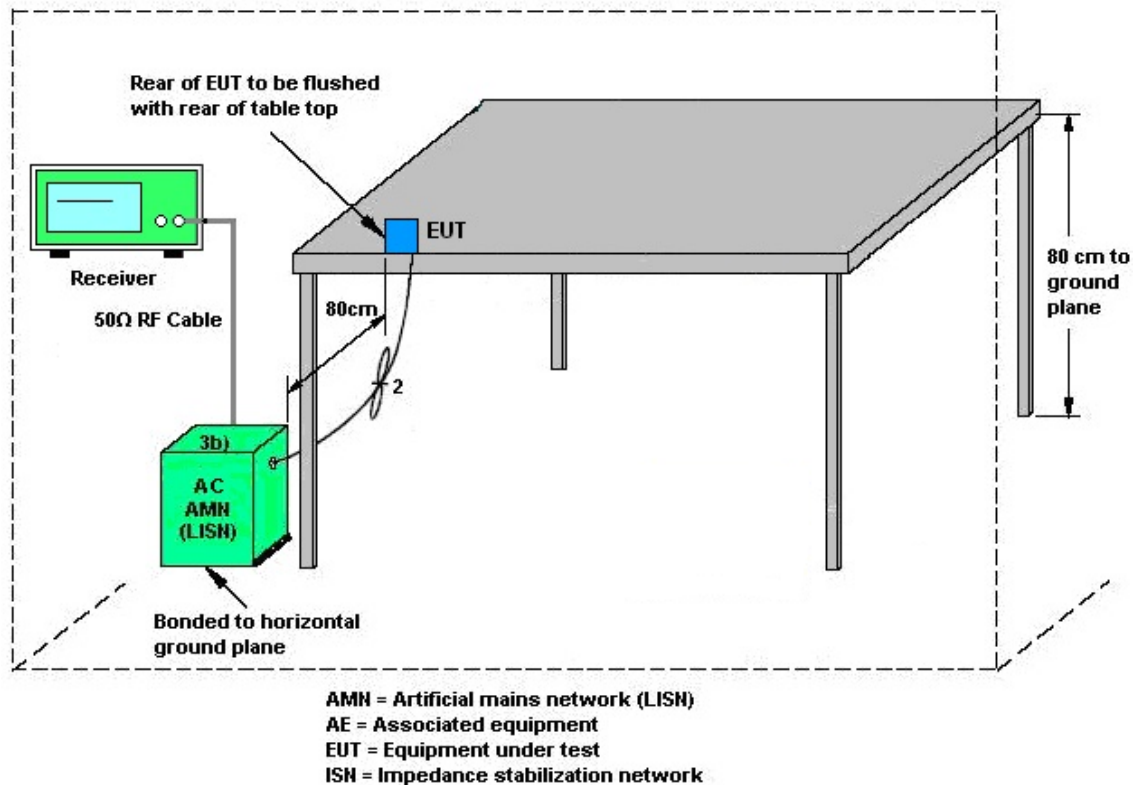

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY59053012	N/A	Nov. 18, 2022	Apr. 21, 2023~ May 04, 2023	Nov. 17, 2023	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60241058	N/A	Jul. 07, 2022	Apr. 21, 2023~ May 04, 2023	Jul. 06, 2023	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 02, 2023	Apr. 21, 2023~ May 04, 2023	Jan. 01, 2024	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45S E	980792	N/A	Nov. 14, 2022	Apr. 21, 2023~ May 04, 2023	Nov. 13, 2023	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 28, 2022	Apr. 21, 2023~ May 04, 2023	Jun. 27, 2023	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Apr. 21, 2023~ May 04, 2023	Sep. 19, 2023	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802 N1D01N-06	55606 & 08	30MHz~1GHz	Oct. 22, 2022	Apr. 21, 2023~ May 04, 2023	Oct. 21, 2023	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	02360	1GHz~18GHz	Nov. 04, 2022	Apr. 21, 2023~ May 04, 2023	Nov. 03, 2023	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	00994	18GHz-40GHz	Nov. 04, 2022	Apr. 21, 2023~ May 04, 2023	Nov. 03, 2023	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-302	SN3	N/A	Sep. 28, 2022	Apr. 21, 2023~ May 04, 2023	Sep. 27, 2023	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 18, 2023	Apr. 21, 2023~ May 04, 2023	Jan. 17, 2024	Radiation (03CH20-HY)
Software	Audix	E3 6.2009-8-24	RK-002156	N/A	N/A	Apr. 21, 2023~ May 04, 2023	N/A	Radiation (03CH20-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Apr. 21, 2023~ May 04, 2023	N/A	Radiation (03CH20-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Apr. 21, 2023~ May 04, 2023	N/A	Radiation (03CH20-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 21, 2023~ May 04, 2023	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Mar. 28, 2023	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Mar. 28, 2023	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBE CK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Nov. 01, 2022	Mar. 28, 2023	Oct. 31, 2023	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 15, 2023	Mar. 28, 2023	Mar. 14, 2024	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 05, 2023	Mar. 28, 2023	Mar. 04, 2024	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 13, 2023	Mar. 28, 2023	Mar. 12, 2024	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Oct. 06, 2022	Mar. 28, 2023	Oct. 05, 2023	Conduction (CO07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECEPIL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Mar. 29, 2023~ Jul. 04, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Mar. 29, 2023~ Jul. 04, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	932001	N/A	Sep. 26, 2022	Mar. 29, 2023~ Jul. 04, 2023	Sep. 25, 2023	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	846202	300MHz~40GHz	Sep. 26, 2022	Mar. 29, 2023~ Jul. 04, 2023	Sep. 25, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Aug. 03, 2022	Mar. 29, 2023~ Jul. 04, 2023	Aug. 02, 2023	Conducted (TH05-HY)
Power Divider	Woken	2Way SMA Divider	DCMB1KW7A 1	0.5~18GHz	Jan. 26, 2023	Mar. 29, 2023~ Jul. 04, 2023	Jan. 25, 2024	Conducted (TH05-HY)
RF Cable	EM Electronics	SS402_1M	#29	0.5~18GHz	Jan. 26, 2023	Mar. 29, 2023~ Jul. 04, 2023	Jan. 25, 2024	Conducted (TH05-HY)
RF Cable	EM Electronics	SS402_1M	#30	0.5~18GHz	Jan. 26, 2023	Mar. 29, 2023~ Jul. 04, 2023	Jan. 25, 2024	Conducted (TH05-HY)
Attenuator	Woken	20dB 18GHz_5W	#1	0.5~18GHz	Jan. 26, 2023	Mar. 29, 2023~ Jul. 04, 2023	Jan. 25, 2024	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.46 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.30 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.80 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.40 dB
--	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang, Hank Hsu and Junyu Jhou	Temperature:	21~25	°C
Test Date:	2023/3/29 ~ 2023/7/4	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	13.99	-	9.08	-	0.50	Pass
11b	1Mbps	1	6	2437	13.84	-	8.60	-	0.50	Pass
11b	1Mbps	1	11	2462	13.89	-	8.12	-	0.50	Pass
11g	6Mbps	1	1	2412	17.13	-	16.36	-	0.50	Pass
11g	6Mbps	1	6	2437	16.98	-	16.36	-	0.50	Pass
11g	6Mbps	1	11	2462	16.88	-	16.10	-	0.50	Pass
HT20	MCS0	1	1	2412	18.18	-	17.60	-	0.50	Pass
HT20	MCS0	1	6	2437	17.98	-	16.94	-	0.50	Pass
HT20	MCS0	1	11	2462	17.93	-	16.86	-	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	20.91	-		30.00	-	-5.90	-	15.01	-	36.00	-	Pass
11b	1Mbps	1	6	2437	21.38	-		30.00	-	-5.90	-	15.48	-	36.00	-	Pass
11b	1Mbps	1	11	2462	21.65	-		30.00	-	-5.90	-	15.75	-	36.00	-	Pass
11g	6Mbps	1	1	2412	22.60	-		30.00	-	-5.90	-	16.70	-	36.00	-	Pass
11g	6Mbps	1	6	2437	22.76	-		30.00	-	-5.90	-	16.86	-	36.00	-	Pass
11g	6Mbps	1	11	2462	21.43	-		30.00	-	-5.90	-	15.53	-	36.00	-	Pass
HT20	MCS0	1	1	2412	22.41	-		30.00	-	-5.90	-	16.51	-	36.00	-	Pass
HT20	MCS0	1	6	2437	22.71	-		30.00	-	-5.90	-	16.81	-	36.00	-	Pass
HT20	MCS0	1	11	2462	21.51	-		30.00	-	-5.90	-	15.61	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Average Output Power
(Reporting Only)

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	18.90	-		30.00	-	-5.90	-	13.00	-	36.00	-	Pass
11b	1Mbps	1	6	2437	19.40	-		30.00	-	-5.90	-	13.50	-	36.00	-	Pass
11b	1Mbps	1	11	2462	19.50	-		30.00	-	-5.90	-	13.60	-	36.00	-	Pass
11g	6Mbps	1	1	2412	18.50	-		30.00	-	-5.90	-	12.60	-	36.00	-	Pass
11g	6Mbps	1	6	2437	18.70	-		30.00	-	-5.90	-	12.80	-	36.00	-	Pass
11g	6Mbps	1	11	2462	17.40	-		30.00	-	-5.90	-	11.50	-	36.00	-	Pass
HT20	MCS0	1	1	2412	18.60	-		30.00	-	-5.90	-	12.70	-	36.00	-	Pass
HT20	MCS0	1	6	2437	18.70	-		30.00	-	-5.90	-	12.80	-	36.00	-	Pass
HT20	MCS0	1	11	2462	17.00	-		30.00	-	-5.90	-	11.10	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-3.13	-		-5.90	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-2.67	-		-5.90	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-2.94	-		-5.90	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-7.14	-		-5.90	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-6.35	-		-5.90	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-9.17	-		-5.90	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-6.87	-		-5.90	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-7.40	-		-5.90	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-8.10	-		-5.90	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.


6dB and 99% Occupied Bandwidth

<802.11b>

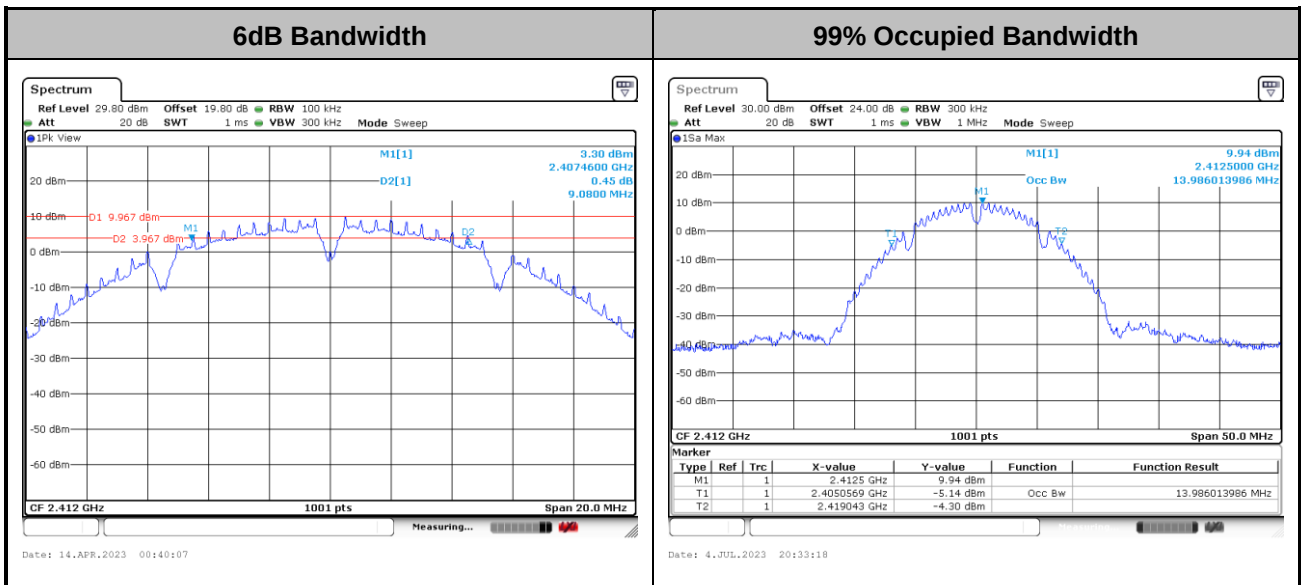

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

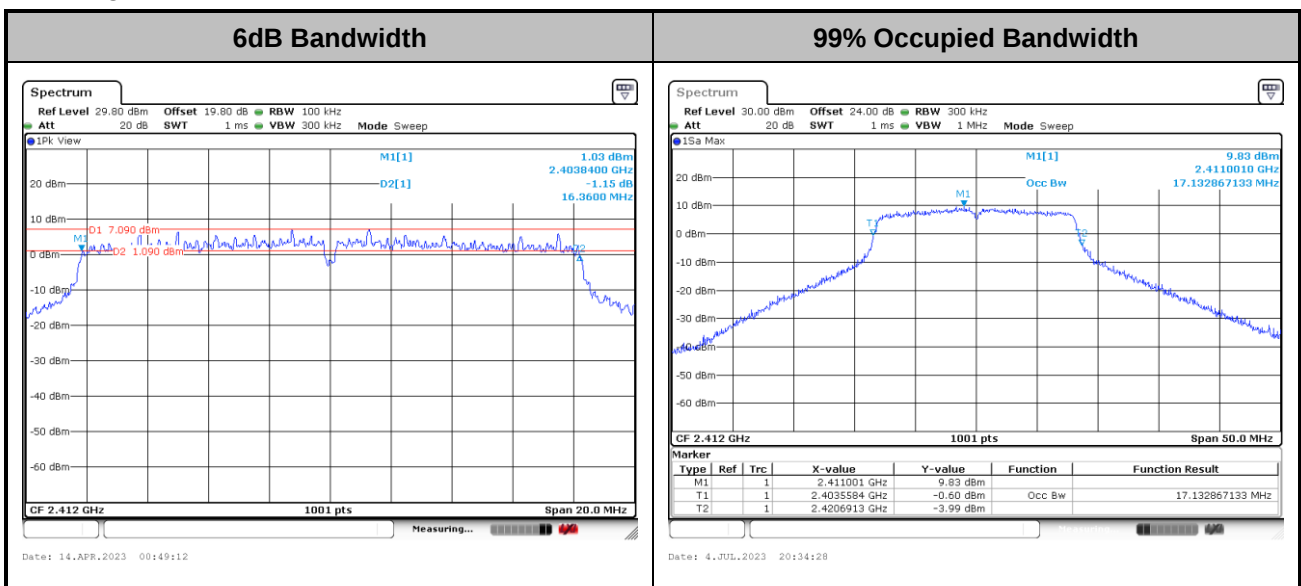

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11n HT20>

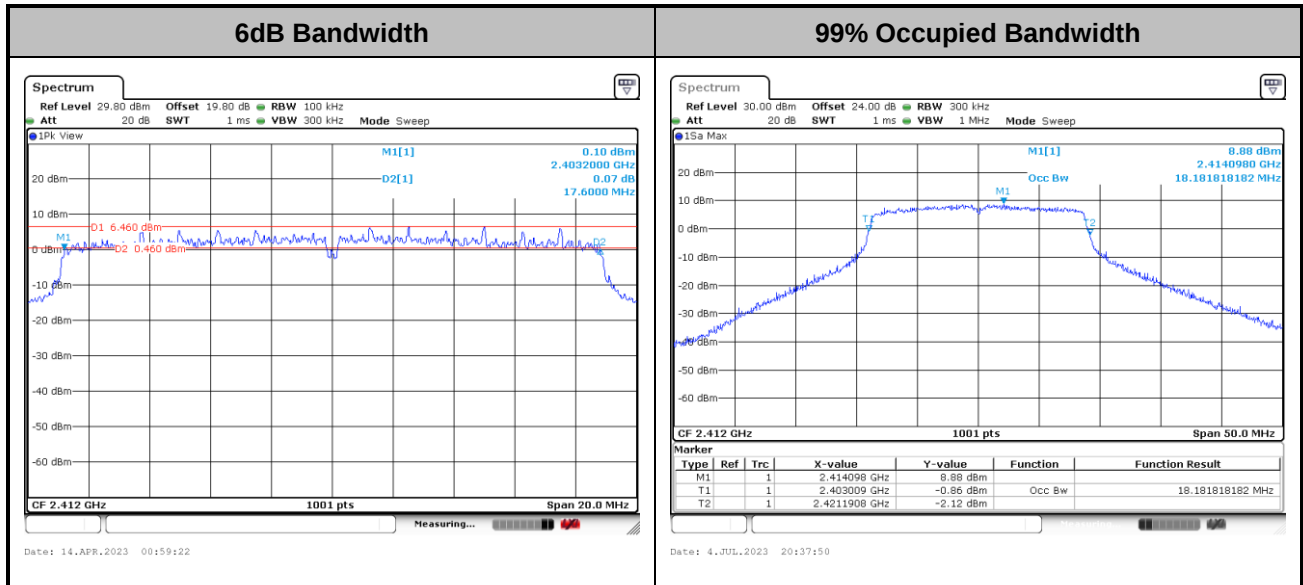


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

Power Spectral Density(dBm/3kHz)

<802.11b>

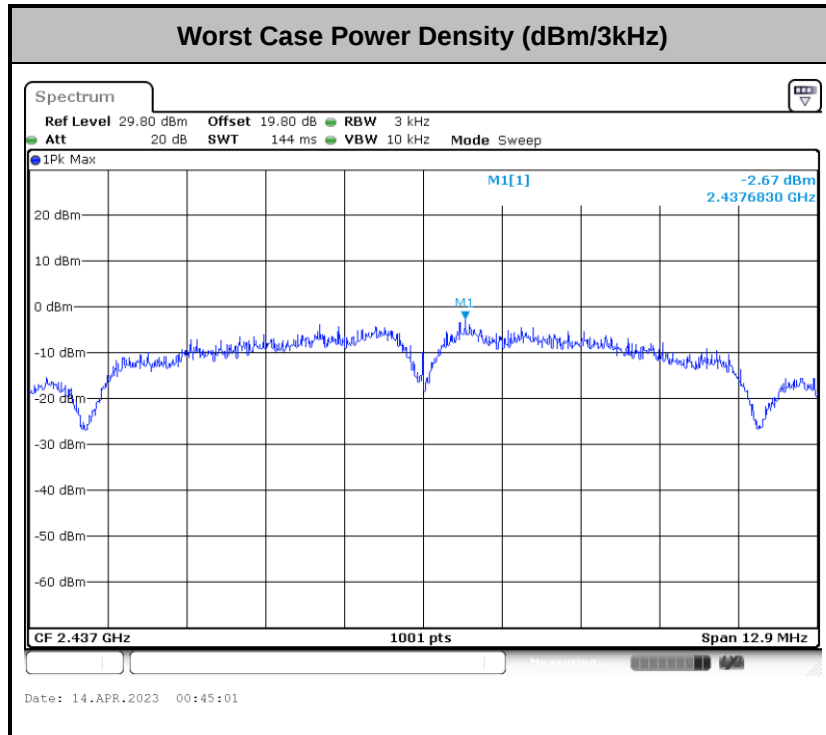


<802.11g>

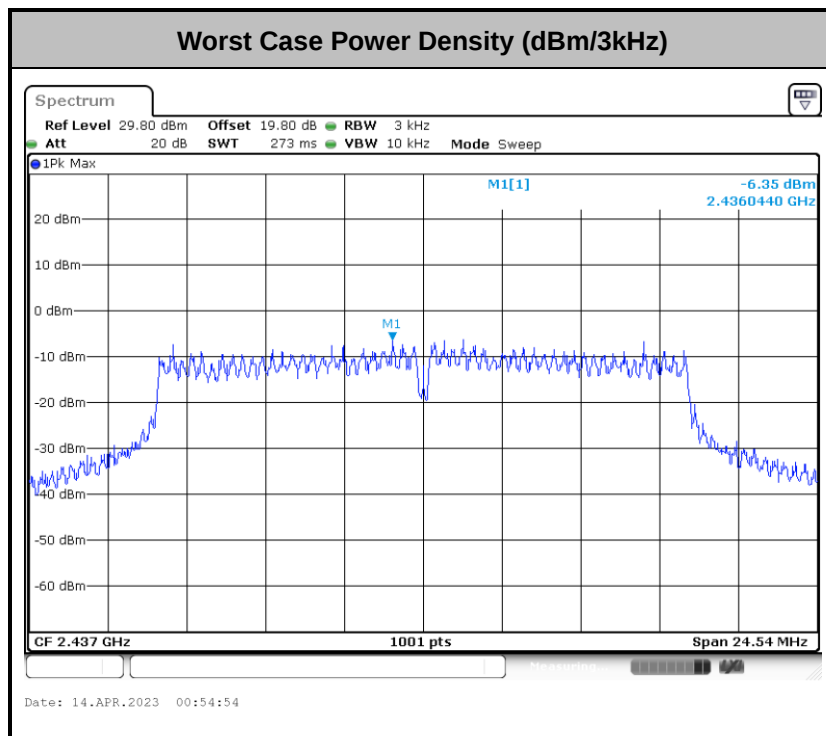




<802.11n HT20>

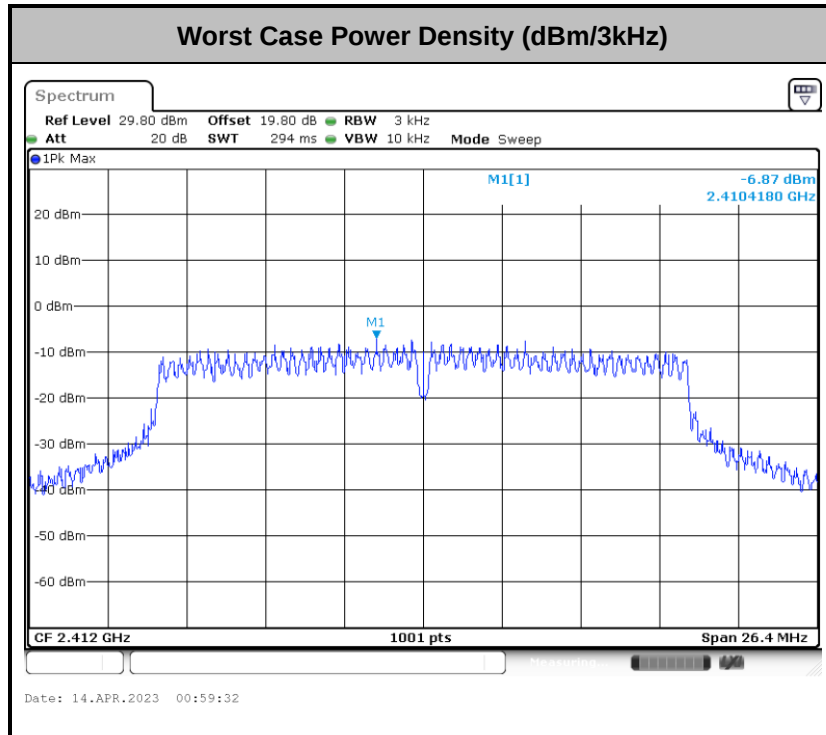

**Band Edges and Spurious Emission**

Number of TX = 1, Ant. 1 (Measured)


Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

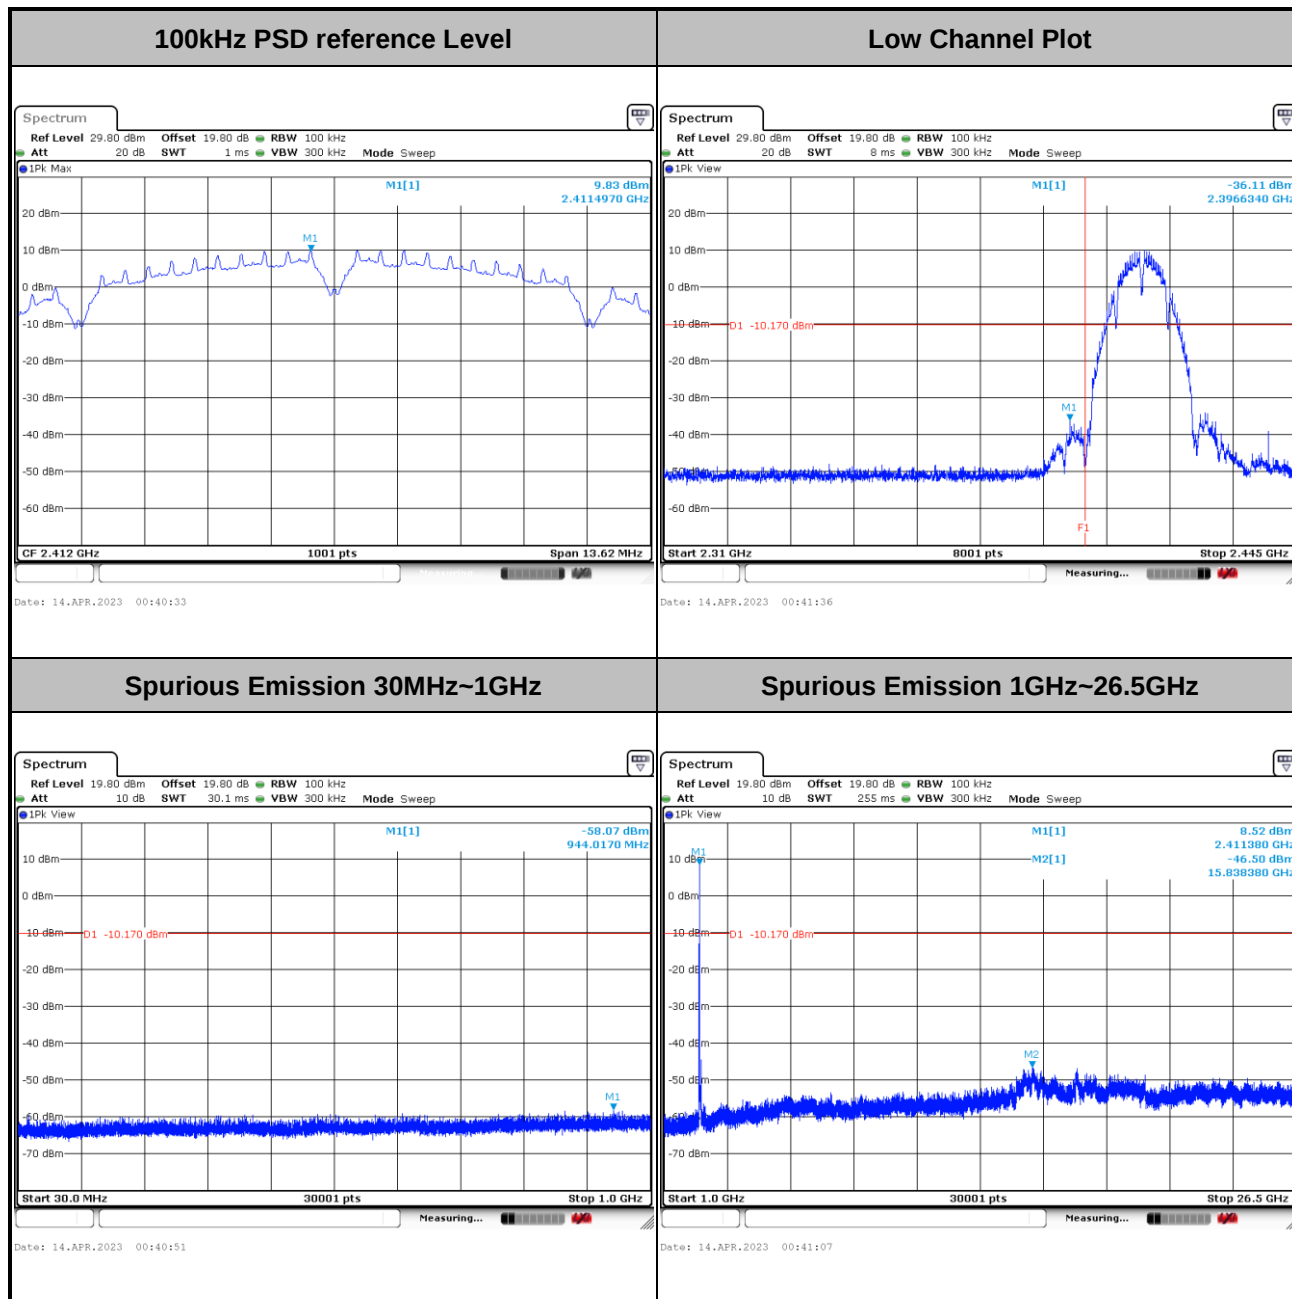




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

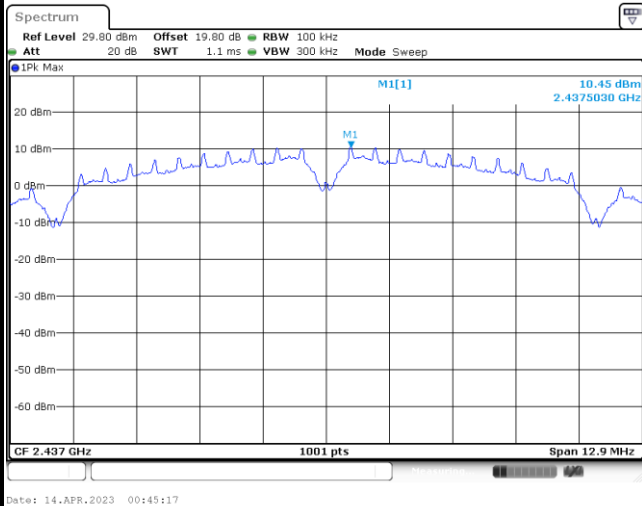


Mid Channel Plot

Spurious Emission 30MHz~1GHz

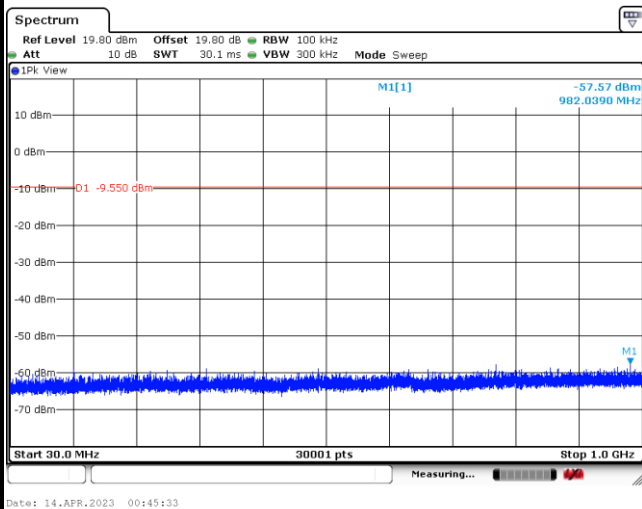


Spurious Emission 1GHz~26.5GHz

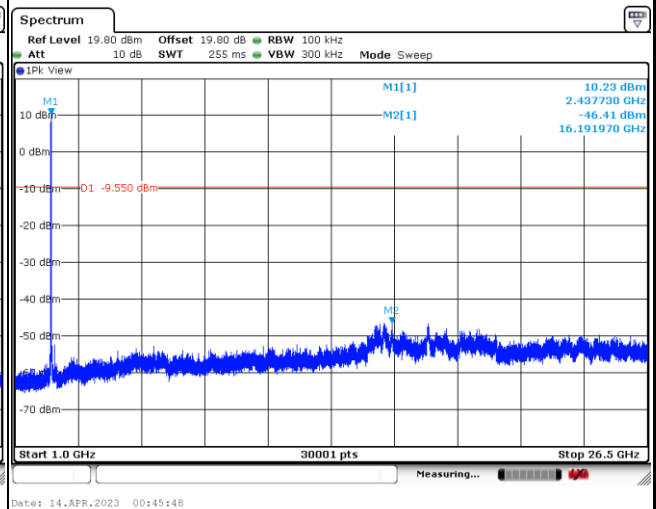




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

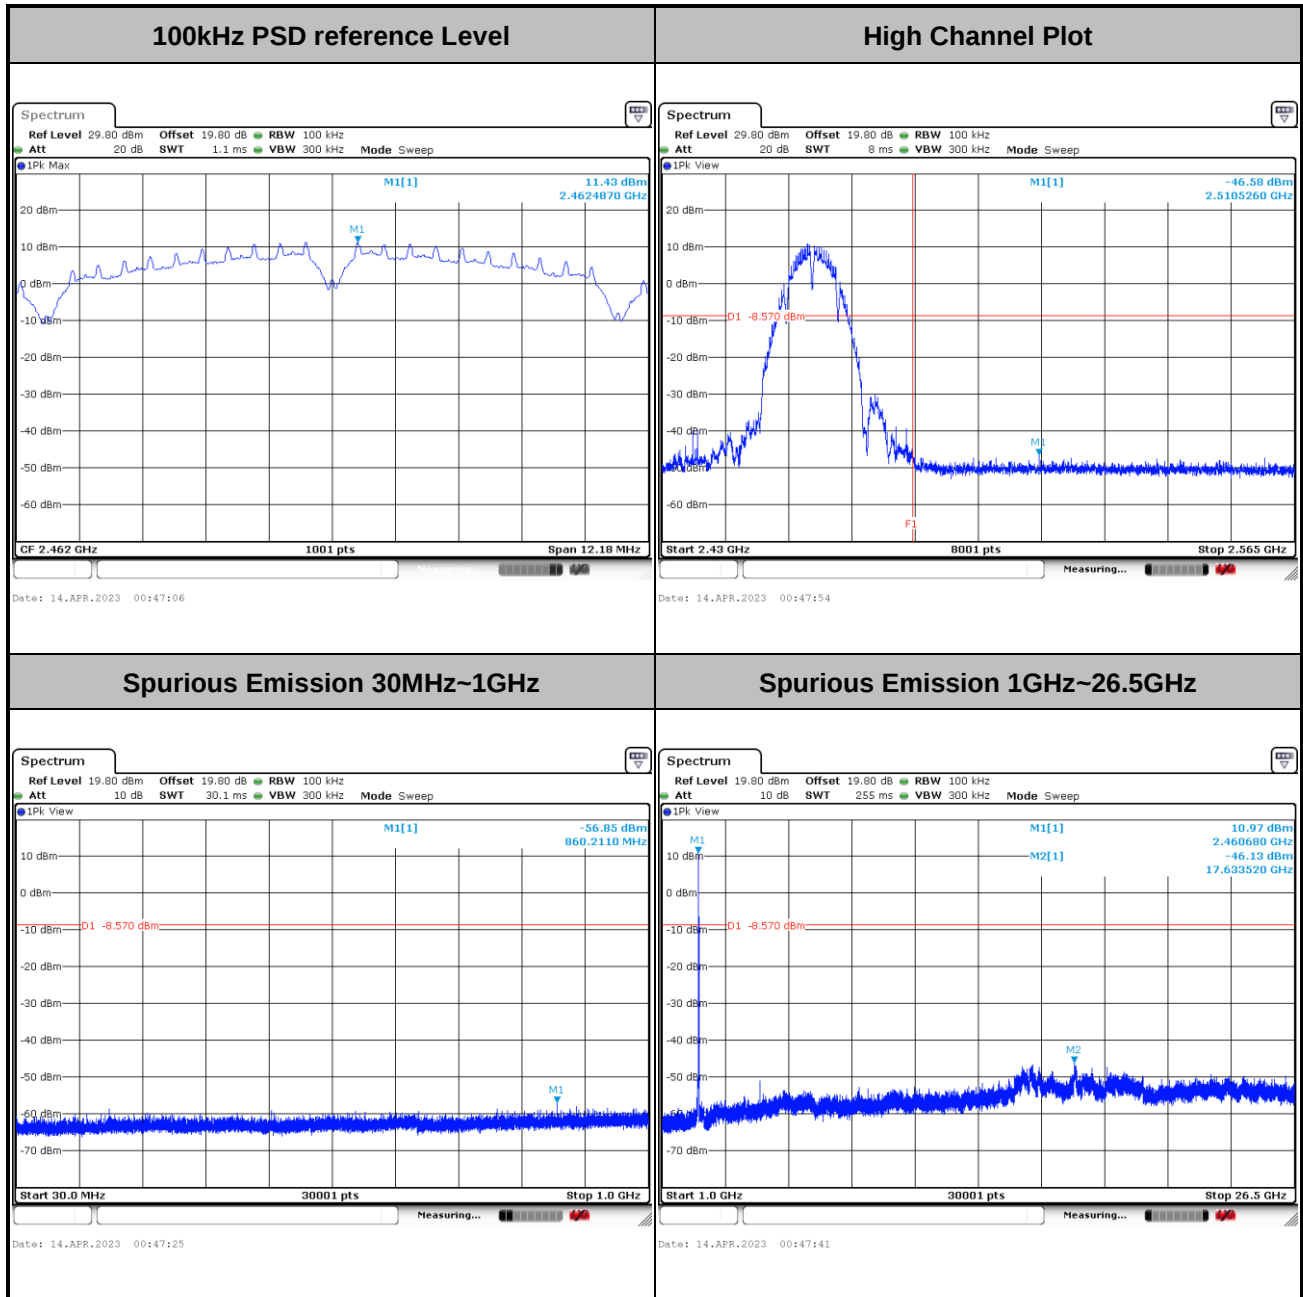




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

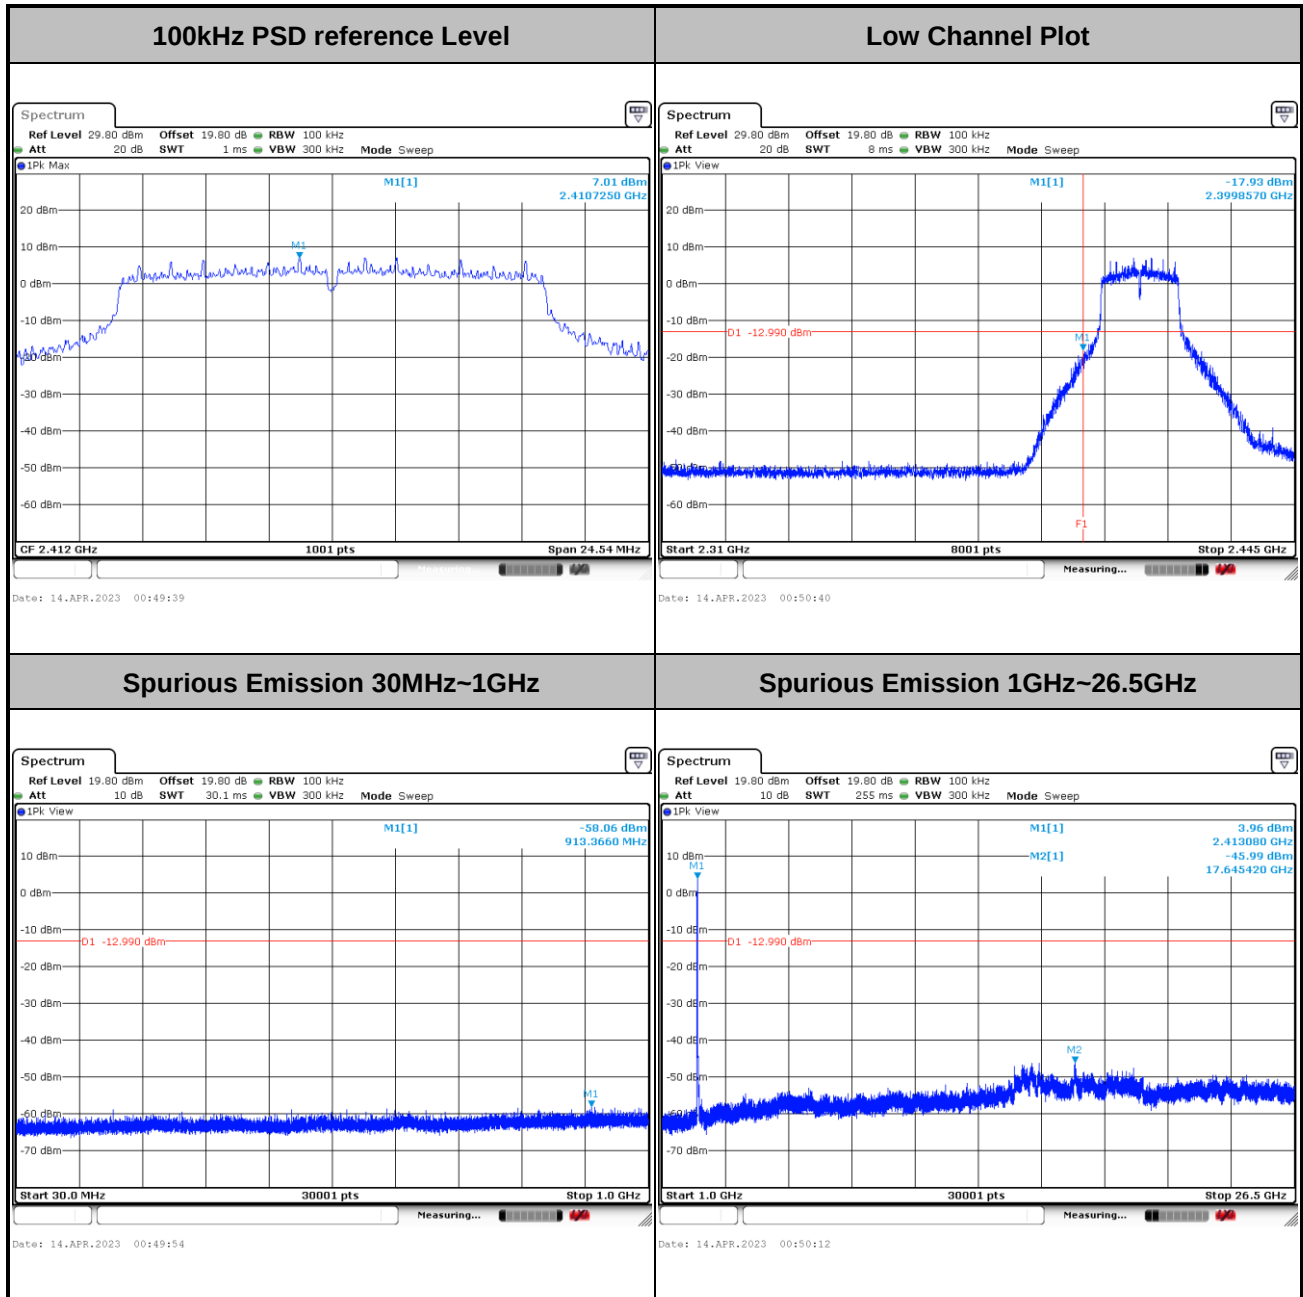




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

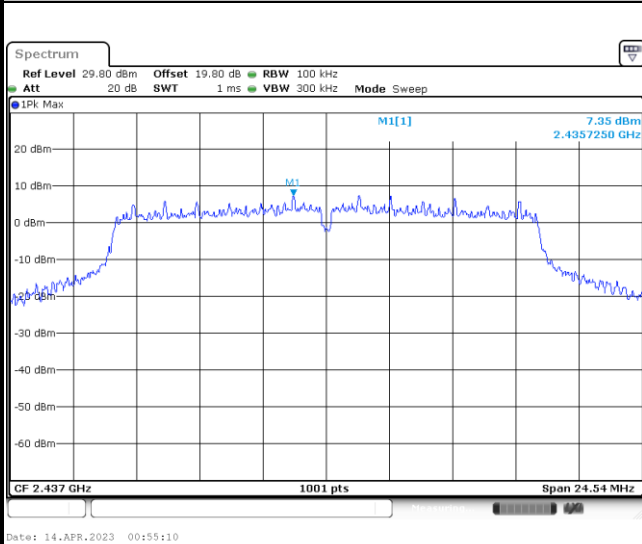


Mid Channel Plot

Spurious Emission 30MHz~1GHz

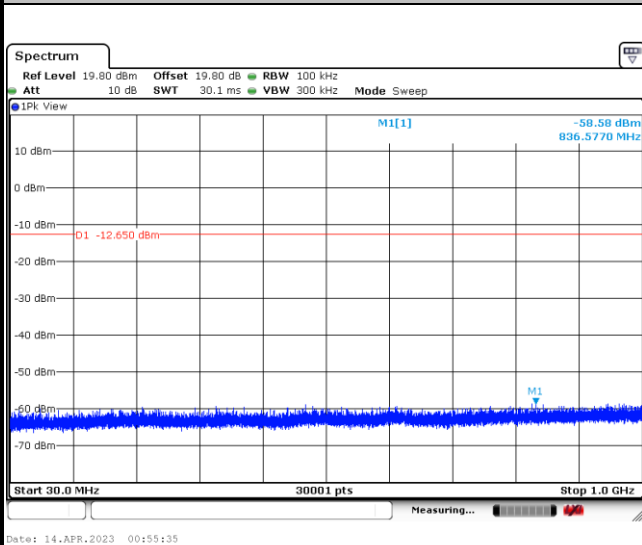


Spurious Emission 1GHz~26.5GHz

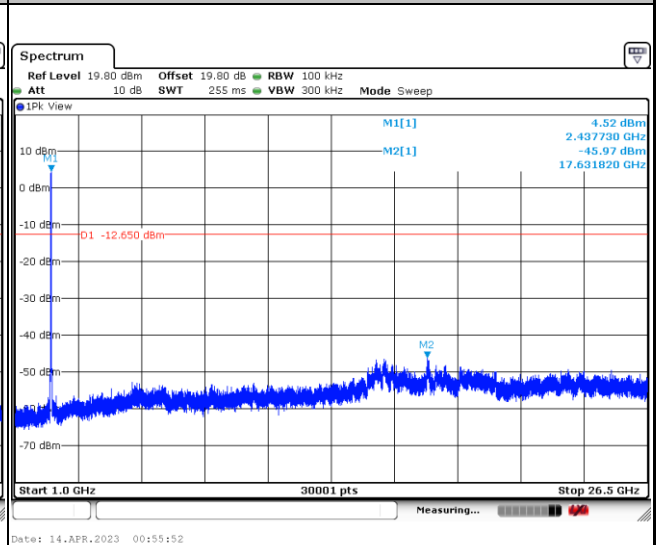




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----


100kHz PSD reference Level

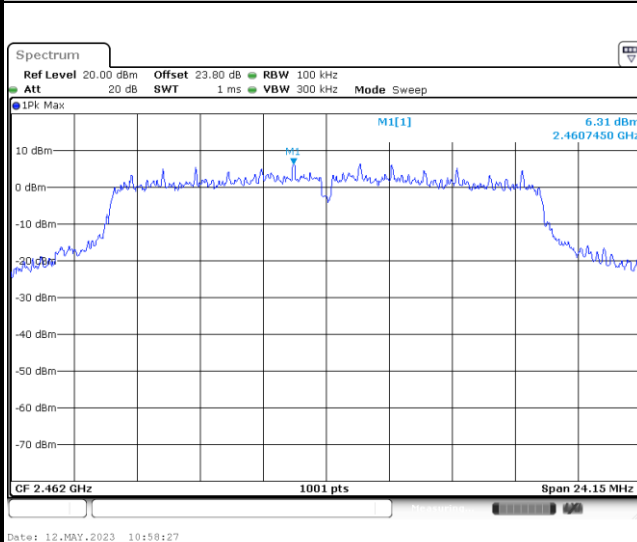


High Channel Plot

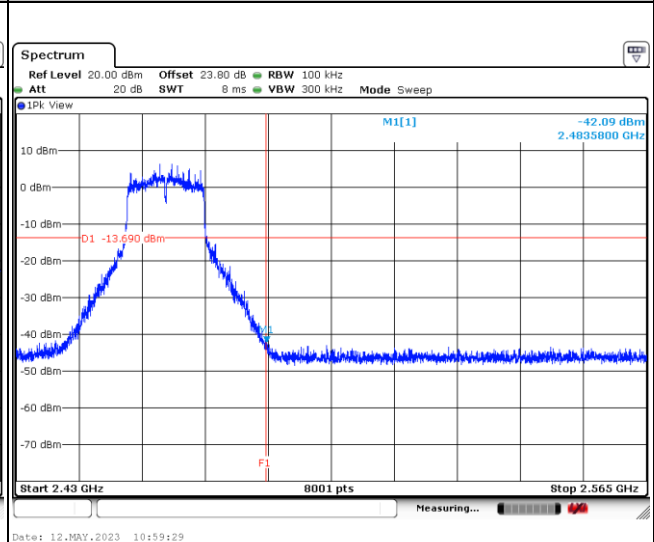

Spurious Emission 30MHz~1GHz

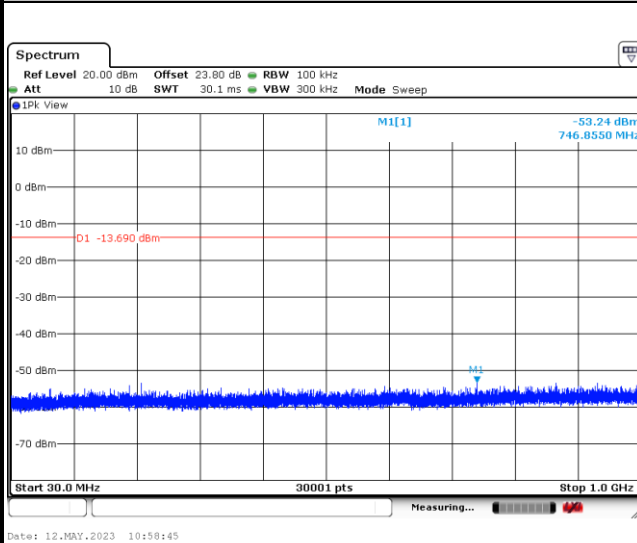


Spurious Emission 1GHz~26.5GHz

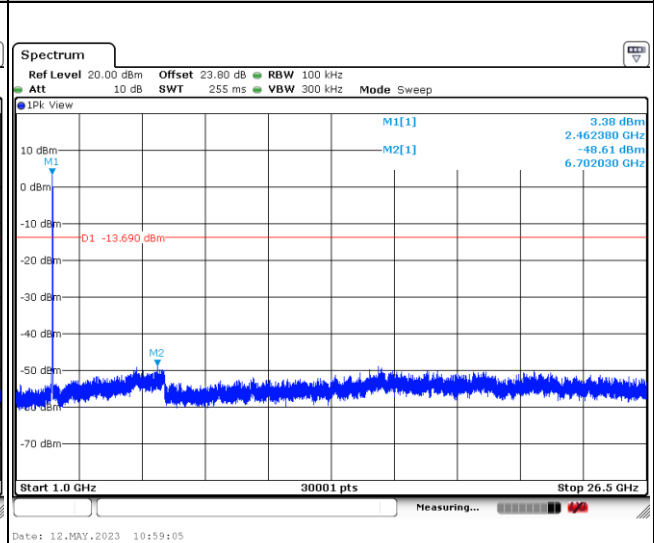




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

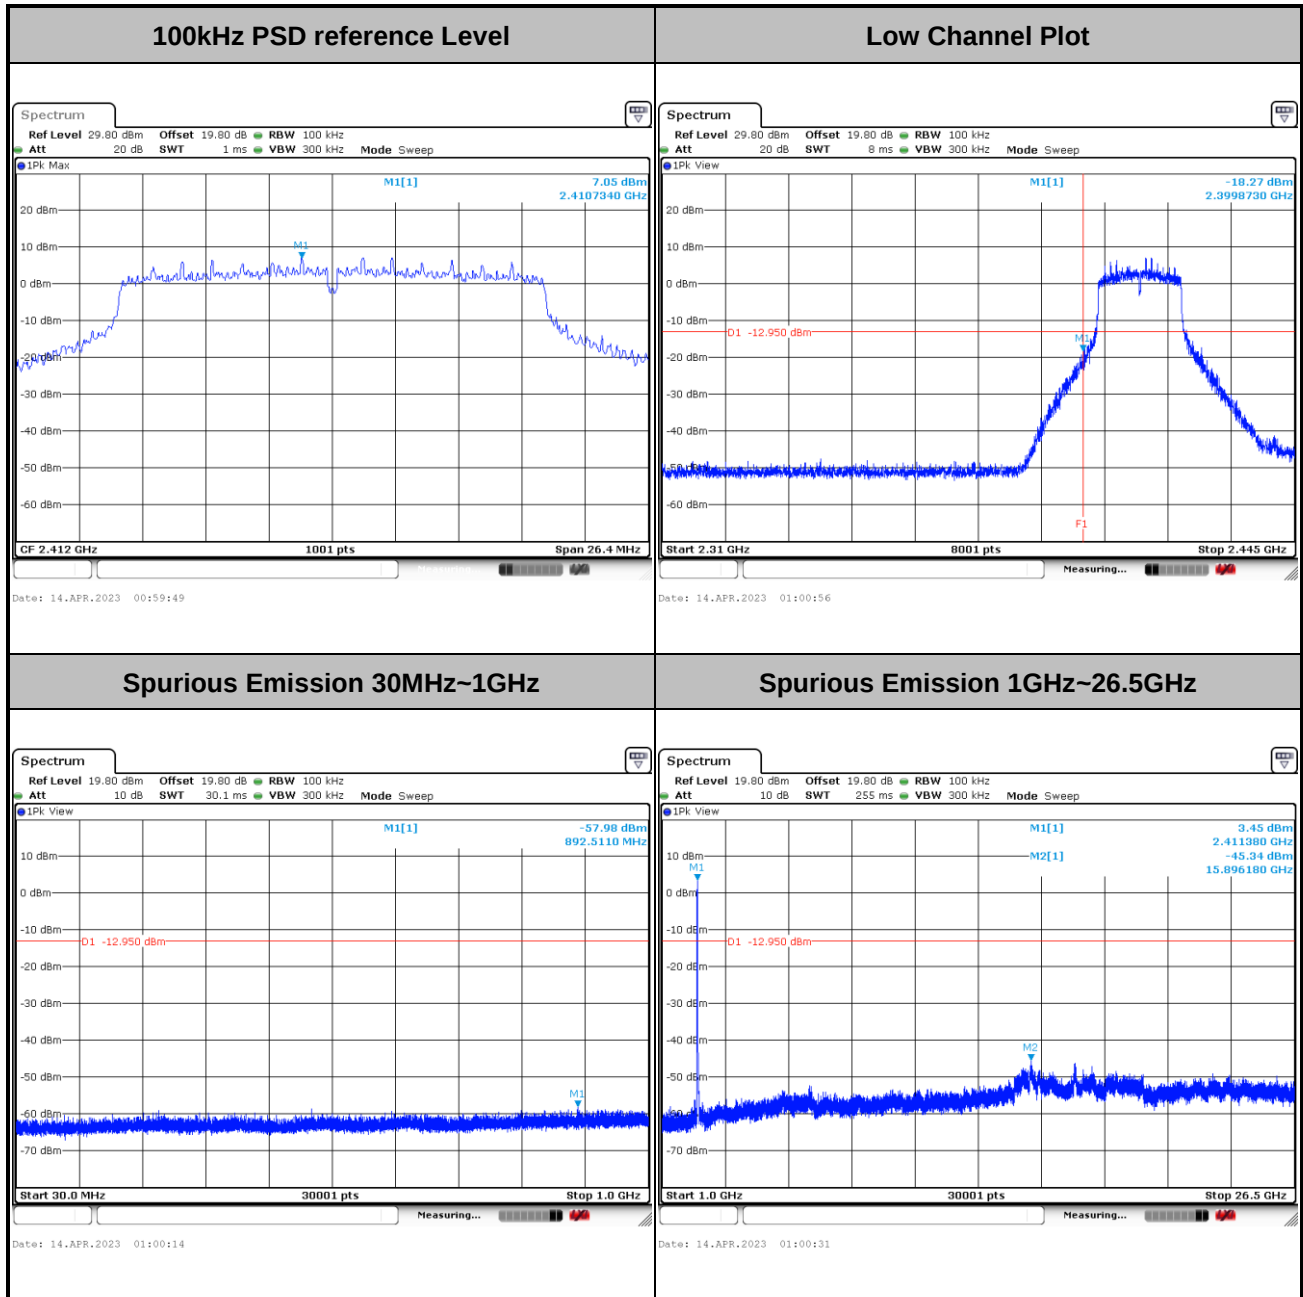




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

100kHz PSD reference Level

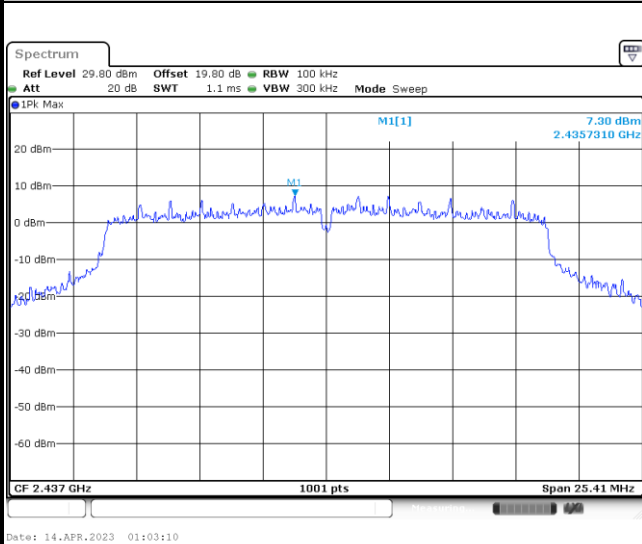


Mid Channel Plot

Spurious Emission 30MHz~1GHz

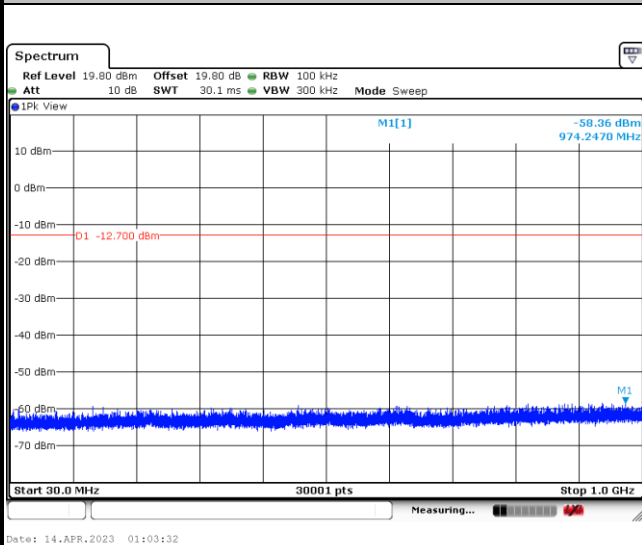


Spurious Emission 1GHz~26.5GHz

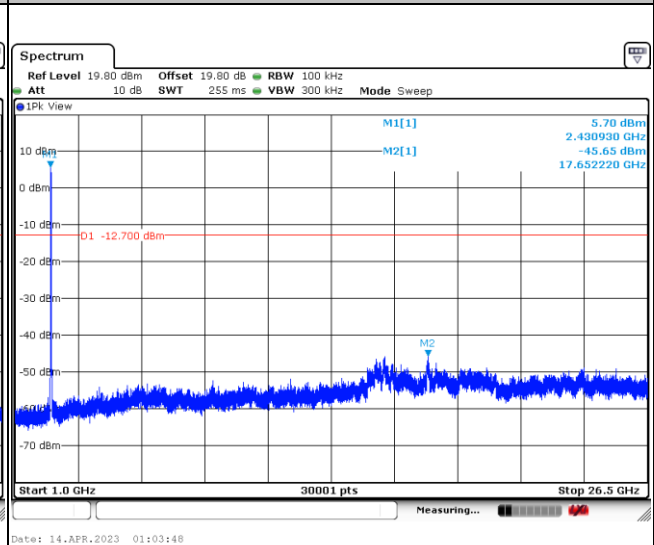




Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----


100kHz PSD reference Level

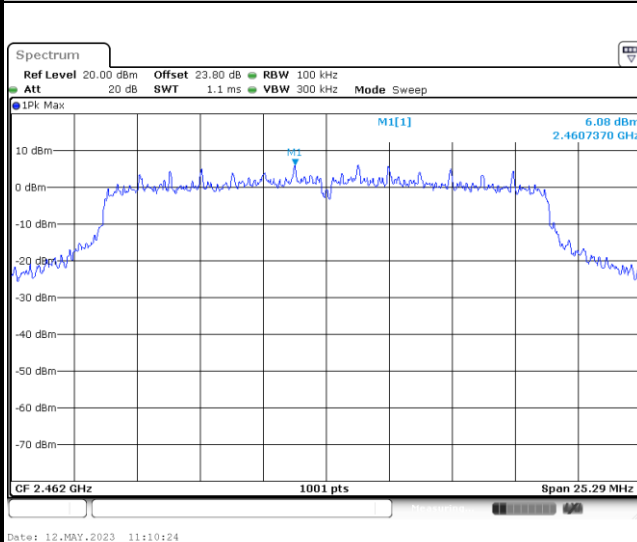


High Channel Plot

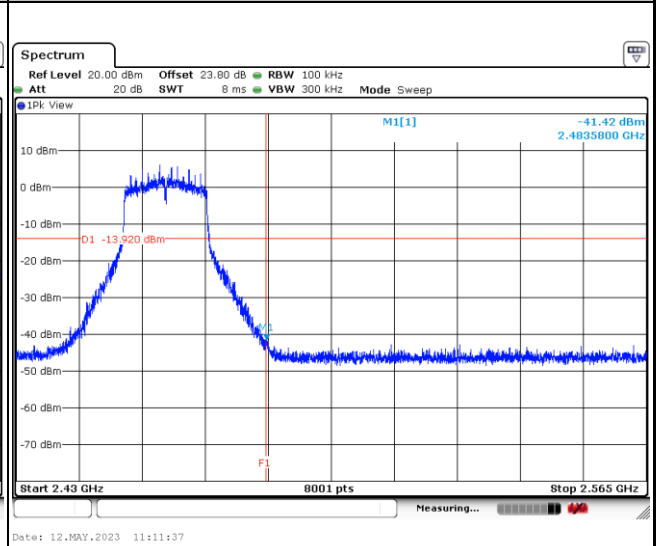

Spurious Emission 30MHz~1GHz

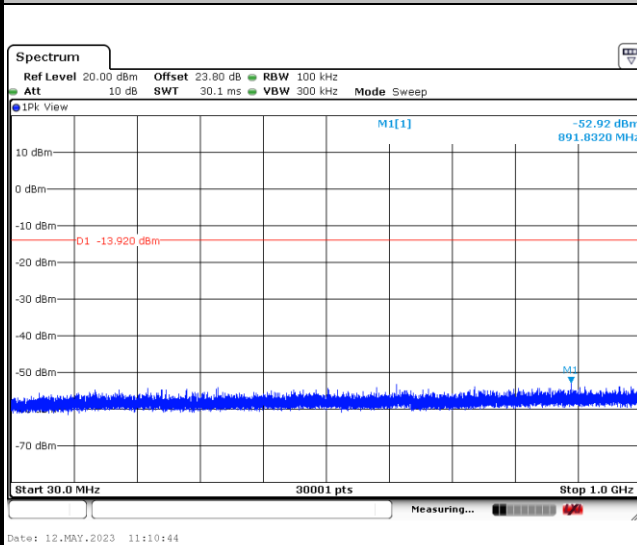

Spurious Emission 1GHz~26.5GHz

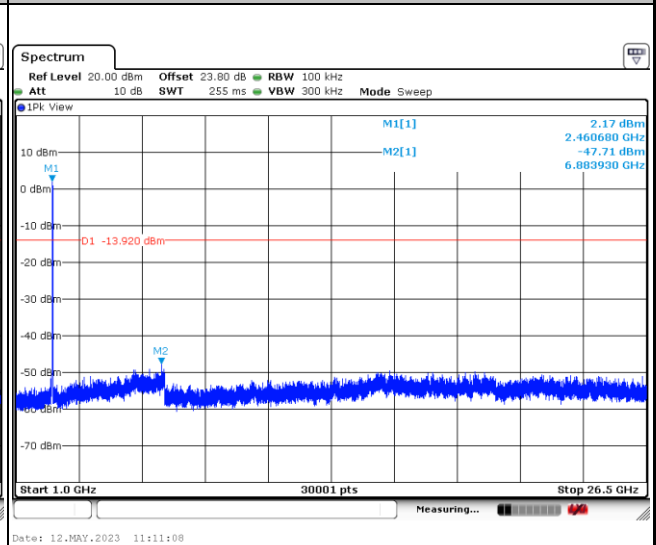




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	21.5~25.5℃
		Relative Humidity :	59.7~63.4%

EUT Information

Report NO : 330714
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

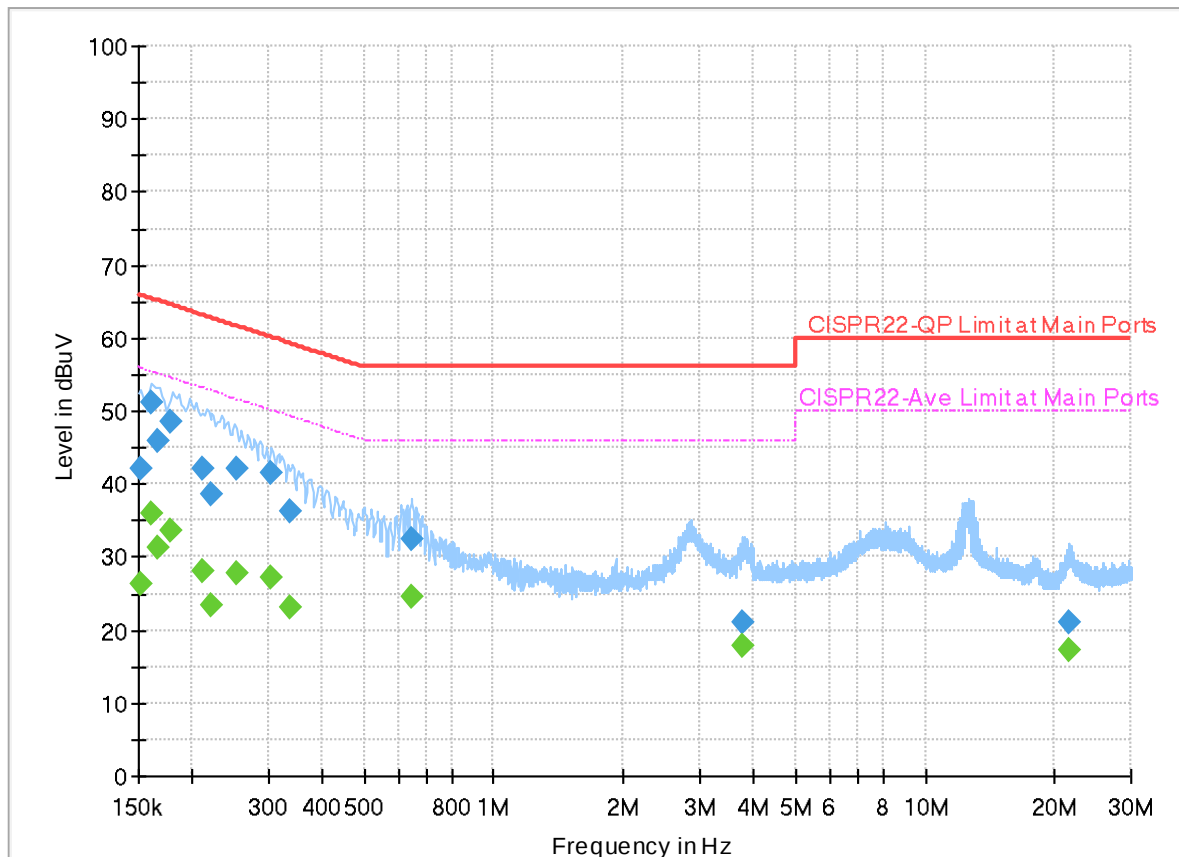

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.151148	---	26.32	55.94	29.62	L1	OFF	19.9
0.151148	42.12	---	65.94	23.82	L1	OFF	19.9
0.161160	---	35.91	55.40	19.49	L1	OFF	19.9
0.161160	51.26	---	65.40	14.14	L1	OFF	19.9
0.165750	---	31.23	55.17	23.94	L1	OFF	19.9
0.165750	45.83	---	65.17	19.34	L1	OFF	19.9
0.177000	---	33.52	54.63	21.11	L1	OFF	19.9
0.177000	48.59	---	64.63	16.04	L1	OFF	19.9
0.210660	---	28.03	53.18	25.15	L1	OFF	20.0
0.210660	42.23	---	63.18	20.95	L1	OFF	20.0
0.221640	---	23.52	52.76	29.24	L1	OFF	20.0
0.221640	38.62	---	62.76	24.14	L1	OFF	20.0
0.254400	---	27.89	51.61	23.72	L1	OFF	20.0
0.254400	42.06	---	61.61	19.55	L1	OFF	20.0
0.303000	---	27.30	50.16	22.86	L1	OFF	20.0
0.303000	41.53	---	60.16	18.63	L1	OFF	20.0
0.336750	---	23.05	49.28	26.23	L1	OFF	20.0
0.336750	36.25	---	59.28	23.03	L1	OFF	20.0
0.646080	---	24.54	46.00	21.46	L1	OFF	20.0

0.646080	32.37	---	56.00	23.63	L1	OFF	20.0
3.764940	---	17.89	46.00	28.11	L1	OFF	20.0
3.764940	21.18	---	56.00	34.82	L1	OFF	20.0
21.441300	---	17.28	50.00	32.72	L1	OFF	20.2
21.441300	21.16	---	60.00	38.84	L1	OFF	20.2

EUT Information

Report NO : 330714
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

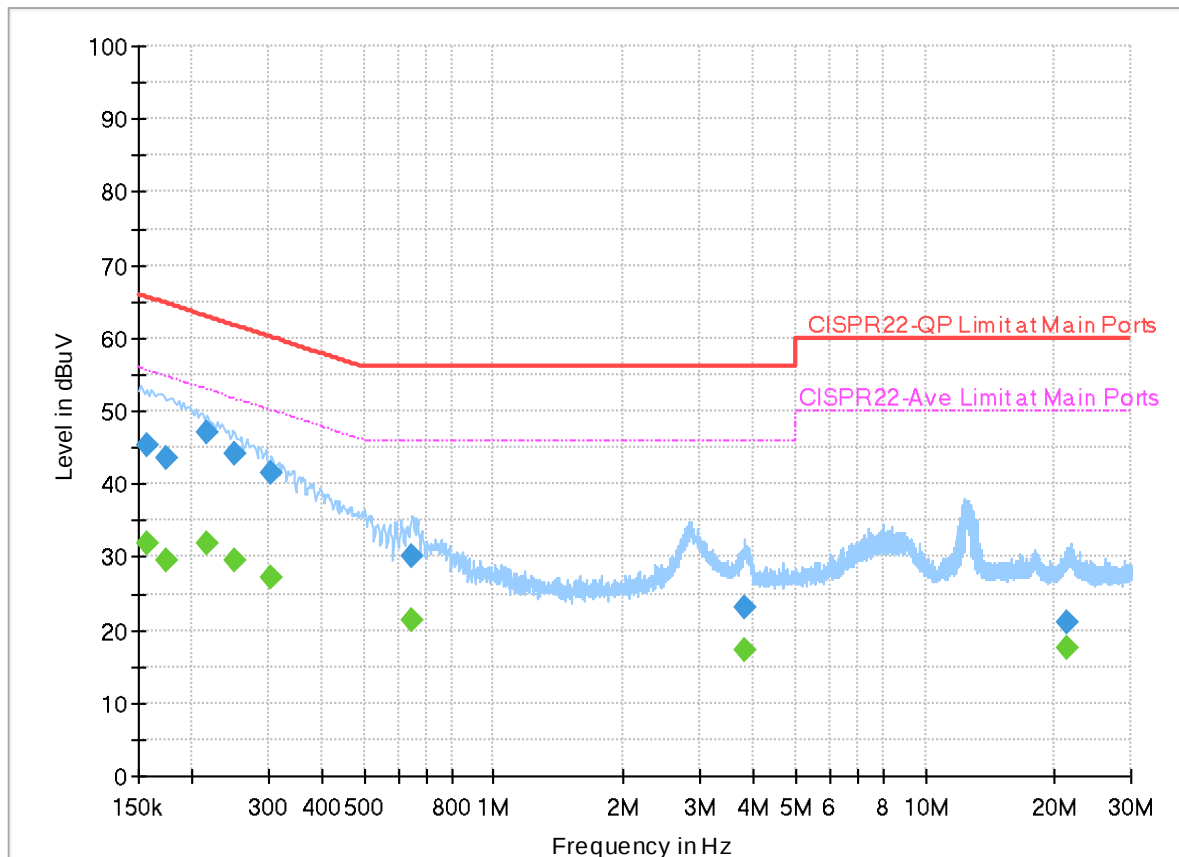

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	31.99	55.63	23.64	N	OFF	20.0
0.156750	45.30	---	65.63	20.33	N	OFF	20.0
0.174750	---	29.61	54.73	25.12	N	OFF	20.0
0.174750	43.57	---	64.73	21.16	N	OFF	20.0
0.215160	---	31.99	53.00	21.01	N	OFF	20.0
0.215160	46.98	---	63.00	16.02	N	OFF	20.0
0.249720	---	29.51	51.77	22.26	N	OFF	20.0
0.249720	44.16	---	61.77	17.61	N	OFF	20.0
0.304890	---	27.21	50.11	22.90	N	OFF	20.0
0.304890	41.50	---	60.11	18.61	N	OFF	20.0
0.647880	---	21.39	46.00	24.61	N	OFF	20.0
0.647880	30.21	---	56.00	25.79	N	OFF	20.0
3.815970	---	17.39	46.00	28.61	N	OFF	20.0
3.815970	23.09	---	56.00	32.91	N	OFF	20.0
21.326820	---	17.66	50.00	32.34	N	OFF	20.2
21.326820	20.96	---	60.00	39.04	N	OFF	20.2



Appendix C. Radiated Spurious Emission

Test Engineer :	John Chuang, JC Liang and Howard Huang	Temperature :	18.2~22.3°C
		Relative Humidity :	66.5~69.4%

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2342.55	50.29	-23.71	74	40.49	27.3	18.54	36.04	100	56	P	H
		2390	38.81	-15.19	54	28.86	27.38	18.63	36.06	100	56	A	H
	*	2412	100.42	-	-	90.36	27.45	18.67	36.06	100	56	P	H
	*	2412	97.15	-	-	87.09	27.45	18.67	36.06	100	56	A	H
													H
													H
		2379.3	49.59	-24.41	74	39.67	27.36	18.61	36.05	317	11	P	V
		2390	38.81	-15.19	54	28.86	27.38	18.63	36.06	317	11	A	V
	*	2412	102.71	-	-	92.65	27.45	18.67	36.06	317	11	P	V
	*	2412	99.47	-	-	89.41	27.45	18.67	36.06	317	11	A	V
													V
													V
802.11b CH 06 2437MHz		2389.36	49.72	-24.28	74	39.77	27.38	18.63	36.06	112	53	P	H
		2381.52	38.64	-15.36	54	28.72	27.36	18.61	36.05	112	53	A	H
	*	2437	102.82	-	-	92.62	27.55	18.72	36.07	112	53	P	H
	*	2437	99.38	-	-	89.18	27.55	18.72	36.07	112	53	A	H
		2484.08	49.95	-24.05	74	39.48	27.74	18.82	36.09	112	53	P	H
		2483.84	39.31	-14.69	54	28.84	27.74	18.82	36.09	112	53	A	H
		2388.4	49.64	-24.36	74	39.69	27.38	18.63	36.06	301	10	P	V
		2389.52	38.65	-15.35	54	28.7	27.38	18.63	36.06	301	10	A	V
	*	2437	103.89	-	-	93.69	27.55	18.72	36.07	301	10	P	V
	*	2437	100.63	-	-	90.43	27.55	18.72	36.07	301	10	A	V
		2491.76	49.99	-24.01	74	39.48	27.77	18.83	36.09	301	10	P	V
		2483.68	39.35	-14.65	54	28.89	27.73	18.82	36.09	301	10	A	V



802.11b CH 11 2462MHz	*	2462	97.51	-	-	87.17	27.65	18.77	36.08	293	236	P	H
	*	2462	94.46	-	-	84.12	27.65	18.77	36.08	293	236	A	H
		2483.56	50.17	-23.83	74	39.71	27.73	18.82	36.09	293	236	P	H
		2483.52	40	-14	54	29.54	27.73	18.82	36.09	293	236	A	H
													H
													H
	*	2462	102.02	-	-	91.68	27.65	18.77	36.08	287	11	P	V
	*	2462	99.01	-	-	88.67	27.65	18.77	36.08	287	11	A	V
		2485.8	51.28	-22.72	74	40.81	27.74	18.82	36.09	287	11	P	V
		2483.52	40.88	-13.12	54	30.42	27.73	18.82	36.09	287	11	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

[illegible]



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 06 2437MHz		4874	44	-30	74	35.52	32.65	13.09	37.26	-	-	P	H
		7311	49.52	-24.48	74	34.95	36.86	15.88	38.17	350	277	P	H
		7311	39.55	-14.45	54	24.98	36.86	15.88	38.17	350	277	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	43.86	-30.14	74	35.38	32.65	13.09	37.26	-	-	P	V
		7311	48.32	-25.68	74	33.75	36.86	15.88	38.17	350	59	P	V
		7311	39.78	-14.22	54	25.21	36.86	15.88	38.17	350	59	A	V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 11 2462MHz		4924	44.38	-29.62	74	35.65	32.8	13.23	37.3	-	-	P	H
		7386	48.11	-25.89	74	33.79	36.56	15.98	38.22	288	249	P	H
		7386	39	-15	54	24.68	36.56	15.98	38.22	288	249	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4924	43.67	-30.33	74	34.94	32.8	13.23	37.3	-	-	P	V
		7386	52.29	-21.71	74	37.97	36.56	15.98	38.22	353	224	P	V
		7386	45.08	-8.92	54	30.76	36.56	15.98	38.22	353	224	A	V
													V
													V
													V
													V
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	
												V	



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2390	55.8	-18.2	74	45.85	27.38	18.63	36.06	148	55	P	H
		2390	44.05	-9.95	54	34.1	27.38	18.63	36.06	148	55	A	H
	*	2412	103.14	-	-	93.08	27.45	18.67	36.06	148	55	P	H
	*	2412	94.91	-	-	84.85	27.45	18.67	36.06	148	55	A	H
													H
													H
		2390	58.58	-15.42	74	48.63	27.38	18.63	36.06	354	12	P	V
		2390	46.06	-7.94	54	36.11	27.38	18.63	36.06	354	12	A	V
	*	2412	102.68	-	-	92.62	27.45	18.67	36.06	354	12	P	V
	*	2412	94.56	-	-	84.5	27.45	18.67	36.06	354	12	A	V
													V
													V
802.11g CH 06 2437MHz		2346.64	50.61	-23.39	74	40.8	27.3	18.55	36.04	111	53	P	H
		2390	38.77	-15.23	54	28.82	27.38	18.63	36.06	111	53	A	H
	*	2437	104.64	-	-	94.44	27.55	18.72	36.07	111	53	P	H
	*	2437	96.27	-	-	86.07	27.55	18.72	36.07	111	53	A	H
		2485.12	50.64	-23.36	74	40.17	27.74	18.82	36.09	111	53	P	H
		2483.84	39.62	-14.38	54	29.15	27.74	18.82	36.09	111	53	A	H
		2338.16	50.41	-23.59	74	40.62	27.3	18.53	36.04	299	9	P	V
		2390	38.75	-15.25	54	28.8	27.38	18.63	36.06	299	9	A	V
	*	2437	105.85	-	-	95.65	27.55	18.72	36.07	299	9	P	V
	*	2437	97.63	-	-	87.43	27.55	18.72	36.07	299	9	A	V
		2485.12	50.72	-23.28	74	40.25	27.74	18.82	36.09	299	9	P	V
		2483.52	39.75	-14.25	54	29.29	27.73	18.82	36.09	299	9	A	V



802.11g CH 11 2462MHz	*	2462	99.14	-	-	88.8	27.65	18.77	36.08	238	226	P	H
	*	2462	90.97	-	-	80.63	27.65	18.77	36.08	238	226	A	H
		2483.52	54.79	-19.21	74	44.33	27.73	18.82	36.09	238	226	P	H
		2483.52	45.16	-8.84	54	34.7	27.73	18.82	36.09	238	226	A	H
													H
													H
	*	2462	103.59	-	-	93.25	27.65	18.77	36.08	252	23	P	V
	*	2462	95.6	-	-	85.26	27.65	18.77	36.08	252	23	A	V
		2483.6	60.82	-13.18	74	50.36	27.73	18.82	36.09	252	23	P	V
		2483.52	50.52	-3.48	54	40.06	27.73	18.82	36.09	252	23	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

[illegible]



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 06 2437MHz		4874	44.45	-29.55	74	35.97	32.65	13.09	37.26	-	-	P	H
		7311	48.08	-25.92	74	33.51	36.86	15.88	38.17	350	277	P	H
		7311	39.25	-14.75	54	24.68	36.86	15.88	38.17	350	277	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	44.37	-29.63	74	35.89	32.65	13.09	37.26	-	-	P	V
		7311	48.76	-25.24	74	34.19	36.86	15.88	38.17	348	337	P	V
		7311	39.4	-14.6	54	24.83	36.86	15.88	38.17	348	337	A	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 11 2462MHz		4924	44.14	-29.86	74	35.41	32.8	13.23	37.3	-	-	P	H
		7386	47.7	-26.3	74	33.38	36.56	15.98	38.22	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
												H	
		4924	43.93	-30.07	74	35.2	32.8	13.23	37.3	-	-	P	V
		7386	47.74	-26.26	74	33.42	36.56	15.98	38.22	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.065	55.33	-18.67	74	45.38	27.38	18.63	36.06	122	56	P	H
		2390	46.24	-7.76	54	36.29	27.38	18.63	36.06	122	56	A	H
	*	2412	102.53	-	-	92.47	27.45	18.67	36.06	122	56	P	H
	*	2412	93.68	-	-	83.62	27.45	18.67	36.06	122	56	A	H
													H
													H
		2389.8	58.93	-15.07	74	48.98	27.38	18.63	36.06	272	13	P	V
		2390	48.18	-5.82	54	38.23	27.38	18.63	36.06	272	13	A	V
	*	2412	102.47	-	-	92.41	27.45	18.67	36.06	272	13	P	V
	*	2412	94.35	-	-	84.29	27.45	18.67	36.06	272	13	A	V
													V
													V
802.11n HT20 CH 06 2437MHz		2358.64	50.09	-23.91	74	40.25	27.32	18.57	36.05	112	55	P	H
		2358	39.73	-14.27	54	29.89	27.32	18.57	36.05	112	55	A	H
	*	2437	103.73	-	-	93.53	27.55	18.72	36.07	112	55	P	H
	*	2437	95.93	-	-	85.73	27.55	18.72	36.07	112	55	A	H
		2484.96	50.52	-23.48	74	40.05	27.74	18.82	36.09	112	55	P	H
		2483.76	40.4	-13.6	54	29.93	27.74	18.82	36.09	112	55	A	H
		2377.2	49.71	-24.29	74	39.8	27.35	18.61	36.05	298	10	P	V
		2382.16	39.7	-14.3	54	29.77	27.36	18.62	36.05	298	10	A	V
	*	2437	105.01	-	-	94.81	27.55	18.72	36.07	298	10	P	V
	*	2437	97.1	-	-	86.9	27.55	18.72	36.07	298	10	A	V
		2484	51.76	-22.24	74	41.29	27.74	18.82	36.09	298	10	P	V
		2484.08	40.52	-13.48	54	30.05	27.74	18.82	36.09	298	10	A	V



802.11n HT20 CH 11 2462MHz	*	2462	101.23	-	-	90.89	27.65	18.77	36.08	138	56	P	H
	*	2462	93.12	-	-	82.78	27.65	18.77	36.08	138	56	A	H
		2483.88	56.26	-17.74	74	45.79	27.74	18.82	36.09	138	56	P	H
		2483.52	46.63	-7.37	54	36.17	27.73	18.82	36.09	138	56	A	H
													H
													H
	*	2462	103.61	-	-	93.27	27.65	18.77	36.08	286	22	P	V
	*	2462	95.03	-	-	84.69	27.65	18.77	36.08	286	22	A	V
		2484.12	59.97	-14.03	74	49.5	27.74	18.82	36.09	286	22	P	V
		2483.52	50.49	-3.51	54	40.03	27.73	18.82	36.09	286	22	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	44.04	-29.96	74	35.87	32.44	12.95	37.22	-	-	P	H
													H
													H
													H
													H
													H
		4824	44.16	-29.84	74	35.99	32.44	12.95	37.22	-	-	P	V
													V
													V
													V
													V
													V



WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 06 2437MHz		4874	43.76	-30.24	74	35.28	32.65	13.09	37.26	-	-	P	H
		7311	49.71	-24.29	74	35.14	36.86	15.88	38.17	350	173	P	H
		7311	40.05	-13.95	54	25.48	36.86	15.88	38.17	350	173	A	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4874	44.76	-29.24	74	36.28	32.65	13.09	37.26	-	-	P	V
		7311	49.16	-24.84	74	34.59	36.86	15.88	38.17	325	117	P	V
		7311	40.25	-13.75	54	25.68	36.86	15.88	38.17	325	117	A	V
													V
													V
													V
													V
													V
													V
													V

[illegible]

Emission above 18GHz

2.4GHz WIFI 802.11g (SHF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g SHF		24902	43.44	-30.56	74	37.18	39.66	19.76	53.16	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
												H	
				</									

Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		30.97	23.27	-16.73	40	33.7	24.17	1.16	35.76	-	-	P	H
		165.8	25.05	-18.45	43.5	42.27	15.9	2.45	35.57	-	-	P	H
		214.3	27.28	-16.22	43.5	44.83	15.17	2.74	35.46	-	-	P	H
		352.04	26.11	-19.89	46	37.28	20.5	3.46	35.13	-	-	P	H
		726.46	32.34	-13.66	46	34	27.4	4.93	33.99	-	-	P	H
		956.35	35.44	-10.56	46	31.79	31.08	5.68	33.11	-	-	P	H
													H
													H
													H
													H
													H
													H
		30.97	24.15	-15.85	40	34.58	24.17	1.16	35.76	-	-	P	V
		168.71	24.89	-18.61	43.5	42.3	15.69	2.46	35.56	-	-	P	V
		208.48	24.23	-19.27	43.5	41.7	15.3	2.7	35.47	-	-	P	V
		449.04	26.52	-19.48	46	34.43	23.12	3.88	34.91	-	-	P	V
		631.4	29.95	-16.05	46	33.4	26.28	4.63	34.36	-	-	P	V
		949.56	35.76	-10.24	46	32.51	30.72	5.66	33.13	-	-	P	V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												
	3. The emission position marked as “-” means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	John Chuang, JC Liang and Howard Huang	Temperature :	18.2~22.3°C
		Relative Humidity :	66.5~69.4%

Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





WIFI 802.11b (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH20-HV Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HV Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Site : 03CH20-HV Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HV Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:0.010KHz SWT:Auto

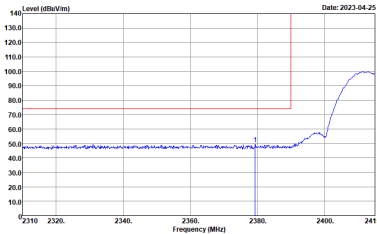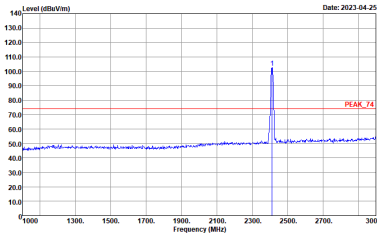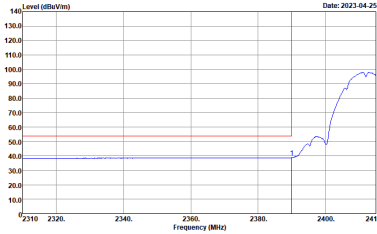
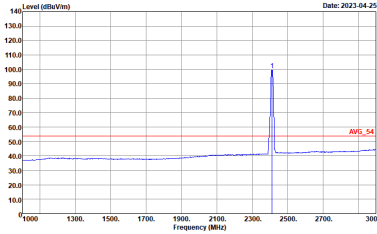


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH01 2412MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

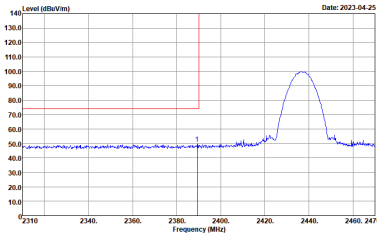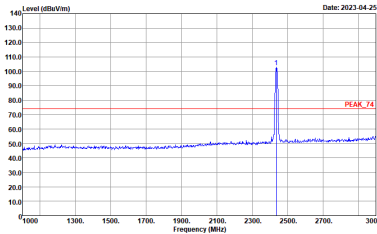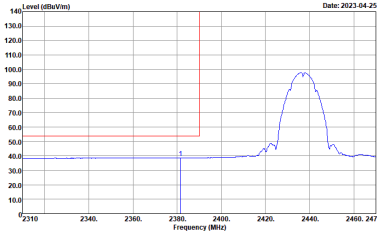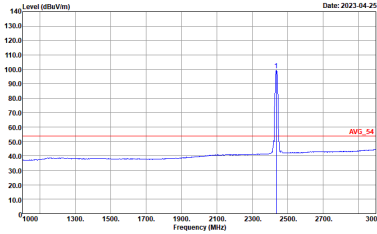

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

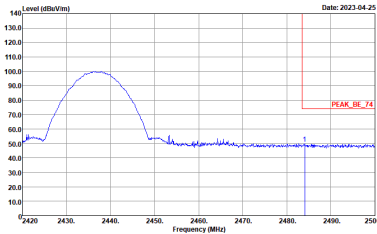
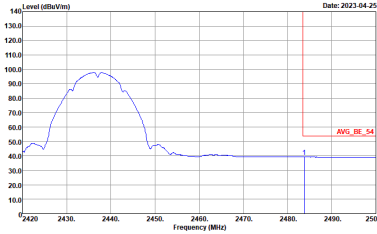


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto	Left blank



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



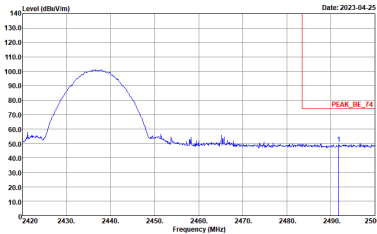
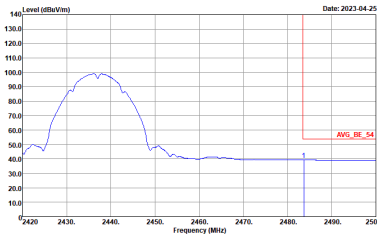


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Left blank







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

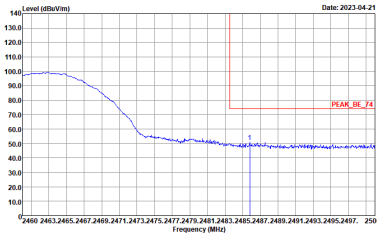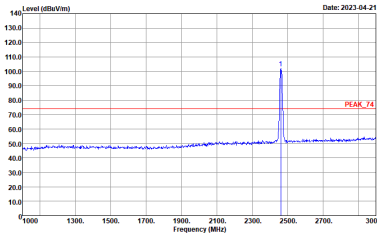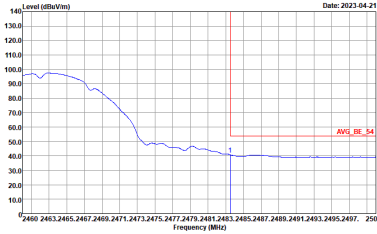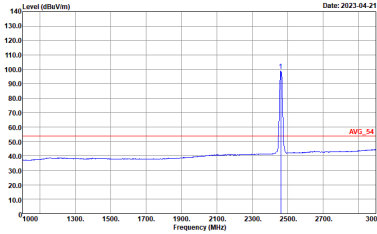

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11b CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

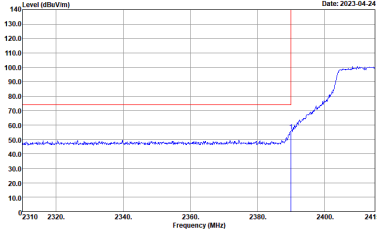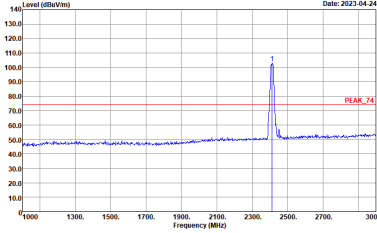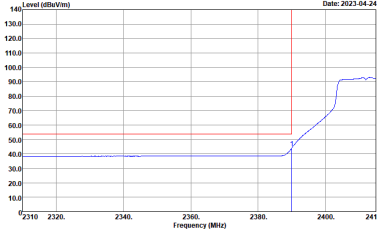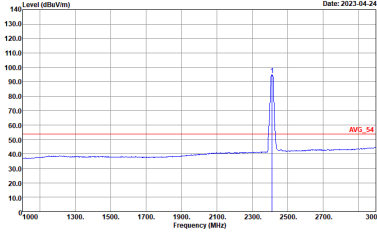WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH01 2412MHz	
1	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

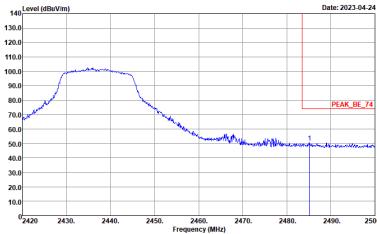
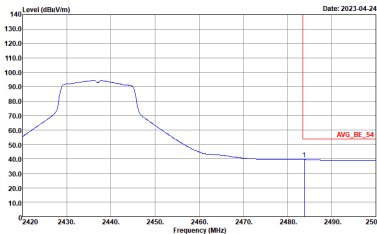


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto	Left blank

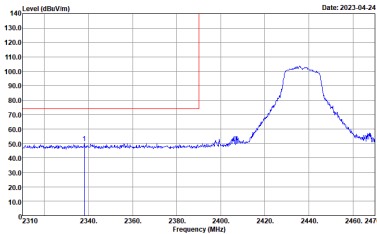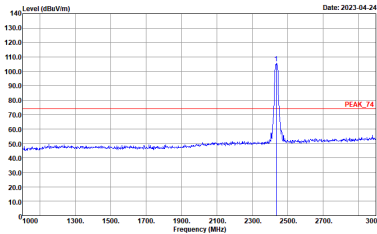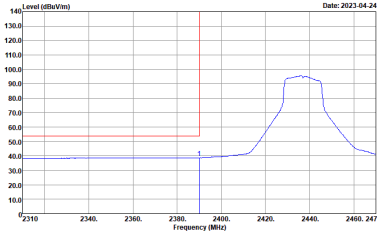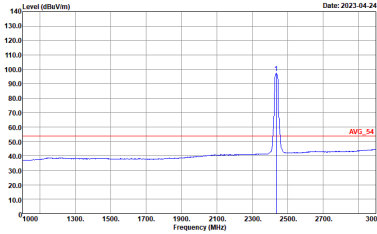

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto
Avg.		



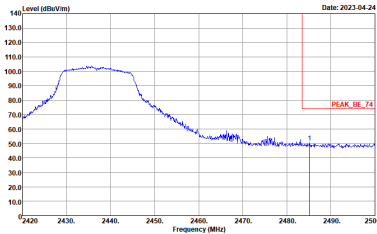
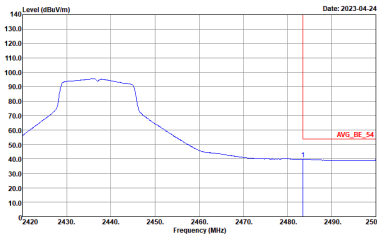


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH06 2437MHz - R	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto	Left Blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto	Left Blank



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Fundamental
Peak	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Peak. The plot shows a blue line representing the spectrum with a red vertical line at 2462 MHz labeled 'PEAK_BE_74'. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2400 to 2500 MHz. The date is 2023-05-04. Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Peak. The plot shows a blue line representing the spectrum with a red vertical line at 2462 MHz labeled 'PEAK_74'. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. The date is 2023-05-04. Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal Avg. The plot shows a blue line representing the spectrum with a red vertical line at 2462 MHz labeled 'AVG_BE_54'. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 2400 to 2500 MHz. The date is 2023-05-04. Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	Level (dBuV/m) vs Frequency (MHz) plot for Fundamental Avg. The plot shows a blue line representing the spectrum with a red vertical line at 2462 MHz labeled 'AVG_54'. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. The date is 2023-05-04. Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto

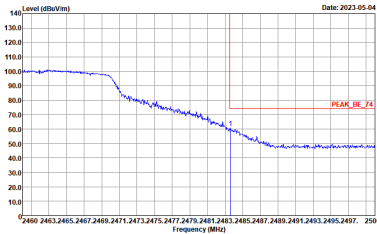
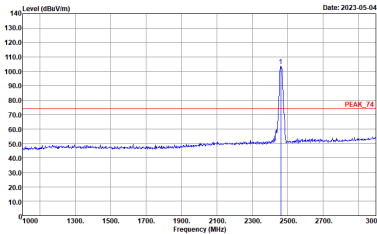
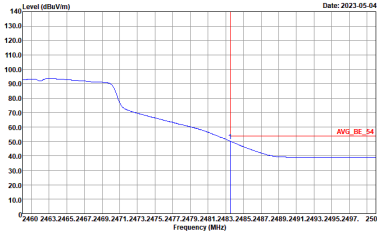
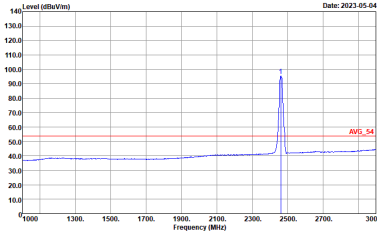


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11g CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:0.010KHz SWT:Auto



2.4GHz 2400~2483.5MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

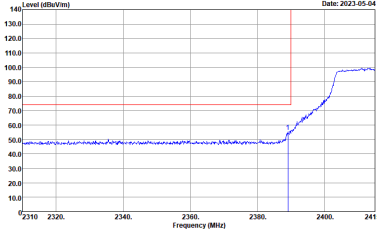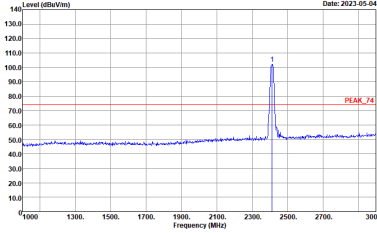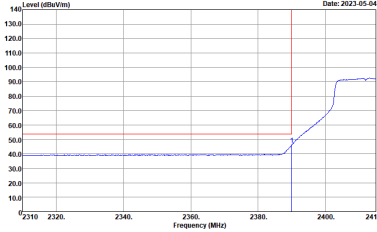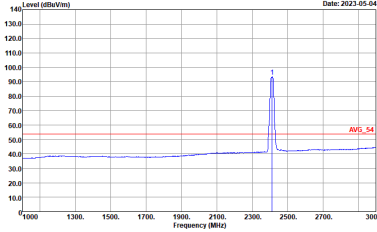WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL RBW:1000.000KHz VBW:1000KHz SWT:Auto





WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Vertical	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto







WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Horizontal	Fundamental
Peak	Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto

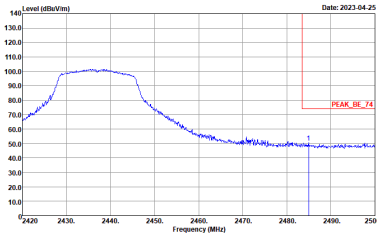
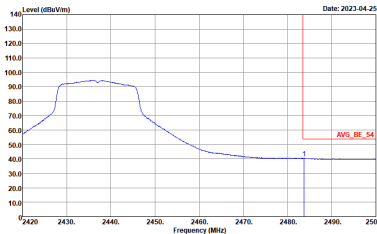


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	Left blank
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	Left blank

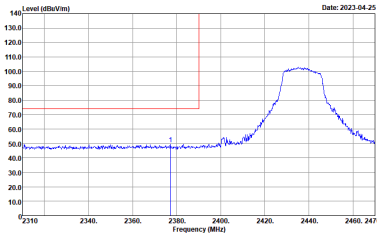
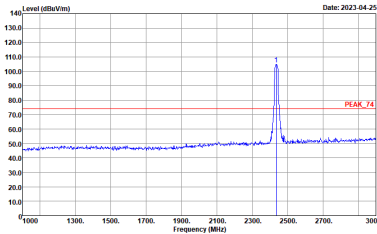
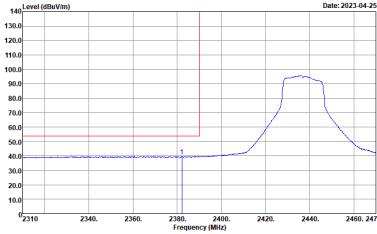
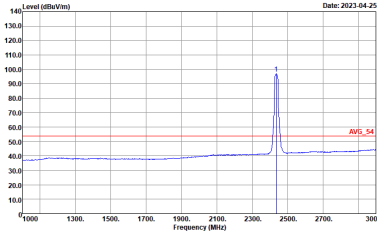


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - L	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto



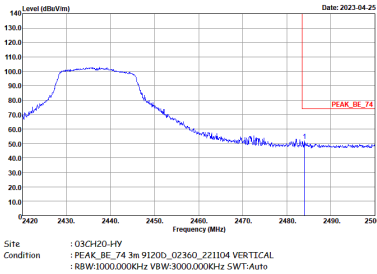
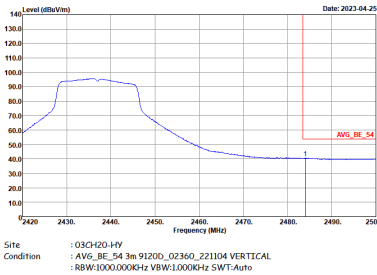


WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH06 2437MHz - R	
1	Vertical	Fundamental
Peak		Left Blank
Avg.		Left Blank

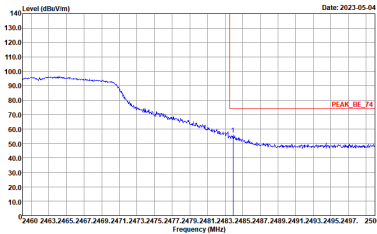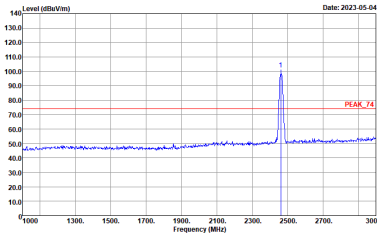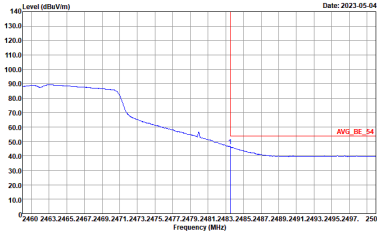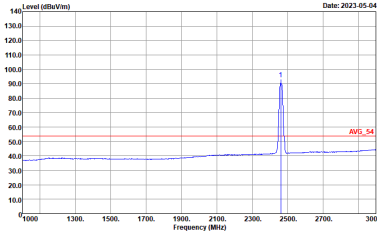

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
Avg.	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto

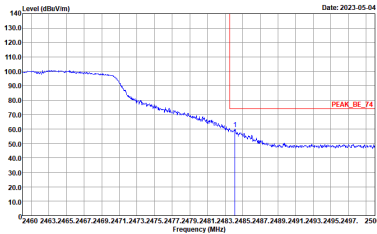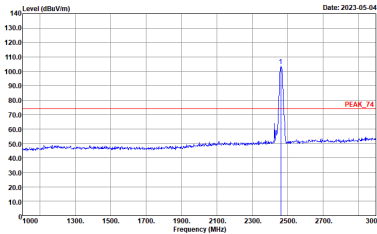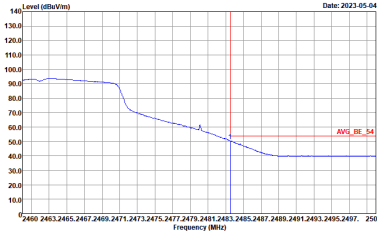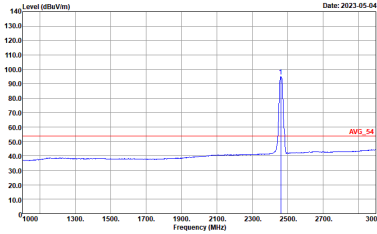

WIFI	2.4GHz 2400~2483.5MHz Fundamental @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Vertical	Fundamental
Peak	 Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto
	 Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto	 Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:1000KHz SWT:Auto



2.4GHz 2400~2483.5MHz



WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-04-25 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 HORIZONTAL	Level (dBuV/m) Date: 2023-04-25 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 VERTICAL



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH01 2412MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL

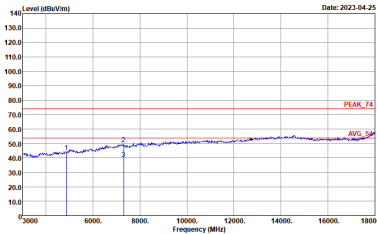
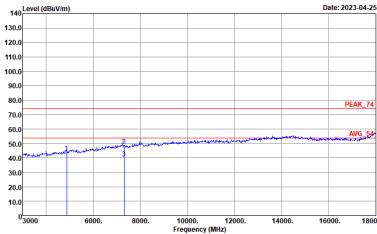


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL :



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH06 2437MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL

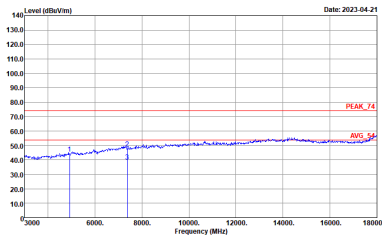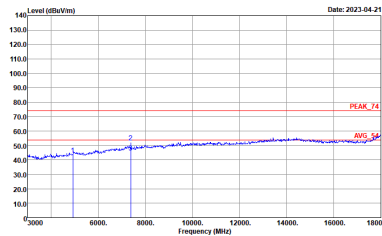

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL :



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11b CH11 2462MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a flat line at approximately 50 dBuV/m across the frequency range 14470 to 14500 MHz. The date is 2023-04-21. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a flat line at approximately 50 dBuV/m across the frequency range 14470 to 14500 MHz. The date is 2023-04-21. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a flat line at approximately 50 dBuV/m across the frequency range 17700 to 18000 MHz. The date is 2023-04-21. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a flat line at approximately 50 dBuV/m across the frequency range 17700 to 18000 MHz. The date is 2023-04-21. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL



2.4GHz 2400~2483.5MHz



WIFI 802.11g (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-04-25 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 HORIZONTAL	Level (dBuV/m) Date: 2023-04-25 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 VERTICAL







WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH01 2412MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) graph for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot shows a flat spectrum with a slight rise around 14480 MHz. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) graph for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot shows a flat spectrum with a slight rise around 14480 MHz. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) graph for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot shows a flat spectrum with a slight rise around 17750 MHz. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) graph for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot shows a flat spectrum with a slight rise around 17750 MHz. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-IHY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL :	 Site : 03CH20-IHY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL :

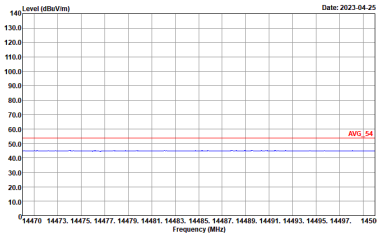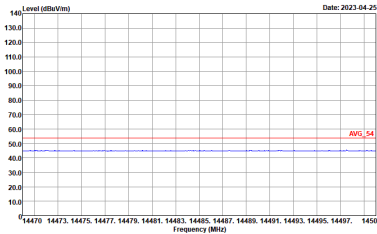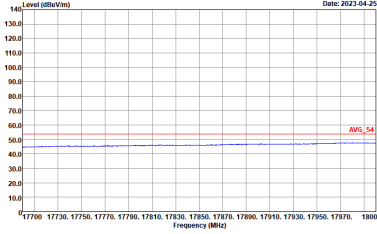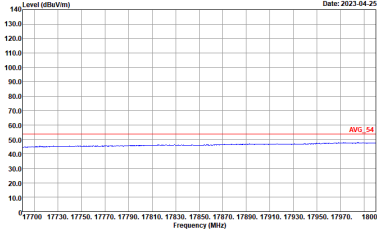

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH06 2437MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	 Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL :
	 Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL :
17.7G ~18G Avg		

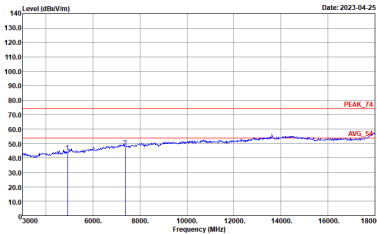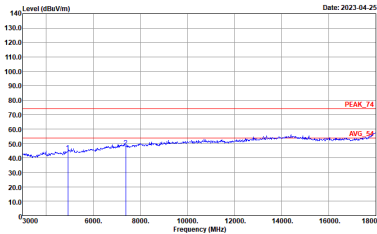



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL :



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11g CH11 2462MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL





2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

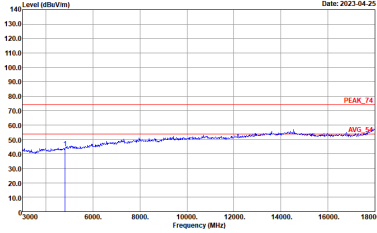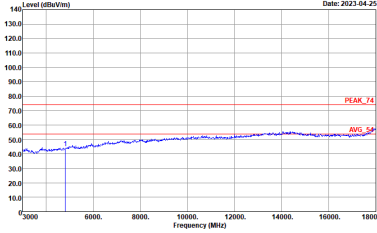WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 HORIZONTAL	 Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_ZZ1104 VERTICAL



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH01 2412MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) Date: 2023-04-25 Frequency (MHz) Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) Date: 2023-04-25 Frequency (MHz) Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) Date: 2023-04-25 Frequency (MHz) Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) Date: 2023-04-25 Frequency (MHz) Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL

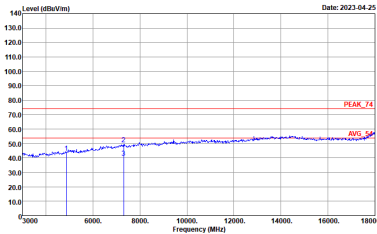
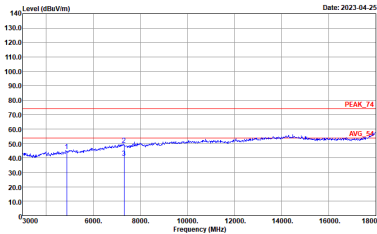


WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL :



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH06 2437MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 50 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 50 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 50 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 50 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL

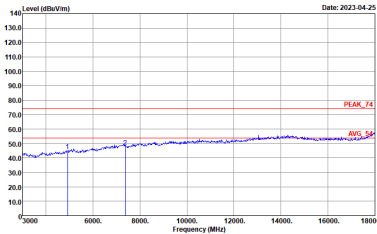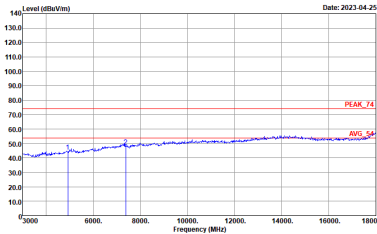

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
Peak Avg.	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL :	 Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL :





WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	802.11n HT20 CH11 2462MHz	
1	Horizontal	Vertical
14.47G ~14.5G Avg.	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 14470 to 14500 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL
	Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL	Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 10.0 to 140.0 dBuV/m, and the x-axis ranges from 17700 to 18000 MHz. A red line labeled 'AVG_54' is visible at approximately 55 dBuV/m. The plot date is 2023-04-25. Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL



Emission above 18GHz
2.4GHz WIFI 802.11g (SHF @ 1m)

WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g SHF	
1	Horizontal	Vertical
Peak Avg.	Level (dBuV/m) Date: 2023-04-28 Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_Z21104 HORIZONTAL	Level (dBuV/m) Date: 2023-04-28 Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_Z21104 VERTICAL



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)

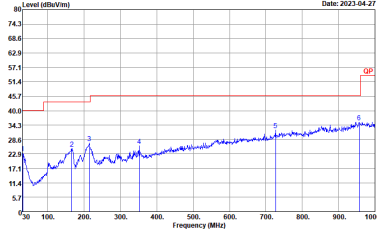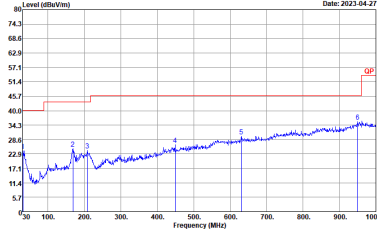WIFI	2.4GHz 2400~2483.5MHz	
ANT	802.11g LF	
1	Horizontal	Vertical
QP / Peak	 Site : 03CH20-HY Condition : QP 3m LF_55606608_Z21022 HORIZONTAL	 Site : 03CH20-HY Condition : QP 3m LF_55606608_Z21022 VERTICAL



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
802.11b	99.27	-	-	10Hz
802.11g	98.06	-	-	10Hz
2.4GHz 802.11n HT20	97.92	1885	0.53	1kHz

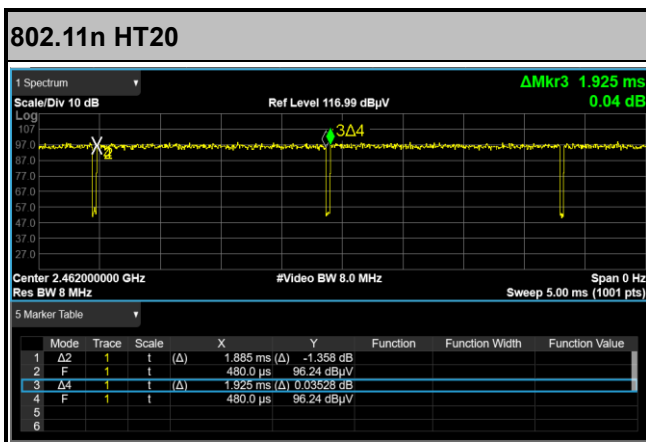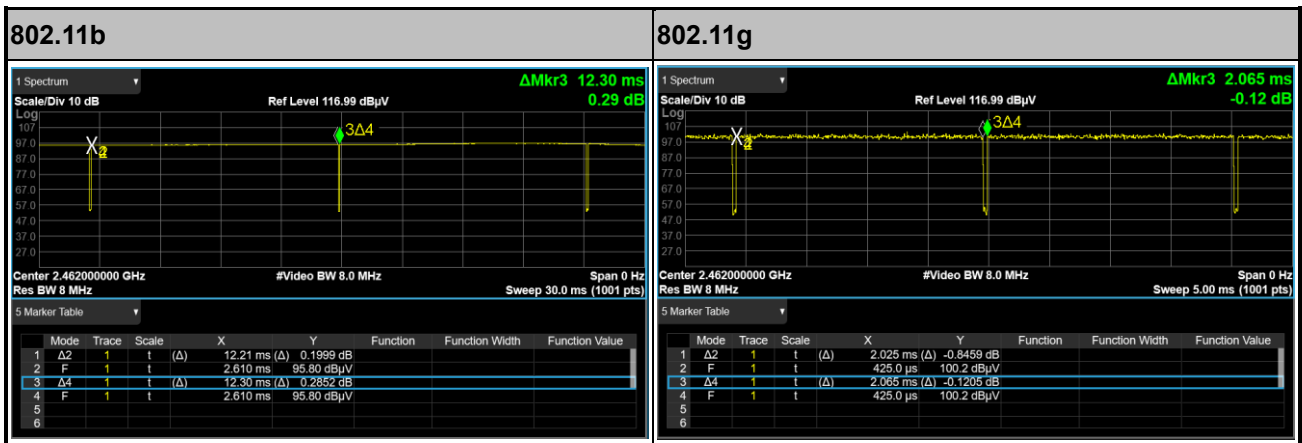

—THE END—