


TEST REPORT

Reference No..... : WTX21X04038024R1W-3
FCC ID : 2A326-RG3000
Applicant : Ewave Mobile
Address..... : 19 Magshimim Petah-Tikva Israel
Product Name : Barcode Scanner
Test Model. : RG3000
Standards : FCC Part 15.249
Date of Receipt sample : Apr. 23, 2021
Date of Test..... : Apr. 23, 2021 to May. 25, 2021
Date of Issue : Dec. 20, 2021
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

Jack Huang

Lion Cai

Silin Chen

Jack Huang/ Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
2. SUMMARY OF TEST RESULTS	10
3. ANTENNA REQUIREMENTS.....	11
3.1 STANDARD APPLICABLE.....	11
3.2 TEST RESULT.....	11
4. RADIATED EMISSIONS.....	12
4.1 STANDARD APPLICABLE.....	12
4.2 TEST PROCEDURE.....	12
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
4.4 SUMMARY OF TEST RESULTS/PLOTS	15
5. OUT OF BAND EMISSIONS.....	19
5.1 STANDARD APPLICABLE.....	19
5.2 TEST PROCEDURE.....	19
5.3 SUMMARY OF TEST RESULTS/PLOTS	19
6. EMISSION BANDWIDTH.....	24
6.1 STANDARD APPLICABLE.....	24
6.2 TEST PROCEDURE.....	24
6.3 SUMMARY OF TEST RESULTS/PLOTS	24
7. CONDUCTED EMISSIONS	26
7.1 TEST PROCEDURE.....	26
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	26
7.3 TEST RECEIVER SETUP	26
7.4 SUMMARY OF TEST RESULTS/PLOTS	26
APPENDIX PHOTOGRAPHS.....	29

Report version

Version No.	Date of issue	Description
Rev.00	May. 25, 2021	Original report WTX21X04038024W-3
Rev.01	Dec. 20, 2021	Refer the old report WTX21X04038024W-3, updated the model name, cert holder and trade name, but the circuit and the electronic construction do not change, declared by the manufacturer. So the test data from the original report
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Ewave Mobile
Address of applicant: 19 Magshimim Petah-Tikva Israel

Manufacturer: Guangzhou NETUM Electronic Technology Co., Ltd.
Address of manufacturer: Room 301, 6th Floor and full 3rd Floor, Building 1, No. 51
Xiangshan Avenue, Ningxi Street, Zengcheng District,
Guangzhou City, Guangdong Province, China

General Description of EUT	
Product Name:	Barcode Scanner
Trade Name:	/
Model No.:	RG3000
Adding Model(s):	/
Rated Voltage:	Battery DC 3.7V
Battery Capacity:	1200mAh
Power Adapter Model:	/
Note: The test data is gathered from a production sample, provided by the manufacturer.	

Technical Characteristics of EUT	
Frequency Range:	2407MHz-2478MHz
Max. Field Strength:	82.86dBuV/m
Modulation:	ACK
Antenna Type:	Integral Antenna
Antenna Gain:	3.0dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2407MHz
TM2	Middle Channel	2440MHz
TM3	High Channel	2478MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.20	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-26GHz $\pm 3.92\text{dB}$

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	Compliant
§15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215(c)	Emission Bandwidth	Compliant

3. Antenna Requirements

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a PCB antenna, fulfill the requirement of this section.

4. Radiated Emissions

4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.


The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.


The test setup for emission measurement below 30MHz..

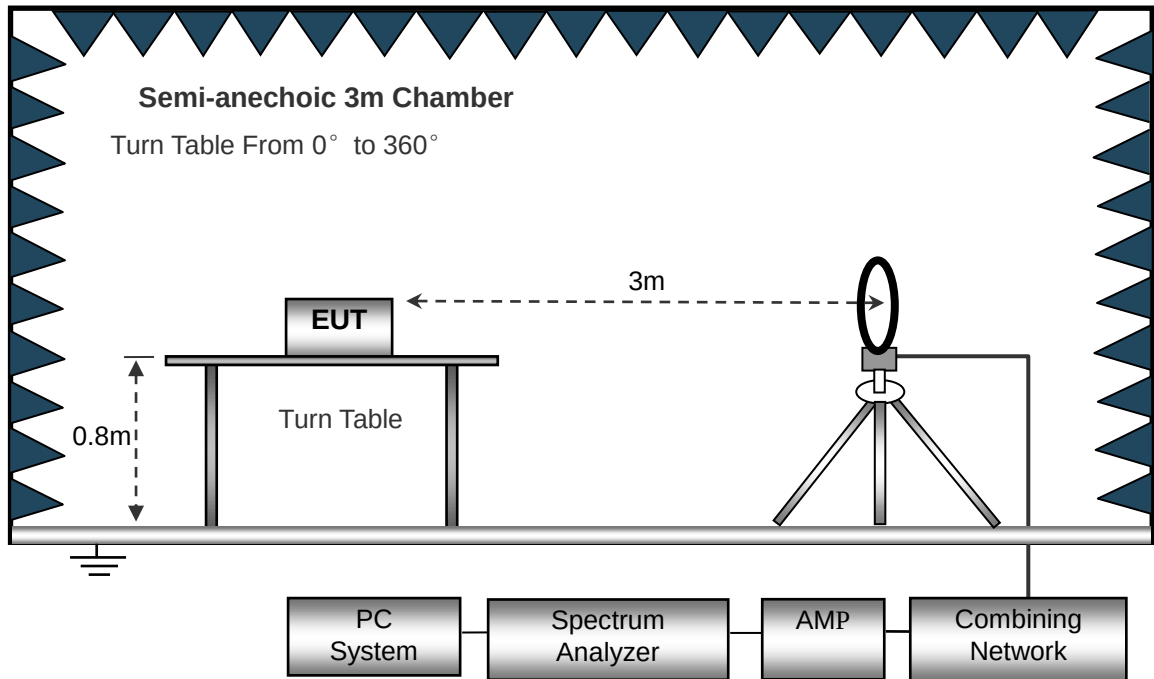

The test setup for emission measurement from 30 MHz to 1 GHz..

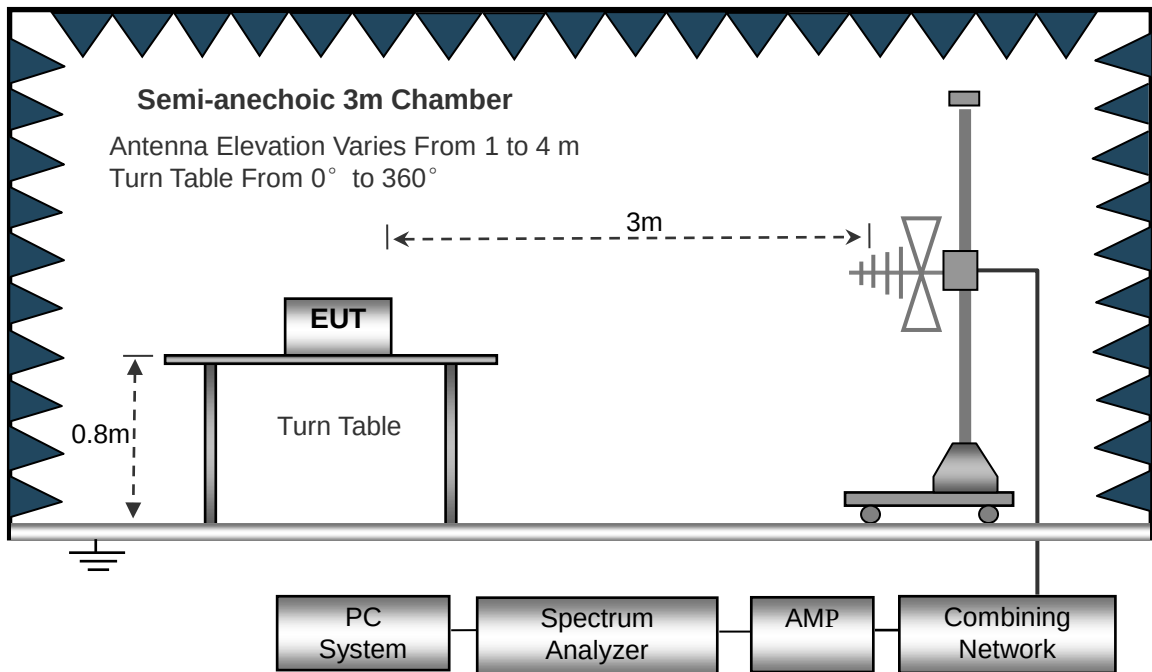

The test setup for emission measurement above 1 GHz..

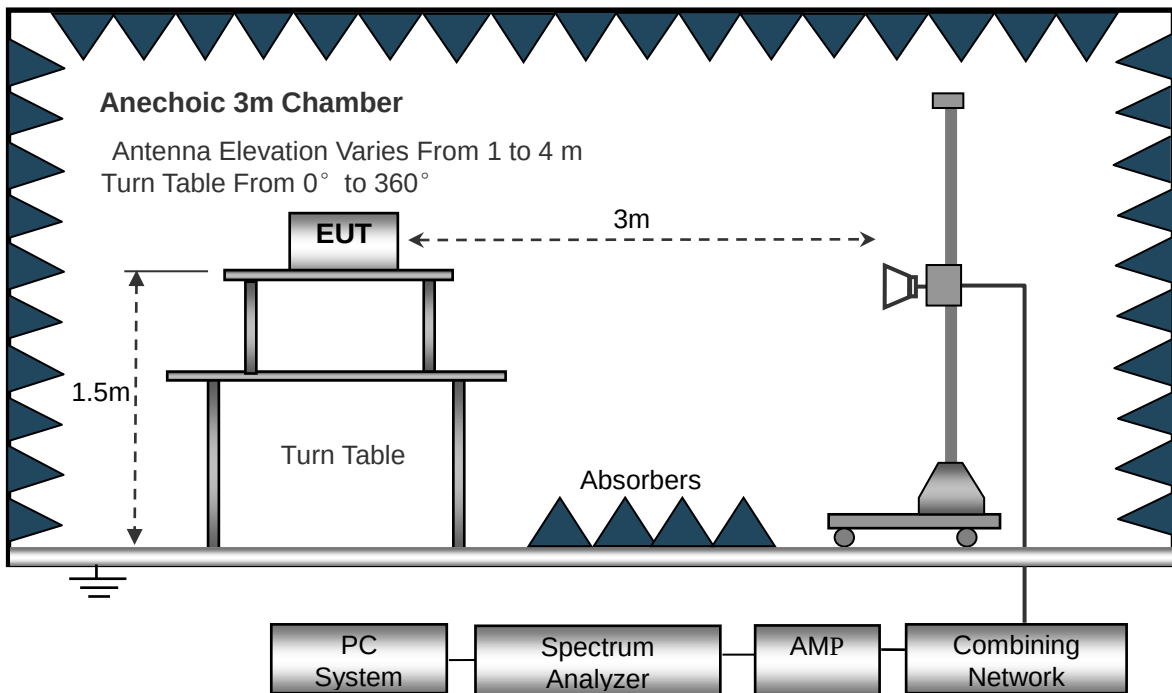

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

4.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


➤ Spurious Emissions Below 1GHz

Test Channel	Low(worst case)	Polarity:	Horizontal
--------------	-----------------	-----------	------------

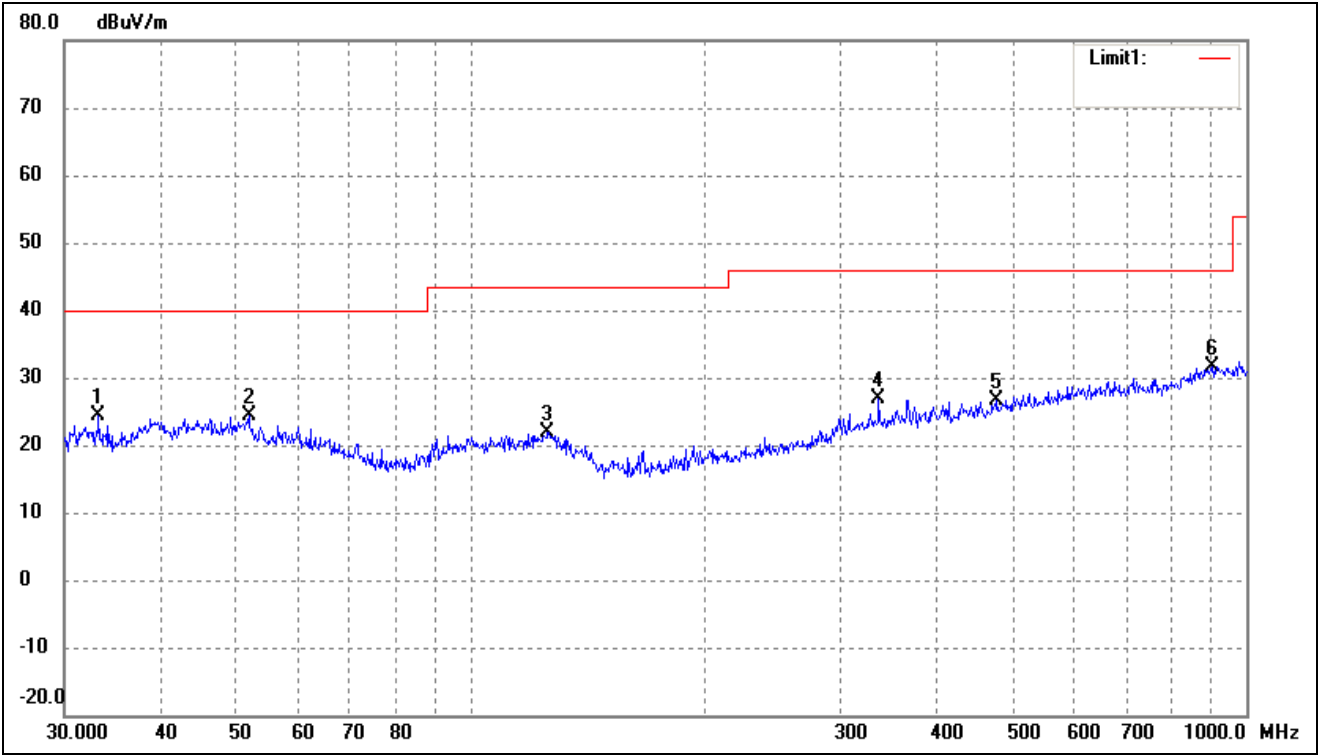

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	33.2112	38.28	-13.97	24.31	40.00	-15.69	-	-	peak
2	51.8430	36.53	-12.04	24.49	40.00	-15.51	-	-	peak
3	125.8864	37.84	-15.87	21.97	43.50	-21.53	-	-	peak
4	336.0352	35.27	-8.28	26.99	46.00	-19.01	-	-	peak
5	477.1694	31.43	-4.74	26.69	46.00	-19.31	-	-	peak
6	903.3094	29.94	1.60	31.54	46.00	-14.46	-	-	peak

Test Channel	Low(worst case)	Polarity:	Vertical
--------------	-----------------	-----------	----------

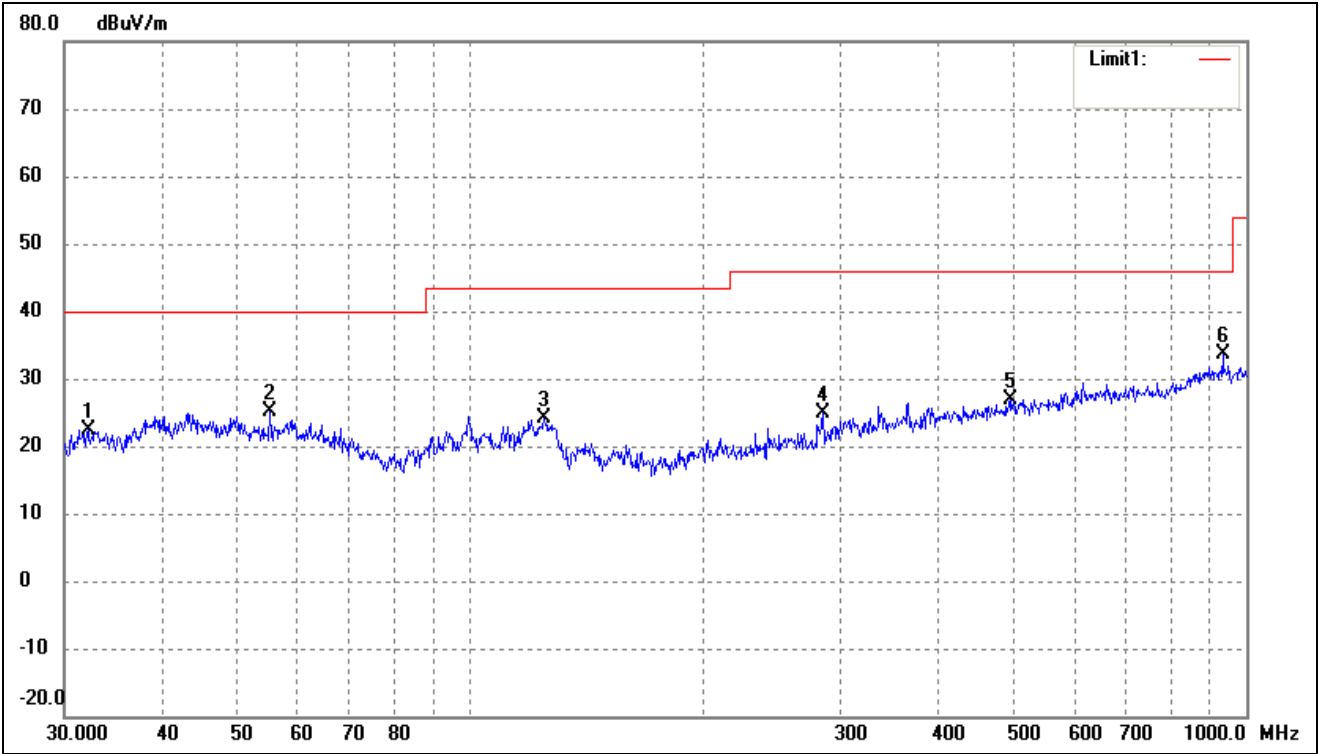

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.1795	36.40	-14.03	22.37	40.00	-17.63	-	-	peak
2	55.2207	38.18	-12.95	25.23	40.00	-14.77	-	-	peak
3	124.5690	39.65	-15.52	24.13	43.50	-19.37	-	-	peak
4	284.9767	34.97	-10.03	24.94	46.00	-21.06	-	-	peak
5	495.9344	31.06	-4.17	26.89	46.00	-19.11	-	-	peak
6	932.2715	31.83	1.71	33.54	46.00	-12.46	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

Spurious Emissions Above 1GHz

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2407MHz							
2407.002	92.33	-9.47	82.86	114	-31.14	H	PK
2407.104	69.95	-9.47	60.48	94	-33.52	H	AV
4814.000	53.88	-4.50	49.38	74.00	-24.62	H	PK
7221.000	50.13	-2.20	47.93	74.00	-26.07	H	PK
2407.104	87.52	-9.47	78.05	114	-35.95	V	PK
2407.002	67.33	-9.47	57.86	94	-36.14	V	AV
4814.000	50.75	-4.50	46.25	74.00	-27.75	V	PK
7221.000	49.69	-2.20	47.49	74.00	-26.51	V	PK
Middle Channel-2440MHz							
2439.96	89.34	-9.41	79.93	114	-34.07	H	PK
2440.15	68.09	-9.41	58.68	94	-35.32	H	AV
4880.000	55.11	-4.47	50.64	74.00	-23.36	H	PK
7320.000	48.42	-2.17	46.25	74.00	-27.75	H	PK
2440.15	87.24	-9.41	77.83	114	-36.17	V	PK
2440.15	66.73	-9.41	57.32	94	-36.68	V	AV
4880.000	52.72	-4.47	48.25	74.00	-25.75	V	PK
7320.000	48.46	-2.17	46.29	74.00	-27.71	V	PK
High Channel-2478MHz							
2477.925	89.88	-9.33	80.55	114	-33.45	H	PK
2477.975	68.32	-9.33	58.99	94	-35.01	H	AV
4956.000	53.67	-4.42	49.25	74.00	-24.75	H	PK
7434.000	49.98	-2.14	47.84	74.00	-26.16	H	PK
2478.2	83.73	-9.33	74.4	114	-39.6	V	PK
2477.8	65.03	-9.33	55.7	94	-38.3	V	AV
4956.000	51.58	-4.42	47.16	74.00	-26.84	V	PK
7434.000	49.55	-2.14	47.41	74.00	-26.59	V	PK

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

5. Out of Band Emissions

5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.


5.3 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	<54 dBuV	Pass
Highest	2483.50	<54 dBuV	Pass
	2500.00	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

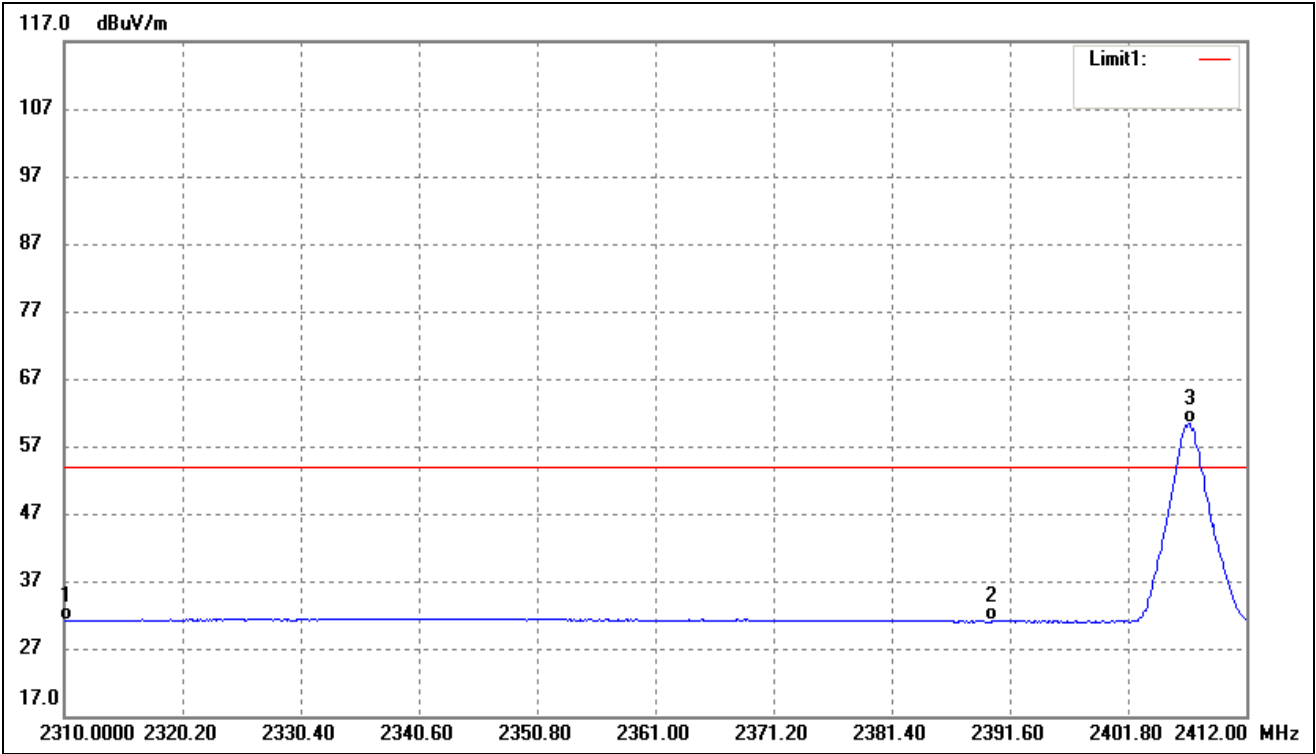

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	40.77	-9.66	31.11	54.00	-22.89	Ave Detector
	2310.000	52.96	-9.66	43.30	74.00	-30.70	Peak Detector
2	2390.000	40.57	-9.50	31.07	54.00	-22.93	Ave Detector
	2390.000	59.33	-9.50	49.83	74.00	-24.17	Peak Detector
3	2407.104	69.95	-9.47	60.48	/	/	Ave Detector
	2407.002	92.33	-9.47	82.86	/	/	Peak Detector


Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

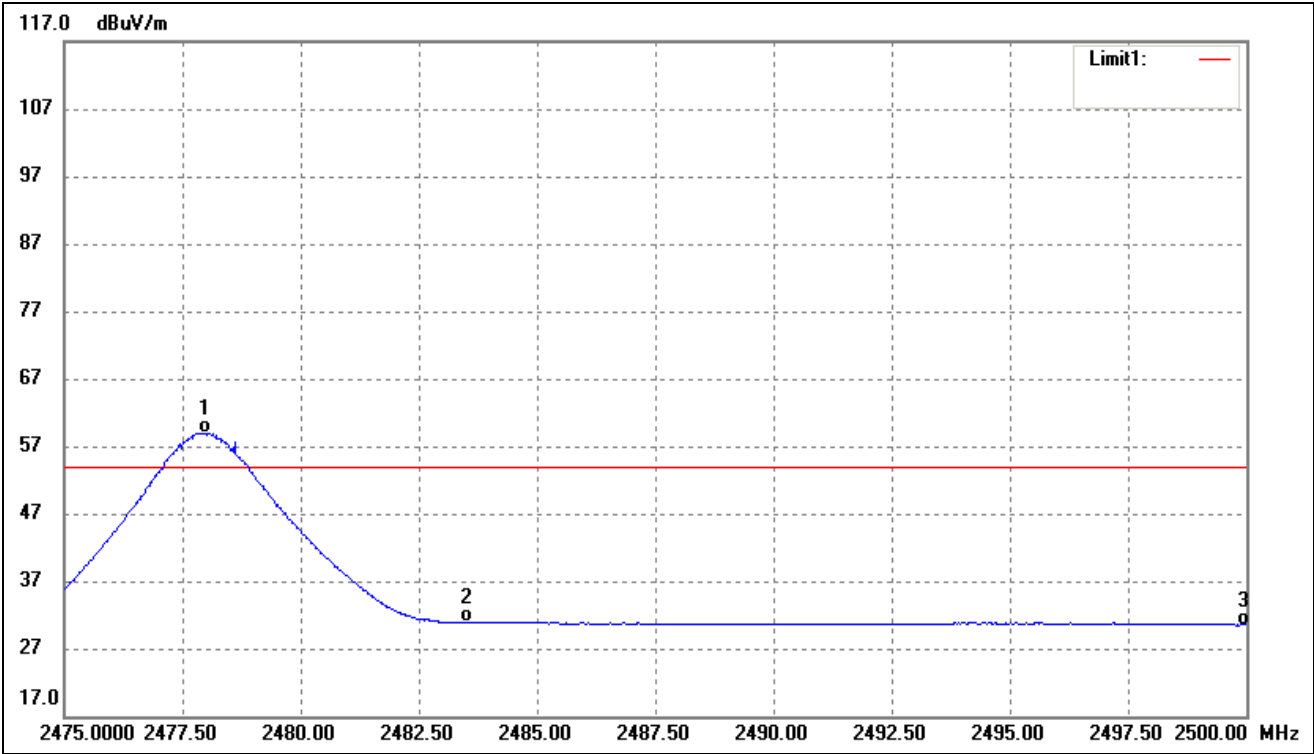

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2477.975	68.32	-9.33	58.99	/	/	Ave Detector
	2477.925	89.88	-9.33	80.55	/	/	Peak Detector
2	2483.500	40.22	-9.31	30.91	54.00	-23.09	Ave Detector
	2483.500	63.90	-9.31	54.59	74.00	-19.41	Peak Detector
3	2500.000	39.78	-9.28	30.50	54.00	-23.50	Ave Detector
	2500.000	58.59	-9.28	49.31	74.00	-24.69	Peak Detector


Band edge

Test Channel	Low	Polarity:	Horizontal (worst case)
--------------	-----	-----------	-------------------------

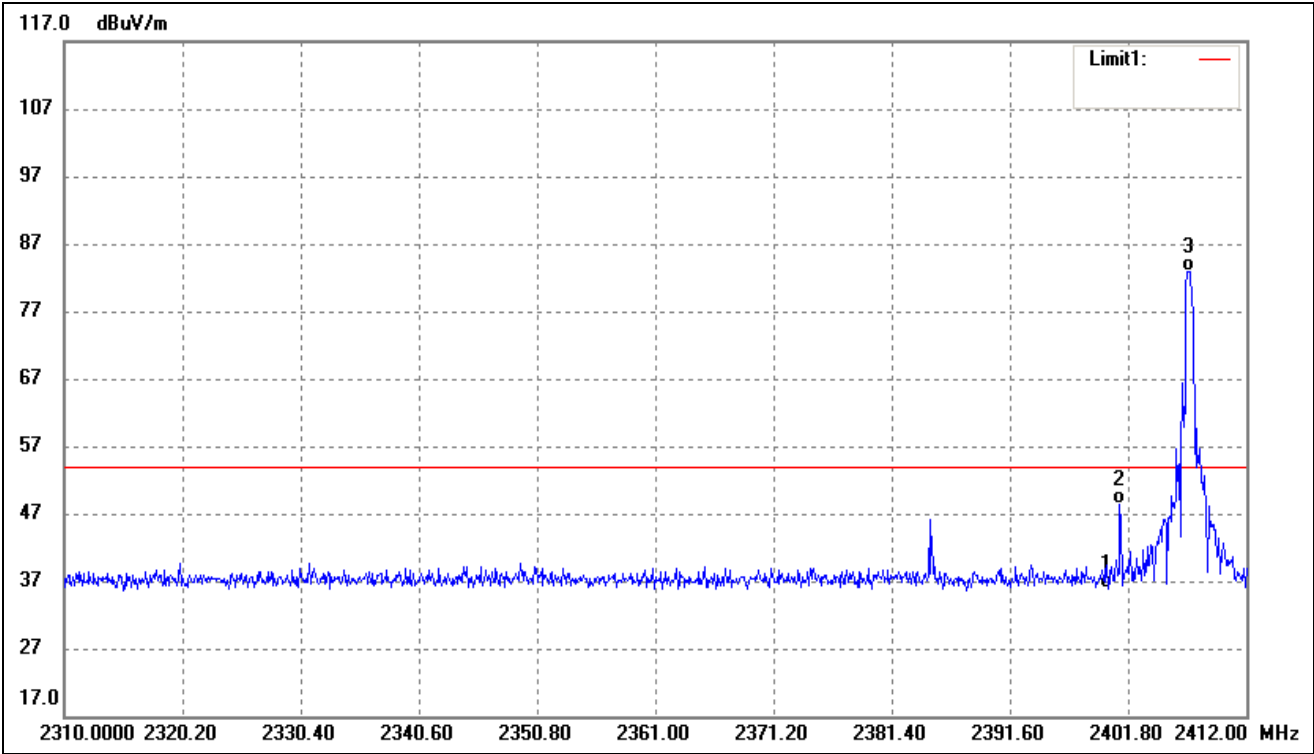

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2400.000	45.48	-9.48	36.00	54.00	-18.00	Ave Detector
	2400.000	47.47	-9.48	37.99	74.00	-36.01	Peak Detector
2	2401.086	57.86	-9.48	48.38	54.00	-5.62	Ave Detector
	2401.086	58.80	-9.48	49.32	74.00	-24.68	Peak Detector
3	2407.002	92.27	-9.47	82.80	/	/	Ave Detector
	2407.002	92.32	-9.47	82.85	/	/	Peak Detector

Test Channel	High	Polarity:	Horizontal (worst case)
--------------	------	-----------	-------------------------

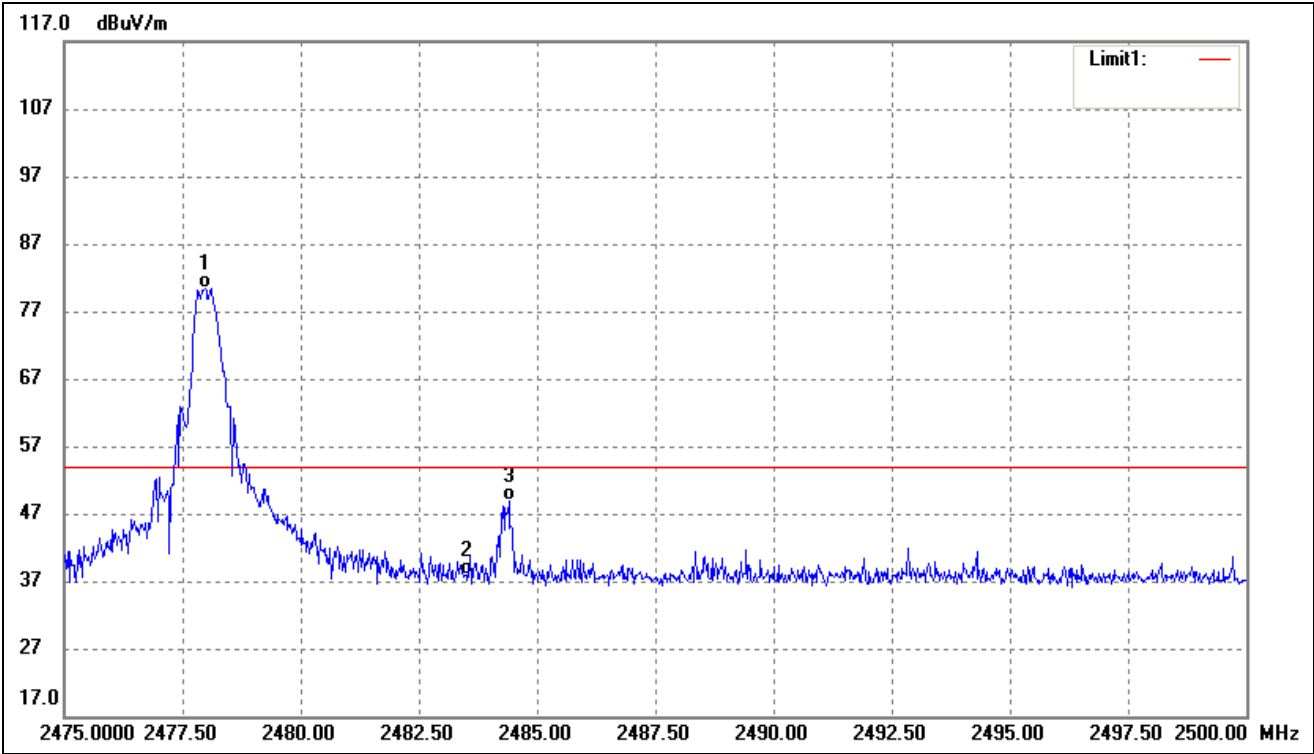

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2477.975	89.64	-9.33	80.31	/	/	Ave Detector
	2478.100	89.66	-9.33	80.33	/	/	Peak Detector
2	2483.500	47.11	-9.31	37.80	54.00	-16.20	Ave Detector
	2483.500	48.60	-9.31	39.29	74.00	-34.71	Peak Detector
3	2484.400	58.21	-9.31	48.90	54.00	-5.10	Ave Detector
	2484.275	58.24	-9.31	48.93	74.00	-25.07	Peak Detector

6. Emission Bandwidth

6.1 Standard Applicable

According to 15.215(c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW $\geq$ 1% 20dB Bandwidth, VBW $\geq$ RBW

Sweep = auto

Detector function = peak




Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

6.3 Summary of Test Results/Plots

Test Channel	20dB Bandwidth(kHz)
Low Channel	410
Middle Channel	430
High Channel	430

Please refer to the following test plots

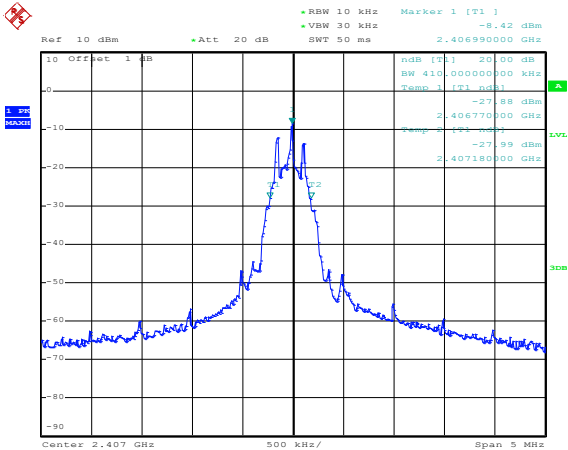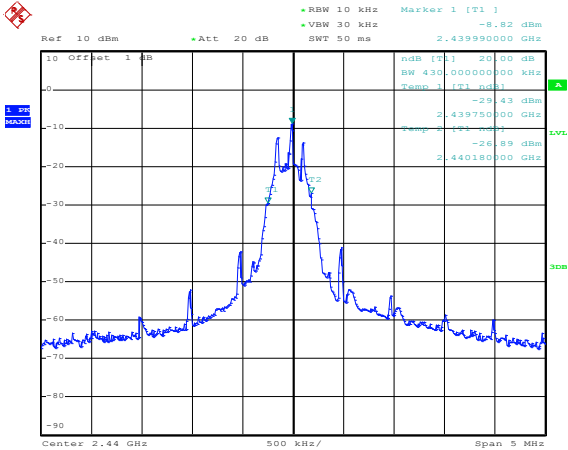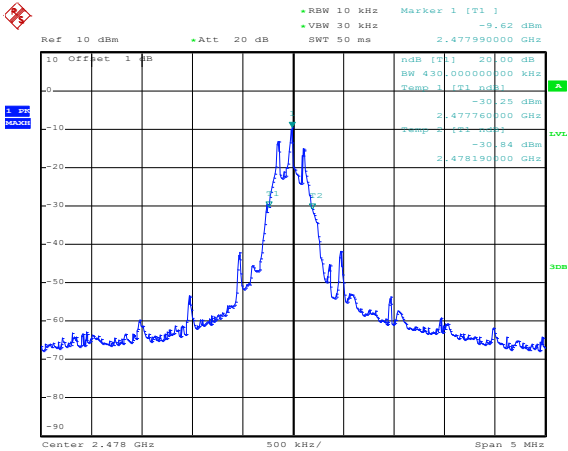Low Channel	 The spectrum plot for the Low Channel shows a signal centered at 2.407 GHz. The plot includes a grid with frequency on the x-axis (500 kHz/div) and power in dBm on the y-axis (-90 to 10). A blue trace shows the signal spectrum. Two markers, T1 and T2, are placed on the signal. T1 is at the peak, and T2 is at the -3dB point. The plot also shows a noise floor and a 3dB bandwidth. The date and time are 16.MAY.2021 15:24:14. Date: 16.MAY.2021 15:24:14
Middle Channel	 The spectrum plot for the Middle Channel shows a signal centered at 2.44 GHz. The plot includes a grid with frequency on the x-axis (500 kHz/div) and power in dBm on the y-axis (-90 to 10). A blue trace shows the signal spectrum. Two markers, T1 and T2, are placed on the signal. T1 is at the peak, and T2 is at the -3dB point. The plot also shows a noise floor and a 3dB bandwidth. The date and time are 16.MAY.2021 15:23:25. Date: 16.MAY.2021 15:23:25
High Channel	 The spectrum plot for the High Channel shows a signal centered at 2.478 GHz. The plot includes a grid with frequency on the x-axis (500 kHz/div) and power in dBm on the y-axis (-90 to 10). A blue trace shows the signal spectrum. Two markers, T1 and T2, are placed on the signal. T1 is at the peak, and T2 is at the -3dB point. The plot also shows a noise floor and a 3dB bandwidth. The date and time are 16.MAY.2021 15:22:37. Date: 16.MAY.2021 15:22:37

7. Conducted Emissions


7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

7.2 Basic Test Setup Block Diagram

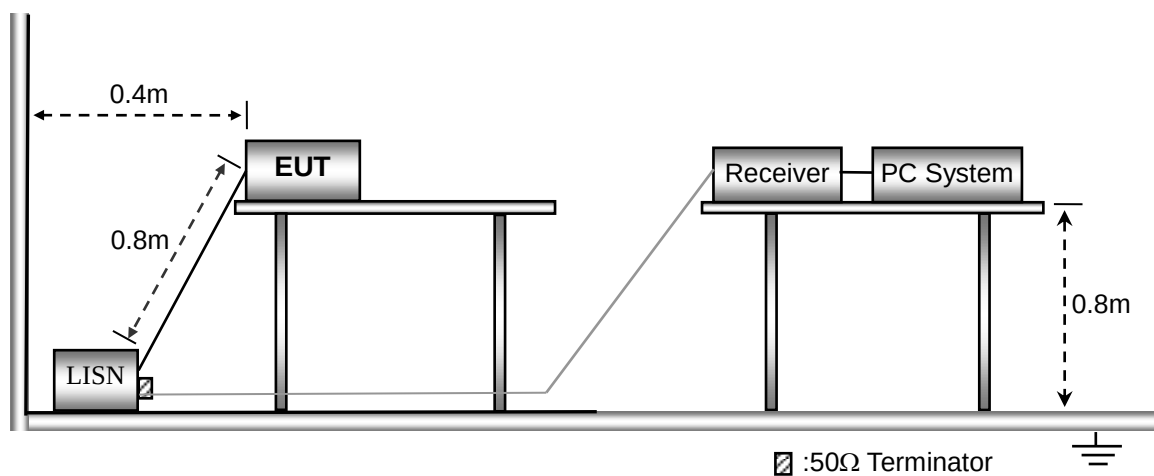


7.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal


7.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

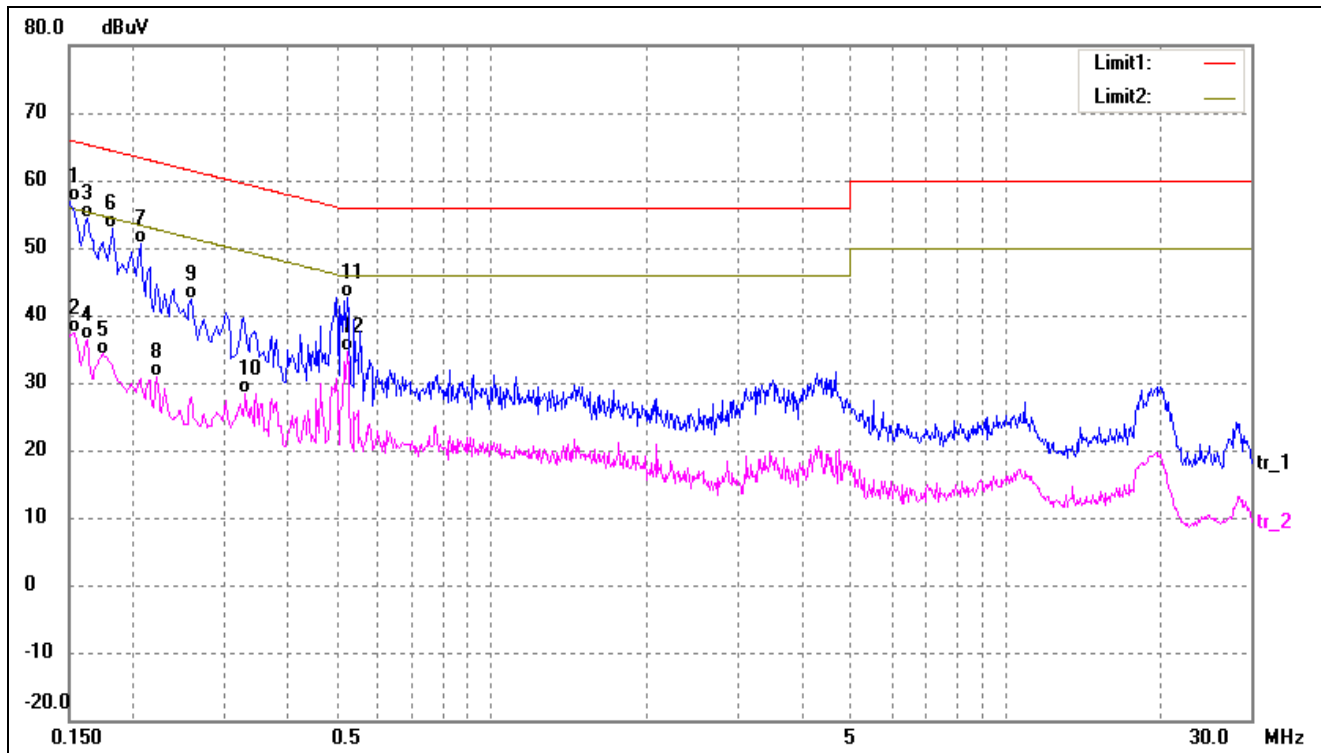

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1499	46.52	10.25	56.77	66.00	-9.23	QP
2	0.1539	27.23	10.25	37.48	55.78	-18.30	AVG
3	0.1620	44.14	10.26	54.40	65.36	-10.96	QP
4	0.1620	26.12	10.26	36.38	55.36	-18.98	AVG
5	0.1737	23.99	10.26	34.25	54.78	-20.53	AVG
6	0.1819	42.63	10.26	52.89	64.39	-11.50	QP
7	0.2058	40.35	10.27	50.62	63.37	-12.75	QP
8	0.2220	20.69	10.26	30.95	52.74	-21.79	AVG
9	0.2580	32.16	10.26	42.42	61.49	-19.07	QP
10	0.3300	18.18	10.26	28.44	49.45	-21.01	AVG
11	0.5220	32.40	10.22	42.62	56.00	-13.38	QP
12	0.5220	24.46	10.22	34.68	46.00	-11.32	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

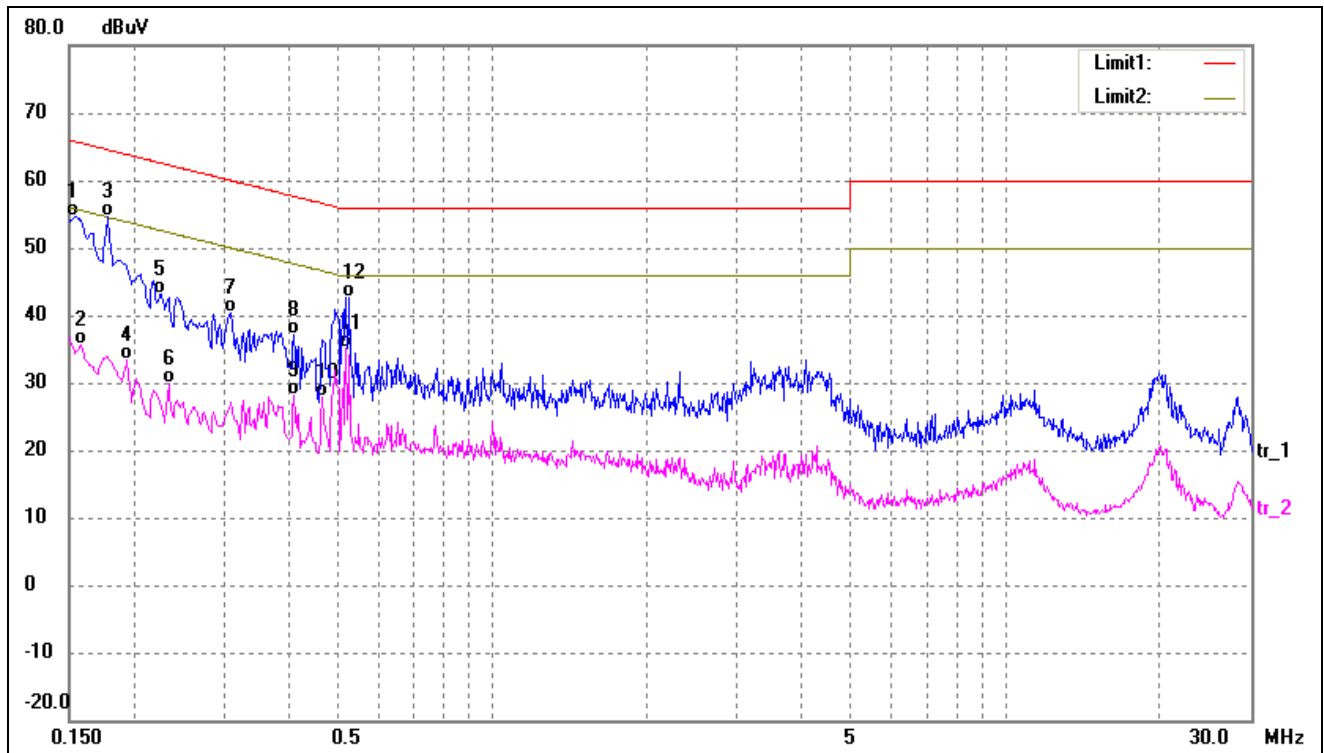

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1539	44.46	10.25	54.71	65.78	-11.07	QP
2	0.1580	25.29	10.25	35.54	55.56	-20.02	AVG
3*	0.1779	44.29	10.26	54.55	64.58	-10.03	QP
4	0.1940	23.06	10.27	33.33	53.86	-20.53	AVG
5	0.2260	32.94	10.26	43.20	62.59	-19.39	QP
6	0.2340	19.51	10.26	29.77	52.30	-22.53	AVG
7	0.3099	30.20	10.24	40.44	59.97	-19.53	QP
8	0.4097	26.89	10.23	37.12	57.65	-20.53	QP
9	0.4097	17.98	10.23	28.21	47.65	-19.44	AVG
10	0.4660	17.71	10.23	27.94	46.58	-18.64	AVG
11	0.5180	24.86	10.22	35.08	46.00	-10.92	AVG
12	0.5260	32.34	10.22	42.56	56.00	-13.44	QP

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******