

FCC Test Report

FCC ID : NKR-DNUAPO1

Equipment : 802.11N 2*2 USB module

Model No. : DNUA-PO1

Brand Name : WNC

Applicant : Wistron NeWeb Corporation

Address : 20 Park Avenue II, Hsinchu Science Park,

Hsinchu 308, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Jul. 08, 2014

Tested Date : Jul. 21 ~ Aug. 11, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac-MRA



Report No.: FR470802AC Report Version: Rev. 01 Page: 1 of 62



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	
3.3	RF Output Power	17
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62



Release Record

Report No.	Version	Description	Issued Date
FR470802AC	Rev. 01	Initial issue	Aug. 29, 2014

Report No.: FR470802AC Page: 3 of 62



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 1.614MHz 23.32(Margin -22.68dB) - AV	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 1641.33 & 2288 MHz	Pass
15.209	Naulated Lillissions	53.48 (Margin -0.52dB) - AV	1 833
15.247(b)(3)	Fundamental Emission Output Power	Max Power [dBm]: 26.72	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR470802AC Page: 4 of 62



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15			
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant.	Model	Type	Type Connector		Operating Frequencies (MHz) / Antenna Gain (dBi)				
No.	inodei Type			2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850	
1	Left	monopole	MCX	5.81	11.55	11.65	11.66	10.72	
2	Right	monopole	MCX	5.75	11.37	11.27	11.41	10.66	

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host
-------------------	----------------

1.1.4 Accessories

N/A

Report No.: FR470802AC Page: 5 of 62



1.1.5 Channel List

Frequenc	y band (MHz)	2400~2483.5		
802.11 b	/ g / n HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI, Version 2.3					
	Mode	Duty cycle (%)	Duty factor (dB)			
	11b	99.76%	0.01			
Duty Cycle and Duty Factor	11g	98.08%	0.08			
	HT20	98.20%	0.08			
	HT40	95.12%	0.22			

Report No.: FR470802AC Page: 6 of 62




1.1.7 Conducted Power (dBm)

Modulation Mode	Test Frequency (MHz)	Conducted Power(dBm)
11b	2412	21.28
11b	2437	20.35
11b	2462	20.85
11g	2412	22.09
11g	2437	26.72
11g	2462	21.08
HT20	2412	21.48
HT20	2437	26.25
HT20	2462	20.16
HT40	2422	19.14
HT40	2437	22.05
HT40	2452	19.04

1.2 Local Support Equipment List

	Support Equipment List								
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)			
1	Notebook	DELL	E6430		DoC	USB 1.2m shielded cable w/o core.			
2	DC Power Supply	GWINSTEK	GPC-60300		DoC				

1.3 Test Setup Chart

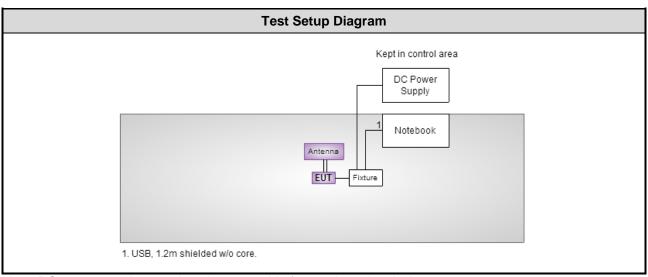

Note: DC power supply was placed on test table for conducted emission test.

Report No.: FR470802AC Page: 7 of 62



1.4 The Equipment List

Conducted Emission								
Conduction room 1 / (CO01-WS)								
Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014				
SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014				
SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014				
Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015				
NA	50	04	Apr. 18, 2014	Apr. 17, 2015				
	Conduction room 1 / (Manufacturer R&S SCHWARZBECK SCHWARZBECK Woken	Conduction room 1 / (CO01-WS) Manufacturer Model No. R&S ESCS 30 SCHWARZBECK Schwarzbeck 8127 SCHWARZBECK Schwarzbeck 8127 Woken CFD200-NL	Manufacturer Model No. Serial No. R&S ESCS 30 100169 SCHWARZBECK Schwarzbeck 8127 8127-667 SCHWARZBECK Schwarzbeck 8127 8127-666 Woken CFD200-NL CFD200-NL-001	Conduction room 1 / (CO01-WS) Manufacturer Model No. Serial No. Calibration Date R&S ESCS 30 100169 Oct. 15, 2013 SCHWARZBECK Schwarzbeck 8127 8127-667 Nov. 23, 2013 SCHWARZBECK Schwarzbeck 8127 8127-666 Dec. 04, 2013 Woken CFD200-NL CFD200-NL-001 Apr. 23, 2014				

Test Item	Radiated Emission	Radiated Emission						
Test Site	966 chamber 3 / (03C	:H03-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
Spectrum Analyzer	Agilent	N9010A	MY53400091	Oct. 07, 2013	Oct. 06, 2014			
Receiver	Agilent	N9038A	MY53290044	Jan. 08, 2014	Jan. 07, 2015			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	Feb. 07, 2014	Feb. 06, 2015			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 20, 2014	Feb. 19, 2015			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014			
Preamplifier	EMC	EMC02325	980187	Nov. 22, 2013	Nov. 21, 2014			
Preamplifier	Agilent	83017A	MY53270014	Nov. 22, 2013	Nov. 21, 2014			
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 19, 2014	Feb. 18, 2015			
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22601/4	Feb. 19, 2014	Feb. 18, 2015			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 19, 2014	Feb. 18, 2015			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Feb. 17, 2014	Feb. 16, 2015			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Feb. 17, 2014	Feb. 16, 2015			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Feb. 17, 2014	Feb. 16, 2015			
Note: Calibration Inter	rval of instruments liste	d above is one year.						

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014			
Note: Calibration Interval of instruments listed above is two year.								

Report No.: FR470802AC Page: 8 of 62



Test Item	RF Conducted						
Test Site	(TH01-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015		
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014		
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014		
Note: Calibration Interval of instruments listed above is one year.							

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±34.134 Hz						
Conducted power	±0.808 dB						
Frequency error	±34.134 Hz						
Temperature	±0.6 °C						
Conducted emission	±2.670 dB						
AC conducted emission	±2.92 dB						
Radiated emission ≤ 1GHz	±3.26 dB						
Radiated emission > 1GHz	±4.94 dB						

Report No.: FR470802AC Page: 9 of 62



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 68%	Skys Huang
Radiated Emissions	03CH03-WS	21-24°C / 61-65%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	22°C / 65%	Brad Wu

FCC site registration No.: 390588IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	
Fundamental Emission Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

NOTE:

Report No.: FR470802AC Page: 10 of 62

^{1.} The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

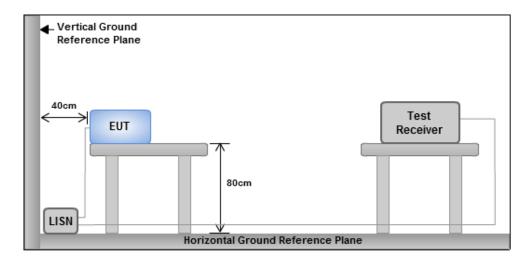


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR470802AC Page: 11 of 62




Test Result of Conducted Emissions 3.1.4

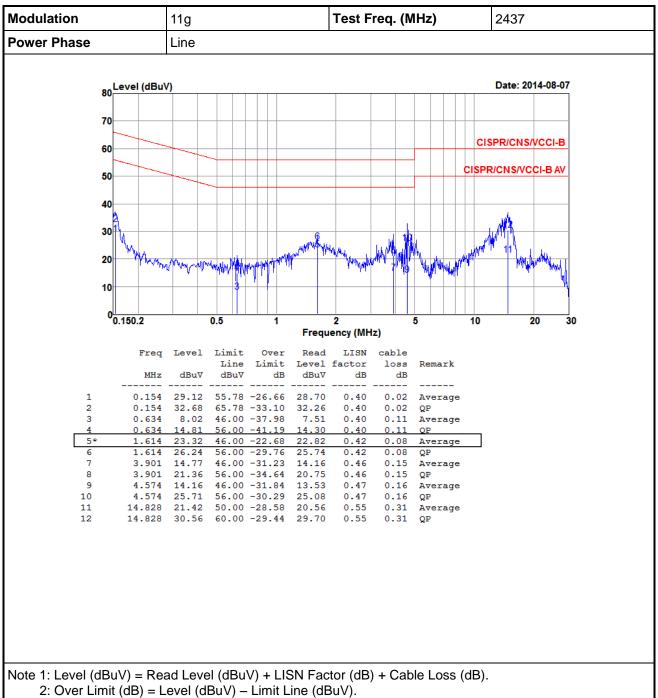

Report No.: FR470802AC Page: 12 of 62



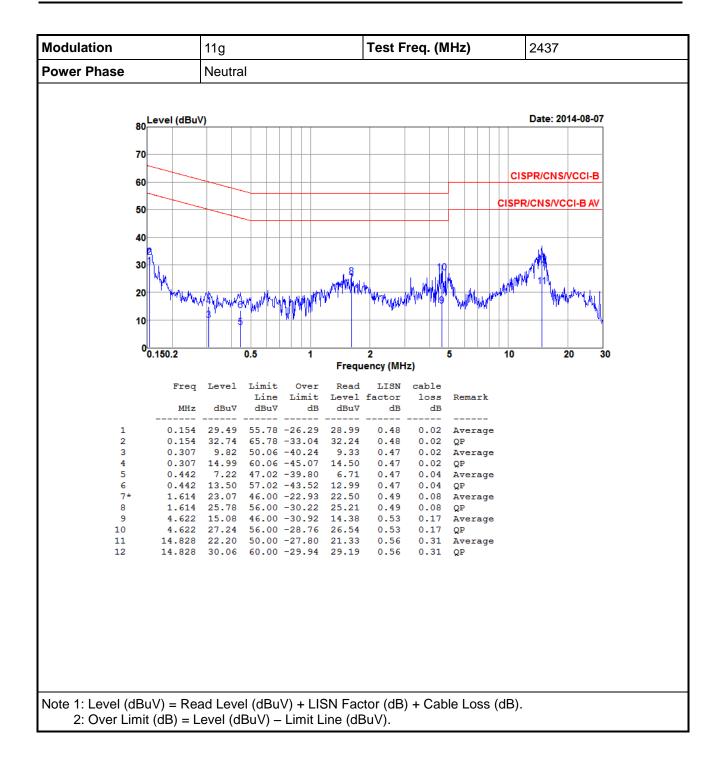

Report No.: FR470802AC Page: 13 of 62



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup




Report No.: FR470802AC Page: 14 of 62



3.2.4 Test Result of 6dB and Occupied Bandwidth


Modulation	NI.	6dB Bandwidth (MHz)					Limit (Idua)
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	2	2412	10.09	10.09			500
11b	2	2437	10.09	10.09			500
11b	2	2462	10.03	10.09			500
11g	2	2412	16.35	16.35			500
11g	2	2437	16.35	16.35			500
11g	2	2462	16.35	16.35			500
HT20	2	2412	17.57	17.22			500
HT20	2	2437	16.99	16.93			500
HT20	2	2462	17.57	17.57			500
HT40	2	2422	35.94	36.29			500
HT40	2	2437	36.41	36.17			500
HT40	2	2452	36.17	36.17			500

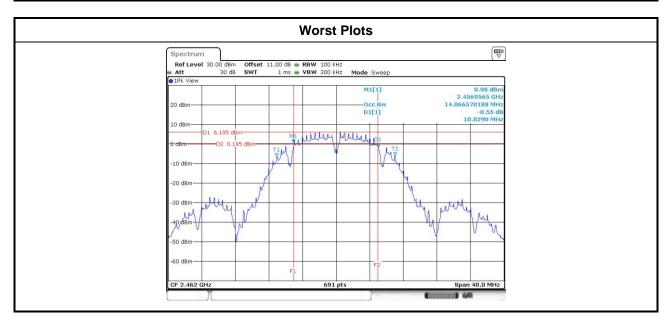

Report No.: FR470802AC Page: 15 of 62



Modulation	N.	Freq.		99% Occupied E	Bandwidth (MHz)	
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11b	2	2412	14.22	14.11		
11b	2	2437	14.07	14.04		
11b	2	2462	14.07	14.11		
11g	2	2412	17.00	16.79		
11g	2	2437	18.45	17.80		
11g	2	2462	16.97	16.79		
HT20	2	2412	18.09	17.95		
HT20	2	2437	18.99	18.42		
HT20	2	2462	18.09	17.98		
HT40	2	2422	37.25	37.12		
HT40	2	2437	37.12	37.12		
HT40	2	2452	37.25	37.12		

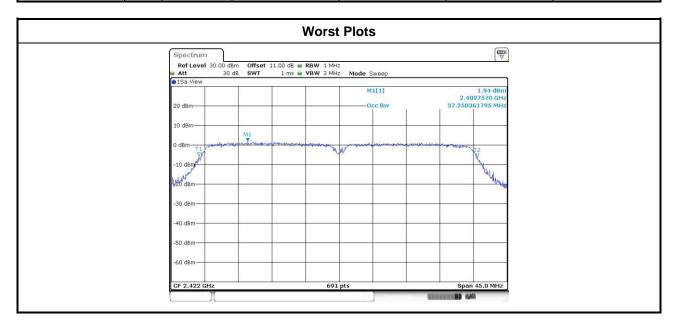

Report No.: FR470802AC Page: 16 of 62



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

Antenna gain > 6dBi

Non Fixed, point to point operations.
The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB

Fixed, point to point operations
Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations, no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR470802AC Page: 17 of 62



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq.	Peak		d output p 3m)	l output power m)		Total Power	Limit
Wode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	2	2412	18.45	18.09			134.401	21.28	30.00
11b	2	2437	17.45	17.22			108.313	20.35	30.00
11b	2	2462	17.94	17.73			121.523	20.85	30.00
11g	2	2412	19.15	19.01			161.840	22.09	30.00
11g	2	2437	23.60	23.81			469.523	26.72	30.00
11g	2	2462	18.02	18.12			128.250	21.08	30.00
HT20	2	2412	18.52	18.41			140.464	21.48	30.00
HT20	2	2437	23.14	23.33			421.341	26.25	30.00
HT20	2	2462	17.02	17.27			103.684	20.16	30.00
HT40	2	2422	16.23	16.02			81.970	19.14	30.00
HT40	2	2437	18.97	19.11			160.356	22.05	30.00
HT40	2	2452	15.81	16.24			80.179	19.04	30.00

Modulation Mode	N _{TX}	Freq.	Conduc	Conducted (average) output power (dBm)		t power	Total Power	Total Power	Limit
Wiode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	2	2412	16.43	16.01			83.857	19.24	30.00
11b	2	2437	15.29	15.14			66.465	18.23	30.00
11b	2	2462	15.81	15.73			75.518	18.78	30.00
11g	2	2412	11.65	11.31			28.142	14.49	30.00
11g	2	2437	18.56	18.76			146.942	21.67	30.00
11g	2	2462	9.54	9.71			18.349	12.64	30.00
HT20	2	2412	10.61	10.33			22.297	13.48	30.00
HT20	2	2437	17.73	17.81			119.687	20.78	30.00
HT20	2	2462	8.51	9.04			15.113	11.79	30.00
HT40	2	2422	7.56	7.51			11.338	10.55	30.00
HT40	2	2437	11.37	11.51			27.867	14.45	30.00
HT40	2	2452	7.42	7.82			11.574	10.63	30.00

Note: Conducted average output power is for reference only.

Report No.: FR470802AC Page: 18 of 62



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - 2. Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup



Report No.: FR470802AC Page: 19 of 62




Test Result of Power Spectral Density 3.4.4

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	2	2412	-5.28	5.21
11b	2	2437	-6.12	5.21
11b	2	2462	-5.27	5.21
11g	2	2412	-11.16	5.21
11g	2	2437	-0.43	5.21
11g	2	2462	-12.29	5.21
HT20	2	2412	-12.54	5.21
HT20	2	2437	-4.87	5.21
HT20	2	2462	-14.06	5.21
HT40	2	2422	-18.77	5.21
HT40	2	2437	-14.78	5.21
HT40	2	2452	-18.67	5.21

Note:

- Test result is bin-by-bin summing measured value of each TX port.
 Directional gain = 10 * log((10^{5.81/20}+10^{5.75/20})²/2) = 8.79 dBi > 6 dBi. Limit shall be reduced to 8 dBm - (8.79 dBi - 6 dBi) = 5.21 dBm

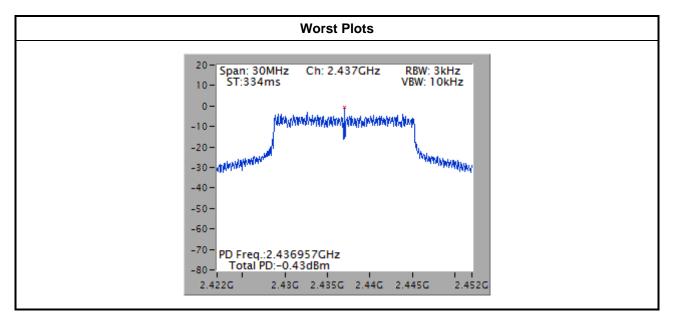

Report No.: FR470802AC Page: 20 of 62



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit								
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)					
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300					
0.490~1.705	24000/F(kHz)	33.8 - 23	30					
1.705~30.0	30	29	30					
30~88	100	40	3					
88~216	150	43.5	3					
216~960	200	46	3					
Above 960	500	54	3					

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR470802AC Page: 21 of 62




3.5.3 Test Setup

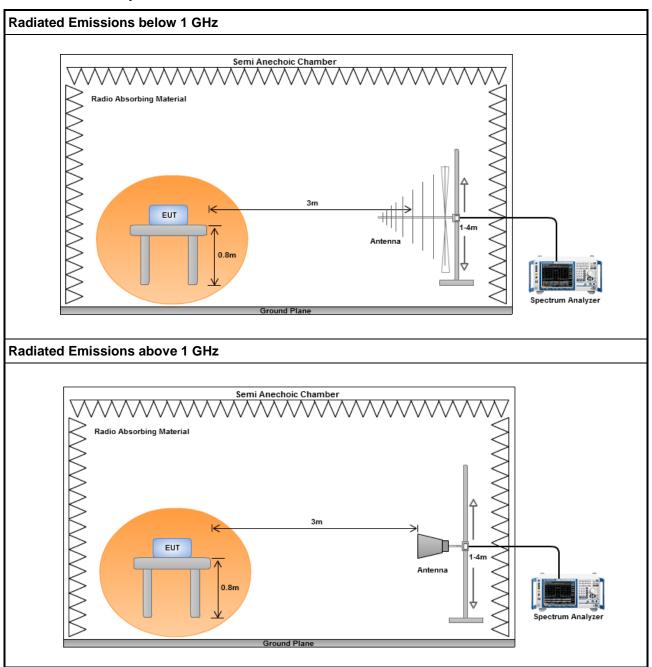

Report No.: FR470802AC Page: 22 of 62



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

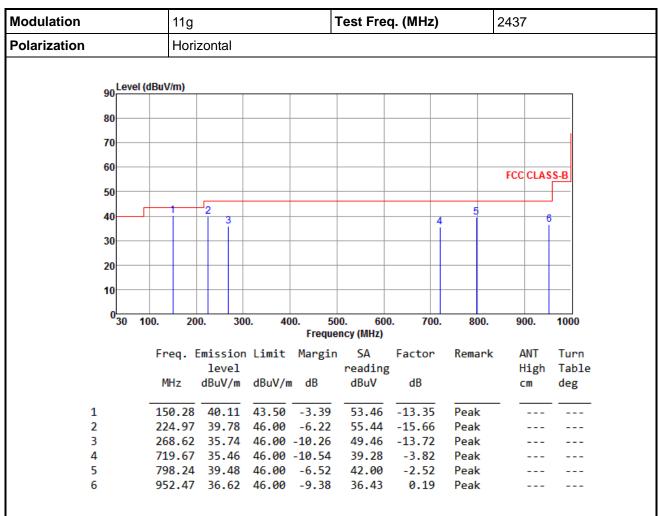

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR470802AC Page: 23 of 62




Modulation			11g				Test Freq. (MHz)			2437	
Polarization		Vertical									
	90Le	vel (dBu	I (dBuV/m)								
	00										
	80										
	70										
	60										
										FCC CLA	SS-B
	50								4	5 6	
	40		2								
	30		3								
	30										
	20										
	10										
	030	100.	200.	30	0. 40	0. 50	0. 600 ncy (MHz)	0. 700.	800.	900.	1000
		г.	Em	iccion	Limit			Factor	Remark	ANT	Turn
		F		level	LIMIT	Margin	reading		Kemark	High	
					dBuV/m	dB	dBuV	, dB		cm	deg
1					43.50		53.86		Peak		
2				37.05		-6.45	50.64		Peak		
3				33.63 42.92	46.00	-12.37 -3.08	49.66 45.44	-16.03 -2.52	Peak Peak		
5				42.58		-3.42	44.43	-1.85	Peak		
6			97.18			-4.63	42.19	-0.82	Peak		

*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR470802AC Page: 24 of 62



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

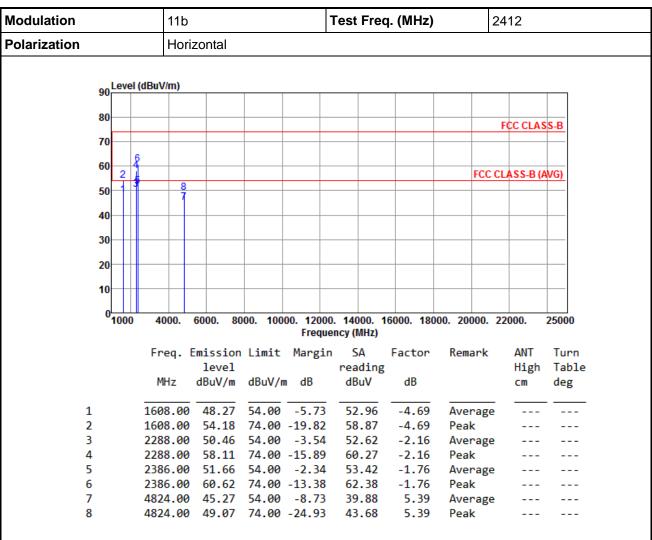


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR470802AC Page: 25 of 62



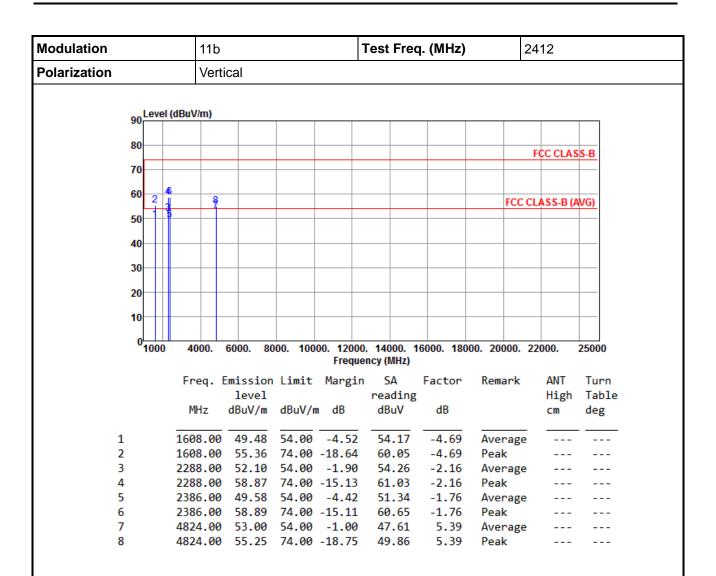


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 26 of 62



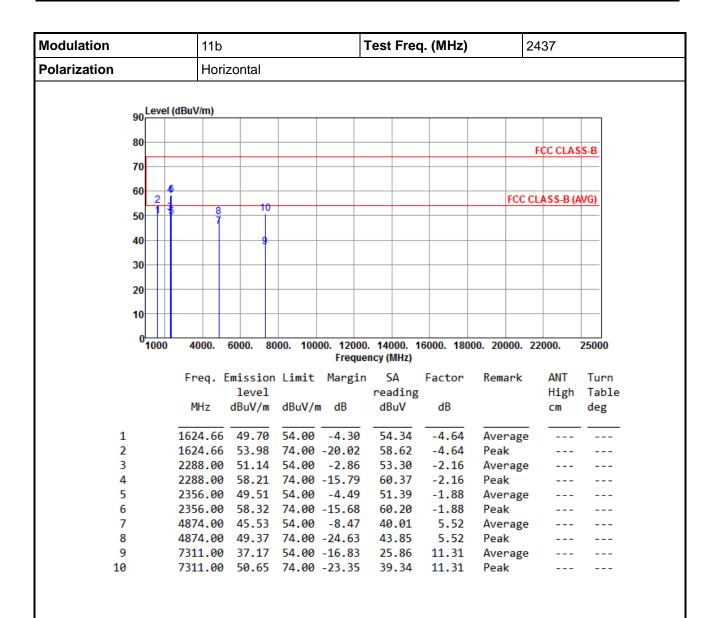


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 27 of 62



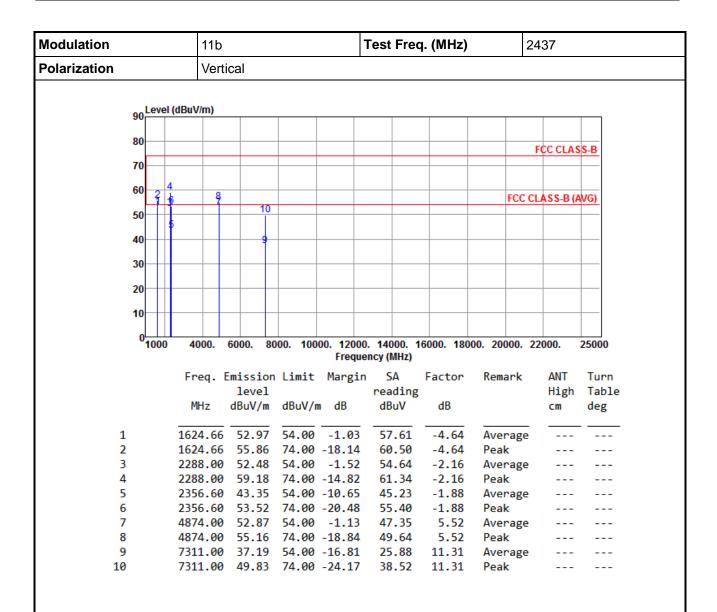


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 28 of 62



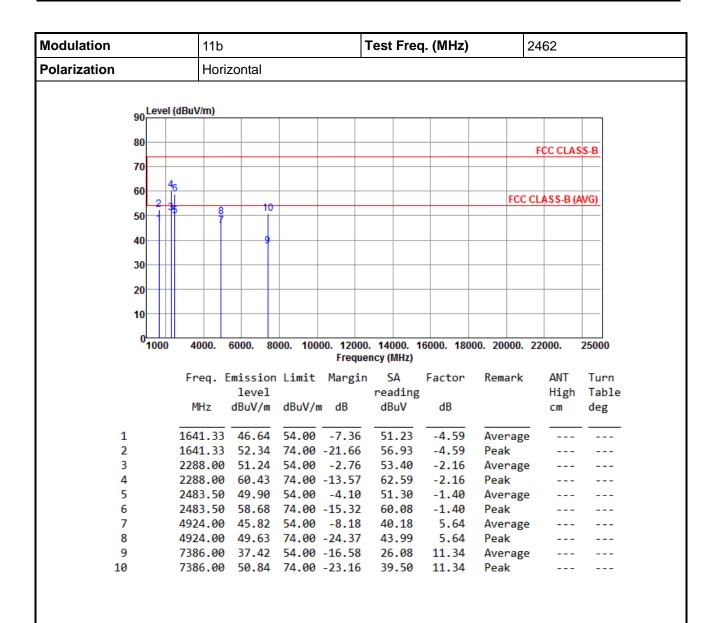


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 29 of 62



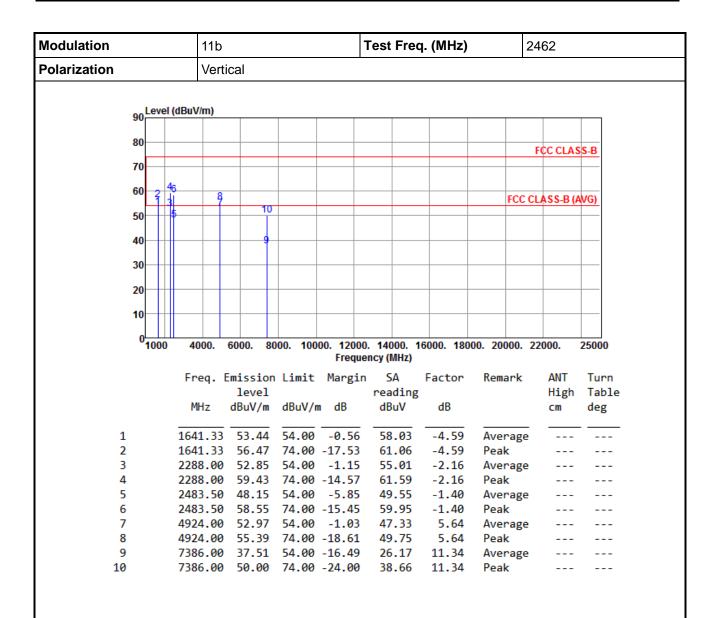


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 30 of 62



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

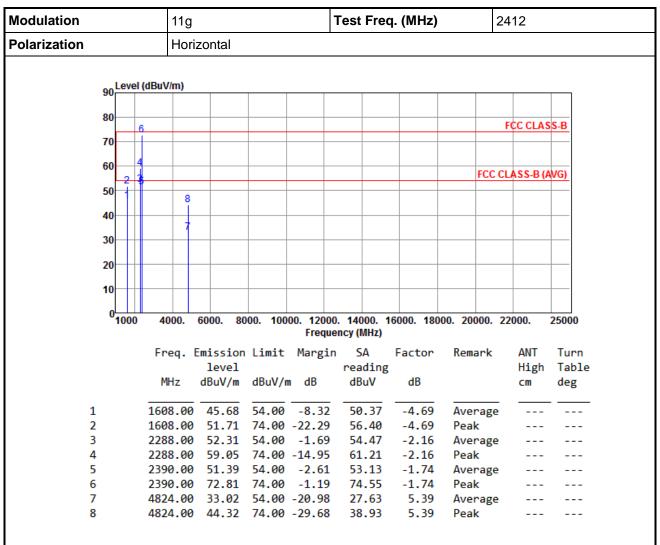


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 31 of 62



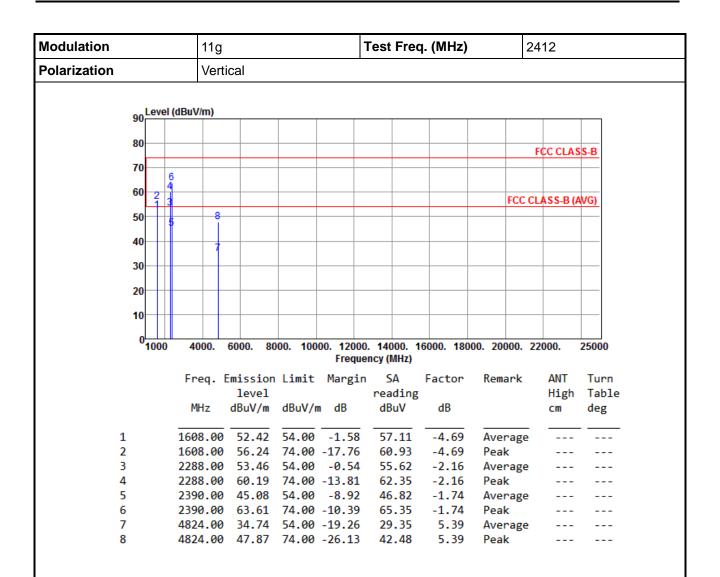


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 32 of 62



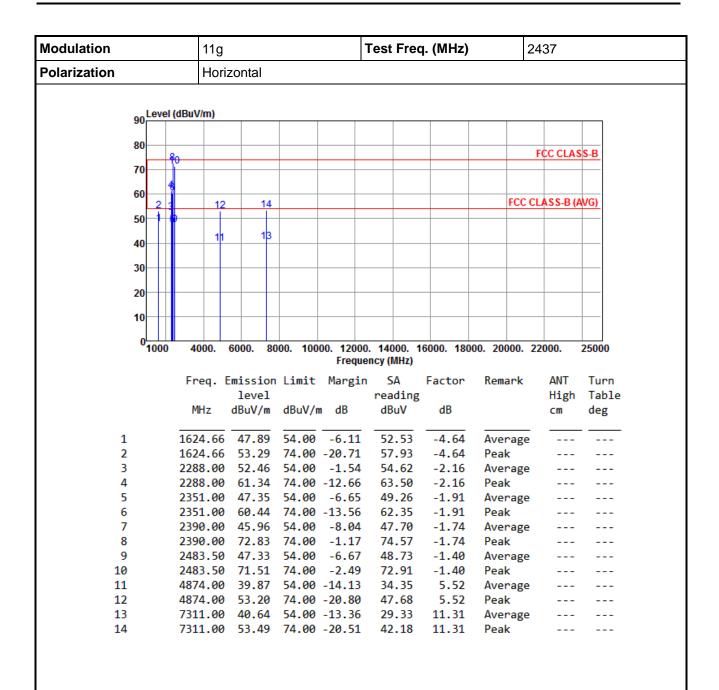


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 33 of 62



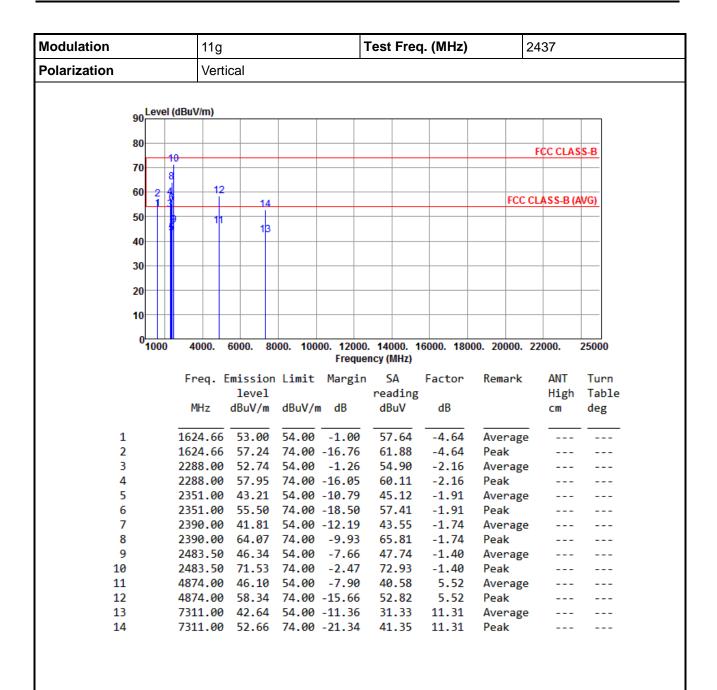


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 34 of 62



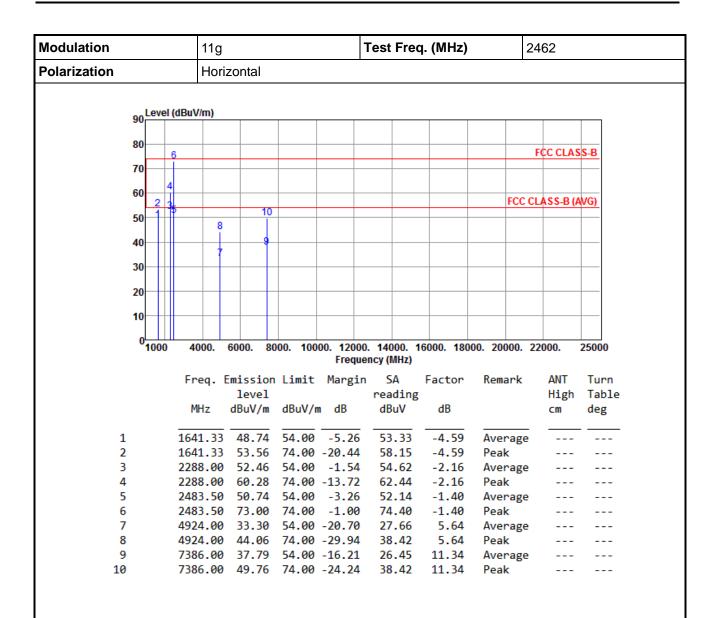


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 35 of 62



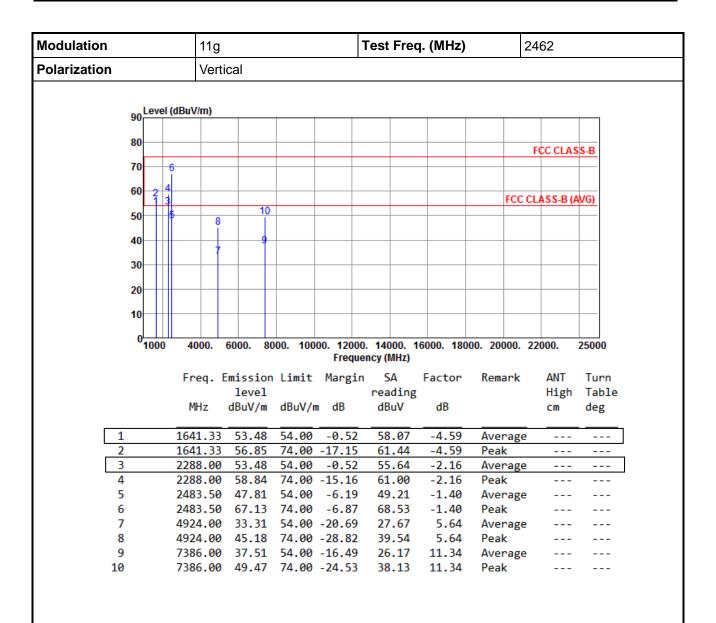


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 36 of 62



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

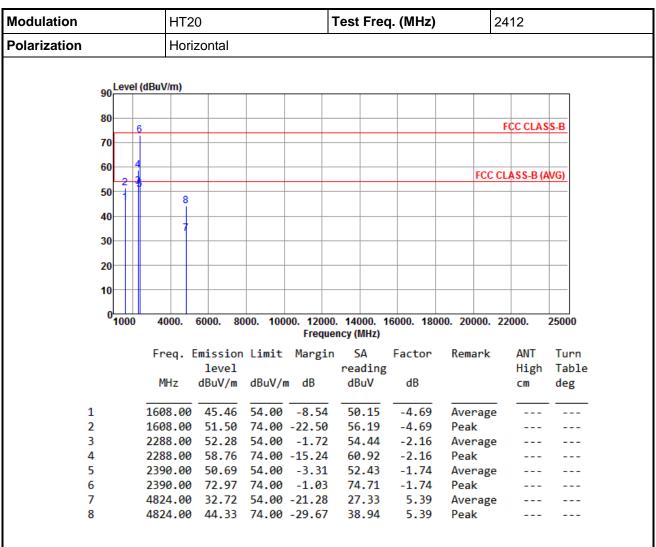

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 37 of 62



Modulation Polarization			HT20				Test Freq. (MHz)				241	2412		
			Vertical											
	90	Le	vel ((dBuV/m)										
	80		\top									FC	C CLAS	S-B
	70	F	1											
	-	J,	. 6 4											
	60	Ľ	2 1 3								FC	C CLA	SS-B (A	VG)
	50	—	Н	8										
	40		$\ \ $											
	40			7										
	30	-	Н											
	20													
	20	1												
	10	┝	Н											
	0	L												
		10	00	4000.	6000. 80	00. 100		00. 140 uency (l		6000. 180	00. 20000	. 220	00.	25000
				F [mission	1224				Factor	Remark		ANT	Turn
				Freq. i	level	LIMIC	marg.		ding	ractor	Kemark		High	Table
				MHz	dBuV/m	dBuV/ı	n dB		uV	dB			CM	deg
												_		
	1			1608.00	52.89	54.00	-1.11		.58	-4.69	Averag	ge		
	2			1608.00					.65	-4.69	Peak			
	3			2288.00			-1.0		.11	-2.16	Averag	ge		
	4			2288.00					.19	-2.16	Peak			
	5 6			2390.00 2390.00					.88 .45	-1.74 -1.74	Averag Peak	ge		
	o 7			4824.00					.63	5.39	Averag	76		
					34.02		10.00		.05	5.55	Averag	5		

Peak

5.39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


4824.00 45.98 74.00 -28.02 40.59

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 38 of 62

Report Version: Rev. 01



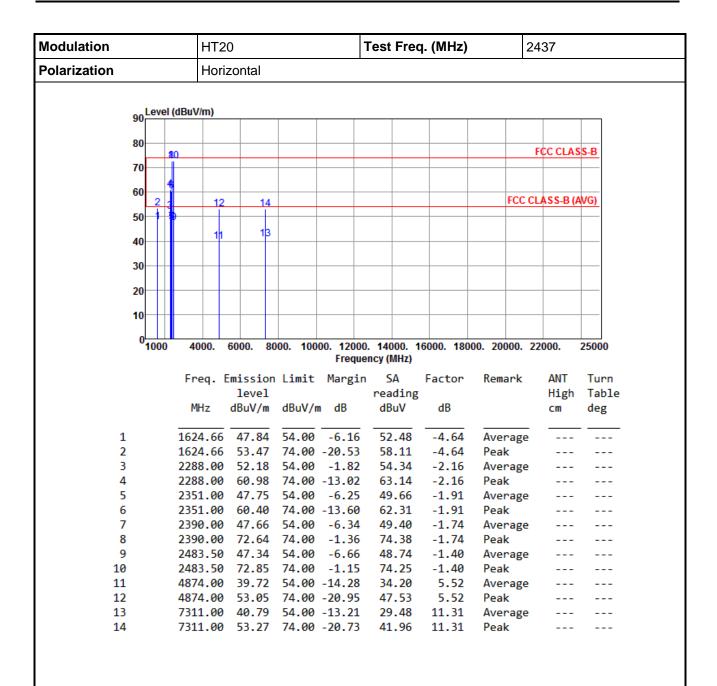


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 39 of 62



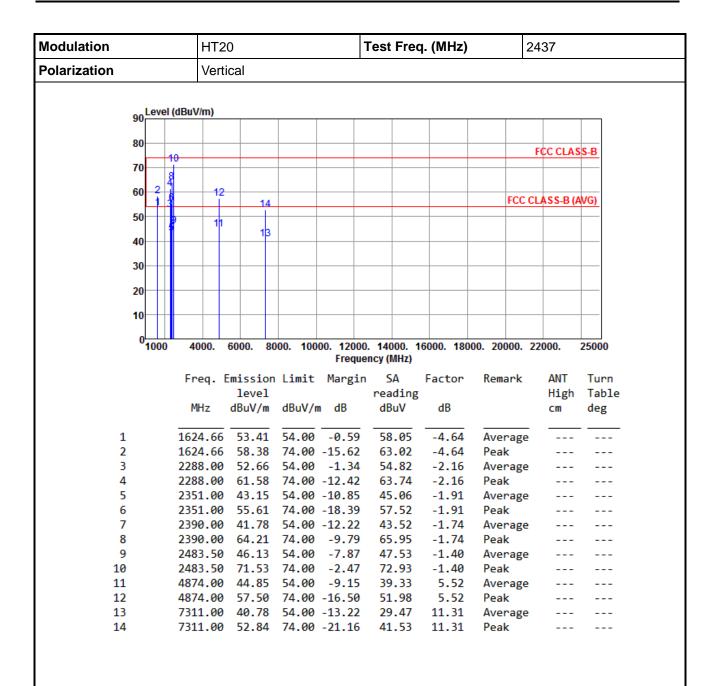


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 40 of 62



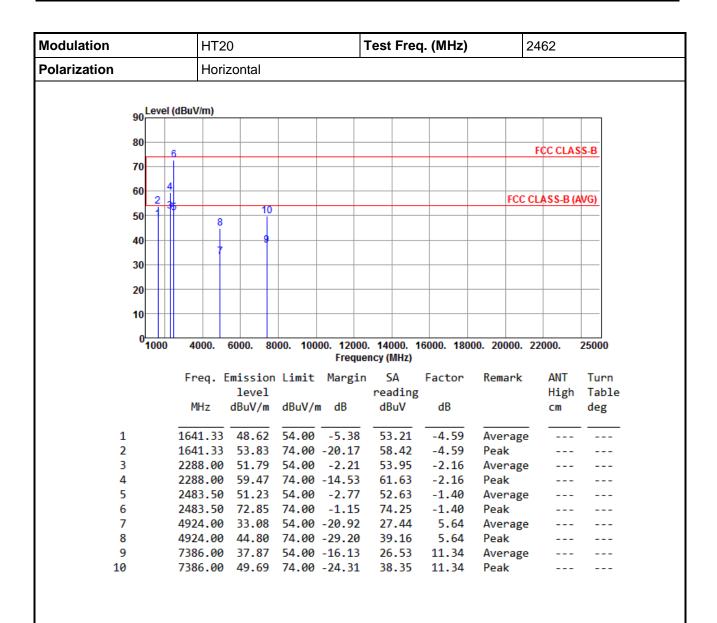


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 41 of 62



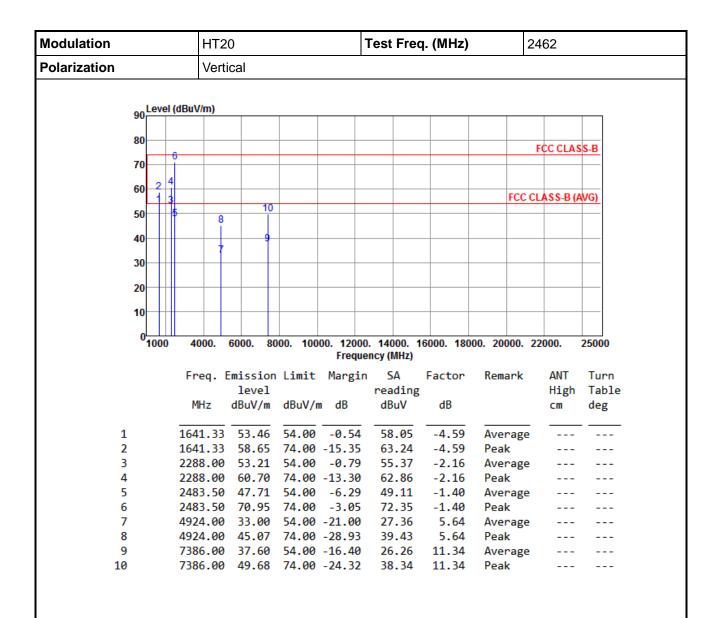


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 42 of 62



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

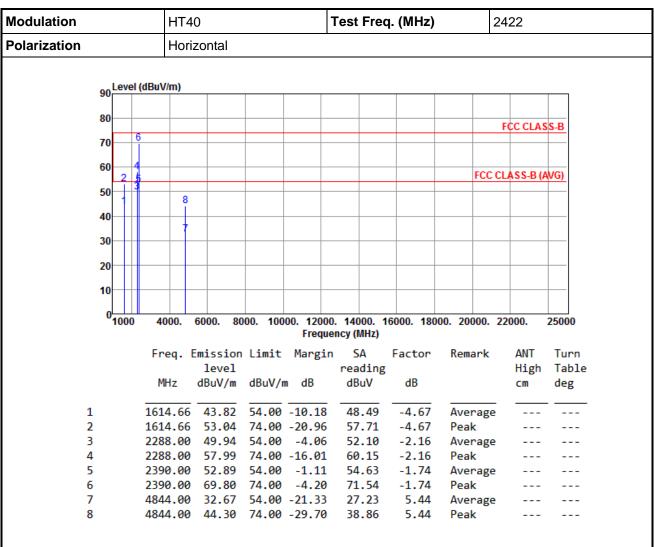

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 43 of 62



l odulation	HT40	Test Freq. (M	Test Freq. (MHz) 2								
Polarization	Vertical										
90 Level (dBu)	V/m)										
80											
				FCC CLASS-B							
70											
60 2 4			500.0	1 4 6 6 7 (4)(0)							
50			FCCC	LASS-B (AVG)							
50 5	8										
40	—										
30											
20											
10											
0											
01000 4	000. 6000. 8000. 1000	0. 12000. 14000. 16000. Frequency (MHz)	. 18000. 20000. 2	22000. 25000							
Fr	req. Emission Limit	Margin SA Fac	tor Remark	ANT Turn							
	level	reading		High Table							
M	MHz dBuV/m dBuV/m	dB dBuV d	В	cm deg							
1 161	14.66 50.99 54.00	-3.01 55.66 -4	.67 Average								
	14.66 56.02 74.00		.67 Peak								
3 228	88.00 52.34 54.00	-1.66 54.50 -2	.16 Average								
	88.00 58.75 74.00		.16 Peak								
	90.00 45.85 54.00		.74 Average								
	90.00 61.98 74.00 - 44.00 32.75 54.00 -		.74 Peak .44 Average								
	14.00 32.73 34.00 4 14.00 43.97 74.00 4		.44 Peak								


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 44 of 62

Report Version: Rev. 01



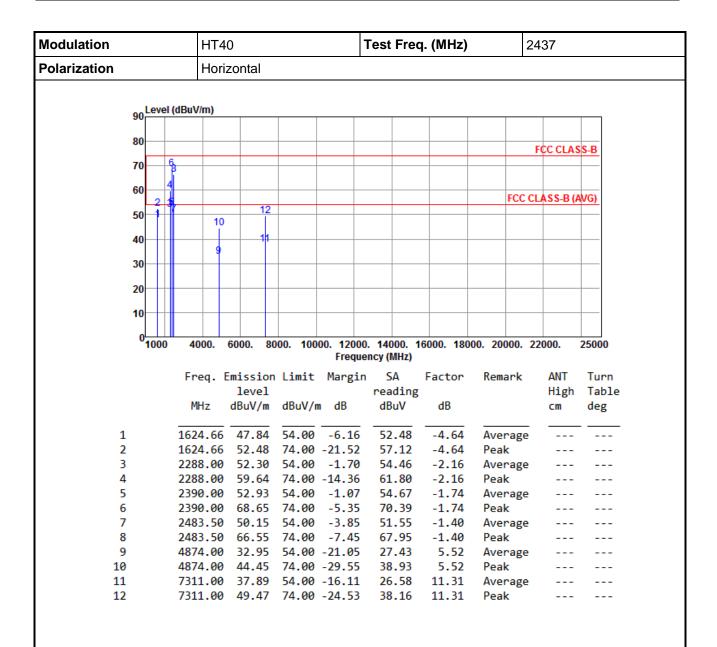


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 45 of 62



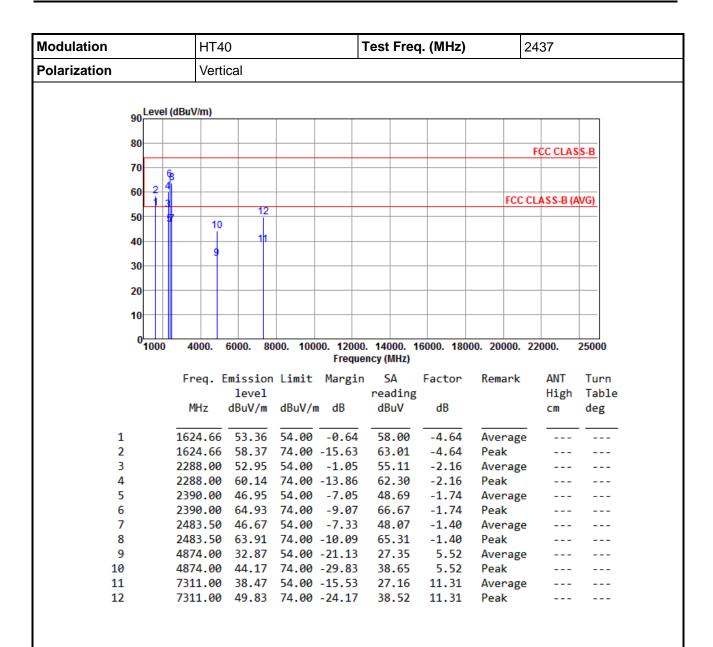


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 46 of 62



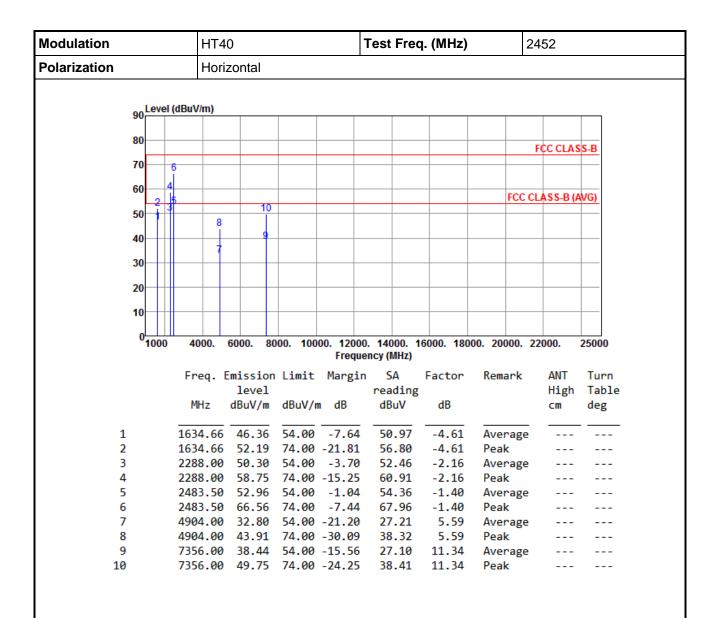


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 47 of 62



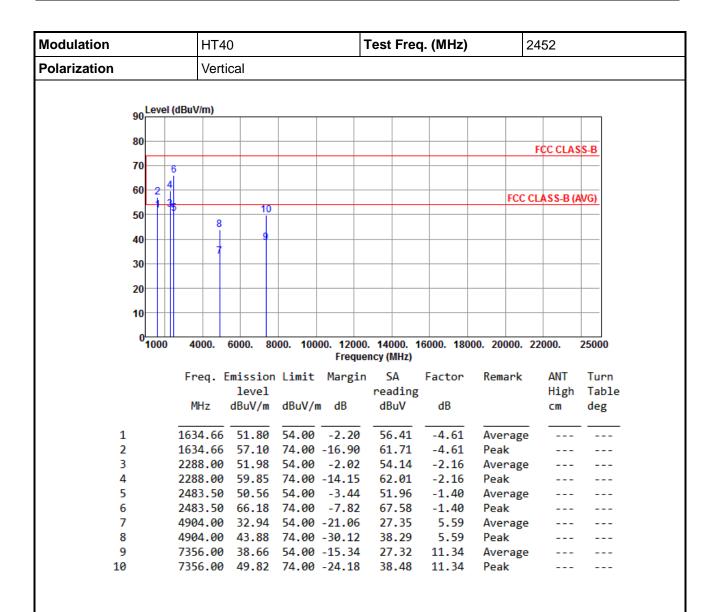

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR470802AC Page: 48 of 62



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

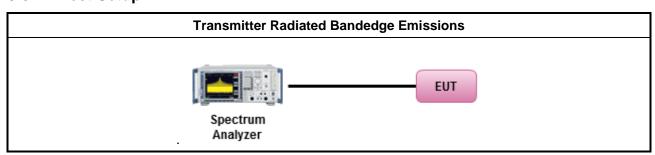

3.6.5 Test Result of Emissions in non-restricted frequency bands


This test item is performed on each TX output individually without summing or adding 10 $log(N_{ANT})$ since measurements are made relative to the in-band emissions on the individual outputs. Only worst test result of each operating mode is presented.

Report No.: FR470802AC Page: 49 of 62




3.6.6 Unwanted Emissions into Non-Restricted Frequency Bands

802.11b

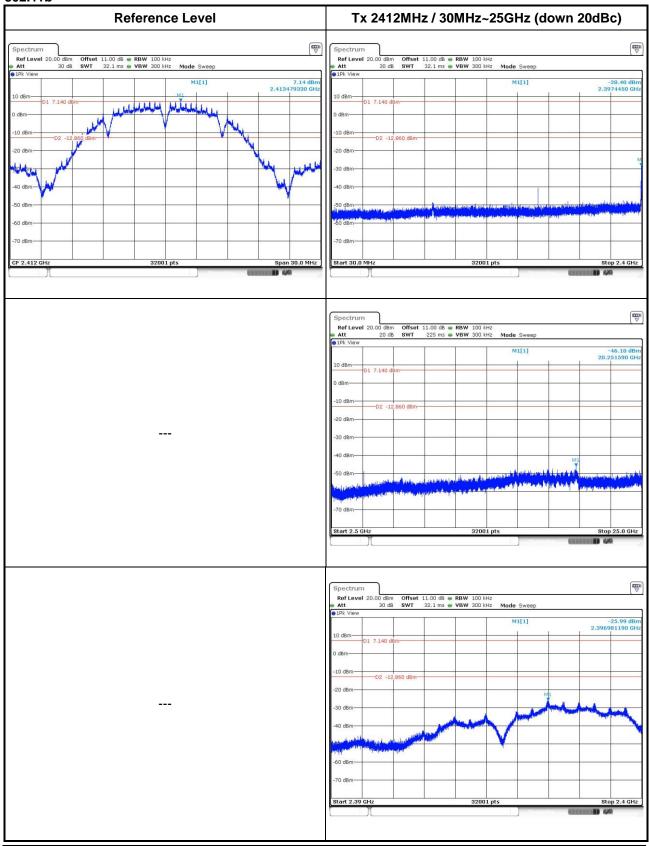


Report No.: FR470802AC Report Version: Rev. 01



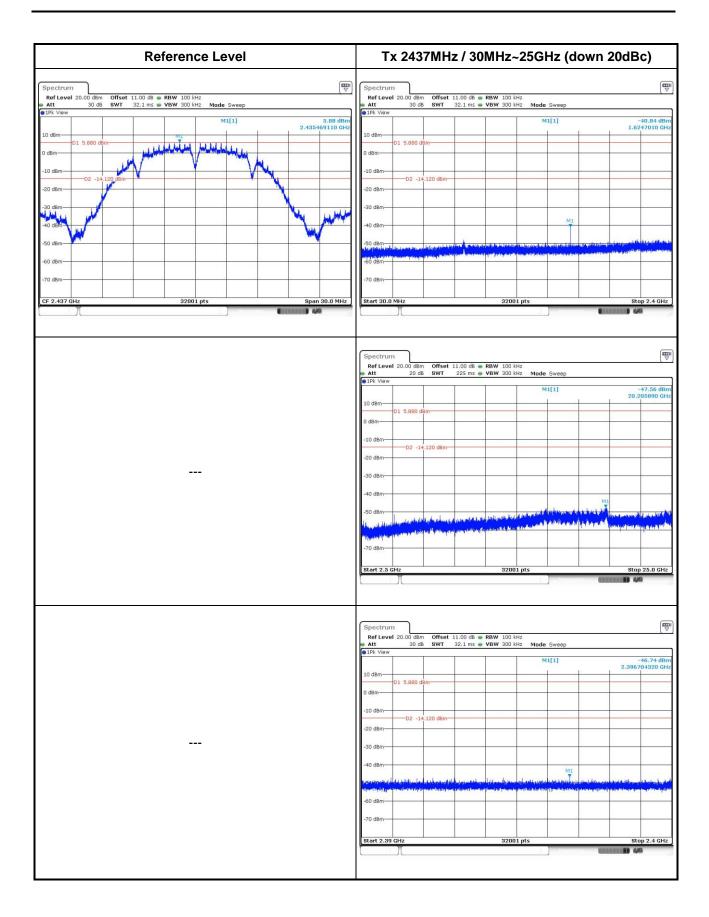


Report No.: FR470802AC Page: 51 of 62



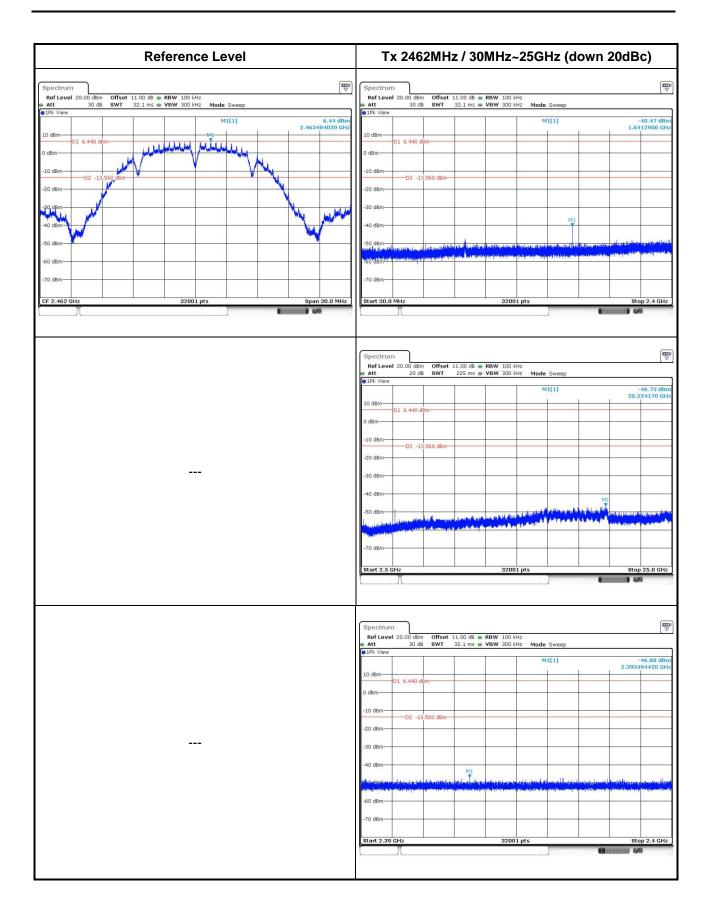


Report No.: FR470802AC Page: 52 of 62



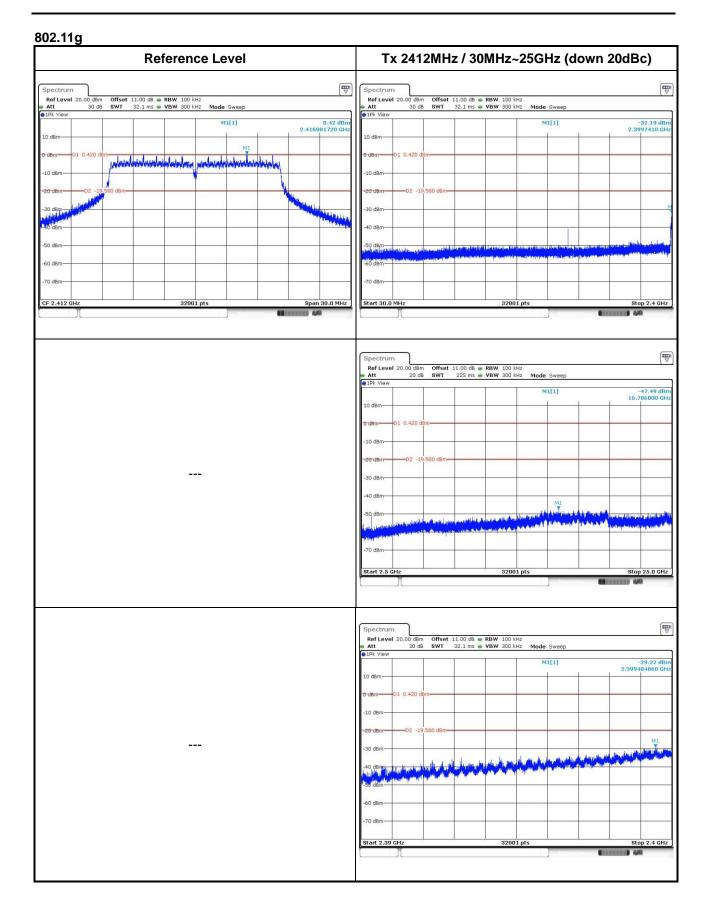


Report No.: FR470802AC Page: 53 of 62



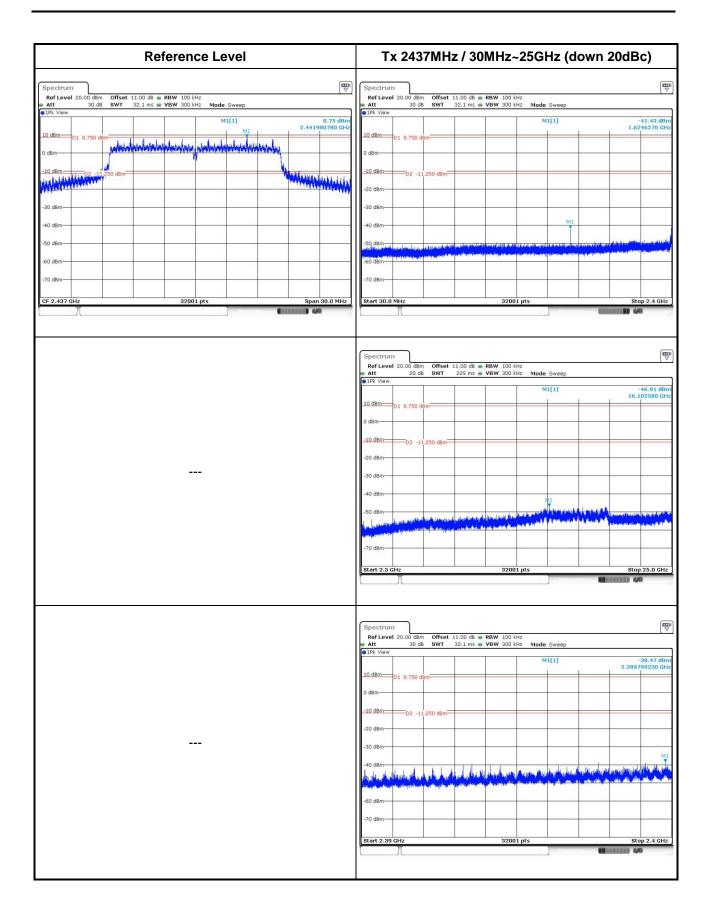

Report No.: FR470802AC Page: 54 of 62




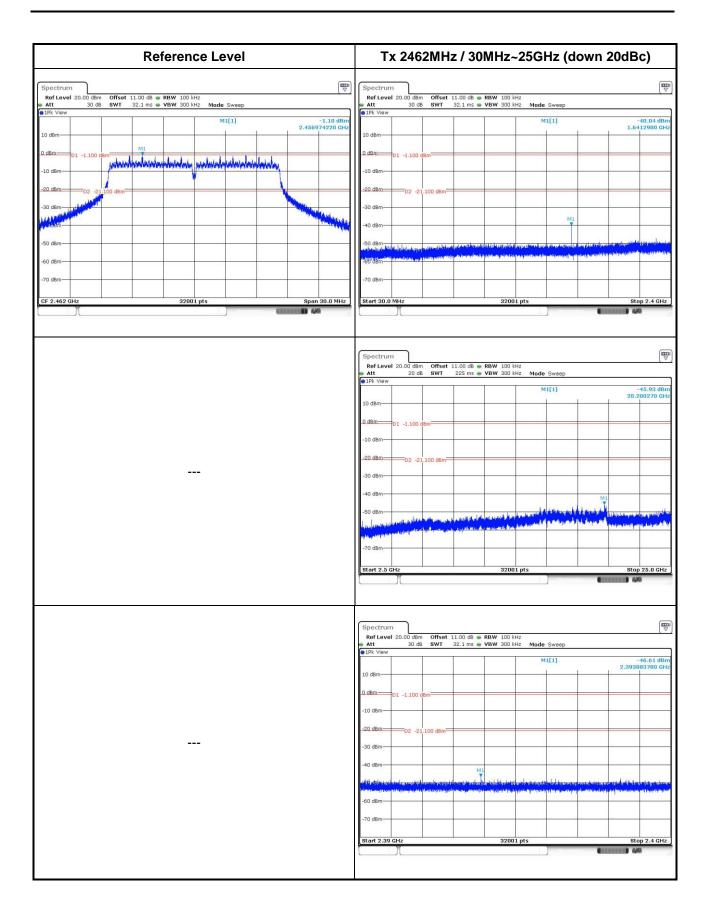

Report No.: FR470802AC Page: 55 of 62




802.11n HT20

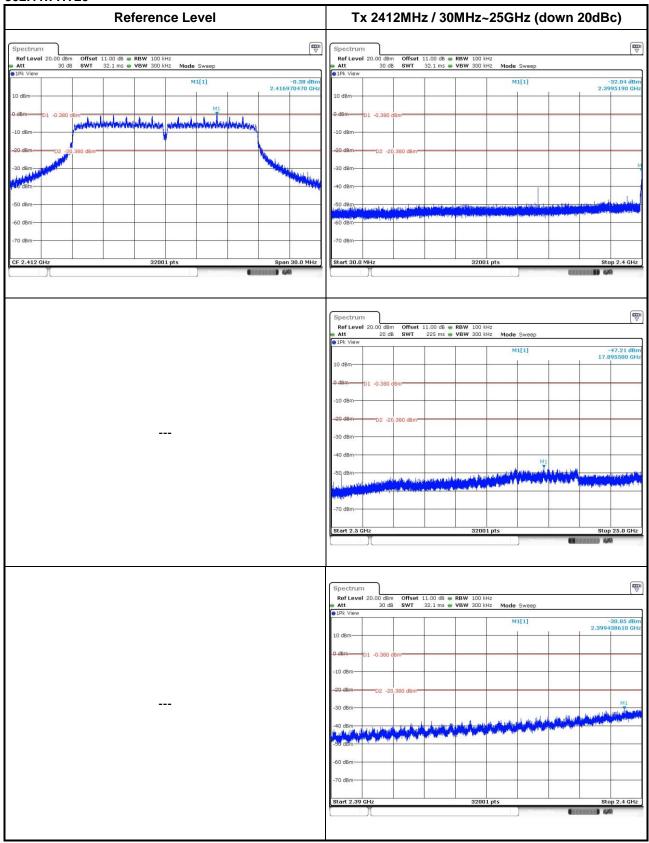


Report No.: FR470802AC Page: 56 of 62



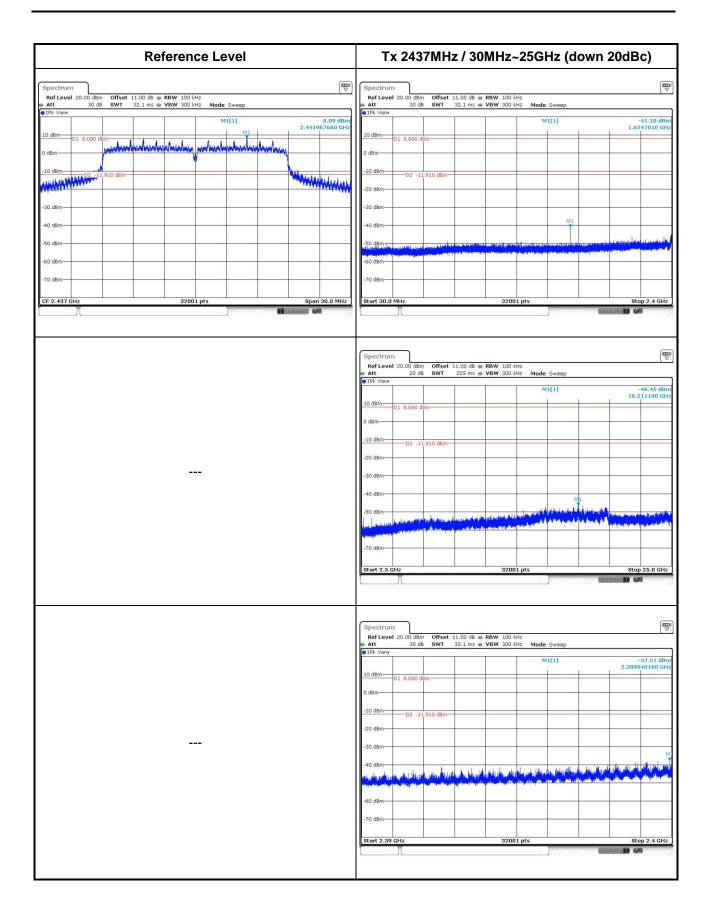

Report No.: FR470802AC Page: 57 of 62




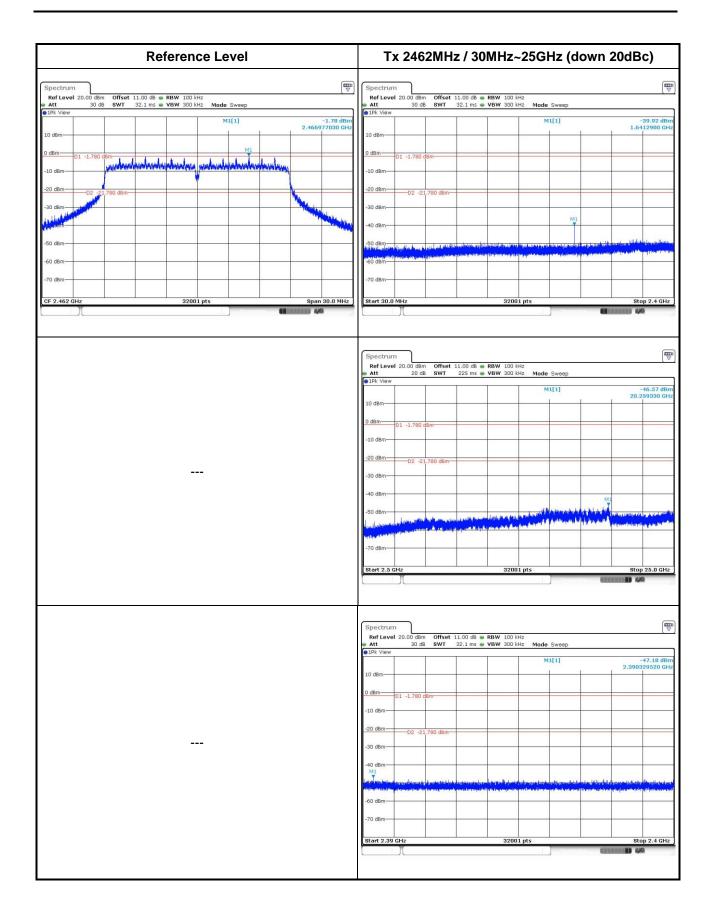

Report No.: FR470802AC Page: 58 of 62




802.11n HT40

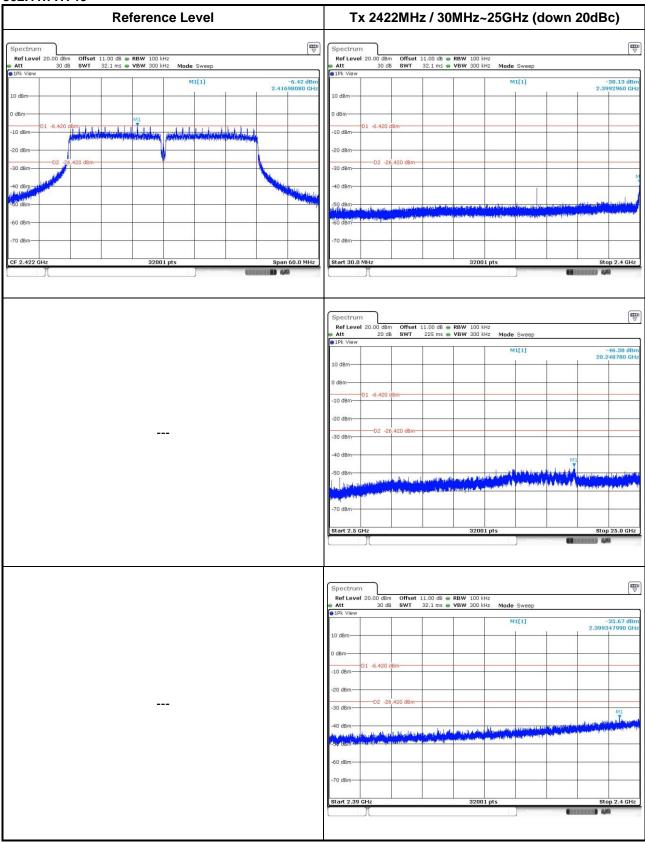


Report No.: FR470802AC Page: 59 of 62



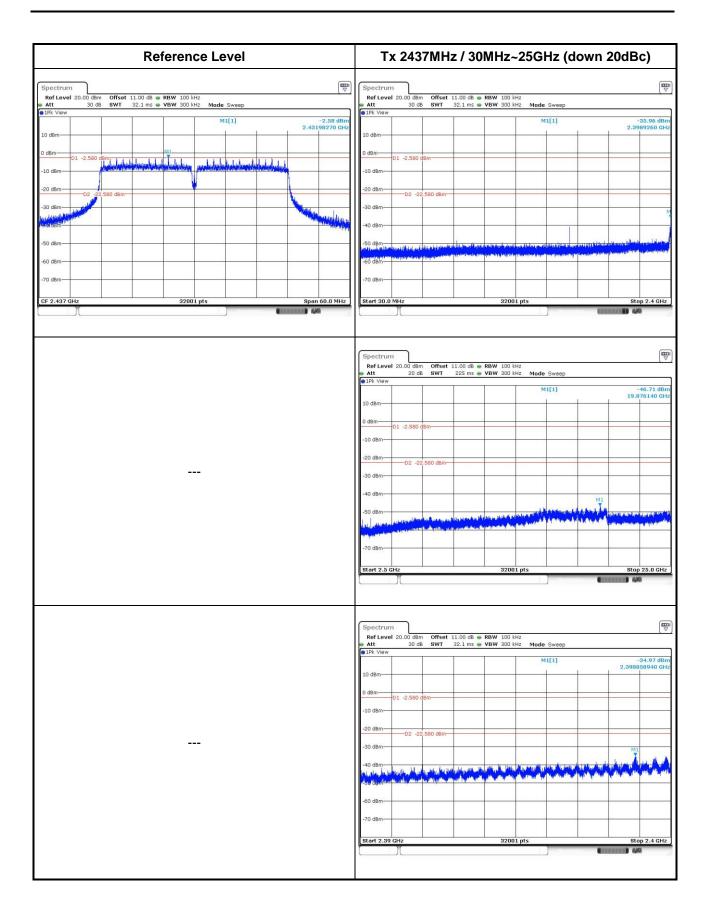

Report No.: FR470802AC Page: 60 of 62



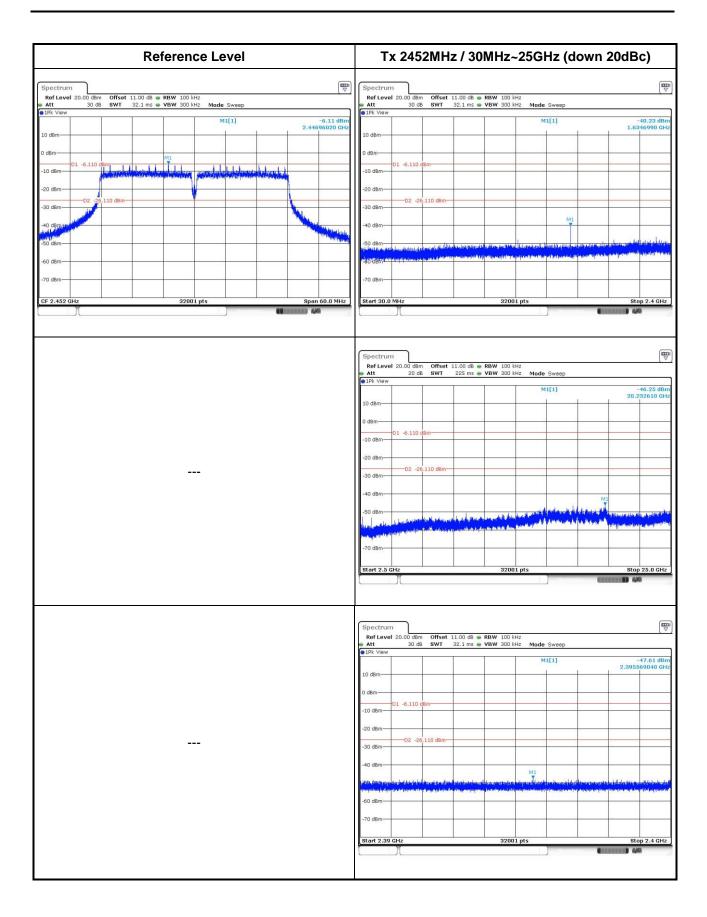

Report No.: FR470802AC Page: 61 of 62



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

<u>==END</u>==

Report No.: FR470802AC Page: 62 of 62