

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**Wireless Qi Charging Bedside Clock Stereo Speaker with Single Day  
Alarm and Dual USB Charging**

**Model No.: HW5, HW5B, HW5X (X would be any alphabet denotes different  
cabinet color)**

**Trademark: iHome**

**FCC ID: EMOHW5**

**Report No.: ES191210026E2**

**Issue Date: December 21, 2019**

*Prepared for*

**SDI Technologies Inc.  
1299, Main Street, Rahway, NJ 07065, U.S.A**

*Prepared by*

**EMTEK(SHENZHEN) CO., LTD.**

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China.**

**TEL: 86-755-26954280**

**FAX: 86-755-26954282**

**This report shall not be reproduced, except in full, without the written approval of  
EMTEK(SHENZHEN) CO., LTD.**

## VERIFICATION OF COMPLIANCE

|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:           | SDI Technologies Inc.<br>1299, Main Street, Rahway, NJ 07065, U.S.A                                                                                                                            |
| Manufacturer:        | Hotel Technologies Inc.<br>1299, Main Street, Rahway, NJ 07065, U.S.A                                                                                                                          |
| Product Description: | Wireless Qi Charging Bedside Clock Stereo Speaker with Single Day Alarm and Dual USB Charging                                                                                                  |
| Trade Mark:          | iHome                                                                                                                                                                                          |
| Model Number:        | HW5, HW5B, HW5X (X would be any alphabet denotes different cabinet color)<br>(note: The models are the same except color of appearance and model number, here we prepare HW5 for the EMC test) |

### We hereby certify that:

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247(2019).

Date of Test : December 10, 2019 to December 21, 2019

*Loren Luo*

Prepared by : \_\_\_\_\_

Loren Luo / Editor

*Tim Dong*

Reviewer : \_\_\_\_\_

Tim Dong / Supervisor

*[Signature]* 

Approved & Authorized Signer : \_\_\_\_\_

Lisa Wang / Manager

## Modified Information

| Version | Summary         | Revision Date | Report No.    |
|---------|-----------------|---------------|---------------|
| Ver.1.0 | Original Report | /             | ES191210026E2 |
|         |                 |               |               |
|         |                 |               |               |
|         |                 |               |               |
|         |                 |               |               |
|         |                 |               |               |
|         |                 |               |               |

## Table of Contents

|                                                        |           |
|--------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION .....</b>                    | <b>6</b>  |
| 1.1PRODUCT DESCRIPTION .....                           | 6         |
| 1.2TEST FACILITY .....                                 | 7         |
| <b>2. SYSTEM TEST CONFIGURATION .....</b>              | <b>8</b>  |
| 2.1EUT CONFIGURATION .....                             | 8         |
| 2.2EUT EXERCISE .....                                  | 8         |
| 2.3TEST PROCEDURE .....                                | 8         |
| 2.4CONFIGURATION OF TESTED SYSTEM .....                | 9         |
| <b>3. SUMMARY OF TEST RESULTS .....</b>                | <b>10</b> |
| <b>4. DESCRIPTION OF TEST MODES.....</b>               | <b>11</b> |
| <b>5. TEST SYSTEM UNCERTAINTY .....</b>                | <b>13</b> |
| <b>6. CONDUCTED EMISSIONS TEST .....</b>               | <b>14</b> |
| 6.1 MEASUREMENT PROCEDURE: .....                       | 14        |
| 6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 14        |
| 6.3 MEASUREMENT EQUIPMENT USED: .....                  | 14        |
| 6.4 MEASUREMENT RESULT: .....                          | 14        |
| 6.5 CONDUCTED MEASUREMENT PHOTOS: .....                | 17        |
| <b>7. RADIATED EMISSION TEST .....</b>                 | <b>18</b> |
| 7.1 MEASUREMENT PROCEDURE.....                         | 18        |
| 7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 20        |
| 7.3 MEASUREMENT EQUIPMENT USED:.....                   | 21        |
| 7.4 RADIATED EMISSION LIMIT.....                       | 22        |
| 7.5 MEASUREMENT RESULT .....                           | 23        |
| 7.5 RADIATED MEASUREMENT PHOTOS:.....                  | 28        |
| <b>8. CHANNEL SEPARATION TEST .....</b>                | <b>29</b> |
| 8.1 MEASUREMENT PROCEDURE .....                        | 29        |
| 8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 29        |
| 8.3 MEASUREMENT EQUIPMENT USED:.....                   | 29        |
| 8.4 MEASUREMENT RESULTS:.....                          | 29        |
| <b>9. 20DB BANDWIDTH TEST .....</b>                    | <b>36</b> |
| 9.1 MEASUREMENT PROCEDURE .....                        | 36        |
| 9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....  | 36        |
| 9.3 MEASUREMENT EQUIPMENT USED:.....                   | 36        |
| 9.4 MEASUREMENT RESULTS: .....                         | 36        |
| <b>10. QUANTITY OF HOPPING CHANNEL TEST .....</b>      | <b>43</b> |
| 10.1 MEASUREMENT PROCEDURE .....                       | 43        |

|                            |                                                    |           |
|----------------------------|----------------------------------------------------|-----------|
| 10.2                       | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 43        |
| 10.3                       | MEASUREMENT EQUIPMENT USED:.....                   | 43        |
| 10.4                       | MEASUREMENT RESULTS: .....                         | 43        |
| <b>11.</b>                 | <b>TIME OF OCCUPANCY (DWELL TIME) TEST.....</b>    | <b>44</b> |
| 11.1                       | TEST DESCRIPTION.....                              | 44        |
| 11.2                       | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 44        |
| 11.3                       | MEASUREMENT EQUIPMENT USED:.....                   | 44        |
| 11.4                       | TEST REQUIREMENTS / LIMITS .....                   | 44        |
| 11.5                       | TEST RESULT .....                                  | 45        |
| <b>12.</b>                 | <b>MAXIMUM PEAK OUTPUT POWER TEST.....</b>         | <b>47</b> |
| 12.1                       | MEASUREMENT PROCEDURE .....                        | 47        |
| 12.2                       | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 47        |
| 12.3                       | MEASUREMENT EQUIPMENT USED:.....                   | 47        |
| 12.4                       | MEASUREMENT RESULTS:.....                          | 48        |
| <b>13.</b>                 | <b>BAND EDGE TEST .....</b>                        | <b>54</b> |
| 13.1                       | MEASUREMENT PROCEDURE .....                        | 54        |
| 13.2                       | TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... | 55        |
| 13.3                       | MEASUREMENT EQUIPMENT USED:.....                   | 55        |
| 13.4                       | MEASUREMENT RESULTS: .....                         | 56        |
| <b>14.</b>                 | <b>ANTENNA APPLICATION.....</b>                    | <b>72</b> |
| 14.1                       | ANTENNA REQUIREMENT .....                          | 72        |
| 14.2                       | RESULT .....                                       | 72        |
| Appendix I (Photos of EUT) |                                                    |           |

## 1. GENERAL INFORMATION

### 1.1 Product Description

| Characteristics           | Description                                                                                   |
|---------------------------|-----------------------------------------------------------------------------------------------|
| Product Name              | Wireless Qi Charging Bedside Clock Stereo Speaker with Single Day Alarm and Dual USB Charging |
| Model number              | HW5, HW5B, HW5X (X would be any alphabet denotes different cabinet color)                     |
| Input rating              | DC 12V from adapter                                                                           |
| Power Supply              | AC 120V/60Hz for adapter                                                                      |
| Adapter                   | Model : BQ60A-1205000-U<br>Input: AC 100-240V, 50/60Hz 1500mA Max<br>Output: DC 12V, 5000mA   |
| Kind of Device            | Bluetooth Ver.4.2                                                                             |
| Modulation                | GFSK, $\pi/4$ -DQPSK, 8DPSK                                                                   |
| Operating Frequency Range | 2402-2480MHz                                                                                  |
| Number of Channels        | 79                                                                                            |
| Transmit Power Max(PK)    | 0.41dBm(0.001099W)                                                                            |
| Antenna Type              | Internal PCB antenna                                                                          |
| Antenna Gain              | 0dBi                                                                                          |

## 1.2 Test Facility

### Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24  
The certificate is valid until 2022.10.28  
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2016.5.19  
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, August 03, 2017  
Designation Number: CN1204  
Test Firm Registration Number: 882943

Accredited by Industry Canada, November 24, 2015  
The Certificate Registration Number is 4480A.

Accredited by A2LA, July 31, 2017  
The Certificate Number is 4321.01.

Name of Firm : EMTEK(SHENZHEN) CO., LTD.  
Site Location : Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China.

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions


The EUT is placed on a turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of EUT was rotated according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**



**Table 2-1 Equipment Used in Tested System**

| Item | Equipment                                                                                     | Trade Mark | Model No.       | FCC ID | Note                     |
|------|-----------------------------------------------------------------------------------------------|------------|-----------------|--------|--------------------------|
| 1.   | Wireless Qi Charging Bedside Clock Stereo Speaker with Single Day Alarm and Dual USB Charging | N/A        | HW5             | EMOHW5 | <b>EUT</b>               |
| 2    | Adapter                                                                                       | N/A        | BQ60A-1205000-U | N/A    | <b>Support Equipment</b> |

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

### 3. Summary of Test Results

| FCC Rules           | Description Of Test           | Result    |
|---------------------|-------------------------------|-----------|
| §15.207             | AC Power Conducted Emission   | Compliant |
| §15.247(d), §15.209 | Radiated Emission             | Compliant |
| §15.247(a)(1)       | Channel Separation test       | Compliant |
| §15.247(a)(1)       | 20dB Bandwidth                | Compliant |
| §15.247(a)(1)(iii)  | Quantity of Hopping Channel   | Compliant |
| §15.247(a)(1)(iii)  | Time of Occupancy(Dwell Time) | Compliant |
| §15.247(b)          | Max Peak output Power test    | Compliant |
| §15.247(d)          | Band edge test                | Compliant |
| §15.203             | Antenna Requirement           | Compliant |



#### 4. Description of test modes

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).



The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 01      | 2402            | 28      | 2429            | 55      | 2456            |
| 02      | 2403            | 29      | 2430            | 56      | 2457            |
| 03      | 2404            | 30      | 2431            | 57      | 2458            |
| 04      | 2405            | 31      | 2432            | 58      | 2459            |
| 05      | 2406            | 32      | 2433            | 59      | 2460            |
| 06      | 2407            | 33      | 2434            | 60      | 2461            |
| 07      | 2408            | 34      | 2435            | 61      | 2462            |
| 08      | 2409            | 35      | 2436            | 62      | 2463            |
| 09      | 2410            | 36      | 2437            | 63      | 2464            |
| 10      | 2411            | 37      | 2438            | 64      | 2465            |
| 11      | 2412            | 38      | 2439            | 65      | 2466            |
| 12      | 2413            | 39      | 2440            | 66      | 2467            |
| 13      | 2414            | 40      | 2441            | 67      | 2468            |
| 14      | 2415            | 41      | 2442            | 68      | 2469            |
| 15      | 2416            | 42      | 2443            | 69      | 2470            |
| 16      | 2417            | 43      | 2444            | 70      | 2471            |
| 17      | 2418            | 44      | 2445            | 71      | 2472            |
| 18      | 2419            | 45      | 2446            | 72      | 2473            |
| 19      | 2420            | 46      | 2447            | 73      | 2474            |
| 20      | 2421            | 47      | 2448            | 74      | 2475            |
| 21      | 2422            | 48      | 2449            | 75      | 2476            |
| 22      | 2423            | 49      | 2450            | 76      | 2477            |
| 23      | 2424            | 50      | 2451            | 77      | 2478            |
| 24      | 2425            | 51      | 2452            | 78      | 2479            |
| 25      | 2426            | 52      | 2453            | 79      | 2480            |
| 26      | 2427            | 53      | 2454            |         |                 |
| 27      | 2428            | 54      | 2455            |         |                 |

Note:

Test of channel was included the lowest 2402MHz, middle 2441MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.

## 5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                      | Uncertainty               |
|--------------------------------|---------------------------|
| Radio Frequency                | $\pm 1 \times 10^{-5}$    |
| Maximum Peak Output Power Test | $\pm 1.0\text{dB}$        |
| Conducted Emissions Test       | $\pm 2.0\text{dB}$        |
| Radiated Emission Test         | $\pm 2.0\text{dB}$        |
| Power Density                  | $\pm 2.0\text{dB}$        |
| Occupied Bandwidth Test        | $\pm 1.0\text{dB}$        |
| Band Edge Test                 | $\pm 3\text{dB}$          |
| All emission, radiated         | $\pm 3\text{dB}$          |
| Antenna Port Emission          | $\pm 3\text{dB}$          |
| Temperature                    | $\pm 0.5^{\circ}\text{C}$ |
| Humidity                       | $\pm 3\%$                 |


Remark: The coverage Factor ( $k=2$ ), and measurement Uncertainty for a level of Confidence of 95%

## 6. Conducted Emissions Test

### 6.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)

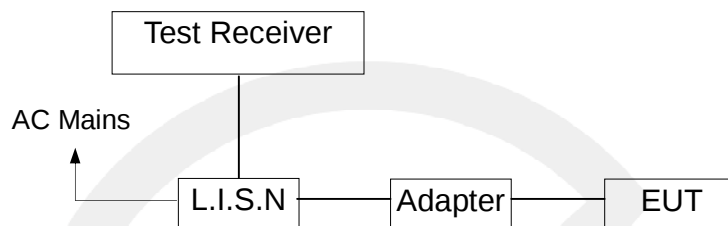

### 6.3 Measurement Equipment Used:


| Conducted Emission Test Site |                 |              |               |                 |            |            |
|------------------------------|-----------------|--------------|---------------|-----------------|------------|------------|
| EQUIPMENT TYPE               | MFR             | MODEL NUMBER | SERIAL NUMBER | Characteristics | Last Cal.  | Due date   |
| Test Receiver                | Rohde & Schwarz | ESCS30       | 100018        | 9kHz~3GHz       | 05/23/2019 | 05/22/2020 |
| L.I.S.N                      | Rohde & Schwarz | ENV216       | 100017        | 9KHz-300MHz     | 05/23/2019 | 05/22/2020 |
| RF Switching Unit            | CDS             | RSU-M2       | 38401         | 9KHz-300MHz     | 05/23/2019 | 05/22/2020 |
| Coaxial Cable                | CDS             | 79254        | 46107086      | 9kHz~3GHz       | 05/23/2019 | 05/22/2020 |

### 6.4 Measurement Result:

Pass.

All the modulation modes were tested the data of the worst mode (8DPSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

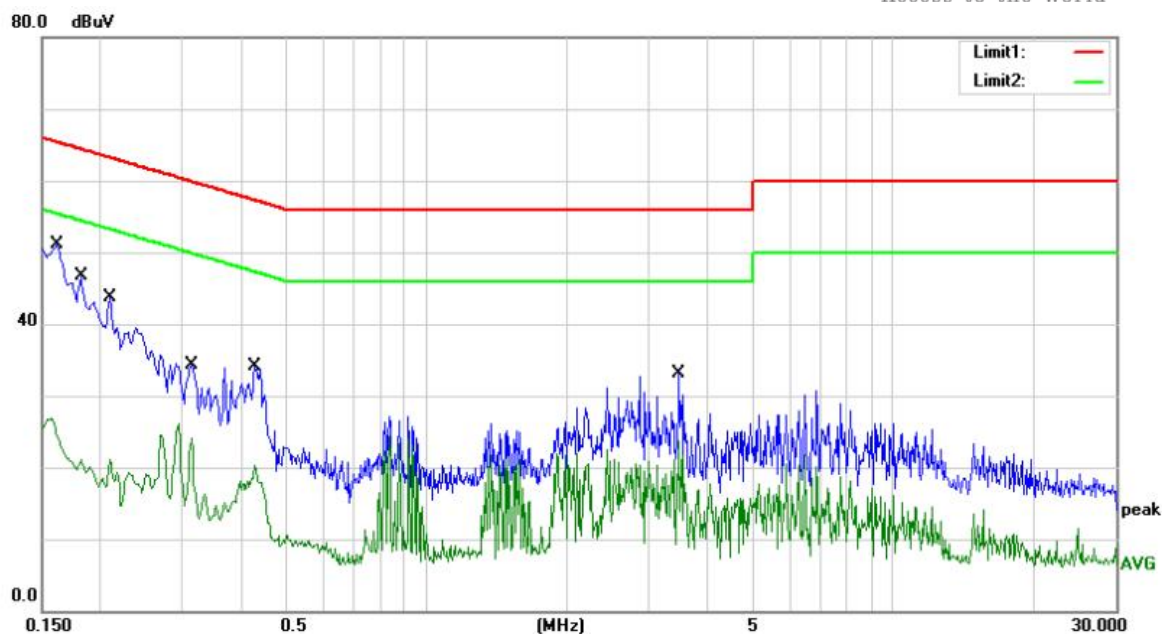

Site site #1

Phase: **L1**

Temperature: 25

Limit: (CE)FCC PART 15 C\_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2402


Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1620       | 38.32                    | 9.78                    | 48.10                    | 65.36         | -17.26     | QP       |         |
| 2   |     | 0.1620       | 17.04                    | 9.78                    | 26.82                    | 55.36         | -28.54     | AVG      |         |
| 3   |     | 0.1820       | 33.86                    | 9.79                    | 43.65                    | 64.39         | -20.74     | QP       |         |
| 4   |     | 0.1820       | 10.64                    | 9.79                    | 20.43                    | 54.39         | -33.96     | AVG      |         |
| 5   |     | 0.2100       | 30.93                    | 9.79                    | 40.72                    | 63.21         | -22.49     | QP       |         |
| 6   |     | 0.2100       | 11.23                    | 9.79                    | 21.02                    | 53.21         | -32.19     | AVG      |         |
| 7   |     | 0.3140       | 21.48                    | 9.81                    | 31.29                    | 59.86         | -28.57     | QP       |         |
| 8   |     | 0.3140       | 14.19                    | 9.81                    | 24.00                    | 49.86         | -25.86     | AVG      |         |
| 9   |     | 0.4300       | 21.27                    | 9.83                    | 31.10                    | 57.25         | -26.15     | QP       |         |
| 10  |     | 0.4300       | 10.39                    | 9.83                    | 20.22                    | 47.25         | -27.03     | AVG      |         |
| 11  |     | 3.4860       | 20.25                    | 9.85                    | 30.10                    | 56.00         | -25.90     | QP       |         |
| 12  |     | 3.4860       | 13.92                    | 9.85                    | 23.77                    | 46.00         | -22.23     | AVG      |         |

\*:Maximum data x:Over limit !:over margin

Comment: Factor build in receiver.

Operator: HUANG

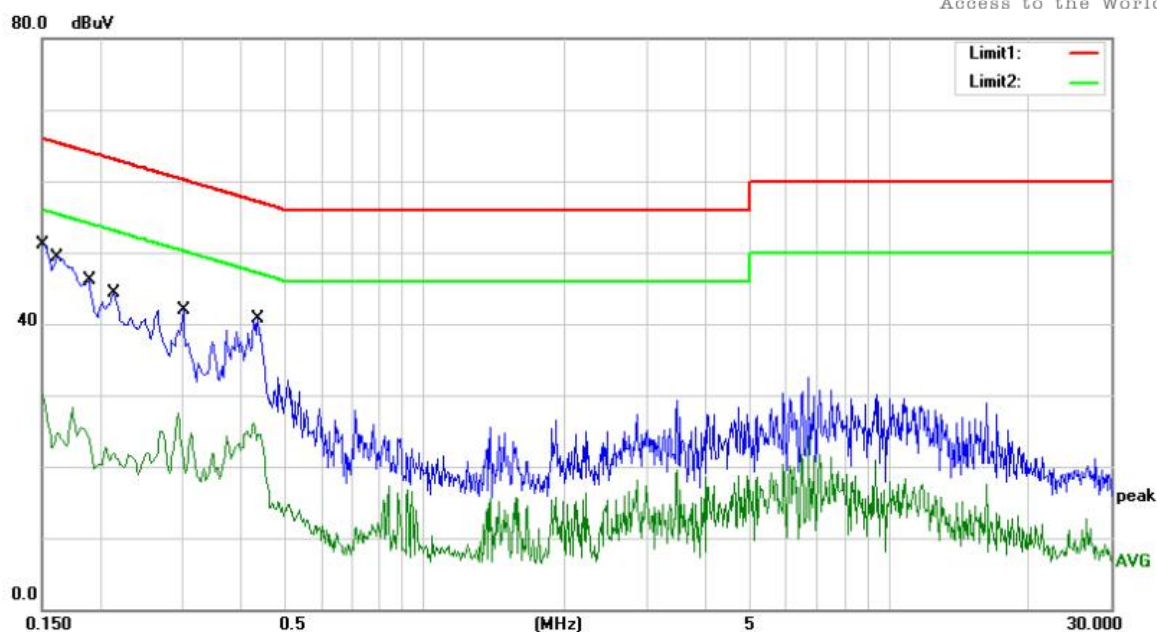

Site site #1

Phase: **N**

Temperature: 25

Limit: (CE)FCC PART 15 C\_QP

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2402

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1500       | 38.32                    | 9.78                    | 48.10                    | 66.00         | -17.90     | QP       |         |
| 2   |     | 0.1500       | 21.16                    | 9.78                    | 30.94                    | 56.00         | -25.06     | AVG      |         |
| 3   |     | 0.1620       | 36.52                    | 9.78                    | 46.30                    | 65.36         | -19.06     | QP       |         |
| 4   |     | 0.1620       | 16.00                    | 9.78                    | 25.78                    | 55.36         | -29.58     | AVG      |         |
| 5   |     | 0.1900       | 33.31                    | 9.79                    | 43.10                    | 64.04         | -20.94     | QP       |         |
| 6   |     | 0.1900       | 15.58                    | 9.79                    | 25.37                    | 54.04         | -28.67     | AVG      |         |
| 7   |     | 0.2140       | 31.42                    | 9.79                    | 41.21                    | 63.05         | -21.84     | QP       |         |
| 8   |     | 0.2140       | 12.32                    | 9.79                    | 22.11                    | 53.05         | -30.94     | AVG      |         |
| 9   |     | 0.3020       | 28.99                    | 9.81                    | 38.80                    | 60.19         | -21.39     | QP       |         |
| 10  |     | 0.3020       | 17.77                    | 9.81                    | 27.58                    | 50.19         | -22.61     | AVG      |         |
| 11  |     | 0.4380       | 27.78                    | 9.83                    | 37.61                    | 57.10         | -19.49     | QP       |         |
| 12  |     | 0.4380       | 15.90                    | 9.83                    | 25.73                    | 47.10         | -21.37     | AVG      |         |

\*:Maximum data x:Over limit !:over margin

Comment: Factor build in receiver.

Operator: HUANG

## 6.5 Conducted Measurement Photos:



## 7. Radiated Emission Test

### 7.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a Styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Use the following spectrum analyzer settings:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

| EMI Test Receiver | Setting  |
|-------------------|----------|
| Attenuation       | Auto     |
| RB                | 120KHz   |
| VB                | 300KHz   |
| Detector          | QP       |
| Trace             | Max hold |

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


| EMI Test Receiver | Setting  |
|-------------------|----------|
| Attenuation       | Auto     |
| RB                | 1MHz     |
| VB                | 3MHz     |
| Detector          | Peak     |
| Trace             | Max hold |

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


| EMI Test Receiver | Setting  |
|-------------------|----------|
| Attenuation       | Auto     |
| RB                | 1MHz     |
| VB                | 10Hz     |
| Detector          | Peak     |
| Trace             | Max hold |

## 7.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

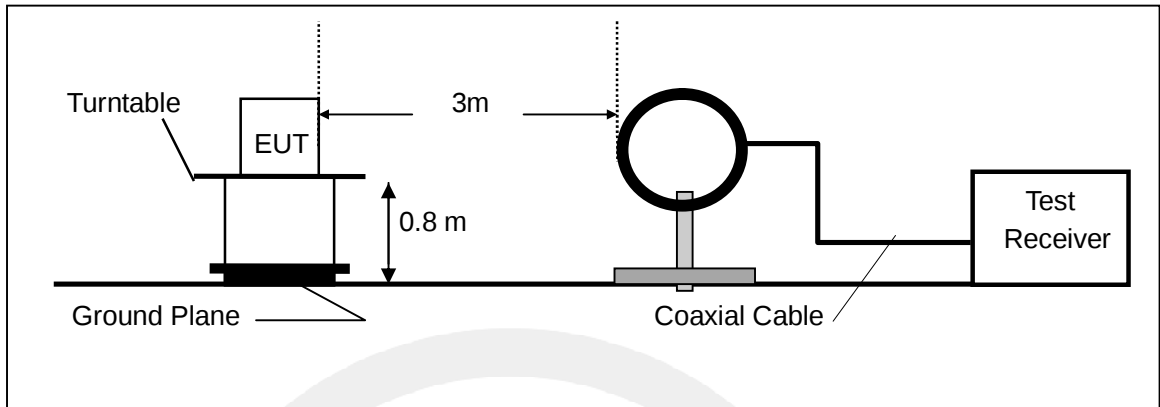

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

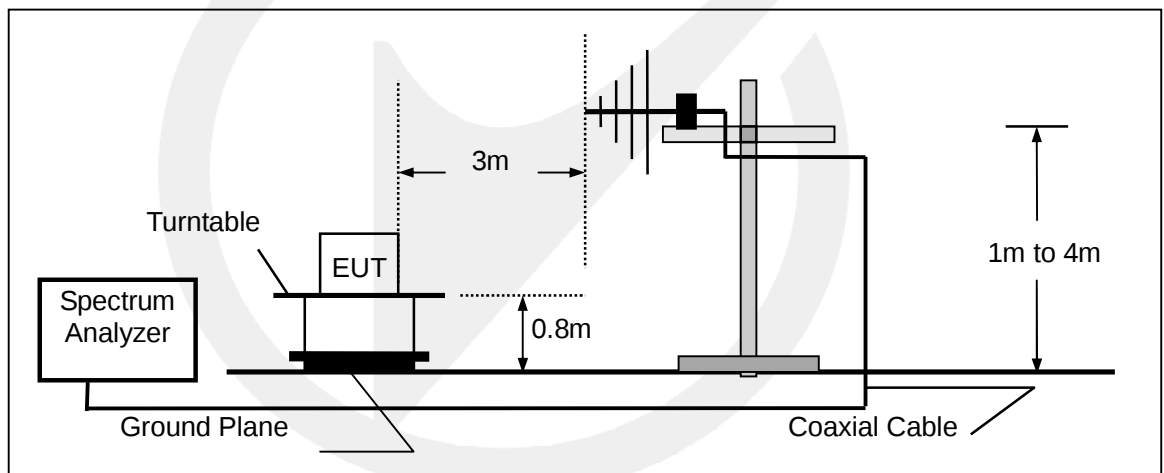

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

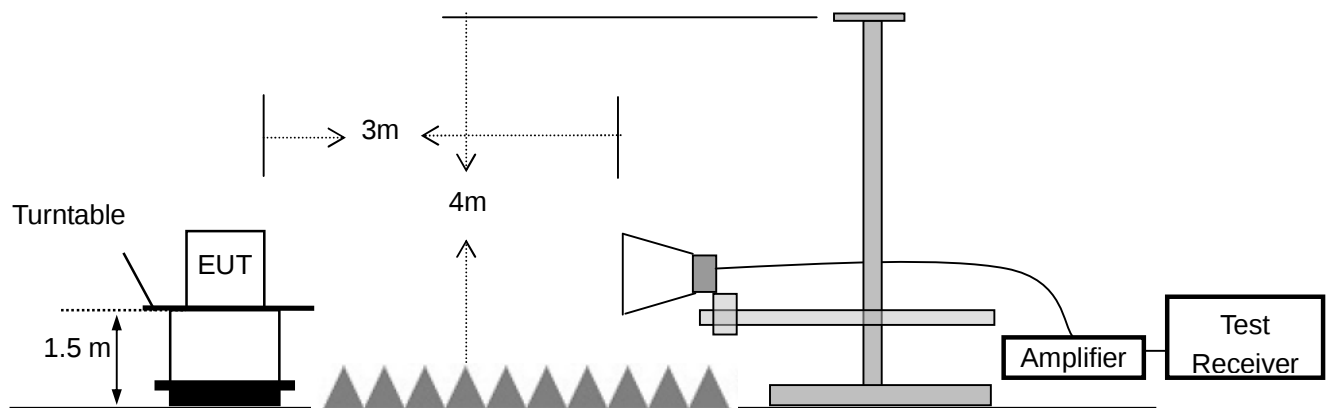

### 7.3 Measurement Equipment Used:

| Item | Equipment                      | Manufacturer    | Model No.  | Serial No.   | Characteristics | Last Cal.  | Cal. Interval |
|------|--------------------------------|-----------------|------------|--------------|-----------------|------------|---------------|
| 1.   | Test Receiver                  | Rohde & Schwarz | ESCI       | 1166.5950.03 | 9KHz-3GHz       | 05/23/2019 | 1 Year        |
| 2.   | Loop Antenna                   | Schwarzbeck     | FMZB 1519  | 012          | 9 KHz -30MHz    | 05/23/2019 | 1 Year        |
| 3.   | Bilog Antenna                  | Schwarzbeck     | VULB9163   | 000141       | 25MHz-2GHz      | 05/23/2019 | 1 Year        |
| 4.   | Power Amplifier                | CDS             | RSU-M352   | 818          | 1MHz-1GHz       | 05/23/2019 | 1 Year        |
| 5.   | Power Amplifier                | HP              | 8447F      | OPT H64      | 1GHz-26.5GHz    | 05/23/2019 | 1 Year        |
| 6.   | Color Monitor                  | SUNSPO          | SP-140A    | N/A          | --              | 05/23/2019 | 1 Year        |
| 7.   | Single Line Filter             | JIANLI          | XL-3       | N/A          | --              | 05/23/2019 | 1 Year        |
| 8.   | Single Phase Power Line Filter | JIANLI          | DL-2X100B  | N/A          | --              | 05/23/2019 | 1 Year        |
| 9.   | 3 Phase Power Line Filter      | JIANLI          | DL-4X100B  | N/A          | --              | 05/23/2019 | 1 Year        |
| 10.  | DC Power Filter                | JIANLI          | DL-2X50B   | N/A          | --              | 05/23/2019 | 1 Year        |
| 11.  | Cable                          | Schwarzbeck     | PLF-100    | 549489       | 9KHz-3GHz       | 05/23/2019 | 1 Year        |
| 12.  | Cable                          | Rosenberger     | CIL02      | A0783566     | 9KHz-3GHz       | 05/23/2019 | 1 Year        |
| 13.  | Cable                          | Rosenberger     | RG 233/U   | 525178       | 9KHz-3GHz       | 05/23/2019 | 1 Year        |
| 14.  | Signal Analyzer                | Rohde & Schwarz | FSV30      | 103040       | 9KHz-40GHz      | 05/23/2019 | 1 Year        |
| 15.  | Horn Antenna                   | Schwarzbeck     | BBHA9120D  | 9120D-1272   | 1GHz-18GHz      | 05/23/2019 | 1 Year        |
| 16.  | Horn Antenna                   | Schwarzbeck     | BBHA 9170  | BBHA9170399  | 14GHz -26.5GHz  | 05/23/2019 | 1 Year        |
| 17.  | Power Amplifier                | LUNAR EM        | LNA1G18-40 | J10100000081 | 1GHz-26.5GHz    | 05/23/2019 | 1 Year        |
| 18.  | Cable                          | H+S             | CBL-26     | N/A          | 1GHz-26.5GHz    | 05/23/2019 | 1 Year        |
| 19.  | Cable                          | H+S             | CBL-26     | N/A          | 1GHz-26.5GHz    | 05/23/2019 | 1 Year        |
| 20.  | Cable                          | H+S             | CBL-26     | N/A          | 1GHz-26.5GHz    | 05/23/2019 | 1 Year        |

#### 7.4 Radiated Emission Limit

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(KHz)                          | 300                              |
| 0.490~1.705          | 24000/F(KHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

#### 15.205 Restricted bands of operation

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |

- Remark 1. Emission level in dBuV/m=20 log (uV/m)  
: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.  
3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of x 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

## 7.5 Measurement Result

### Below 30MHz:

|                    |            |               |                   |
|--------------------|------------|---------------|-------------------|
| Operation Mode:    | TX         | Test Date :   | December 20, 2019 |
| Frequency Range:   | 9KHz~30MHz | Temperature : | 26℃               |
| Test Result:       | PASS       | Humidity :    | 55 %              |
| Measured Distance: | 3m         | Test By:      | Huang             |

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level<br>(dBuV/m) | Limit 3m<br>(dBuV/m) | Over<br>(dB) |
|----------------|-----------------|-------------------------------|----------------------|--------------|
| --             | --              | --                            | --                   | --           |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

### Below 1000MHz:

Pass.

All the modulation modes were tested the data of the worst mode (8DPSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.



Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: AC 120V/60Hz

Humidity: 55 %


Mode: TX2402

Note:

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   |     | 217.5440     | 44.85                    | -16.98                  | 27.87                      | 46.00           | -18.13     | QP                      |                           |         |
| 2   |     | 239.9873     | 44.36                    | -15.75                  | 28.61                      | 46.00           | -17.39     | QP                      |                           |         |
| 3   |     | 383.9318     | 42.26                    | -11.28                  | 30.98                      | 46.00           | -15.02     | QP                      |                           |         |
| 4   |     | 432.5455     | 47.53                    | -10.27                  | 37.26                      | 46.00           | -8.74      | QP                      |                           |         |
| 5   | *   | 480.5276     | 46.85                    | -9.58                   | 37.27                      | 46.00           | -8.73      | QP                      |                           |         |
| 6   |     | 528.2458     | 44.26                    | -8.34                   | 35.92                      | 46.00           | -10.08     | QP                      |                           |         |

\*:Maximum data    x:Over limit    !:over margin

Operator: Lian

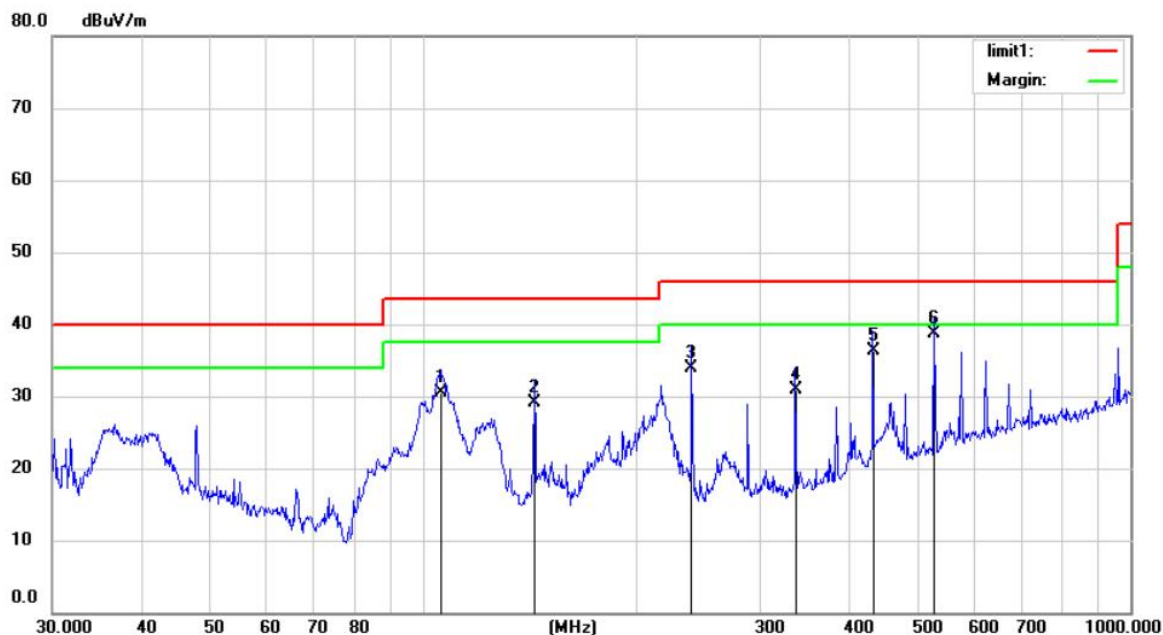

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: AC 120V/60Hz

Humidity: 55 %

Mode: TX2402

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 106.0126 | 48.63         | -18.22         | 30.41        | 43.50  | -13.09 | QP             |              |        |
| 2   |     | 143.8295 | 50.74         | -21.66         | 29.08        | 43.50  | -14.42 | QP             |              |        |
| 3   |     | 239.9873 | 49.63         | -15.75         | 33.88        | 46.00  | -12.12 | QP             |              |        |
| 4   |     | 336.0352 | 43.36         | -12.51         | 30.85        | 46.00  | -15.15 | QP             |              |        |
| 5   |     | 432.5457 | 46.65         | -10.27         | 36.38        | 46.00  | -9.62  | QP             |              |        |
| 6   | *   | 528.2458 | 46.98         | -8.34          | 38.64        | 46.00  | -7.36  | QP             |              |        |

\*:Maximum data x:Over limit !:over margin

Operator: Lian

## Above 1000MHz

All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

Operation Mode: GFSK (CH1: 2402MHz)

Test Date : December 20, 2019

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Margin(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK         | AV     |
| 4804           | V                | 61.96                  | 43.76 | 74               | 54 | -12.04     | -10.24 |
| 7206           | V                | 56.25                  | 39.63 | 74               | 54 | -17.75     | -14.37 |
| 9608           | V                | 58.67                  | 30.39 | 74               | 54 | -15.33     | -23.61 |
| 12010          | V                | 56.92                  | 32.79 | 74               | 54 | -17.08     | -21.21 |
| 14412          | V                | 51.74                  | 30.26 | 74               | 54 | -22.26     | -23.74 |
| 16814          | V                | 54.61                  | 31.44 | 74               | 54 | -19.39     | -22.56 |
| 4804           | H                | 60.47                  | 39.88 | 74               | 54 | -13.53     | -14.12 |
| 7206           | H                | 58.67                  | 37.56 | 74               | 54 | -15.33     | -16.44 |
| 9608           | H                | 56.12                  | 37.32 | 74               | 54 | -17.88     | -16.68 |
| 12010          | H                | 57.63                  | 36.55 | 74               | 54 | -16.37     | -17.45 |
| 14412          | H                | 51.80                  | 28.91 | 74               | 54 | -22.20     | -25.09 |
| 16814          | H                | 56.22                  | 35.76 | 74               | 54 | -17.78     | -18.24 |

Operation Mode: GFSK (CH40: 2441MHz)

Test Date : December 20, 2019

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Margin(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK         | AV     |
| 4882           | V                | 59.59                  | 42.49 | 74               | 54 | -14.41     | -11.51 |
| 7323           | V                | 55.35                  | 39.35 | 74               | 54 | -18.65     | -14.65 |
| 9764           | V                | 56.41                  | 35.17 | 74               | 54 | -17.59     | -18.83 |
| 12205          | V                | 50.56                  | 33.89 | 74               | 54 | -23.44     | -20.11 |
| 14646          | V                | 55.89                  | 32.77 | 74               | 54 | -18.11     | -21.23 |
| 17087          | V                | 51.66                  | 31.09 | 74               | 54 | -22.34     | -22.91 |
| 4882           | H                | 62.45                  | 45.15 | 74               | 54 | -11.55     | -8.85  |
| 7323           | H                | 55.69                  | 39.58 | 74               | 54 | -18.31     | -14.42 |
| 9764           | H                | 60.4                   | 34.39 | 74               | 54 | -13.6      | -19.61 |
| 12205          | H                | 58.5                   | 34.64 | 74               | 54 | -15.5      | -19.36 |
| 14646          | H                | 54.22                  | 34.01 | 74               | 54 | -19.78     | -19.99 |
| 17087          | H                | 55.43                  | 30.93 | 74               | 54 | -18.57     | -23.07 |

Operation Mode: GFSK (CH79: 2480MHz)


Test Date : December 20, 2019

| Freq.<br>(MHz) | Ant. Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Margin(dB) |        |
|----------------|------------------|------------------------|-------|------------------|----|------------|--------|
|                |                  | PK                     | AV    | PK               | AV | PK         | AV     |
| 4960           | V                | 62.77                  | 41.37 | 74               | 54 | -11.23     | -12.63 |
| 7440           | V                | 61.69                  | 39.52 | 74               | 54 | -12.31     | -14.48 |
| 9920           | V                | 54.58                  | 34.14 | 74               | 54 | -19.42     | -19.86 |
| 12400          | V                | 54.06                  | 29.86 | 74               | 54 | -19.94     | -24.14 |
| 14880          | V                | 51.46                  | 33.91 | 74               | 54 | -22.54     | -20.09 |
| 17360          | V                | 57.13                  | 30.37 | 74               | 54 | -16.87     | -23.63 |
| 4960           | H                | 62.09                  | 40.22 | 74               | 54 | -11.91     | -13.78 |
| 7440           | H                | 62.4                   | 37.37 | 74               | 54 | -11.6      | -16.63 |
| 9920           | H                | 54.61                  | 35.48 | 74               | 54 | -19.39     | -18.52 |
| 12400          | H                | 52.97                  | 36.1  | 74               | 54 | -21.03     | -17.9  |
| 14880          | H                | 49.73                  | 28.4  | 74               | 54 | -24.27     | -25.6  |
| 17360          | H                | 52.06                  | 31.91 | 74               | 54 | -21.94     | -22.09 |

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.
  - (4) Measuring frequencies from 1GHz to 25GHz.

## 7.5 Radiated Measurement Photos:

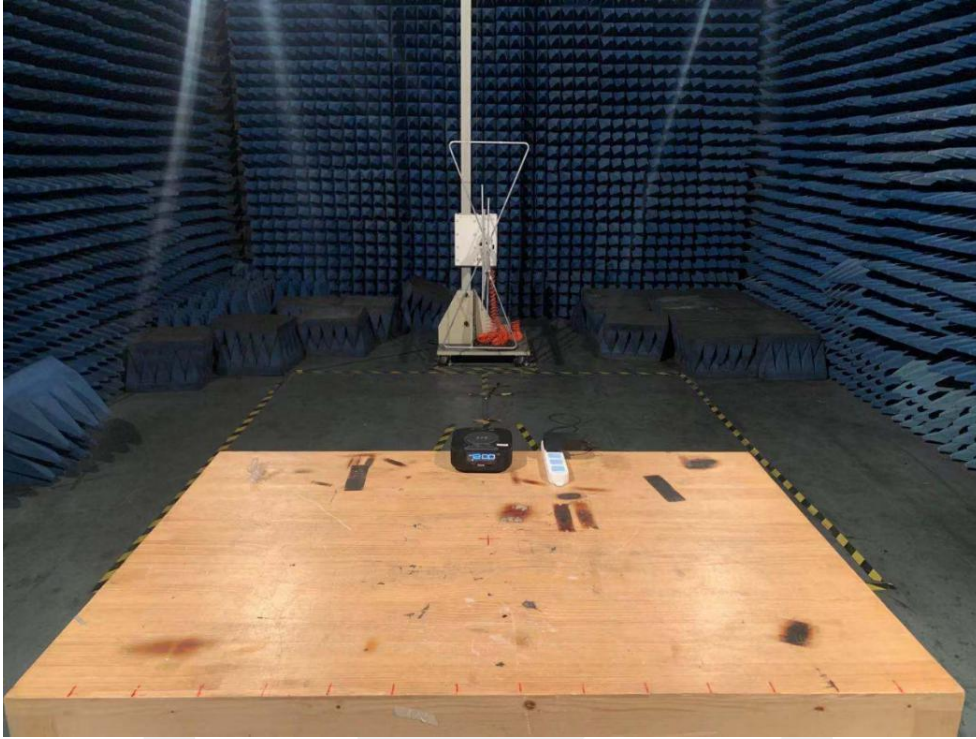


## 8. Channel Separation test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER | SERIAL NUMBER | Characteristics | LAST CAL.  | CAL DUE.   |
|-------------------|-----------------|--------------|---------------|-----------------|------------|------------|
| Spectrum Analyzer | Rohde & Schwarz | FSV30        | 1321.3008K    | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Coaxial Cable     | CDS             | 79254        | 46107086      | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Antenna Connector | ARTHUR-YANG     | 2244-N1TG1   | N/A           | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


### 8.4 Measurement Results:

Refer to attached data chart.

|                    |      |               |                   |
|--------------------|------|---------------|-------------------|
| Spectrum Detector: | PK   | Test Date :   | December 20, 2019 |
| Test By:           | Andy | Temperature : | 24 °C             |
| Test Result:       | PASS | Humidity :    | 55 %              |
| Modulation:        | GFSK |               |                   |

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|----------------------------------------|
| 1              | 2402                    | 1003                        | >692                                   |
| 40             | 2441                    | 1003                        | >692                                   |
| 79             | 2480                    | 1003                        | >695                                   |




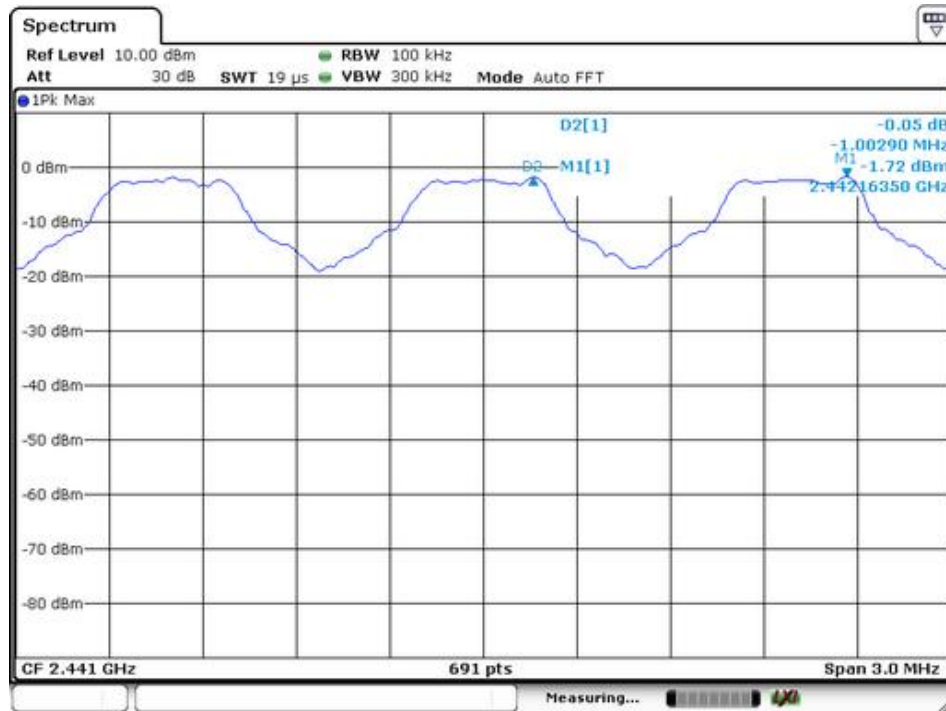


Spectrum Detector: PK  
 Test By: Andy  
 Test Result: PASS  
 Modulation:  $\pi/4$ -DQPSK

Test Date : December 20, 2019  
 Temperature : 24 °C  
 Humidity : 55 %

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|----------------------------------------|
| 1              | 2402                    | 1003                        | >926                                   |
| 40             | 2441                    | 1003                        | >926                                   |
| 79             | 2480                    | 1003                        | >926                                   |



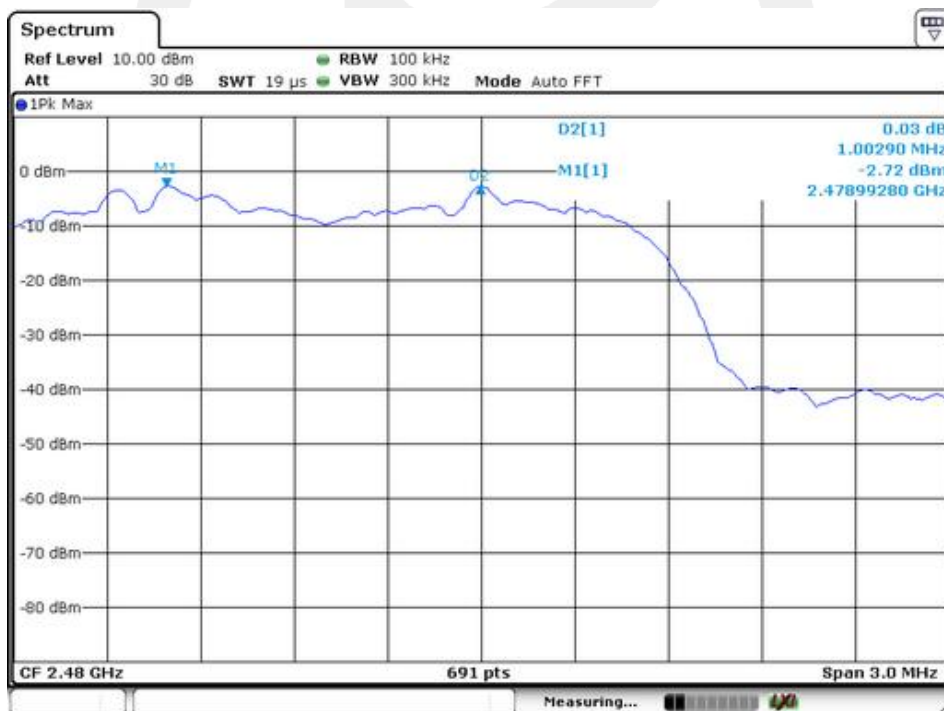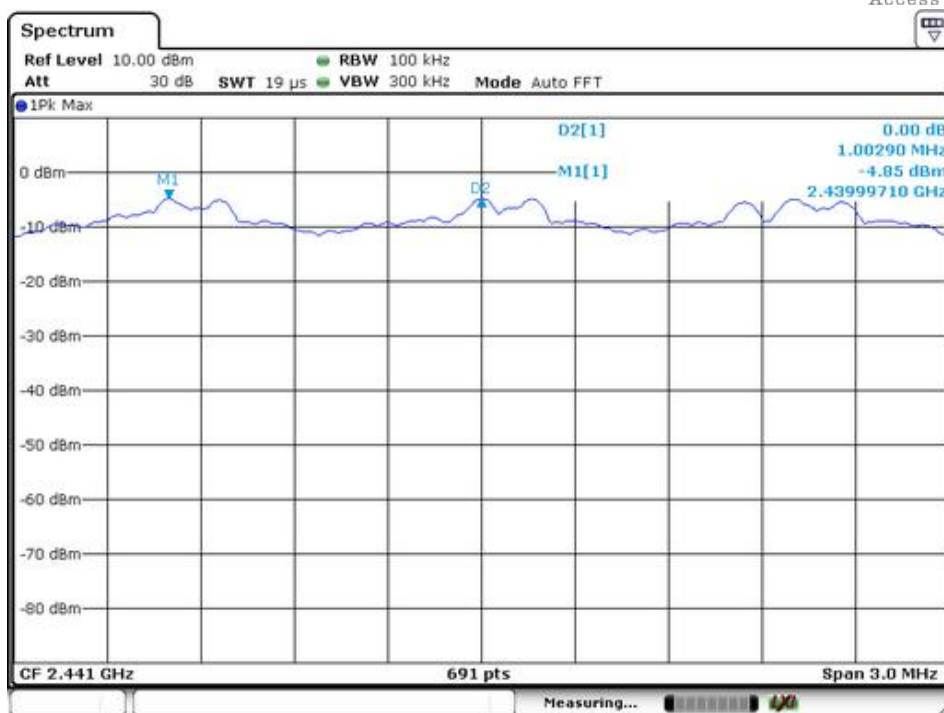


Spectrum Detector: PK  
Test By: Andy  
Test Result: PASS  
Modulation: 8DPSK

Test Date : December 20, 2019  
Temperature : 24 °C  
Humidity : 55 %

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|----------------------------------------|
| 1              | 2402                    | 1003                        | >921                                   |
| 40             | 2441                    | 1003                        | >921                                   |
| 79             | 2480                    | 1003                        | >921                                   |



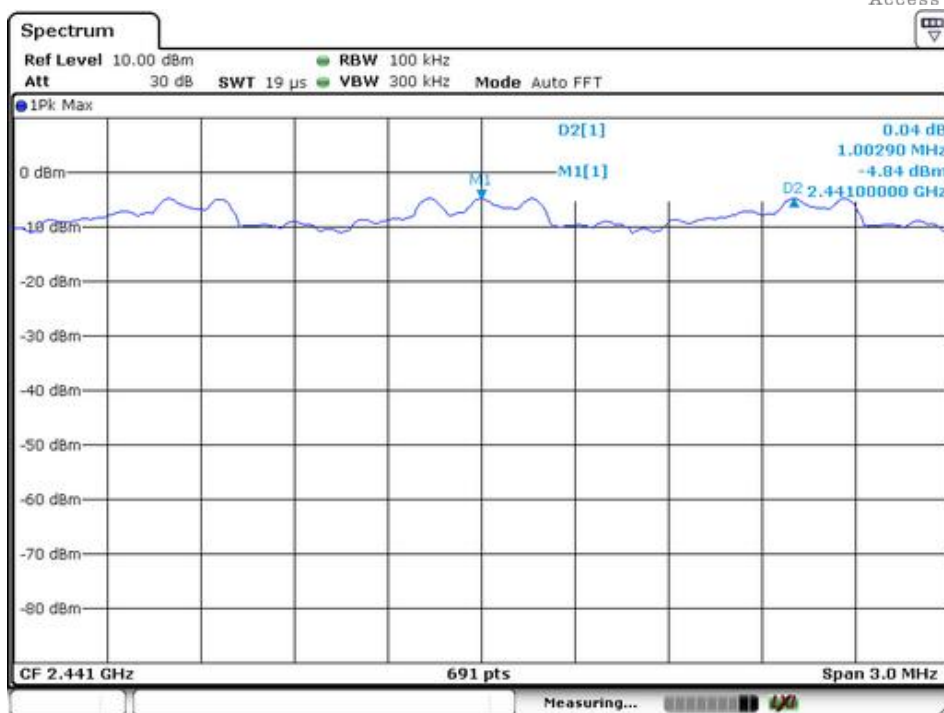


## 9. 20dB Bandwidth test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER | SERIAL NUMBER | Characteristics | LAST CAL.  | CAL DUE.   |
|-------------------|-----------------|--------------|---------------|-----------------|------------|------------|
| Spectrum Analyzer | Rohde & Schwarz | FSV30        | 1321.3008K    | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Coaxial Cable     | CDS             | 79254        | 46107086      | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Antenna Connector | ARTHUR-YANG     | 2244-N1TG1   | N/A           | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.


### 9.4 Measurement Results:

Refer to attached data chart.

|                    |      |               |                   |
|--------------------|------|---------------|-------------------|
| Spectrum Detector: | PK   | Test Date :   | December 20, 2019 |
| Test By:           | Andy | Temperature : | 24 °C             |
| Test Result:       | PASS | Humidity :    | 55 %              |
| Modulation:        | GFSK |               |                   |

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 1              | 2402                    | 1111              |
| 40             | 2441                    | 1111              |
| 79             | 2480                    | 1116              |

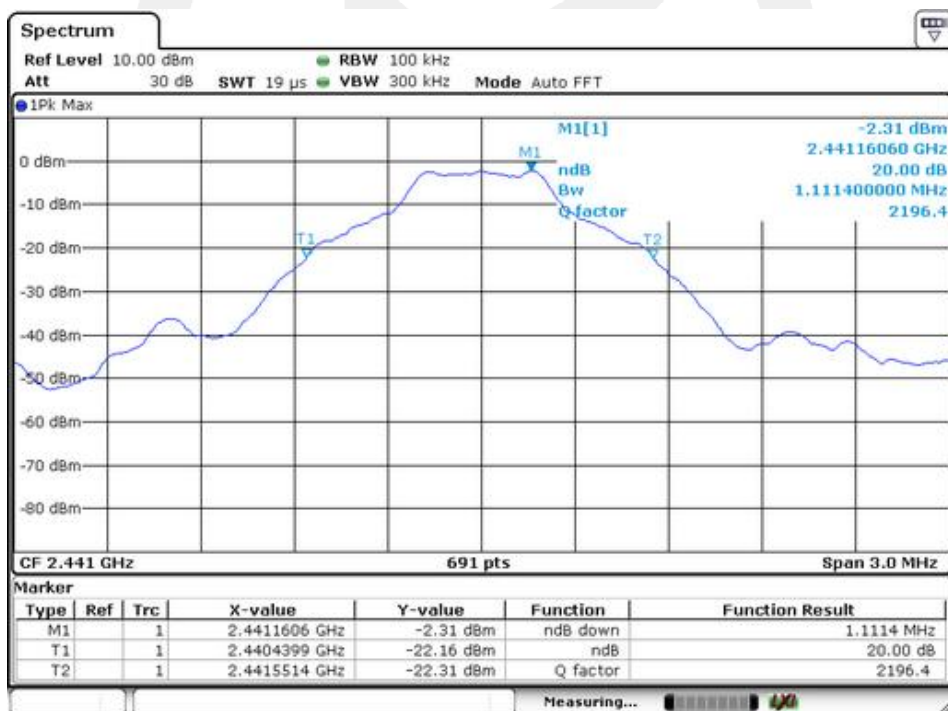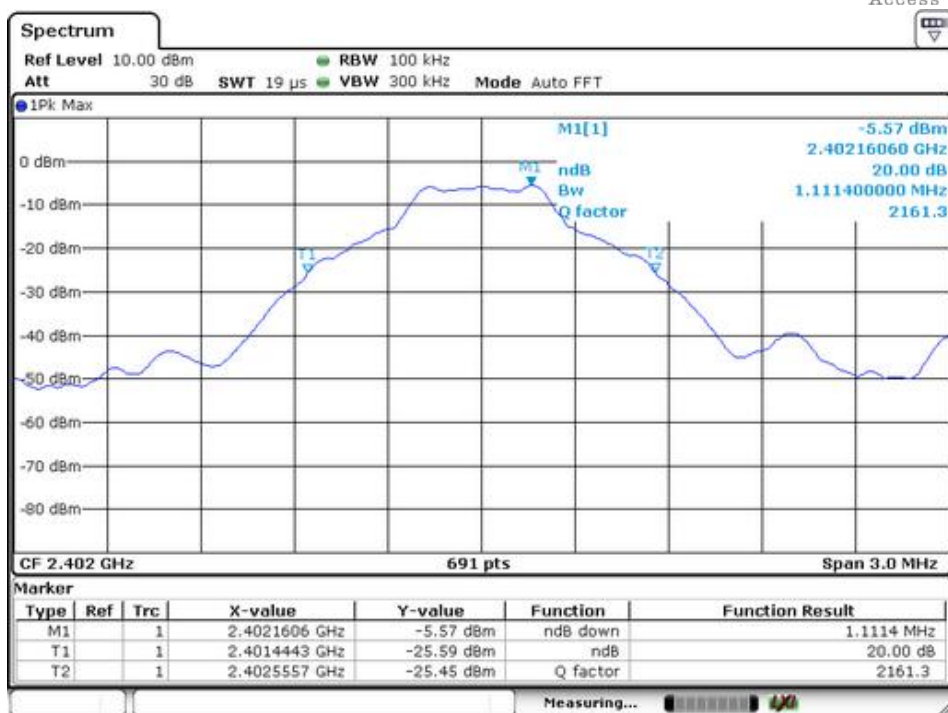



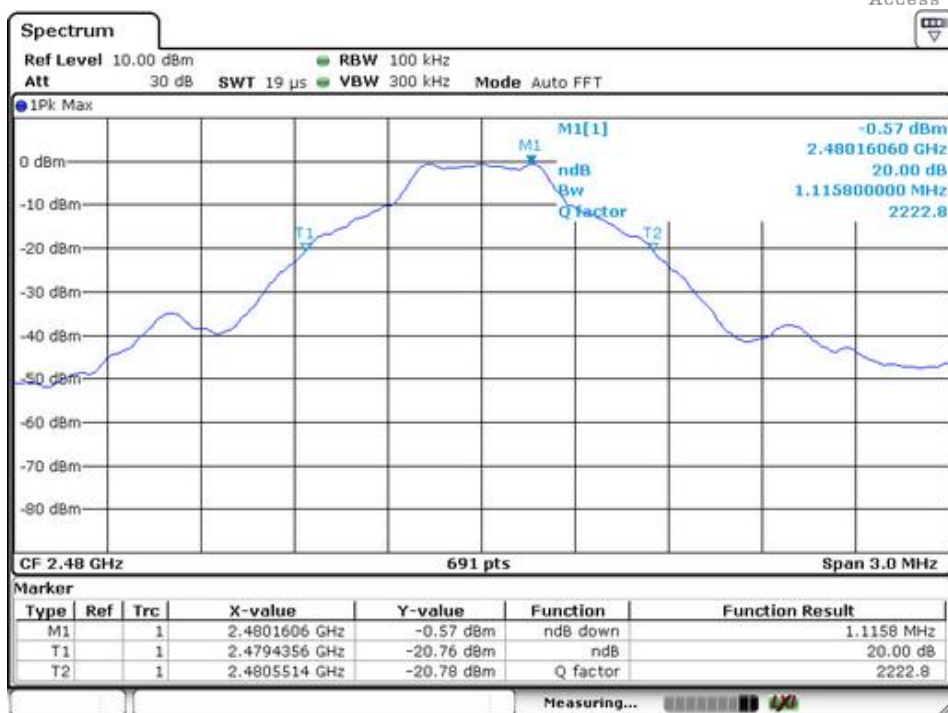


Spectrum Detector: PK  
 Test By: Andy  
 Test Result: PASS  
 Modulation:  $\Pi/4$ -DQPSK

Test Date : December 20, 2019  
 Temperature : 24 °C  
 Humidity : 55 %

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 1              | 2402                    | 1368              |
| 40             | 2441                    | 1376              |
| 79             | 2480                    | 1385              |

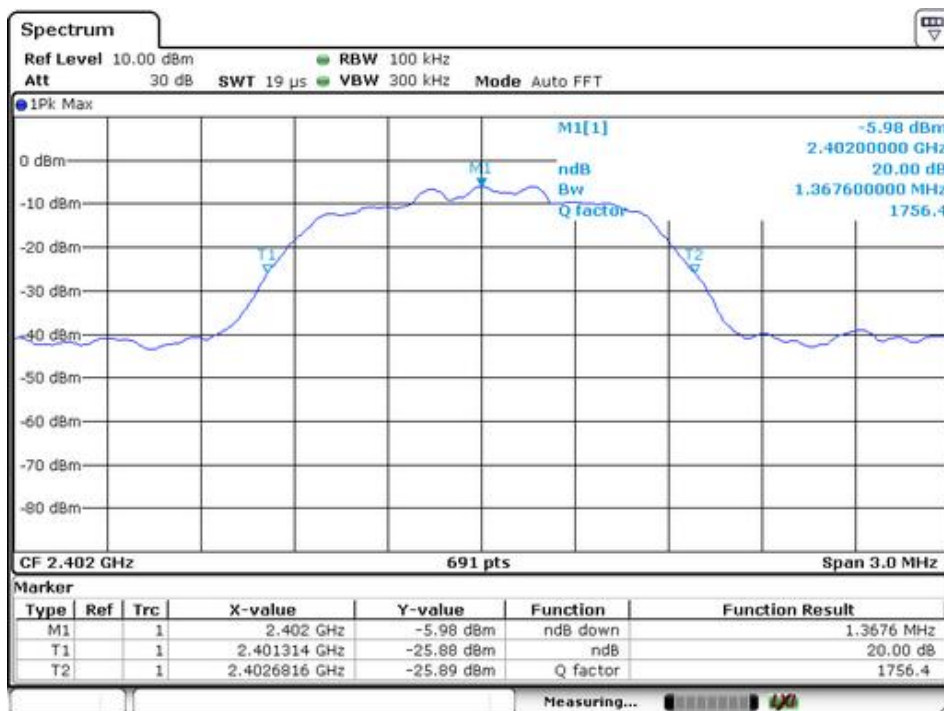


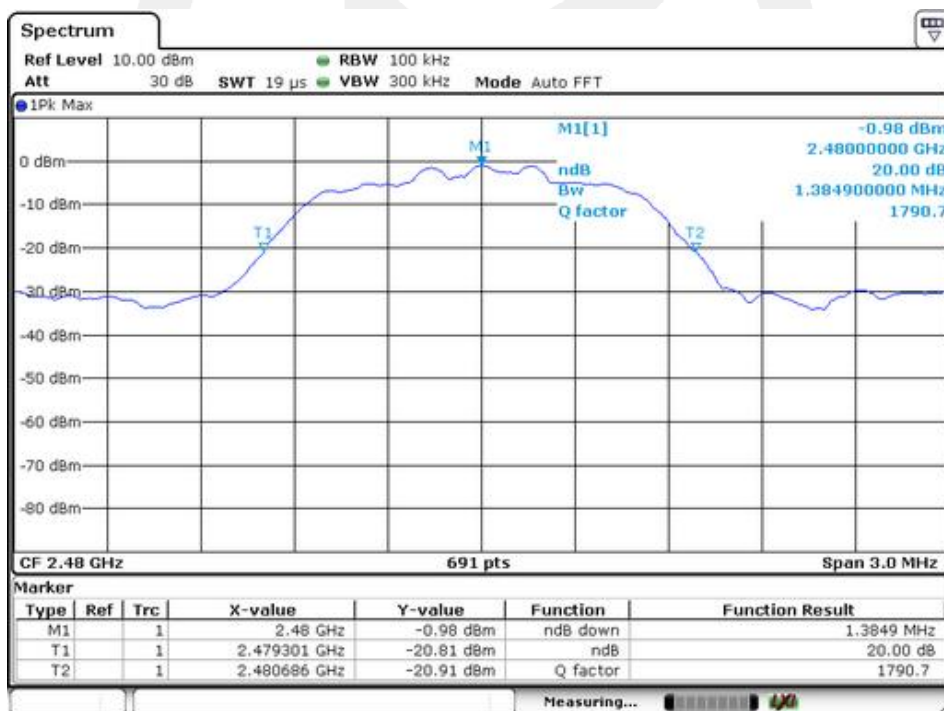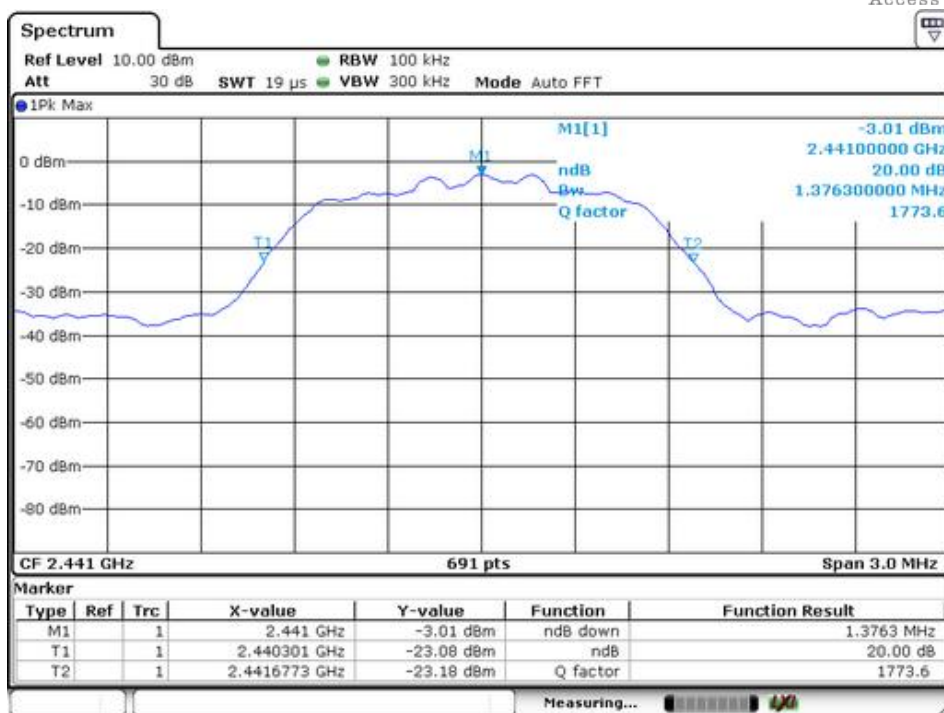


Spectrum Detector: PK  
Test By: Andy  
Test Result: PASS  
Modulation: 8DPSK

Test Date : December 20, 2019  
Temperature : 24 °C  
Humidity : 55 %

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 1              | 2402                    | 1376              |
| 40             | 2441                    | 1385              |
| 79             | 2480                    | 1394              |

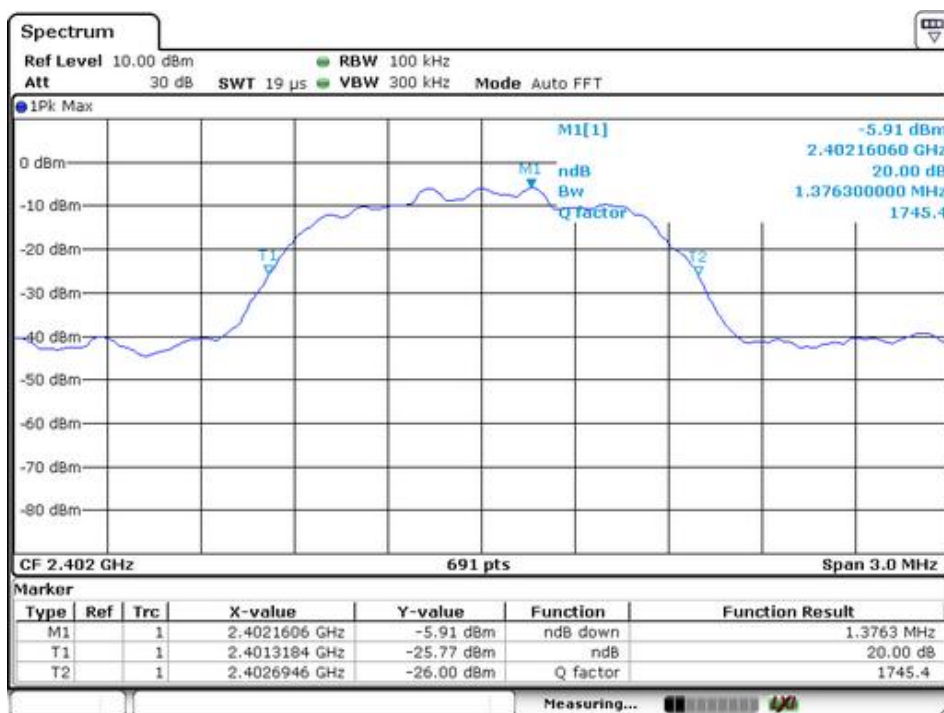

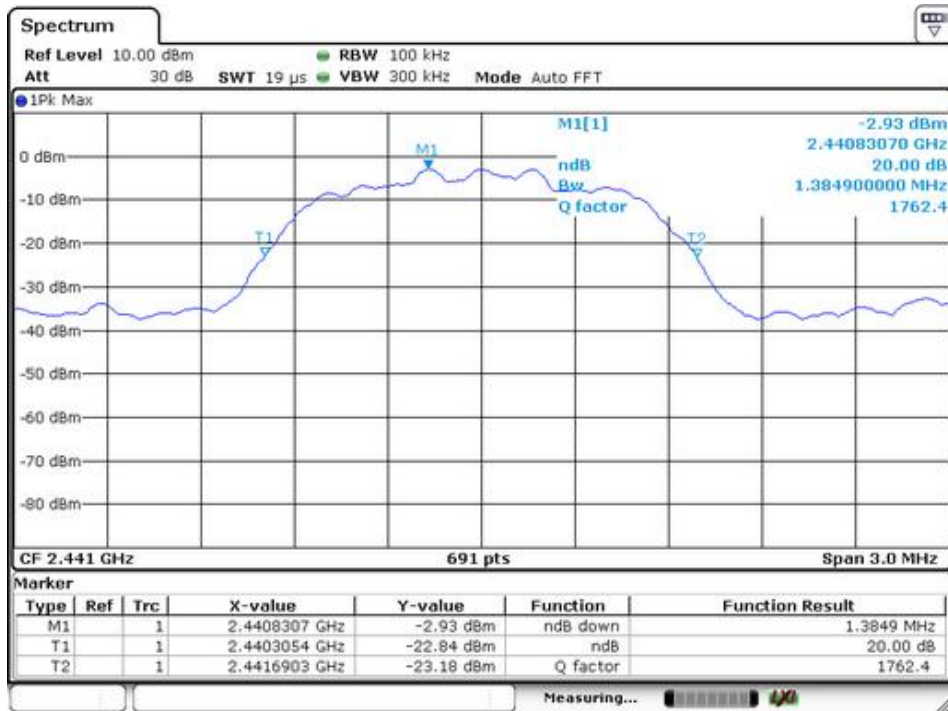


## 10. Quantity of Hopping Channel Test

### 10.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 10.2 Test SET-UP (Block Diagram of Configuration)



### 10.3 Measurement Equipment Used:

| EQUIPMENT TYPE    | MFR             | MODEL NUMBER | SERIAL NUMBER | Characteristics | LAST CAL.  | CAL DUE.   |
|-------------------|-----------------|--------------|---------------|-----------------|------------|------------|
| Spectrum Analyzer | Rohde & Schwarz | FSV30        | 1321.3008K    | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Coaxial Cable     | CDS             | 79254        | 46107086      | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |
| Antenna Connector | ARTHUR-YANG     | 2244-N1TG1   | N/A           | 10Hz-30GHz      | 05/23/2019 | 05/22/2020 |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

### 10.4 Measurement Results:

Refer to attached data chart.

|                 |      |               |                   |
|-----------------|------|---------------|-------------------|
| Worst Test Mode | GFSK | Test Date :   | December 20, 2019 |
| Test By:        | Andy | Temperature : | 24 °C             |
| Test Result:    | PASS | Humidity :    | 55 %              |

| Hopping Channel Frequency Range | Quantity of Hopping Channel | Quantity of Hopping Channel |
|---------------------------------|-----------------------------|-----------------------------|
| 2402-2480                       | 79                          | > 15                        |

