

MEASUREMENT REPORT

GSM / GPRS / EDGE / CDMA / WCDMA

Applicant Name:
LG Electronics USA, Inc.
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States


Date of Testing:
04/02 - 04/24/2020
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M2003310054-10.ZNF

FCC ID:	ZNFQ730VM
APPLICANT:	LG Electronics USA, Inc.

Application Type:	Certification
Model:	LM-Q730VM
Additional Model(s):	LM-Q730QM, LM-Q730QM5, LM-Q730QM6 , LM-Q730QN, LM-Q730UM, LMQ730VM, LMQ730QM, LMQ730QM5, LMQ730QM6, LMQ730QN, LMQ730UM, Q730VM, Q730QM, Q730QM5, Q730QM6, Q730QN, Q730UM
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	22, 24, & 27
Test Procedure(s):	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 1 of 107

T A B L E O F C O N T E N T S


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Measurements	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS.....	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	17
7.4	Band Edge Emissions at Antenna Terminal.....	53
7.5	Peak-Average Ratio	66
7.6	Radiated Power (ERP/EIRP).....	70
7.7	Radiated Spurious Emissions Measurements.....	75
7.8	Frequency Stability / Temperature Variation	92
8.0	CONCLUSION.....	107

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 2 of 107



MEASUREMENT REPORT

GSM / GPRS / EDGE / CDMA / WCDMA



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)	
GPRS850	22H	824.2 - 848.8	0.440	26.43	0.721	28.58	247KGXW
EDGE850	22H	824.2 - 848.8	0.119	20.76	0.195	22.91	248KG7W
CDMA850	22H	824.70 - 848.31	0.054	17.34	0.089	19.49	1M28F9W
WCDMA850	22H	826.4 - 846.6	0.064	18.07	0.105	20.22	4M19F9W
WCDMA1700	27	1712.4 - 1752.6			0.152	21.82	4M19F9W
GPRS1900	24E	1850.2 - 1909.8			0.603	27.80	244KGXW
EDGE1900	24E	1850.2 - 1909.8			0.146	21.65	239KG7W
CDMA1900	24E	1851.25 - 1908.75			0.145	21.63	1M28F9W
WCDMA1900	24E	1852.4 - 1907.6			0.119	20.77	4M19F9W

EUT Overview

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 3 of 107

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 4 of 107

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFQ730VM**. The test data contained in this report pertains only to the emissions due to the EUT's 2G/3G licensed transmitters.

Test Device Serial No.: 01904, 01912, 01862, 01870, 01888, 01896

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multiband LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 5 of 107

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Measurement Guidance for Certification of Licensed Digital Transmitters” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Measurements

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d [\text{dBm}] = P_g [\text{dBm}] - \text{cable loss} [\text{dB}] + \text{antenna gain} [\text{dBd/dBi}]$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g [\text{dBm}] - \text{cable loss} [\text{dB}]$.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI/TIA-603-E-2016.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 6 of 107

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFQ730VM	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset	Page 7 of 107

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx1
-	LTx4	Licensed Transmitter Cable Set	6/4/2019	Annual	6/4/2020	LTx4
-	LTx5	Licensed Transmitter Cable Set	6/5/2019	Annual	6/5/2020	LTx5
Agilent	E5515C	Wireless Communications Test Set	N/A			GB46310798
Agilent	N9038A	MXE EMI Receiver	7/17/2019	Annual	7/17/2020	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	6/12/2019	Annual	6/12/2020	MY52350166
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	5/10/2019	Annual	5/10/2020	441112
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/9/2018	Biennial	8/9/2020	135427
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	4/20/2019	Annual	4/25/2020	11210140001
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	6/5/2019	Annual	6/5/2020	100342
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	4/30/2018	Biennial	4/30/2020	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	N/A

Table 5-1. Test Equipment

Notes:

- For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
- Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset	Page 8 of 107	

6.0 SAMPLE CALCULATIONS

GSM Emission Designator

Emission Designator = 250KGXW

GSM BW = 250 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 250KG7W

EDGE BW = 250 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

CDMA Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M16F9W

WCDMA BW = 4.16 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm - (-24.80) = 50.3 dBc.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 9 of 107

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFQ730VM
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): GSM / GPRS / EDGE / CDMA / WCDMA

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 22.917(a) 24.238(a) 27.53(h)	Conducted Band Edge / Spurious Emissions	> 43 + 10 log ₁₀ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Sections 7.3, 7.4
24.232(d) 27.50	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	Transmitter Conducted Output Power	N/A		PASS	RF Exposure Report
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Emission must remain in band (Part 24, 27)		PASS	Section 7.8
22.913(a)(5)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(h)	Radiated Spurious Emissions	> 43 + 10 log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 4.2.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 10 of 107

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 11 of 107




Plot 7-1. Occupied Bandwidth Plot (Cellular GPRS Mode)




Plot 7-2. Occupied Bandwidth Plot (EDGE850 Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 12 of 107

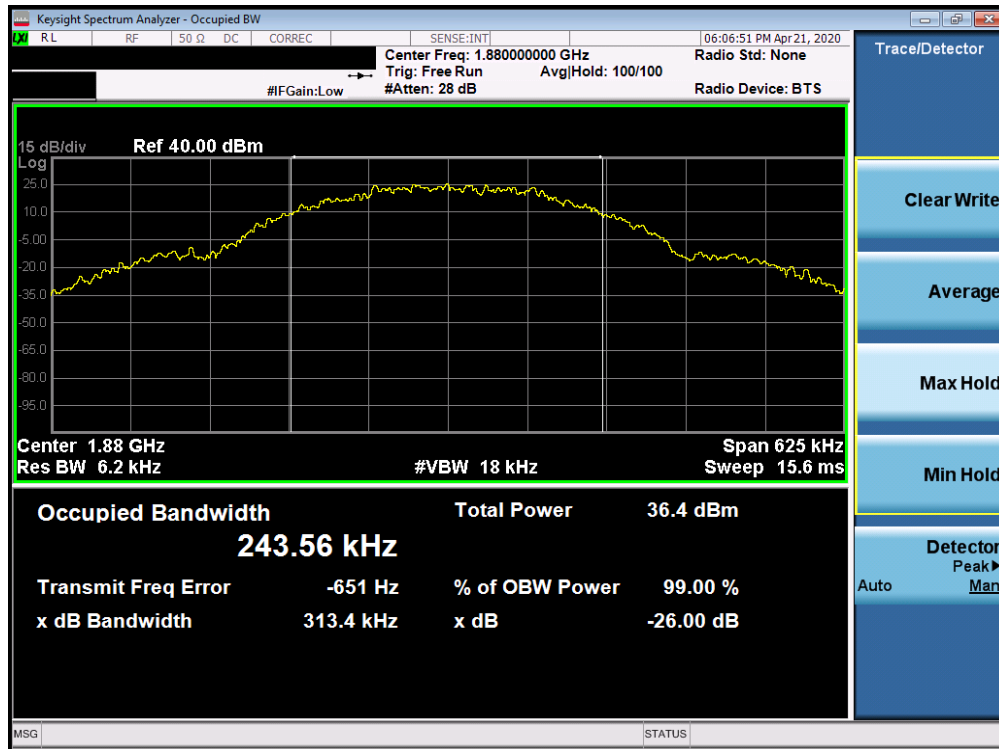


Plot 7-3. Occupied Bandwidth Plot (PCS GPRS Mode)

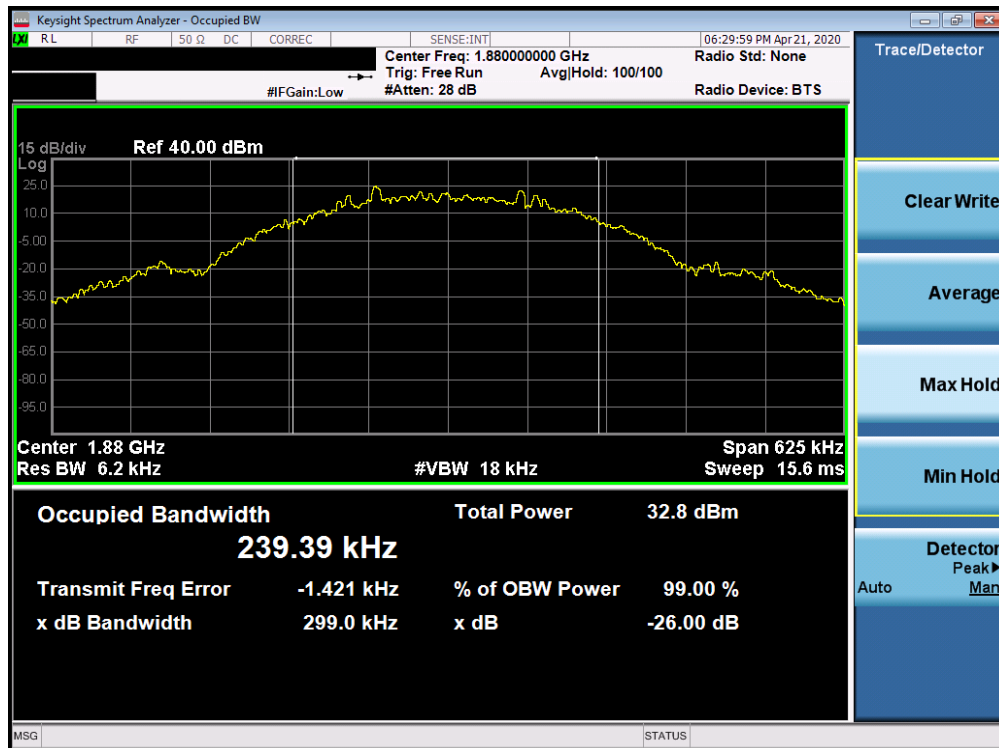


Plot 7-4. Occupied Bandwidth Plot (EDGE1900 Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 13 of 107

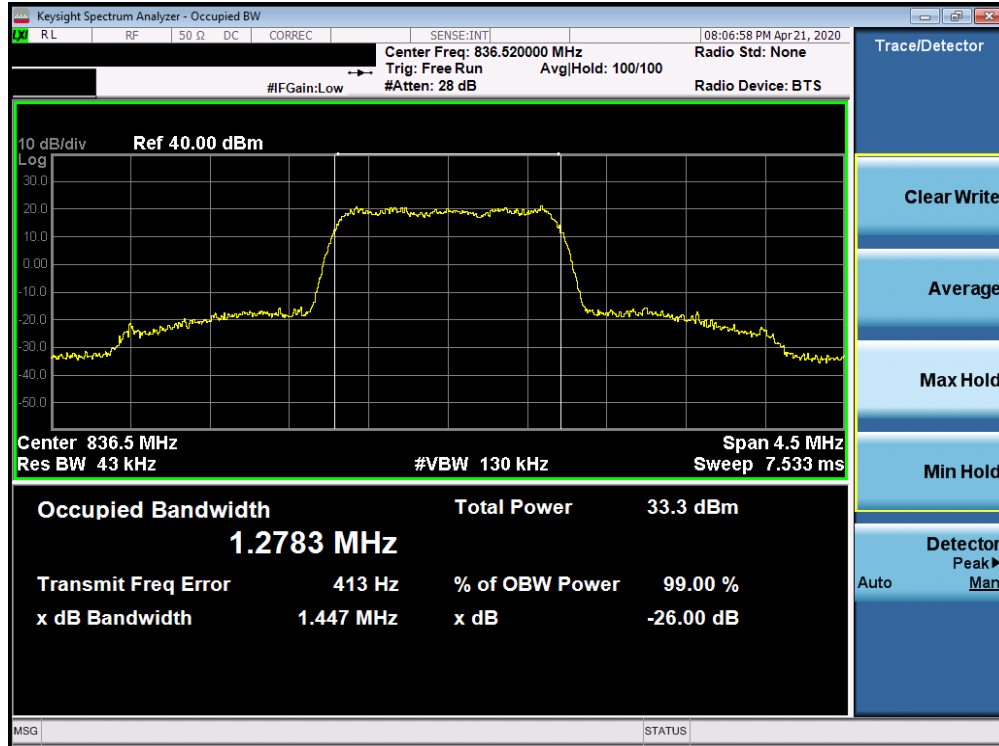


Plot 7-5. Occupied Bandwidth Plot (Cellular CDMA Mode)

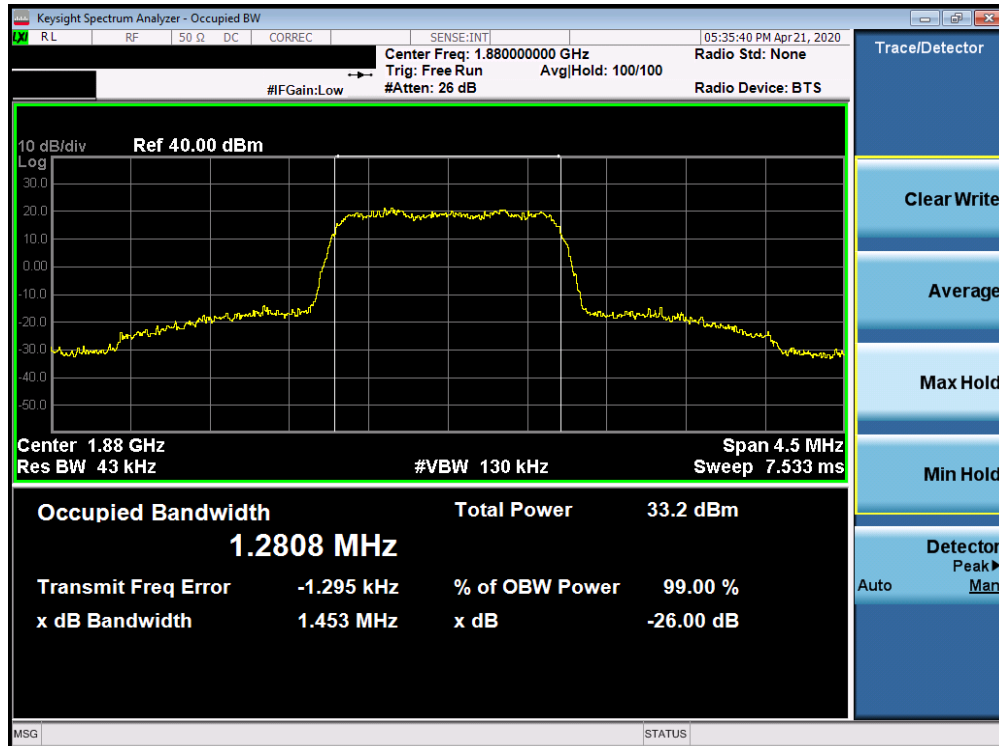


Plot 7-6. Occupied Bandwidth Plot (PCS CDMA Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 14 of 107

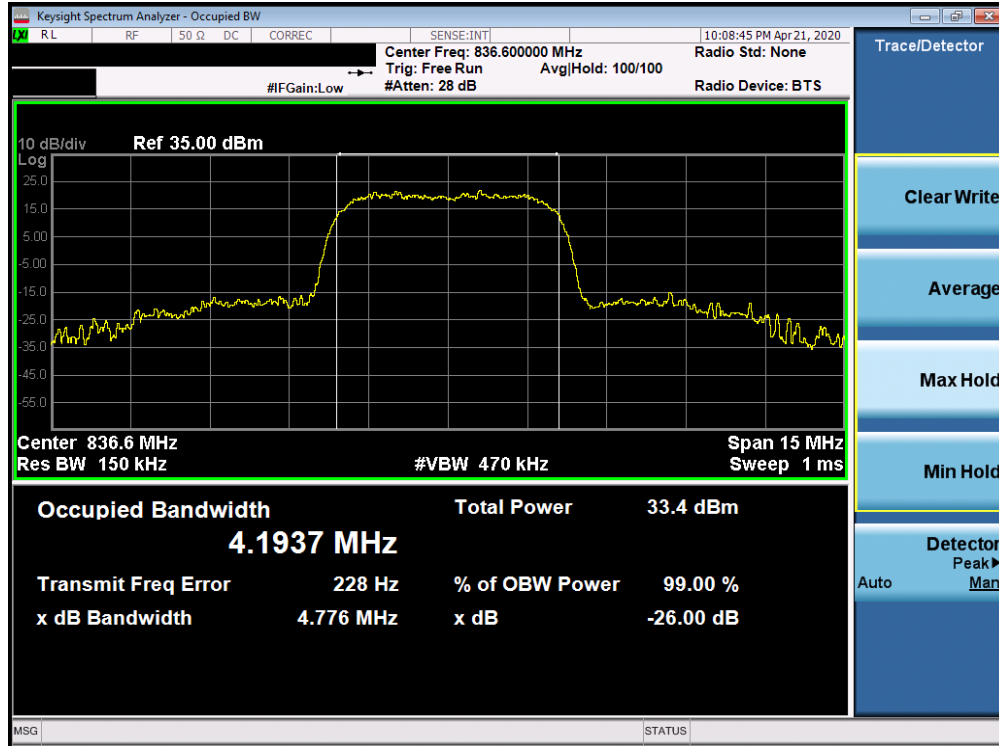


Plot 7-7. Occupied Bandwidth Plot (Cellular WCDMA Mode)

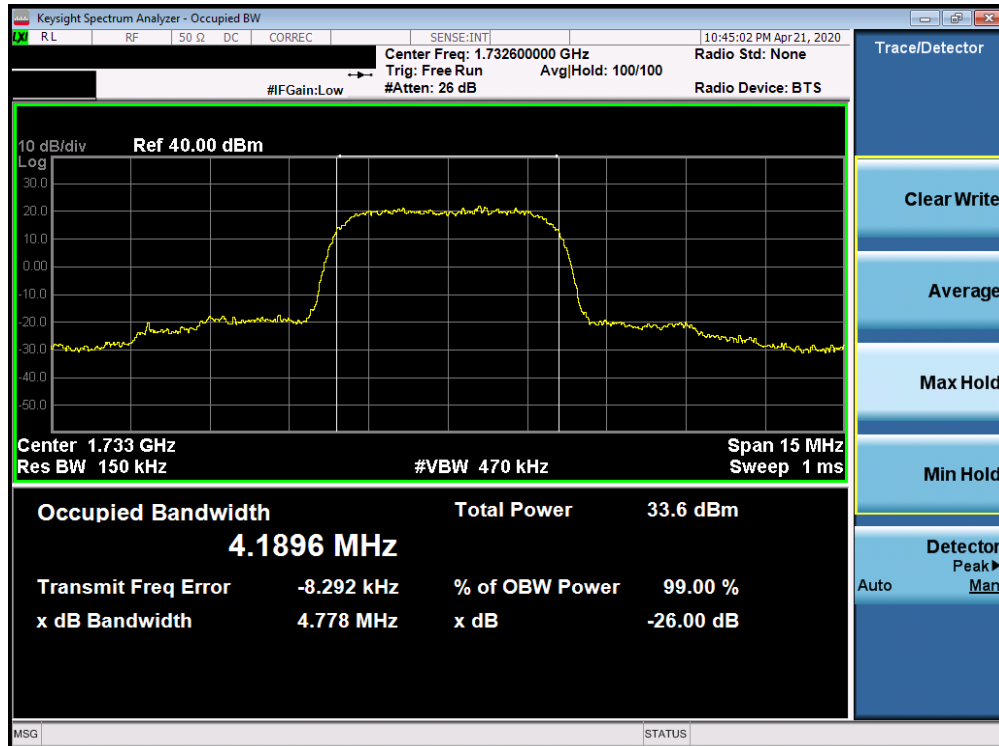

Plot 7-8. Occupied Bandwidth Plot (AWS WCDMA Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 15 of 107

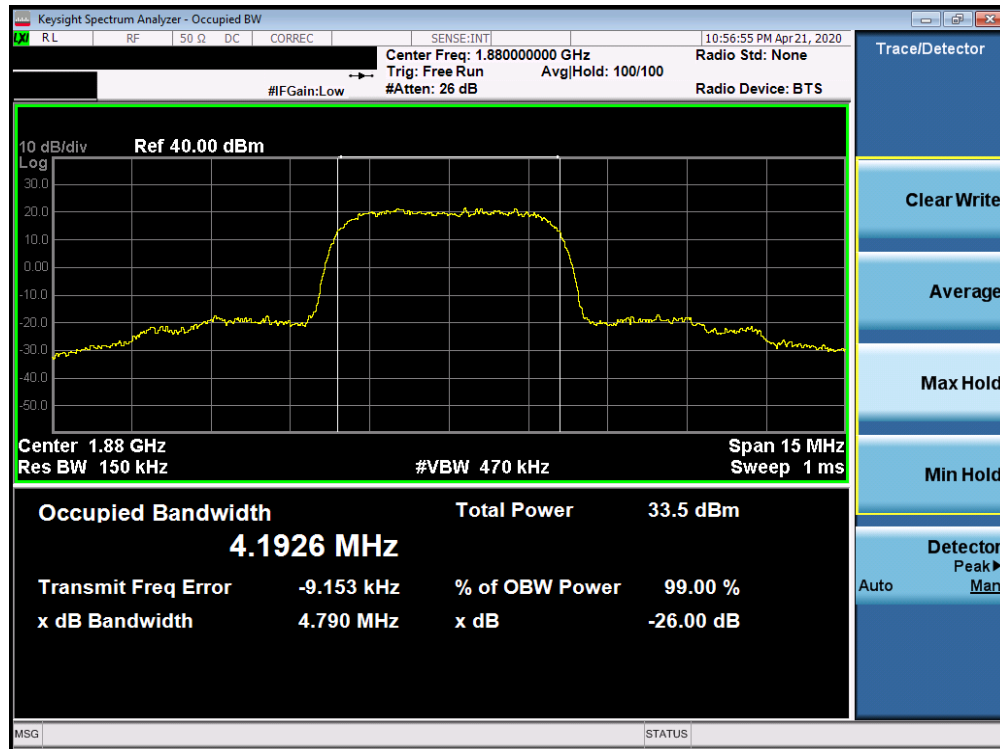

Plot 7-9. Occupied Bandwidth Plot (PCS WCDMA Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 16 of 107

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10\log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for AWS, 20GHz for PCS (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Per 24.238(b), 27.53(h)(3), and RSS-133(6.5), RSS-139(6.5), compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1MHz, and 100 kHz or greater for Part 22 and RSS-132 measurements below 1GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 17 of 107

Cellular GPRS Mode

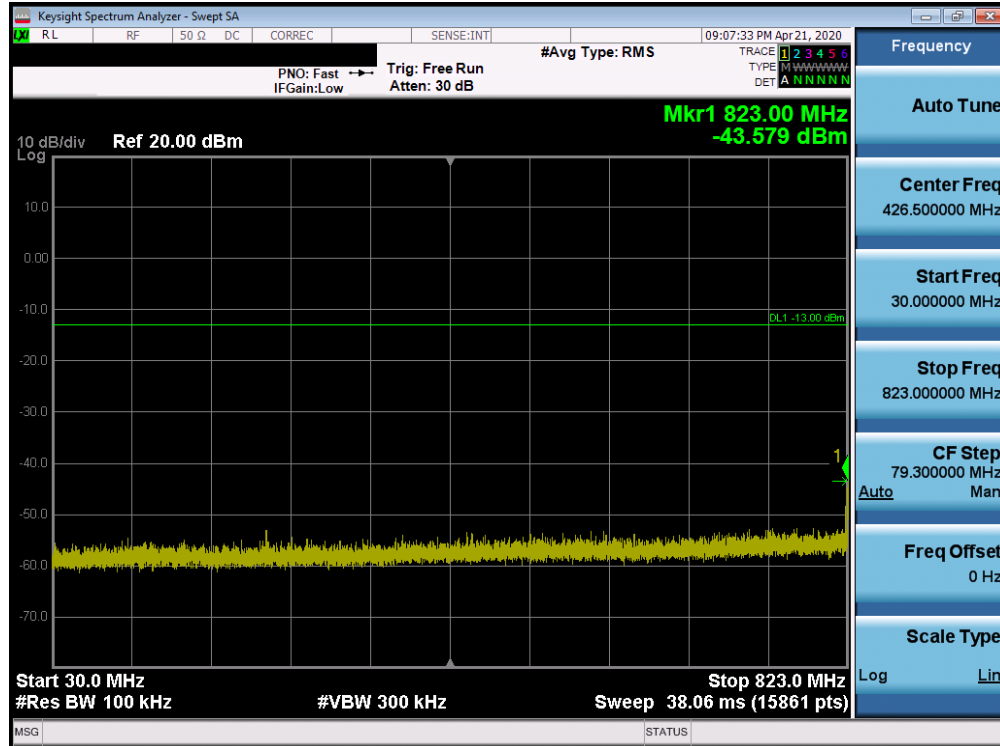


Plot 7-10. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

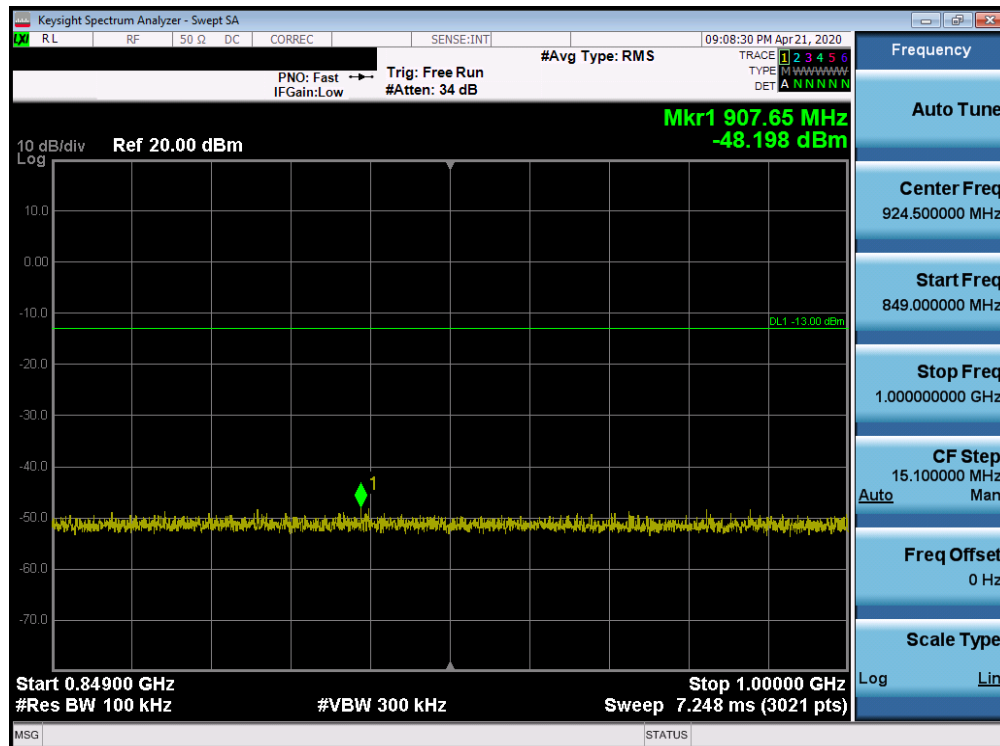


Plot 7-11. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 18 of 107

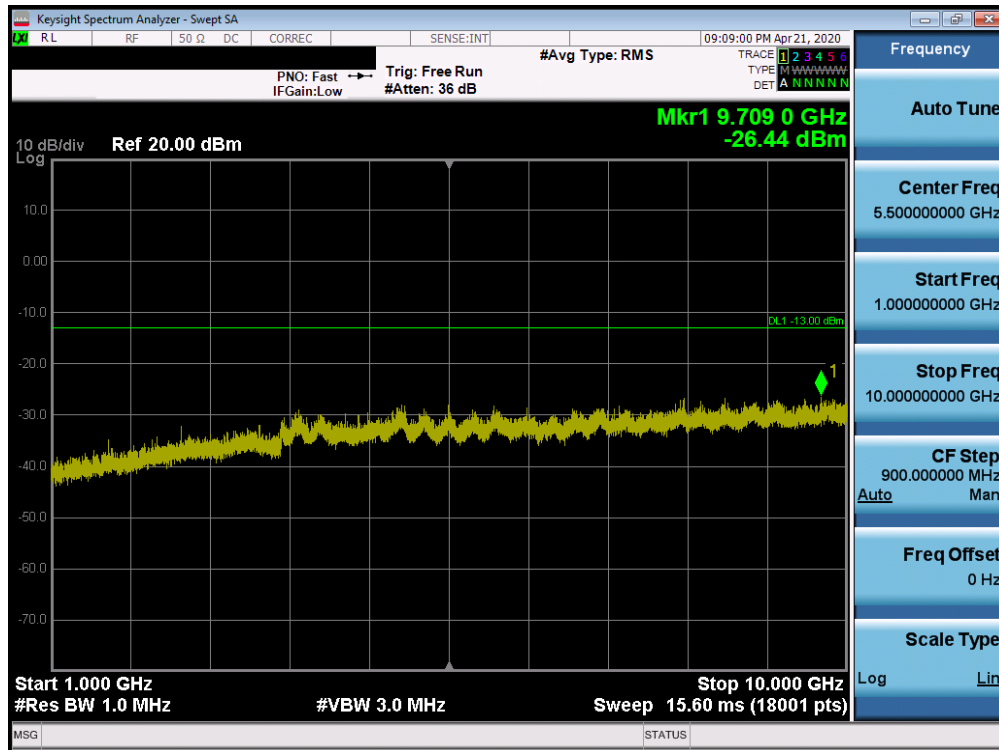


Plot 7-12. Conducted Spurious Plot (Cellular GPRS Mode - Low Channel)

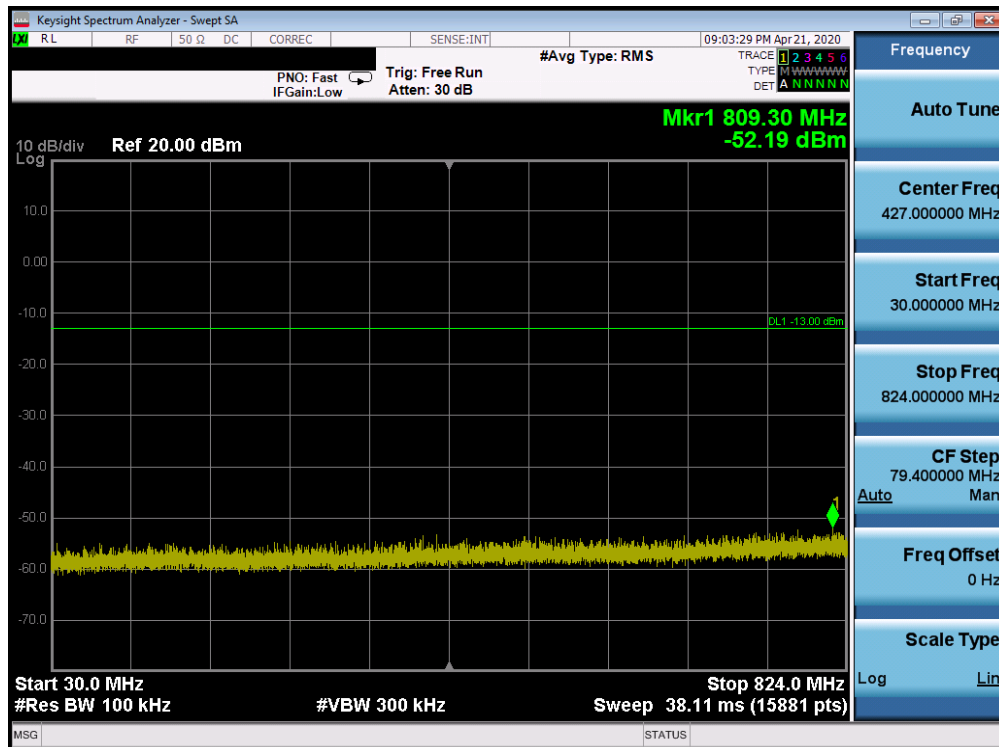


Plot 7-13. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 19 of 107

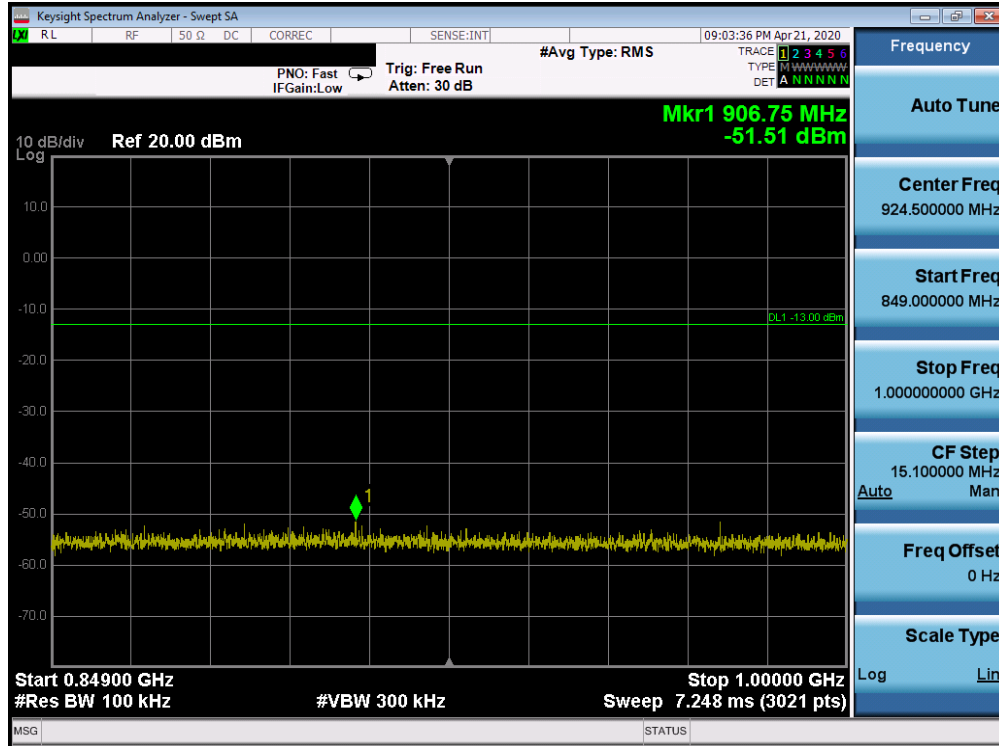


Plot 7-14. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

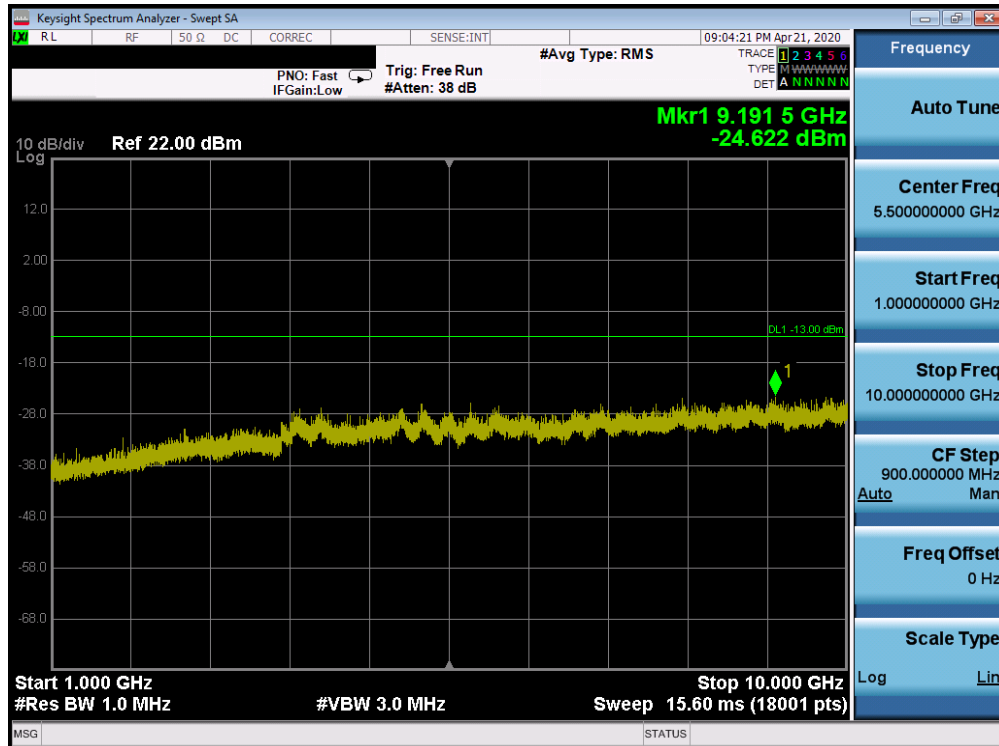


Plot 7-15. Conducted Spurious Plot (Cellular GPRS Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 20 of 107

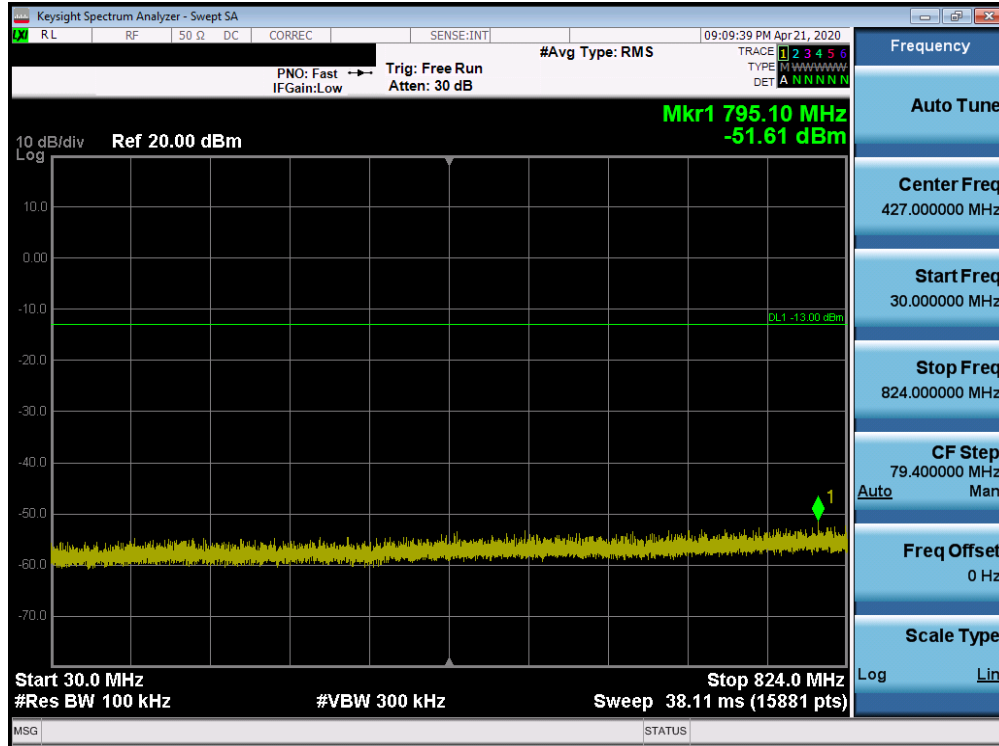


Plot 7-16. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

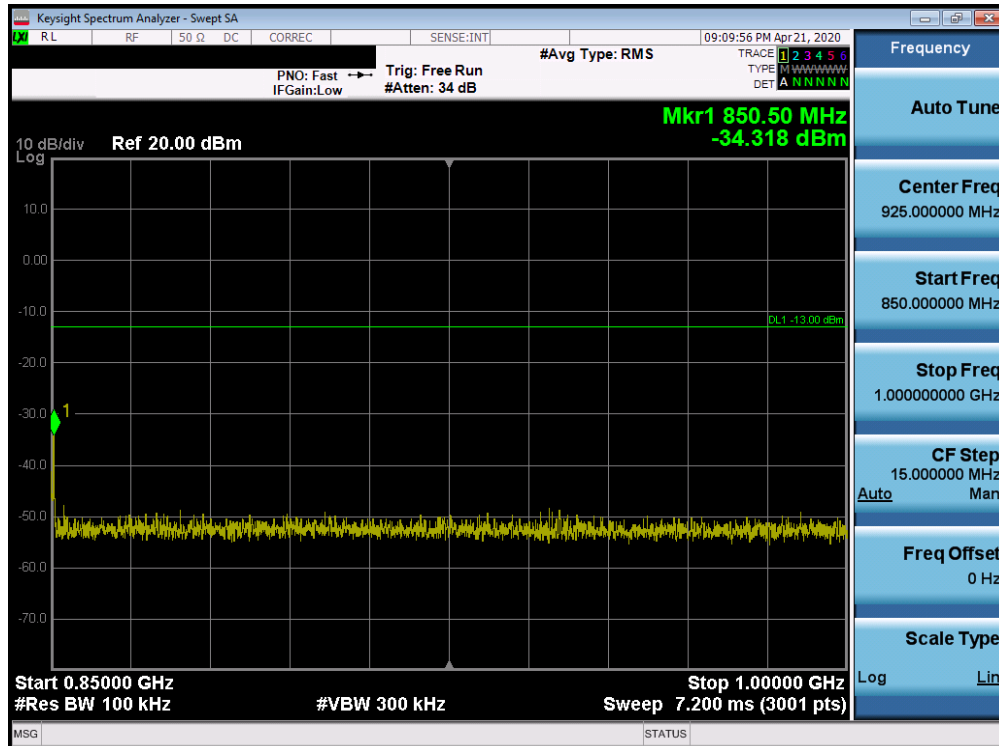

Plot 7-17. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)


FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 21 of 107

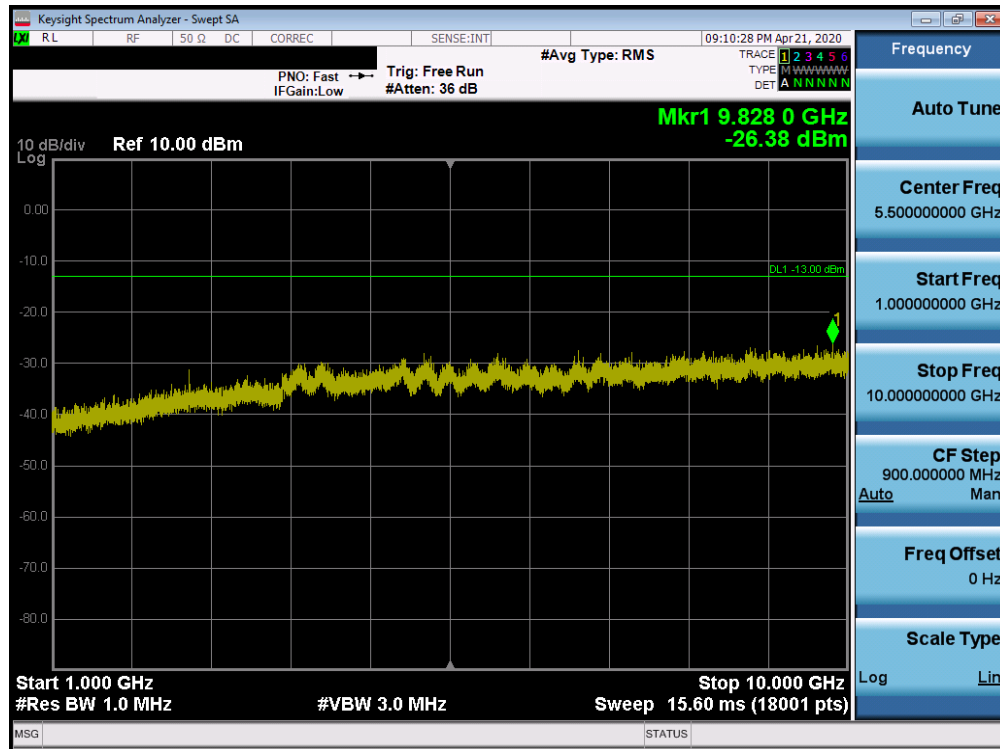


Plot 7-18. Conducted Spurious Plot (Cellular GPRS Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 22 of 107

PCS GPRS Mode

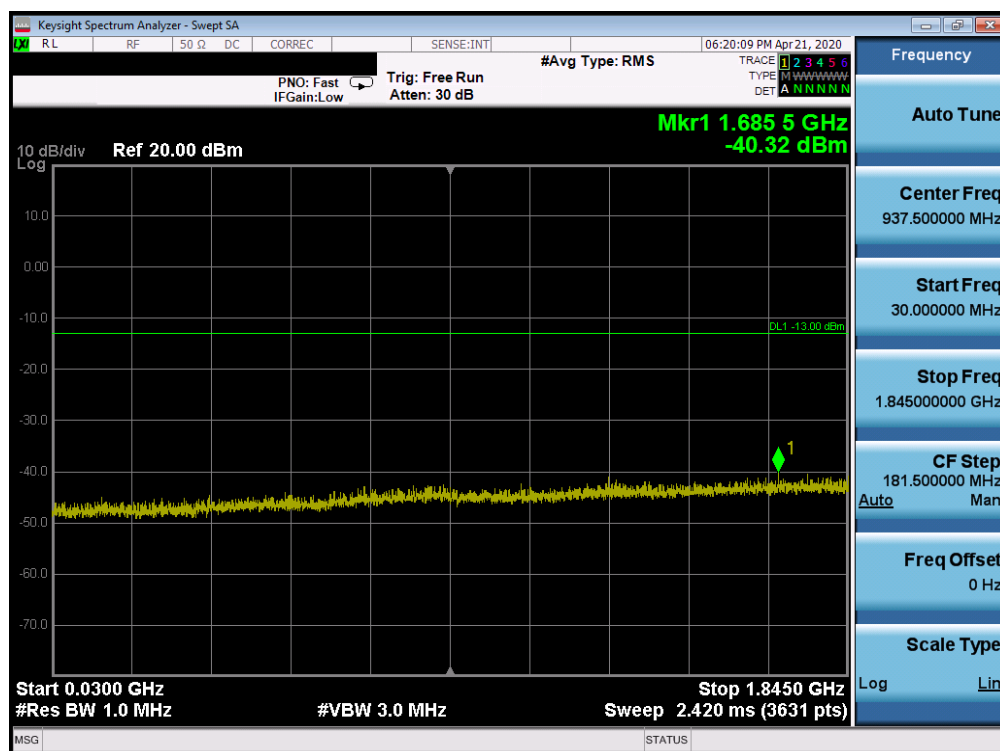


Plot 7-19. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

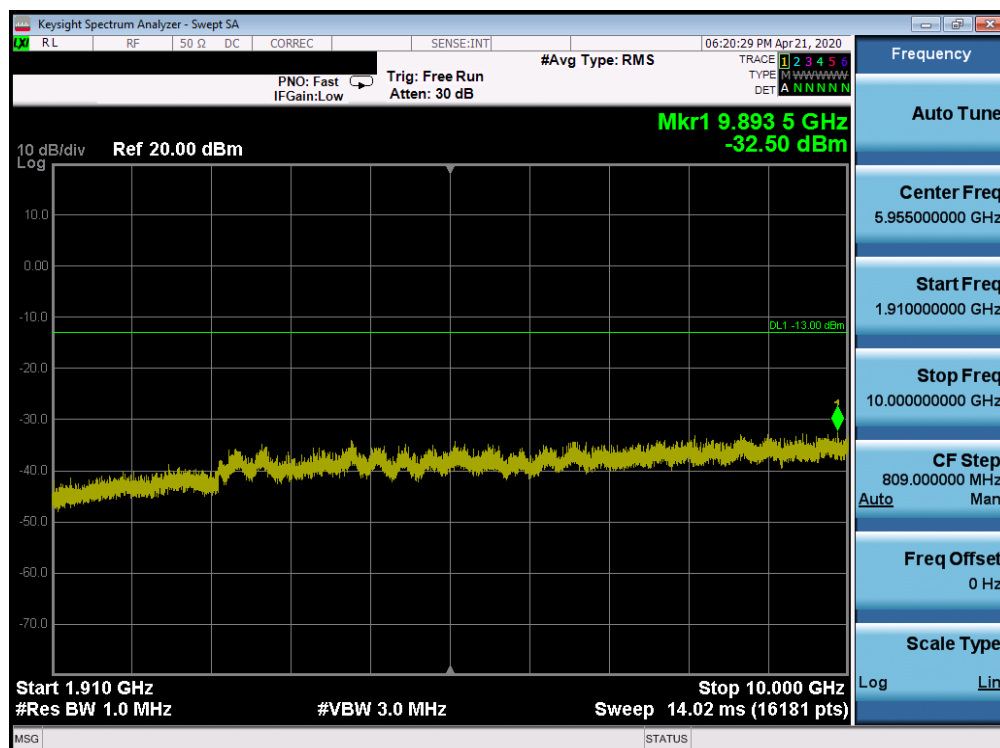


Plot 7-20. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

FCC ID: ZNFQ730VM	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset	Page 23 of 107

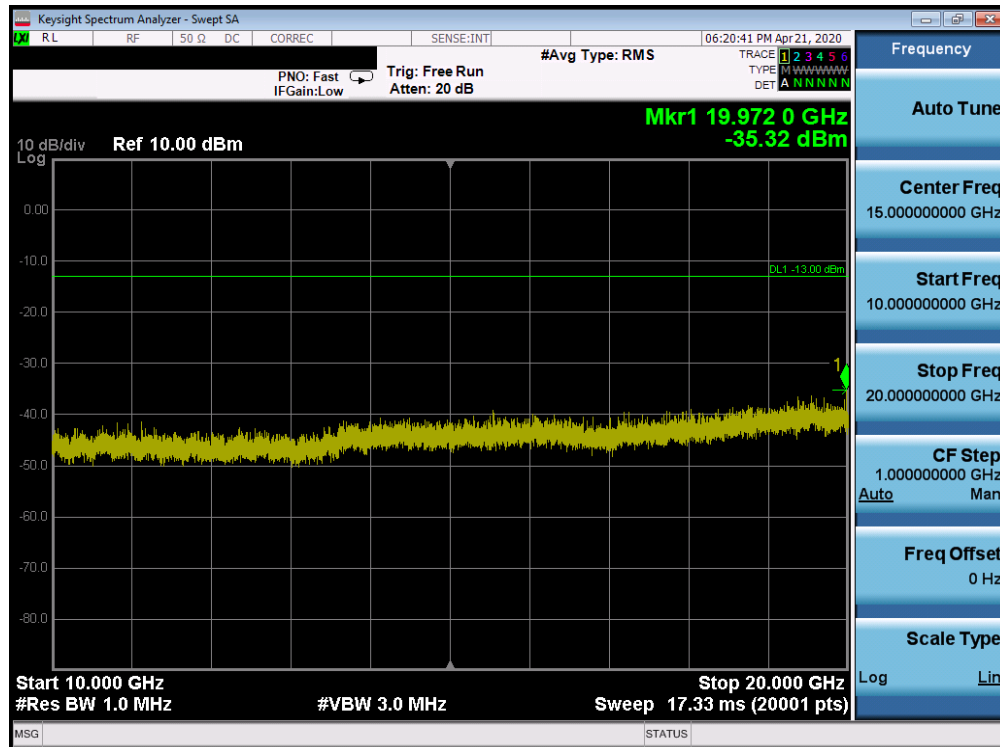


Plot 7-21. Conducted Spurious Plot (PCS GPRS Mode - Low Channel)

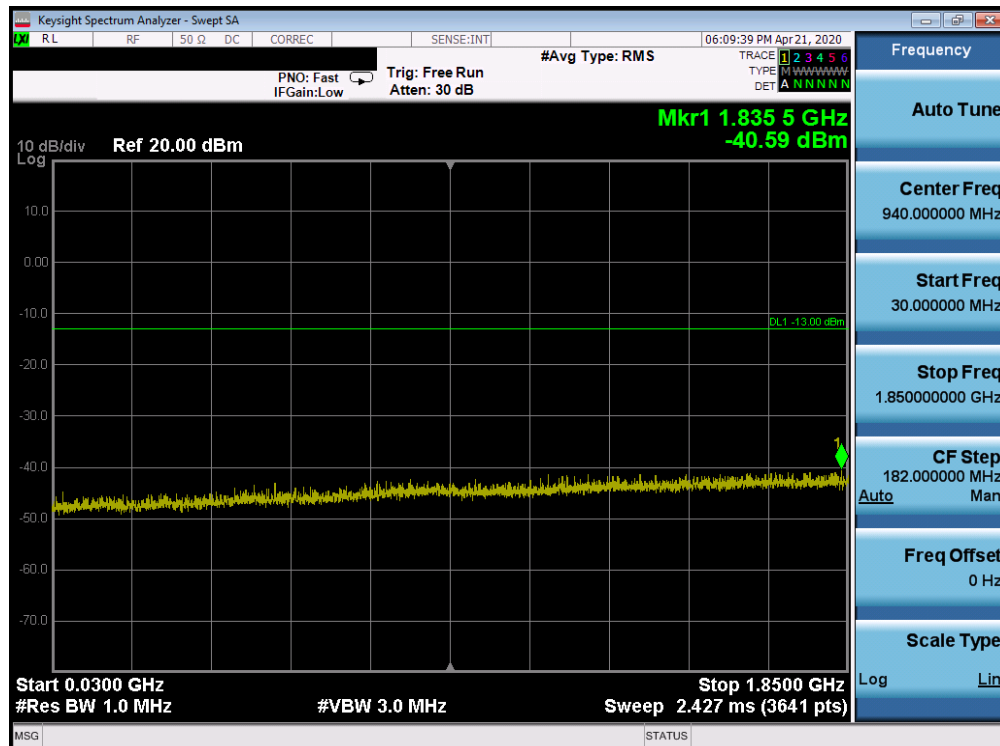


Plot 7-22. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 24 of 107

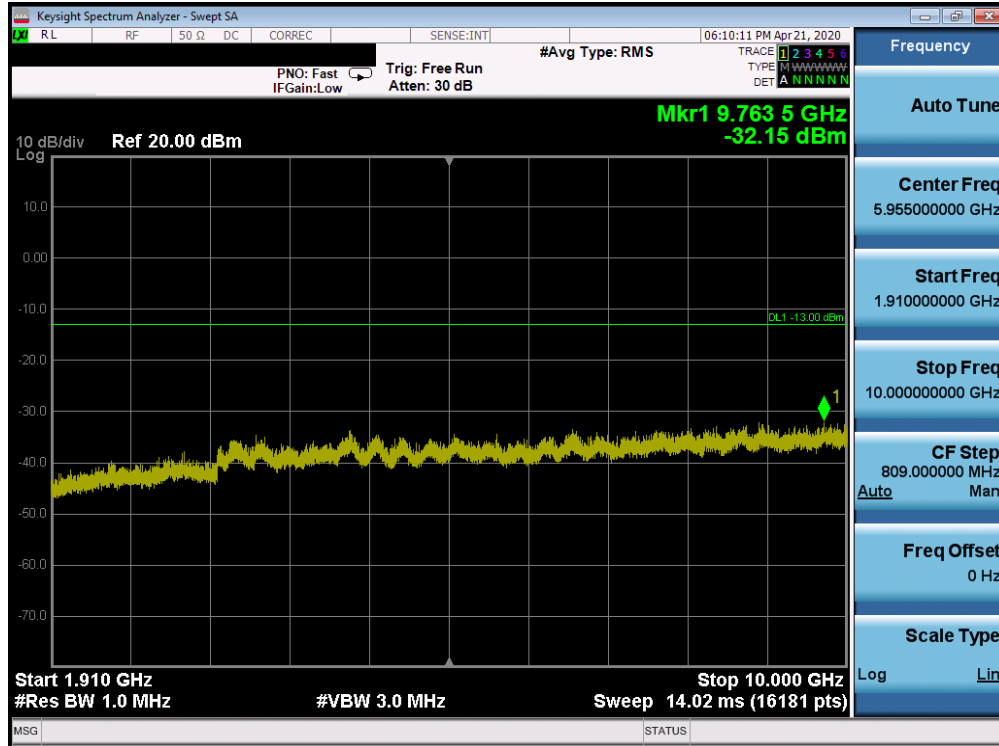


Plot 7-23. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

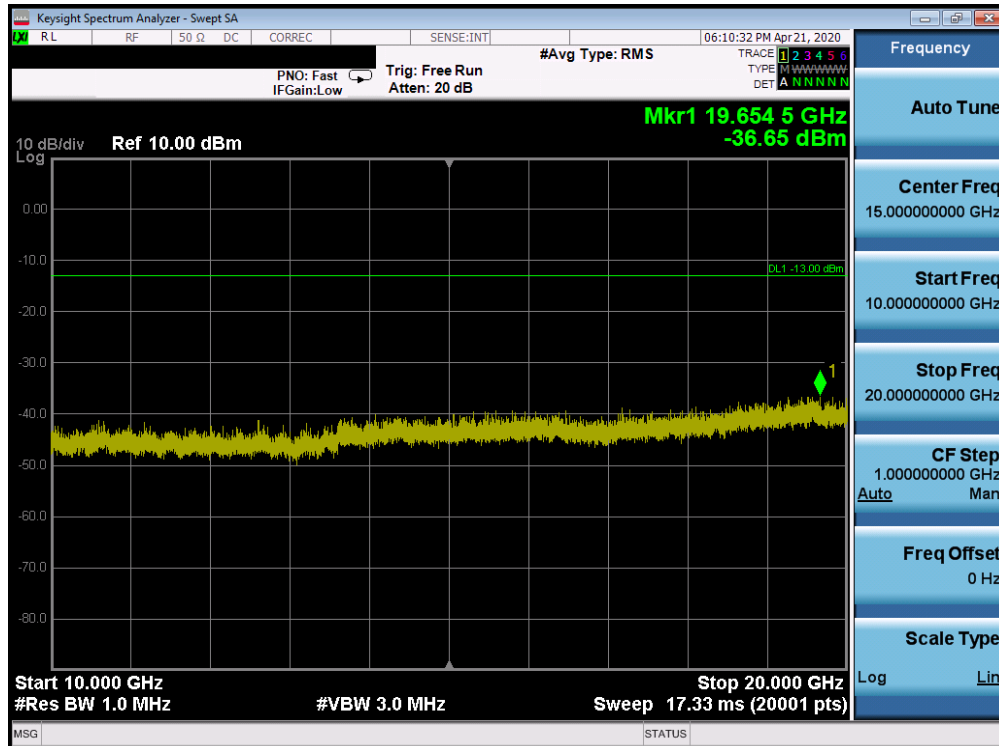


Plot 7-24. Conducted Spurious Plot (PCS GPRS Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 25 of 107

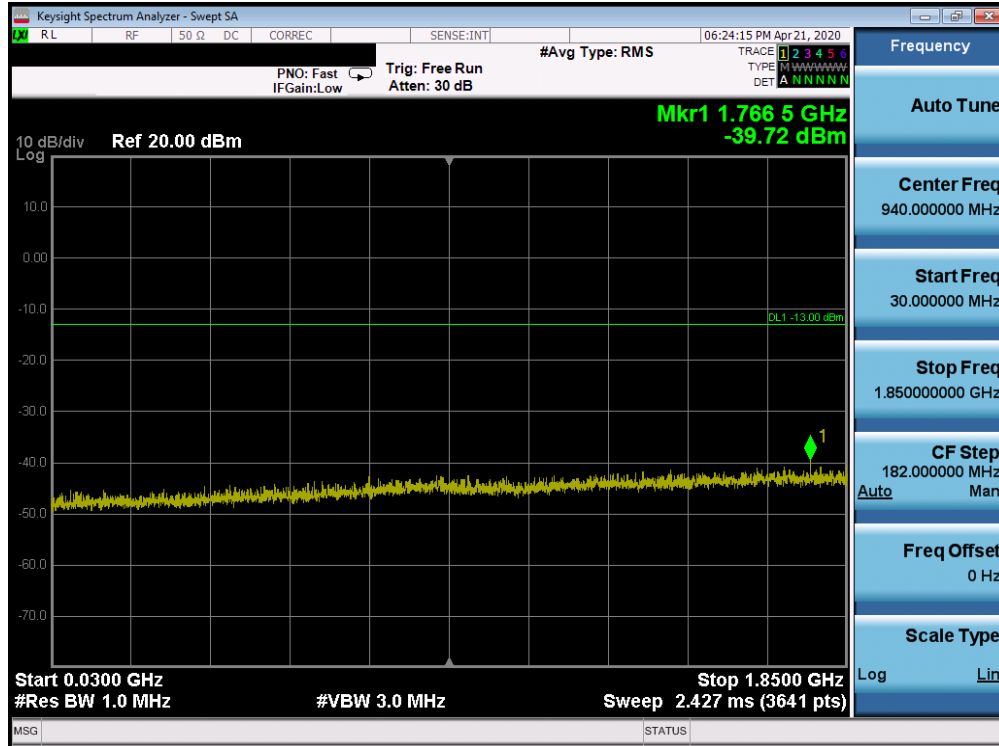


Plot 7-25. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

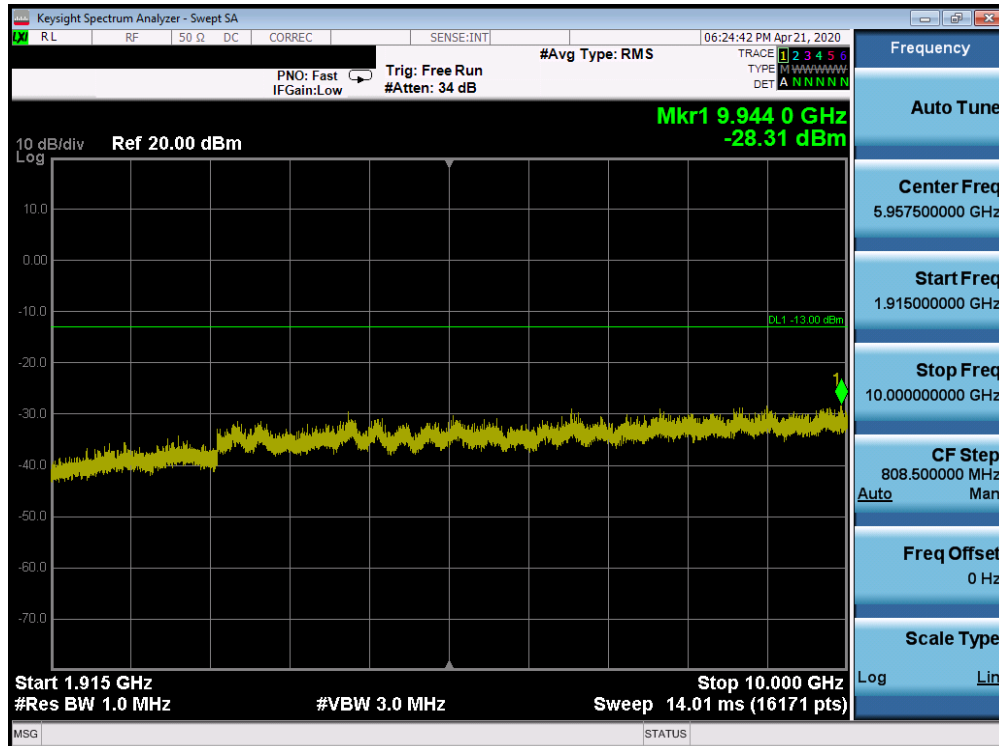

Plot 7-26. Conducted Spurious Plot (PCS GPRS Mode - High Channel)


FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 26 of 107

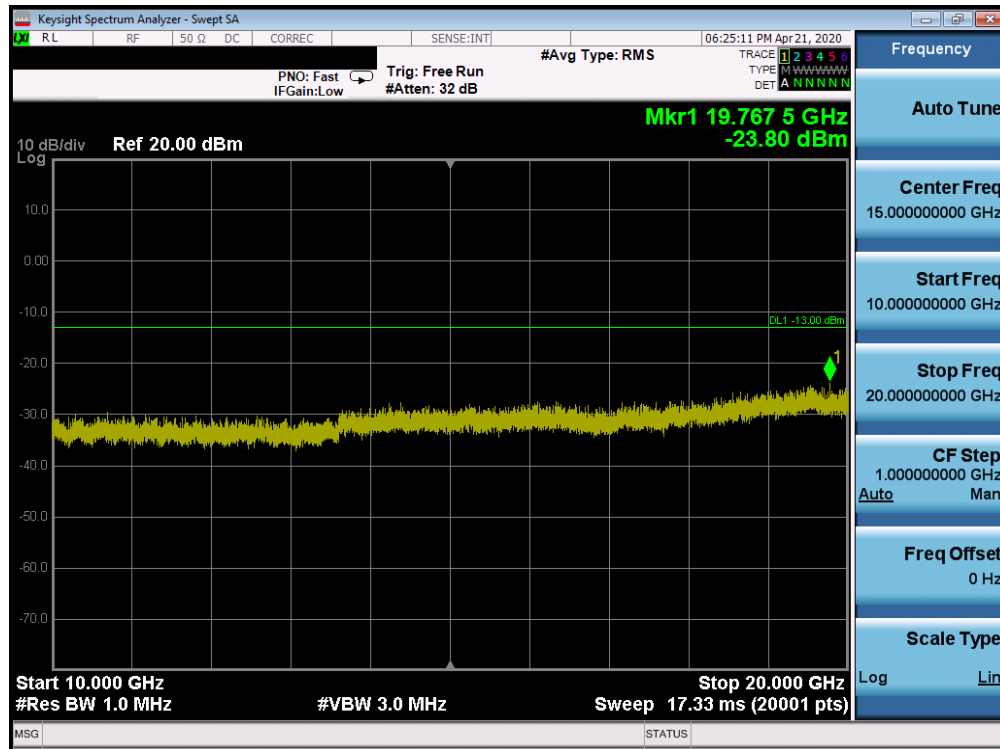


Plot 7-27. Conducted Spurious Plot (PCS GPRS Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 27 of 107

Cellular CDMA Mode

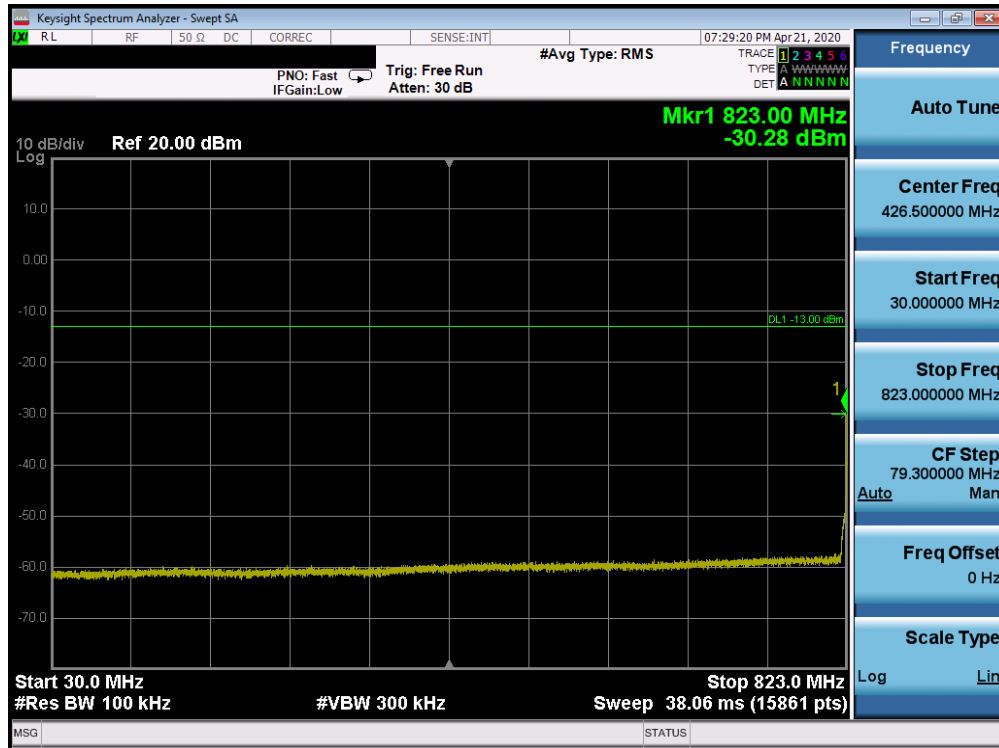


Plot 7-28. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

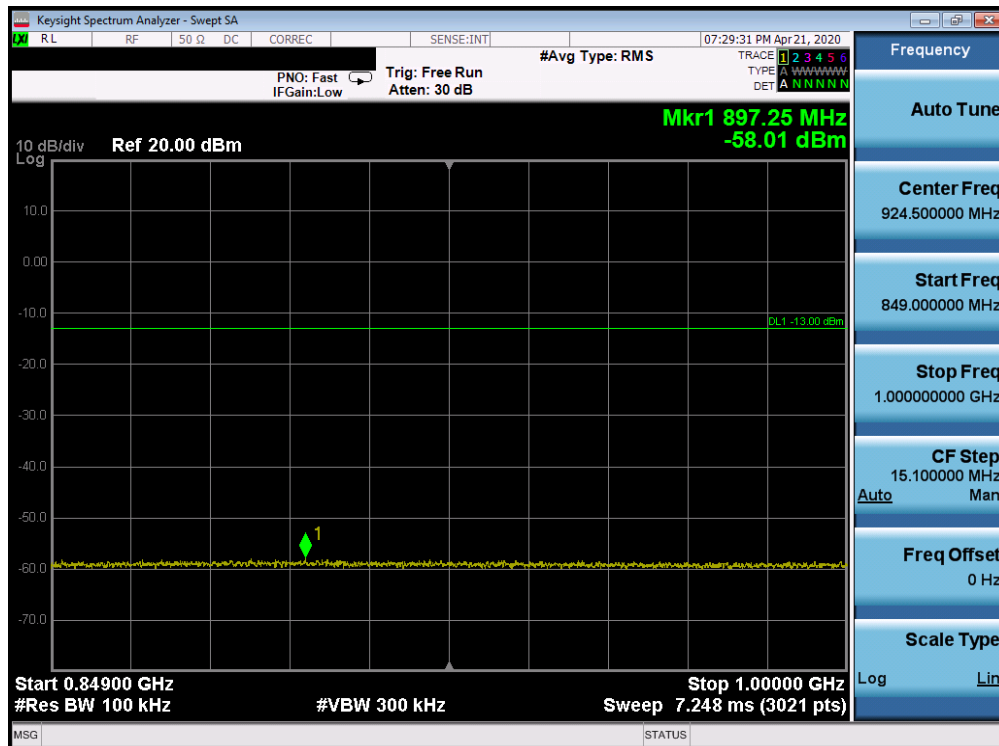


Plot 7-29. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 28 of 107

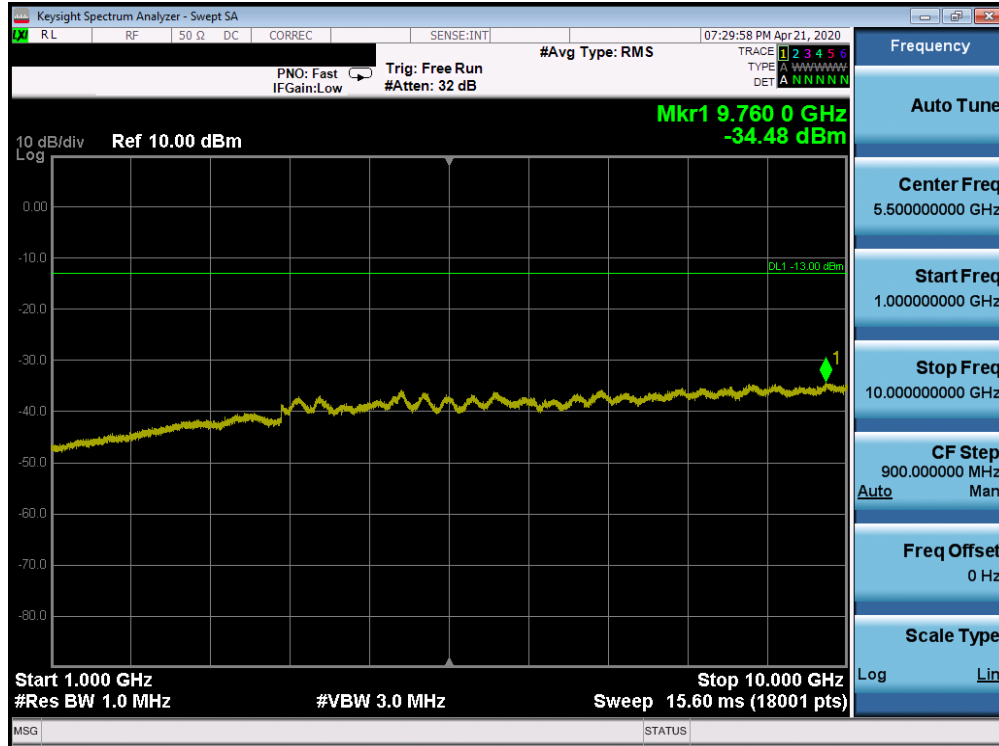


Plot 7-30. Conducted Spurious Plot (Cellular CDMA Mode - Low Channel)

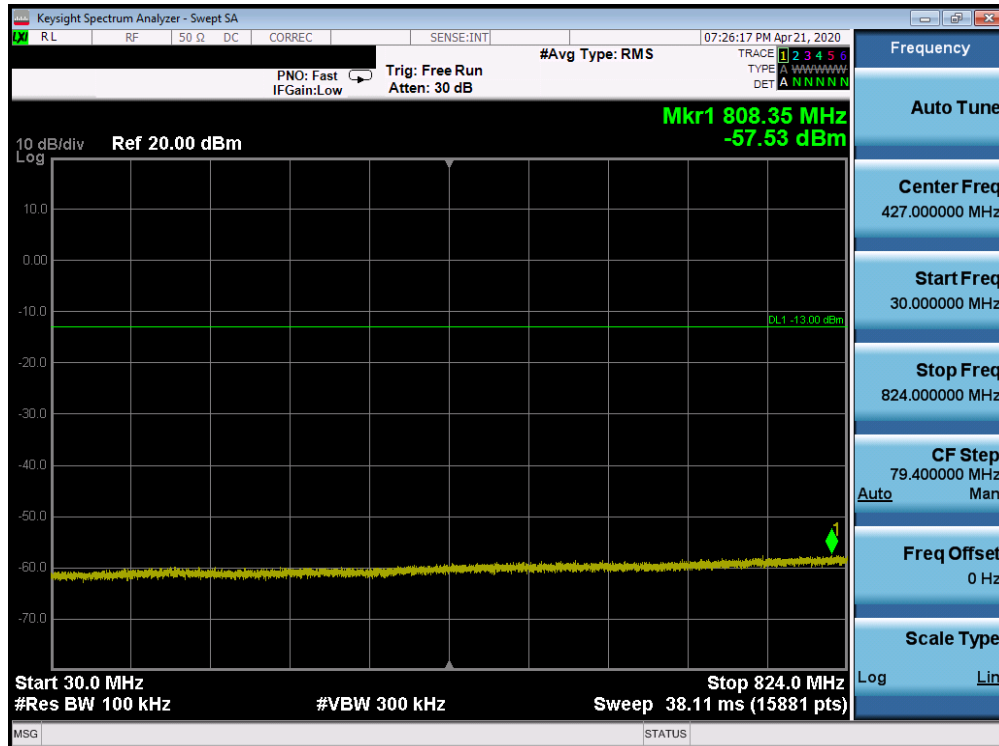


Plot 7-31. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 29 of 107

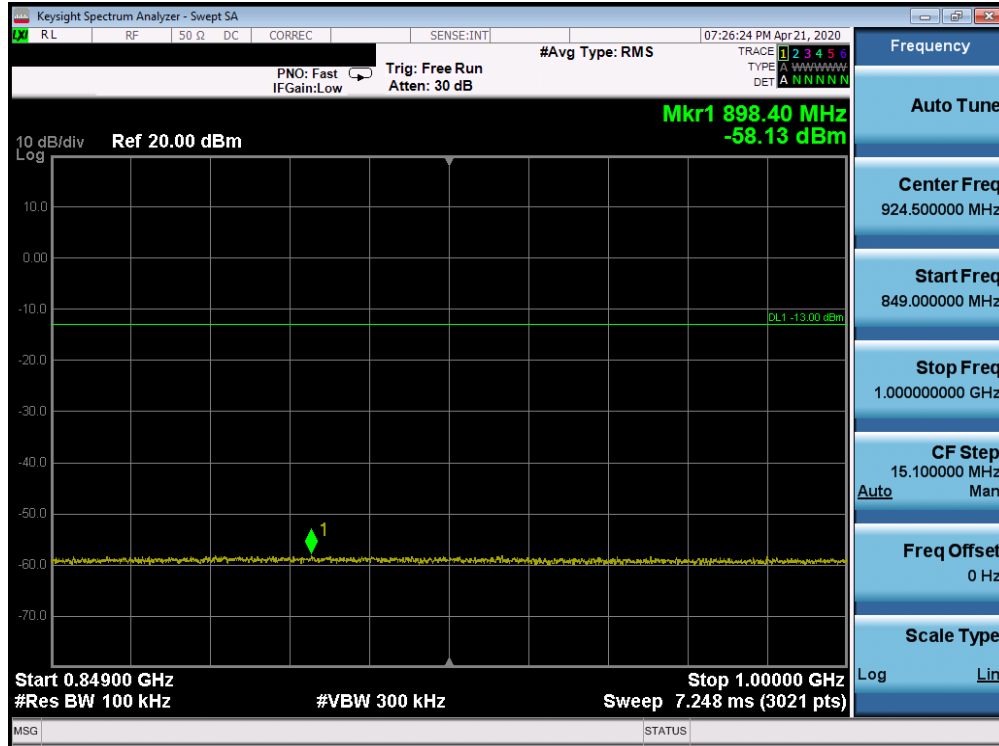


Plot 7-32. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

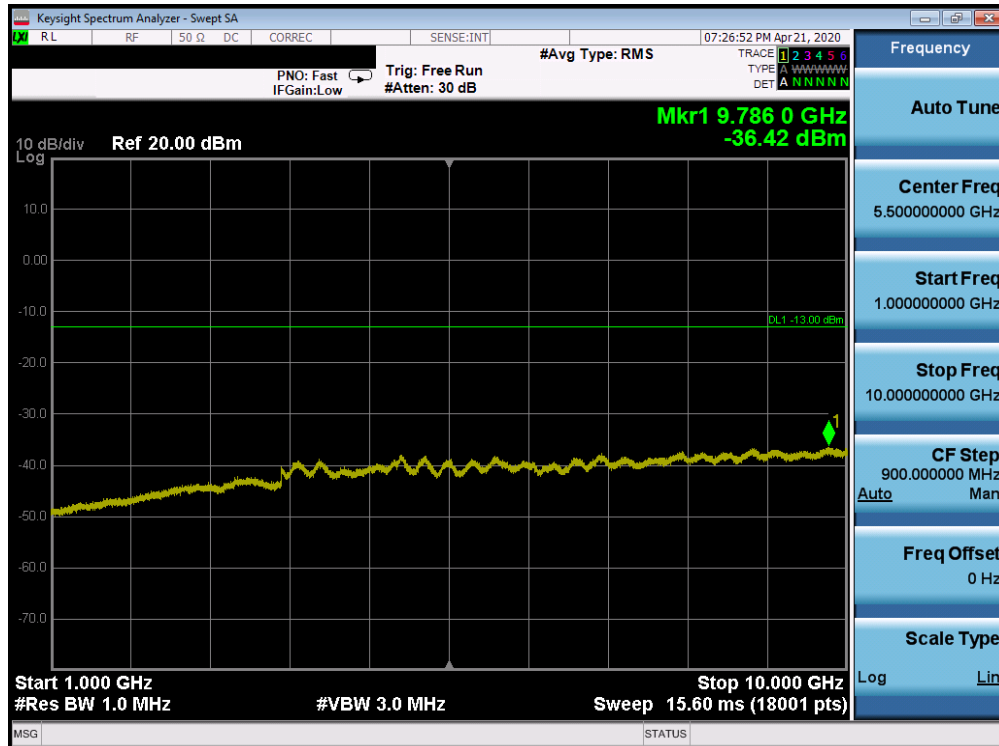


Plot 7-33. Conducted Spurious Plot (Cellular CDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 30 of 107

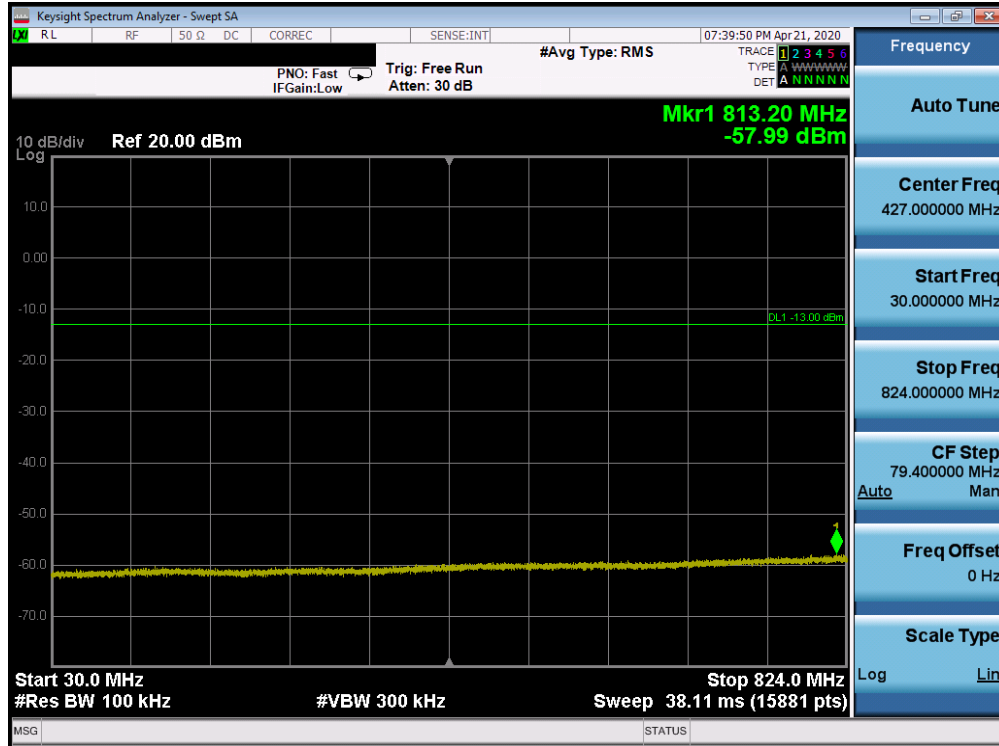


Plot 7-34. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

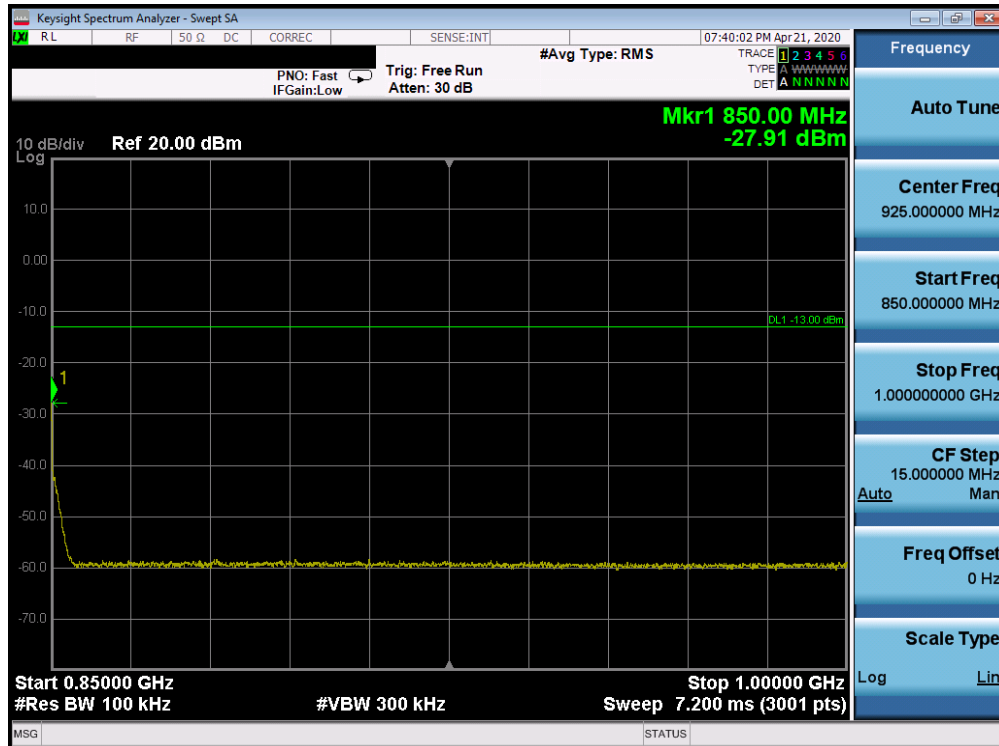

Plot 7-35. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)


FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 31 of 107

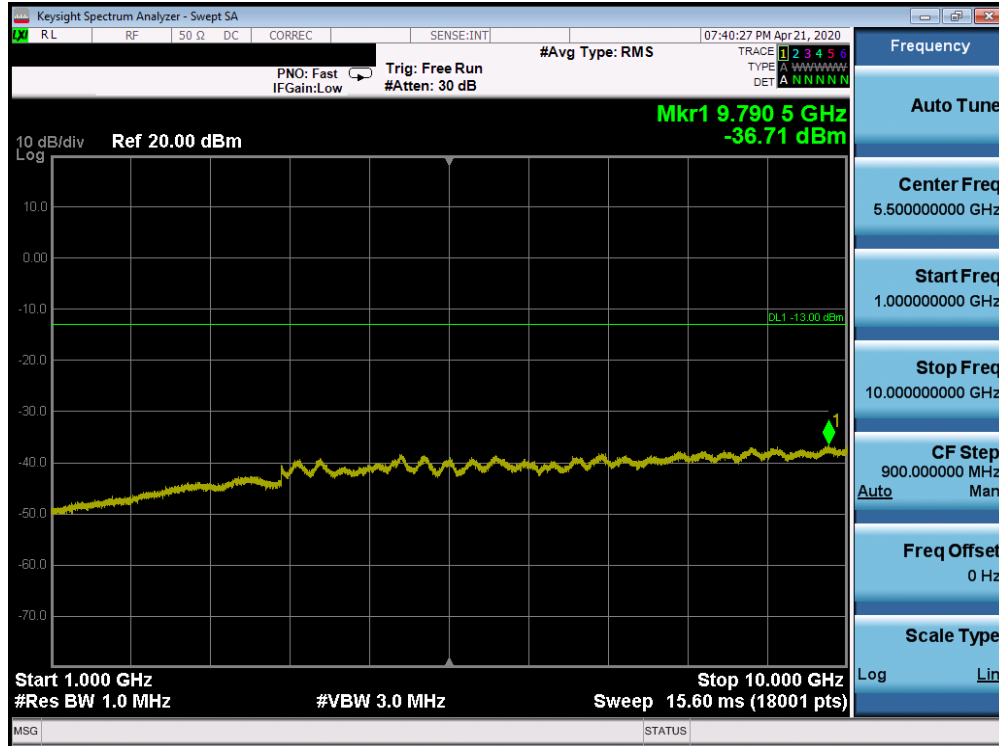


Plot 7-36. Conducted Spurious Plot (Cellular CDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 32 of 107

PCS CDMA Mode

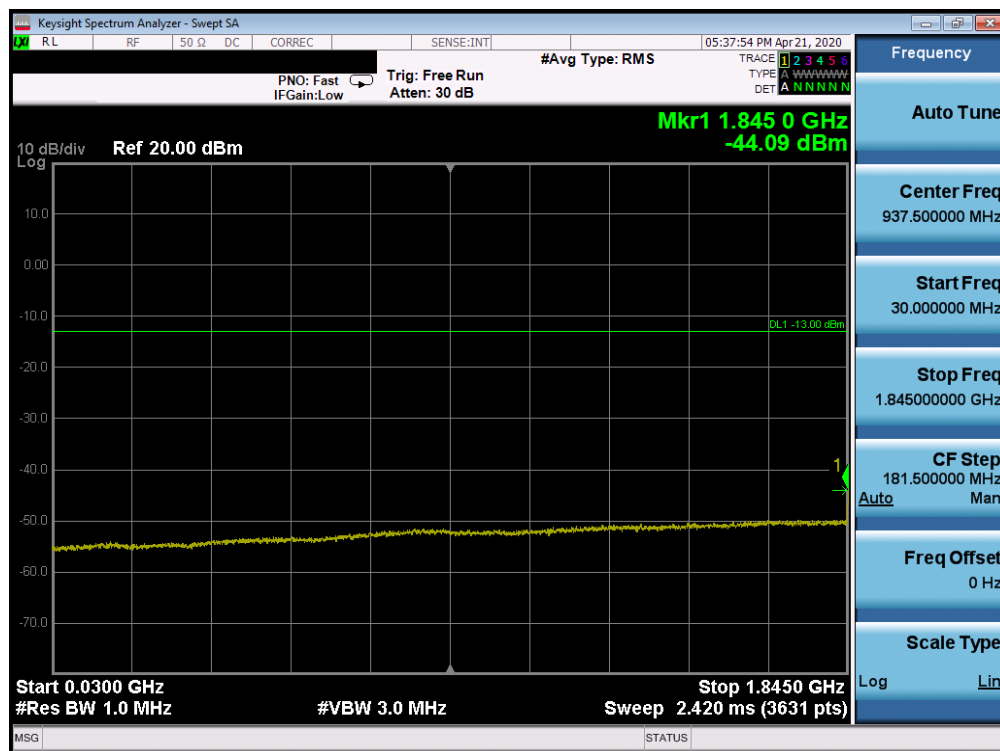


Plot 7-37. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

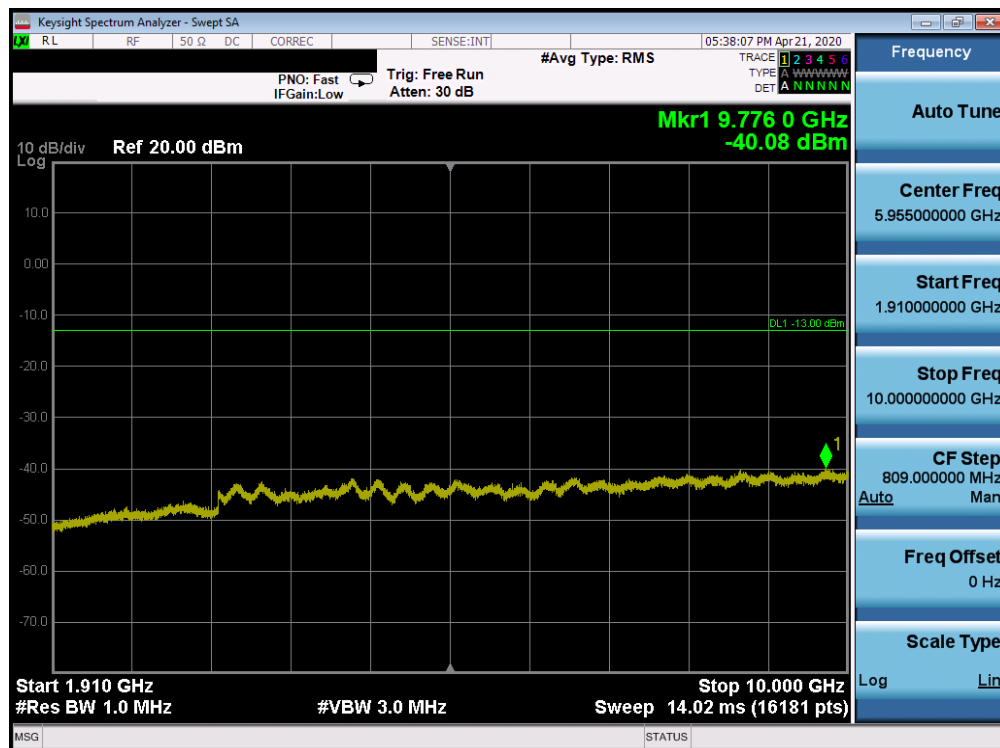

Plot 7-38. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 33 of 107

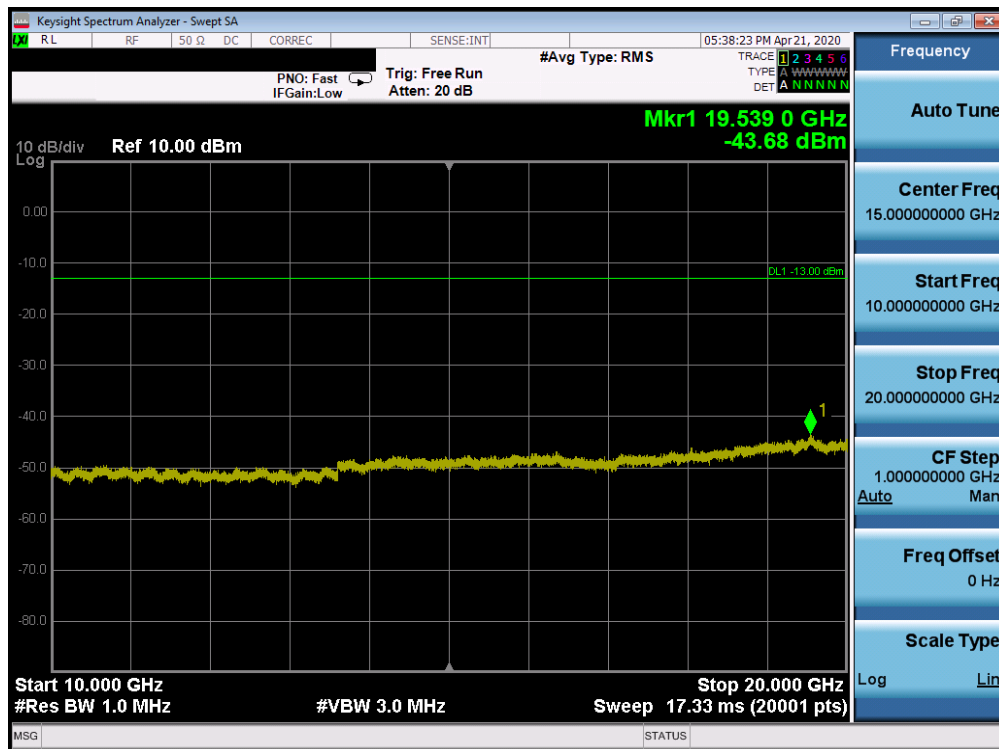


Plot 7-39. Conducted Spurious Plot (PCS CDMA Mode - Low Channel)




Plot 7-40. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 34 of 107

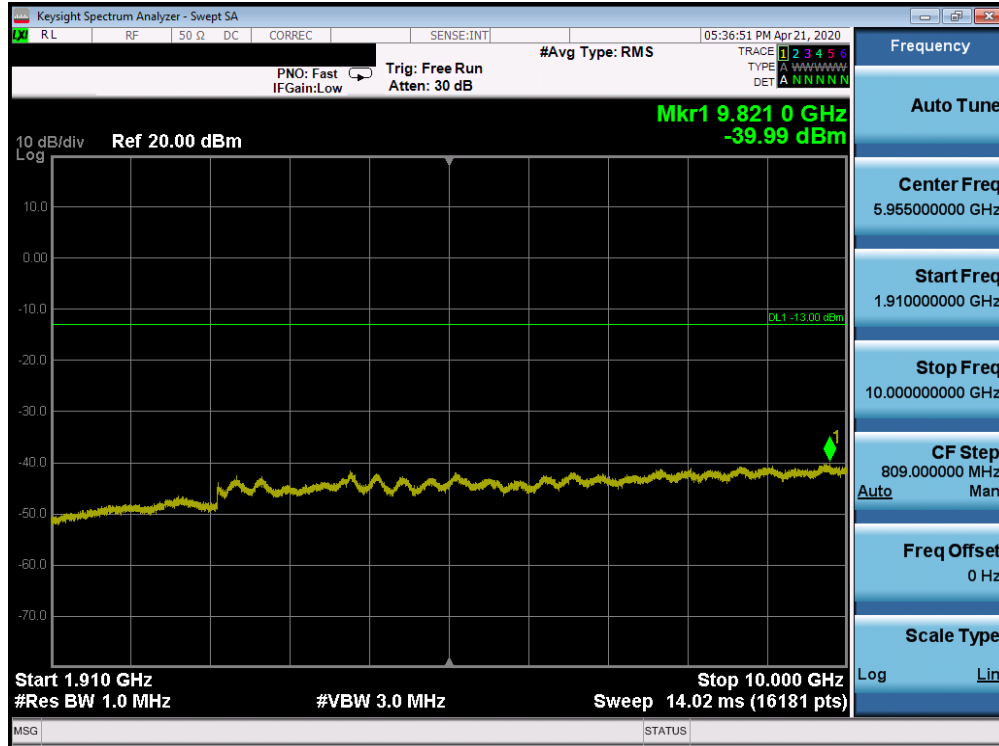


Plot 7-41. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

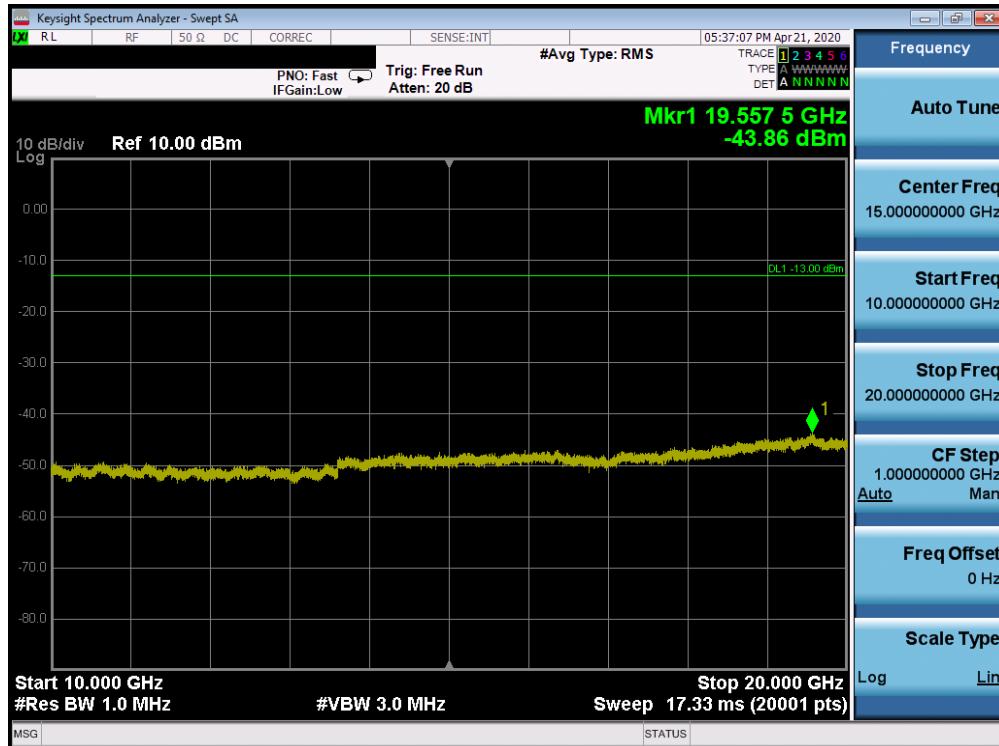


Plot 7-42. Conducted Spurious Plot (PCS CDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 35 of 107

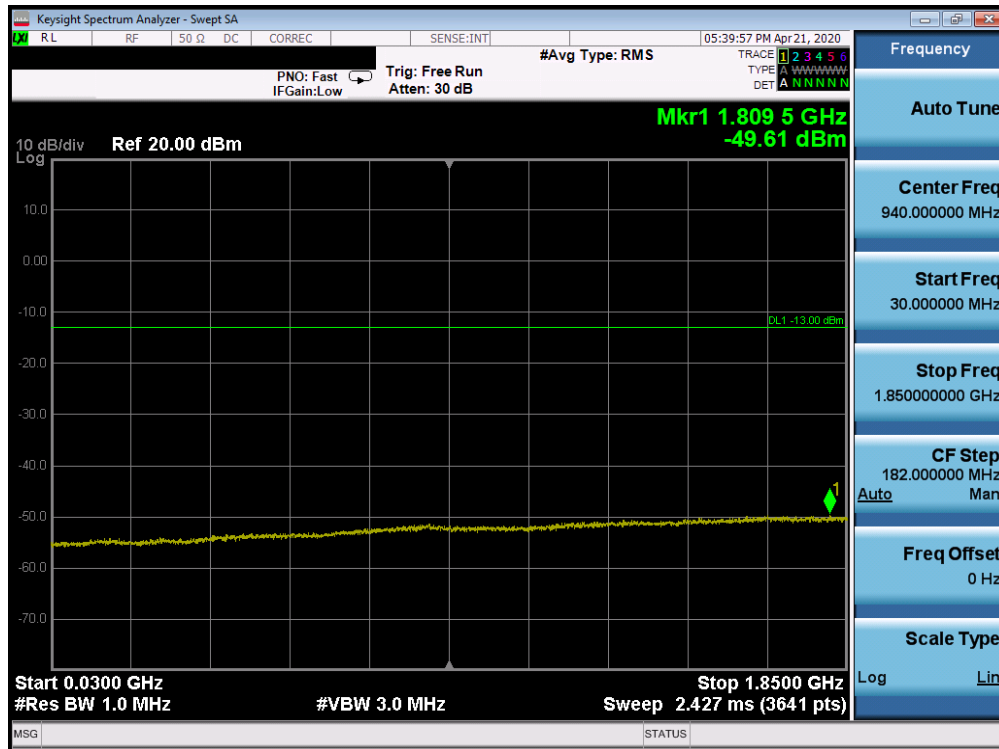


Plot 7-43. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

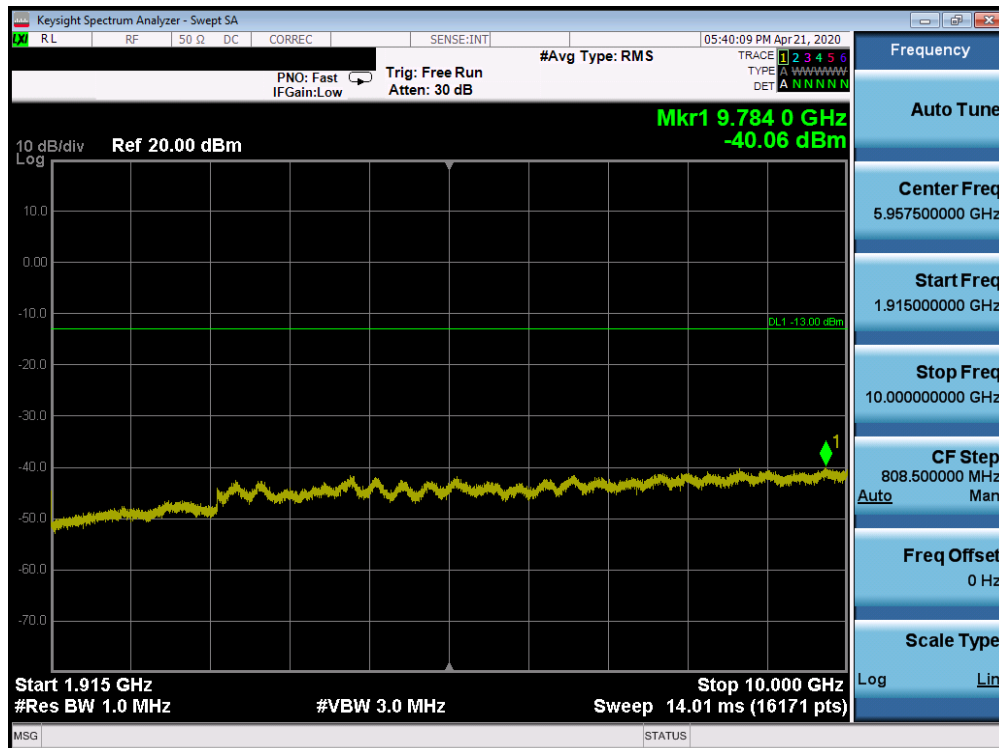

Plot 7-44. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 36 of 107

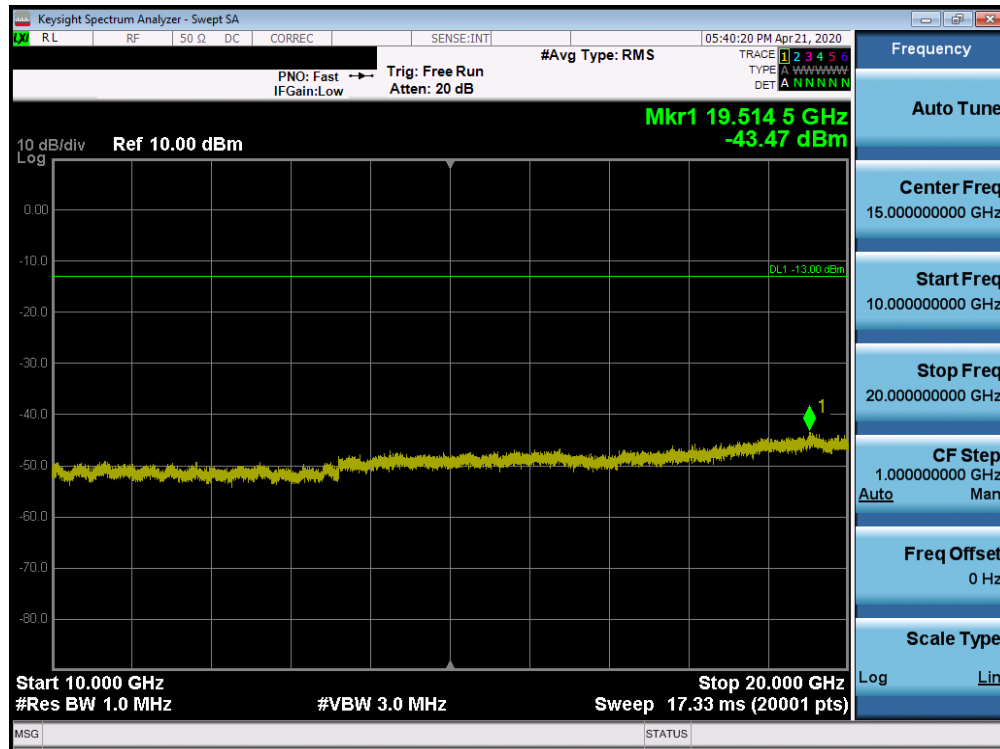


Plot 7-45. Conducted Spurious Plot (PCS CDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 37 of 107

Cellular WCDMA Mode




Plot 7-46. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

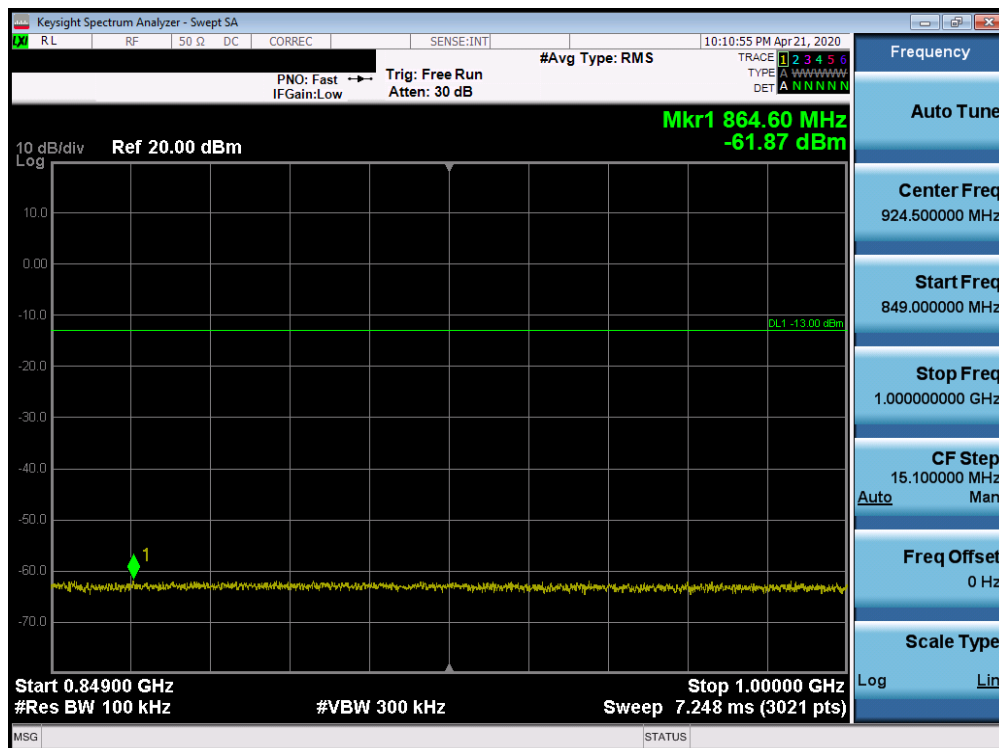


Plot 7-47. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 38 of 107

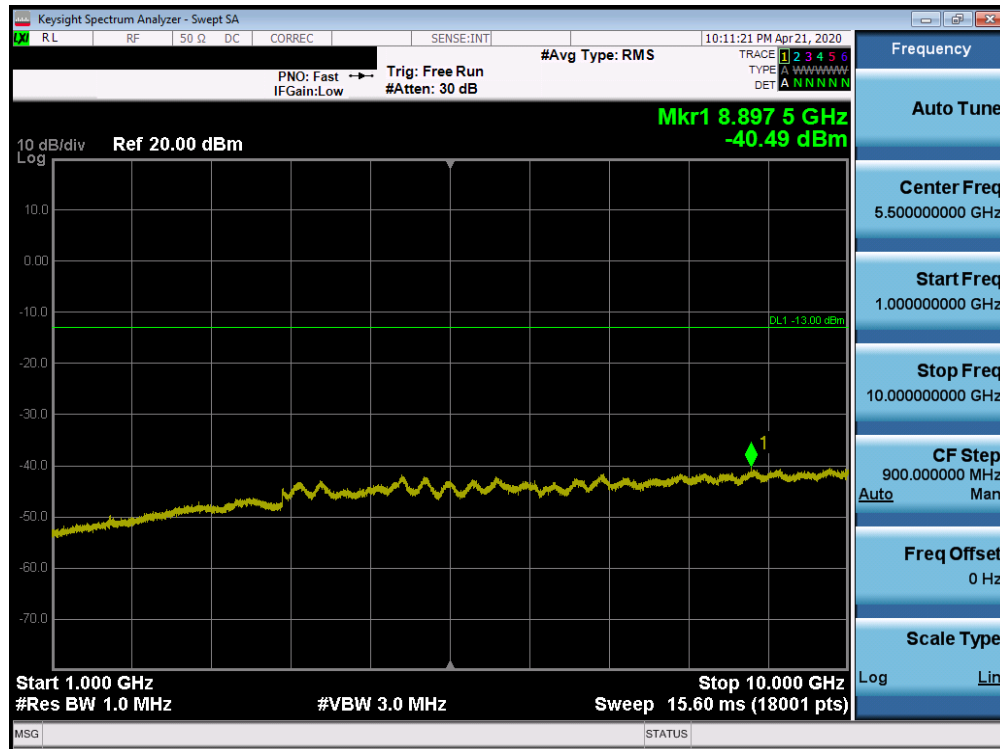


Plot 7-48. Conducted Spurious Plot (Cellular WCDMA Mode - Low Channel)

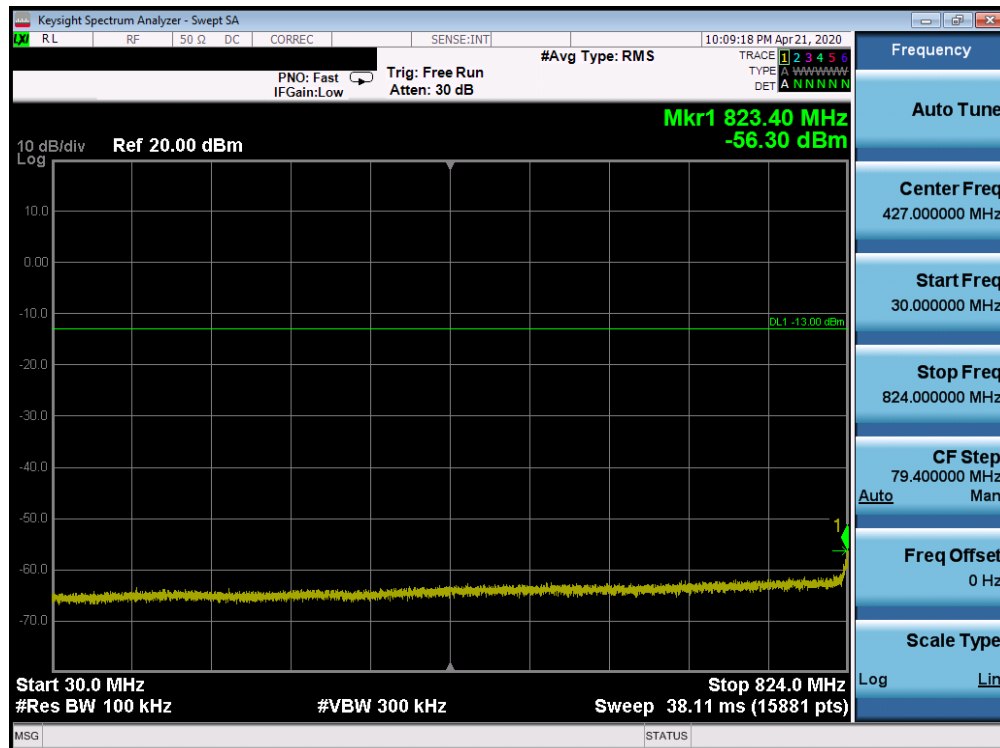


Plot 7-49. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 39 of 107

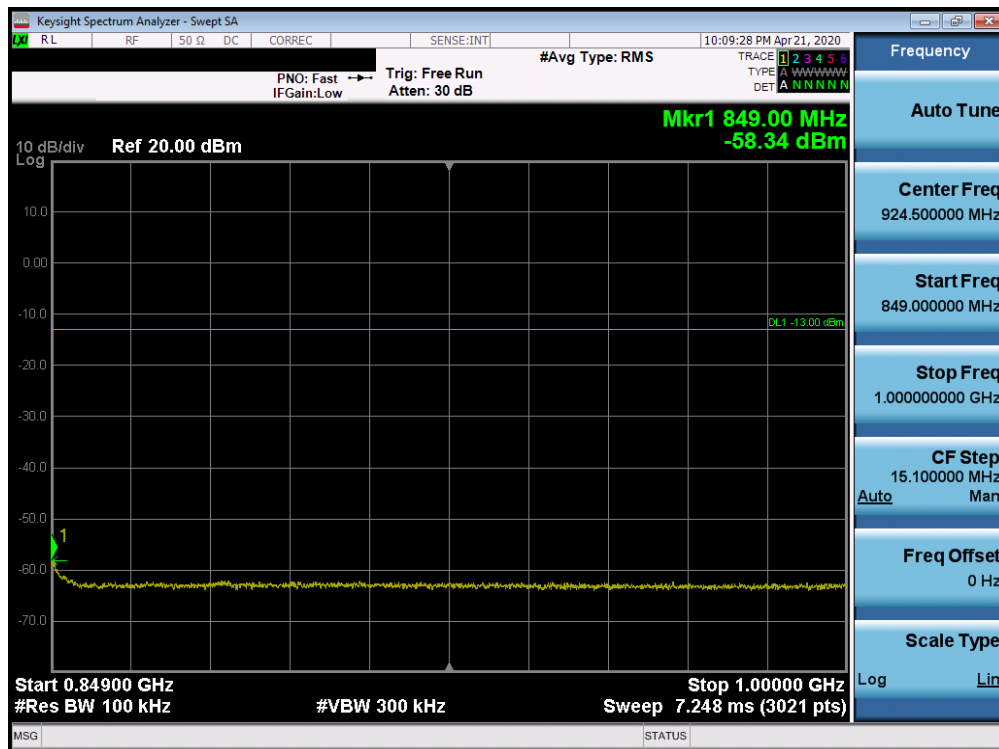


Plot 7-50. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

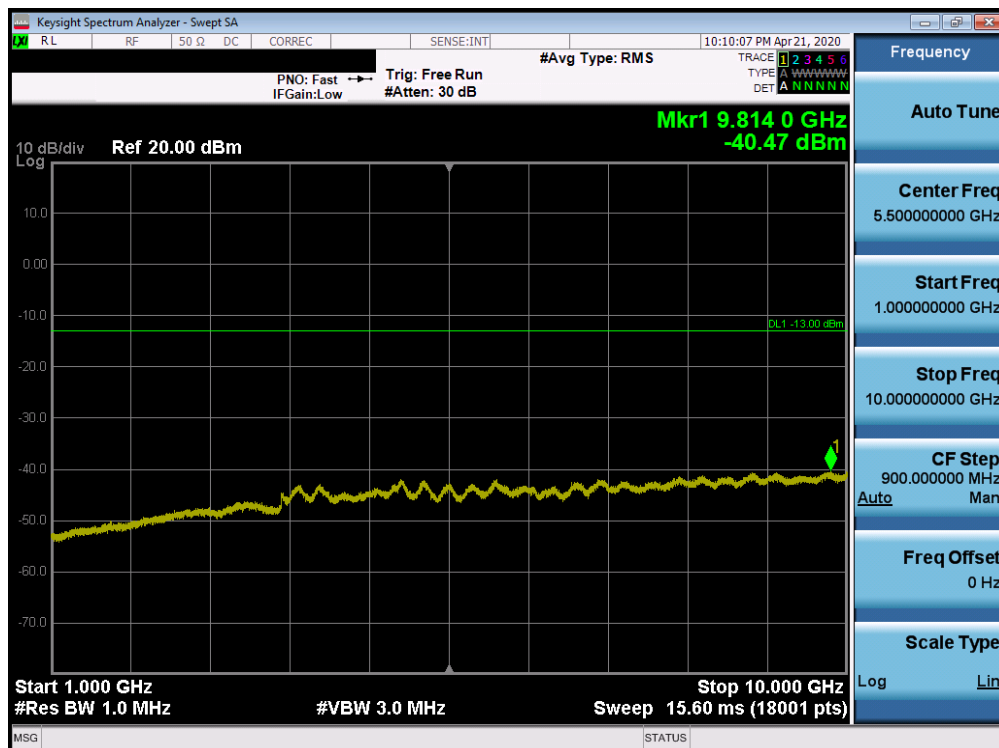


Plot 7-51. Conducted Spurious Plot (Cellular WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 40 of 107

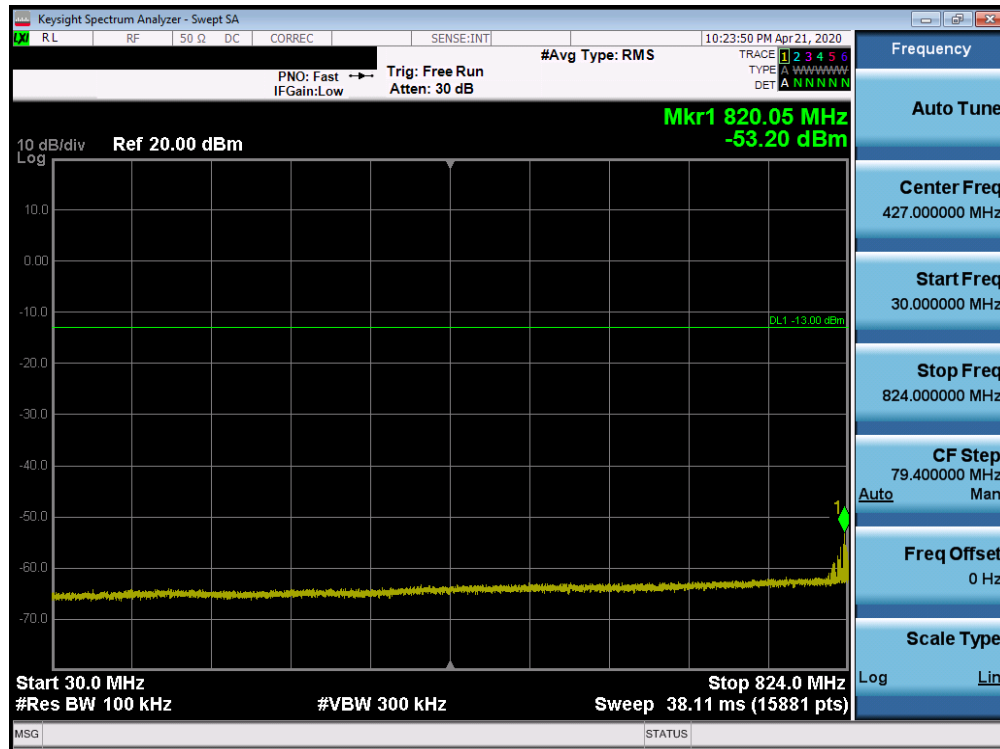


Plot 7-52. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

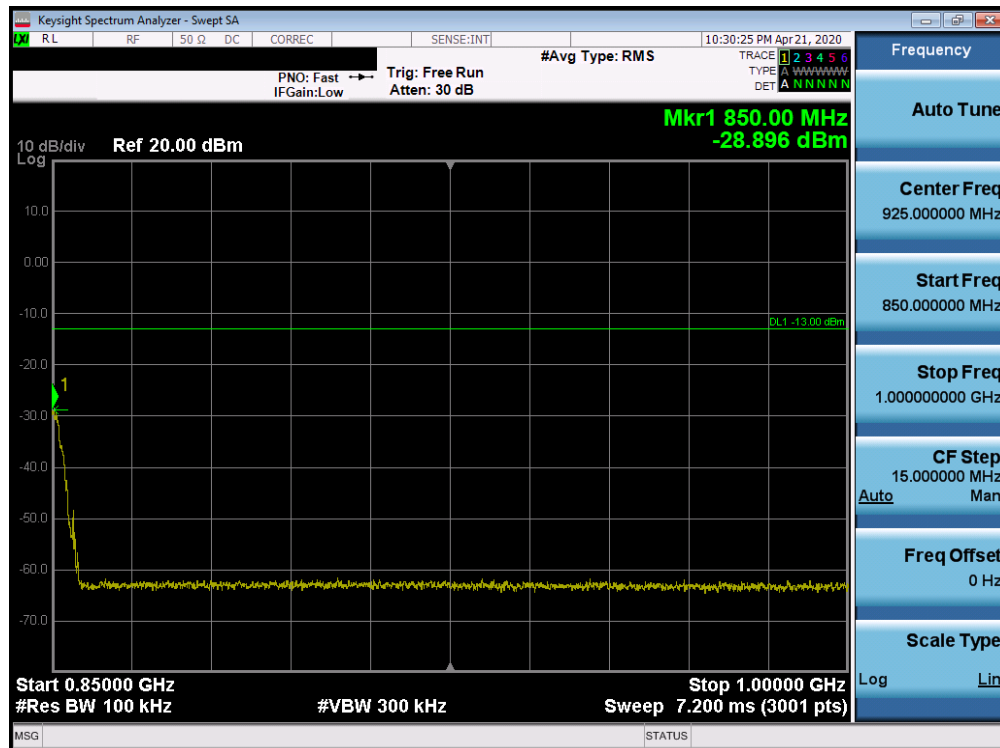

Plot 7-53. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)


FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 41 of 107

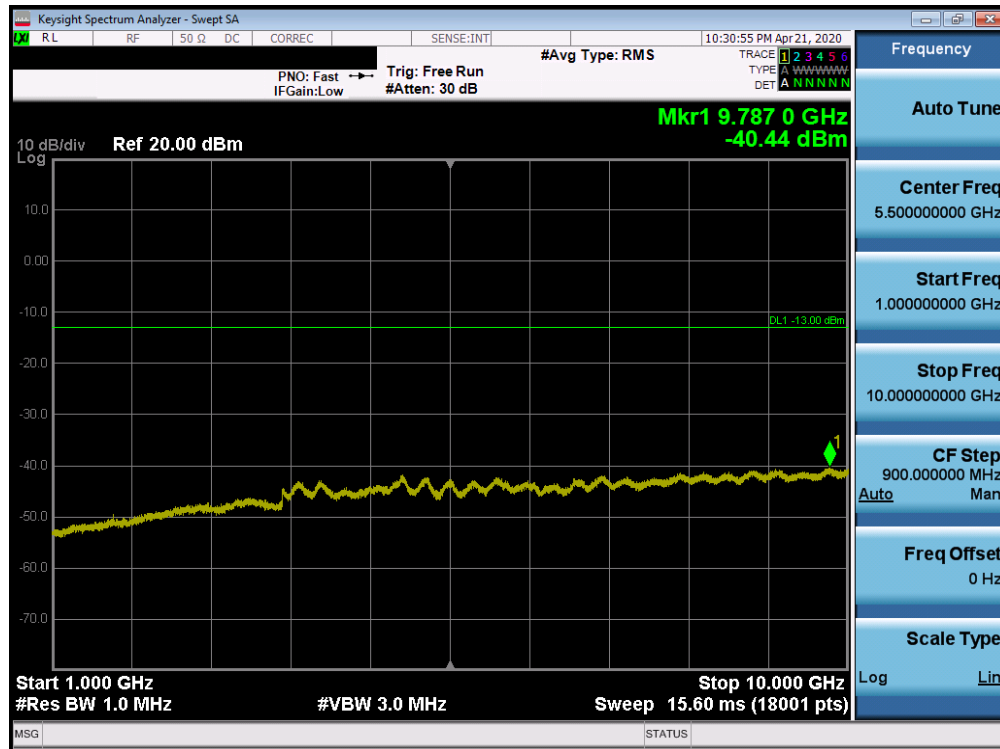


Plot 7-54. Conducted Spurious Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 42 of 107

AWS WCDMA Mode

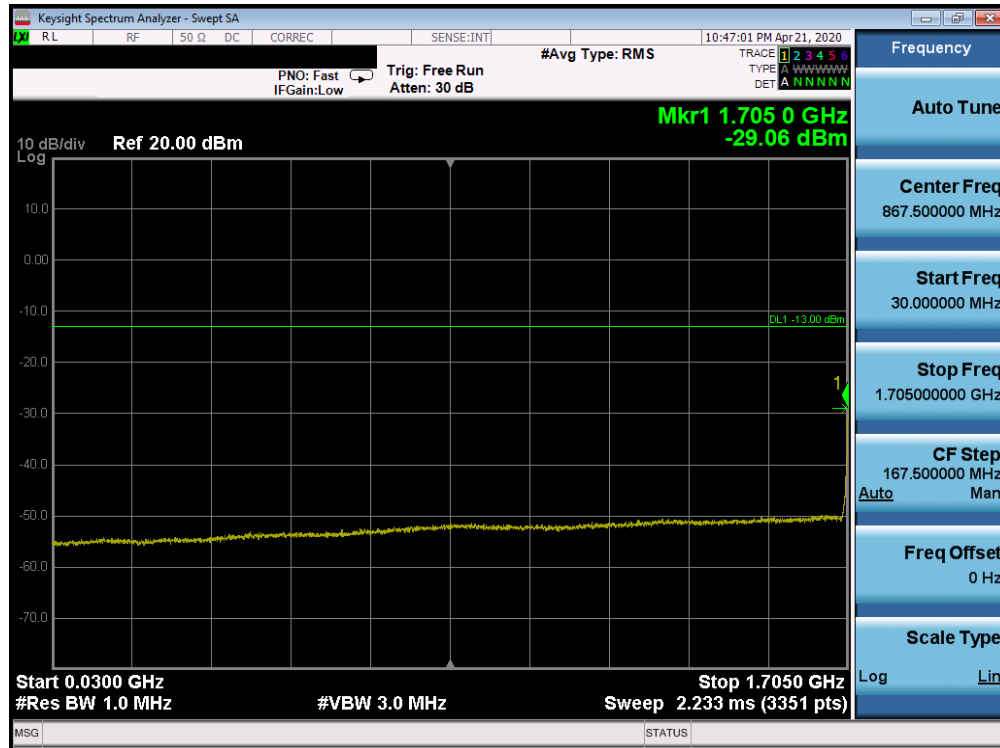


Plot 7-55. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

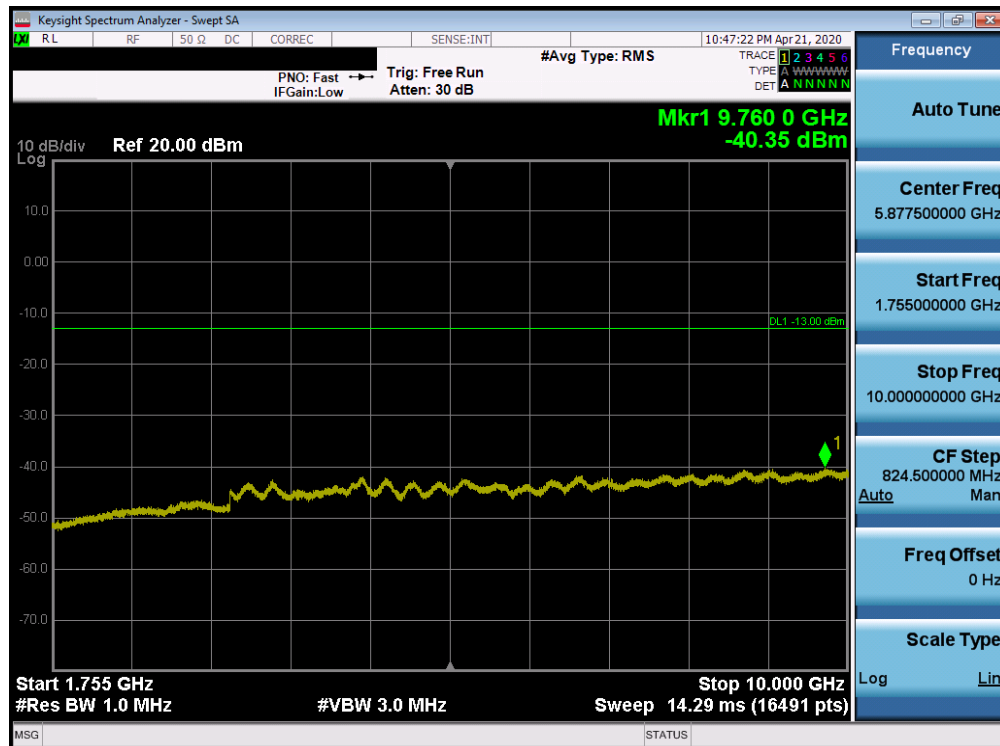


Plot 7-56. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 43 of 107

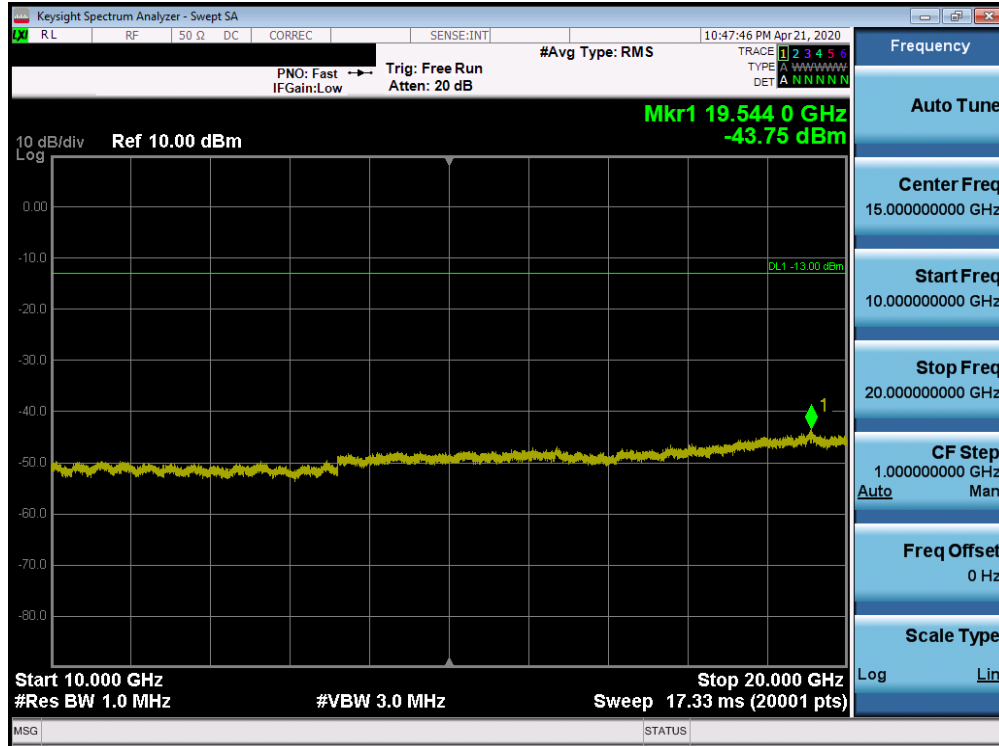


Plot 7-57. Conducted Spurious Plot (AWS WCDMA Mode - Low Channel)

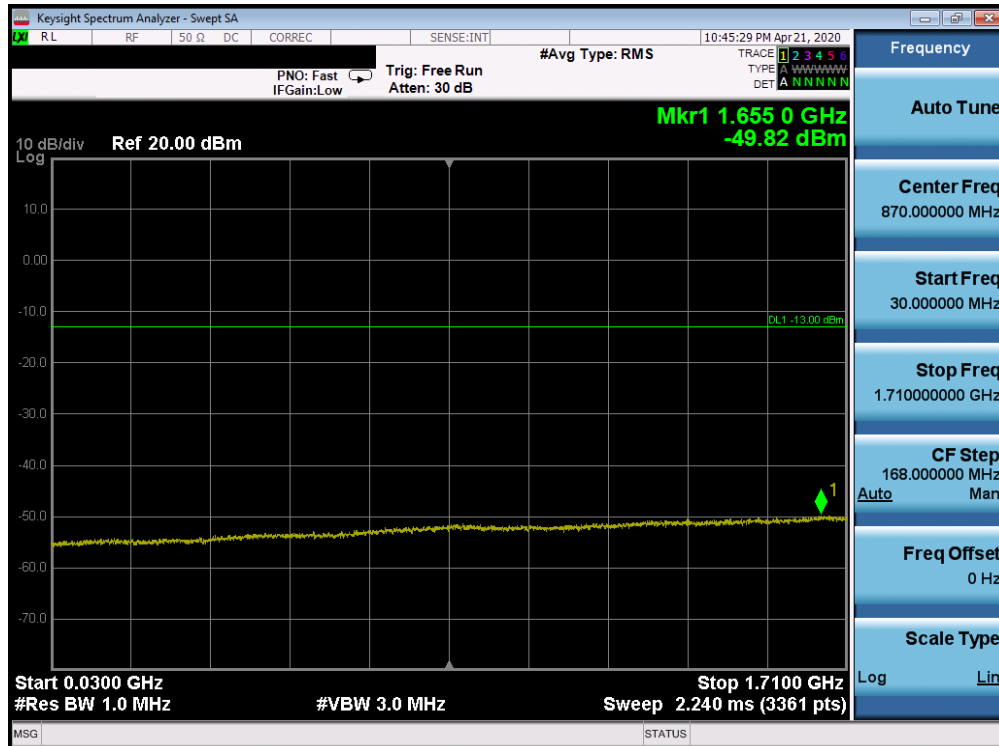


Plot 7-58. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 44 of 107

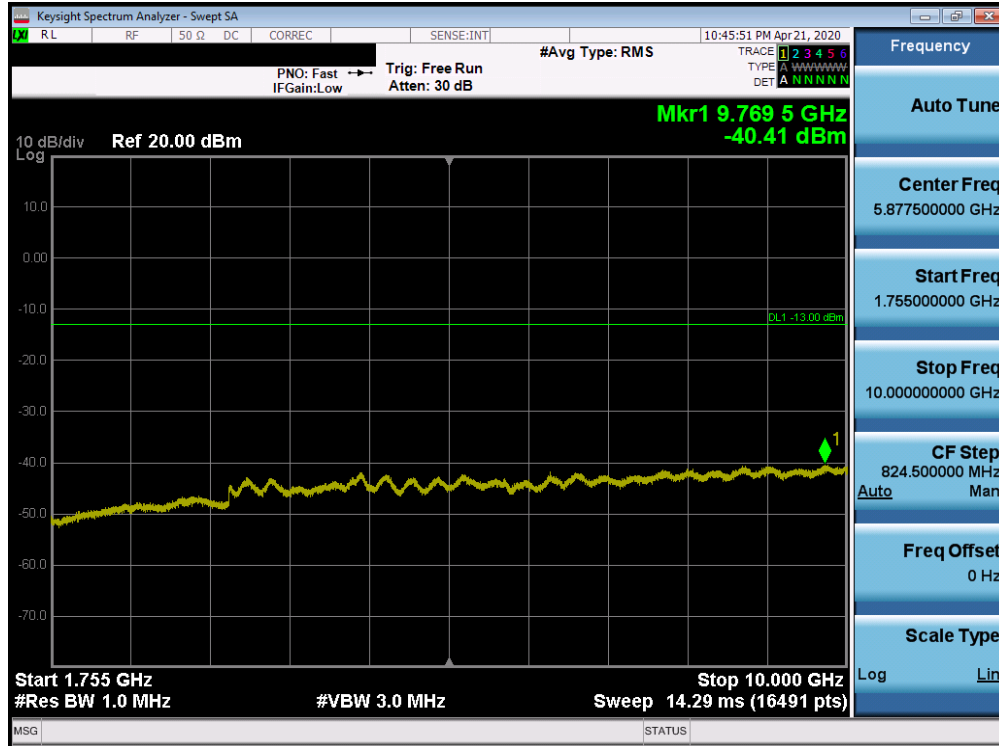


Plot 7-59. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

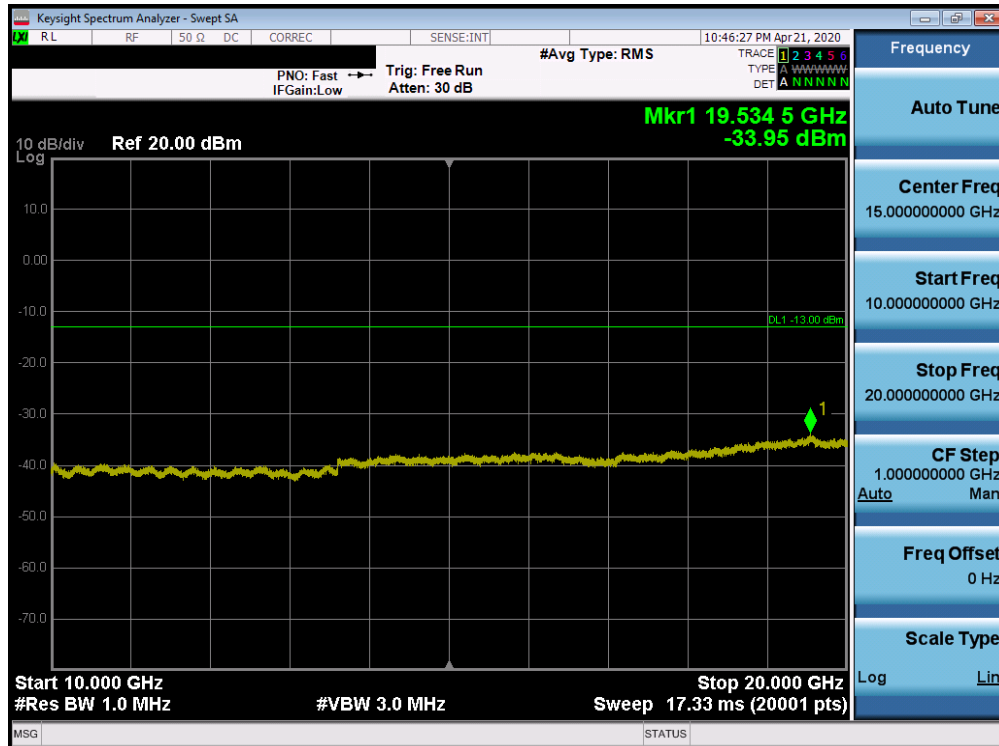


Plot 7-60. Conducted Spurious Plot (AWS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 45 of 107

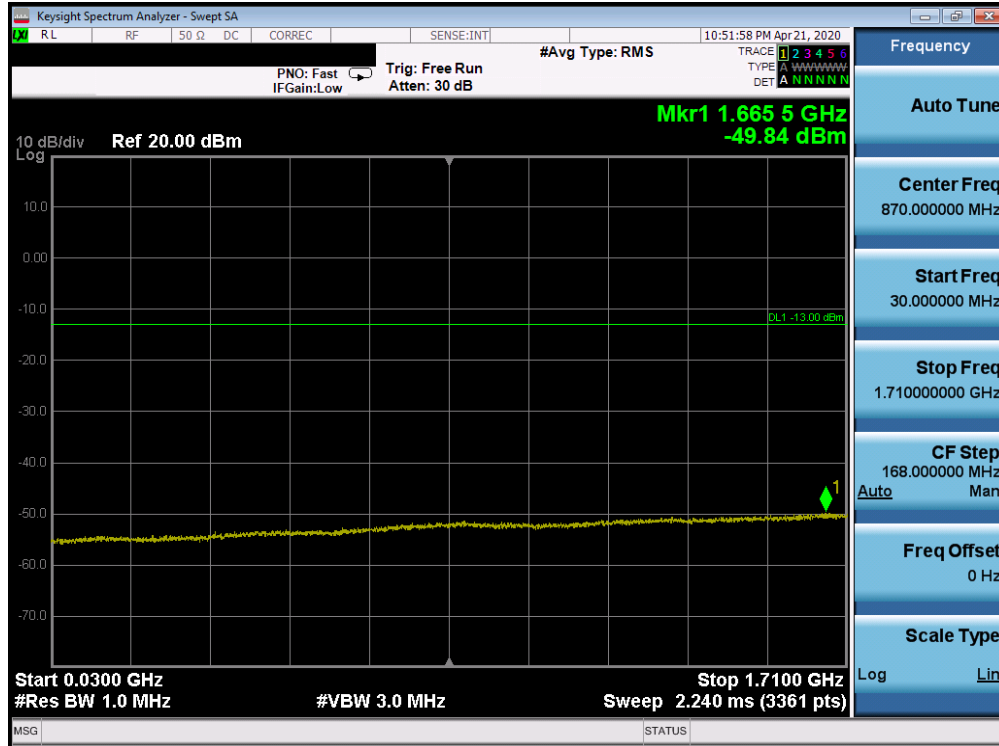


Plot 7-61. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

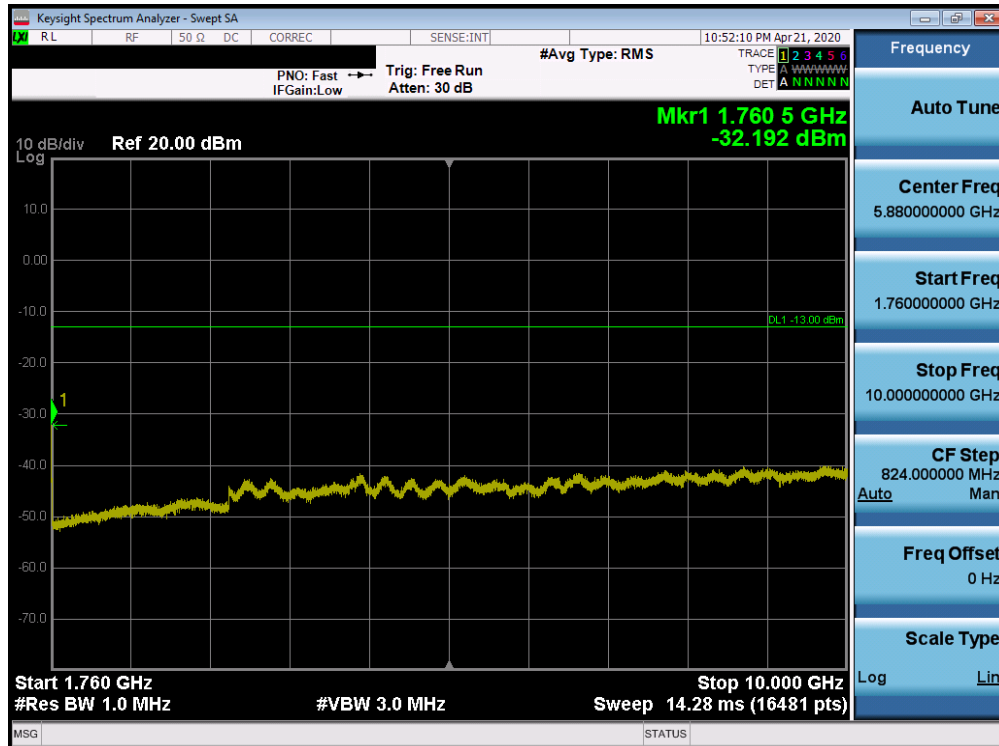

Plot 7-62. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)


FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 46 of 107

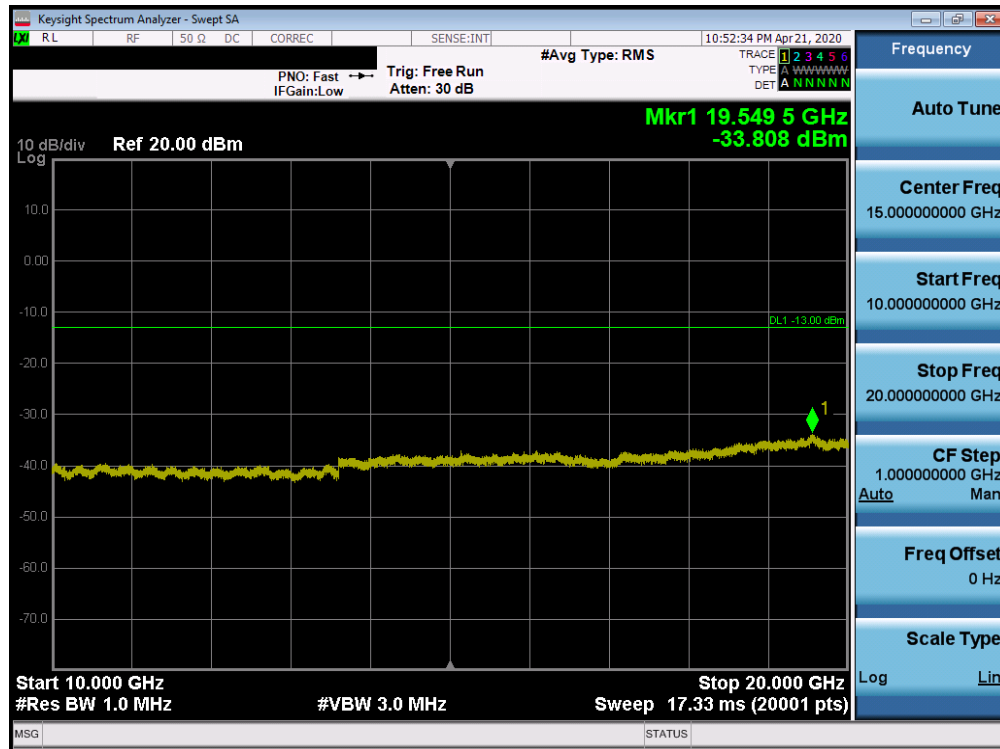


Plot 7-63. Conducted Spurious Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 47 of 107

PCS WCDMA Mode

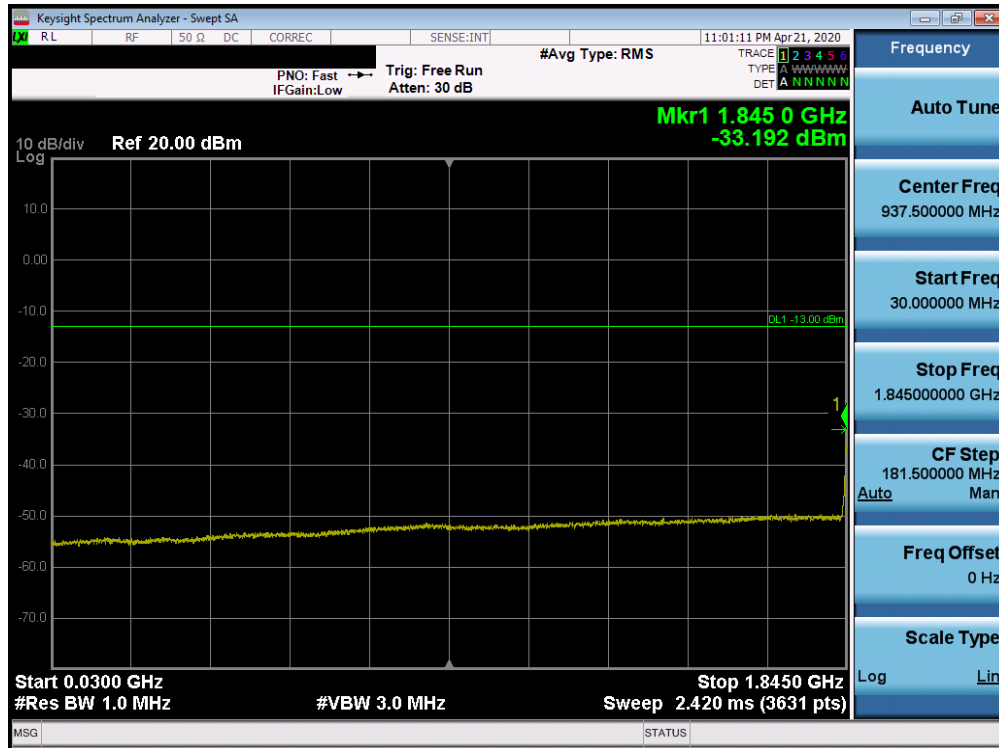


Plot 7-64. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

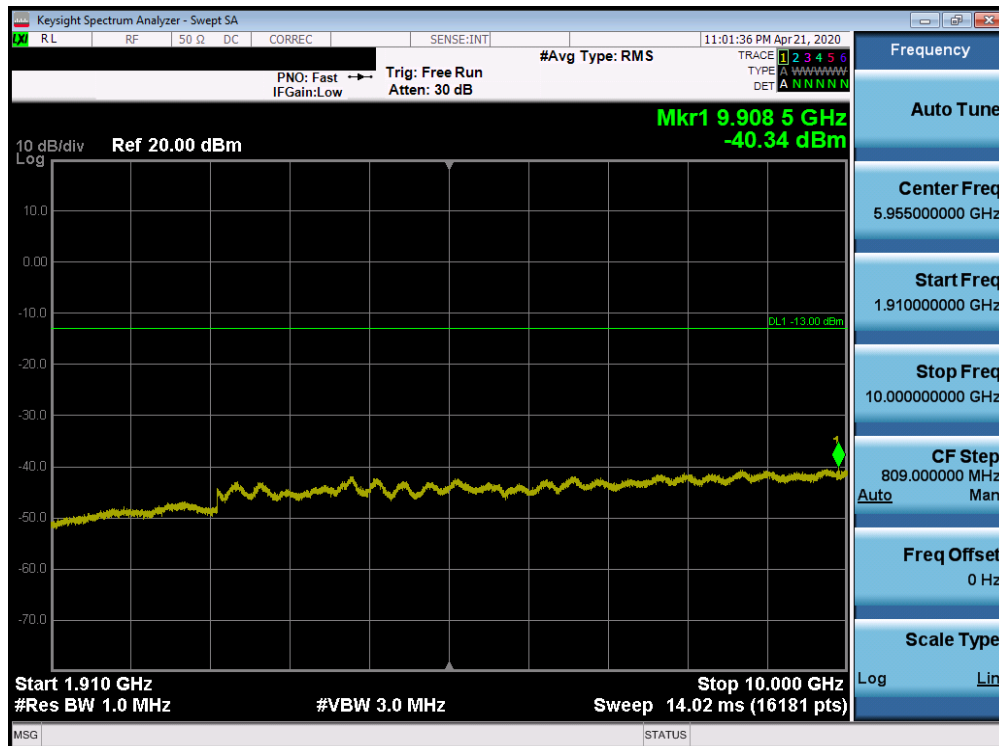


Plot 7-65. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 48 of 107

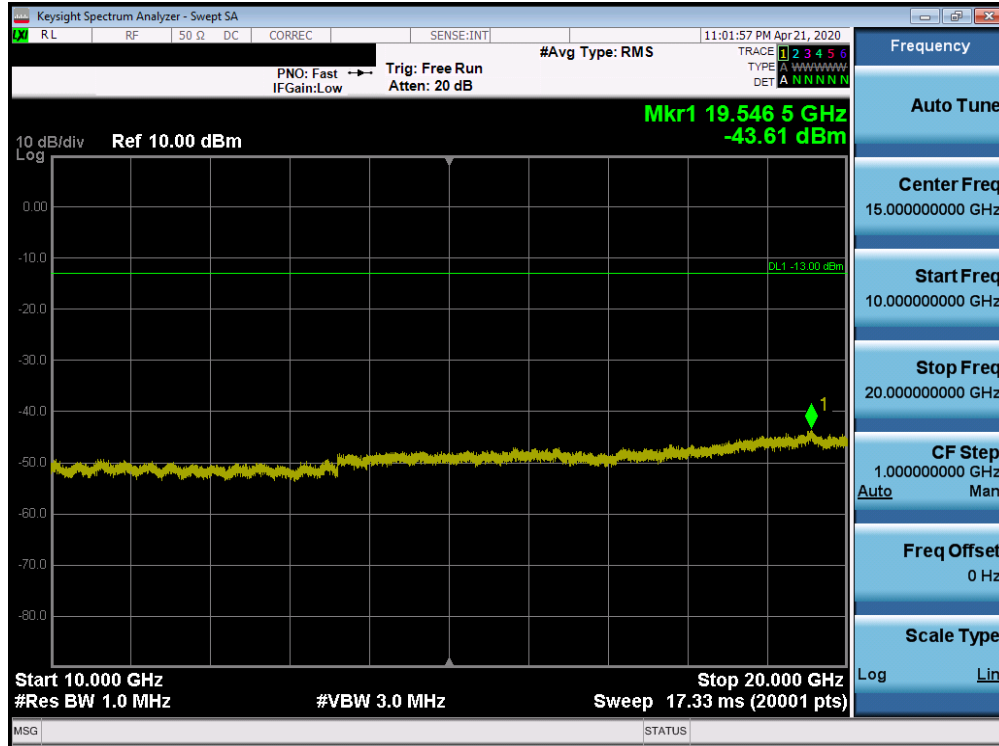


Plot 7-66. Conducted Spurious Plot (PCS WCDMA Mode - Low Channel)

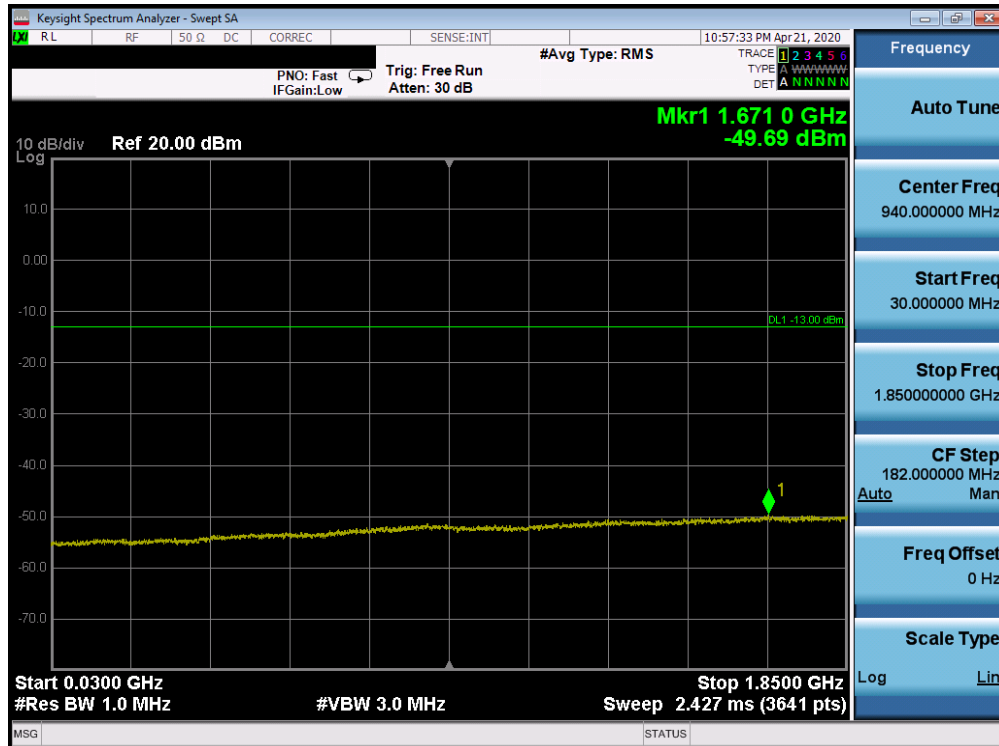


Plot 7-67. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 49 of 107

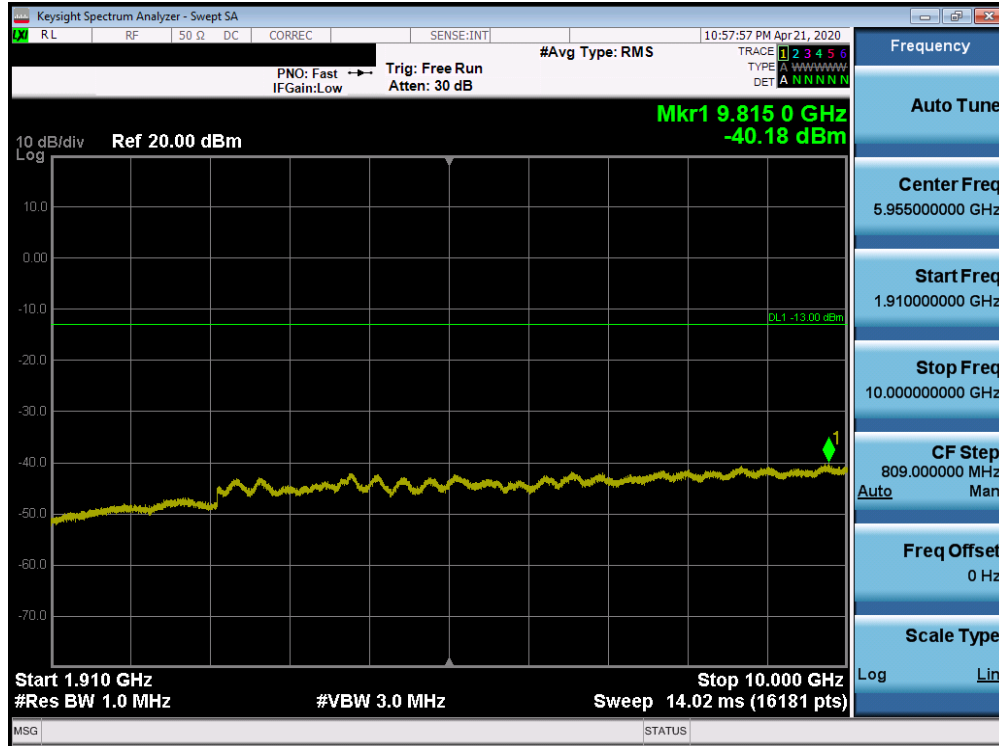


Plot 7-68. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

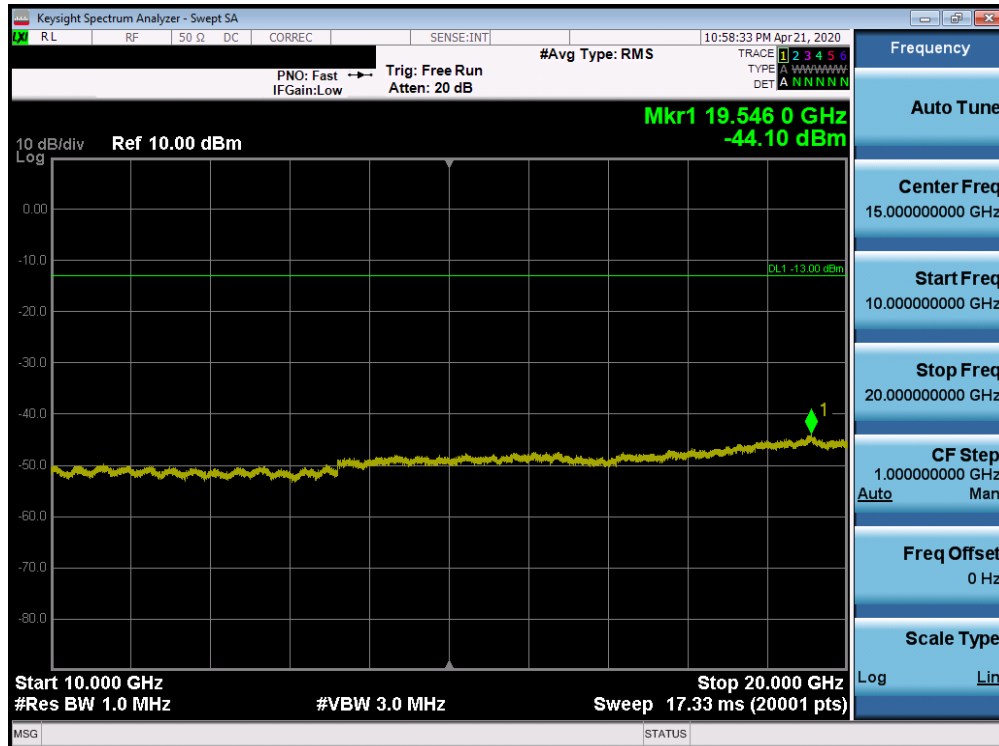


Plot 7-69. Conducted Spurious Plot (PCS WCDMA Mode - Mid Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 50 of 107

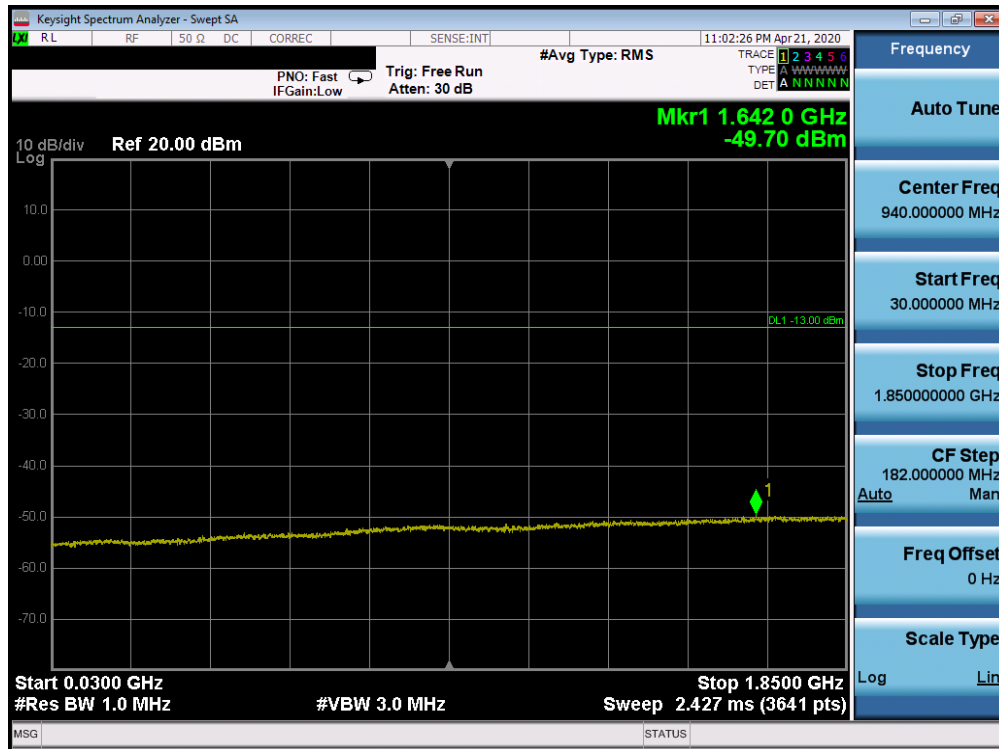


Plot 7-70. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

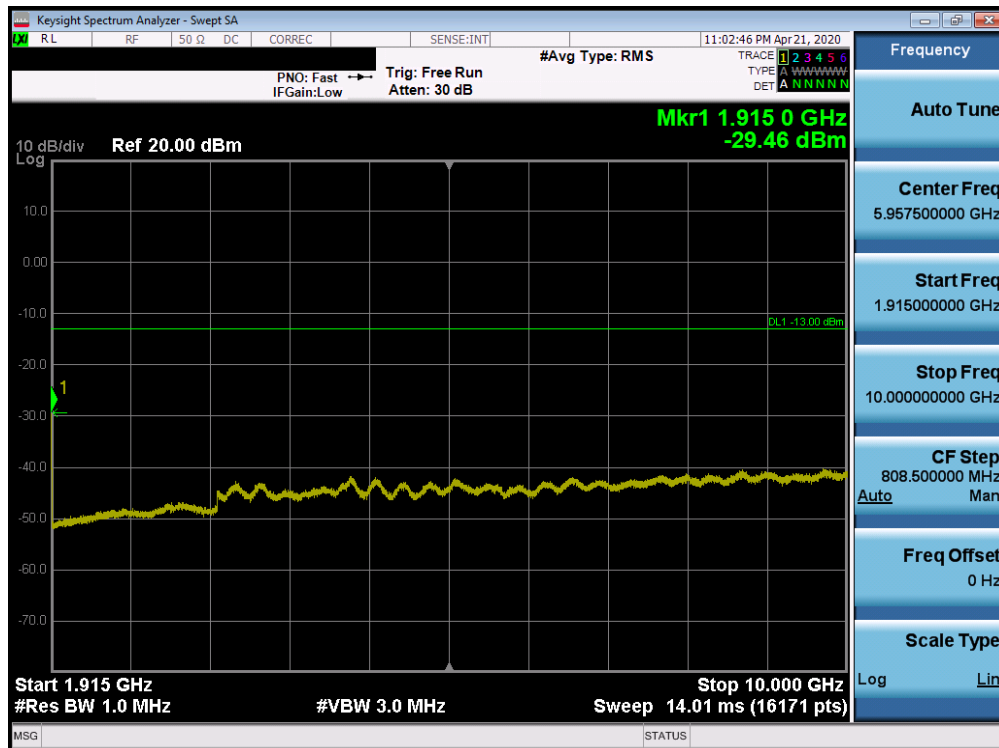

Plot 7-71. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 51 of 107

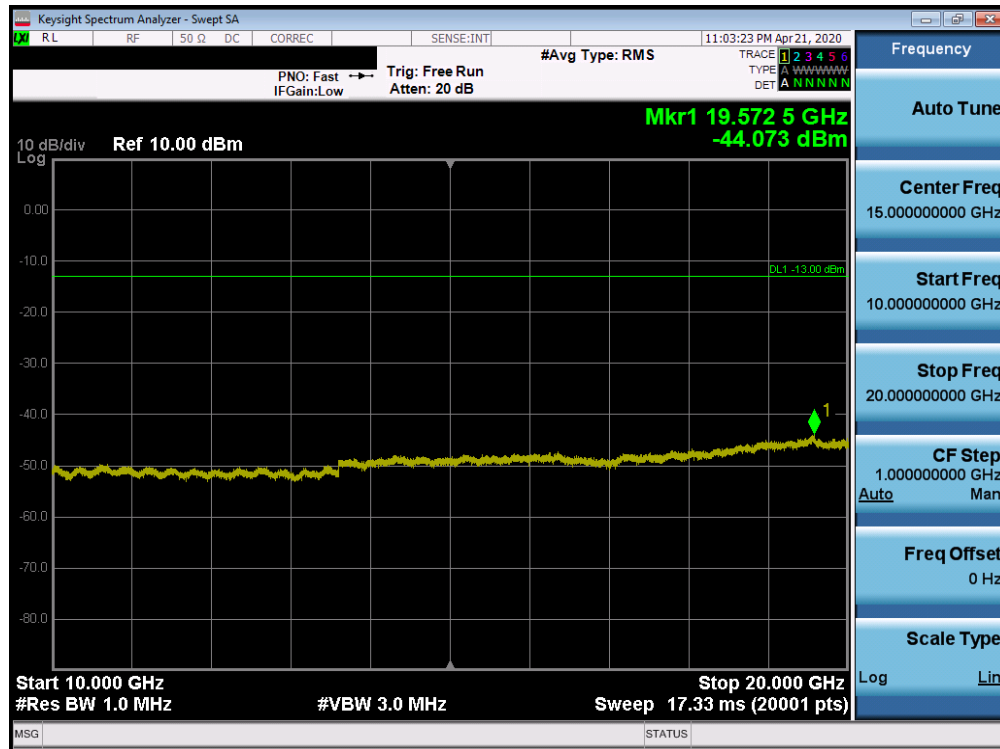

Plot 7-72. Conducted Spurious Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 52 of 107

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{\text{Watts}})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. $\text{RBW} \geq 1\%$ of the emission bandwidth
4. $\text{VBW} \geq 3 \times \text{RBW}$
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.




Figure 7-3. Test Instrument & Measurement Setup

Test Notes


Per 22.917(b), 24.238(b), 27.53(h)(3), and RSS-132(5.5), RSS-133(6.5), RSS-139(6.5), in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 53 of 107

Cellular GSM Mode

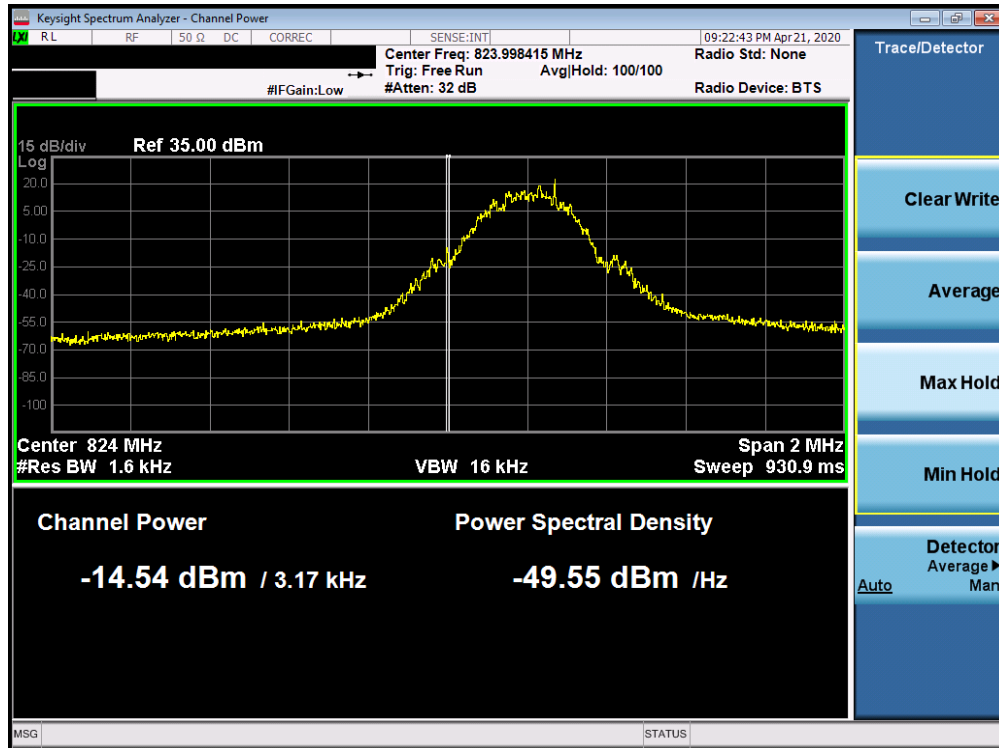


Plot 7-73. Band Edge Plot (Cellular GSM Mode - Low Channel)

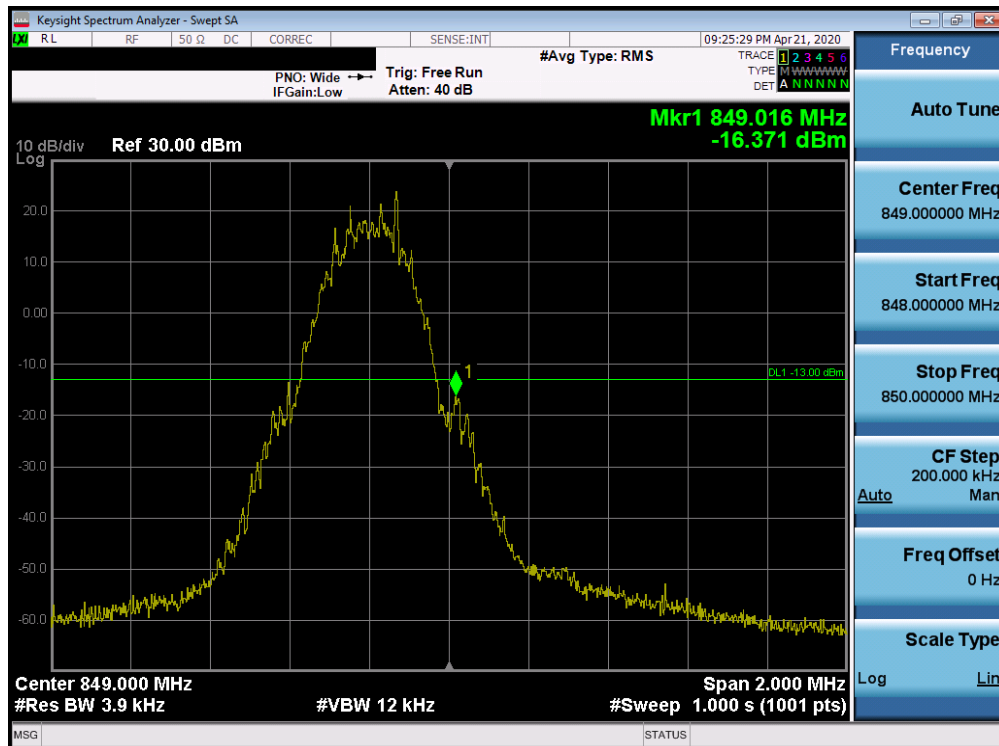


Plot 7-74. Band Edge Plot (Cellular GSM Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 54 of 107

PCS GSM Mode

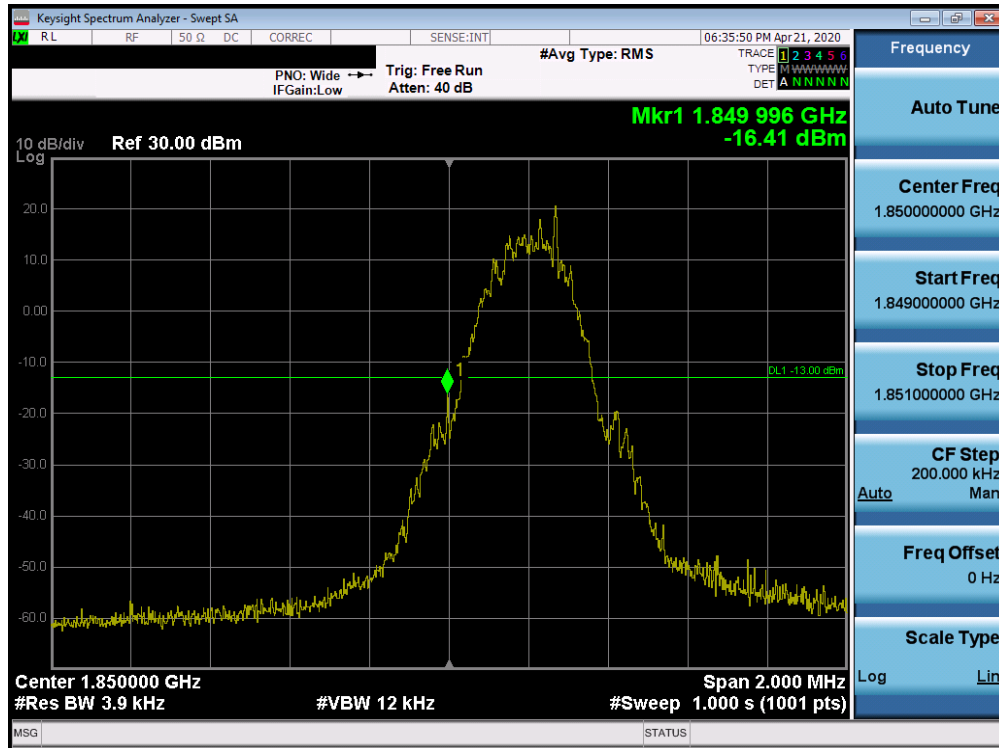


Plot 7-75. Band Edge Plot (PCS GSM Mode - Low Channel)

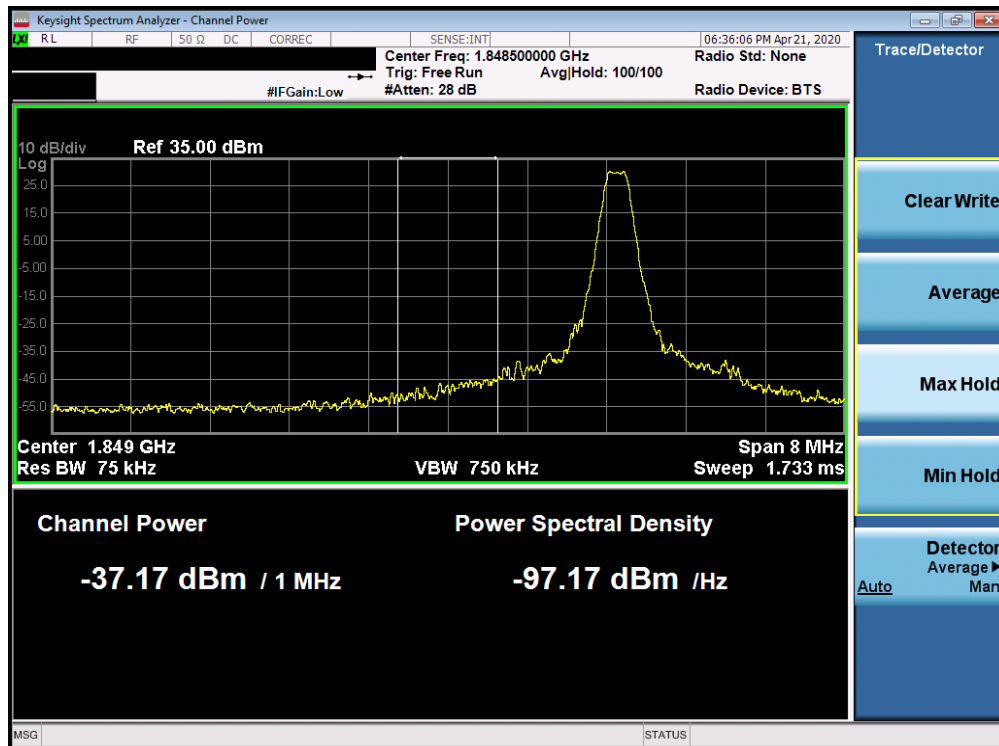


Plot 7-76. 4MHz Span Plot (PCS GSM Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 55 of 107

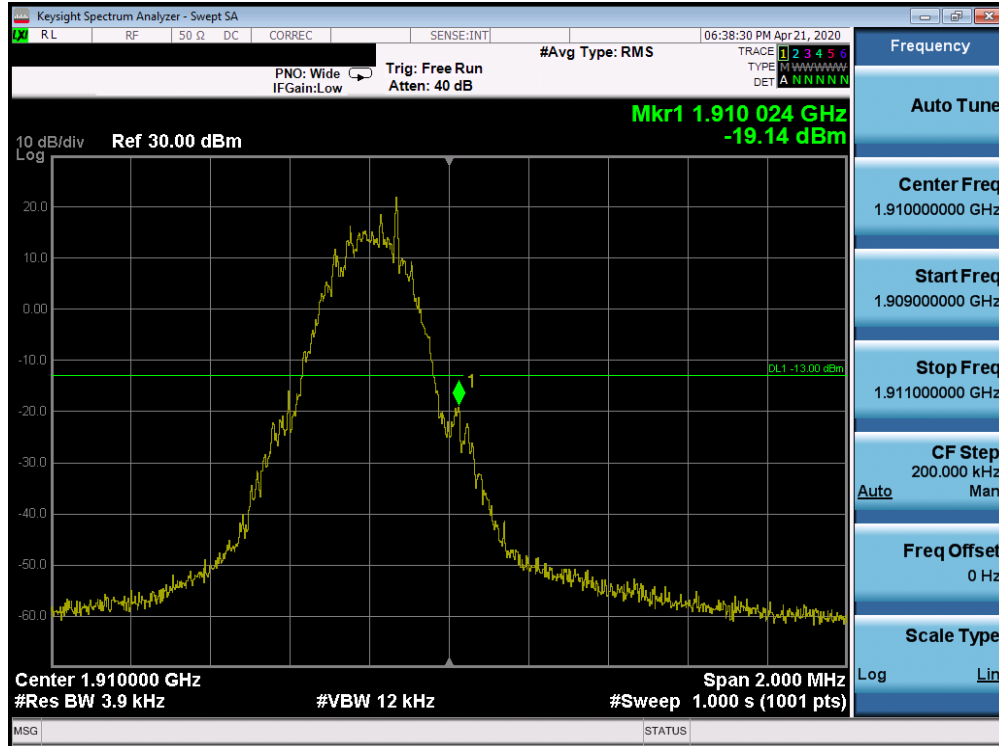


Plot 7-77. Band Edge Plot (PCS GSM Mode - High Channel)

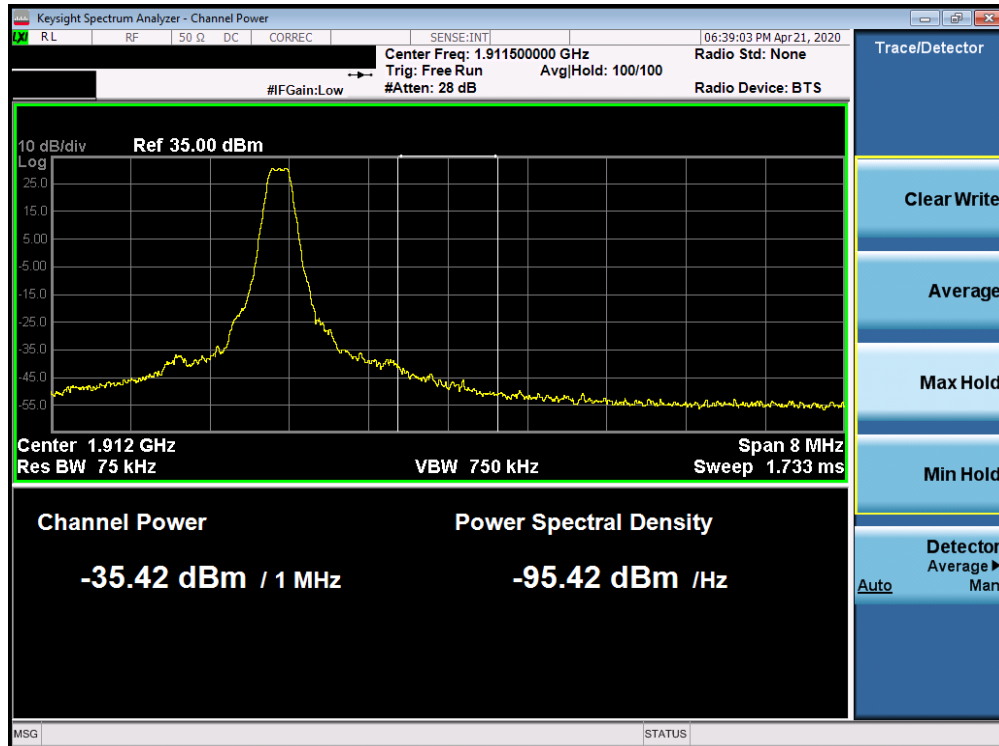


Plot 7-78. 4MHz Span Plot (PCS GSM Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 56 of 107

Cellular CDMA Mode

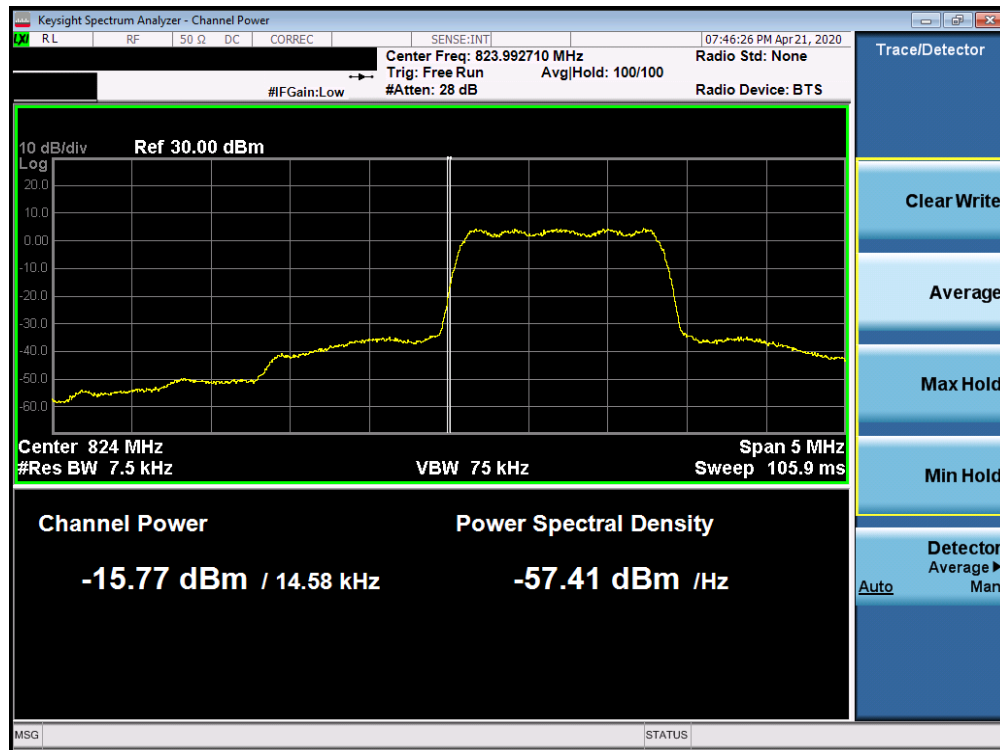


Plot 7-79. Band Edge Plot (Cellular CDMA Mode - Low Channel)

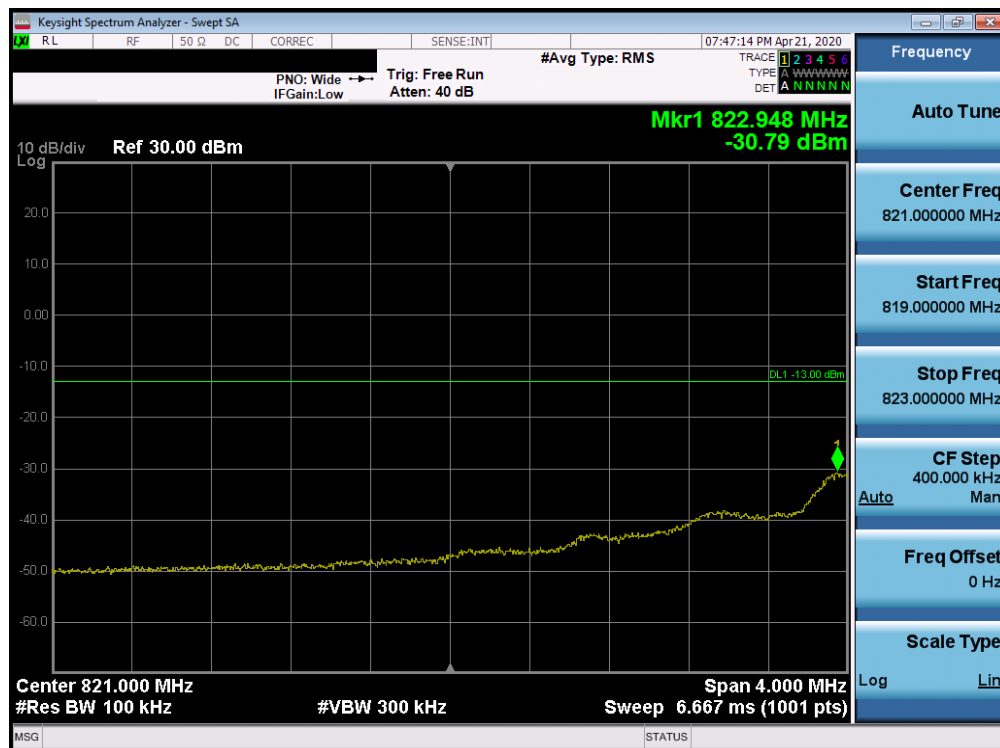

Plot 7-80. 4MHz Span Plot (Cellular CDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 57 of 107

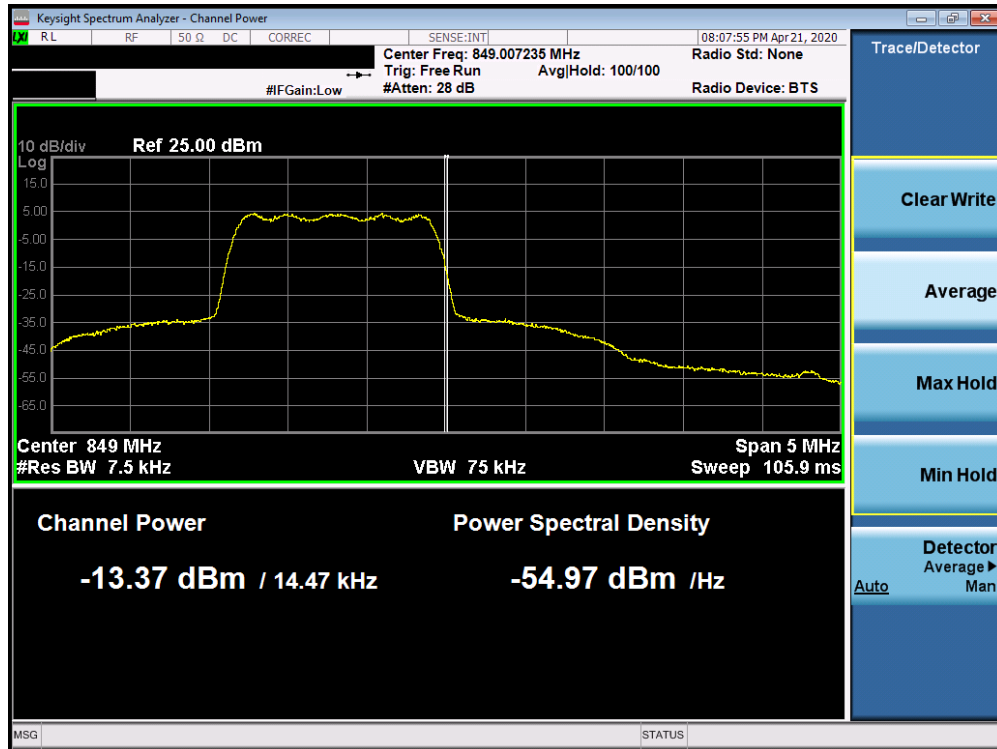


Plot 7-81. Band Edge Plot (Cellular CDMA Mode - High Channel)




Plot 7-82. 4MHz Span Plot (Cellular CDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 58 of 107

PCS CDMA Mode

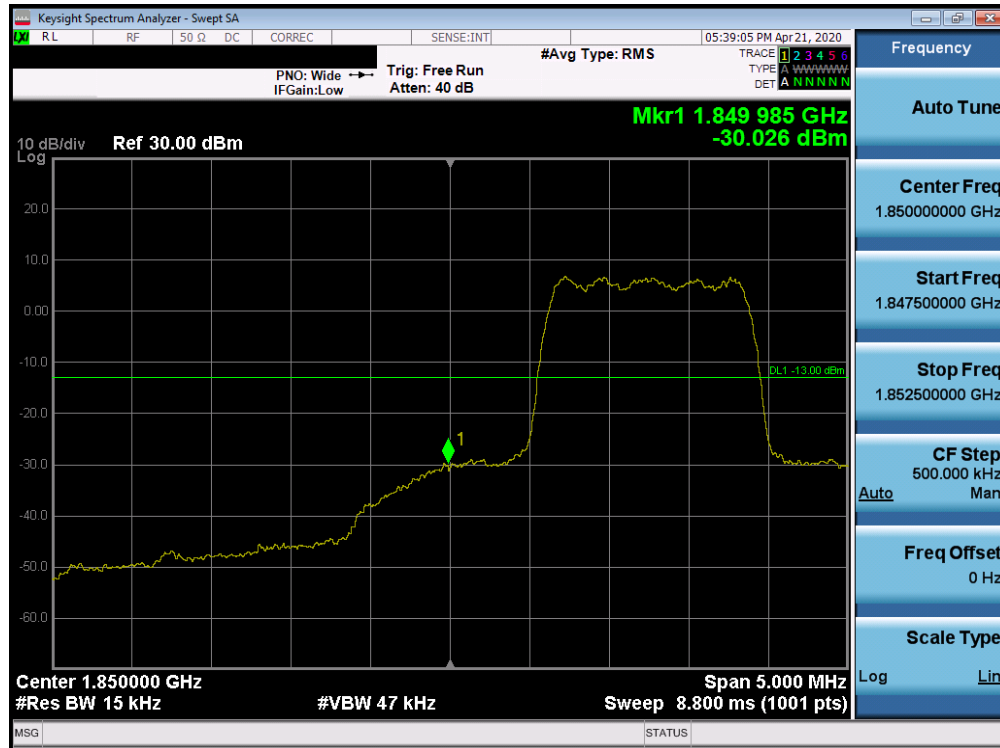


Plot 7-83. Band Edge Plot (PCS CDMA Mode - Low Channel)

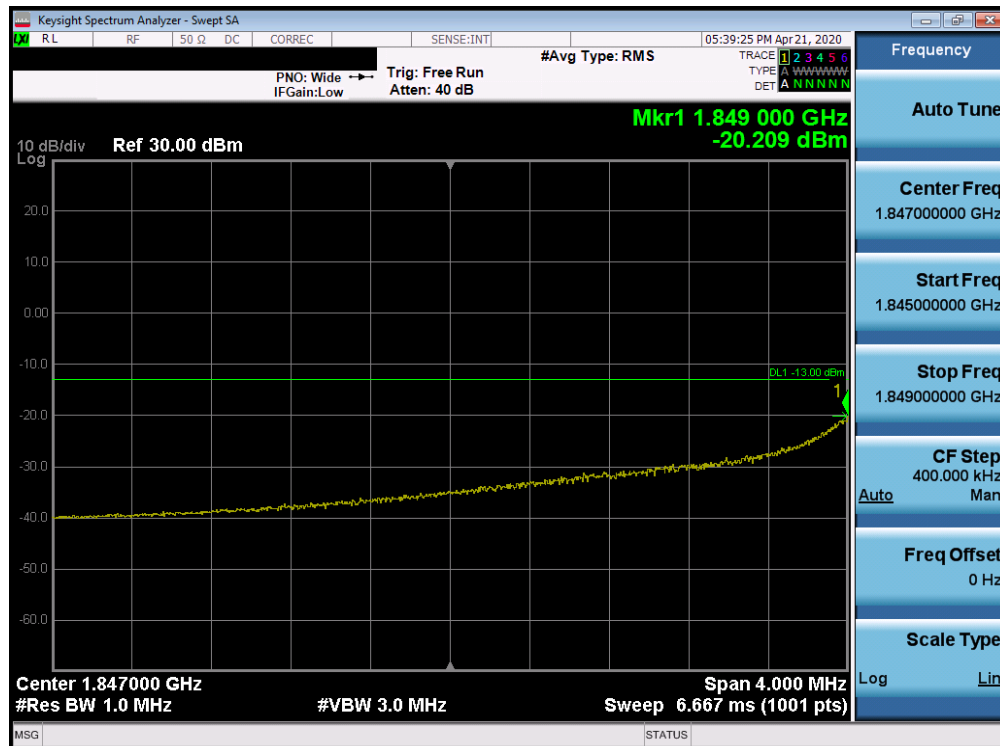


Plot 7-84. 4MHz Span Plot (PCS CDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 59 of 107

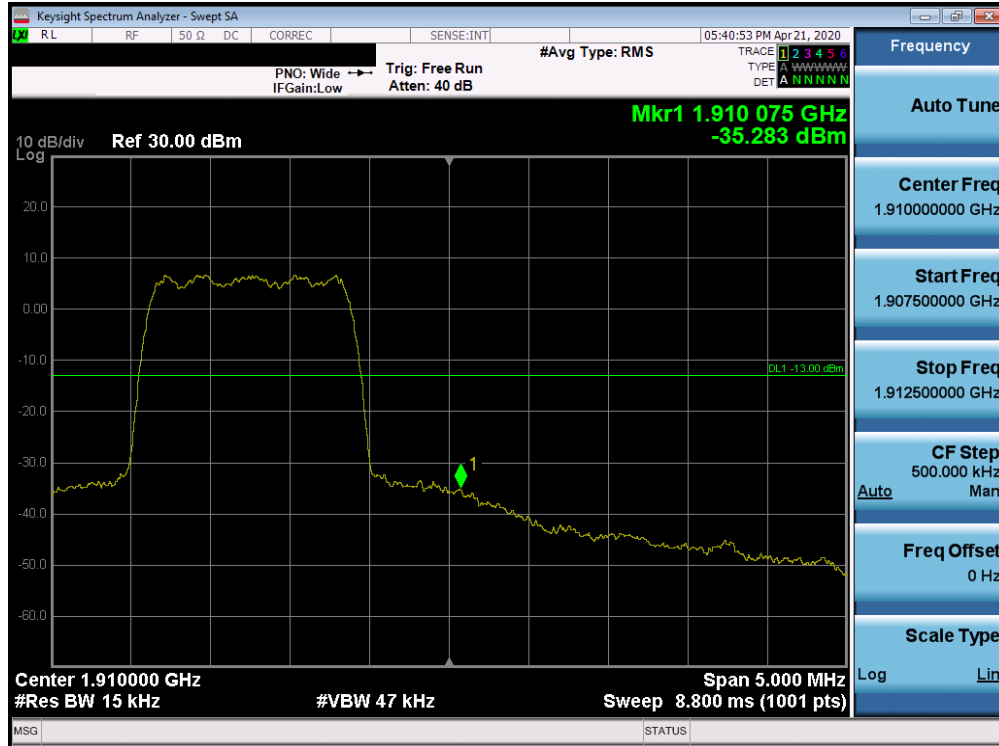


Plot 7-85. Band Edge Plot (PCS CDMA Mode - High Channel)

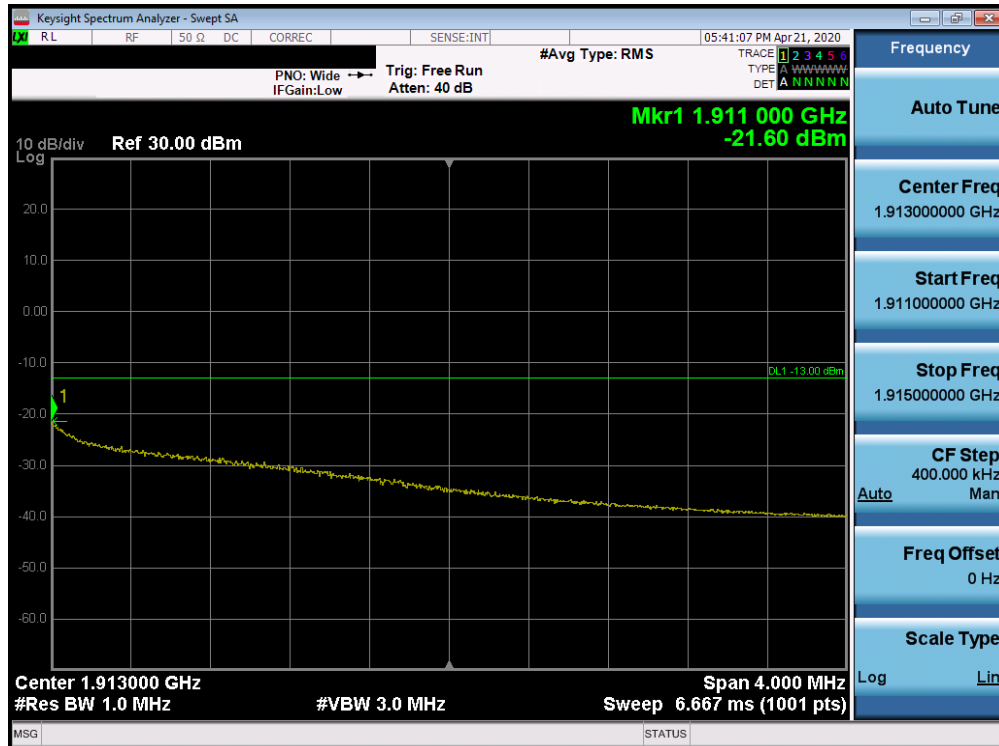

Plot 7-86. 4MHz Span Plot (PCS CDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 60 of 107

Cellular WCDMA Mode

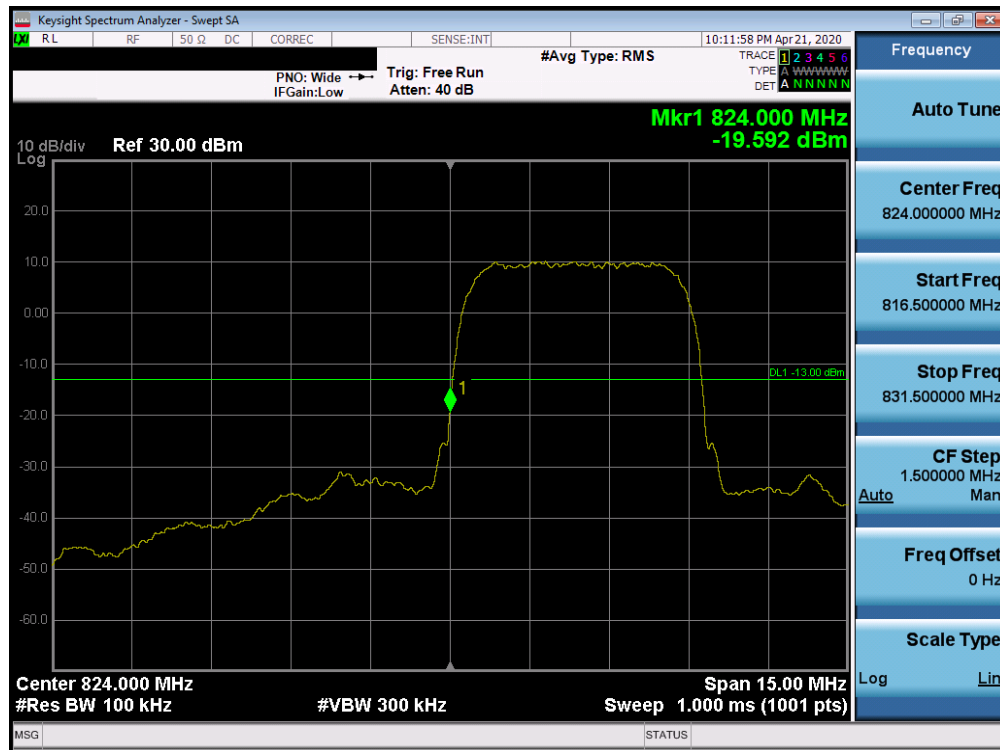


Plot 7-87. Band Edge Plot (Cellular WCDMA Mode - Low Channel)




Plot 7-88. Band Edge Plot (Cellular WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 61 of 107

AWS WCDMA Mode

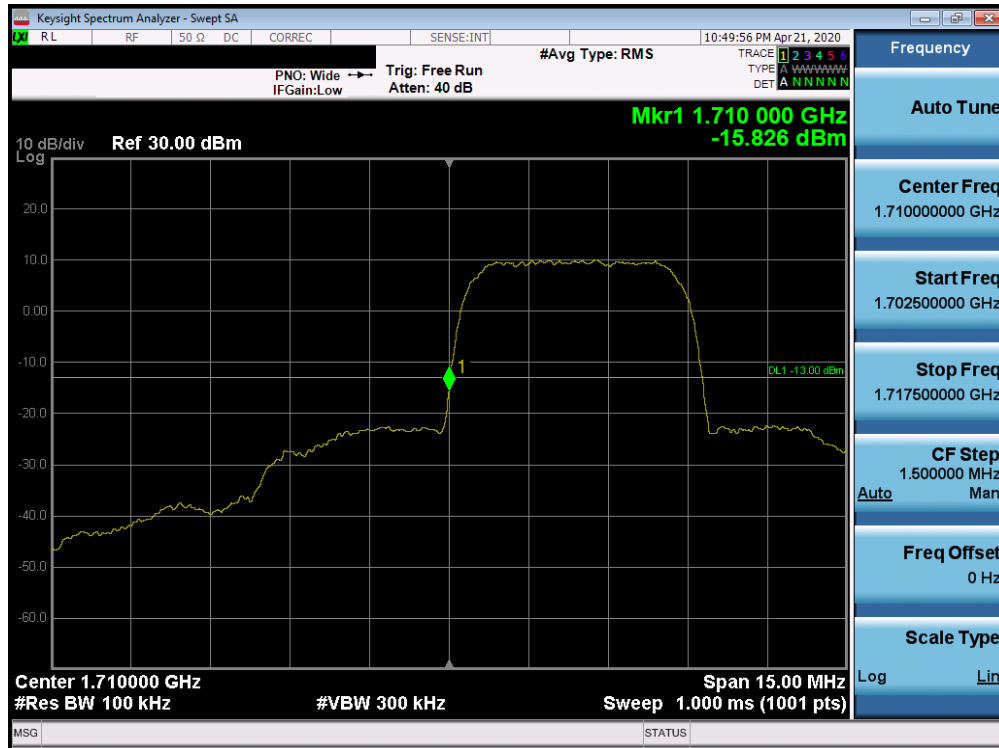


Plot 7-89. Band Edge Plot (AWS WCDMA Mode - Low Channel)

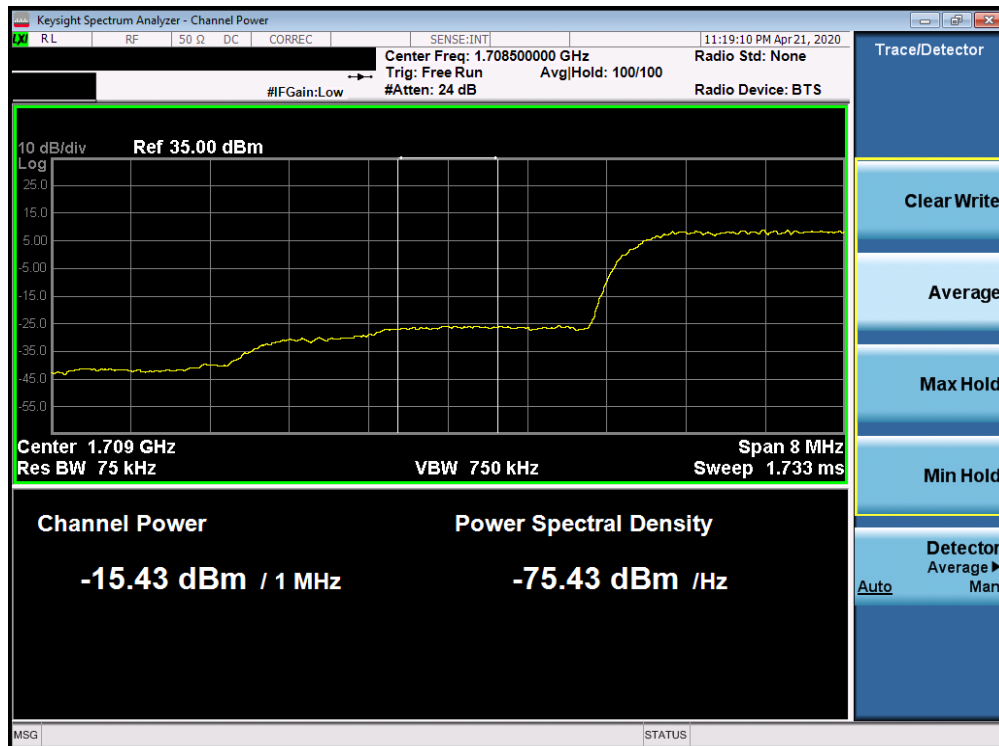


Plot 7-90. 4MHz Span Plot (AWS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 62 of 107

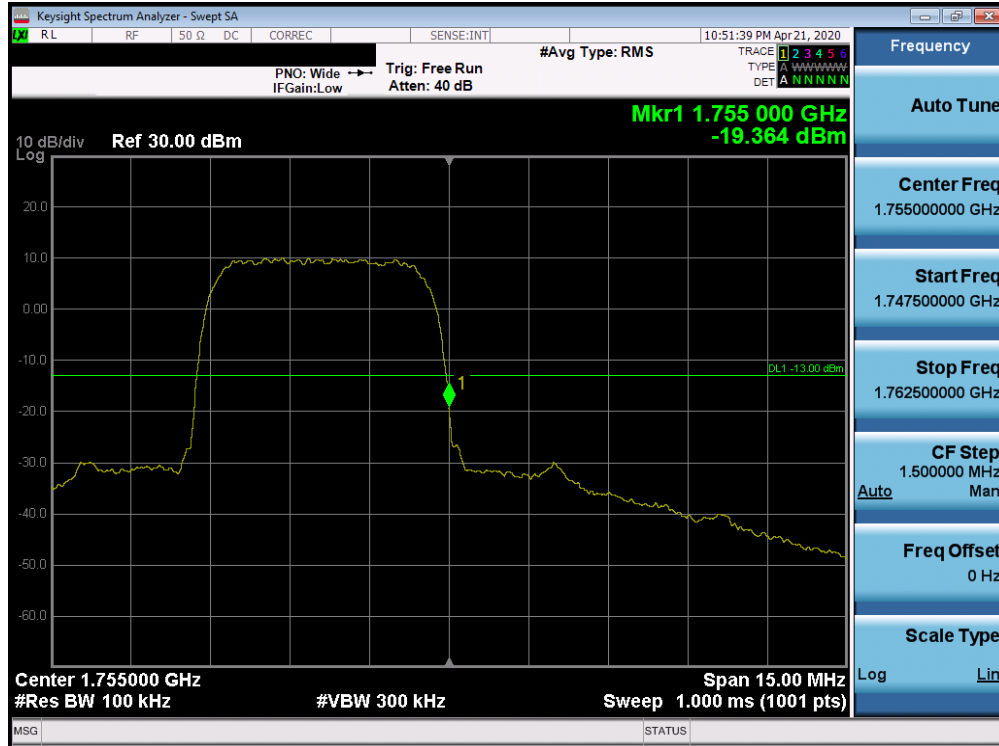


Plot 7-91. Band Edge Plot (AWS WCDMA Mode - High Channel)

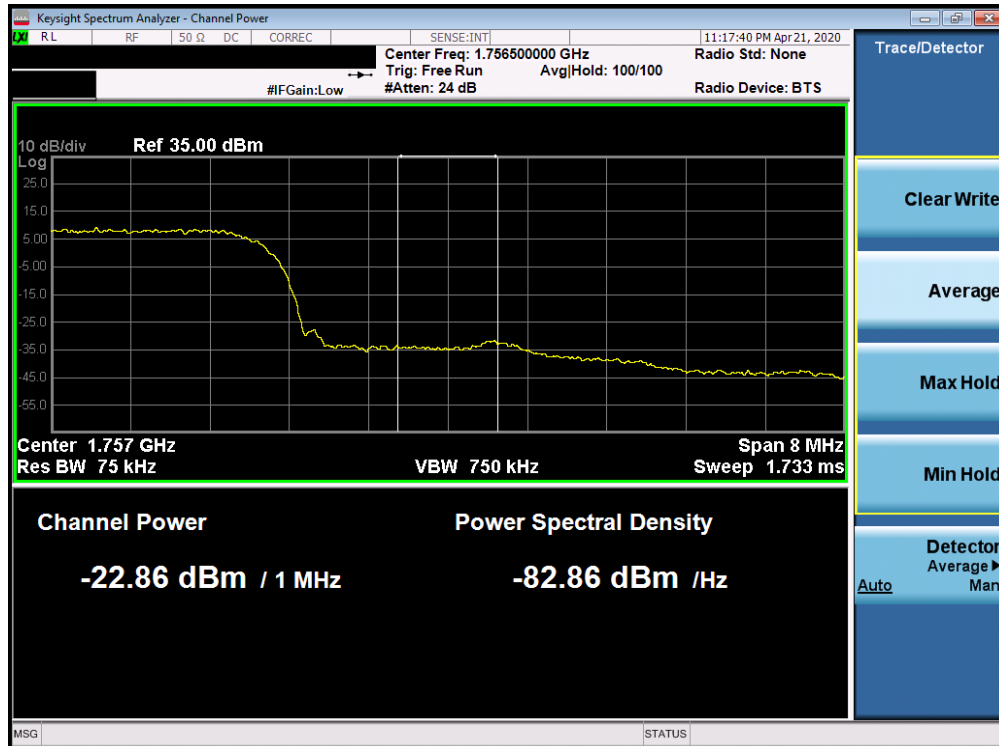


Plot 7-92. 4MHz Span Plot (AWS WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 63 of 107

PCS WCDMA Mode

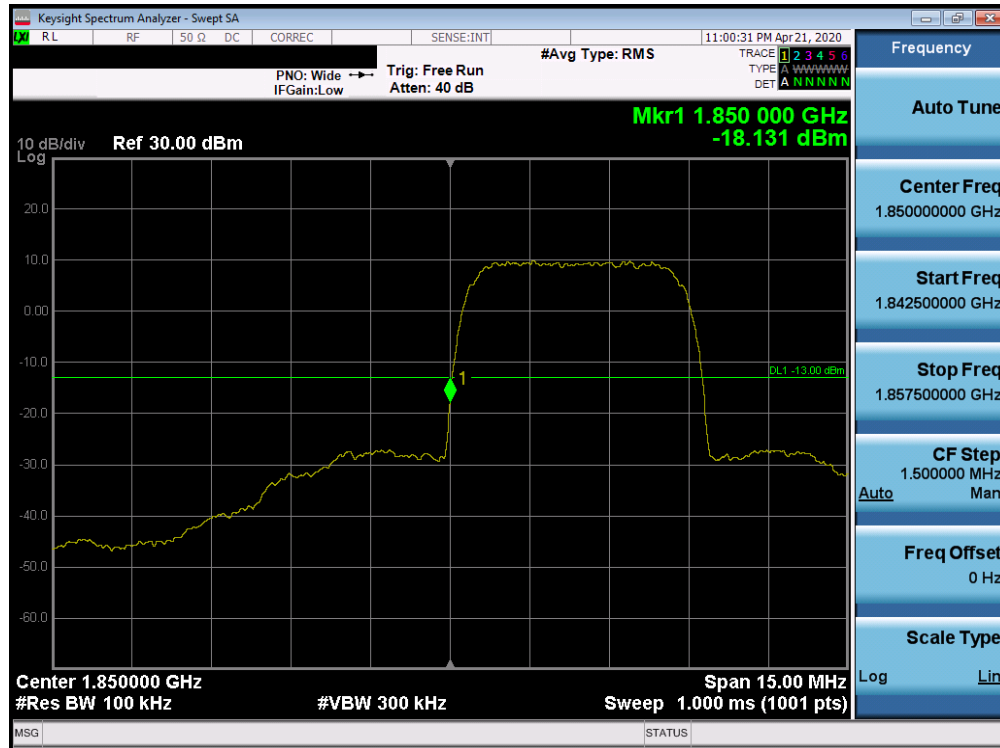


Plot 7-93. Band Edge Plot (PCS WCDMA Mode - Low Channel)

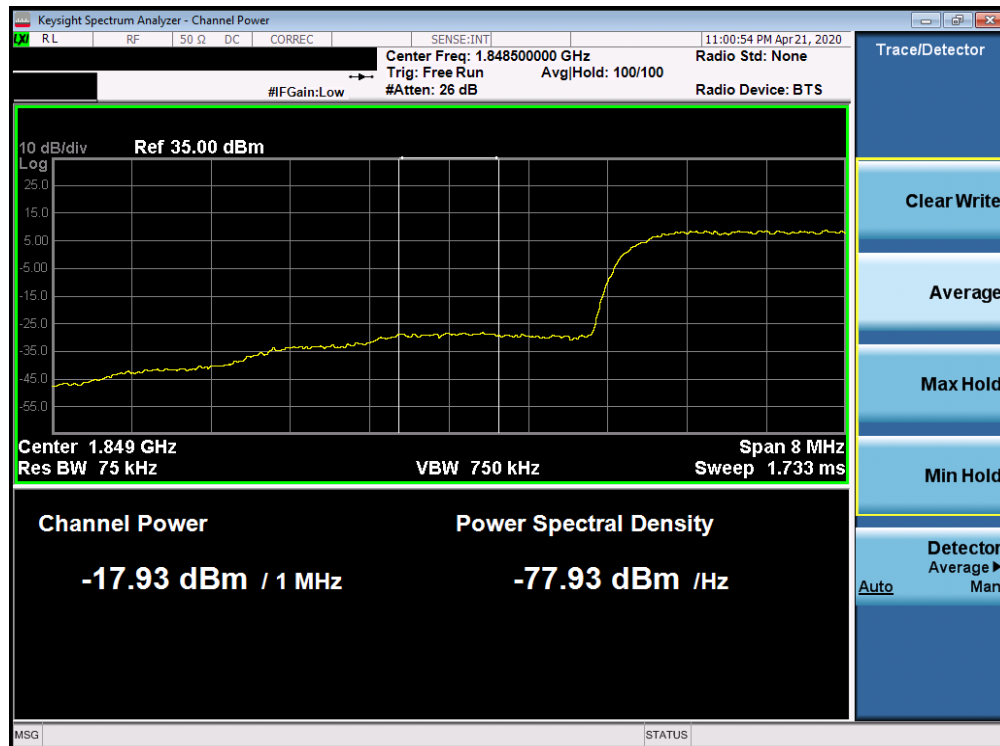


Plot 7-94. 4MHz Span Plot (PCS WCDMA Mode - Low Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 64 of 107

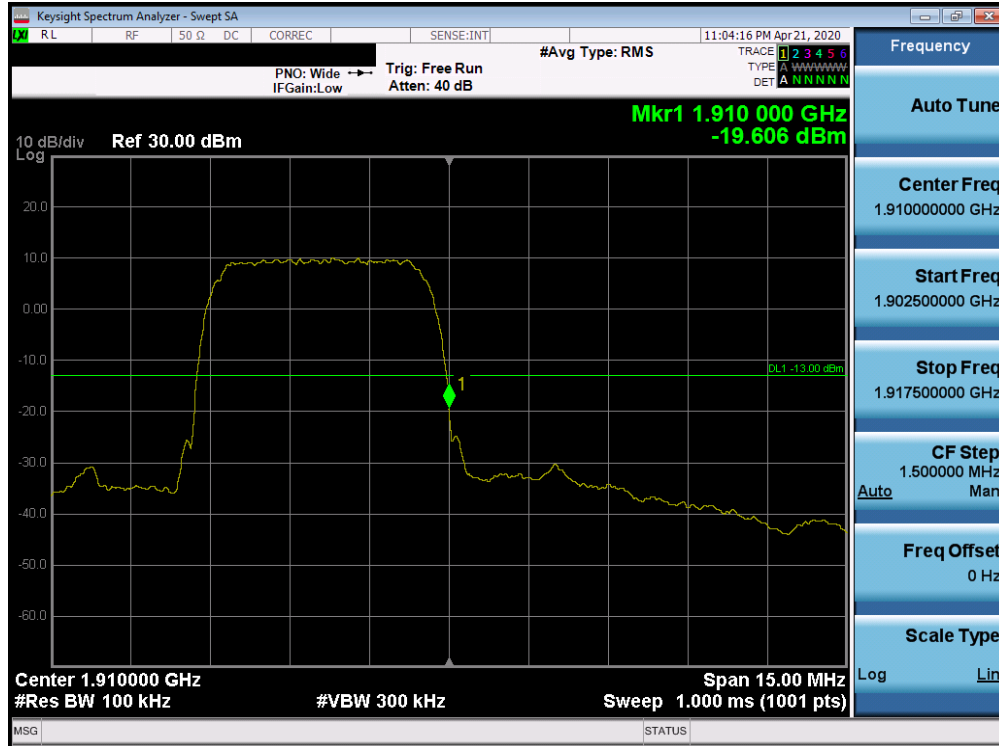

Plot 7-95. Band Edge Plot (PCS WCDMA Mode - High Channel)

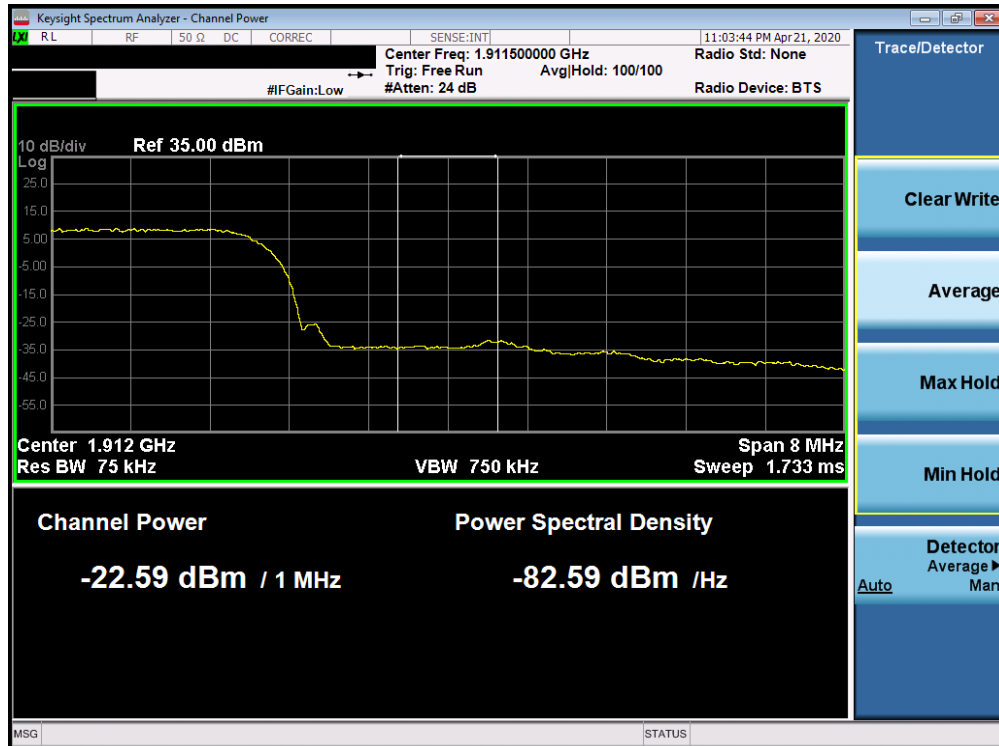

Plot 7-96. 4MHz Span Plot (PCS WCDMA Mode - High Channel)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 65 of 107

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

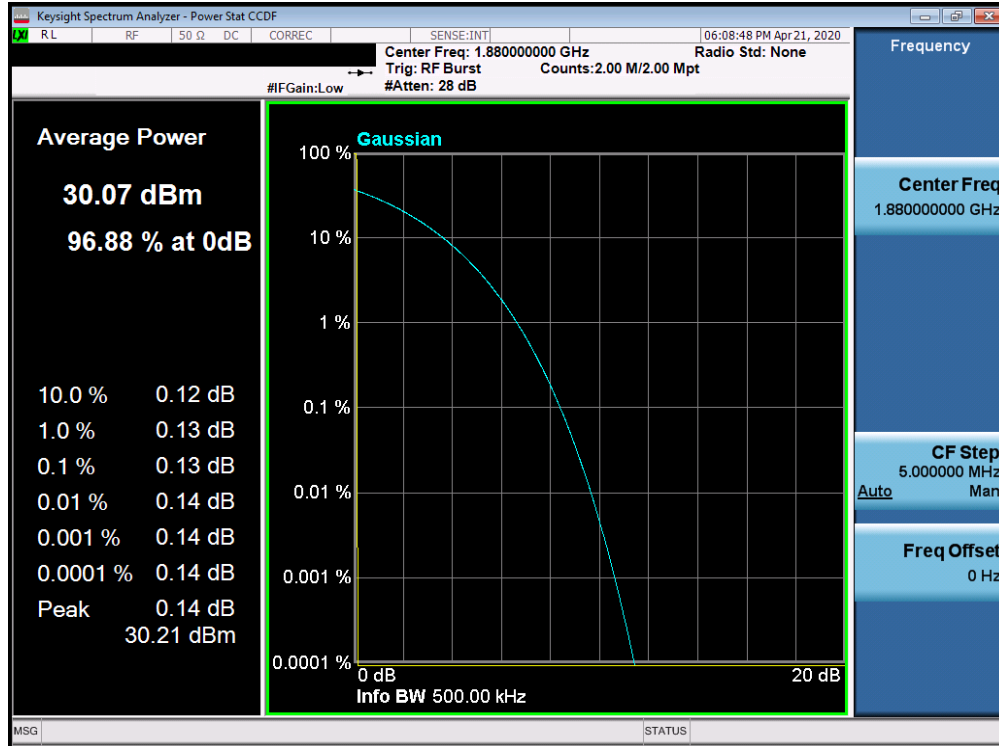


Figure 7-4. Test Instrument & Measurement Setup


Test Notes

None

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 66 of 107




Plot 7-97. Peak-Average Ratio Plot (PCS GPRS Mode)

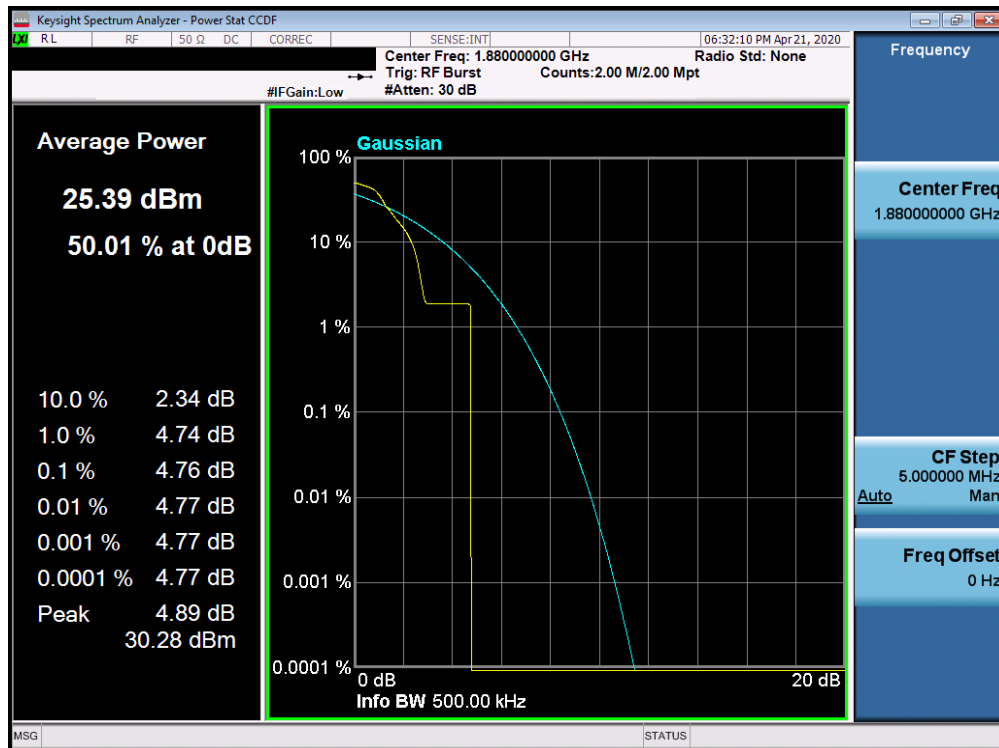


Plot 7-98. Peak-Average Ratio Plot (EDGE1900 Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 67 of 107

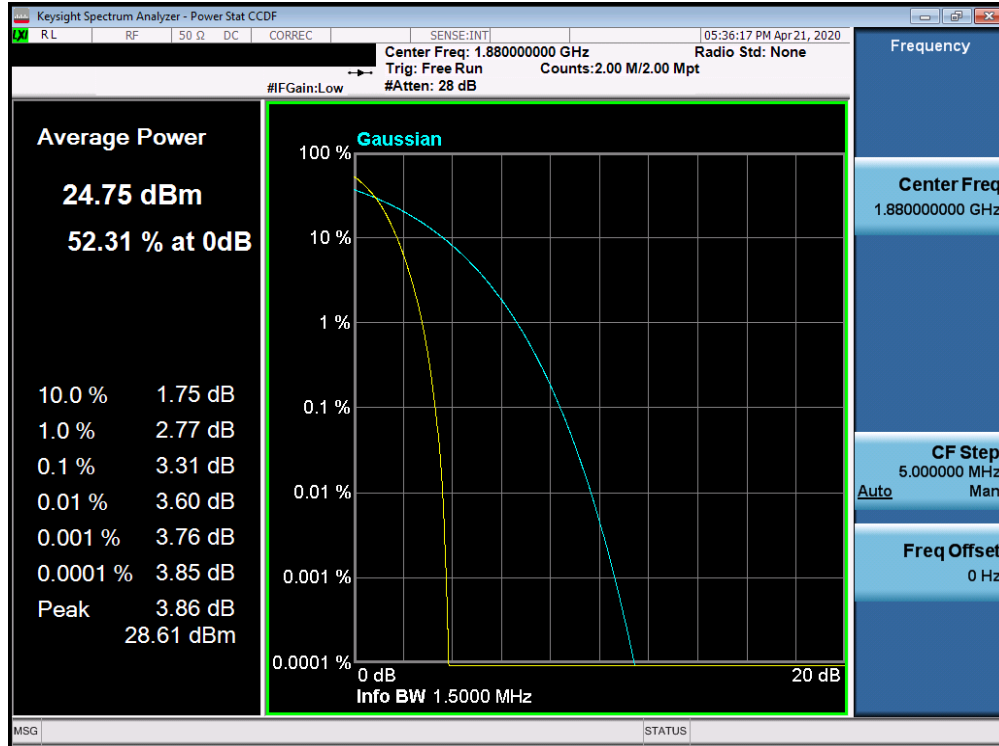


Plot 7-99. Peak-Average Ratio Plot (PCS CDMA Mode)

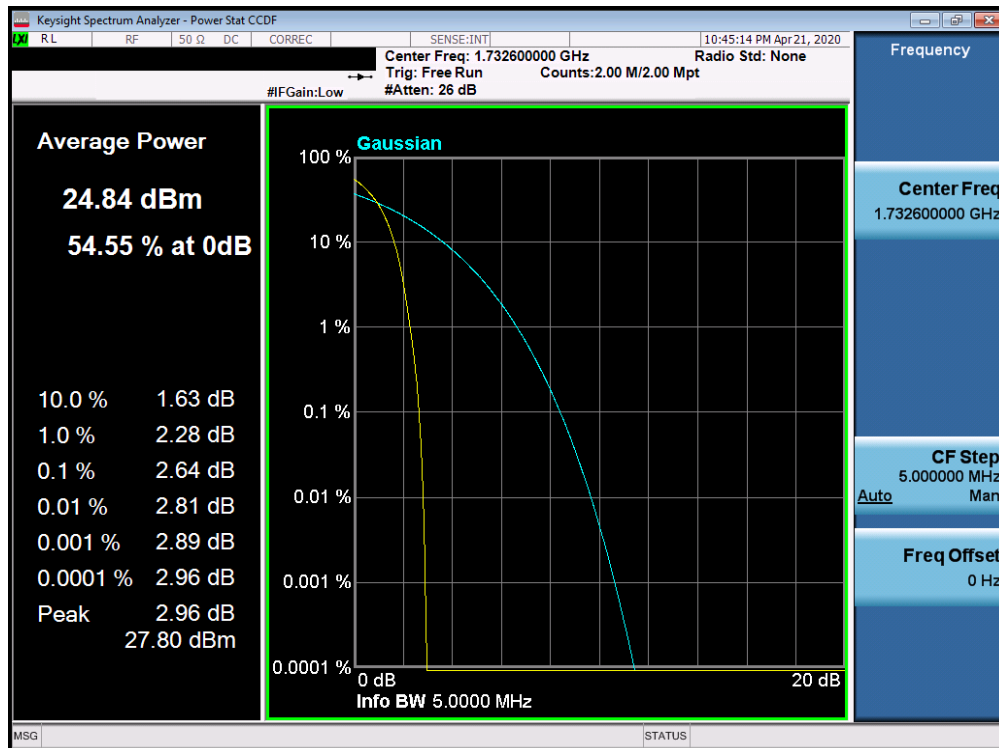

Plot 7-100. Peak-Average Ratio Plot (AWS WCDMA Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 68 of 107

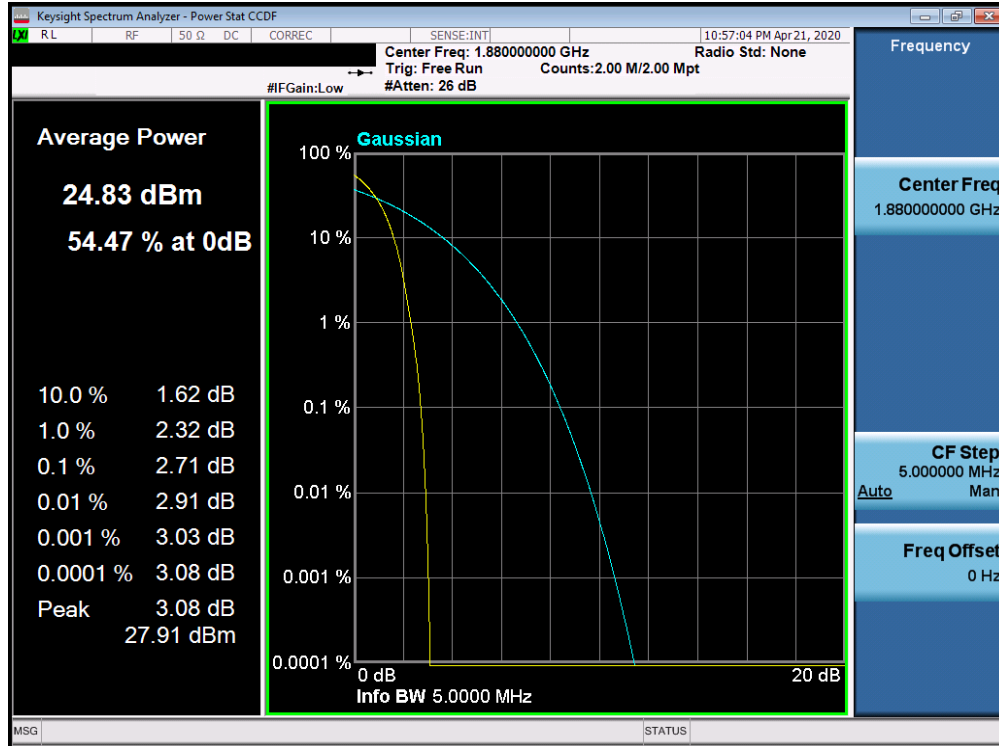

Plot 7-101. Peak-Average Ratio Plot (PCS WCDMA Mode)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 69 of 107

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer's "time domain power" measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $\geq 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 70 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

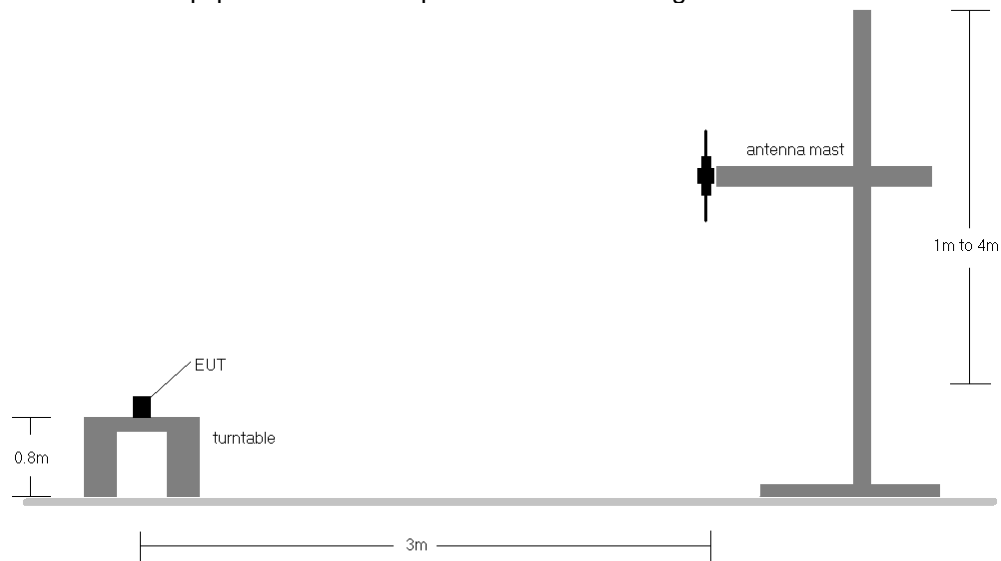


Figure 7-5. Radiated Test Setup <1GHz

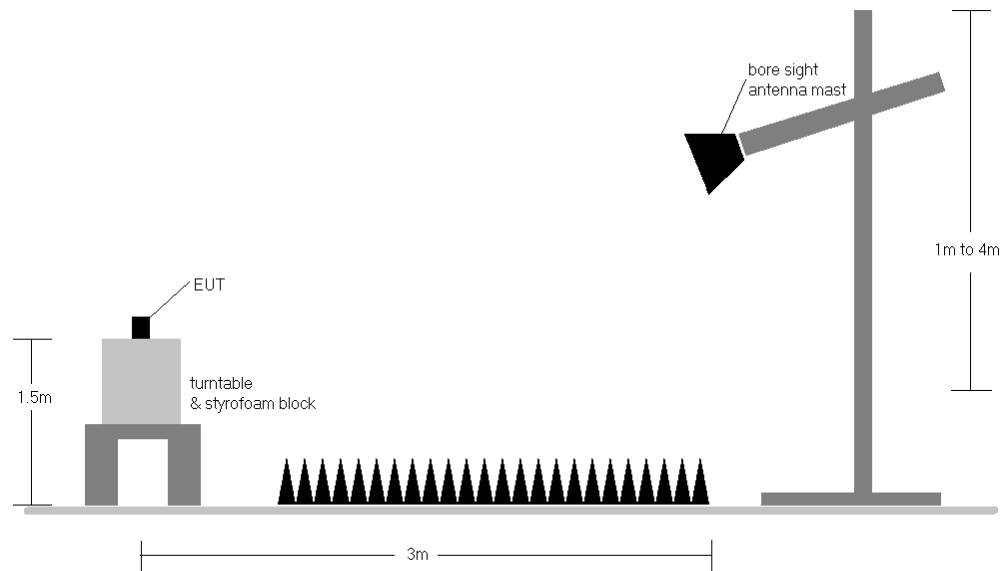


Figure 7-6. Radiated Test Setup >1GHz

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 71 of 107

Test Notes

- 1) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 2) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 3) This device employs CDMA technology. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 4) This unit was tested with its standard battery.
- 5) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 72 of 107

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
824.20	GPRS850	H	220	43	21.83	6.75	26.43	38.45	-12.02	28.58	40.61	-12.03
836.60	GPRS850	H	205	45	21.49	6.68	26.02	38.45	-12.43	28.17	40.61	-12.44
848.80	GPRS850	H	208	37	21.30	6.71	25.86	38.45	-12.60	28.01	40.61	-12.60
824.20	GPRS850	V	147	181	19.86	6.35	24.06	38.45	-14.39	26.21	40.61	-14.40
824.20	EDGE850	H	220	43	16.16	6.75	20.76	38.45	-17.69	22.91	40.61	-17.70

Table 7-2. ERP/EIRP (Cellular GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
824.70	CDMA850	H	220	53	12.73	6.76	17.34	38.45	-21.12	19.49	40.61	-21.12
836.52	CDMA850	H	225	38	12.08	6.68	16.61	38.45	-21.84	18.76	40.61	-21.85
848.31	CDMA850	H	210	42	12.24	6.70	16.79	38.45	-21.66	18.94	40.61	-21.67
824.70	CDMA850	V	159	216	12.03	6.76	16.64	38.45	-21.82	18.79	40.61	-21.82

Table 7-3. ERP/EIRP (Cellular CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
826.40	WCDMA850	H	222	60	13.45	6.77	18.07	38.45	-20.38	20.22	40.61	-20.38
836.60	WCDMA850	H	201	54	12.83	6.68	17.36	38.45	-21.09	19.51	40.61	-21.10
846.60	WCDMA850	H	202	63	11.82	6.68	16.35	38.45	-22.10	18.50	40.61	-22.10
826.40	WCDMA850	V	131	352	11.46	6.37	15.68	38.45	-22.77	17.83	40.61	-22.78

Table 7-4. ERP/EIRP (Cellular WCDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1712.40	WCDMA1700	H	129	359	11.37	9.46	20.83	30.00	-9.17
1732.60	WCDMA1700	H	115	2	12.48	9.34	21.82	30.00	-8.18
1752.60	WCDMA1700	H	102	2	12.05	9.24	21.29	30.00	-8.71
1732.60	WCDMA1700	V	143	140	11.76	9.34	21.10	30.00	-8.90

Table 7-5. EIRP (AWS WCDMA)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 73 of 107

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1850.20	GPRS1900	V	102	58	17.90	9.90	27.80	33.01	-5.21
1880.00	GPRS1900	V	143	131	17.24	10.13	27.37	33.01	-5.64
1909.80	GPRS1900	V	197	42	16.22	10.34	26.56	33.01	-6.45
1850.20	GPRS1900	H	101	141	17.14	9.51	26.65	33.01	-6.36
1850.20	EDGE1900	V	102	58	11.75	9.90	21.65	33.01	-11.36

Table 7-6. EIRP (PCS GPRS)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1851.25	CDMA1900	H	117	190	10.83	9.52	20.35	33.01	-12.66
1880.00	CDMA1900	H	149	153	11.70	9.93	21.63	33.01	-11.38
1908.75	CDMA1900	H	144	13	10.70	10.27	20.97	33.01	-12.04
1880.00	CDMA1900	V	187	55	11.26	9.93	21.19	33.01	-11.82

Table 7-7. EIRP (PCS CDMA)

Frequency [MHz]	Mode	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Margin [dB]
1852.40	WCDMA1900	H	162	10	11.05	9.54	20.59	33.01	-12.42
1880.00	WCDMA1900	H	114	6	10.81	9.93	20.74	33.01	-12.27
1907.60	WCDMA1900	H	152	15	10.51	10.26	20.77	33.01	-12.24
1907.60	WCDMA1900	V	141	148	10.33	9.93	20.26	33.01	-12.75

Table 7-8. EIRP (PCS WCDMA)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 74 of 107

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 75 of 107

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

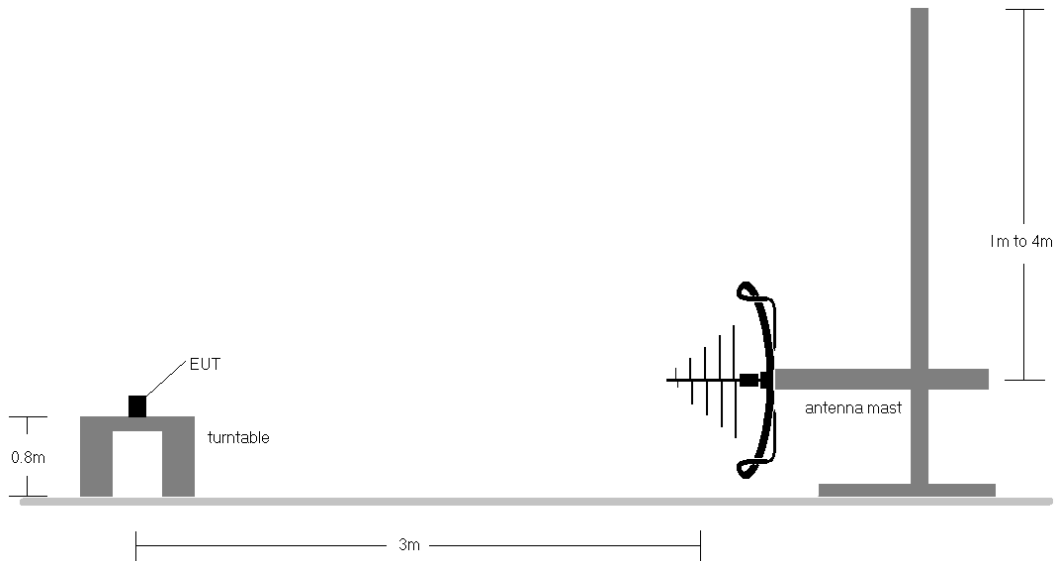


Figure 7-7. Test Instrument & Measurement Setup < 1GHz

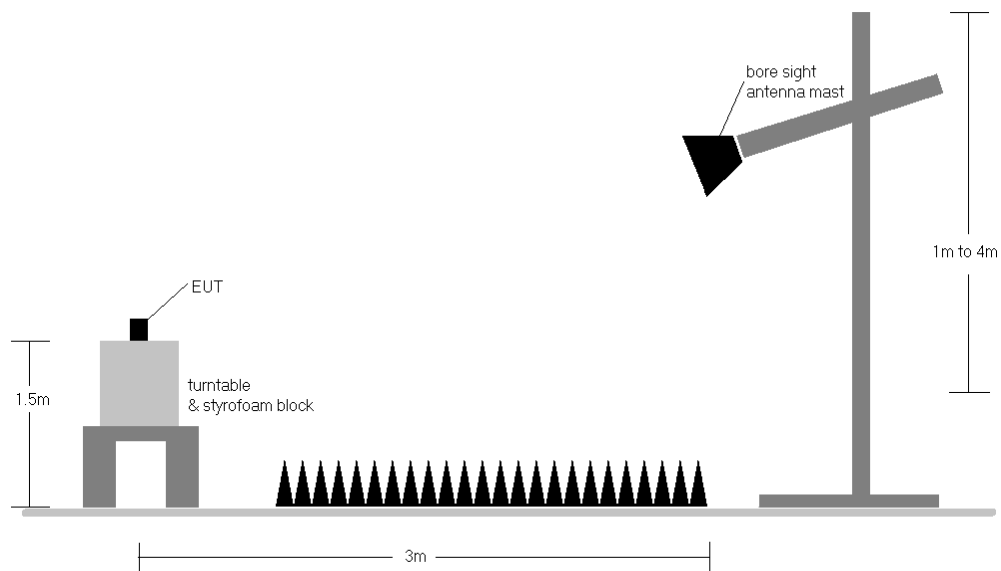


Figure 7-8. Test Instrument & Measurement Setup >1 GHz


FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 76 of 107

Test Notes

- 6) This device employs GSM, GPRS, and EDGE capabilities. The EUT was tested under all configurations and the highest power is reported in GPRS mode while transmitting with one slot active.
- 7) This device employs UMTS technology with WCDMA (AMR/RMC) and HSDPA capabilities. The EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1."
- 8) This device employs CDMA technology. The EUT was tested under all RC and SO combinations and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- 9) This unit was tested with its standard battery.
- 10) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
- 11) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 12) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 13) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 77 of 107

Cellular GPRS Mode

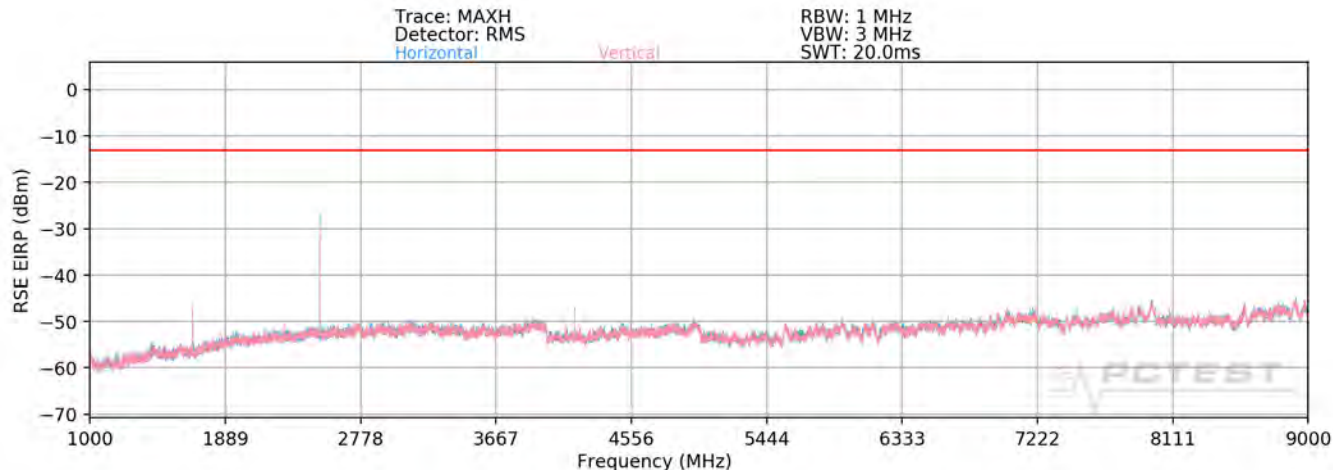

Plot 7-102. Radiated Spurious Plot above 1GHz (Cellular GPRS Mode)

OPERATING FREQUENCY: 824.20 MHz

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1648.40	V	182	149	-45.90	3.07	-42.83	-29.8
2472.60	V	373	310	-36.18	3.82	-32.36	-19.4
3296.80	V	115	100	-64.22	6.00	-58.22	-45.2
4121.00	V	116	134	-60.98	7.67	-53.31	-40.3
4945.20	V	-	-	-72.16	8.72	-63.43	-50.4
5769.40	V	388	17	-68.99	9.09	-59.90	-46.9
6593.60	V	-	-	-68.41	8.04	-60.37	-47.4
7417.80	V	-	-	-67.87	9.70	-58.17	-45.2

Table 7-9. Radiated Spurious Data (Cellular GPRS Mode – Ch. 128)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 78 of 107

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	V	135	147	-49.26	3.10	-46.16	-33.2
2509.80	V	106	56	-32.30	4.02	-28.28	-15.3
3346.40	V	137	34	-63.27	6.03	-57.24	-44.2
4183.00	V	304	12	-60.34	7.79	-52.55	-39.5
5019.60	V	400	20	-71.35	8.78	-62.56	-49.6
5856.20	V	239	28	-64.08	9.18	-54.90	-41.9
6692.80	V	-	-	-69.79	10.24	-59.55	-46.6
7529.40	V	-	-	-65.46	7.48	-57.98	-45.0

Table 7-10. Radiated Spurious Data (Cellular GPRS Mode – Ch. 190)


OPERATING FREQUENCY: 848.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1697.60	V	119	153	-48.73	3.15	-45.58	-32.6
2546.40	V	188	267	-34.37	4.15	-30.22	-17.2
3395.20	V	132	356	-65.39	6.24	-59.16	-46.2
4244.00	V	124	144	-61.31	7.97	-53.34	-40.3
5092.80	V	-	-	-69.99	8.88	-61.11	-48.1
5941.60	V	112	353	-67.16	9.31	-57.85	-44.9
6790.40	V	-	-	-71.36	10.21	-61.15	-48.2
7639.20	V	-	-	-67.11	8.64	-58.47	-45.5

Table 7-11. Radiated Spurious Data (Cellular GPRS Mode – Ch. 251)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 79 of 107

Cellular CDMA Mode

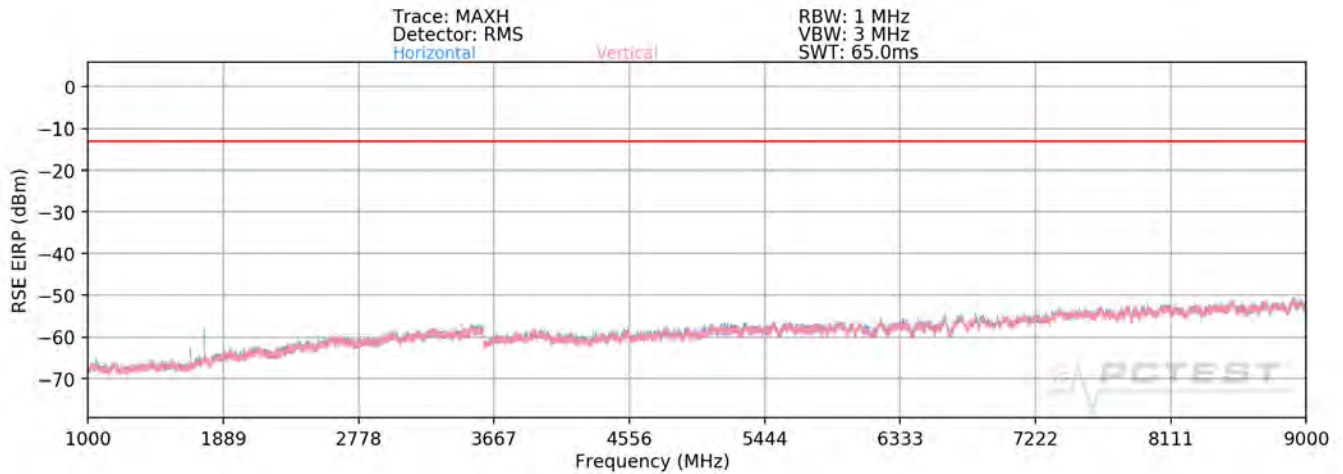

Plot 7-103. Radiated Spurious Plot above 1GHz (Cellular CDMA Mode)

OPERATING FREQUENCY: 824.70 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1649.40	V	152	352	-68.38	3.09	-65.29	-52.3
2474.10	V	398	34	-64.61	3.91	-60.70	-47.7
3298.80	V	-	-	-71.74	6.00	-65.73	-52.7
4123.50	V	-	-	-72.56	7.72	-64.85	-51.8

Table 7-12. Radiated Spurious Data (Cellular CDMA Mode – Ch. 1013)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 80 of 107

OPERATING FREQUENCY: 836.52 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.04	V	159	353	-65.89	3.10	-62.79	-49.8
2509.56	V	399	31	-66.41	4.02	-62.39	-49.4
3346.08	V	-	-	-71.60	6.03	-65.57	-52.6
4182.60	V	-	-	-72.21	7.79	-64.42	-51.4

Table 7-13. Radiated Spurious Data (Cellular CDMA Mode – Ch. 384)


OPERATING FREQUENCY: 848.31 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1696.62	V	151	180	-63.05	3.17	-59.88	-46.9
2544.93	V	399	153	-64.05	4.13	-59.92	-46.9
3393.24	V	-	-	-72.41	6.20	-66.22	-53.2
4241.55	V	-	-	-72.64	7.93	-64.72	-51.7

Table 7-14. Radiated Spurious Data (Cellular CDMA Mode – Ch. 777)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 81 of 107

Cellular WCDMA Mode

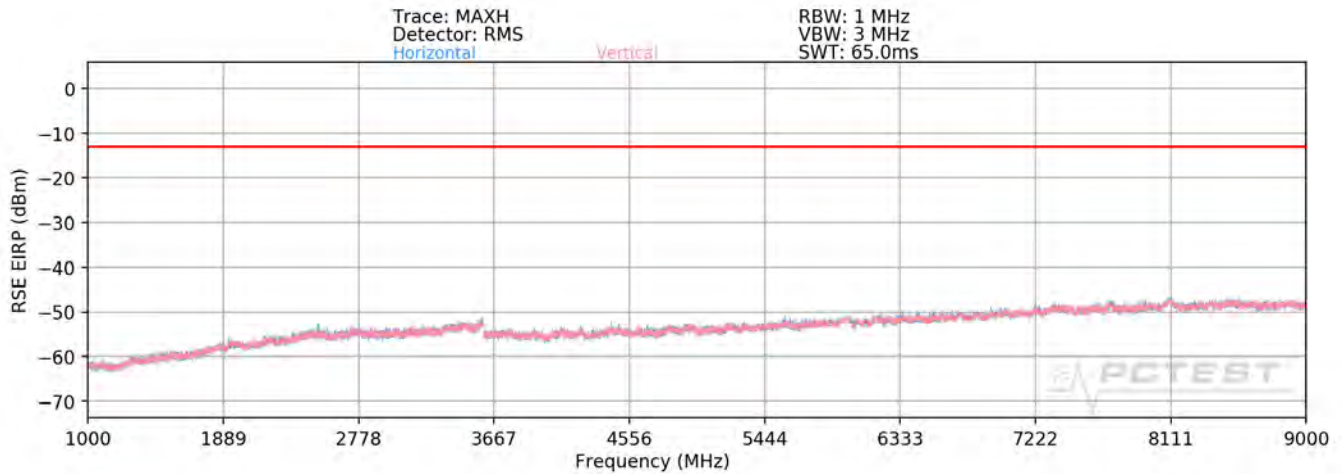

Plot 7-104. Radiated Spurious Plot above 1GHz (Cellular WCDMA Mode)

OPERATING FREQUENCY: 826.40 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1652.80	H	166	180	-70.10	3.09	-67.01	-54.0
2479.20	H	400	334	-70.86	3.91	-66.95	-53.9
3305.60	H	-	-	-71.82	6.00	-65.82	-52.8
4132.00	H	-	-	-72.72	7.72	-65.00	-52.0

Table 7-15. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4132)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 82 of 107

OPERATING FREQUENCY: 836.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.20	H	120	172	-67.45	3.10	-64.34	-51.3
2509.80	H	368	354	-68.81	4.02	-64.79	-51.8
3346.40	H	-	-	-71.84	6.03	-65.82	-52.8
4183.00	H	-	-	-72.79	7.79	-65.00	-52.0

Table 7-16. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4183)


OPERATING FREQUENCY: 846.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1693.20	H	143	177	-68.57	3.17	-65.40	-52.4
2539.80	H	398	36	-68.91	4.13	-64.79	-51.8
3386.40	H	-	-	-72.28	6.20	-66.08	-53.1
4233.00	H	-	-	-73.04	7.93	-65.11	-52.1

Table 7-17. Radiated Spurious Data (Cellular WCDMA Mode – Ch. 4233)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 83 of 107

AWS WCDMA Mode

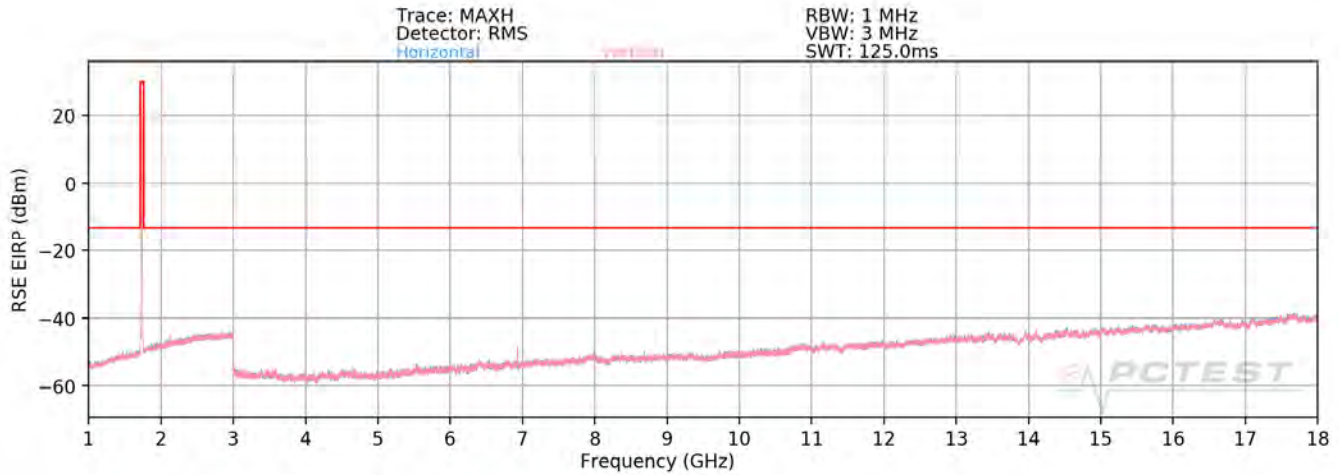

Plot 7-105. Radiated Spurious Plot above 1GHz (AWS WCDMA Mode)

OPERATING FREQUENCY: 1712.40 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3424.80	V	126	226	-59.95	6.50	-53.45	-40.4
5137.20	V	-	-	-66.33	8.46	-57.87	-44.9
6849.60	V	102	235	-60.78	8.74	-52.04	-39.0
8562.00	V	-	-	-63.26	9.65	-53.61	-40.6
10274.40	V	-	-	-61.64	9.75	-51.89	-38.9

Table 7-18. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1312)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 84 of 107

OPERATING FREQUENCY: 1732.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3465.20	V	115	248	-61.03	6.59	-54.44	-41.4
5197.80	V	-	-	-66.23	8.48	-57.74	-44.7
6930.40	V	132	235	-58.99	8.70	-50.29	-37.3
8663.00	V	-	-	-63.20	9.84	-53.37	-40.4
10395.60	V	-	-	-61.39	9.79	-51.60	-38.6

Table 7-19. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1413)


OPERATING FREQUENCY: 1752.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3505.20	V	114	247	-61.58	6.62	-54.96	-42.0
5257.80	V	-	-	-66.29	8.44	-57.85	-44.9
7010.40	V	117	238	-57.56	8.61	-48.96	-36.0
8763.00	V	-	-	-63.46	9.97	-53.49	-40.5
10515.60	V	-	-	-61.96	9.77	-52.18	-39.2

Table 7-20. Radiated Spurious Data (AWS WCDMA Mode – Ch. 1513)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 85 of 107

PCS GPRS Mode

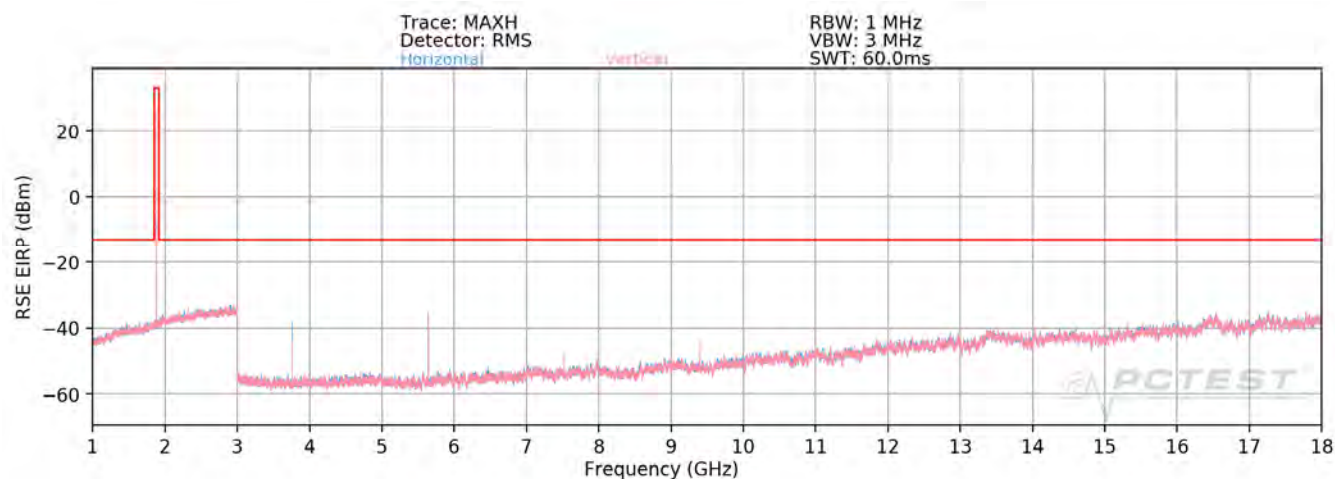

Plot 7-106. Radiated Spurious Plot above 1GHz (PCS GPRS Mode)

OPERATING FREQUENCY: 1850.20 MHz

MODULATION SIGNAL: GPRS (GMSK)

DISTANCE: 3 meters

LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3700.40	V	400	19	-49.22	6.79	-42.43	-29.4
5550.60	V	391	10	-45.33	8.46	-36.87	-23.9
7400.80	V	391	5	-48.57	8.29	-40.28	-27.3
9251.00	V	372	1	-49.89	9.91	-39.98	-27.0
11101.20	V	229	46	-58.48	9.33	-49.16	-36.2
12951.40	V	272	1	-62.97	9.23	-53.74	-40.7
14801.60	V	307	61	-54.85	9.41	-45.44	-32.4
16651.80	V	246	9	-59.42	8.75	-50.67	-37.7

Table 7-21. Radiated Spurious Data (PCS GPRS Mode – Ch. 512)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 86 of 107

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	397	8	-48.55	6.87	-41.68	-28.7
5640.00	V	111	31	-43.24	8.55	-34.70	-21.7
7520.00	V	115	38	-52.38	8.47	-43.91	-30.9
9400.00	V	389	7	-50.15	9.82	-40.33	-27.3
11280.00	V	243	52	-58.53	9.16	-49.37	-36.4
13160.00	V	-	-	-64.79	9.21	-55.58	-42.6
15040.00	V	245	56	-53.59	9.41	-44.19	-31.2
16920.00	V	-	-	-63.81	9.15	-54.66	-41.7

Table 7-22. Radiated Spurious Data (PCS GPRS Mode – Ch. 661)


OPERATING FREQUENCY: 1909.80 MHz
 MODULATION SIGNAL: GPRS (GMSK)
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3819.60	V	400	17	-49.56	7.03	-42.53	-29.5
5729.40	V	114	35	-43.83	8.61	-35.22	-22.2
7639.20	V	112	39	-53.34	8.59	-44.75	-31.7
9549.00	V	393	36	-50.68	9.85	-40.83	-27.8
11458.80	V	242	56	-56.88	9.12	-47.76	-34.8
13368.60	V	-	-	-62.75	9.14	-53.61	-40.6
15278.40	V	249	65	-59.68	9.27	-50.41	-37.4
17188.20	V	-	-	-60.59	9.15	-51.44	-38.4

Table 7-23. Radiated Spurious Data (PCS GPRS Mode – Ch. 810)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 87 of 107

PCS CDMA Mode

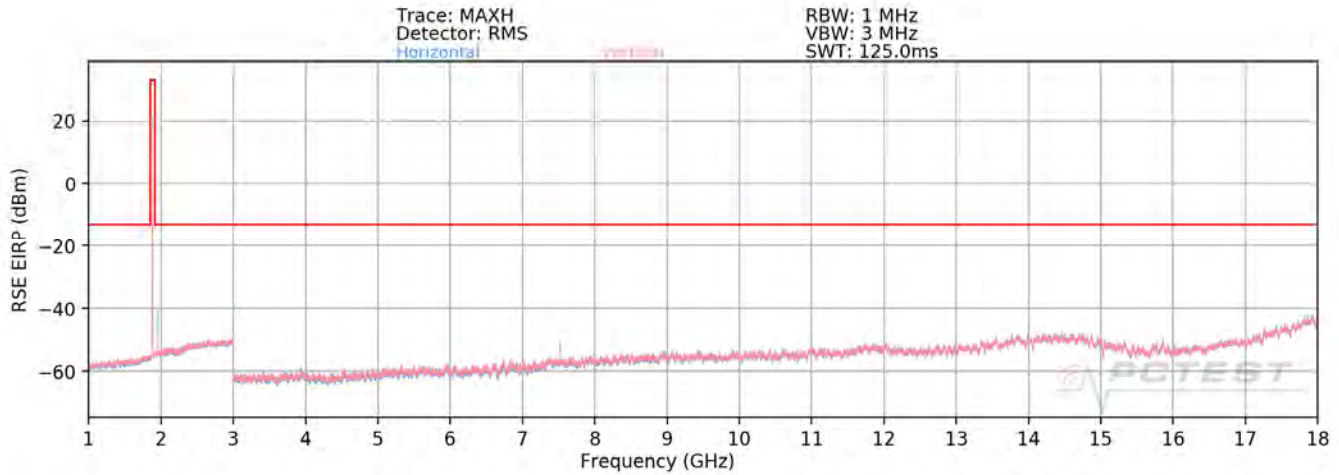

Plot 7-107. Radiated Spurious Plot above 1GHz (PCS CDMA Mode)

OPERATING FREQUENCY: 1851.25 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3702.50	H	382	147	-66.73	6.79	-59.94	-46.9
5553.75	H	400	144	-70.33	8.46	-61.87	-48.9
7405.00	H	390	192	-56.60	8.30	-48.31	-35.3
9256.25	H	-	-	-68.31	9.91	-58.40	-45.4
11107.50	H	124	191	-66.46	9.31	-57.15	-44.1
12958.75	H	-	-	-67.21	9.22	-57.99	-45.0
14810.00	H	-	-	-64.21	9.41	-54.79	-41.8

Table 7-24. Radiated Spurious Data (PCS CDMA Mode – Ch. 25)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 88 of 107

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	H	397	206	-68.03	6.87	-61.16	-48.2
5640.00	H	398	123	-71.28	8.55	-62.74	-49.7
7520.00	H	393	187	-54.03	8.47	-45.56	-32.6
9400.00	H	-	-	-69.57	9.82	-59.75	-46.8
11280.00	H	400	198	-67.48	9.16	-58.32	-45.3
13160.00	H	-	-	-65.58	9.21	-56.37	-43.4
15040.00	H	-	-	-66.41	9.41	-57.01	-44.0

Table 7-25. Radiated Spurious Data (PCS CDMA Mode – Ch. 600)


OPERATING FREQUENCY: 1908.75 MHz
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3817.50	H	383	153	-62.49	7.02	-55.47	-42.5
5726.25	H	400	188	-70.65	8.60	-62.05	-49.0
7635.00	H	397	191	-53.75	8.59	-45.17	-32.2
9543.75	H	-	-	-68.68	9.84	-58.84	-45.8
11452.50	H	133	266	-66.66	9.11	-57.54	-44.5
13361.25	H	-	-	-65.00	9.15	-55.86	-42.9
15270.00	H	-	-	-65.82	9.28	-56.54	-43.5

Table 7-26. Radiated Spurious Data (PCS CDMA Mode – Ch. 1175)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 89 of 107

PCS WCDMA Mode

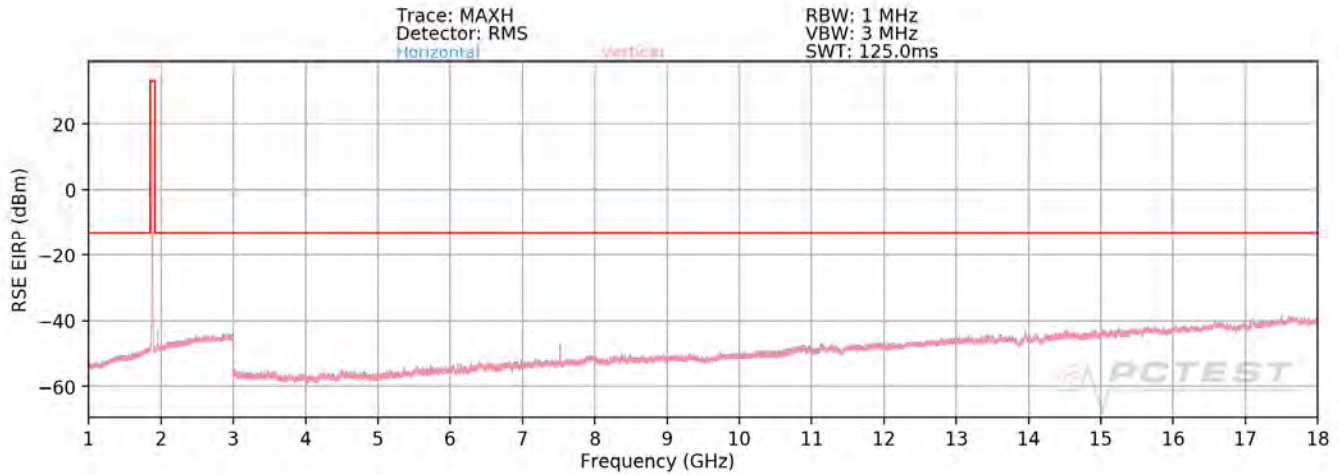

Plot 7-108. Radiated Spurious Plot above 1GHz (PCS WCDMA Mode)

OPERATING FREQUENCY: 1852.40 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3704.80	V	396	46	-70.68	6.80	-63.89	-50.9
5557.20	V	-	-	-73.00	8.47	-64.53	-51.5
7409.60	V	400	59	-59.49	8.30	-51.19	-38.2
9262.00	V	-	-	-68.36	9.91	-58.45	-45.5
11114.40	V	-	-	-66.53	9.30	-57.23	-44.2

Table 7-27. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9262)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 90 of 107

OPERATING FREQUENCY: 1880.00 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	400	54	-70.87	6.87	-64.00	-51.0
5640.00	V	398	321	-71.65	8.55	-63.11	-50.1
7520.00	V	249	33	-60.63	8.47	-52.16	-39.2
9400.00	V	-	-	-68.61	9.82	-58.79	-45.8
11280.00	V	-	-	-68.08	9.16	-58.92	-45.9

Table 7-28. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9400)

OPERATING FREQUENCY: 1907.60 MHz
 MODULATION SIGNAL: WCDMA
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.20	V	398	113	-70.22	7.01	-63.21	-50.2
5722.80	V	-	-	-71.84	8.60	-63.23	-50.2
7630.40	V	111	84	-60.71	8.58	-52.14	-39.1
9538.00	V	-	-	-69.58	9.84	-59.74	-46.7
11445.60	V	-	-	-67.80	9.11	-58.69	-45.7

Table 7-29. Radiated Spurious Data (PCS WCDMA Mode – Ch. 9538)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 91 of 107

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, RSS-132, and RSS-133, the frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency. For Part 24, Part 27, and RSS-139, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 92 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 4.00 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	836,600,000	0	0.0000000
100 %		- 20	836,600,098	98	0.0000117
100 %		- 10	836,600,062	62	0.0000074
100 %		0	836,600,155	155	0.0000185
100 %		+ 10	836,599,650	-350	-0.0000418
100 %		+ 20	836,600,120	120	0.0000143
100 %		+ 30	836,600,284	284	0.0000339
100 %		+ 40	836,599,965	-35	-0.0000042
100 %		+ 50	836,600,059	59	0.0000071
BATT. ENDPOINT	2.90	+ 20	836,599,791	-209	-0.0000250

Table 7-30. Frequency Stability Data (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 93 of 107

Frequency Stability / Temperature Variation

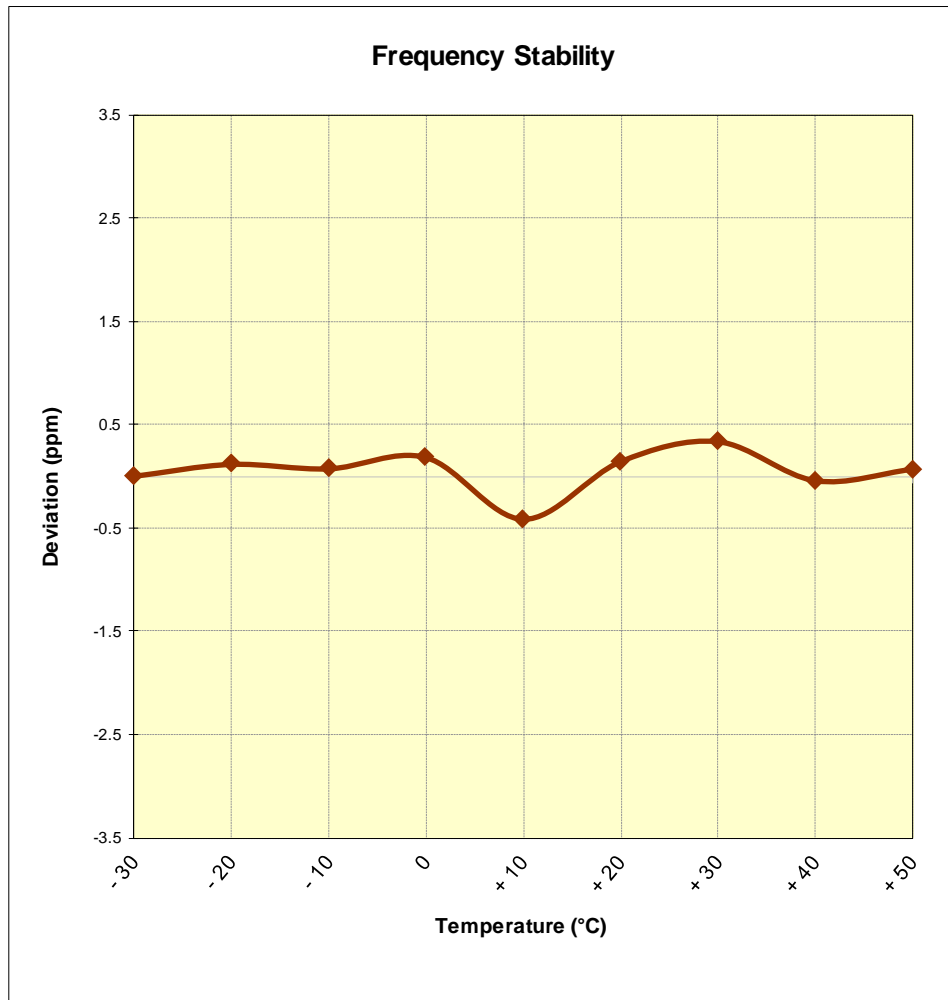


Figure 7-9. Frequency Stability Graph (Cellular GPRS Mode – Ch. 190)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 94 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,520,000 Hz
 CHANNEL: 384
 REFERENCE VOLTAGE: 4.00 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	836,520,032	32	0.0000038
100 %		- 20	836,520,069	69	0.0000082
100 %		- 10	836,520,188	188	0.0000225
100 %		0	836,520,034	34	0.0000041
100 %		+ 10	836,520,321	321	0.0000384
100 %		+ 20	836,519,932	-68	-0.0000081
100 %		+ 30	836,520,139	139	0.0000166
100 %		+ 40	836,519,990	-10	-0.0000012
100 %		+ 50	836,520,208	208	0.0000249
BATT. ENDPOINT	2.90	+ 20	836,520,101	101	0.0000121

Table 7-31. Frequency Stability Data (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 95 of 107

Frequency Stability / Temperature Variation

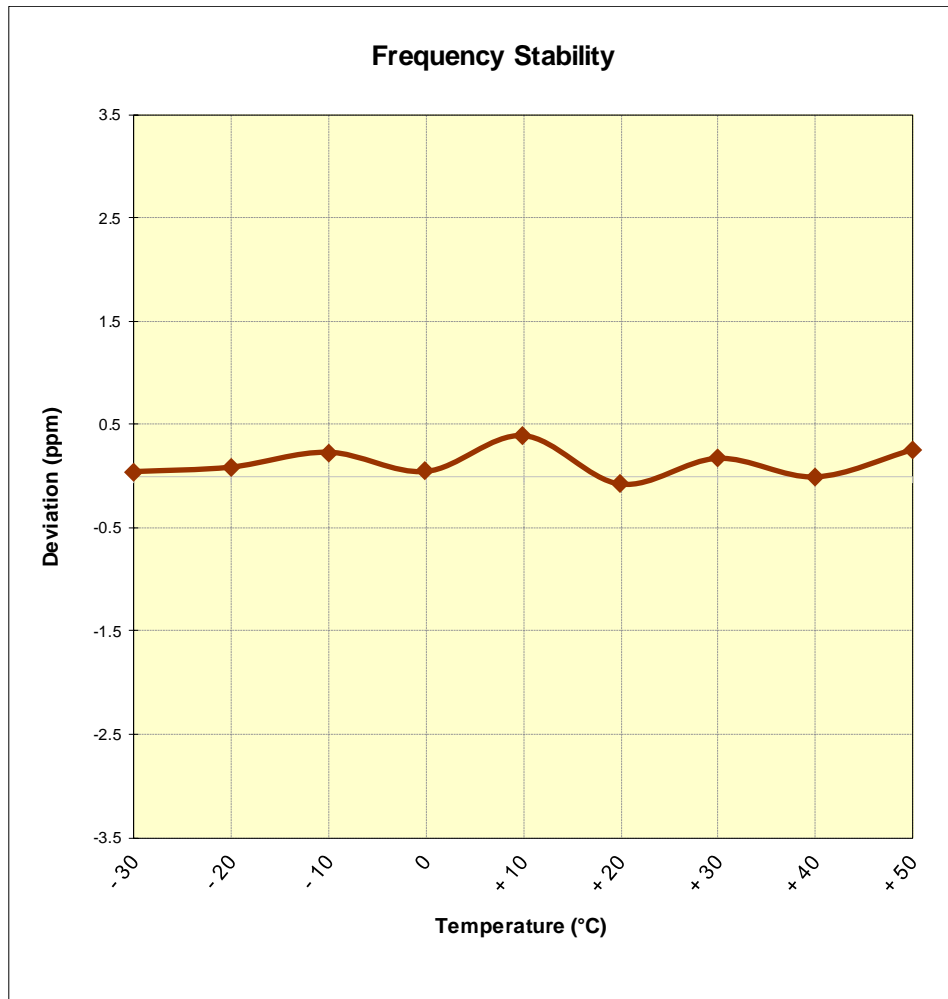


Figure 7-10. Frequency Stability Graph (Cellular CDMA Mode – Ch. 384)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 96 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 836,600,000 Hz

CHANNEL: 4183

REFERENCE VOLTAGE: 4.00 VDC

DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	836,600,135	135	0.0000161
100 %		- 20	836,600,006	6	0.0000007
100 %		- 10	836,600,010	10	0.0000012
100 %		0	836,599,636	-364	-0.0000435
100 %		+ 10	836,599,897	-103	-0.0000123
100 %		+ 20	836,600,313	313	0.0000374
100 %		+ 30	836,600,023	23	0.0000027
100 %		+ 40	836,600,192	192	0.0000230
100 %		+ 50	836,599,981	-19	-0.0000023
BATT. ENDPOINT	2.90	+ 20	836,599,792	-208	-0.0000249

Table 7-32. Frequency Stability Data (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 97 of 107

Frequency Stability / Temperature Variation

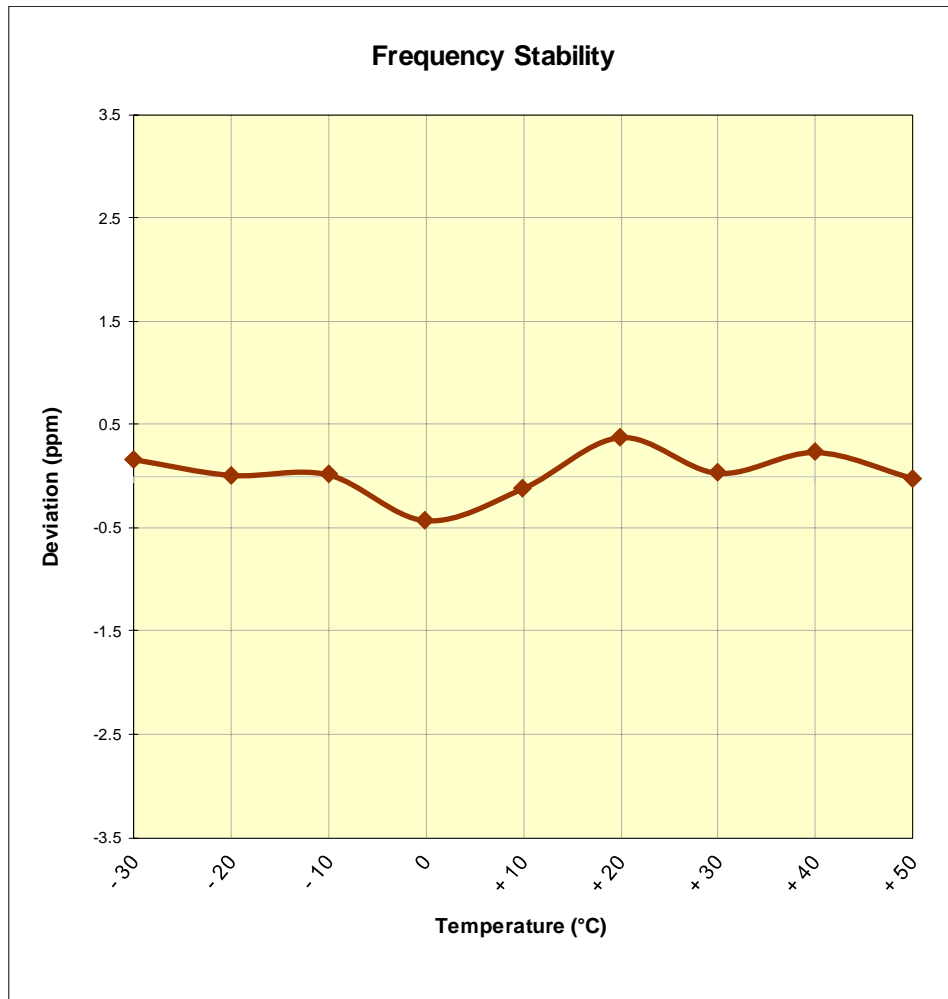


Figure 7-11. Frequency Stability Graph (Cellular WCDMA Mode – Ch. 4183)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 98 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,732,600,000 Hz
 CHANNEL: 1413
 REFERENCE VOLTAGE: 4.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	1,732,600,070	70	0.0000040
100 %		- 20	1,732,599,833	-167	-0.0000096
100 %		- 10	1,732,599,788	-212	-0.0000122
100 %		0	1,732,599,933	-67	-0.0000039
100 %		+ 10	1,732,600,092	92	0.0000053
100 %		+ 20	1,732,599,962	-38	-0.0000022
100 %		+ 30	1,732,599,795	-205	-0.0000118
100 %		+ 40	1,732,600,007	7	0.0000004
100 %		+ 50	1,732,599,917	-83	-0.0000048
BATT. ENDPOINT	2.90	+ 20	1,732,599,729	-271	-0.0000156

Table 7-33. Frequency Stability Data (AWS WCDMA Mode – Ch. 1413)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 99 of 107

Frequency Stability / Temperature Variation

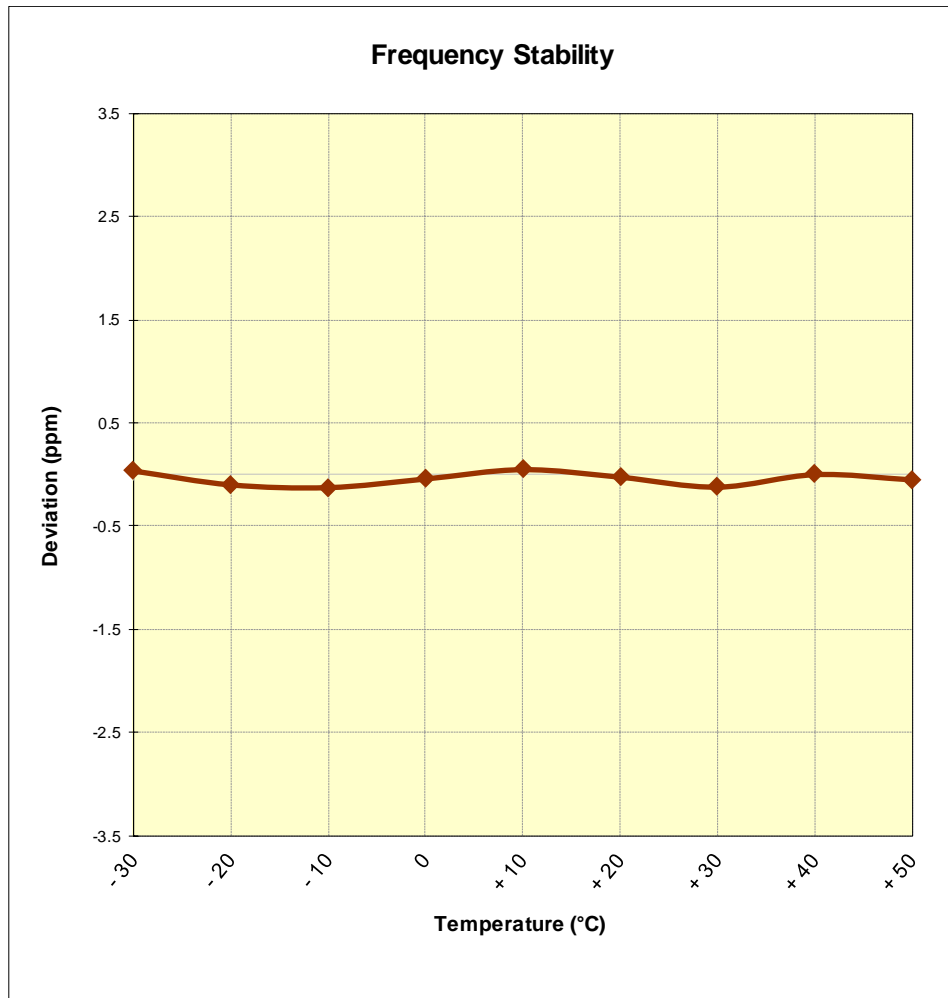


Figure 7-12. Frequency Stability Graph (AWS WCDMA Mode – Ch. 1413)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 100 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 4.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	1,880,000,035	35	0.0000019
100 %		- 20	1,880,000,104	104	0.0000055
100 %		- 10	1,879,999,796	-204	-0.0000109
100 %		0	1,879,999,808	-192	-0.0000102
100 %		+ 10	1,880,000,137	137	0.0000073
100 %		+ 20	1,879,999,683	-317	-0.0000169
100 %		+ 30	1,879,999,960	-40	-0.0000021
100 %		+ 40	1,880,000,022	22	0.0000012
100 %		+ 50	1,879,999,913	-87	-0.0000046
BATT. ENDPOINT	2.90	+ 20	1,880,000,422	422	0.0000224

Table 7-34. Frequency Stability Data (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 101 of 107

Frequency Stability / Temperature Variation

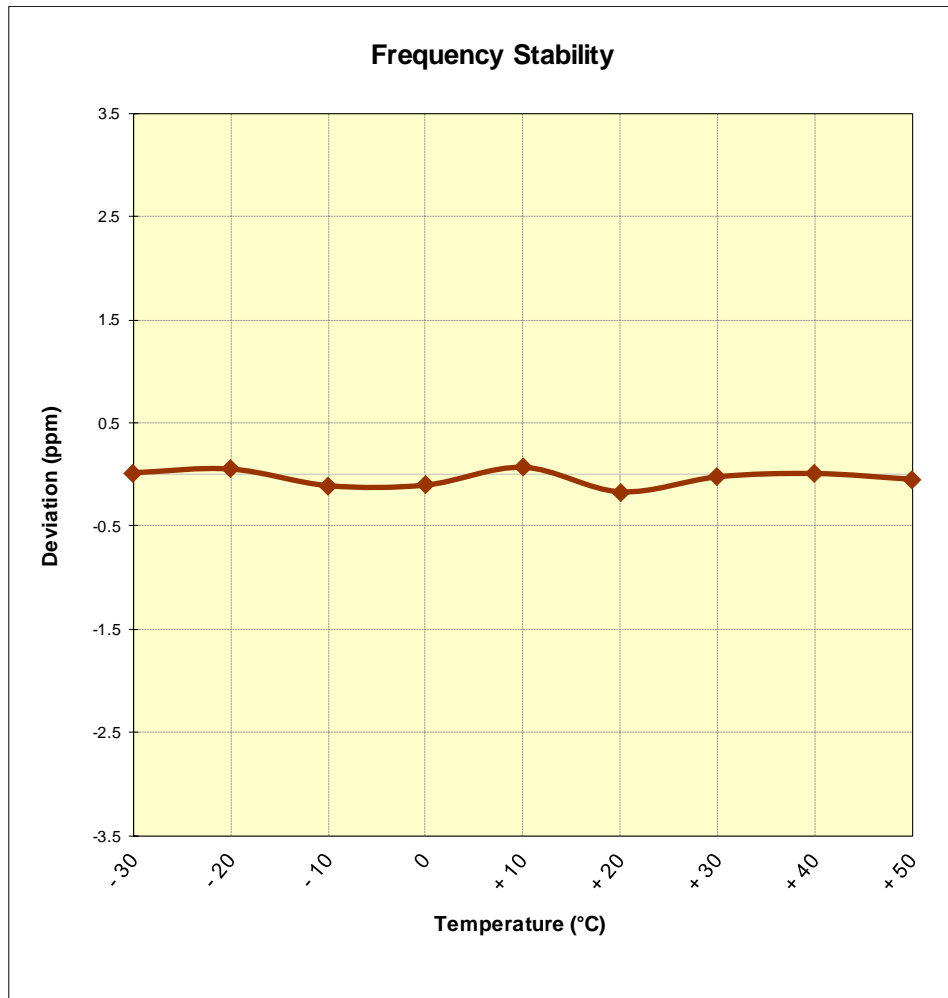


Figure 7-13. Frequency Stability Graph (PCS GPRS Mode – Ch. 661)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 102 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 600

REFERENCE VOLTAGE: 4.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	1,879,999,886	-114	-0.0000061
100 %		- 20	1,880,000,313	313	0.0000166
100 %		- 10	1,879,999,865	-135	-0.0000072
100 %		0	1,880,000,010	10	0.0000005
100 %		+ 10	1,879,999,957	-43	-0.0000023
100 %		+ 20	1,879,999,964	-36	-0.0000019
100 %		+ 30	1,879,999,960	-40	-0.0000021
100 %		+ 40	1,880,000,152	152	0.0000081
100 %		+ 50	1,879,999,608	-392	-0.0000209
BATT. ENDPOINT	2.90	+ 20	1,879,999,928	-72	-0.0000038

Table 7-35. Frequency Stability Data (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 103 of 107

Frequency Stability / Temperature Variation

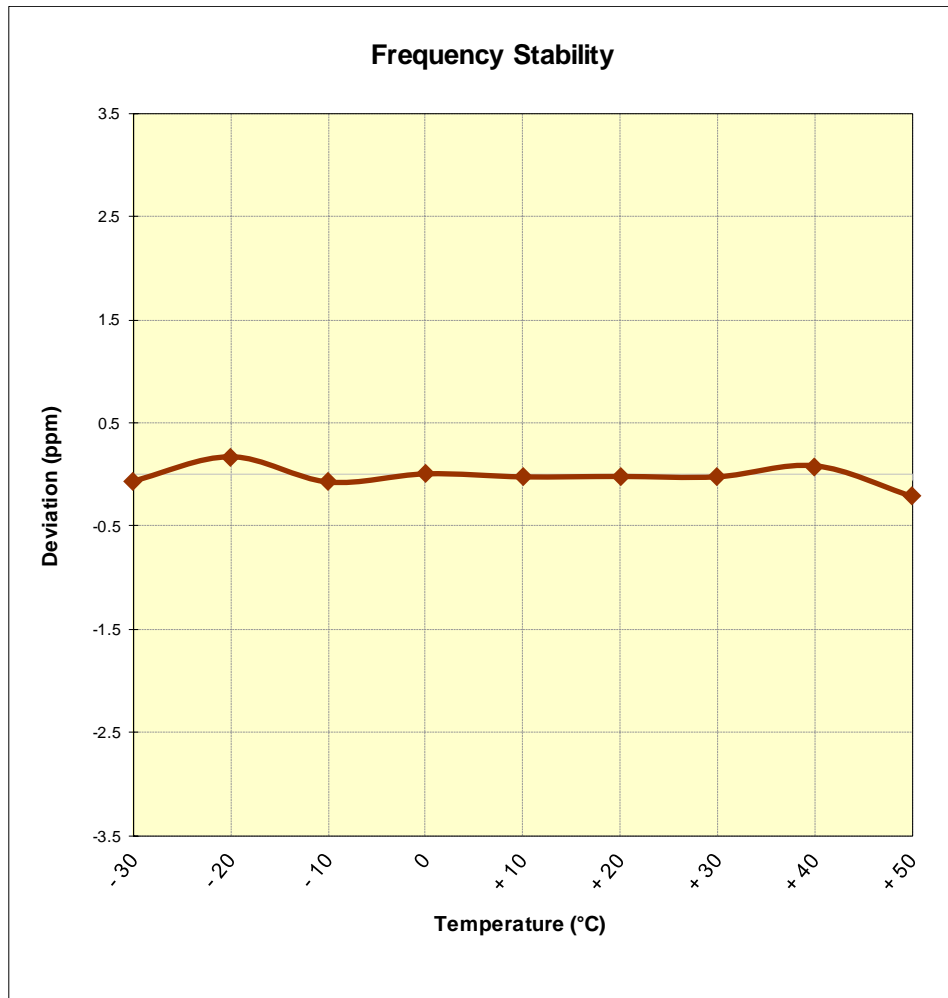


Figure 7-14. Frequency Stability Graph (PCS CDMA Mode – Ch. 600)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 104 of 107

Frequency Stability / Temperature Variation

OPERATING FREQUENCY: 1,880,000,000 Hz

CHANNEL: 9400

REFERENCE VOLTAGE: 4.00 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.00	- 30	1,879,999,927	-73	-0.0000039
100 %		- 20	1,879,999,611	-389	-0.0000207
100 %		- 10	1,879,999,926	-74	-0.0000039
100 %		0	1,880,000,000	0	0.0000000
100 %		+ 10	1,879,999,712	-288	-0.0000153
100 %		+ 20	1,880,000,045	45	0.0000024
100 %		+ 30	1,879,999,618	-382	-0.0000203
100 %		+ 40	1,880,000,139	139	0.0000074
100 %		+ 50	1,879,999,993	-7	-0.0000004
BATT. ENDPOINT	2.90	+ 20	1,880,000,414	414	0.0000220

Table 7-36. Frequency Stability Data (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 105 of 107

Frequency Stability / Temperature Variation

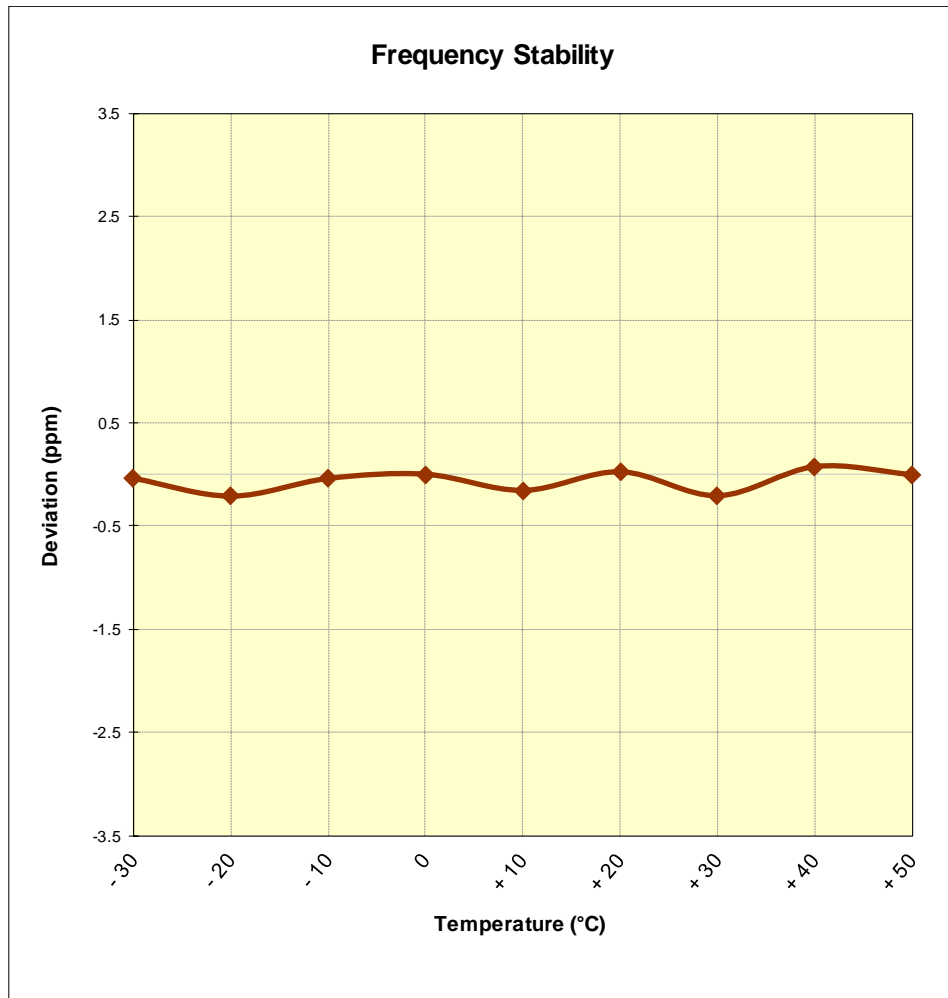


Figure 7-15. Frequency Stability Graph (PCS WCDMA Mode – Ch. 9400)

FCC ID: ZNFQ730VM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 106 of 107

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset** **FCC ID: ZNFQ730VM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules.

FCC ID: ZNFQ730VM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2003310054-10.ZNF	Test Dates: 04/02 - 04/24/2020	EUT Type: Portable Handset		Page 107 of 107