



# FCC RF Test Report


APPLICANT : Elo Touch Solutions, Inc.  
EQUIPMENT : POS  
BRAND NAME :  ELO or  
MODEL NAME : PayPoint  
FCC ID : RBWPAYPOINT  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Mar. 30, 2017 and testing was completed on May 19, 2017. We, SPORTON INTERNATIONAL INC. (KunShan) Mobile Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. (KunShan) Mobile Communications Laboratory, the test report shall not be reproduced except in full.



Prepared by: James Huang / Manager



Approved by: Jones Tsai / Manager

**SPORTON INTERNATIONAL INC. (KunShan) Mobile Communications Laboratory**  
**No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China**





## TABLE OF CONTENTS

<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION.....</b>	<b>5</b>
1.1 Applicant.....	5
1.2 Product Feature of Equipment Under Test.....	5
1.3 Modification of EUT .....	5
1.4 Testing Location .....	6
1.5 Applicable Standards.....	6
<b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>	<b>7</b>
2.1 Carrier Frequency Channel .....	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system .....	9
2.5 EUT Operation Test Setup .....	10
2.6 Measurement Results Explanation Example.....	10
<b>3 TEST RESULT .....</b>	<b>11</b>
3.1 6dB and 99% Bandwidth Measurement .....	11
3.2 Peak Output Power Measurement .....	16
3.3 Power Spectral Density Measurement .....	17
3.4 Conducted Band Edges and Spurious Emission Measurement .....	22
3.5 Radiated Band Edges and Spurious Emission Measurement .....	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements.....	33
<b>4 LIST OF MEASURING EQUIPMENT.....</b>	<b>34</b>
<b>5 UNCERTAINTY OF EVALUATION.....</b>	<b>35</b>
<b>APPENDIX A. CONDUCTED TEST RESULTS</b>	
<b>APPENDIX B. AC CONDUCTED EMISSION TEST RESULT</b>	
<b>APPENDIX C. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS</b>	
<b>APPENDIX E. DUTY CYCLE PLOTS</b>	
<b>APPENDIX F. SETUP PHOTOGRAPHS</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR733048B	Rev. 01	Initial issue of report	Jun. 28, 2017
FR733048B	Rev. 02	Revise TAF code information on page 1.	Jun. 27, 2019
FR733048B	Rev. 03	Revise Laboratory name and mentioning the CO01-SZ as the subcontract lab for conduction.	Jul. 04, 2019

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.88 dB at 55.220 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.16 dB at 10.560 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**Elo Touch Solutions, Inc.**

670 N. McCarthy Blvd., Suite 100, Milpitas, CA95035

## 1.2 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n/ac

Product Specification subjective to this standard	
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC. (ShenZhen) Mobile Communications Laboratory		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan District, Shenzhen City, Guangdong Province, China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	CO01-SZ (TAF Code: 2353)		
<b>Remark</b>	The conduction test item outsourcing to SPORTON INTERNATIONAL INC. (Shenzhen) Mobile Communications Laboratory		

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC. (KunShan) Mobile Communications Laboratory		
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C. TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		<b>FCC Registration No.</b>
	TH01-KS	03CH03-KS	306251

**Note:** The test site complies with ANSI C63.4 2014 requirement.

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
<b>Conducted TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>Radiated TCs</b>	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
<b>AC Conducted Emission</b>	Mode 1: Bluetooth Link + WLAN Link (2.4GHz) + Adapter + Earphone



## 2.3 Connection Diagram of Test System

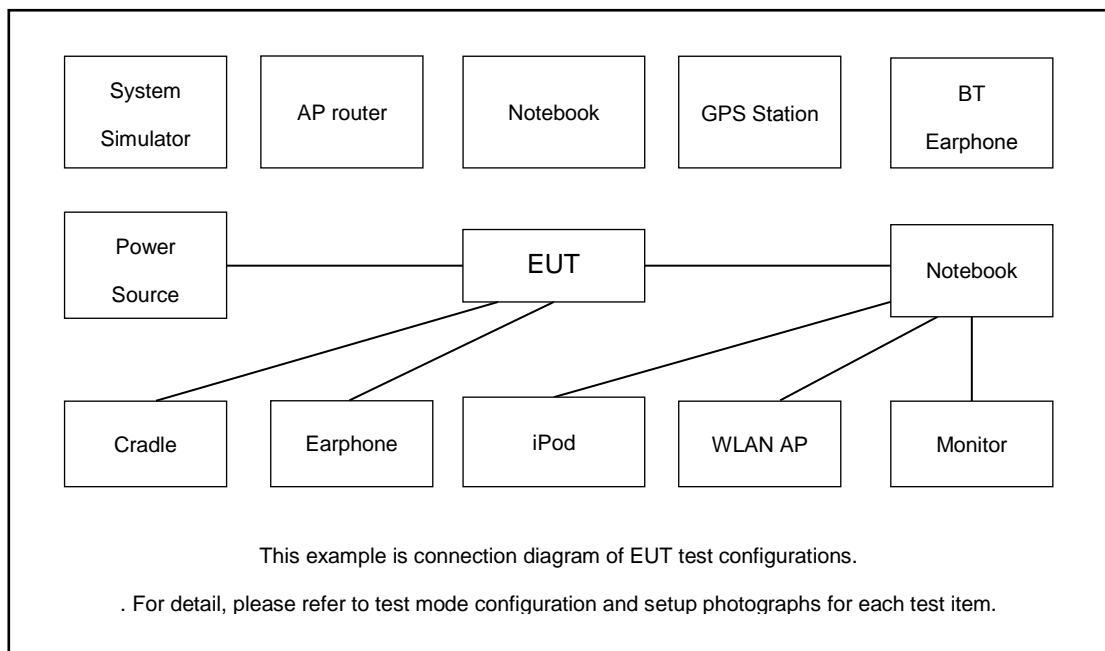

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m
2.	LCD Monitor	Dell	92715Qt	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
3.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
4.	Bluetooth Earphone	Nokia	BH-108	PYAHS-107W	N/A	N/A
5.	iPod	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2 m	N/A
6.	USB flash drive	Kingston	DT101	N/A	N/A	N/A
7.	SD Card	SanDisk	4G class 4	N/A	N/A	N/A



## 2.5 EUT Operation Test Setup

The RF test items, programmed RF utility, "QRCT" installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup






### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

6 dB Bandwidth Plot on Channel 00

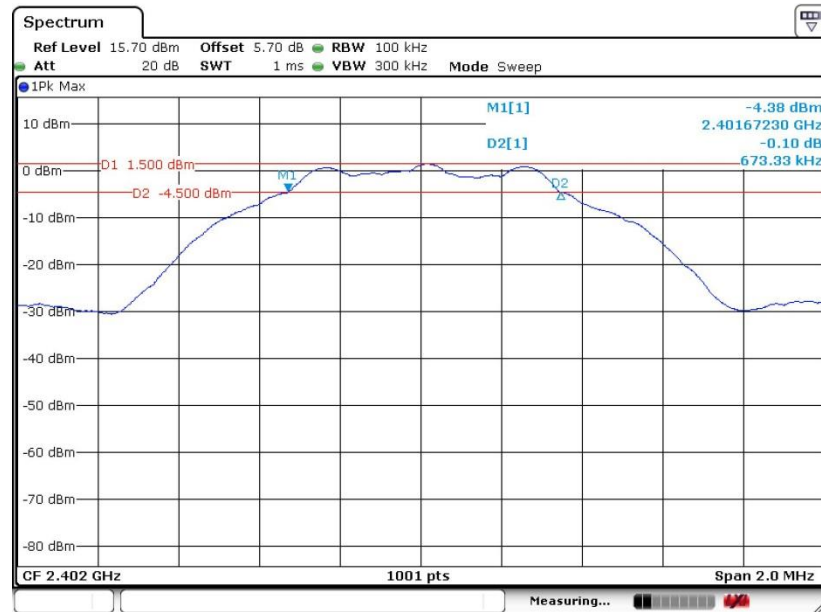

Date: 3.MAY.2017 12:50:04




### 6 dB Bandwidth Plot on Channel 19



Date: 3.MAY.2017 12:54:28

### 6 dB Bandwidth Plot on Channel 39

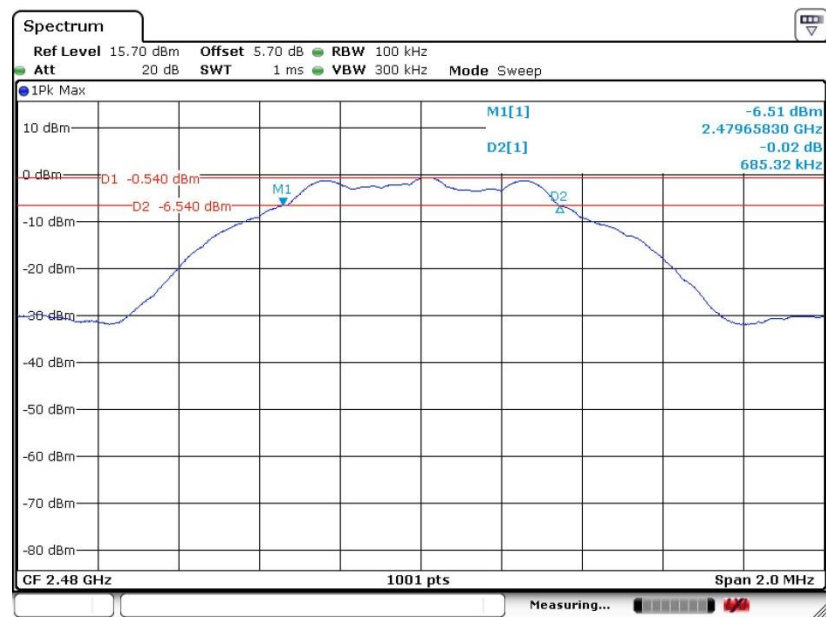


Date: 3.MAY.2017 12:57:19



### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


99% Bandwidth Plot on Channel 00

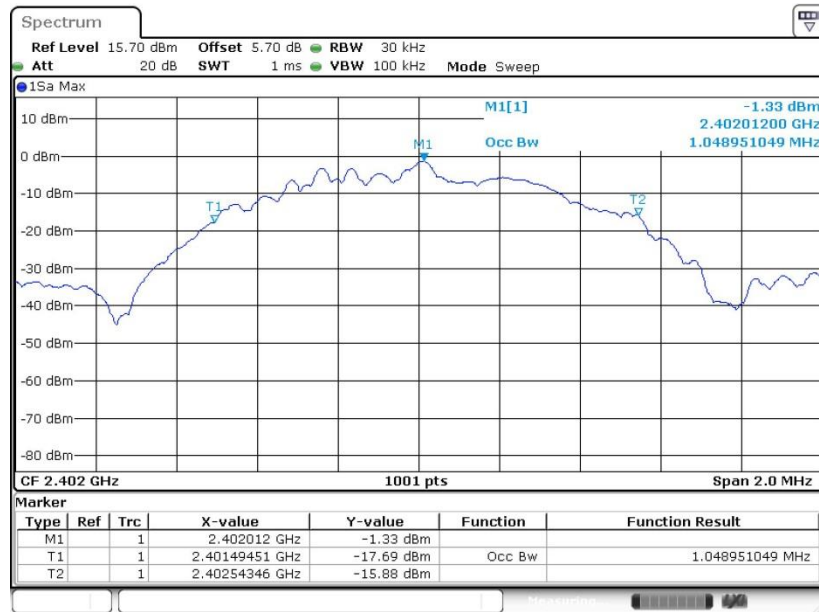

Date: 3.MAY.2017 12:52:03




### 99% Occupied Bandwidth Plot on Channel 19

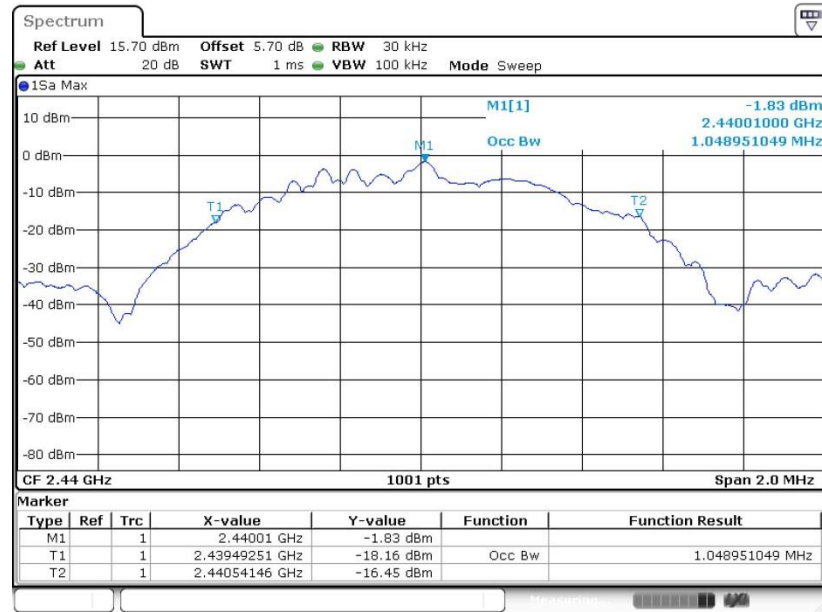

Date: 3.MAY.2017 12:55:56

### 99% Occupied Bandwidth Plot on Channel 39

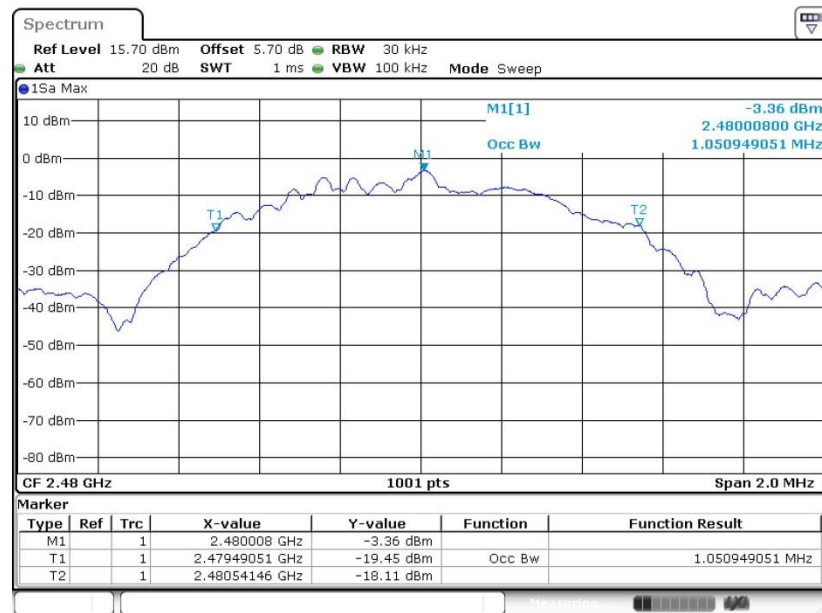

Date: 3.MAY.2017 12:58:08

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

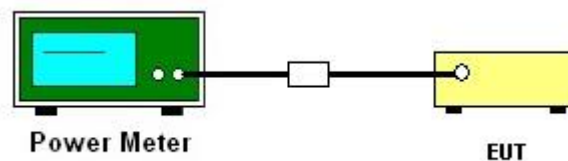

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

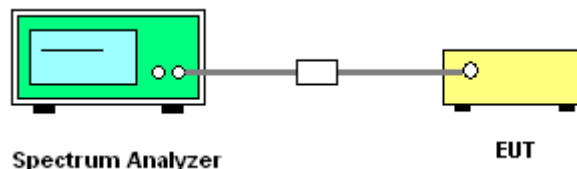




### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 00

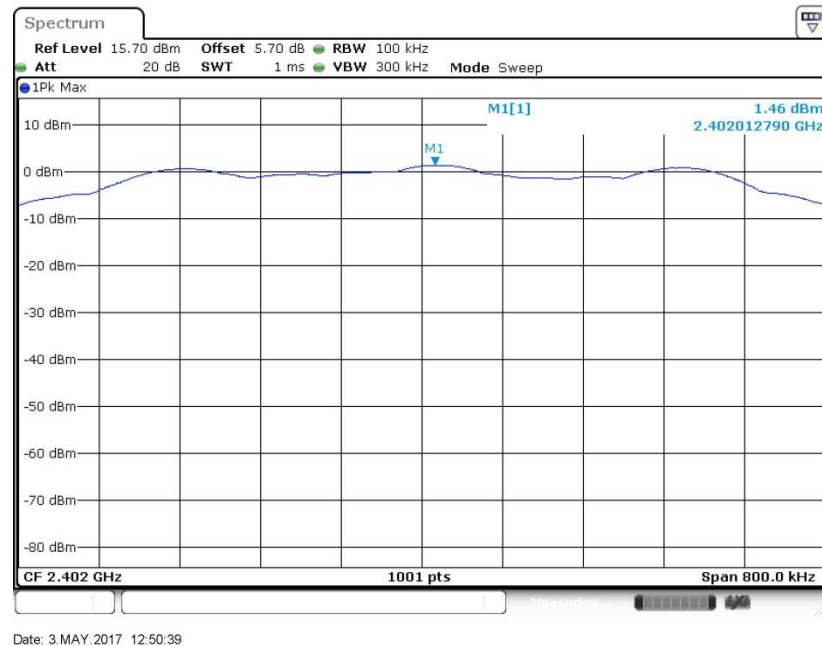




PSD 100kHz Plot on Channel 19

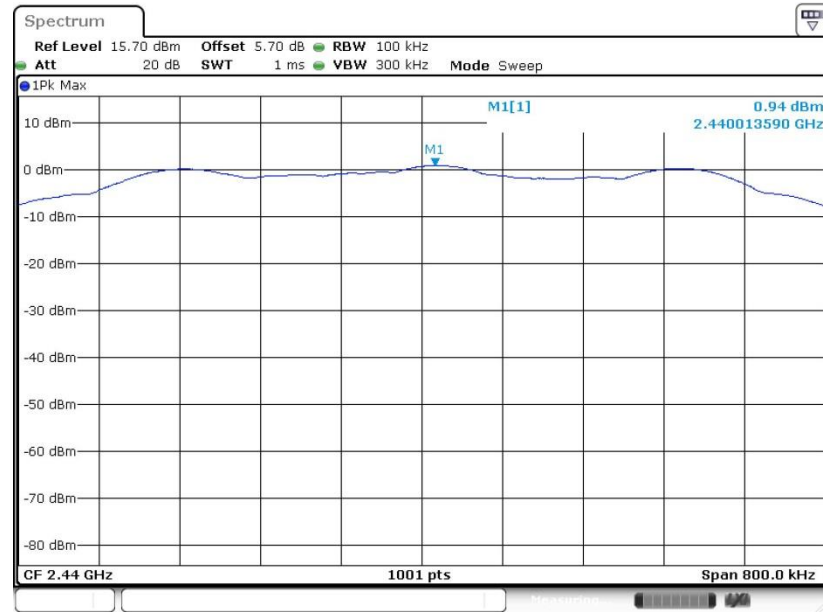

Date: 3.MAY.2017 12:55:05

PSD 100kHz Plot on Channel 39

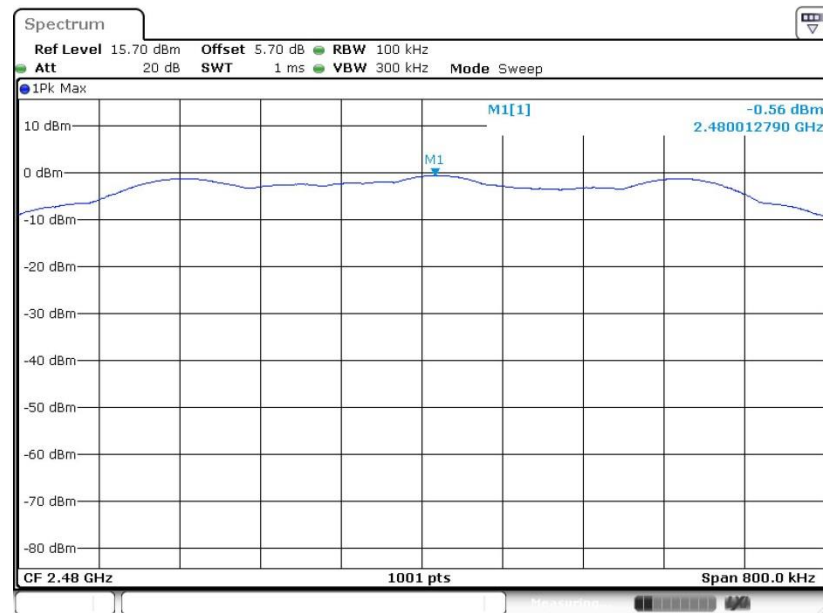


Date: 3.MAY.2017 12:57:54



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 00

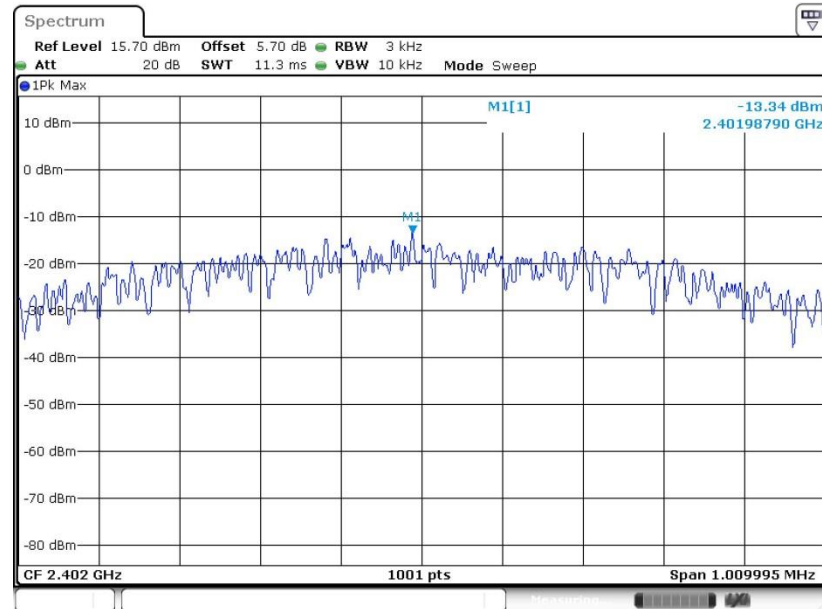

Date: 3.MAY.2017 12:50:23




PSD 3kHz Plot on Channel 19

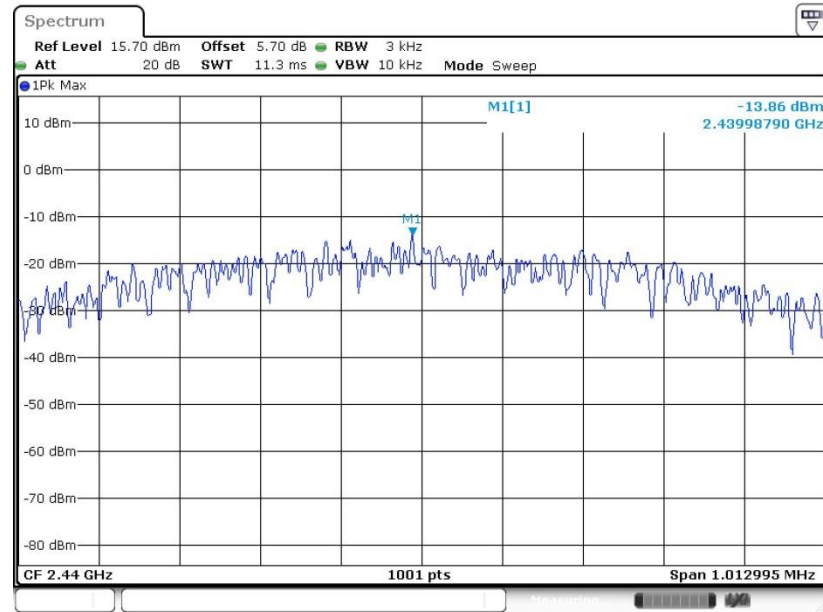

Date: 3.MAY.2017 12:54:47

PSD 3kHz Plot on Channel 39

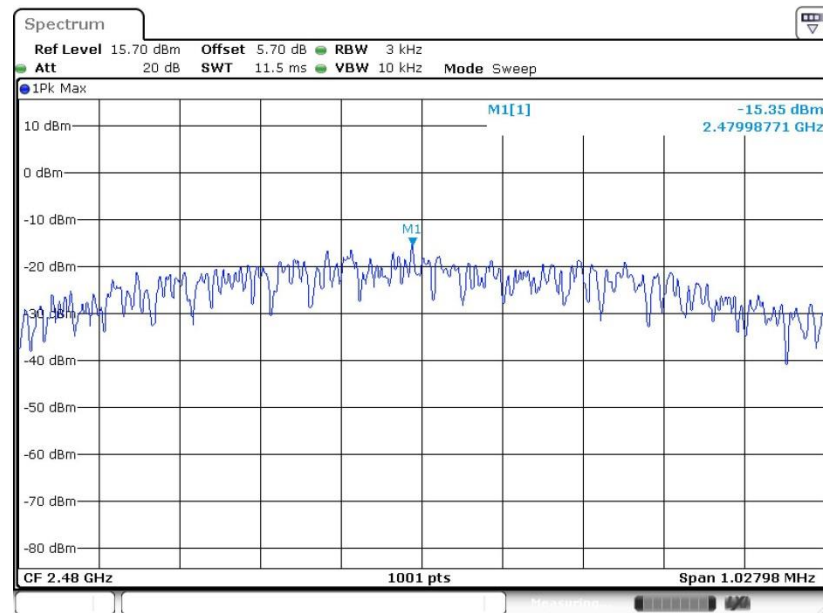

Date: 3.MAY.2017 12:57:38

## **3.4 Conducted Band Edges and Spurious Emission Measurement**

### **3.4.1 Limit of Conducted Band Edges and Spurious Emission**

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### **3.4.2 Measuring Instruments**

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### **3.4.3 Test Procedure**

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### **3.4.4 Test Setup**

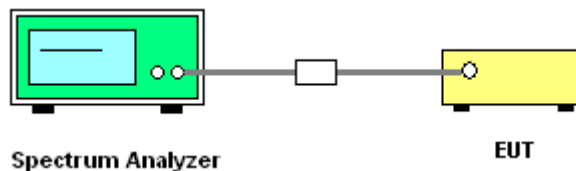




### 3.4.5 Test Result of Conducted Band Edges Plots

Low Band Edge Plot on Channel 00

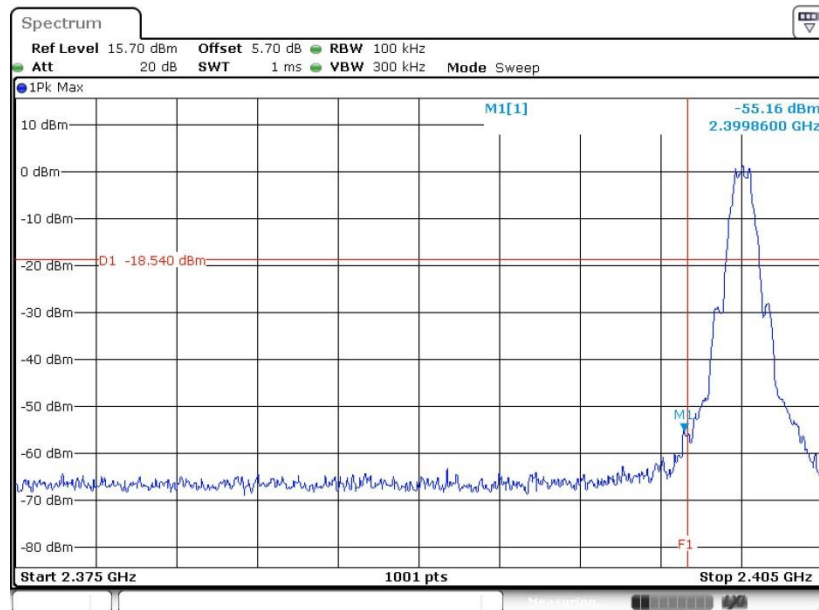

Date: 3.MAY.2017 12:51:22


High Band Edge Plot on Channel 39

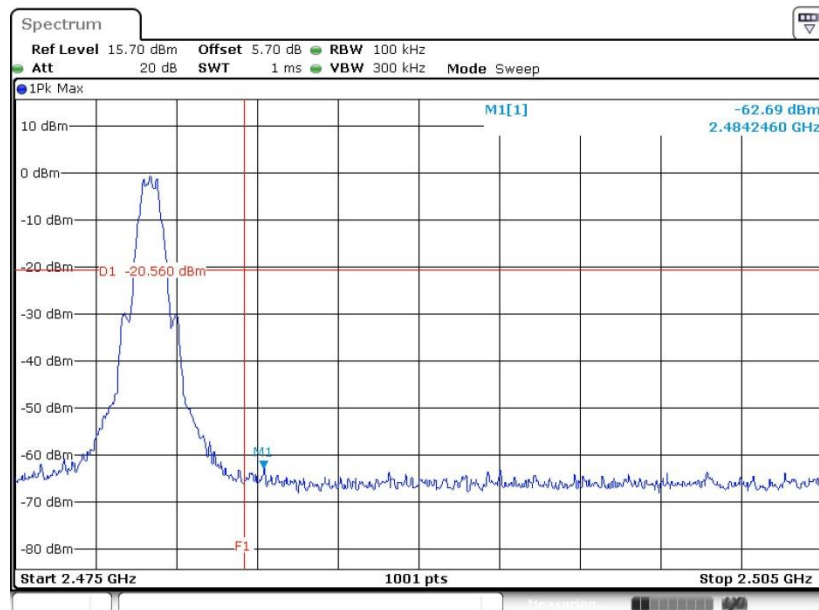

Date: 3.MAY.2017 12:58:01


### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

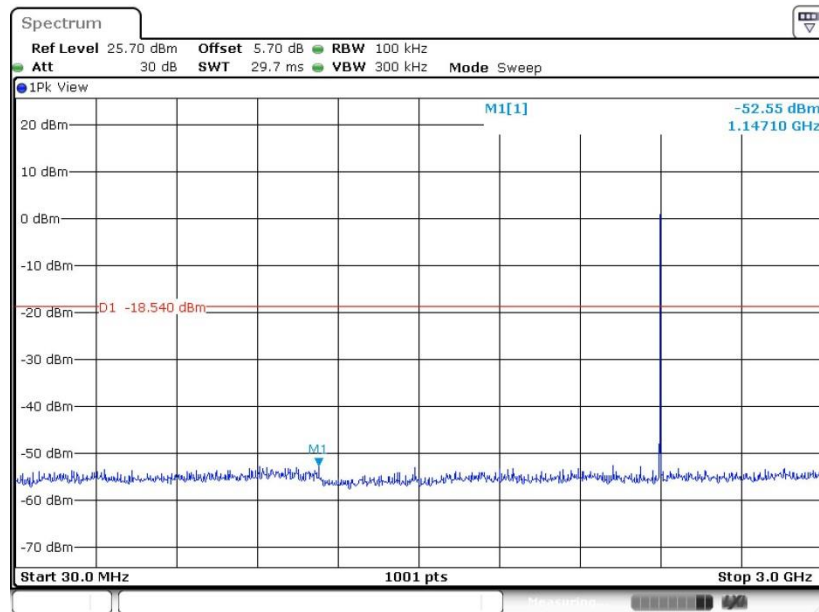

Date: 3.MAY.2017 12:51:33


#### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 00

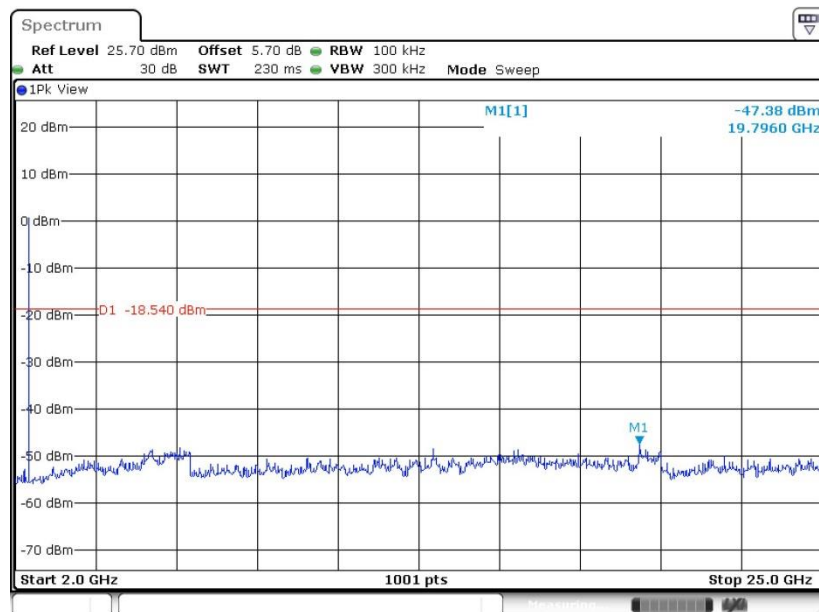

Date: 3.MAY.2017 12:51:42




### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

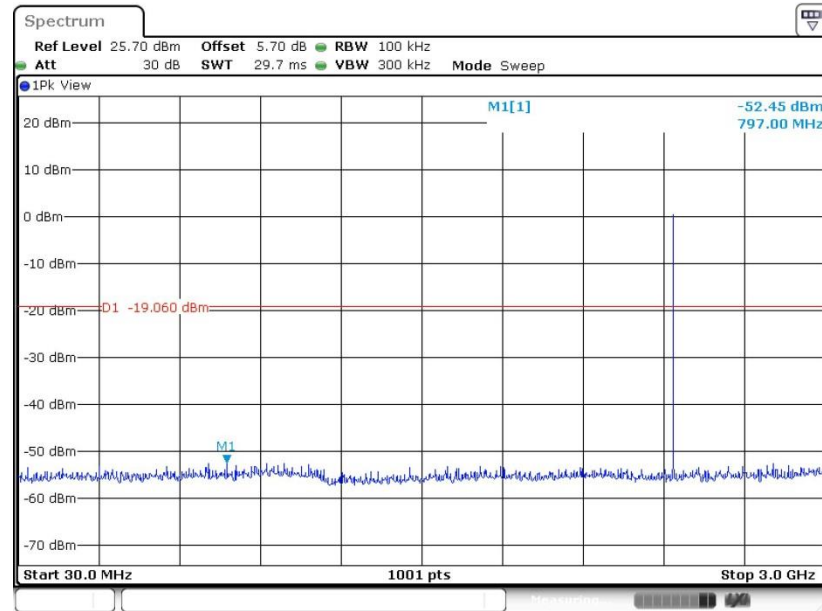


Date: 3.MAY.2017 12:55:38

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 19

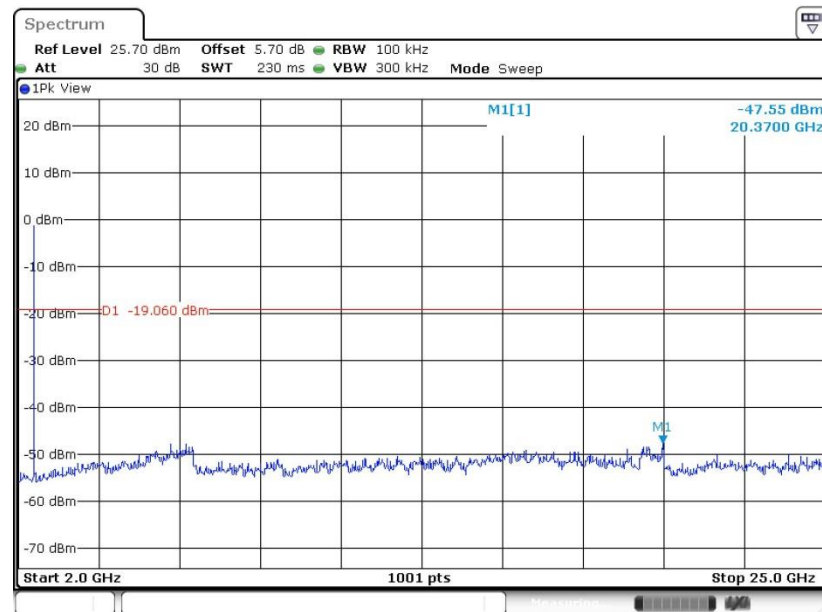


Date: 3.MAY.2017 12:55:46

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

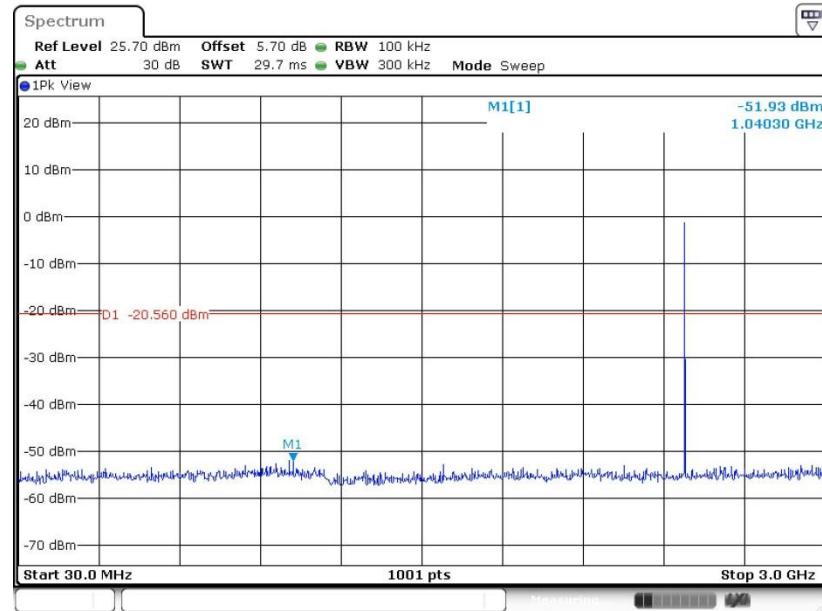

Date: 3.MAY.2017 13:00:09

### Conducted Spurious Emission Plot on Bluetooth LE 1Mbps GFSK Channel 39

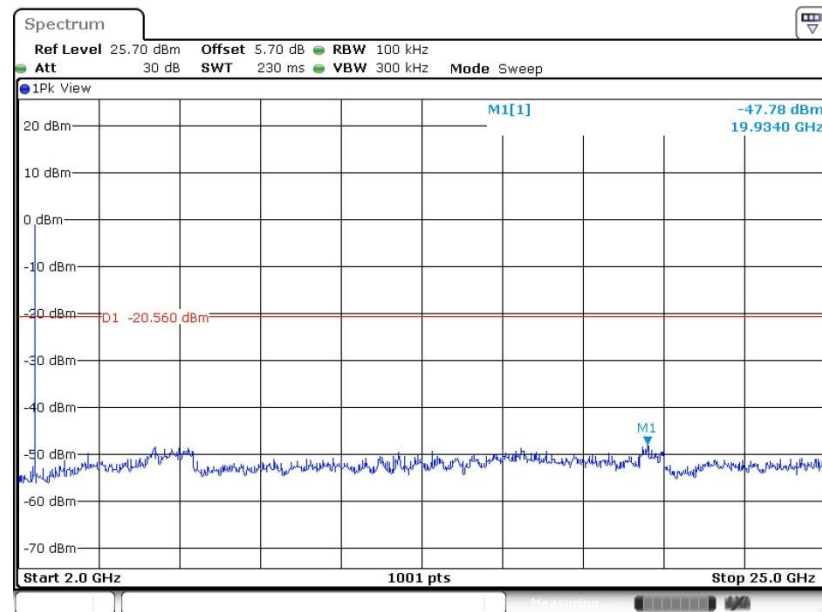

Date: 3.MAY.2017 13:00:17

## 3.5 Radiated Band Edges and Spurious Emission Measurement

### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.



### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.

For average measurement:

    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup

For radiated emissions below 30MHz

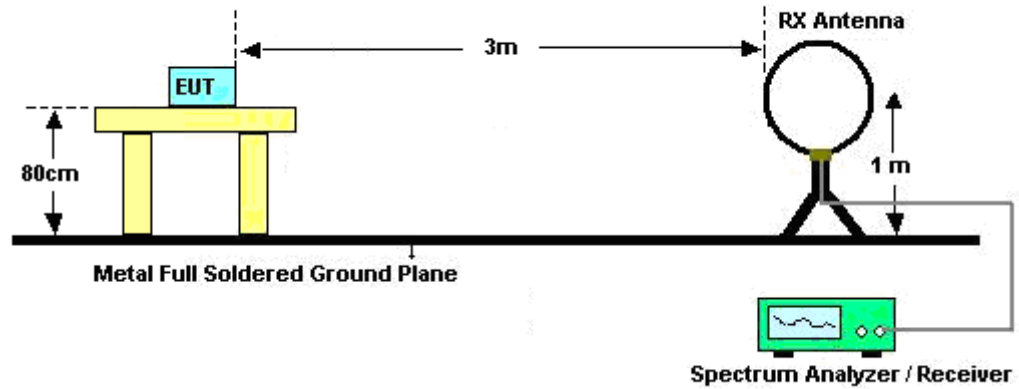

For radiated emissions from 30MHz to 1GHz



For radiated emissions above 1GHz



### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

### 3.5.7 Duty Cycle

Please refer to Appendix E.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.

### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

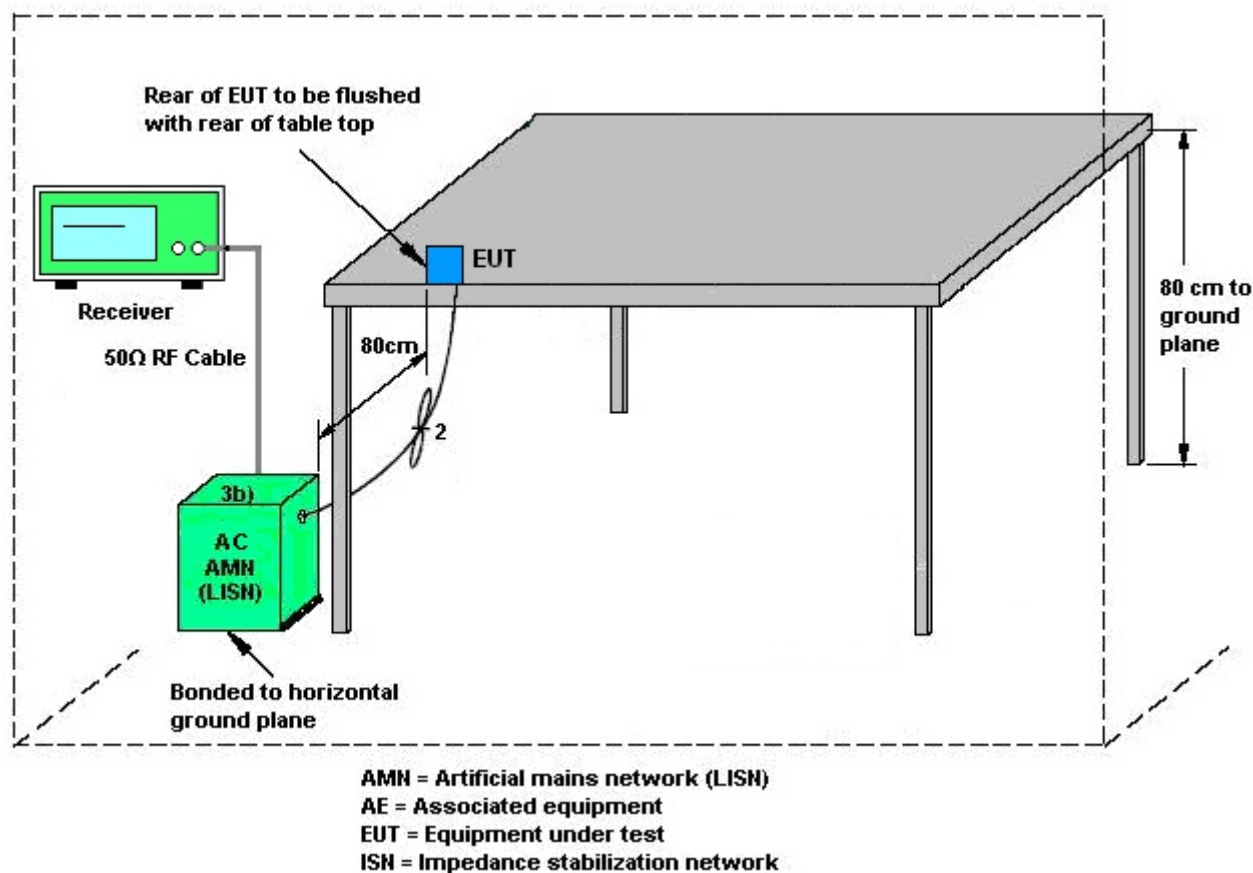

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.





## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct.13, 2016	May 03, 2017	Oct.13, 2017	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	May 03, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 19, 2017	May 03, 2017	Jan. 19, 2018	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 19, 2017	May 03, 2017	Jan. 19, 2018	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	May 19, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	May 19, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	May 19, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 16, 2016	May 19, 2017	Jul. 15, 2017	Conduction (CO01-SZ)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct..22.2016	May 09, 2017 ~ May 10, 2017	Oct. 21, 2017	Radiation (03CH03-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 18, 2017	May 09, 2017 ~ May 10, 2017	Apr.17, 2018	Radiation (03CH03-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	May 09, 2017 ~ May 10, 2017	Nov.22, 2017	Radiation (03CH03-KS)
Bilog Antenna	TeseQ	CBL6112D	35406	25MHz~2GHz	Apr. 22, 2017	May 09, 2017 ~ May 10, 2017	Apr 21, 2018	Radiation (03CH03-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1356	1GHz~18GHz	Apr. 22, 2017	May 09, 2017 ~ May 10, 2017	Apr 21, 2018	Radiation (03CH03-KS)
SHF-EHF Horn	com-power	AH-840	101070	18GHz ~40GHz	Oct. 19, 2016	May 09, 2017 ~ May 10, 2017	Oct. 18, 2017	Radiation (03CH03-KS)
Amplifier	com-power	PA-103A	161069	1MHz ~1000MHz / 32 dB	Apr 18, 2017	May 09, 2017 ~ May 10, 2017	Apr 17, 2018	Radiation (03CH03-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Oct. 13, 2016	May 09, 2017 ~ May 10, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
Amplifier	Agilent	8449B	3008A02370	1GHz~26.5GHz	Oct. 13, 2016	May 09, 2017 ~ May 10, 2017	Oct. 12, 2017	Radiation (03CH03-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 09, 2017 ~ May 10, 2017	NCR	Radiation (03CH03-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 09, 2017 ~ May 10, 2017	NCR	Radiation (03CH03-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 09, 2017 ~ May 10, 2017	NCR	Radiation (03CH03-KS)

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.5
---	-----

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6
---	-----

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5
---	-----

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5
---	-----



## **Appendix A. Conducted Test Results**

**Bluetooth Low Energy**

Test Engineer:	Hirem Shen	Temperature:	21~25	°C
Test Date:	2017/5/3	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.05	0.67	0.50	Pass
BLE	1Mbps	1	19	2440	1.05	0.68	0.50	Pass
BLE	1Mbps	1	39	2480	1.05	0.69	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.42	30.00	2.68	4.10	36.00	Pass
BLE	1Mbps	1	19	2440	1.29	30.00	2.68	3.97	36.00	Pass
BLE	1Mbps	1	39	2480	0.04	30.00	2.68	2.72	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.05	1.24
BLE	1Mbps	1	19	2440	2.05	1.12
BLE	1Mbps	1	39	2480	2.05	-0.07


**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.46	-13.34	2.68	8.00	Pass
BLE	1Mbps	1	19	2440	0.94	-13.86	2.68	8.00	Pass
BLE	1Mbps	1	39	2480	-0.56	-15.35	2.68	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




## Appendix B. AC Conducted Emission Test Results

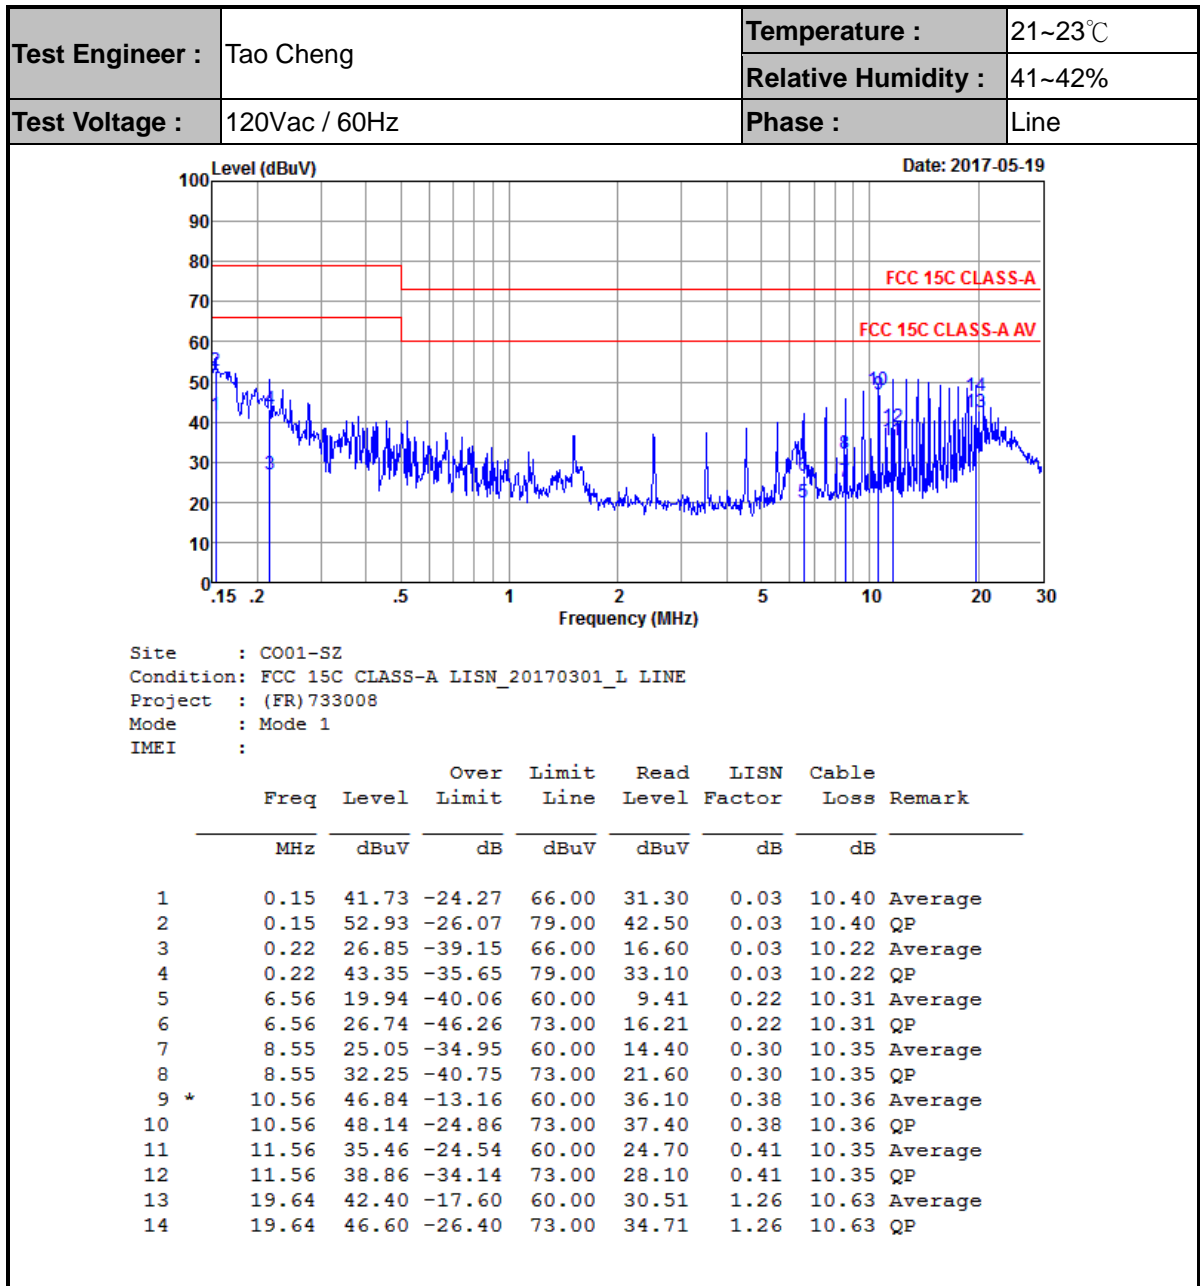



<b>Test Engineer :</b>	Tao Cheng	<b>Temperature :</b>	21~23°C
		<b>Relative Humidity :</b>	41~42%
<b>Test Voltage :</b>	120Vac / 60Hz	<b>Phase :</b>	Neutral

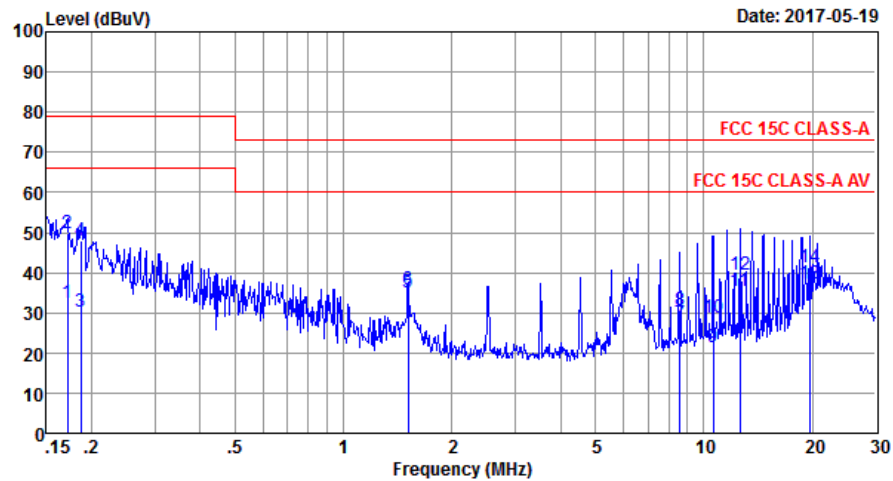

Site : C001-SZ  
Condition: FCC 15C CLASS-A LISN\_20170301\_N NEUTRAL  
Project : (FR)733008  
Mode : Mode 1  
IMEI :

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	32.65	-33.35	66.00	22.30	0.03	10.32	Average
2	0.17	49.65	-29.35	79.00	39.30	0.03	10.32	QP
3	0.19	30.30	-35.70	66.00	20.00	0.03	10.27	Average
4	0.19	47.80	-31.20	79.00	37.50	0.03	10.27	QP
5	1.51	34.91	-25.09	60.00	24.70	0.05	10.16	Average
6	1.51	35.91	-37.09	73.00	25.70	0.05	10.16	QP
7	8.59	27.37	-32.63	60.00	16.90	0.12	10.35	Average
8	8.59	30.47	-42.53	73.00	20.00	0.12	10.35	QP
9	10.62	21.35	-38.65	60.00	10.81	0.18	10.36	Average
10	10.62	28.65	-44.35	73.00	18.11	0.18	10.36	QP
11	12.58	35.49	-24.51	60.00	24.89	0.26	10.34	Average
12	12.58	39.49	-33.51	73.00	28.89	0.26	10.34	QP
13 *	19.64	37.10	-22.90	60.00	25.90	0.57	10.63	Average
14	19.64	41.30	-31.70	73.00	30.10	0.57	10.63	QP



## Appendix C. Radiated Spurious Emission

Test Engineer :	Rich Sun	Temperature :	21~22°C
		Relative Humidity :	41~42%

### 2.4GHz 2400~2483.5MHz

#### BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2347.96	49.76	-24.24	74	55.01	25.89	5.41	36.55	307	9	P	H
		2386.18	40.03	-13.97	54	44.68	26.3	5.47	36.42	307	9	A	H
	*	2402	96.38	-	-	101.03	26.3	5.47	36.42	307	9	P	H
	*	2402	95.77	-	-	100.42	26.3	5.47	36.42	307	9	A	H
													H
													H
		2386.44	49.41	-24.59	74	54.06	26.3	5.47	36.42	325	257	P	V
		2382.15	40.24	-13.76	54	45.09	26.16	5.45	36.46	325	257	A	V
	*	2402	94.84	-	-	99.49	26.3	5.47	36.42	325	257	P	V
	*	2402	94.28	-	-	98.93	26.3	5.47	36.42	325	257	A	V
													V
													V
BLE CH 19 2440MHz		2372.14	49.57	-24.43	74	54.42	26.16	5.45	36.46	328	10	P	H
		2387.09	39.98	-14.02	54	44.63	26.3	5.47	36.42	328	10	A	H
	*	2440	95.99	-	-	100.78	26.17	5.49	36.45	328	10	P	H
	*	2440	95.47	-	-	100.26	26.17	5.49	36.45	328	10	A	H
		2483.92	50.14	-23.86	74	55.01	26.09	5.51	36.47	328	10	P	H
		2487.04	39.94	-14.06	54	44.81	26.09	5.51	36.47	328	10	A	H
		2379.29	49.81	-24.19	74	54.66	26.16	5.45	36.46	289	257	P	V
		2381.24	40.2	-13.8	54	45.05	26.16	5.45	36.46	289	257	A	V
	*	2440	94.25	-	-	99.04	26.17	5.49	36.45	289	257	P	V
	*	2440	93.71	-	-	98.5	26.17	5.49	36.45	289	257	A	V
		2497.54	49.55	-24.45	74	54.47	26.04	5.52	36.48	289	257	P	V
		2494.84	39.84	-14.16	54	44.76	26.04	5.52	36.48	289	257	A	V





<b>BLE CH 39 2480MHz</b>	*	2480	95.69	-	-	100.56	26.09	5.51	36.47	330	355	P	H
	*	2480	95.08	-	-	99.95	26.09	5.51	36.47	330	355	A	H
		2492.02	50.94	-23.06	74	55.86	26.04	5.52	36.48	330	355	P	H
		2483.51	41.72	-12.28	54	46.59	26.09	5.51	36.47	330	355	A	H
													H
													H
	*	2480	92.86	-	-	97.73	26.09	5.51	36.47	304	251	P	V
	*	2480	92.24	-	-	97.11	26.09	5.51	36.47	304	251	A	V
		2485.6	49.24	-24.76	74	54.11	26.09	5.51	36.47	304	251	P	V
		2483.51	40.76	-13.24	54	45.63	26.09	5.51	36.47	304	251	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



## 2.4GHz 2400~2483.5MHz

## BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4806	43.03	-30.97	74	41.06	30.76	7.71	36.5	300	360	P	H
													H
													H
													H
		4806	43.4	-30.6	74	41.43	30.76	7.71	36.5	300	0	P	V
													V
													V
													V
BLE CH 19 2440MHz		4880	42.55	-31.45	74	40.35	30.97	7.76	36.53	300	360	P	H
		7320	47.42	-26.58	74	38.81	35.08	9.78	36.25	300	360	P	H
													H
													H
		4878	42.3	-31.7	74	40.1	30.97	7.76	36.53	300	0	P	V
		7320	47.83	-26.17	74	39.22	35.08	9.78	36.25	300	0	P	V
													V
													V
BLE CH 39 2480MHz		4962	42.63	-31.37	74	40.14	31.24	7.82	36.57	300	360	P	H
		7440	46.32	-27.68	74	37.3	35.44	9.87	36.29	300	360	P	H
													H
													H
		4960	42.01	-31.99	74	39.52	31.24	7.82	36.57	300	0	P	V
		7440	47.8	-26.2	74	38.78	35.44	9.87	36.29	300	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

## Emission below 1GHz

## 2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	(dBμV)	( dB/m )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
2.4GHz  BLE  LF		34.85	35.35	-4.65	40	40.58	25.5	0.62	31.35	-	-	P	H
		157.07	39.27	-4.23	43.5	51.77	17.61	1.43	31.54	100	20	P	H
		311.3	38.19	-7.81	46	48.08	19.54	1.9	31.33	-	-	P	H
		367.56	38.85	-7.15	46	46.14	21.96	1.98	31.23	-	-	P	H
		609.09	37.54	-8.46	46	41.62	24.71	2.83	31.62	-	-	P	H
		724.52	37.28	-8.72	46	38.24	26.94	3.16	31.06	-	-	P	H
													H
													H
													H
													H
													H
													H
		55.22	36.12	-3.88	40	51.33	14.9	1.29	31.4	100	101	P	V
		110.51	37.56	-5.94	43.5	48.8	18.68	1.54	31.46	-	-	P	V
		155.13	38.72	-4.78	43.5	51.15	17.69	1.43	31.55	-	-	P	V
		219.15	34.64	-11.36	46	48.11	16.3	1.7	31.47	-	-	P	V
		367.56	37.4	-8.6	46	44.69	21.96	1.98	31.23	-	-	P	V
		475.23	39.25	-6.75	46	43.67	24.38	2.45	31.25	-	-	P	V
													V
													V
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>

**A calculation example for radiated spurious emission is shown as below:**

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Rich Sun	Temperature :	21~22°C
		Relative Humidity :	41~42%

### Note symbol

-L	Low channel location
-R	High channel location



## 2.4GHz 2400~2483.5MHz

## BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Fundamental
Peak	<p>Site Condition : 83CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SMT:Auto</p>	<p>Site Condition : 83CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SMT:Auto</p>
Avg.	<p>Site Condition : 83CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.0000Hz VBW:3.0000Hz SMT:Auto</p>	<p>Site Condition : 83CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.0000Hz VBW:3.0000Hz SMT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH00 2402MHz	
1	Vertical	Fundamental
Peak	<p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>	<p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>
Avg	<p>Site : 03CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>	<p>Site : 03CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Horizontal	Fundamental
Peak	<p>Site : 83CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto</p>	<p>Site : 83CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto</p>
Avg.	<p>Site : 83CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	<p>Site : 83CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>

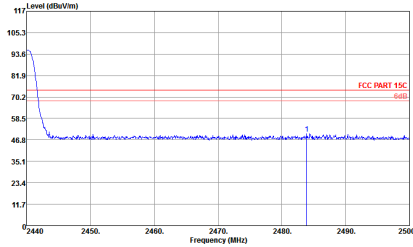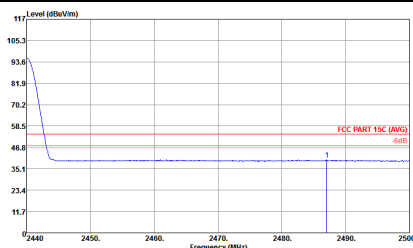

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	Left blank
Avg.	 <p>Site Condition : 03CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - L	
1	Vertical	Fundamental
Peak	<p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	<p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>
Avg.	<p>Site : 03CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	<p>Site : 03CH03-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH19 2440MHz - R	
1	Vertical	Fundamental
Peak	<p>Site Condition : 03CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : Rbw:1000.000KHz Vbw:3.000KHz SWT:Auto</p>	Left blank
Avg.	<p>Site Condition : 03CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : Rbw:1000.000KHz Vbw:3.000KHz SWT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Fundamental
Peak	<p>Horizontal Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2440 to 2500 MHz. The plot shows a peak at 2480 MHz. The FCC PART 15C limit is indicated at 81.9 dBuV/m.</p> <p>Site Condition : 83CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto</p>	<p>Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. The plot shows a peak at 2480 MHz. The FCC PART 15C limit is indicated at 81.9 dBuV/m.</p> <p>Site Condition : 83CH03-KS : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SMT:Auto</p>
Avg.	<p>Horizontal Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 2440 to 2500 MHz. The plot shows a peak at 2480 MHz. The FCC PART 15C (AVG) limit is indicated at 81.9 dBuV/m.</p> <p>Site Condition : 83CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>	<p>Fundamental Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. The plot shows a peak at 2480 MHz. The FCC PART 15C (AVG) limit is indicated at 81.9 dBuV/m.</p> <p>Site Condition : 83CH03-KS : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz SMT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
ANT	BLE CH39 2480MHz	
1	Vertical	Fundamental
Peak	<p>Site : 83CH83-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p>	<p>Site : 83CH83-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto</p>
Avg.	<p>Site : 83CH83-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>	<p>Site : 83CH83-KS Condition : FCC PART 15C (AVG) 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.000kHz VBW:3.000kHz SMT:Auto</p>



2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

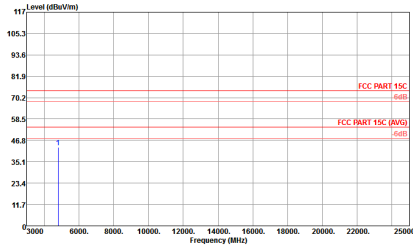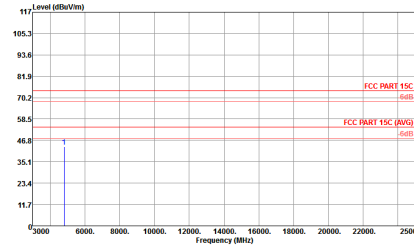BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH00 2402MHz	
1	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 HORIZONTAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>	 <p>Site : 03CH03-KS Condition : FCC PART 15C 3m HF ANT-20160416-9120 VERTICAL : RBW:1000.0000Hz VBW:3000.0000Hz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH19 2440MHz	
1	Horizontal	Vertical
Peak Avg.	<p>Site Condition : 83CHB3-KS : FCC PART 15C 3m HF ANT-2016M416-9120 HORIZONTAL : RSSI:1000-4000Hz VSW:3000-4000Hz SWT:Auto</p>	<p>Site Condition : 83CHB3-KS : FCC PART 15C 3m HF ANT-2016M416-9120 VERTICAL : RSSI:1000-4000Hz VSW:3000-4000Hz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
ANT	BLE CH39 2480MHz	
1	Horizontal	Vertical
Peak	<p>Site : 83CHB3-KS Condition : FCC PART 15C 3m HF ANT-2016M416-9120 HORIZONTAL FSW:1000.0000MHz VSW:3000.0000Hz SFT:Auto</p>	<p>Site : 83CHB3-KS Condition : FCC PART 15C 3m HF ANT-2016M416-9120 VERTICAL FSW:1000.0000MHz VSW:3000.0000Hz SFT:Auto</p>



Emission below 1GHz


2.4GHz BLE (LF)

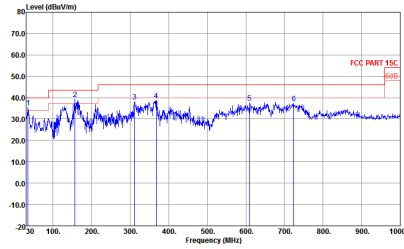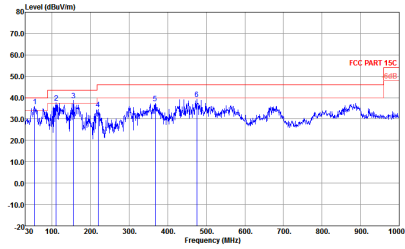BLE	2.4GHz 2400~2483.5MHz	
ANT	BLE LF	
1	Horizontal	Vertical
QP / Peak	 <p>Site : 83CH03-KS Condition : FCC PART 15C 3m LF ANT 60B HORIZONTAL : RES:100.000000Hz VSW:100.000000 SUT:Auto</p>	 <p>Site : 83CH03-KS Condition : FCC PART 15C 3m LF ANT 60B VERTICAL : RES:100.000000Hz VSW:100.000000 SUT:Auto</p>

## Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth -LE	62.41	0.39	2.57	3KHz

### Bluetooth - LE

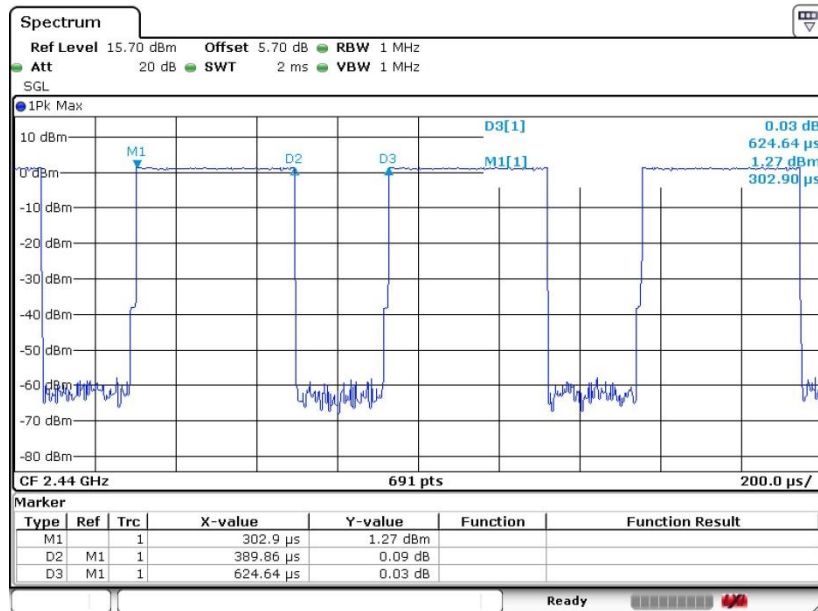


Date: 27.APR.2017 00:33:34

## Appendix F. Setup Photographs

### <Conducted Emission>

Remote View

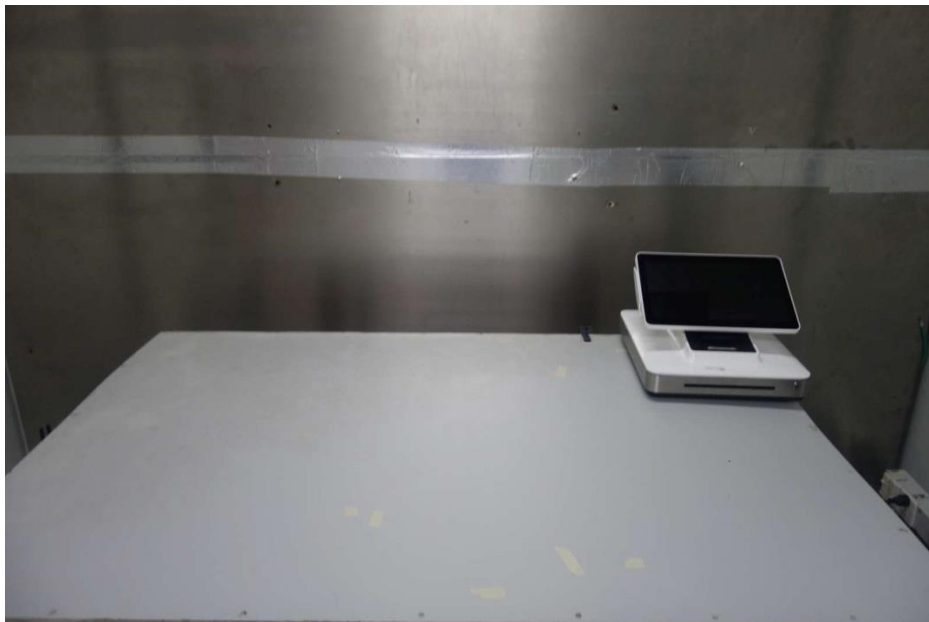




Rear View



## &lt;Radiated Emission&gt;

LF

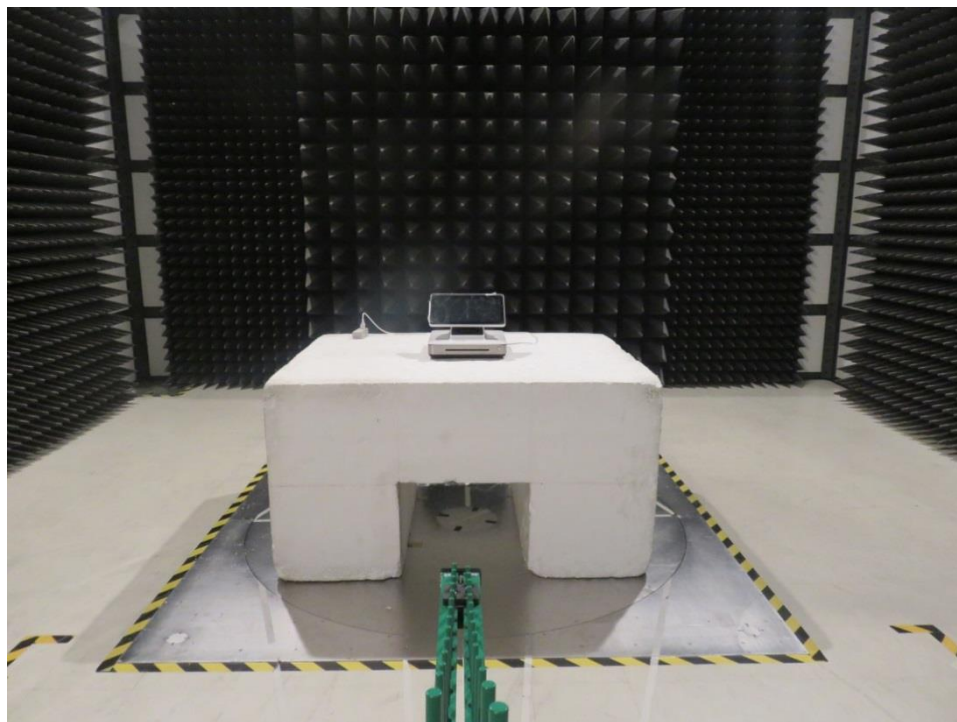

HF

