



**FCC CFR47 PART 15 SUBPART C  
CERTIFICATION**

**REVISED TEST REPORT**

**FOR**

**2.4GHZ TRUE MIMO PC CARD**

**MODEL NUMBER: AGN1023PC**

**FCC ID: SA3-AGN1023PC0200**

**REPORT NUMBER: 04U2913-1**

**ISSUE DATE: Oct. 01, 2004**

*Prepared for*  
**AIRGO NETWORKS INC.  
900 ARASTRADERO ROAD  
PALO ALTO, CA 94304, USA**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD,  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**



## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>3</b>
<b>2. EUT DESCRIPTION.....</b>	<b>4</b>
<b>3. TEST METHODOLOGY .....</b>	<b>5</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>5. CALIBRATION AND UNCERTAINTY.....</b>	<b>6</b>
5.1. MEASURING INSTRUMENT CALIBRATION.....	6
5.2. MEASUREMENT UNCERTAINTY.....	6
5.3. TEST AND MEASUREMENT EQUIPMENT.....	7
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
<b>7. APPLICABLE LIMITS AND TEST RESULTS .....</b>	<b>10</b>
7.1. 6 dB BANDWIDTH.....	10
7.2. PEAK OUTPUT POWER.....	17
7.3. AVERAGE POWER.....	26
7.4. PEAK POWER SPECTRAL DENSITY .....	27
7.5. CONDUCTED SPURIOUS EMISSIONS.....	34
7.6. RADIATED EMISSIONS.....	47
7.6.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	47
7.6.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ .....	50
7.7. POWERLINE CONDUCTED EMISSIONS .....	72
<b>8. SETUP PHOTOS .....</b>	<b>76</b>

## 1. TEST RESULT CERTIFICATION

**COMPANY NAME:** AIRGO NETWORKS INC  
900 ARASTRADERO ROAD  
PALO ALTO, CA 94304 U.S.A.

**EUT DESCRIPTION:** 2.4GHz True MIMO PC Card

**MODEL:** AGN1023PC

**S/N:** 0124

**DATE TESTED:** JULY 10 – OCTOBER 1, 2004

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:



MICHAEL HECKROTTE  
EMC MANAGER  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



YAN ZHENG  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. EUT DESCRIPTION

The EUT is an 802.11b/g MIMO CardBus employs two transceiver chains and third receiver.

The transmitter has a maximum conducted combined peak output power as follows:

Frequency Band (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	24.45	278.61
2412 - 2462	802.11g	29.20	831.76

The radio utilizes two transceiver antennas and one receiver antnena, each with a maximum gain of 2 dBi.

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/2001, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.



No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Peak Power Meter	Agilent	E4416A	GB41291160	11/7/2004
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/7/2004
EMI Test Receiver	R & S	ESIB40	100192	11/21/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29301	12/26/2004
Preamplifier, 1 ~ 26 GHz	Miteq	NSP10023988	646456	6/10/2005
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2004
RF Filter Section	HP	85420E	3705A00256	11/21/2004
30MHz---- 2GHz	Sunol Sciences	JB1 Antenna	A121003	12/22/2004
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	38324
Spectrum Analyzer	Agilent	E4446A	MY43360112	1/13/2005
EMI Test Receiver	R & S	ESHS 20	827129/006	7/17/2005
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	10/13/2004
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/13/2004
AC Power Source, 10KVA	ACS	AFC-10K-AFC-2	J1568	CNR
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
PreAmplifier 26-40 GHz	MITEQ	NSP4000-SP2	924343	38139

## 6. SETUP OF EQUIPMENT UNDER TEST

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Sony	PCG-5312	28315730 3303321	AK8JPN-35452-M5-E

### I/O CABLES


I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115	UNSHIELDED	2m	NO
2	DC	1	DC	UNSHIELDED	2m	NO

### TEST SETUP

The EUT is installed in a host laptop computer via a cardbus extender adapter during the tests. Test software exercised the radio card.



**SETUP DIAGRAM FOR TESTS**

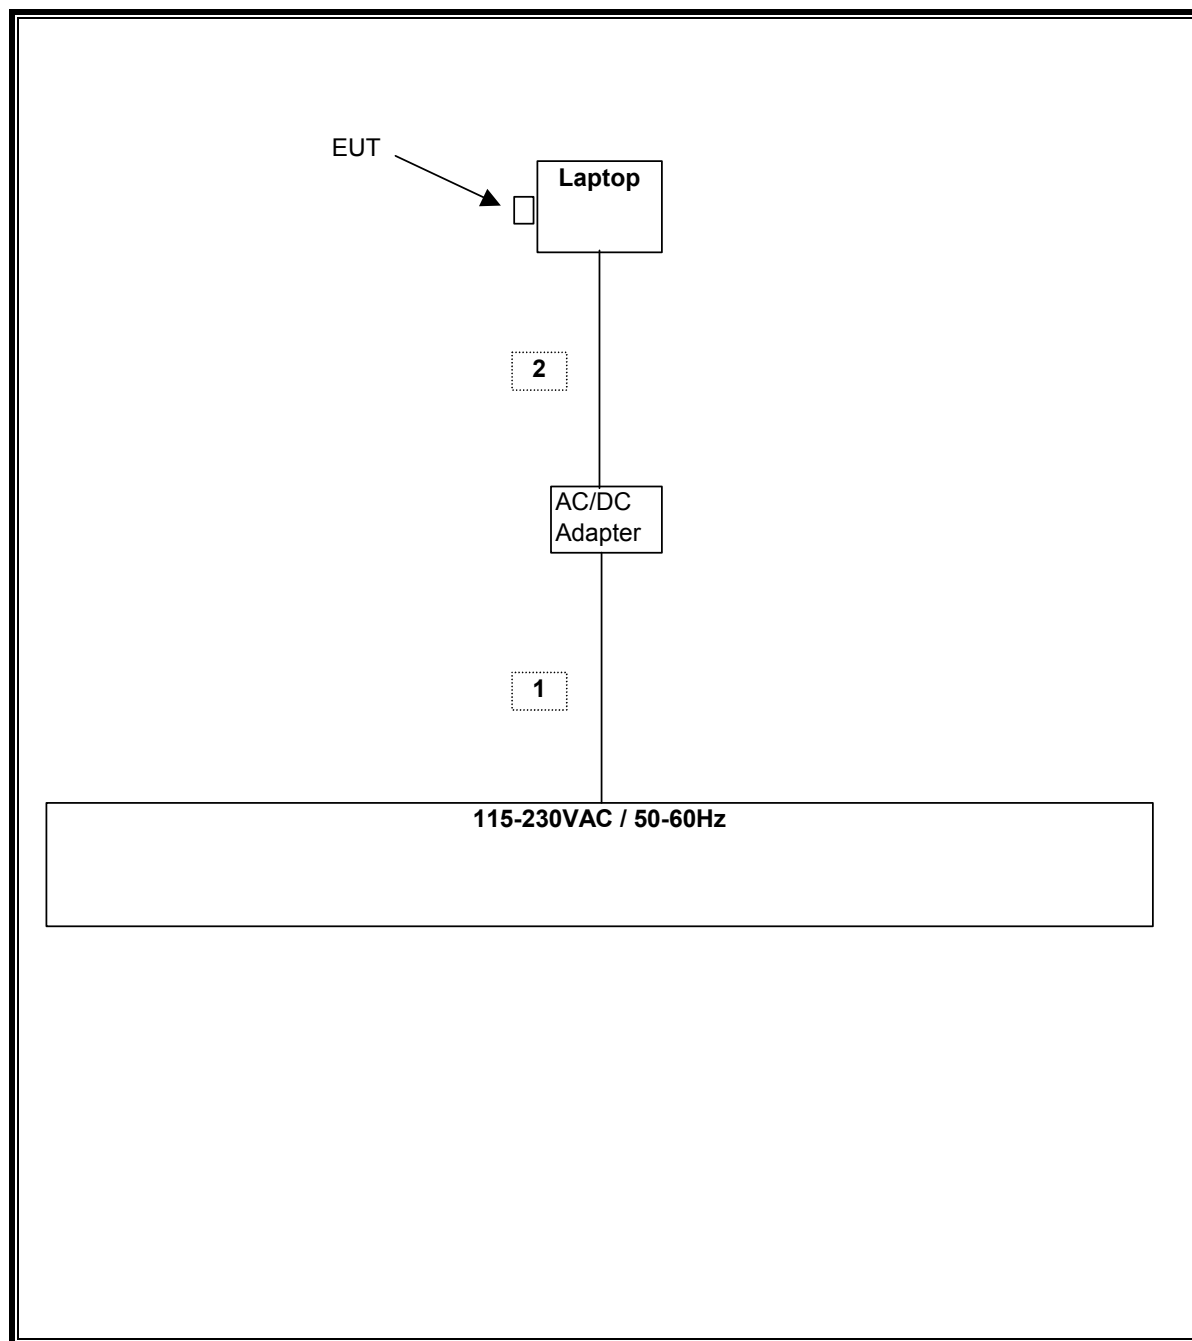

## 7. APPLICABLE LIMITS AND TEST RESULTS

### 7.1. 6 dB BANDWIDTH

#### LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

#### RESULTS

No non-compliance noted:


802.11b Mode / 1Mbps/ Both TX chains via Combiner


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10420	500	9920
Middle	2437	10080	500	9580
High	2462	10420	500	9920


802.11g Mode/ 6 Mbps / Both TX chains via Combiner

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16420	500	15920
Middle	2437	16420	500	15920
High	2462	16500	500	16000


**6 DB BANDWIDTH (802.11b MODE)**

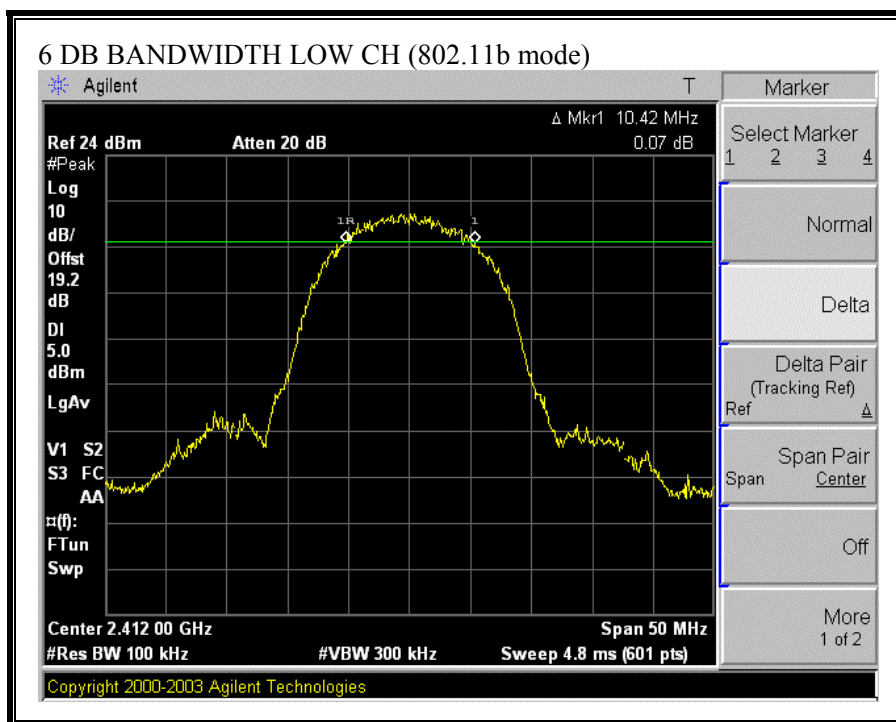


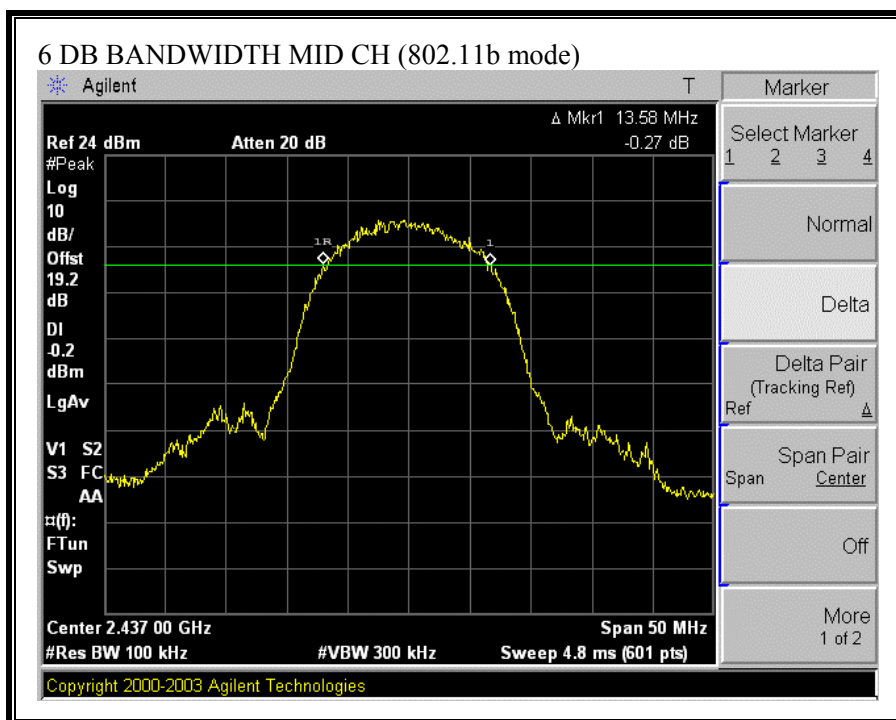


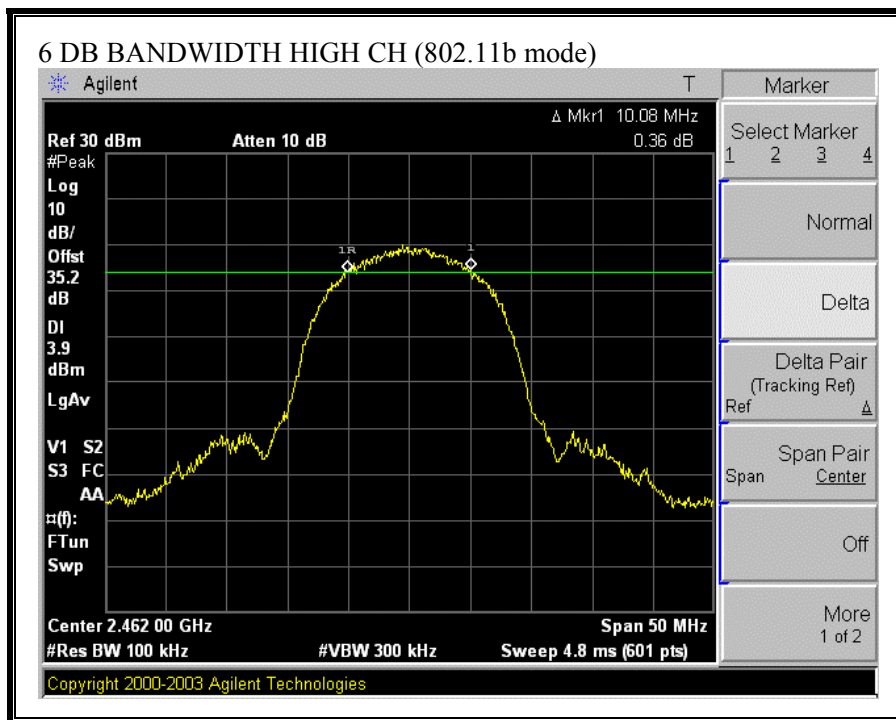

**6 DB BANDWIDTH (802.11g MODE)**

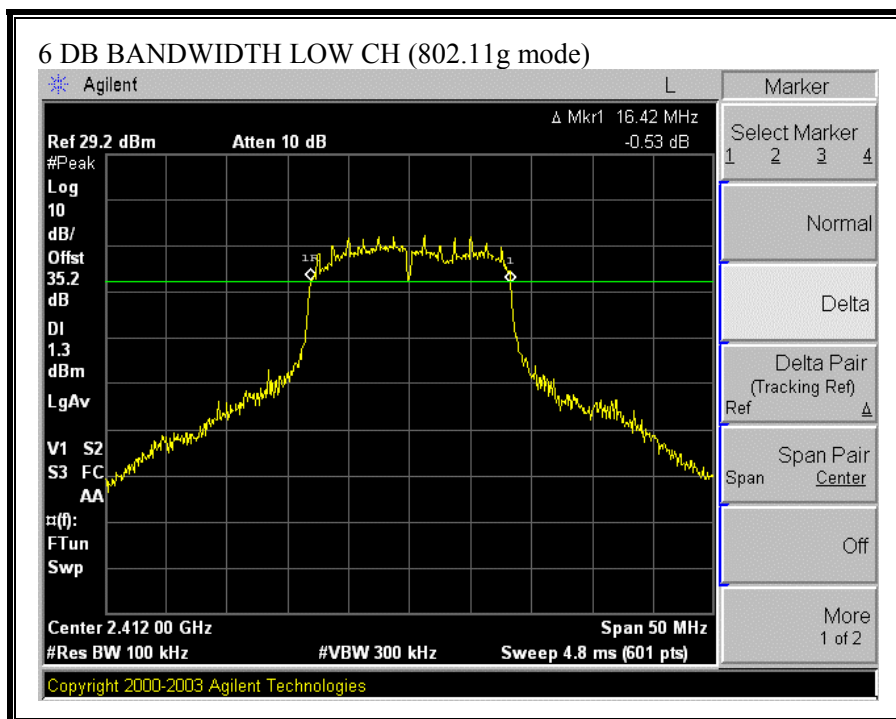

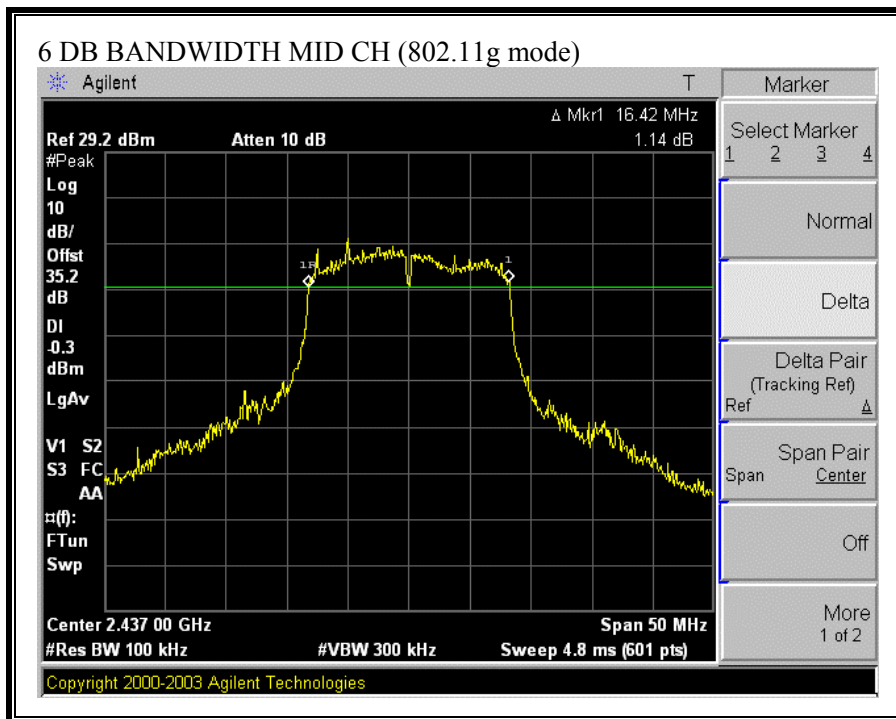

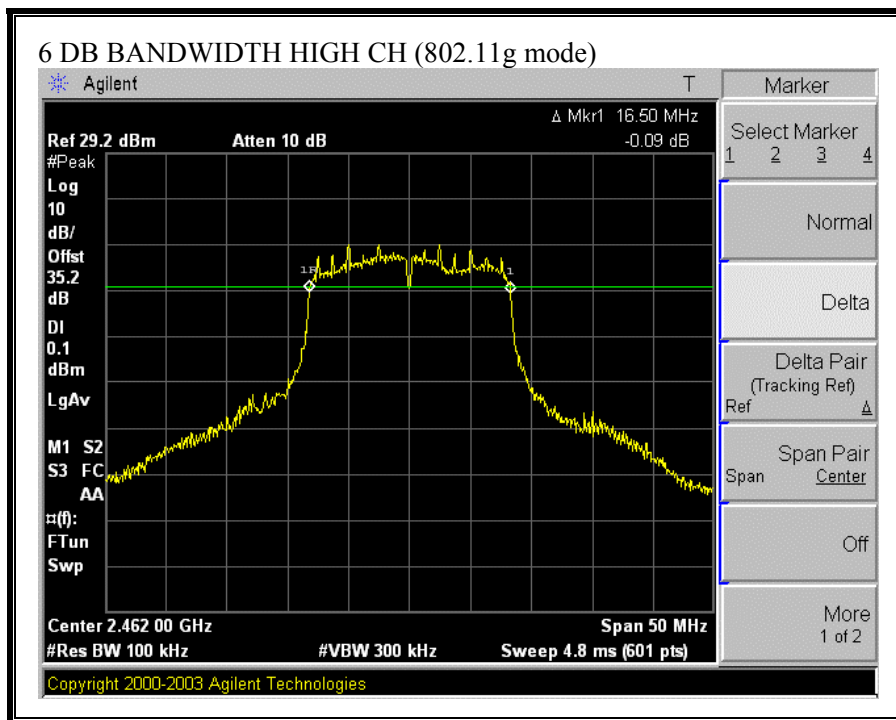



## **7.2. PEAK OUTPUT POWER**

### **PEAK POWER LIMIT**

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:


§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### **TEST PROCEDURE**

See test setup diagram below. SA channel power function was used to measure peak power.

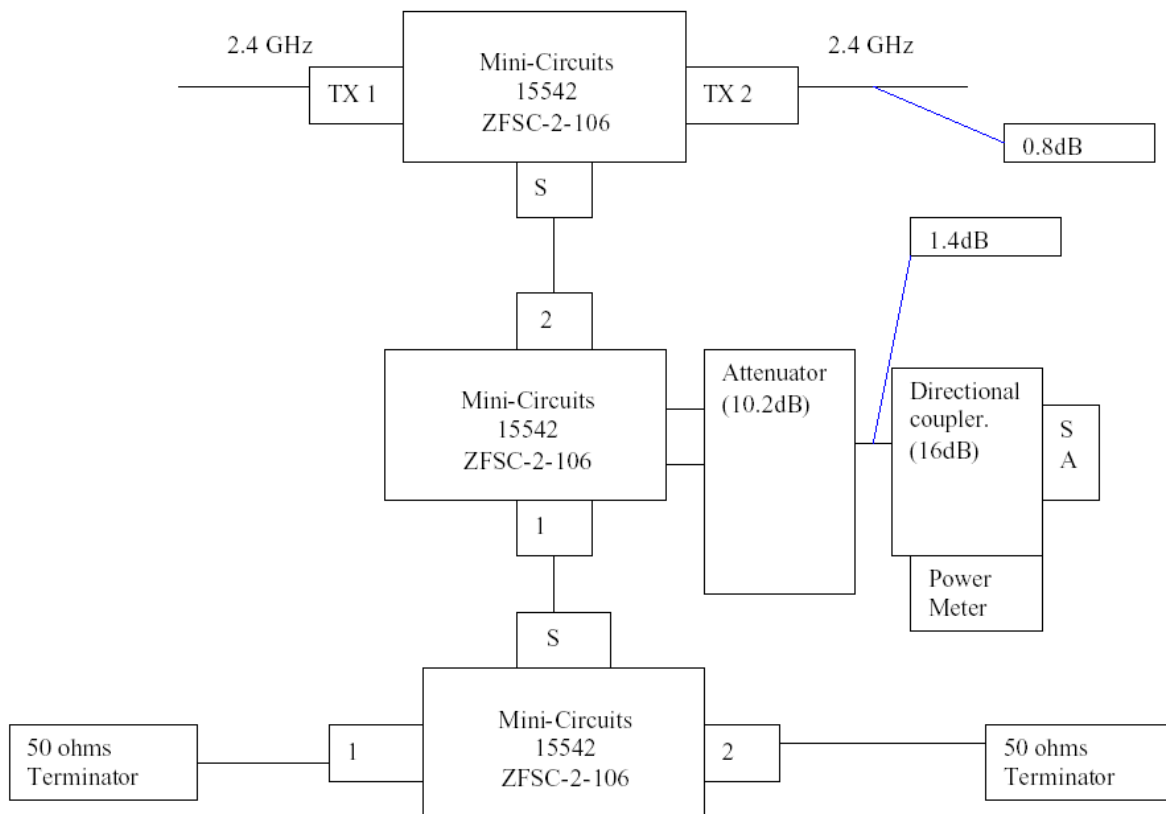

Frequency Band	(2) Combiner loss	Pigtail Cable loss	Interconnect Cable
2.4 GHz	6.8 dB	0.8 dB	1.4 dB

Total Offset : 6.8+0.8+1.4+10.2+16=35.2 dB

## **RESULTS**

The maximum antenna gain is 2 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

802.11b Mode / 1Mbps/ Both TX chains via Combiner


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	24.45	30	-5.55
Middle	2437	21.54	30	-8.46
High	2462	20.82	30	-9.18


802.11g Mode/ 6 Mbps / Both TX chains via Combiner


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	29.20	30	-0.80
Middle	2437	27.60	30	-2.40
High	2462	26.78	30	-3.22

No non-compliance noted:


**OUTPUT POWER (802.11b MODE)**

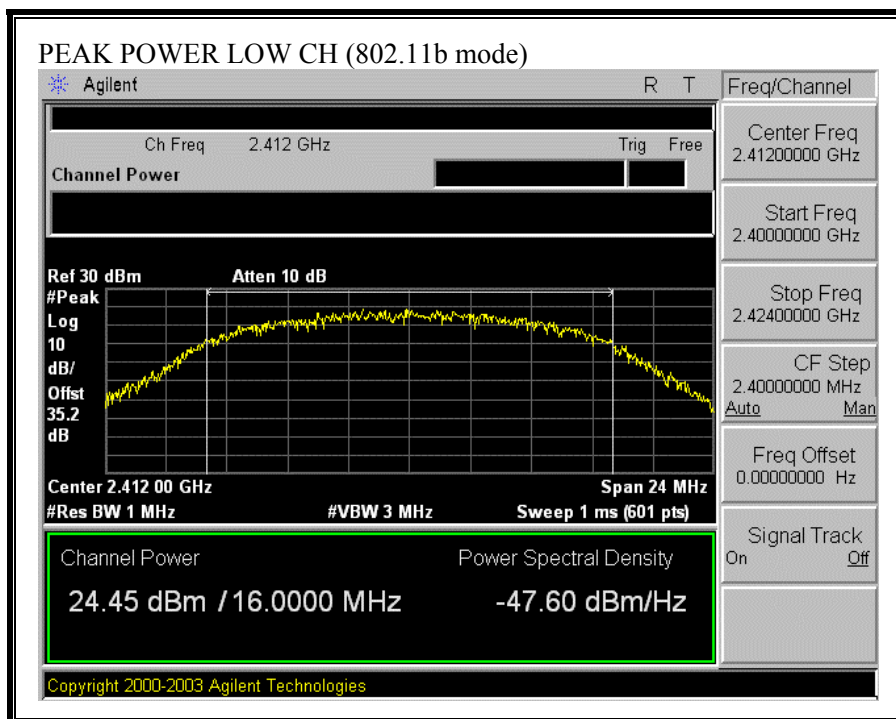


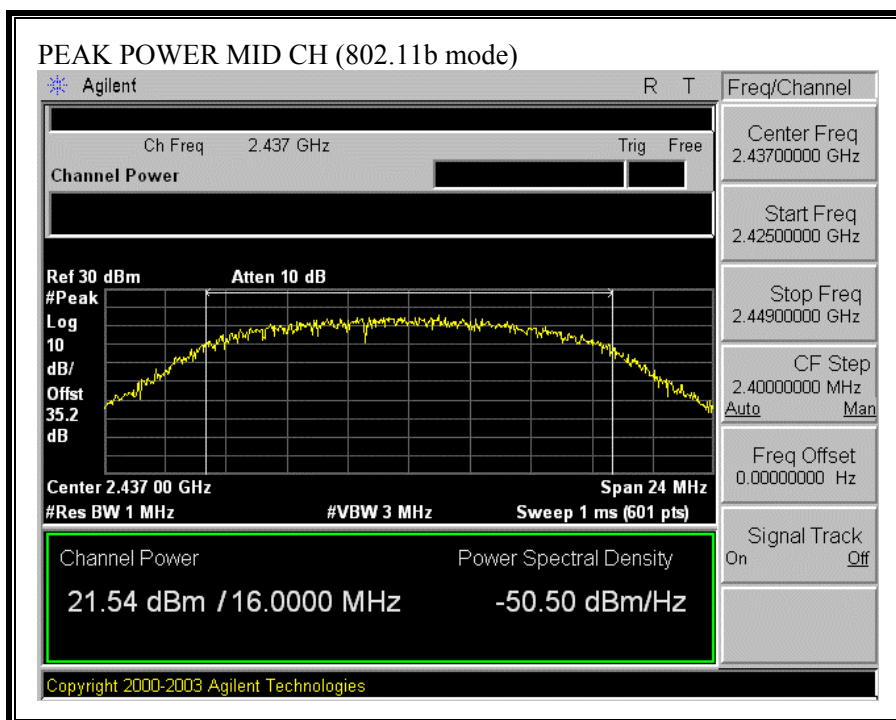

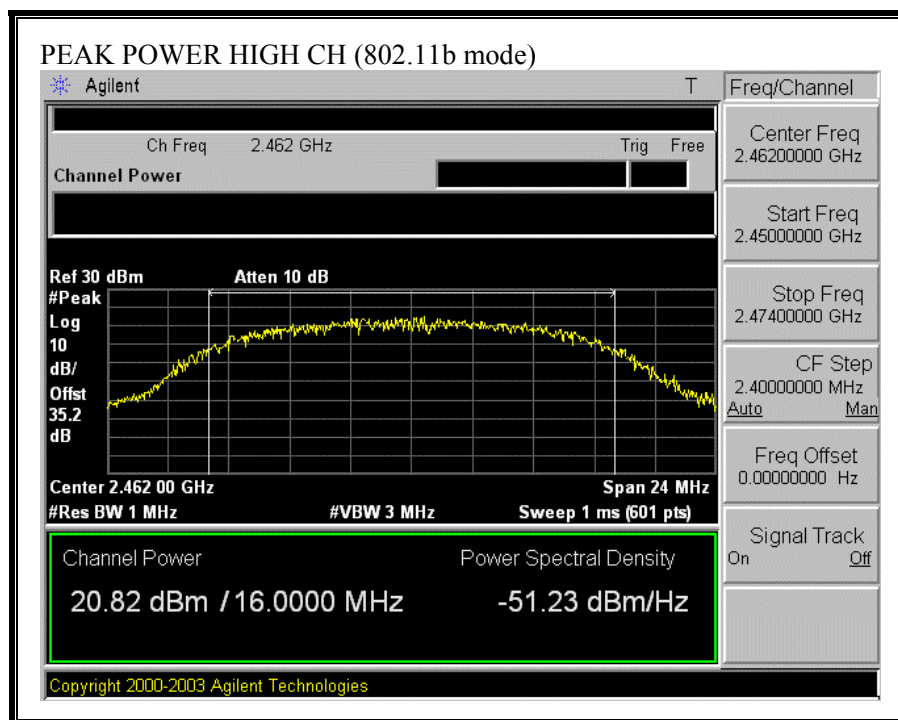


**OUTPUT POWER (802.11g MODE)**

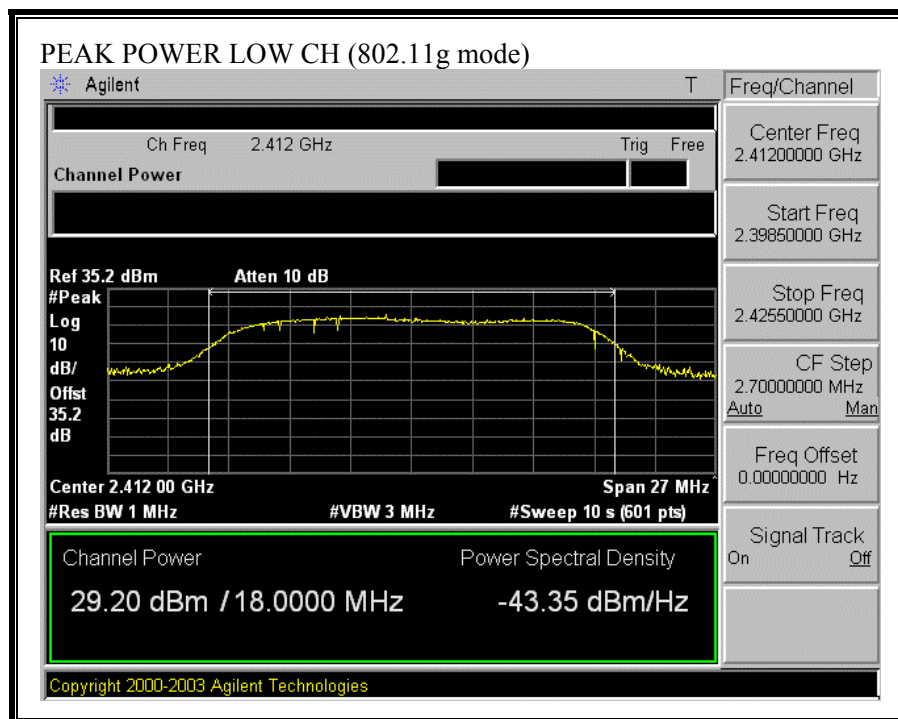

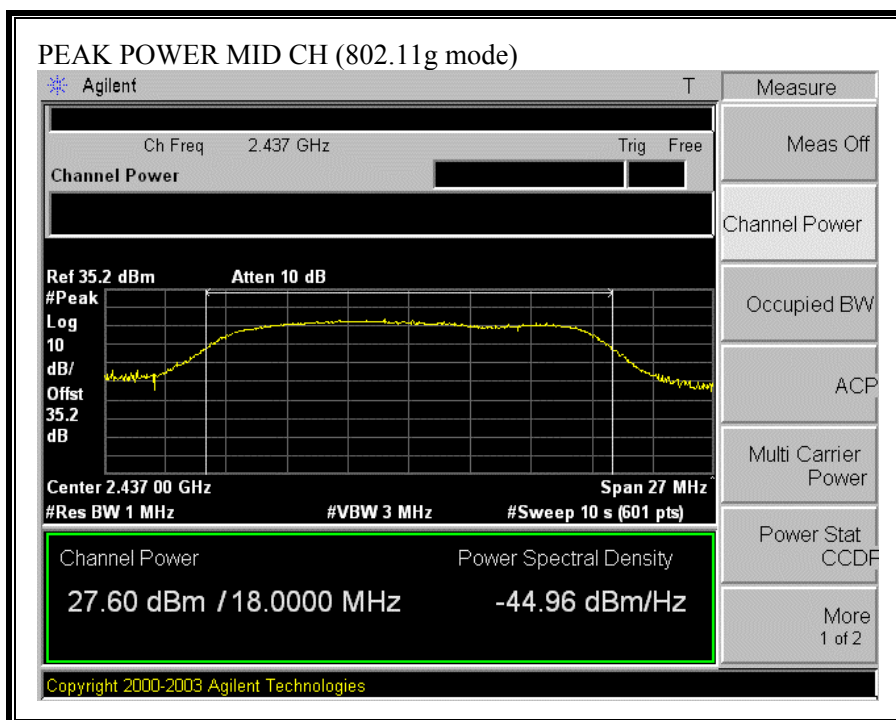



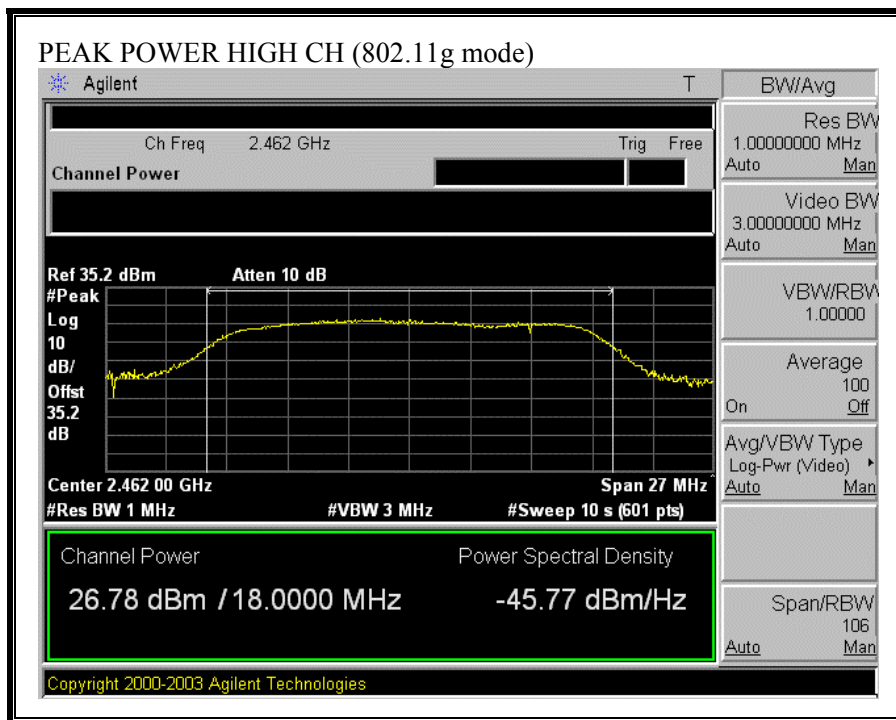

### 7.3. AVERAGE POWER

#### AVERAGE POWER LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

The transmitter output is connected to a power meter.

#### RESULTS

No non-compliance noted:

The cable assembly insertion loss of 19.2 dB (including 10.2 dB pad and 9.dB cable/combiner/pigtail) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode/ 1Mbps/Combined power on both TX chains

Channel	Frequency (MHz)	Power (dBm)	SW Gain Setting
Low	2412	18.79	38
Middle	2437	16.67	41
High	2462	15.97	45

802.11g Mode/ 6 Mbps / Combined power on both TX chains

Channel	Frequency (MHz)	Power (dBm)	SW Gain Setting
Low	2412	19.92	53
Middle	2437	18.28	53
High	2462	17.39	56

## 7.4. PEAK POWER SPECTRAL DENSITY

### LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

### RESULTS

No non-compliance noted:


#### 802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.54	8	-13.54
Middle	2437	-3.65	8	-11.65
High	2462	-3.40	8	-11.40


#### 802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-1.99	8	-9.99
Middle	2437	-3.28	8	-11.28
High	2462	-4.34	8	-12.34


**PEAK POWER SPECTRAL DENSITY (802.11b MODE)**

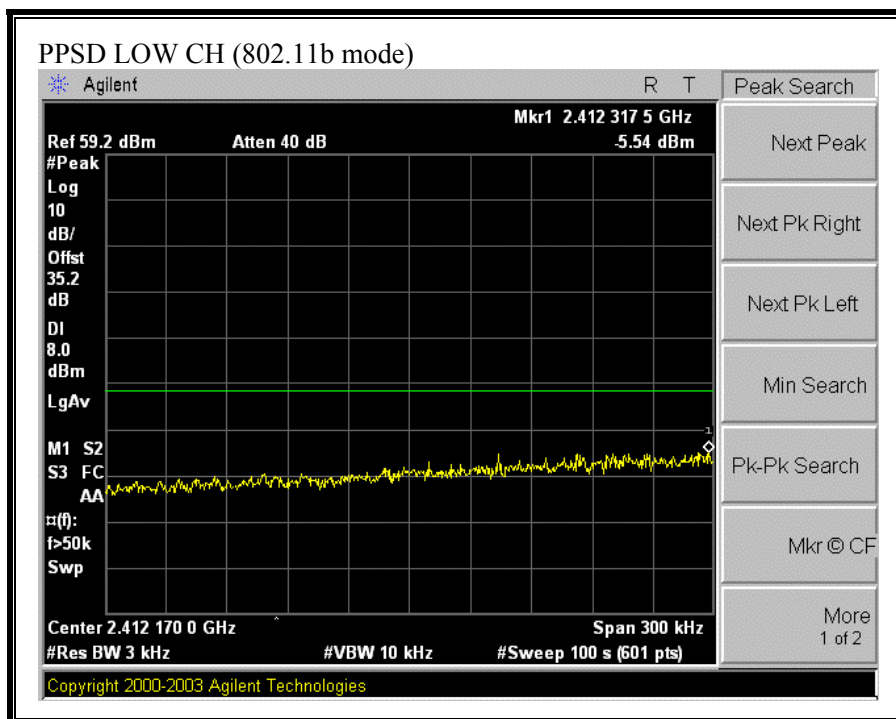


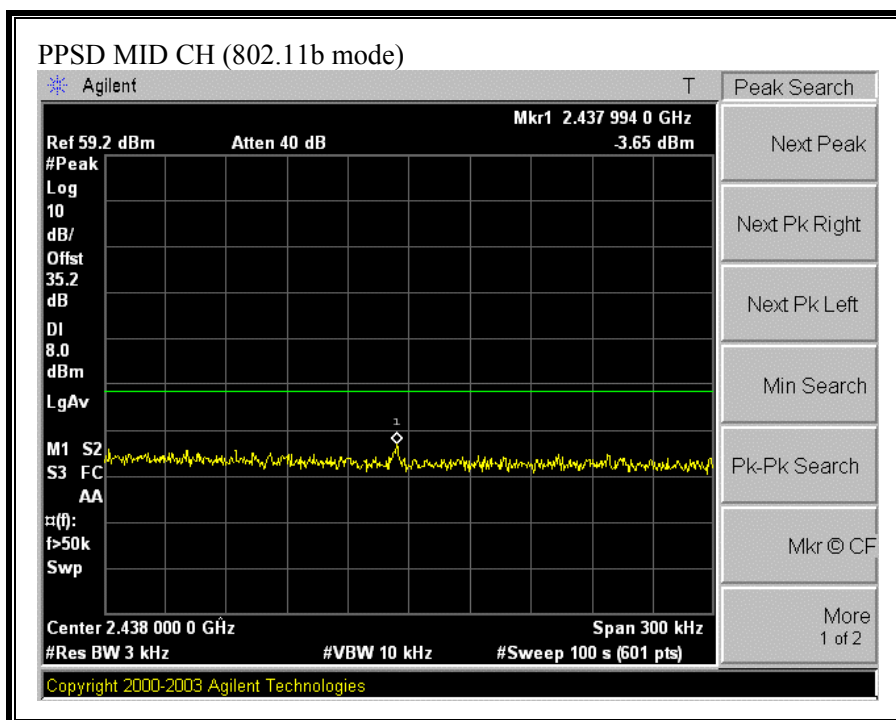

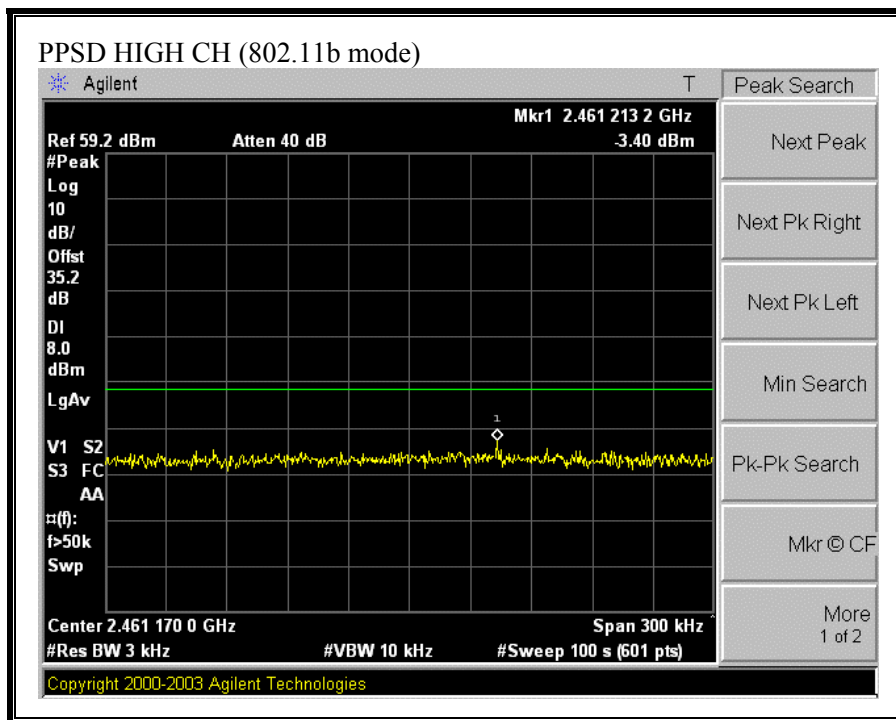


**PEAK POWER SPECTRAL DENSITY (802.11g MODE)**

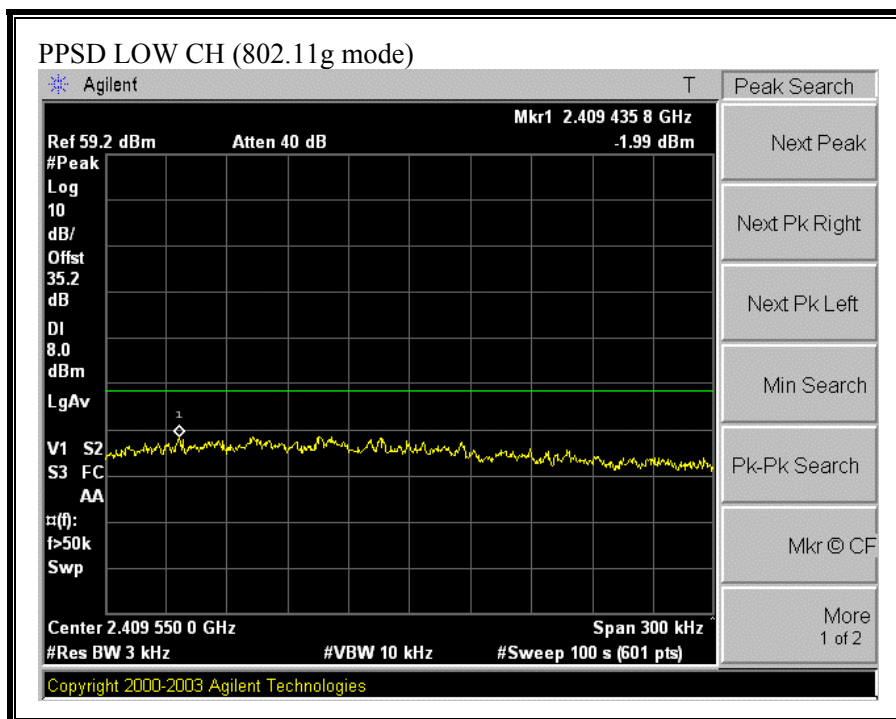

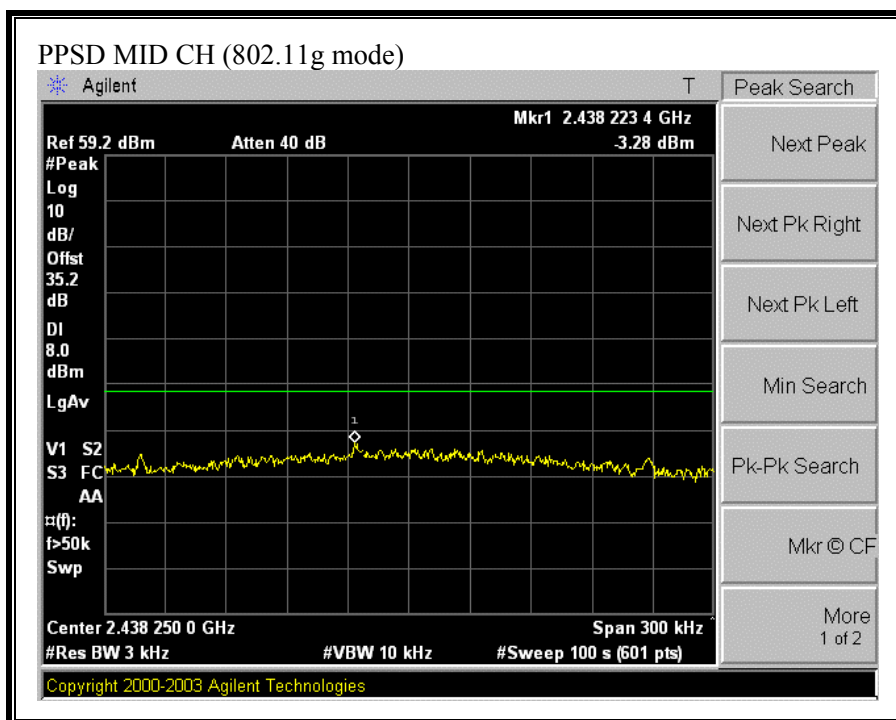



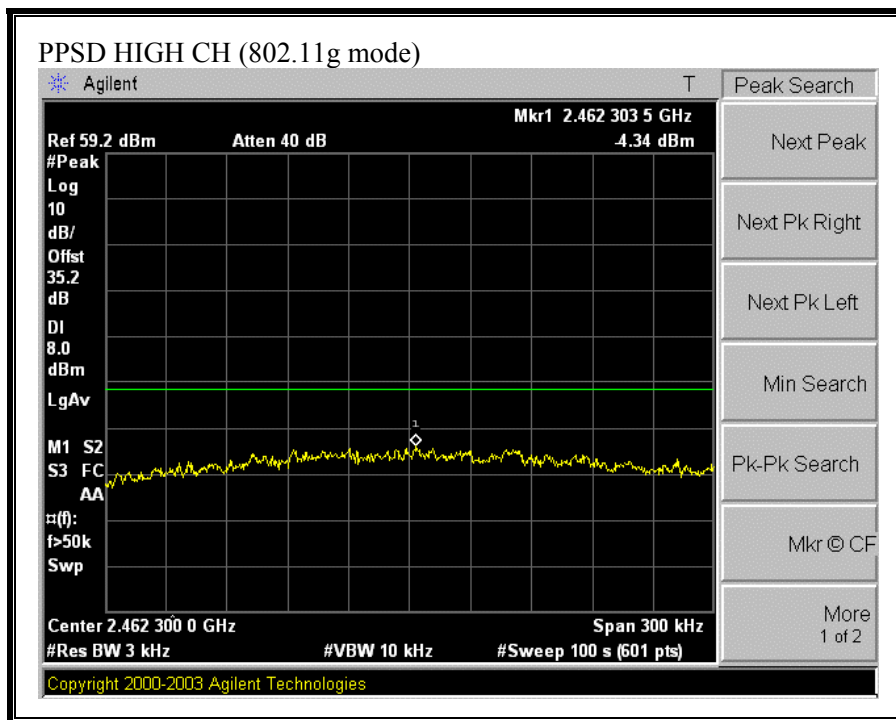

## **7.5. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### **TEST PROCEDURE**


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### **RESULTS**


No non-compliance noted:


**SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)**

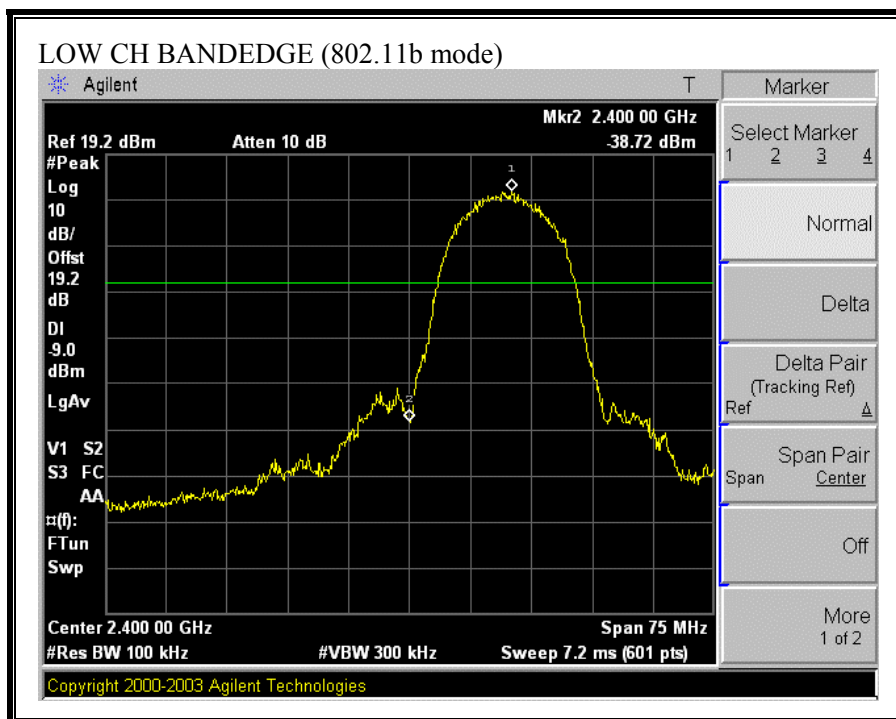

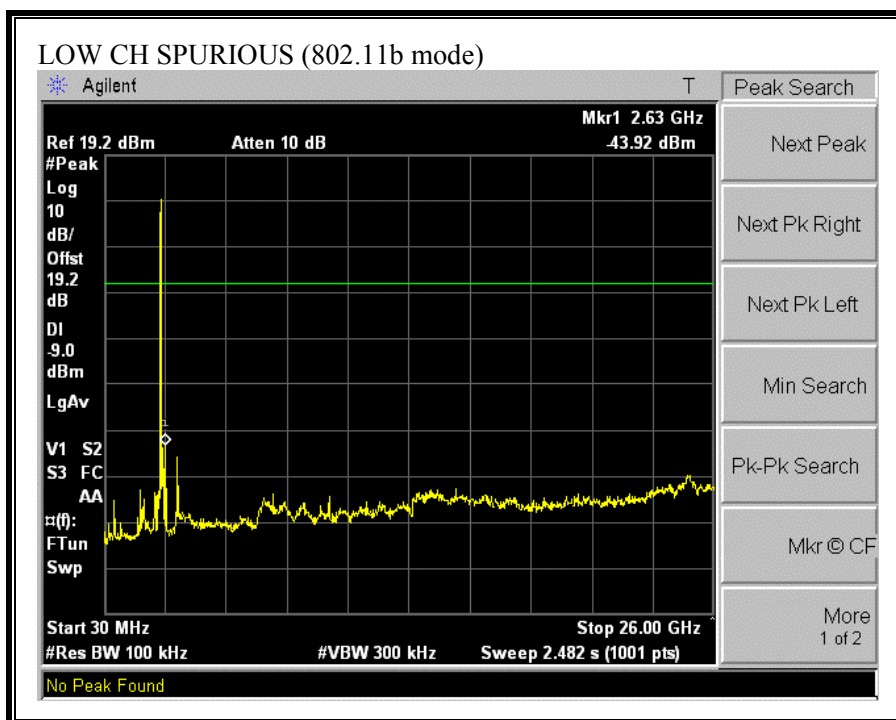



**SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)**

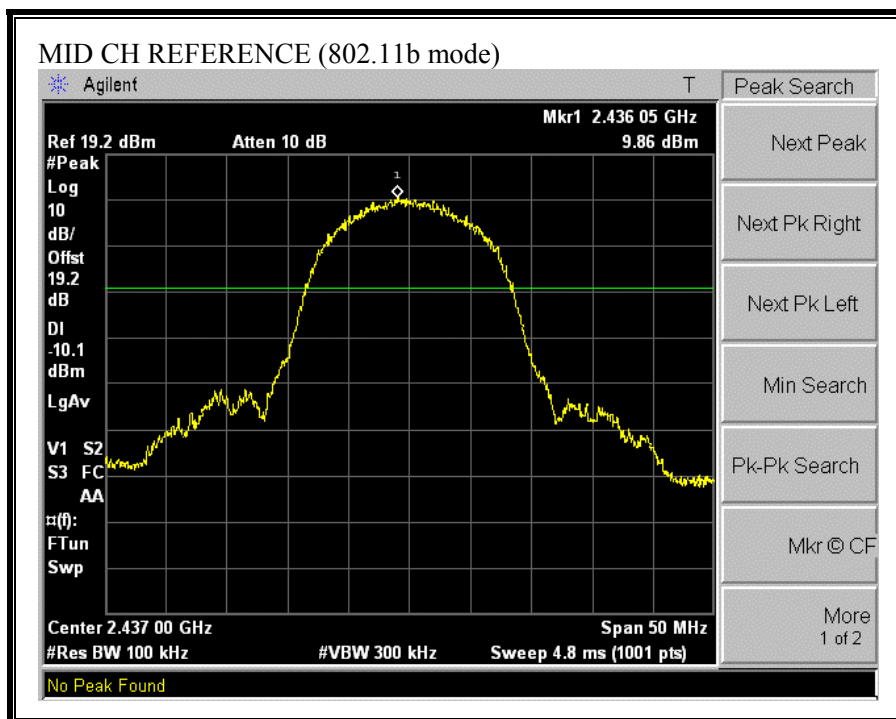

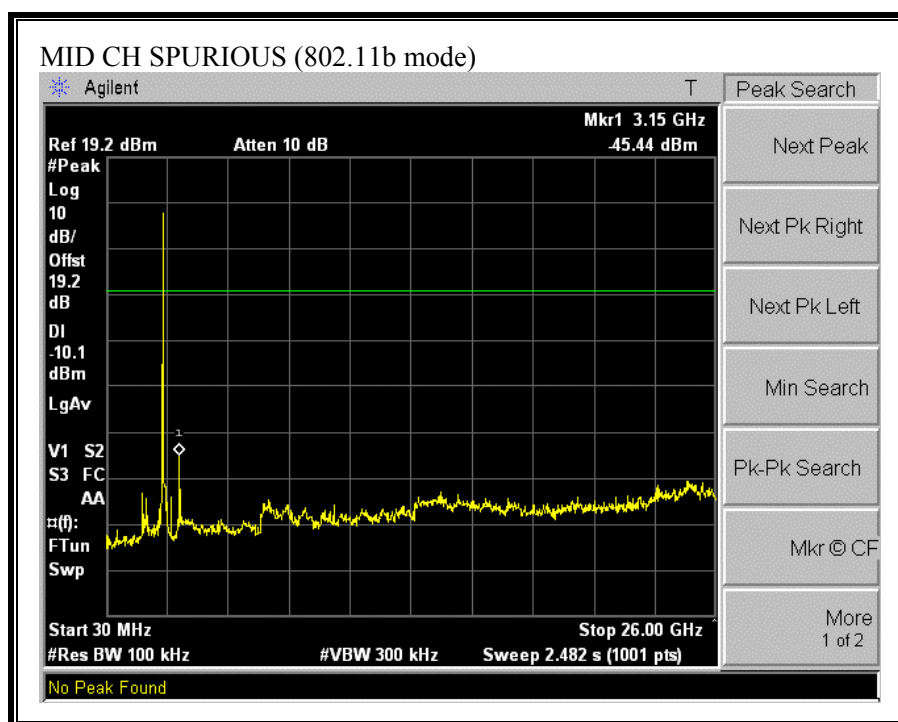


**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)**

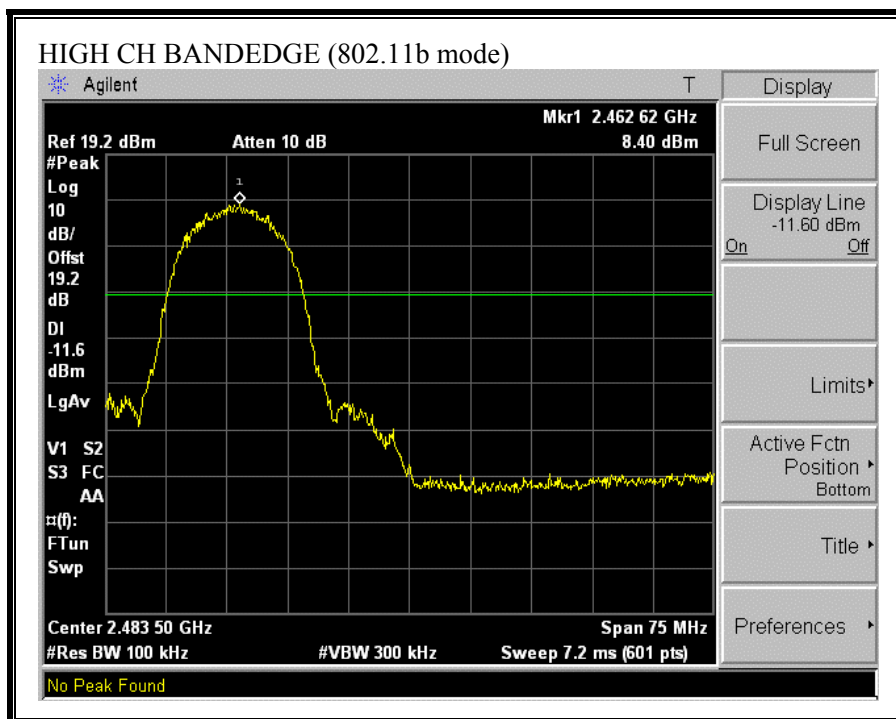


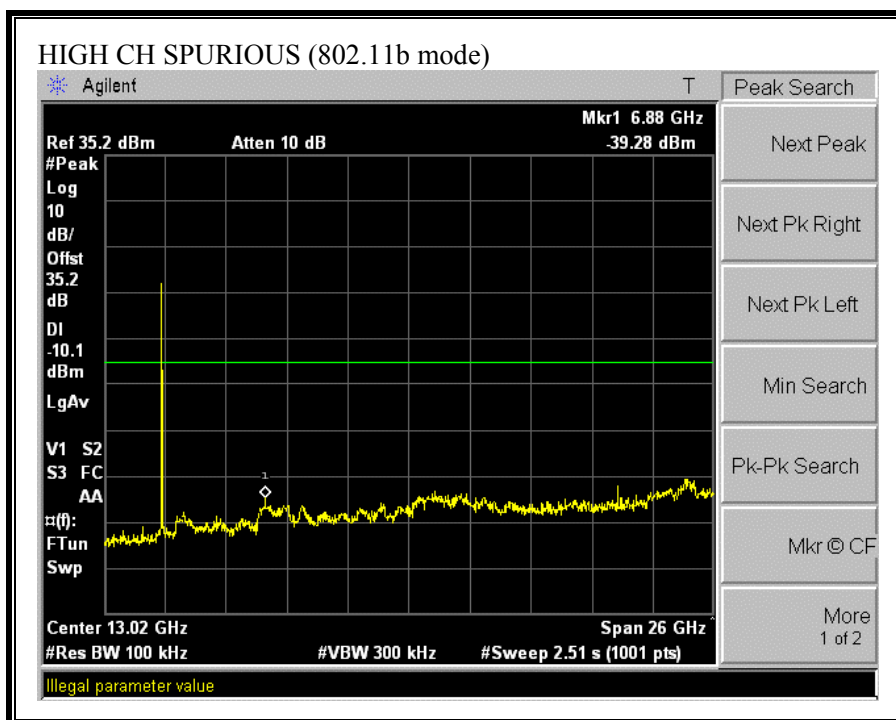





**SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)**

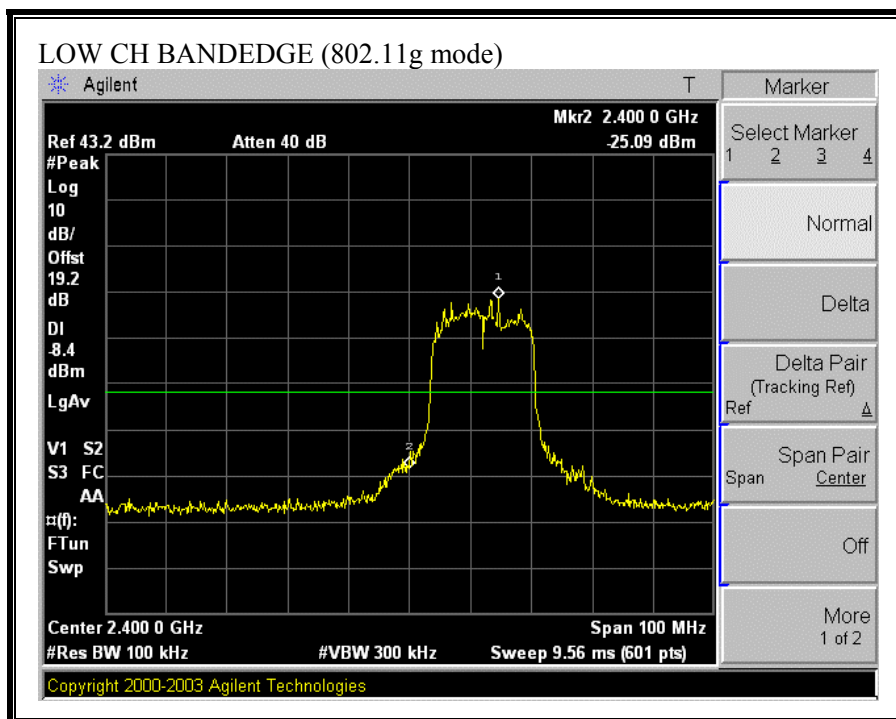

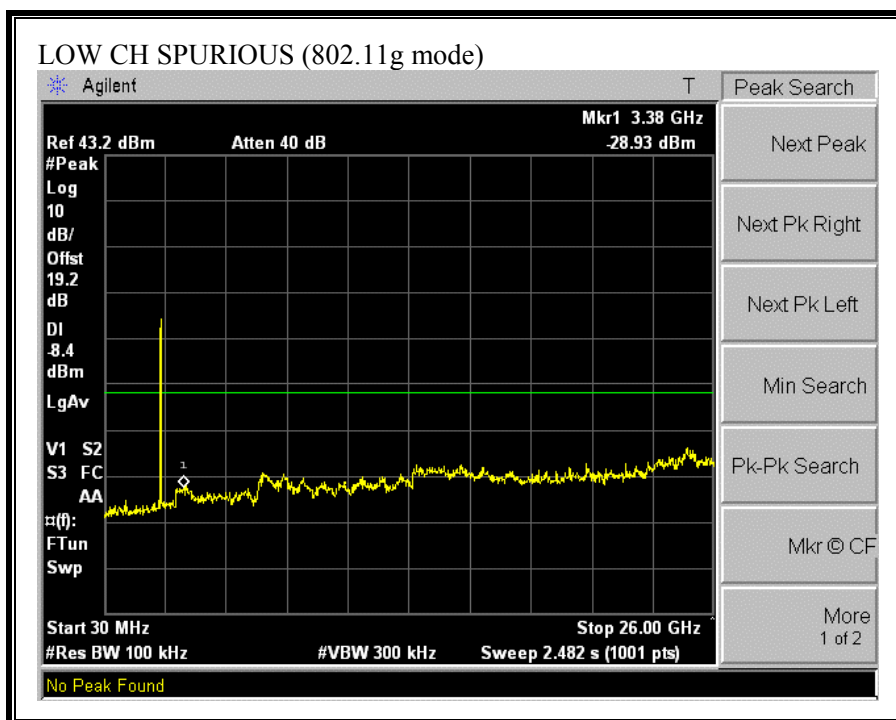



**SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)**

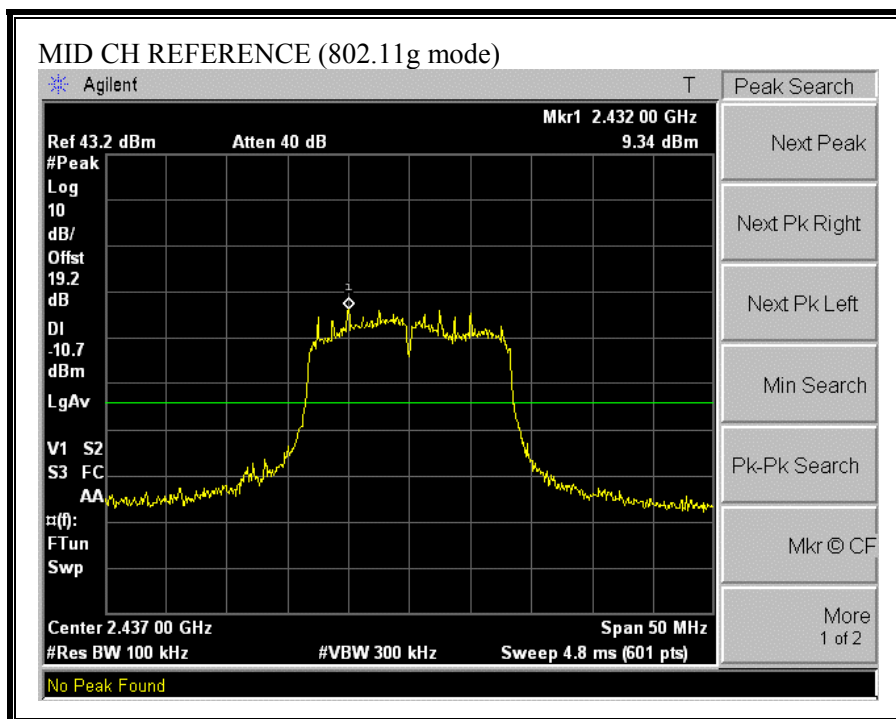

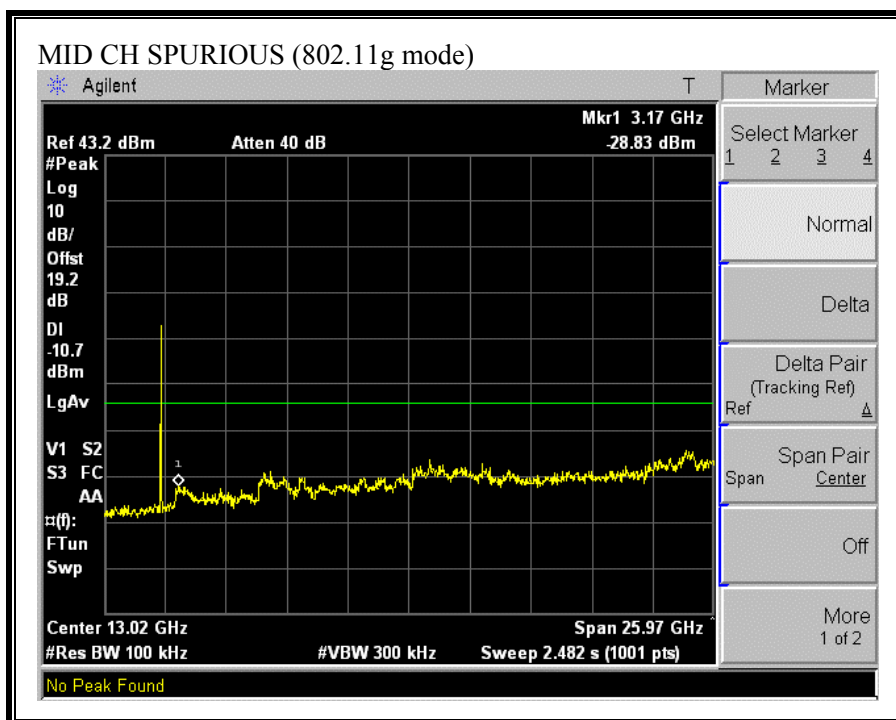

**SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)**

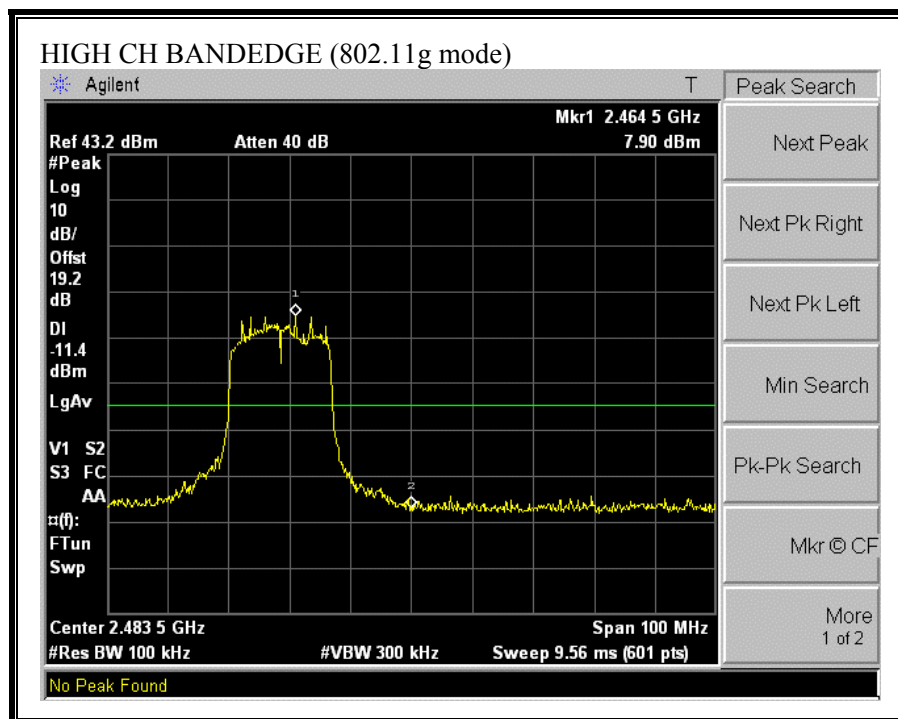

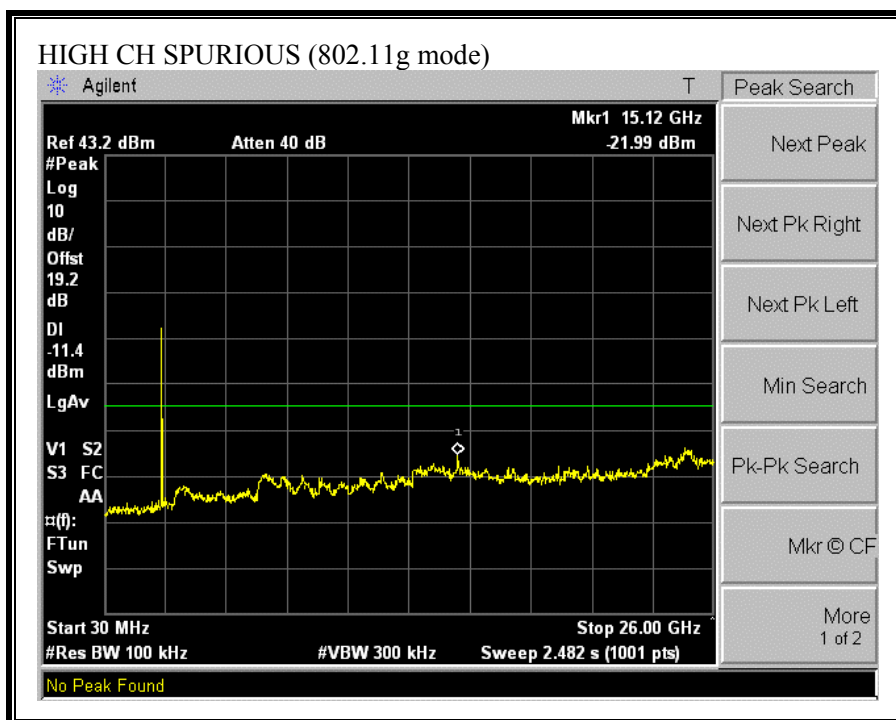

## 7.6. RADIATED EMISSIONS

### 7.6.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

#### LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.



## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


## **RESULTS**

No non-compliance noted:


## 7.6.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


### RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

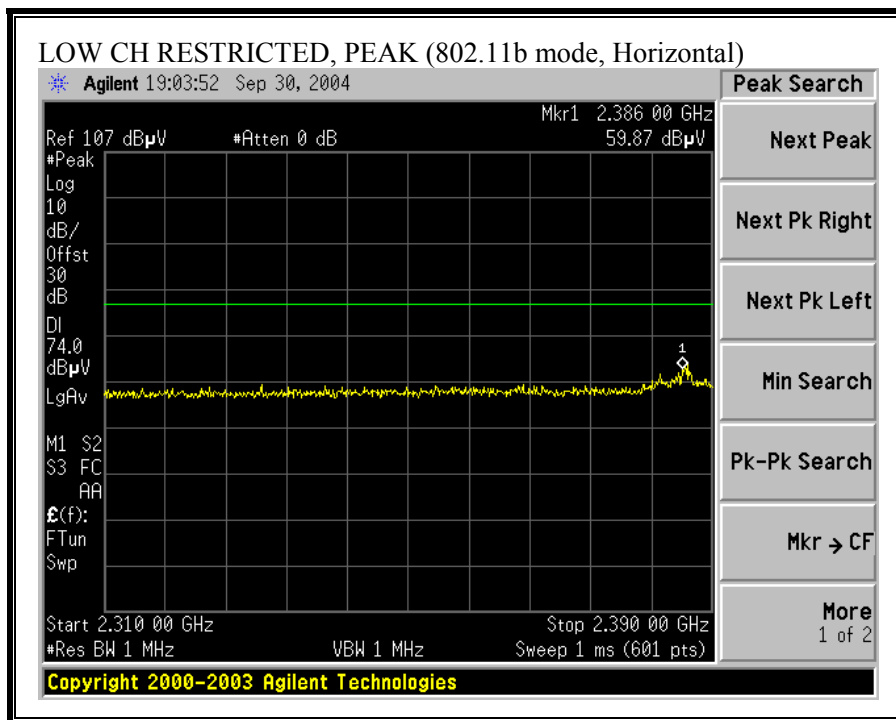

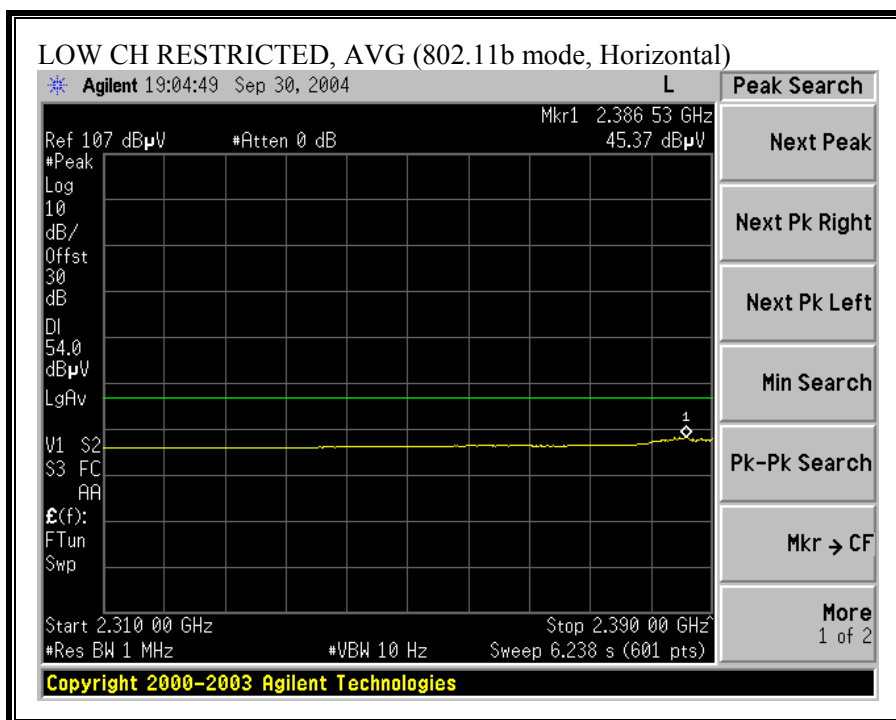



**RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)**

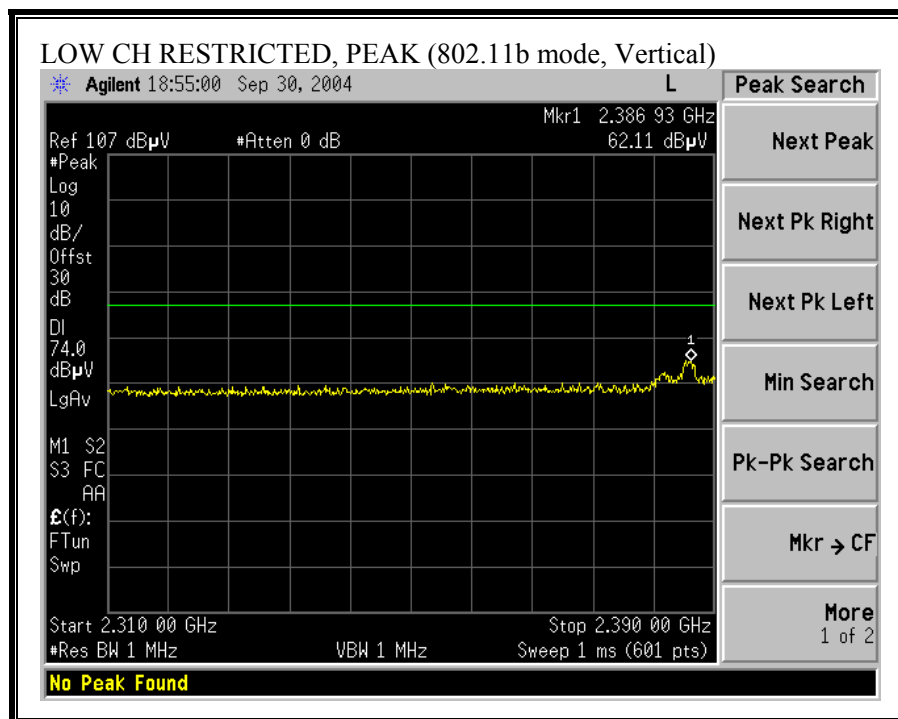

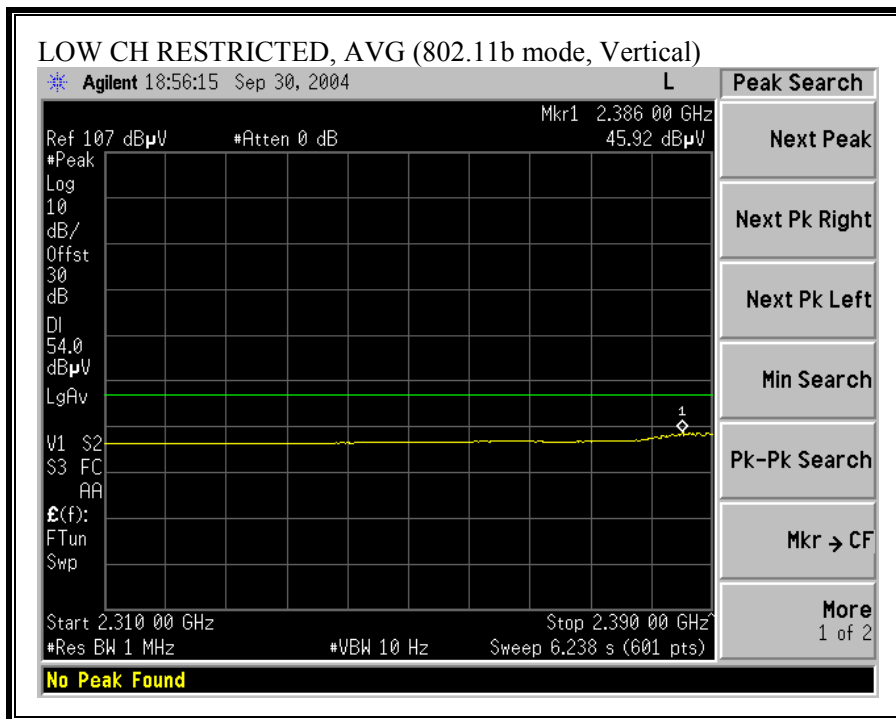


**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

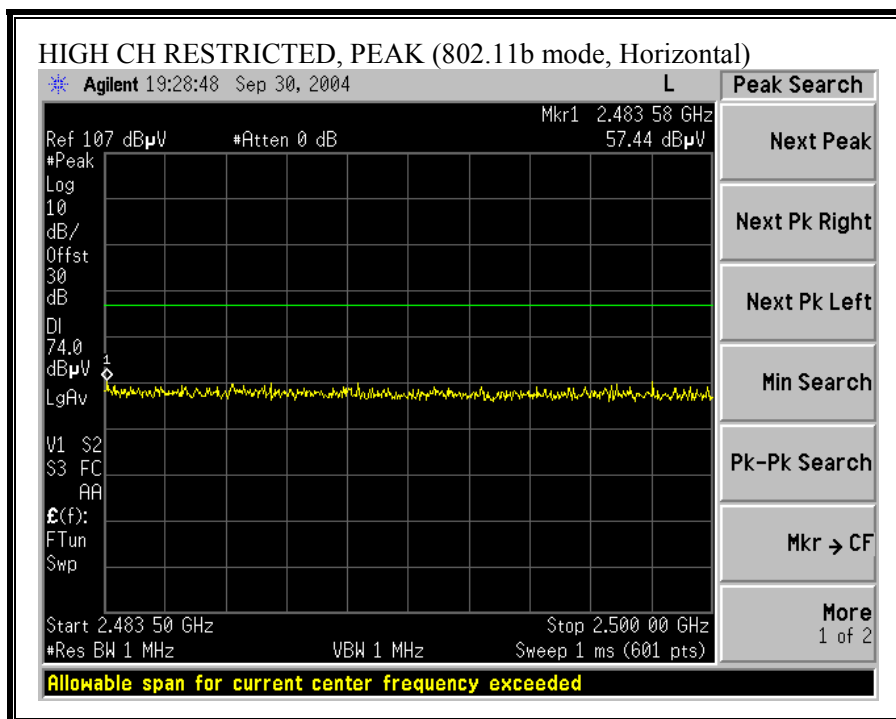


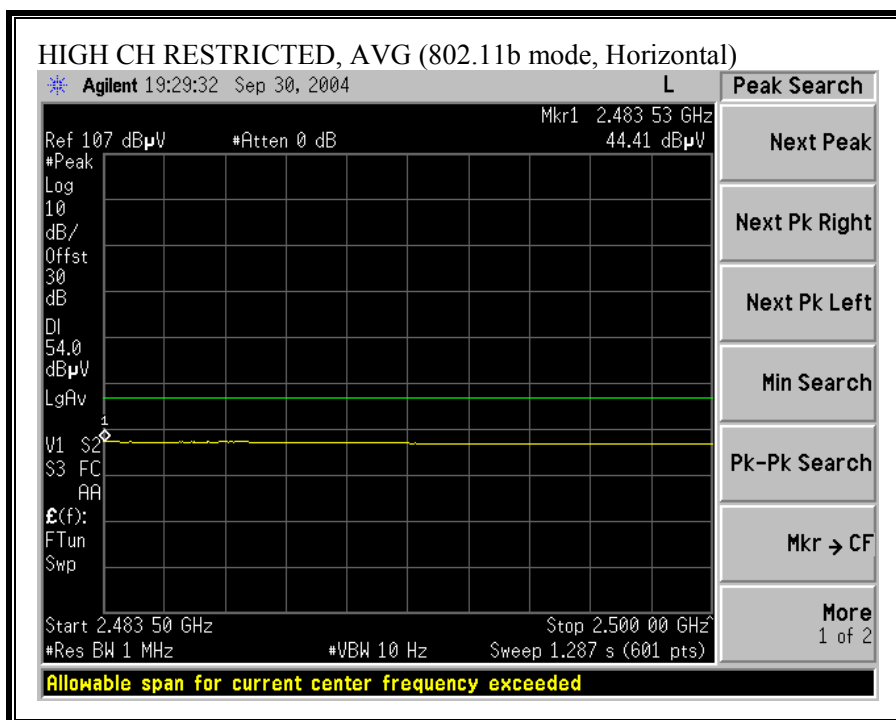

**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)**

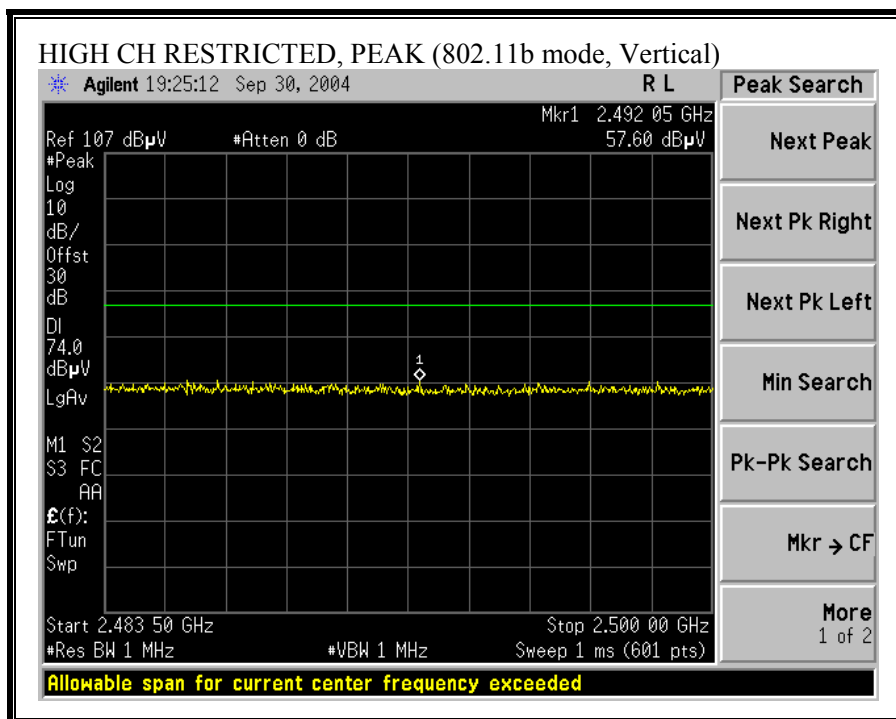




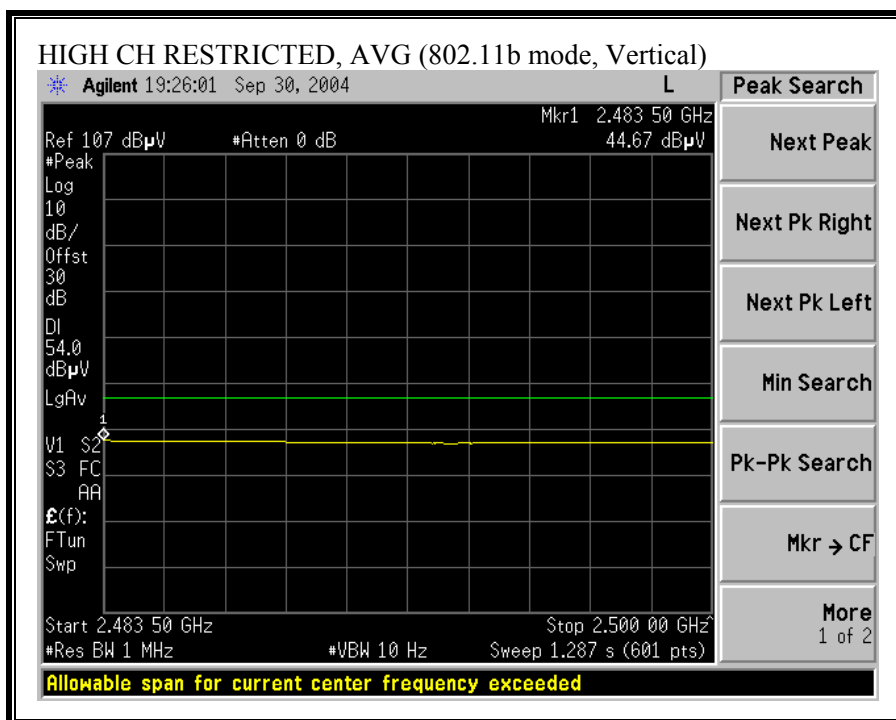


## HARMONICS AND SPURIOUS EMISSIONS (b MODE)


09/30/04 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr:Chin Pang Project #:04u2913 Company:Air Go EUT Descr:802.11 b/g True MIMO Cardbus EUT M/N: Cardbus s/n: 0124 Test Target:FCC Class B Mode Oper:TX, b mode															
Test Equipment:															
EMCO Horn 1-18GHz T60; S/N: 2238 @3m		Pre-amplifier 1-26GHz T86 Miteq 924341		Pre-amplifier 26-40GHz		Horn > 18GHz									
Hi Frequency Cables		2 foot cable 2_Vien		3 foot cable		4 foot cable		12 foot cable 12_Vien		HPF HPF_ 4.6GHz		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Transmitting at low Ch															
2.665	3.0	57.4	41.0	29.0	2.2	-42.4	0.0	0.3	46.5	30.1	74	54	-27.5	-23.9	V
4.824	3.0	52.3	39.5	33.0	3.1	-44.0	0.0	2.4	46.8	34.0	74	54	-27.2	-20.0	V
2.665	3.0	53.5	38.6	29.0	2.2	-42.4	0.0	0.3	42.6	27.7	74	54	-31.4	-26.3	H
4.824	3.0	51.6	39.2	33.0	3.1	-44.0	0.0	2.4	46.1	33.7	74	54	-27.9	-20.3	H
Transmitting at mid Ch															
2.665	3.0	57.9	41.4	29.0	2.2	-42.4	0.0	0.3	47.0	30.5	74	54	-27.0	-23.5	V
4.874	3.0	52.7	40.0	33.0	3.1	-44.1	0.0	2.5	47.2	34.5	74	54	-26.8	-19.5	V
7.311	3.0	57.5	46.0	35.9	3.7	-45.0	0.0	1.4	53.6	42.1	74	54	-20.4	-11.9	V
2.665	3.0	54.0	39.2	29.0	2.2	-42.4	0.0	0.3	43.1	28.3	74	54	-30.9	-25.7	H
4.874	3.0	52.0	39.2	33.0	3.1	-44.1	0.0	2.5	46.5	33.7	74	54	-27.5	-20.3	H
7.311	3.0	52.9	41.3	35.9	3.7	-45.0	0.0	1.4	49.0	37.4	74	54	-25.0	-16.6	H
Transmitting at high Ch															
2.665	3.0	58.4	41.7	29.0	2.2	-42.4	0.0	0.3	47.5	30.8	74	54	-26.5	-23.2	V
4.924	3.0	52.6	39.5	33.0	3.1	-44.2	0.0	2.5	47.1	34.0	74	54	-26.9	-20.0	V
7.386	3.0	58.0	44.0	36.0	3.7	-45.0	0.0	1.4	54.2	40.2	74	54	-19.8	-13.8	V
2.665	3.0	54.3	39.3	29.0	2.2	-42.4	0.0	0.3	43.4	28.4	74	54	-30.6	-25.6	H
4.924	3.0	52.9	40.0	33.0	3.1	-44.2	0.0	2.5	47.4	34.5	74	54	-26.6	-19.5	H
7.386	3.0	53.0	40.5	36.0	3.7	-45.0	0.0	1.4	49.2	36.7	74	54	-24.8	-17.3	H
Note: No other emissions were detected above the system noise floor.															
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit						
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit						
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit						
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit						
CL	Cable Loss			HPF	High Pass Filter										


**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)**

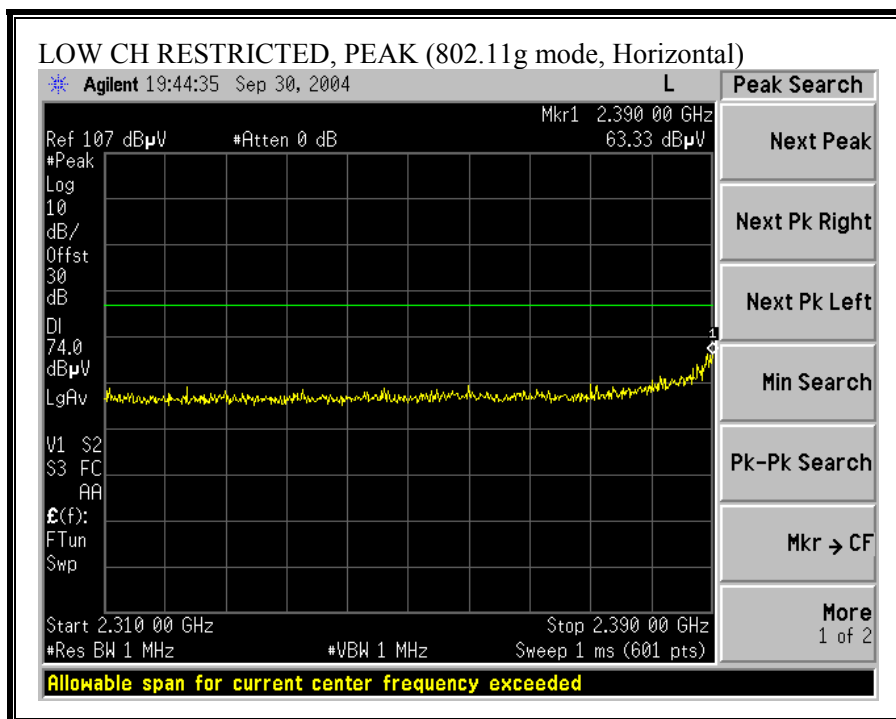

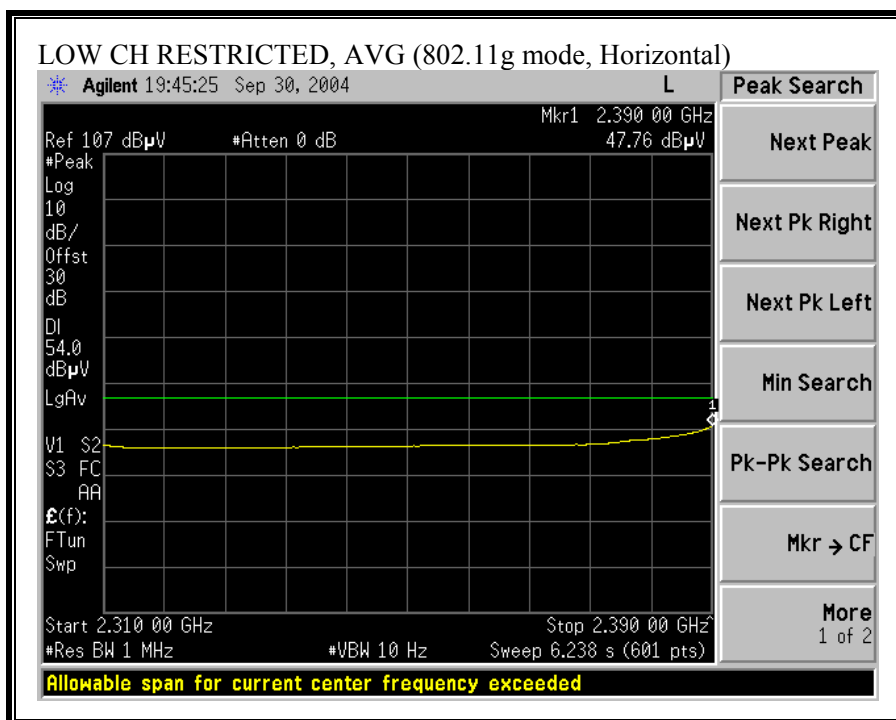



**RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)**

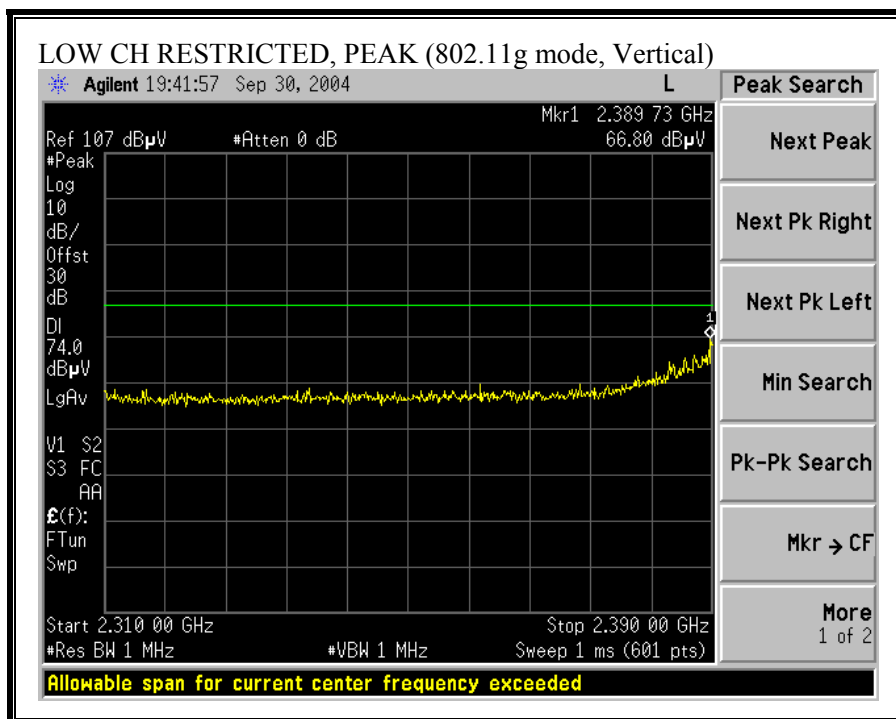

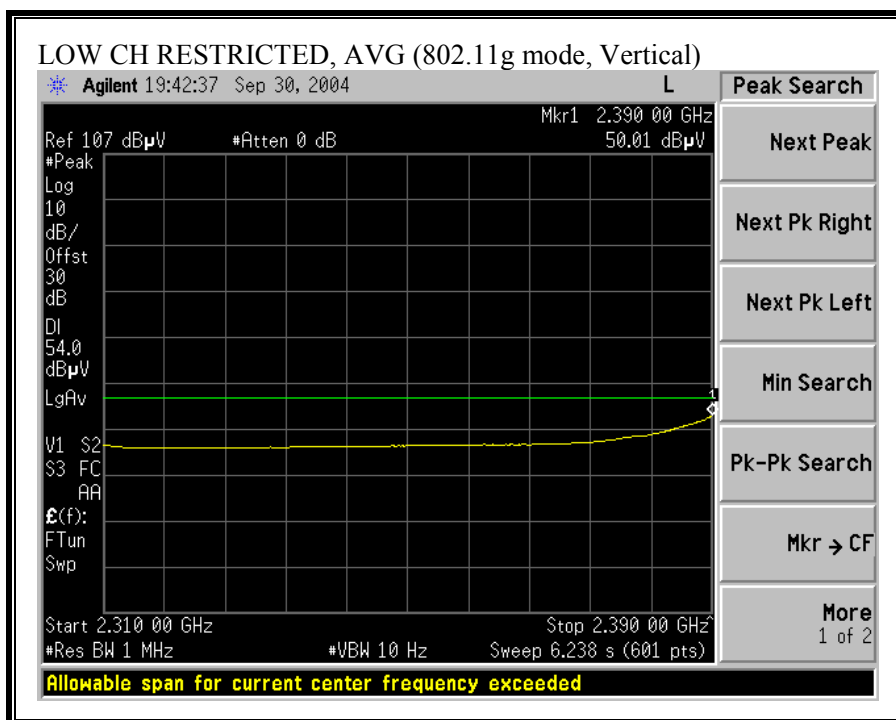


**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

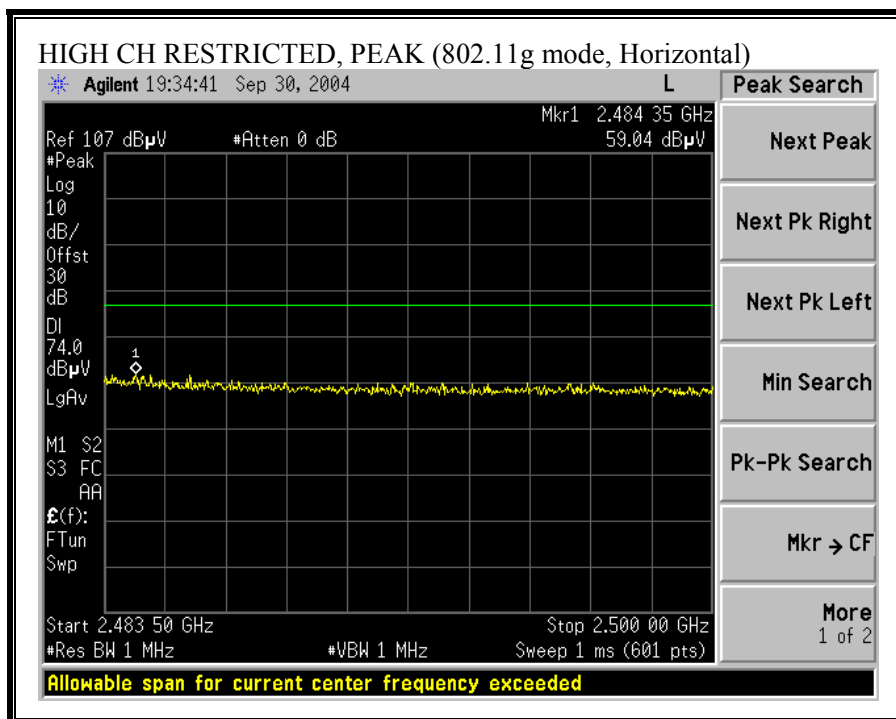


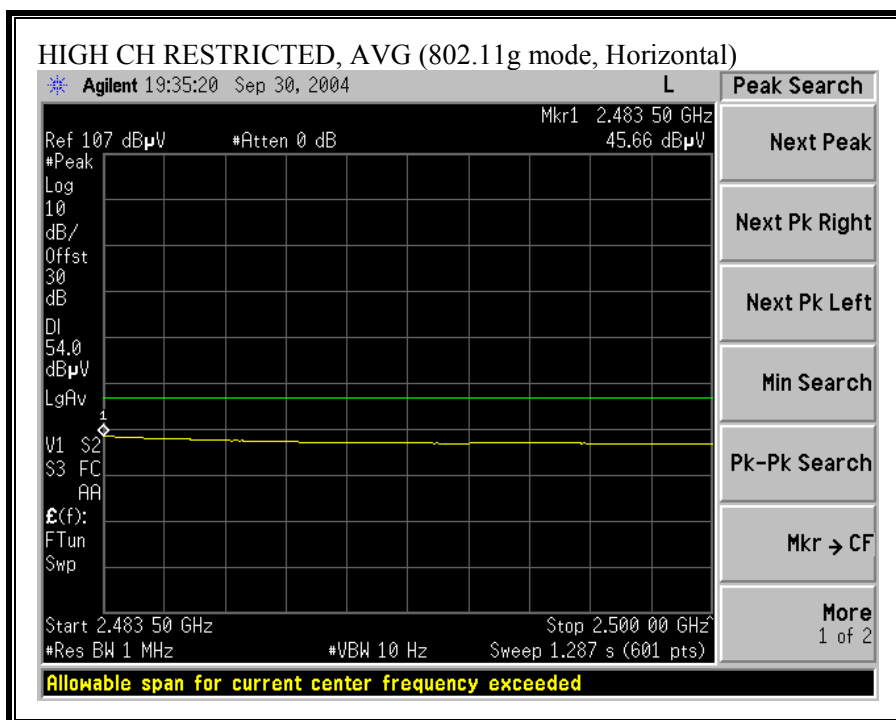



**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)**

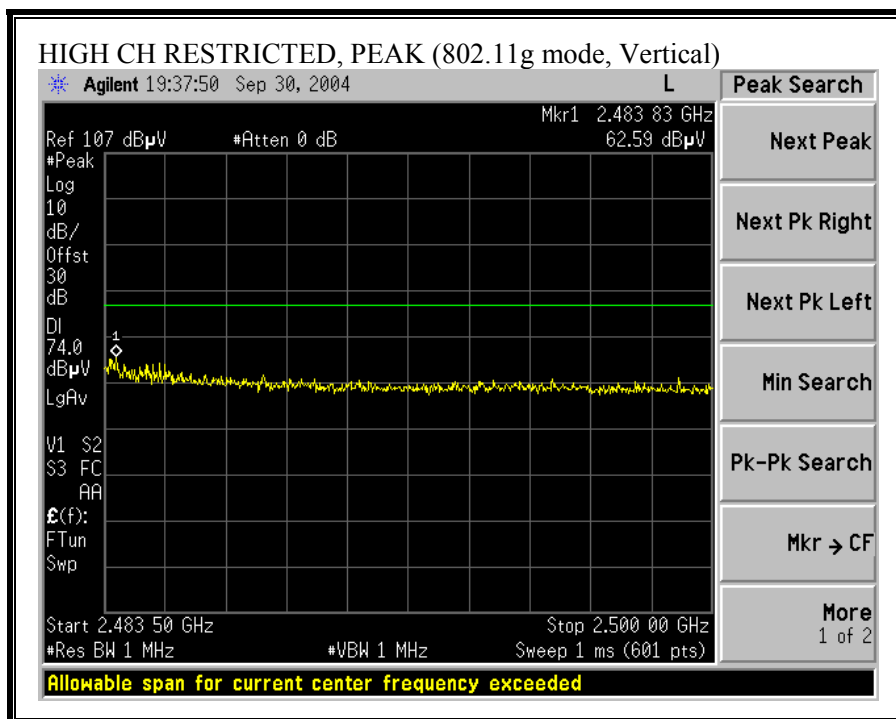

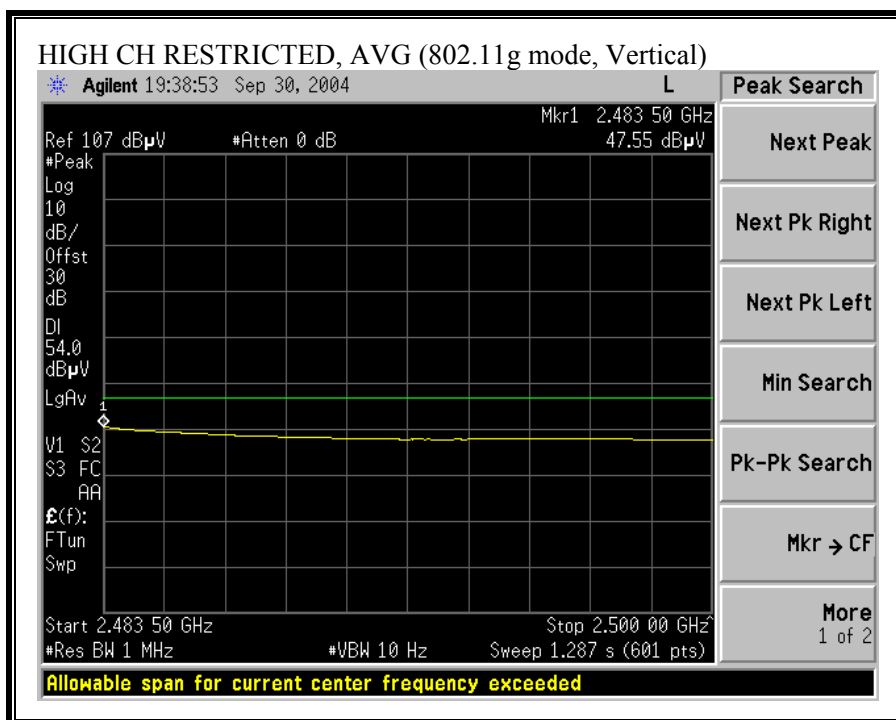


## HARMONICS AND SPURIOUS EMISSIONS (g MODE)

09/30/04 High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang																
Project #:04u2913																
Company:Air Go																
EUT Descr:802.11 b/g True MIMO Cardbus																
EUT M/N: Cardbus s/n: 0124																
Test Target:FCC Class B																
Mode Oper:TX, g mode																
Test Equipment:																
EMCO Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T60; S/N: 2238 @3m				T86 Miteq 924341												
Hi Frequency Cables																
2 foot cable				3 foot cable				4 foot cable				12 foot cable				
2_Vien												12_Vien				
								HPF		Reject Filter		Peak Measurements				
								HPF_ 4.6GHz				RBW=VBW=1MHz				
												Average Measurements				
												RBW=1MHz ; VBW=10Hz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fitr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Transmitting at low Ch																
2.665	3.0	57.4	40.6	29.0	2.2	-42.4	0.0	0.3	46.5	29.7	74	54	-27.5	-24.3	V	
4.824	3.0	52.9	40.0	33.0	3.1	-44.0	0.0	2.4	47.3	34.5	74	54	-26.7	-19.5	V	
2.665	3.0	53.5	38.4	29.0	2.2	-42.4	0.0	0.3	42.6	27.5	74	54	-31.4	-26.5	H	
4.824	3.0	52.0	39.6	33.0	3.1	-44.0	0.0	2.4	46.5	34.1	74	54	-27.5	-19.9	H	
Transmitting at mid Ch																
2.665	3.0	58.8	41.8	29.0	2.2	-42.4	0.0	0.3	47.9	30.9	74	54	-26.1	-23.1	V	
4.874	3.0	52.7	39.8	33.0	3.1	-44.1	0.0	2.5	47.2	34.3	74	54	-26.8	-19.7	V	
7.311	3.0	57.7	46.4	35.9	3.7	-45.0	0.0	1.4	53.7	42.5	74	54	-20.3	-11.5	V	
2.665	3.0	54.7	39.3	29.0	2.2	-42.4	0.0	0.3	43.8	28.4	74	54	-30.2	-25.6	V	
4.874	3.0	52.5	39.4	33.0	3.1	-44.1	0.0	2.5	47.0	33.9	74	54	-27.0	-20.1	H	
7.311	3.0	53.0	41.4	35.9	3.7	-45.0	0.0	1.4	49.1	37.5	74	54	-24.9	-16.5	H	
Transmitting at high Ch																
2.665	3.0	57.8	41.3	29.0	2.2	-42.4	0.0	0.3	46.9	30.4	74	54	-27.1	-23.6	V	
4.924	3.0	52.6	39.5	33.0	3.1	-44.2	0.0	2.5	47.1	34.0	74	54	-26.9	-20.0	V	
7.386	3.0	56.0	42.5	36.0	3.7	-45.0	0.0	1.4	52.2	38.7	74	54	-21.8	-15.3	V	
2.665	3.0	55.0	39.5	29.0	2.2	-42.4	0.0	0.3	44.1	28.6	74	54	-29.9	-25.4	H	
4.924	3.0	52.4	39.3	33.0	3.1	-44.2	0.0	2.5	46.9	33.8	74	54	-27.1	-20.2	H	
7.386	3.0	54.0	41.6	36.0	3.7	-45.0	0.0	1.4	50.2	37.8	74	54	-23.8	-16.2	H	
Note: No other emissions were detected above the system noise floor .																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

**WORST-CASE RADIATED EMISSIONS BELOW 1 GHz**

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)**

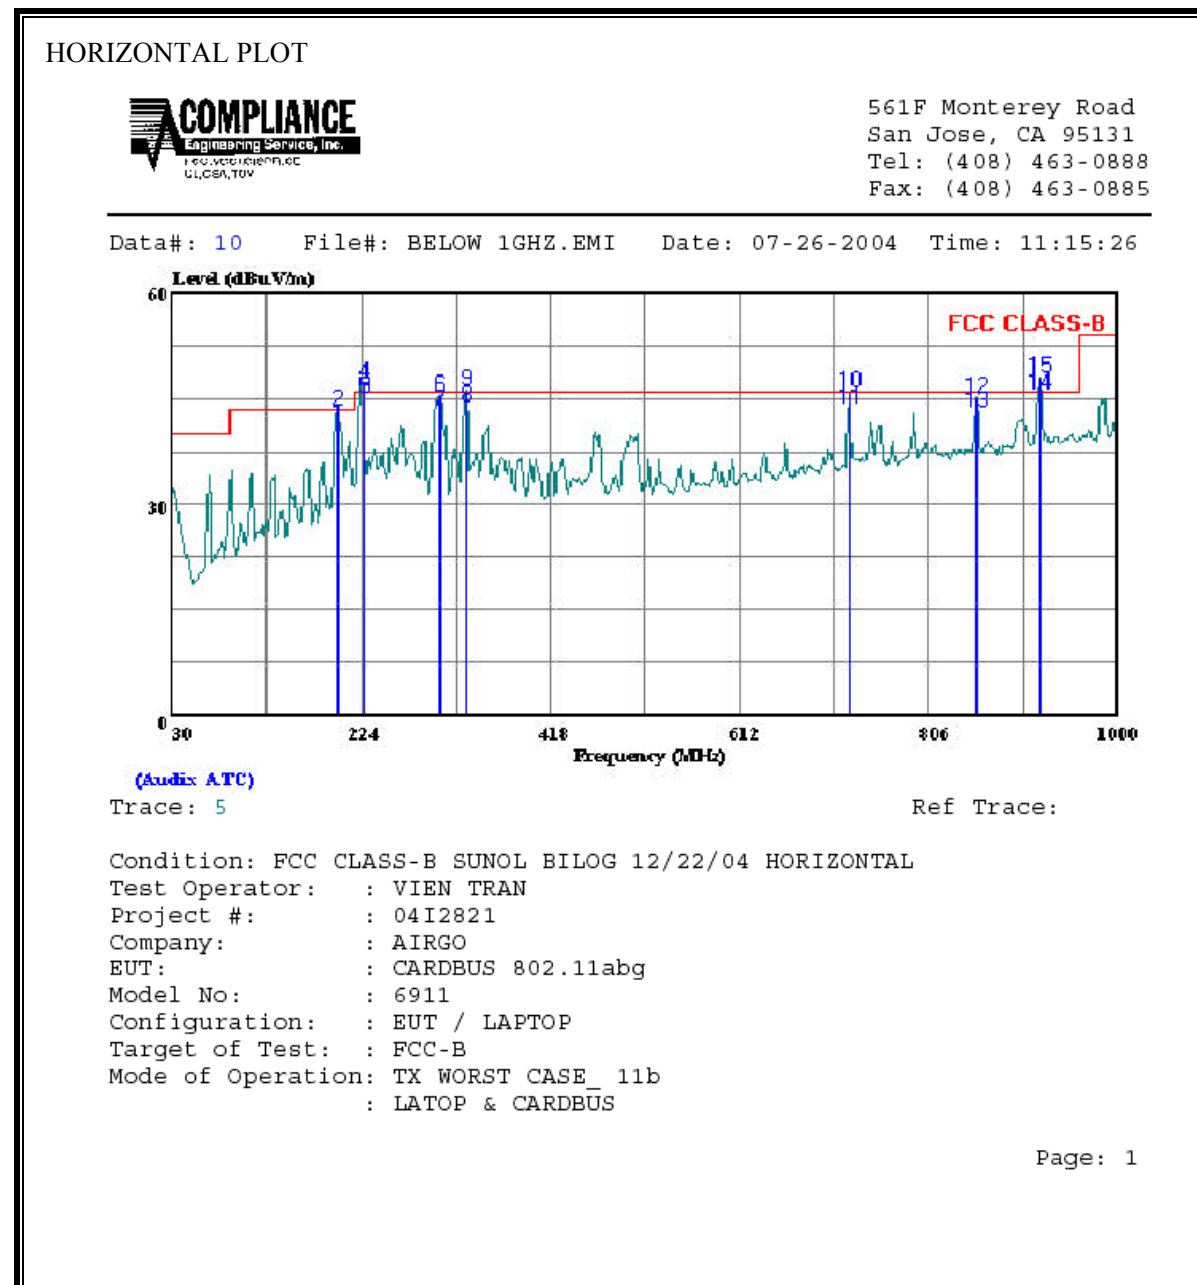

# HORIZONTAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	198.780	QP	27.79	13.58	41.37	43.50	-2.13
2	198.780	Peak	29.79	13.58	43.37	43.50	-0.13
3	225.940	QP	32.05	13.07	45.12	46.00	-0.88
4 *	225.940	Peak	34.25	13.11	47.36	46.00	1.36
5	225.940	QP	32.00	13.07	45.07	46.00	-0.93
6	305.480	Peak	29.46	16.03	45.49	46.00	-0.51
7	305.480	QP	27.46	16.01	43.47	46.00	-2.53
8	332.640	QP	27.40	16.54	43.94	46.00	-2.06
9 *	332.640	Peak	29.64	16.54	46.18	46.00	0.18
10	725.490	Peak	21.71	24.23	45.94	46.00	-0.06
11	725.490	QP	19.50	24.22	43.72	46.00	-2.28
12	856.440	Peak	19.66	25.55	45.21	46.00	-0.79
13	856.440	QP	17.46	25.53	42.99	46.00	-3.01
14	921.430	QP	19.03	26.63	45.66	46.00	-0.34
15 *	921.430	Peak	21.23	26.73	47.97	46.00	1.96


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

VERTICAL PLOT



561F Monterey Road  
San Jose, CA 95131  
Tel: (408) 463-0888  
Fax: (408) 463-0885

Data#: 2 File#: BELOW 1GHZ.EMI Date: 07-26-2004 Time: 09:54:00

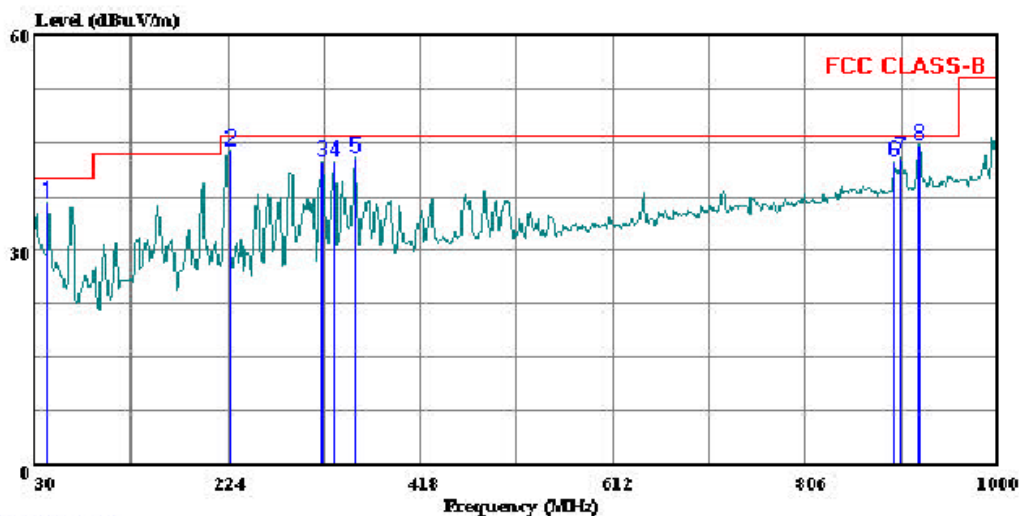

(Auxiliary ATC)

Trace: 1

Ref Trace:

Condition: FCC CLASS-B SUNOL BILOG 12/22/04 VERTICAL  
Test Operator: : VIEN TRAN  
Project #: : 04I2821  
Company: : AIRGO  
EUT: : CARDBUS 802.11abg  
Model No: :  
Configuration: : EUT / LAPTOP  
Target of Test: : FCC-B  
Mode of Operation: TX WORST CASE\_ 2.4GHZ BAND

Page: 1

VERTICAL DATA

	Freq	Remark	Read Level	Factor	Level	Limit Line	Over Limit
	MHz		dBuV	dB	dBuV/m	dBuV/m	dB
1	43.580	Peak	23.06	13.58	36.64	40.00	-3.36
2	225.940	Peak	30.80	13.11	43.91	46.00	-2.09
3	320.030	Peak	26.04	16.23	42.27	46.00	-3.73
4	332.640	Peak	25.75	16.54	42.29	46.00	-3.71
5	352.040	Peak	25.95	16.91	42.86	46.00	-3.14
6	895.240	Peak	16.19	26.12	42.31	46.00	-3.69
7	902.030	Peak	16.78	26.21	42.99	46.00	-3.01
8	921.430	Peak	17.85	26.73	44.59	46.00	-1.42

## 7.7. POWERLINE CONDUCTED EMISSIONS

### LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

No non-compliance noted:




# **6 WORST EMISSIONS**

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	54.70	--	17.33	0.00	66.00	56.00	-11.30	-38.67	L1
0.26	50.04	--	37.84	0.00	62.91	52.91	-12.87	-15.07	L1
6.15	48.14	--	16.74	0.00	60.00	50.00	-11.86	-33.26	L1
0.15	52.24	--	10.89	0.00	66.00	56.00	-13.76	-45.11	L2
5.74	46.66	--	22.17	0.00	60.00	50.00	-13.34	-27.83	L2
0.25	46.60	--	37.26	0.00	63.20	53.20	-16.60	-15.94	L2
6 Worst Data									




## LINE 2 RESULTS

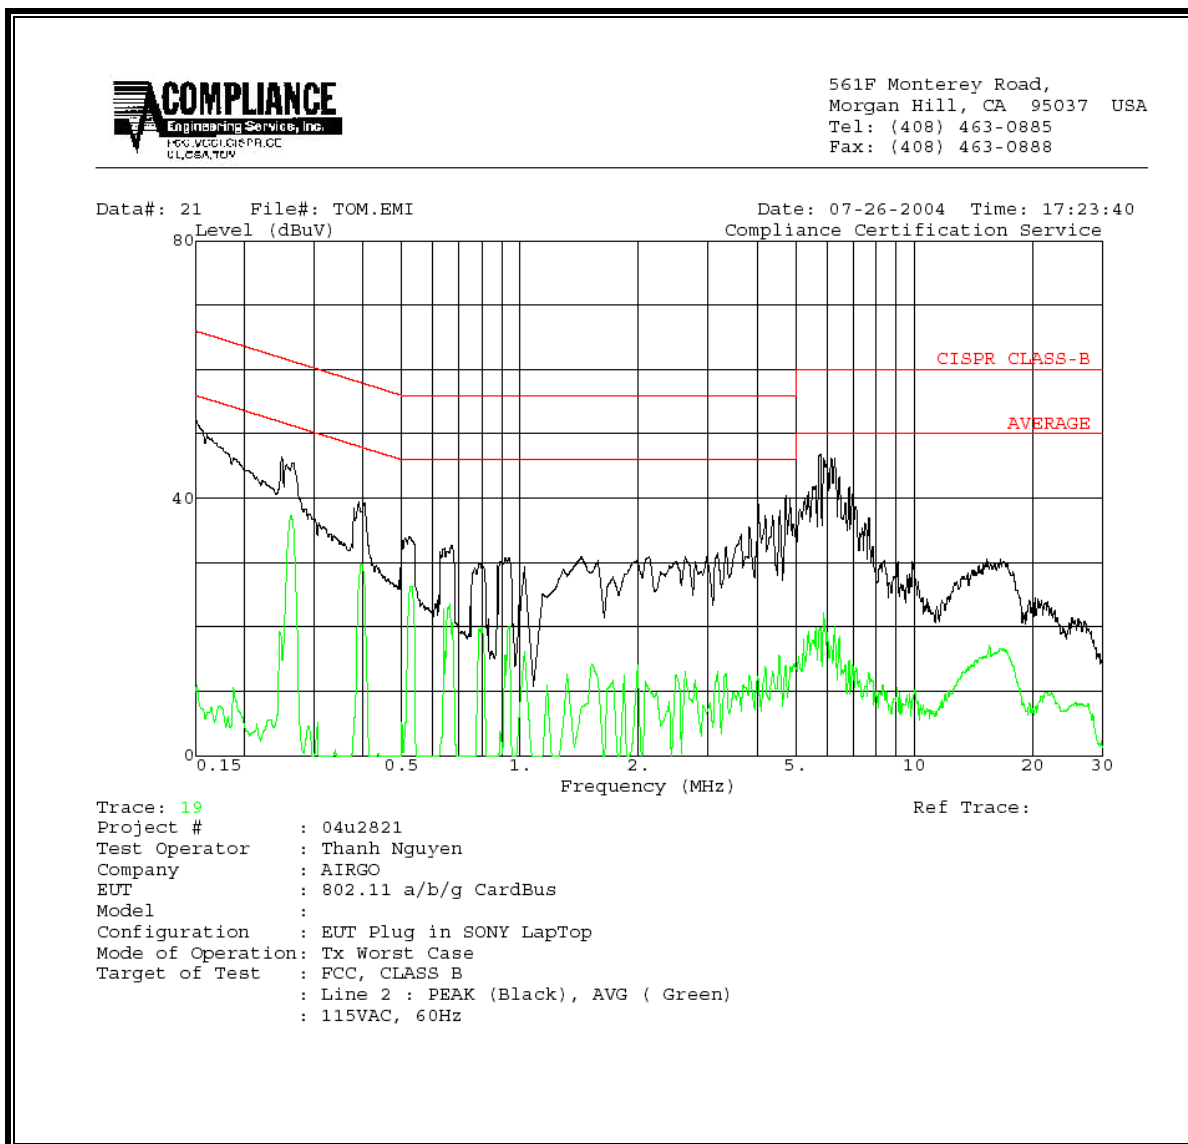

## 8. SETUP PHOTOS

### ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

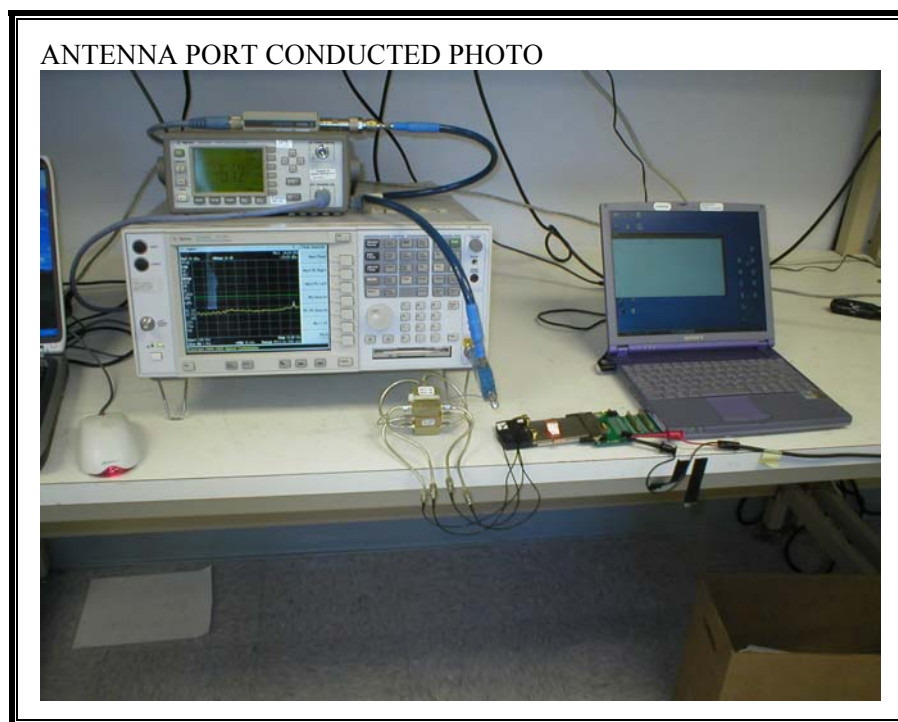


**RADIATED RF MEASUREMENT SETUP**



RADIATED BACK PHOTO



**POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP**

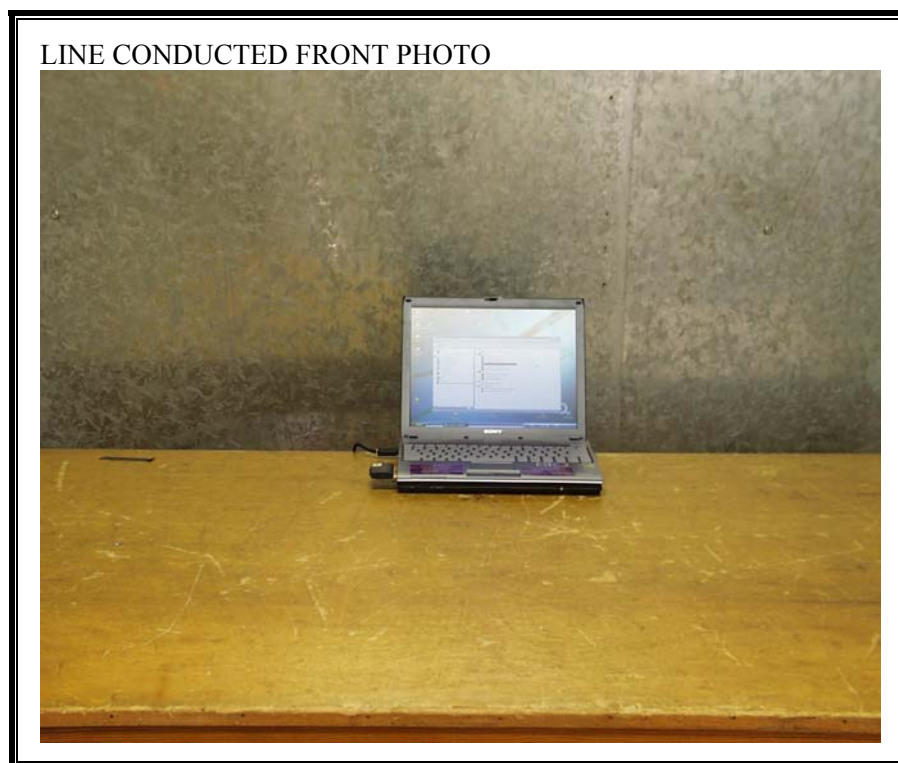



LINE CONDUCTED BACK PHOTO



**END OF REPORT**