

# TEST REPORT

**Application No.:** SZCR2302000478AT  
**Applicant:** Harman International Industries, Inc.  
**Address of Applicant:** 8500 Balboa Boulevard, Northridge, California, 91329, United States  
**Manufacturer:** Harman International Industries, Inc.  
**Address of Manufacturer:** 8500 Balboa Boulevard, Northridge, California, 91329, United States  
**Equipment Under Test (EUT):**  
**EUT Name:** Wireless Speaker  
**Model No.:** Authentics 300  
**Trade Mark:** JBL  
**FCC ID:** APIAUTH300  
**Standard(s) :** 47 CFR Part 15, Subpart C 15.247  
**Date of Receipt:** 2023-02-24  
**Date of Test:** 2023-03-23 to 2023-05-04  
**Date of Issue:** 2023-05-12

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.

*Keny Xu*

Keny Xu  
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-g-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention:** To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 2 of 352

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2023-05-12 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |  |  |  |
|--------------------------|--|--|--|--|
| Authorized for issue by: |  |  |  |  |
|                          |  |   |  |  |
|                          |  | Charlie Dai/Project Engineer   |  |  |
|                          |  |  |  |  |
|                          |  | Eric Fu/Reviewer   |  |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |   |        |
|--------------------------------------|----------------------------------|--------|---|--------|
| Item                                 | Standard                         | Method | Requirement                                     | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart C 15.247 | N/A    | 47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                      |   |        |
|---|----------------------------------|--------------------------------------|---|--------|
| Item  | Standard                         | Method                               | Requirement                               | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart C 15.247 | ANSI C63.10 (2013) Section 6.2       | 47 CFR Part 15, Subpart C 15.207          | Pass   |
| Conducted Peak Output Power                           |                                  | ANSI C63.10 (2013) Section 11.9.2    | 47 CFR Part 15, Subpart C 15.247(b)(3)    | Pass   |
| Minimum 6dB Bandwidth                                 |                                  | ANSI C63.10 (2013) Section 11.8.1    | 47 CFR Part 15, Subpart C 15.247a(2)      | Pass   |
| Power Spectrum Density                                |                                  | ANSI C63.10 (2013) Section 11.10.2   | 47 CFR Part 15, Subpart C 15.247(e)       | Pass   |
| Conducted Band Edges Measurement                      |                                  | ANSI C63.10 (2013) Section 11.13.3.2 | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Conducted Spurious Emissions                          |                                  | ANSI C63.10 (2013) Section 11.11     | 47 CFR Part 15, Subpart C 15.247(d)       | Pass   |
| Radiated Emissions which fall in the restricted bands |                                  | ANSI C63.10 (2013) Section 6.10.5    | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions Below 1GHz                |                                  | ANSI C63.10 (2013) Section 6.4,6.5   | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |
| Radiated Spurious Emissions Above 1GHz                |                                  | ANSI C63.10 (2013) Section 6.6       | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass   |



## 3 Contents

|   | Page |
|---|------|
| 1 Cover Page .....  | 1    |
| 2 Test Summary .....  | 3    |
| 3 Contents .....  | 4    |
| 4 General Information .....                                   | 6    |
| 4.1 Details of E.U.T. ....                                    | 6    |
| 4.2 Description of Support Units .....                        | 6    |
| 4.3 Measurement Uncertainty .....                             | 6    |
| 4.4 Test Location .....                                       | 8    |
| 4.5 Test Facility .....                                       | 8    |
| 4.6 Deviation from Standards .....                            | 8    |
| 4.7 Abnormalities from Standard Conditions .....              | 8    |
| 5 Equipment List .....  | 9    |
| 6 Radio Spectrum Technical Requirement .....                  | 12   |
| 6.1 Antenna Requirement .....                                 | 12   |
| 6.1.1 Test Requirement: .....                                 | 12   |
| 6.1.2 Conclusion .....  | 12   |
| 7 Radio Spectrum Matter Test Results .....                    | 13   |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) ..... | 13   |
| 7.1.1 E.U.T. Operation .....                                  | 13   |
| 7.1.2 Test Mode Description .....                             | 13   |
| 7.1.3 Test Setup Diagram .....                                | 14   |
| 7.1.4 Measurement Procedure and Data .....                    | 14   |
| 7.2 Conducted Peak Output Power .....                         | 17   |
| 7.2.1 E.U.T. Operation .....                                  | 17   |
| 7.2.2 Test Mode Description .....                             | 17   |
| 7.2.3 Test Setup Diagram .....                                | 18   |
| 7.2.4 Measurement Procedure and Data .....                    | 18   |
| 7.3 Minimum 6dB Bandwidth .....                               | 19   |
| 7.3.1 E.U.T. Operation .....                                  | 19   |
| 7.3.2 Test Mode Description .....                             | 19   |
| 7.3.3 Test Setup Diagram .....                                | 19   |
| 7.3.4 Measurement Procedure and Data .....                    | 19   |
| 7.4 Power Spectrum Density .....                              | 20   |
| 7.4.1 E.U.T. Operation .....                                  | 20   |
| 7.4.2 Test Mode Description .....                             | 20   |
| 7.4.3 Test Setup Diagram .....                                | 20   |
| 7.4.4 Measurement Procedure and Data .....                    | 20   |
| 7.5 Conducted Band Edges Measurement .....                    | 21   |
| 7.5.1 E.U.T. Operation .....                                  | 21   |



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 5 of 352

|       |   |     |
|-------|---|-----|
| 7.5.2 | Test Mode Description .....                                 | 21  |
| 7.5.3 | Test Setup Diagram .....                                    | 22  |
| 7.5.4 | Measurement Procedure and Data.....                         | 22  |
| 7.6   | Conducted Spurious Emissions .....                          | 23  |
| 7.6.1 | E.U.T. Operation .....                                      | 23  |
| 7.6.2 | Test Mode Description .....                                 | 23  |
| 7.6.3 | Test Setup Diagram .....                                    | 24  |
| 7.6.4 | Measurement Procedure and Data.....                         | 24  |
| 7.7   | Radiated Emissions which fall in the restricted bands ..... | 25  |
| 7.7.1 | E.U.T. Operation .....                                      | 25  |
| 7.7.2 | Test Mode Description .....                                 | 25  |
| 7.7.3 | Test Setup Diagram .....                                    | 26  |
| 7.7.4 | Measurement Procedure and Data.....                         | 27  |
| 7.8   | Radiated Spurious Emissions Below 1GHz.....                 | 108 |
| 7.8.1 | E.U.T. Operation .....                                      | 108 |
| 7.8.2 | Test Mode Description .....                                 | 108 |
| 7.8.3 | Test Setup Diagram .....                                    | 109 |
| 7.8.4 | Measurement Procedure and Data.....                         | 109 |
| 7.9   | Radiated Spurious Emissions Above 1GHz .....                | 112 |
| 7.9.1 | E.U.T. Operation .....                                      | 112 |
| 7.9.2 | Test Mode Description .....                                 | 112 |
| 7.9.3 | Test Setup Diagram .....                                    | 113 |
| 7.9.4 | Measurement Procedure and Data.....                         | 114 |
| 8     | Test Setup Photo .....                                      | 163 |
| 9     | EUT Constructional Details (EUT Photos).....                | 163 |
| 10    | Appendix.....   | 164 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 4 General Information

### 4.1 Details of E.U.T.

|                      |  |
|----------------------|--|
| Power supply:        | Lithium-ion rechargeable battery (DC 3.6V 4800mAh) which can be charged from AC port.<br>AC 100-240V 50/60Hz                               |
| Cable(s):            | AC cable 210cm unshielded without ferrite core   |
| Operation Frequency: | 802.11b/g/n(HT20)/ax(HEW20): 2412MHz to 2462MHz;<br>802.11n(HT40)/ax(HEW40): 2422MHz to 2452MHz  |
| Modulation Type:     | 802.11b: DSSS (CCK, DQPSK, DBPSK); 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK); 802.11ax: OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM) |
| Number of Channels:  | 802.11b/g/n(HT20)/ax(HEW20):11;<br>802.11n(HT40)/ax(HEW40):7   |
| Channel Spacing:     | 5MHz   |
| Antenna Type:        | FPC Antenna  |
| Antenna Gain:        | Antenna 1: 3.9dBi, Antenna 2: 2.94dBi<br>Directional gain: 6.44dBi   |

Remark1: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

Remark2: Regarding the AX section, only the data of Full RU and the worst RU26 were retained in the report.

### 4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|-------------|--------------|-----------|------------|
| --          | --           | --        | --         |

The EUT has been tested as an independent unit.

### 4.3 Measurement Uncertainty

| Test Item   | Measurement Uncertainty  |
|---|--|
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | $\pm 3.0\text{dB}$ (150kHz to 30MHz)                             |
| Conducted Peak Output Power                           | $\pm 0.75\text{dB}$  |
| Minimum 6dB Bandwidth                                 | $\pm 3\%$  |
| Power Spectrum Density                                | $\pm 2.84\text{dB}$  |
| Conducted Band Edges Measurement                      | $\pm 0.75\text{dB}$  |
| Conducted Spurious Emissions                          | $\pm 0.75\text{dB}$  |
| Radiated Emissions which fall in the restricted bands | $\pm 4.5\text{dB}$ (Below 1GHz); $\pm 4.8\text{dB}$ (Above 1GHz) |
| Radiated Spurious Emissions Below 1GHz                | $\pm 4.5\text{dB}$   |
| Radiated Spurious Emissions Above 1GHz                | $\pm 4.8\text{dB}$   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 7 of 352

## Remark:

The  $U_{lab}$  (lab Uncertainty) is less than  $U_{CISPR/ETSI}$  (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 8 of 352

### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

#### • VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

#### • FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

#### • Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

### 4.6 Deviation from Standards

None

### 4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



## 5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) |                  |                  |               |            |              |
|---|------------------|------------------|---------------|------------|--------------|
| Equipment   | Manufacturer     | Model No.        | Inventory No. | Cal Date   | Cal Due Date |
| Shielding Room                                      | ZhongYu Electron | GB-88            | SEM001-06     | 2022-05-14 | 2025-05-13   |
| EMI Test Receiver                                   | Rohde&Schwarz    | ESCI             | SEM004-02     | 2023-03-20 | 2024-03-19   |
| Measurement Software                                | AUDIX            | e3 V8.2014-6-27a | N/A           | N/A        | N/A          |
| Coaxial Cable                                       | SGS              | N/A              | SEM024-01     | 2022-07-08 | 2023-07-07   |
| LISN  | Rohde&Schwarz    | ENV216           | SEM007-01     | 2022-09-20 | 2023-09-19   |
| LISN  | ETS-LINDGREN     | 3816/2           | SEM007-02     | 2023-03-20 | 2024-03-19   |

| Conducted Peak Output Power |              |               |               |                          |                          |
|-----------------------------|--------------|---------------|---------------|--------------------------|--------------------------|
| Equipment                   | Manufacturer | Model No.     | Inventory No. | Cal Date                 | Cal Due Date             |
| DC Power Supply             | Chroma       | 62012P-80-60  | SEM011-11     | 2022-10-20               | 2023-10-19               |
| MXA Signal Analyzer         | KEYSIGHT     | N9020A        | SEM004-19     | 2023-03-21               | 2024-03-20               |
| Measurement Software        | TST PASS     | TST PASS V2.0 | N/A           | N/A                      | N/A                      |
| Coaxial Cable               | SGS          | N/A           | SEM031-01     | 2022-07-08               | 2023-07-07               |
| Attenuator                  | Huber+Suhner | 6620_SMA-50-1 | SEM021-09     | 2022-04-01<br>2023-03-31 | 2023-03-31<br>2024-03-30 |
| Power Sensor                | TST PASS     | TSPS2023R     | SEM009-26     | 2022-04-02<br>2023-04-01 | 2023-04-01<br>2024-03-31 |
| Power Sensor                | KEYSIGHT     | U2021XA       | SEM009-16     | 2023-03-21               | 2024-03-20               |

| Minimum 6dB Bandwidth |              |               |               |                          |                          |
|-----------------------|--------------|---------------|---------------|--------------------------|--------------------------|
| Equipment             | Manufacturer | Model No.     | Inventory No. | Cal Date                 | Cal Due Date             |
| DC Power Supply       | Chroma       | 62012P-80-60  | SEM011-11     | 2022-10-20               | 2023-10-19               |
| MXA Signal Analyzer   | KEYSIGHT     | N9020A        | SEM004-19     | 2023-03-21               | 2024-03-20               |
| Measurement Software  | TST PASS     | TST PASS V2.0 | N/A           | N/A                      | N/A                      |
| Coaxial Cable         | SGS          | N/A           | SEM031-01     | 2022-07-08               | 2023-07-07               |
| Attenuator            | Huber+Suhner | 6620_SMA-50-1 | SEM021-09     | 2022-04-01<br>2023-03-31 | 2023-03-31<br>2024-03-30 |

| Power Spectrum Density |              |              |               |            |              |
|------------------------|--------------|--------------|---------------|------------|--------------|
| Equipment              | Manufacturer | Model No.    | Inventory No. | Cal Date   | Cal Due Date |
| DC Power Supply        | Chroma       | 62012P-80-60 | SEM011-11     | 2022-10-20 | 2023-10-19   |
| MXA Signal Analyzer    | KEYSIGHT     | N9020A       | SEM004-19     | 2023-03-21 | 2024-03-20   |
| Measurement Software   | TST PASS     | TST PASS     | N/A           | N/A        | N/A          |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 83071443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 10 of 352

|               |              |               |           |                          |                          |
|---------------|--------------|---------------|-----------|--------------------------|--------------------------|
|               |              | V2.0          |           |                          |                          |
| Coaxial Cable | SGS          | N/A           | SEM031-01 | 2022-07-08               | 2023-07-07               |
| Attenuator    | Huber+Suhner | 6620_SMA-50-1 | SEM021-09 | 2022-04-01<br>2023-03-31 | 2023-03-31<br>2024-03-30 |

## Conducted Band Edges Measurement

| Equipment            | Manufacturer | Model No.     | Inventory No. | Cal Date                 | Cal Due Date             |
|----------------------|--------------|---------------|---------------|--------------------------|--------------------------|
| DC Power Supply      | Chroma       | 62012P-80-60  | SEM011-11     | 2022-10-20               | 2023-10-19               |
| MXA Signal Analyzer  | KEYSIGHT     | N9020A        | SEM004-19     | 2023-03-21               | 2024-03-20               |
| Measurement Software | TST PASS     | TST PASS V2.0 | N/A           | N/A                      | N/A                      |
| Coaxial Cable        | SGS          | N/A           | SEM031-01     | 2022-07-08               | 2023-07-07               |
| Attenuator           | Huber+Suhner | 6620_SMA-50-1 | SEM021-09     | 2022-04-01<br>2023-03-31 | 2023-03-31<br>2024-03-30 |

## Conducted Spurious Emissions

| Equipment            | Manufacturer | Model No.     | Inventory No. | Cal Date                 | Cal Due Date             |
|----------------------|--------------|---------------|---------------|--------------------------|--------------------------|
| DC Power Supply      | Chroma       | 62012P-80-60  | SEM011-11     | 2022-10-20               | 2023-10-19               |
| MXA Signal Analyzer  | KEYSIGHT     | N9020A        | SEM004-19     | 2023-03-21               | 2024-03-20               |
| Measurement Software | TST PASS     | TST PASS V2.0 | N/A           | N/A                      | N/A                      |
| Coaxial Cable        | SGS          | N/A           | SEM031-01     | 2022-07-08               | 2023-07-07               |
| Attenuator           | Huber+Suhner | 6620_SMA-50-1 | SEM021-09     | 2022-04-01<br>2023-03-31 | 2023-03-31<br>2024-03-30 |

## Radiated Emissions which fall in the restricted bands

| Equipment                  | Manufacturer                       | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
|----------------------------|------------------------------------|-----------------|---------------|------------|--------------|
| 3m Semi-Anechoic Chamber   | AUDIX                              | N/A             | SEM001-02     | 2022-04-02 | 2025-04-01   |
| Signal Analyzer            | Rohde & Schwarz                    | FSV40           | SEM008-04     | 2023-03-20 | 2024-03-19   |
| Horn Antenna               | Rohde&Schwarz                      | HF907           | SEM003-07     | 2022-07-24 | 2024-07-23   |
| Microwave system amplifier | Agilent                            | 83017A          | SEM005-25     | 2022-09-21 | 2023-09-20   |
| Measurement Software       | AUDIX                              | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable              | SGS                                | N/A             | SEM026-01     | 2022-07-08 | 2023-07-07   |
| Broad-Band Horn Antenna    | Schwarzbeck                        | BBHA 9170       | SEM003-15     | 2022-08-10 | 2024-08-09   |
| Pre-Amplifier              | Compliance Directions Systems Inc. | PAP-2640-50     | SEM005-08     | 2023-03-20 | 2024-03-19   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch, China, SGS-CSTC Laboratory.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 11 of 352

| Radiated Spurious Emissions Below 1GHz |                      |                 |               |            |              |
|--|----------------------|-----------------|---------------|------------|--------------|
| Equipment                              | Manufacturer         | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
| Loop Antenna                           | ETS-Lindgren         | 6502            | SEM003-08     | 2021-11-30 | 2023-11-29   |
| 3m Semi-Anechoic Chamber               | ETS-LINDGREN         | N/A             | SEM001-01     | 2020-07-19 | 2023-07-18   |
| MXE EMI Receiver                       | Agilent Technologies | N9038A          | SEM004-15     | 2022-10-20 | 2023-10-19   |
| BiConiLog Antenna                      | ETS-LINDGREN         | 3142C           | SEM003-01     | 2021-09-17 | 2023-09-16   |
| Pre-Amplifier                          | Agilent Technologies | 8447D           | SEM005-01     | 2023-03-20 | 2024-03-19   |
| Measurement Software                   | AUDIX                | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable                          | SGS                  | N/A             | SEM025-01     | 2022-07-08 | 2023-07-07   |

| Radiated Spurious Emissions Above 1GHz |                 |                 |               |            |              |
|--|-----------------|-----------------|---------------|------------|--------------|
| Equipment                              | Manufacturer    | Model No.       | Inventory No. | Cal Date   | Cal Due Date |
| 3m Semi-Anechoic Chamber               | AUDIX           | N/A             | SEM001-02     | 2022-04-02 | 2025-04-01   |
| Signal Analyzer                        | Rohde & Schwarz | FSV40           | SEM008-04     | 2023-03-20 | 2024-03-19   |
| Horn Antenna                           | Rohde&Schwarz   | HF907           | SEM003-07     | 2022-07-24 | 2024-07-23   |
| Microwave system amplifier             | Agilent         | 83017A          | SEM005-25     | 2022-09-21 | 2023-09-20   |
| Measurement Software                   | AUDIX           | e3 V8.2014-6-27 | N/A           | N/A        | N/A          |
| Coaxial Cable                          | SGS             | N/A             | SEM026-01     | 2022-07-08 | 2023-07-07   |

| General used equipment          |   |           |               |            |              |
|---------------------------------|---|-----------|---------------|------------|--------------|
| Equipment                       | Manufacturer                              | Model No. | Inventory No. | Cal Date   | Cal Due Date |
| Humidity/ Temperature Indicator | Mingle                                    | N/A       | SEM002-08     | 2022-09-04 | 2023-09-03   |
| Humidity/ Temperature Indicator | Anymetre                                  | TH101B    | SEM002-09     | 2022-09-04 | 2023-09-03   |
| Barometer                       | Changchun Meteorological Industry Factory | DYM3      | SEM002-01     | 2023-03-23 | 2024-03-22   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (CMAA) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

#### 6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is Antenna 1: 3.9dBi, Antenna 2: 2.94dBi.

Directional gain: 6.44dBi

Antenna location: Refer to internal photo.





## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz)   | Conducted limit(dBμV) |           |
|--|-----------------------|-----------|
|  | Quasi-peak            | Average   |
| 0.15-0.5   | 66 to 56*             | 56 to 46* |
| 0.5-5  | 56                    | 46        |
| 5-30   | 60                    | 50        |
| *Decreases with the logarithm of the frequency.                        |                       |           |
| Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz |                       |           |

#### 7.1.1 E.U.T. Operation

Operating Environment:


Temperature: 23.2 °C Humidity: 50.5 % RH Atmospheric Pressure: 1015 mbar

#### 7.1.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 08        | Charging + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



### 7.1.3 Test Setup Diagram

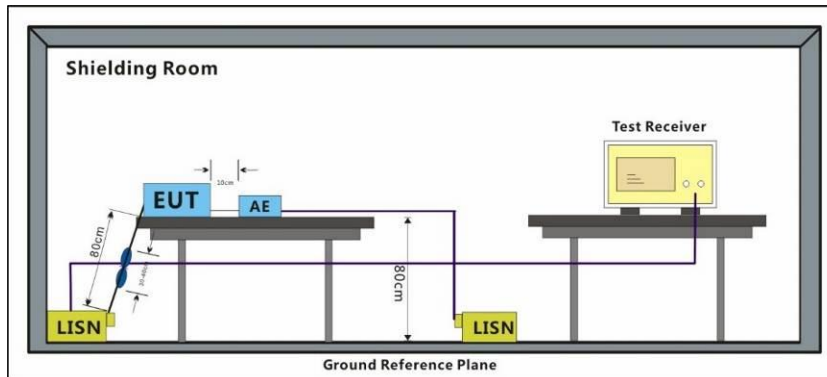


### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor



Test Mode: 08; Line: Live line

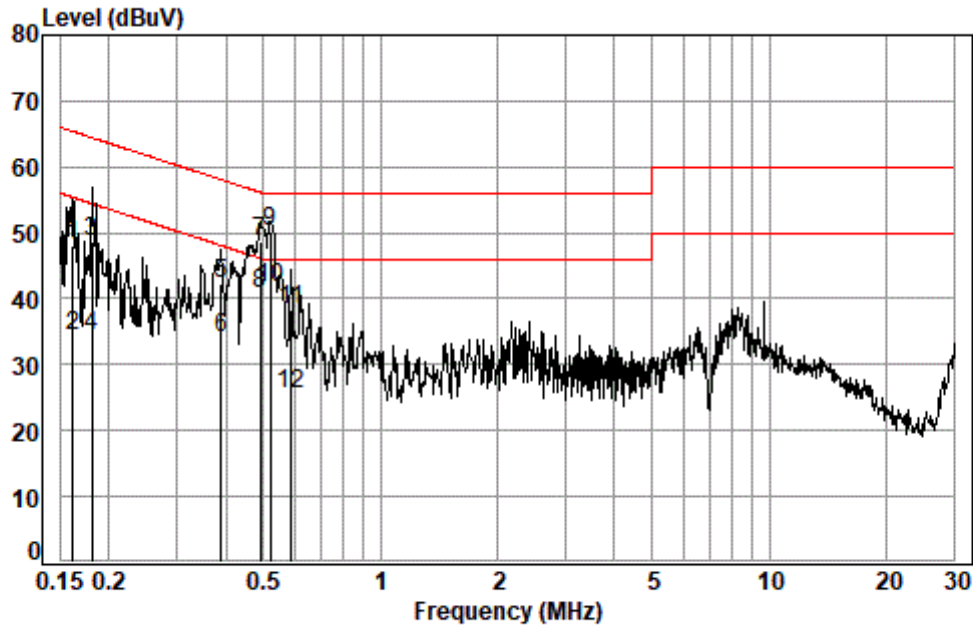

Site : Shielding Room  
Condition: Line  
Job No. : 00478 /00479AT  
Test mode: 08

|      | Freq   | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|------|--------|------------|-------------|------------|-------|------------|------------|---------|
|      | MHz    | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1    | 0.1615 | 0.11       | 9.65        | 38.39      | 48.15 | 65.38      | -17.23     | QP      |
| 2    | 0.1615 | 0.11       | 9.65        | 24.71      | 34.47 | 55.38      | -20.91     | Average |
| 3    | 0.1815 | 0.11       | 9.65        | 38.84      | 48.60 | 64.42      | -15.82     | QP      |
| 4    | 0.1815 | 0.11       | 9.65        | 24.63      | 34.39 | 54.42      | -20.03     | Average |
| 5    | 0.3893 | 0.13       | 9.63        | 32.45      | 42.21 | 58.08      | -15.87     | QP      |
| 6    | 0.3893 | 0.13       | 9.63        | 24.39      | 34.15 | 48.08      | -13.93     | Average |
| 7    | 0.4915 | 0.14       | 9.64        | 38.86      | 48.64 | 56.14      | -7.50      | QP      |
| 8    | 0.4915 | 0.14       | 9.64        | 30.85      | 40.63 | 46.14      | -5.51      | Average |
| 9 *  | 0.5210 | 0.15       | 9.64        | 40.39      | 50.18 | 56.00      | -5.82      | QP      |
| 10 * | 0.5210 | 0.15       | 9.64        | 31.86      | 41.65 | 46.00      | -4.35      | Average |
| 11   | 0.5885 | 0.15       | 9.64        | 28.65      | 38.44 | 56.00      | -17.56     | QP      |
| 12   | 0.5885 | 0.15       | 9.64        | 15.66      | 25.45 | 46.00      | -20.55     | Average |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen) EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Line: Neutral Line

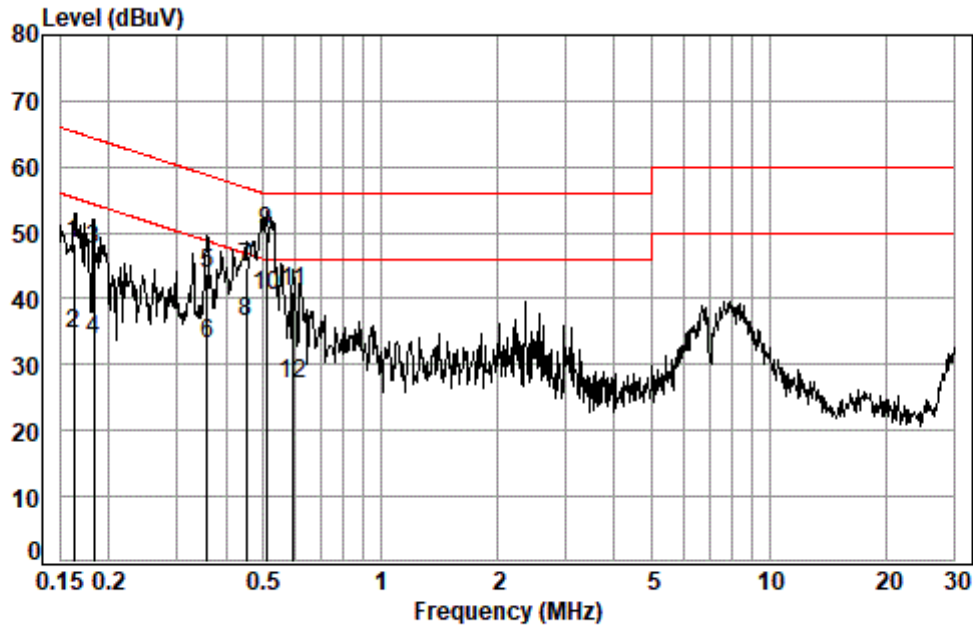

Site : Shielding Room  
Condition: Neutral  
Job No. : 00478 /00479AT  
Test mode: 08

|      | Freq   | Cable Loss | LISN Factor | Read Level | Level | Limit Line | Over Limit | Remark  |
|------|--------|------------|-------------|------------|-------|------------|------------|---------|
|      | MHz    | dB         | dB          | dBuV       | dBuV  | dBuV       | dB         |         |
| 1    | 0.1624 | 0.11       | 9.70        | 38.70      | 48.51 | 65.34      | -16.83     | QP      |
| 2    | 0.1624 | 0.11       | 9.70        | 24.80      | 34.61 | 55.34      | -20.73     | Average |
| 3    | 0.1835 | 0.11       | 9.70        | 37.60      | 47.41 | 64.33      | -16.92     | QP      |
| 4    | 0.1835 | 0.11       | 9.70        | 23.82      | 33.63 | 54.33      | -20.70     | Average |
| 5    | 0.3577 | 0.13       | 9.70        | 33.86      | 43.69 | 58.78      | -15.09     | QP      |
| 6    | 0.3577 | 0.13       | 9.70        | 23.25      | 33.08 | 48.78      | -15.70     | Average |
| 7    | 0.4515 | 0.14       | 9.69        | 34.87      | 44.70 | 56.85      | -12.15     | QP      |
| 8    | 0.4515 | 0.14       | 9.69        | 26.73      | 36.56 | 46.85      | -10.29     | Average |
| 9 *  | 0.5101 | 0.15       | 9.69        | 40.36      | 50.20 | 56.00      | -5.80      | QP      |
| 10 * | 0.5101 | 0.15       | 9.69        | 30.50      | 40.34 | 46.00      | -5.66      | Average |
| 11   | 0.5979 | 0.16       | 9.70        | 31.22      | 41.08 | 56.00      | -14.92     | QP      |
| 12   | 0.5979 | 0.16       | 9.70        | 17.22      | 27.08 | 46.00      | -18.92     | Average |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.2

Limit:

| Frequency range(MHz) | Output power of the intentional radiator(watt)         |
|----------------------|--|
| 902-928              | 1 for $\geq 50$ hopping channels                       |
|                      | 0.25 for $25 \leq$ hopping channels $< 50$             |
|                      | 1 for digital modulation                               |
| 2400-2483.5          | 1 for $\geq 75$ non-overlapping hopping channels       |
|                      | 0.125 for all other frequency hopping systems          |
|                      | 1 for digital modulation                               |
| 5725-5850            | 1 for frequency hopping systems and digital modulation |

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C

Humidity: 51.6 % RH

Atmospheric Pressure: 1015 mbar


### 7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |





### 7.2.3 Test Setup Diagram

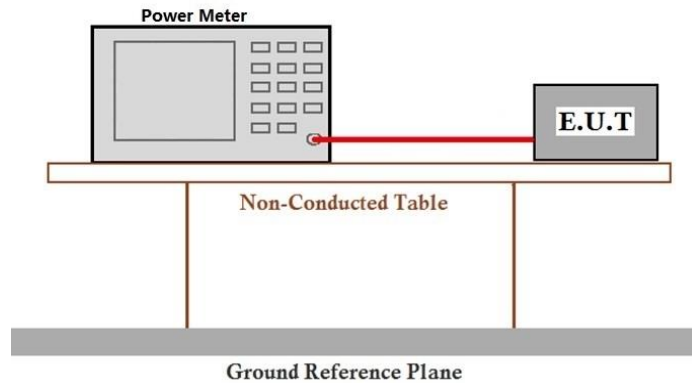

### 7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details





### 7.3 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2013) Section 11.8.1

Limit:

≥500 kHz

#### 7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C


Humidity: 51.6 % RH

Atmospheric Pressure: 1015 mbar

#### 7.3.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

#### 7.3.3 Test Setup Diagram

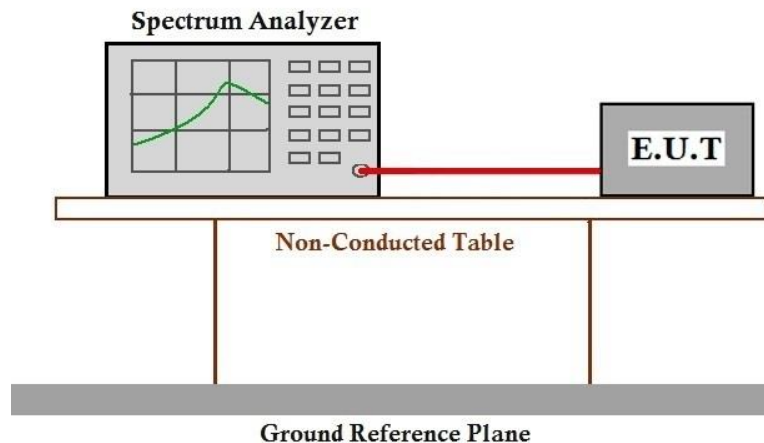

#### 7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

### 7.4 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2013) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

#### 7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C


Humidity: 51.6 % RH

Atmospheric Pressure: 1015 mbar

#### 7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

#### 7.4.3 Test Setup Diagram

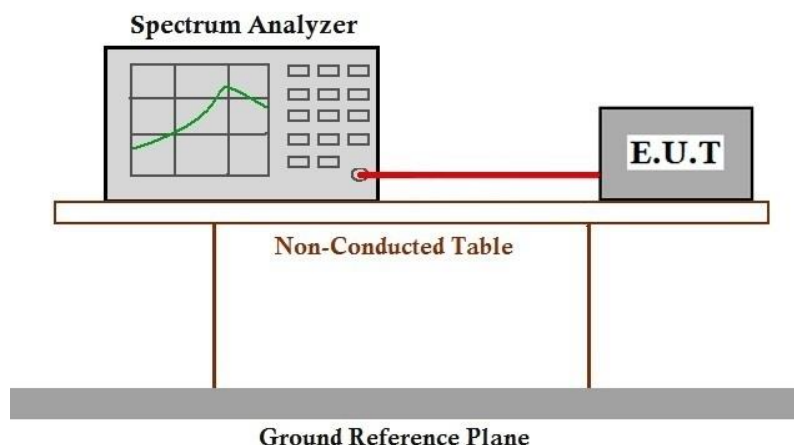

#### 7.4.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)  
Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.5.1 E.U.T. Operation


Operating Environment:

Temperature: 24.1 °C Humidity: 51.6 % RH Atmospheric Pressure: 1015 mbar

### 7.5.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

### 7.5.3 Test Setup Diagram

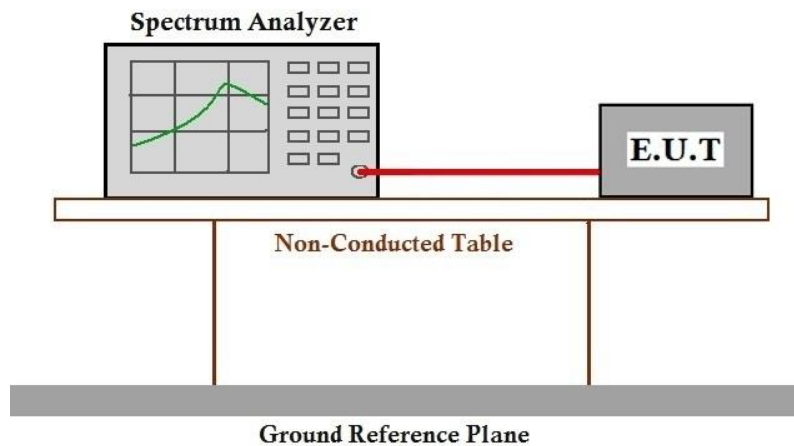

### 7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details





## 7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.1 °C

Humidity: 51.6 % RH


Atmospheric Pressure: 1015 mbar

### 7.6.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Final test            | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



### 7.6.3 Test Setup Diagram

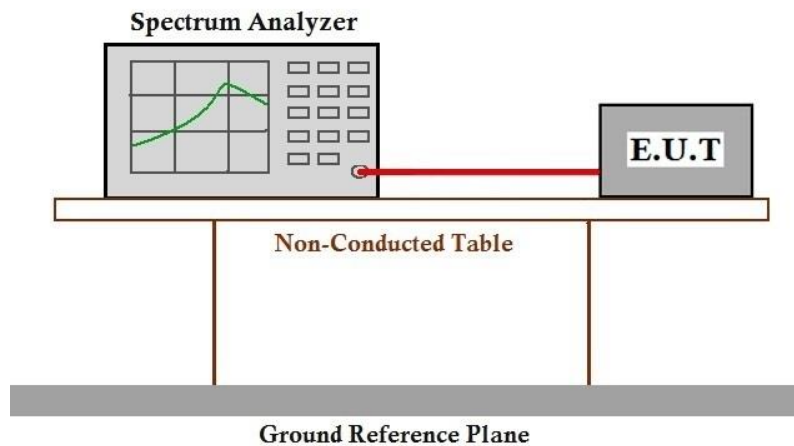

### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



## 7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
 Test Method: ANSI C63.10 (2013) Section 6.10.5  
 Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### 7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 20.8 °C Humidity: 56.3 % RH Atmospheric Pressure: 1015 mbar

### 7.7.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Pre-scan              | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |
| Final test            | 08        | Charging + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

recorded in the report.

### 7.7.3 Test Setup Diagram

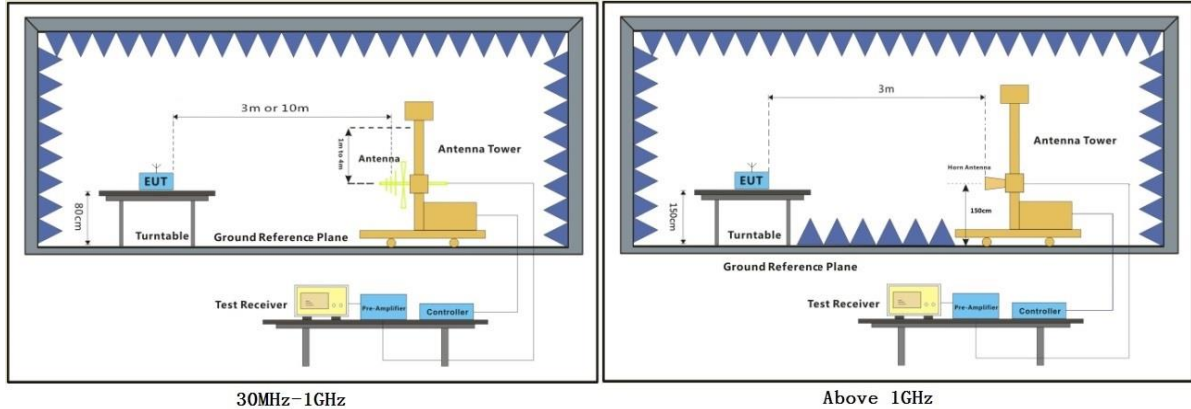

30MHz-1GHz

Above 1GHz



## 7.7.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.





Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

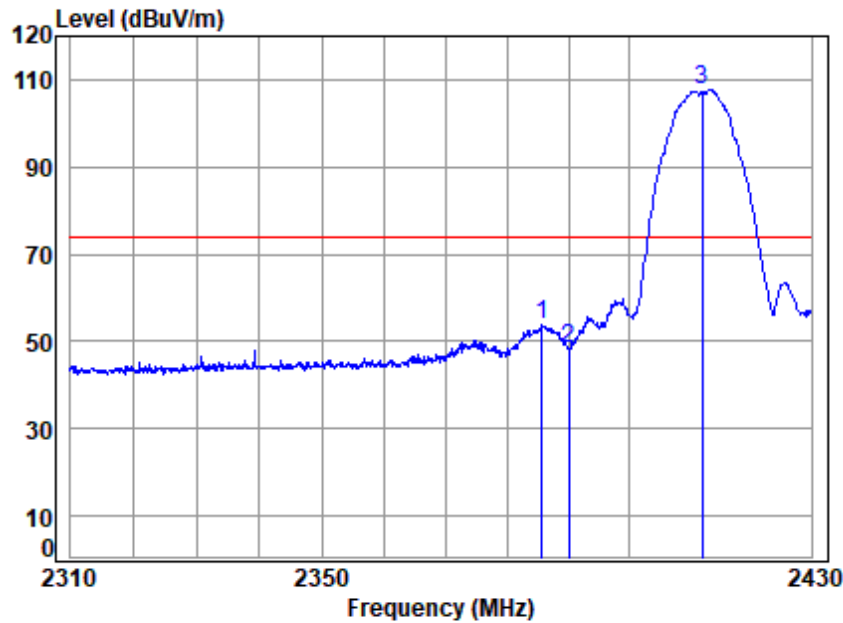


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2385.736 | 4.24  | 28.74  | 35.64  | 56.31  | 53.65  | 74.00  | -20.35 | peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 50.86  | 48.23  | 74.00  | -25.77 | peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 110.24 | 107.75 | 74.00  | 33.75  | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

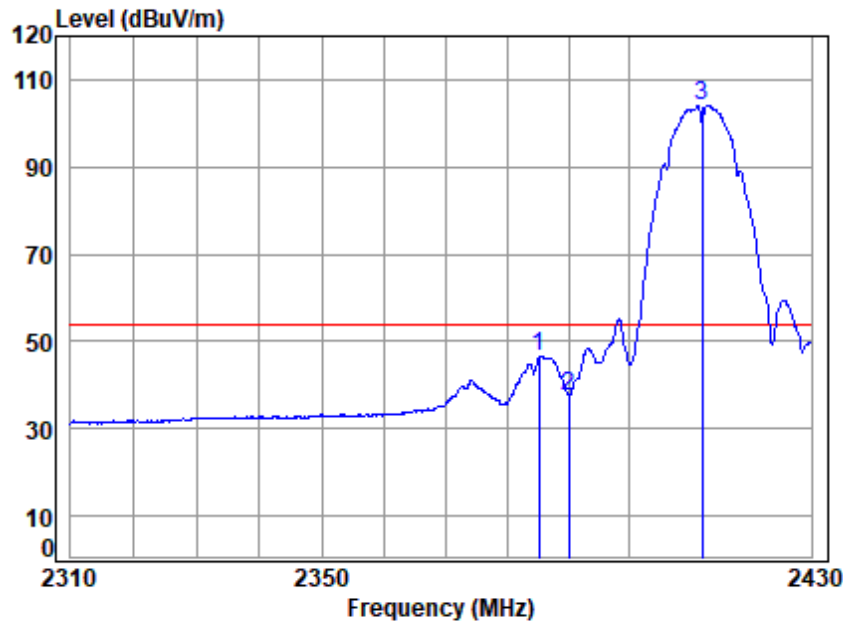


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |         |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |         |
| 1   | 2385.252 | 4.24  | 28.74  | 35.64  | 49.29  | 46.63  | 54.00  | -7.37  | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 40.27  | 37.64  | 54.00  | -16.36 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 106.73 | 104.24 | 54.00  | 50.24  | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

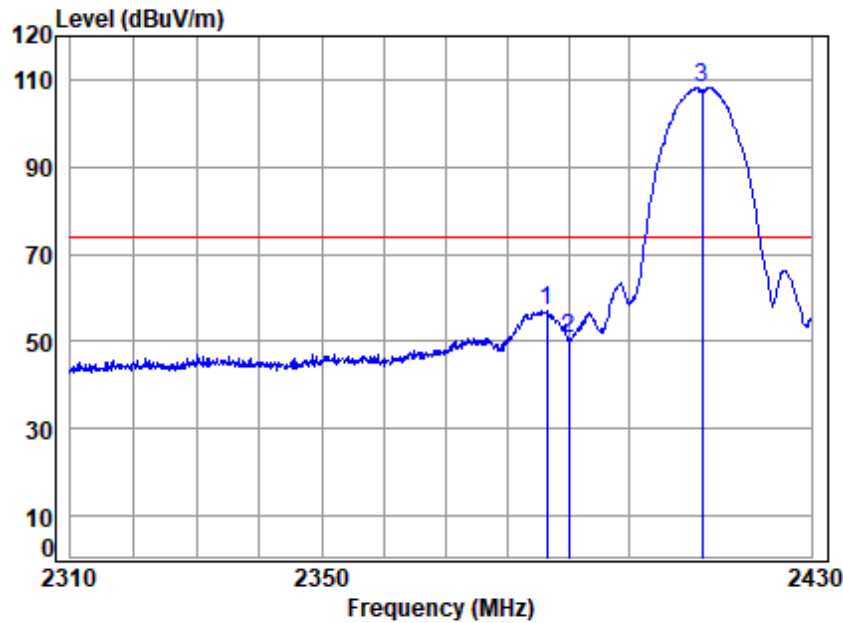


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|-----|----------|-------|--------|--------|--------|--------|--------|--------------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1   | 2386.461 | 4.25  | 28.75  | 35.64  | 59.82  | 57.18  | 74.00  | -16.82 Peak  |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 53.37  | 50.74  | 74.00  | -23.26 Peak  |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 110.72 | 108.23 | 74.00  | 34.23 Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

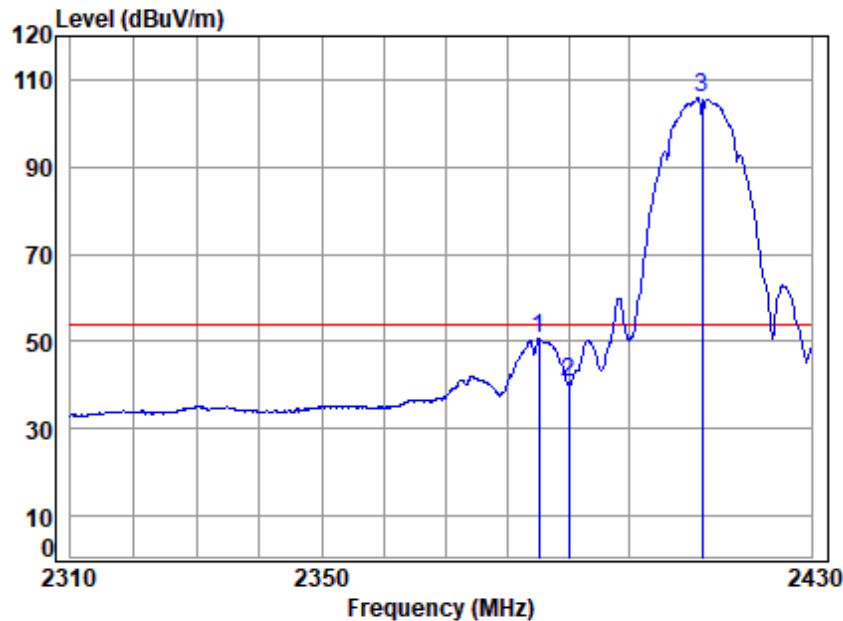


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |                |
|-----|----------|-------|--------|--------|--------|--------|--------|----------------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark   |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB             |
| 1   | 2385.252 | 4.24  | 28.74  | 35.64  | 53.36  | 50.70  | 54.00  | -3.30 Average  |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 43.14  | 40.51  | 54.00  | -13.49 Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 108.22 | 105.73 | 54.00  | 51.73 Average  |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

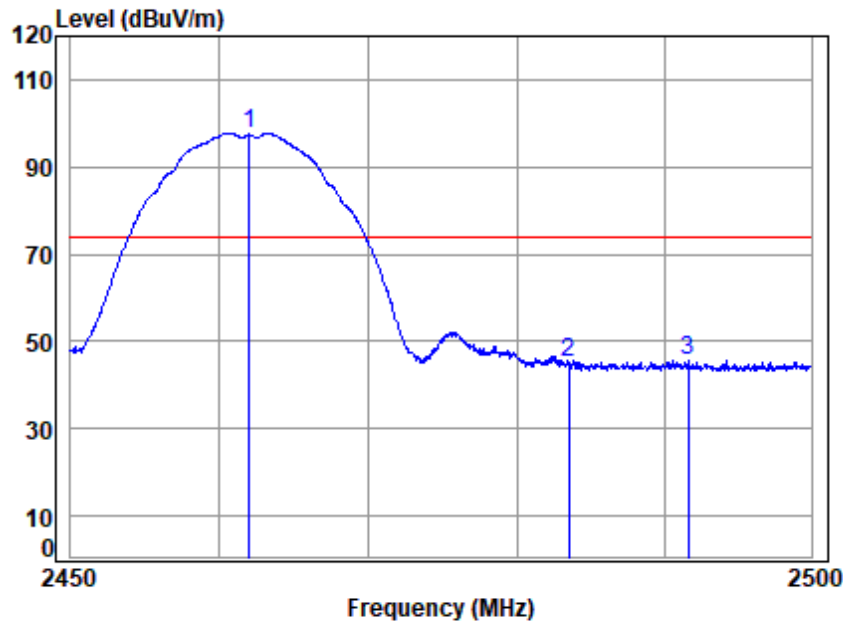


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 99.89 | 97.76  | 74.00  | 23.76  | peak   |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 47.15 | 45.18  | 74.00  | -28.82 | peak   |
| 3   | 2491.630 | 4.35  | 29.35  | 35.61  | 47.63 | 45.72  | 74.00  | -28.28 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

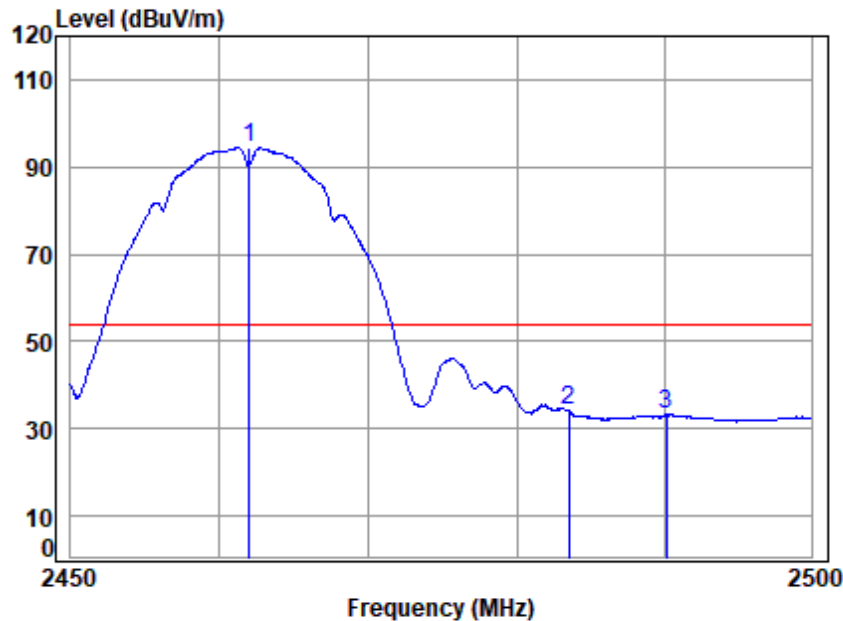


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |         |
|--------------|--|-------|--------|--------|-------|--------|--------|--------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |         |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 96.58 | 94.45  | 54.00  | 40.45  | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 36.02 | 34.05  | 54.00  | -19.95 | Average |
| 3 2490.171   |  | 4.35  | 29.34  | 35.61  | 35.27 | 33.35  | 54.00  | -20.65 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

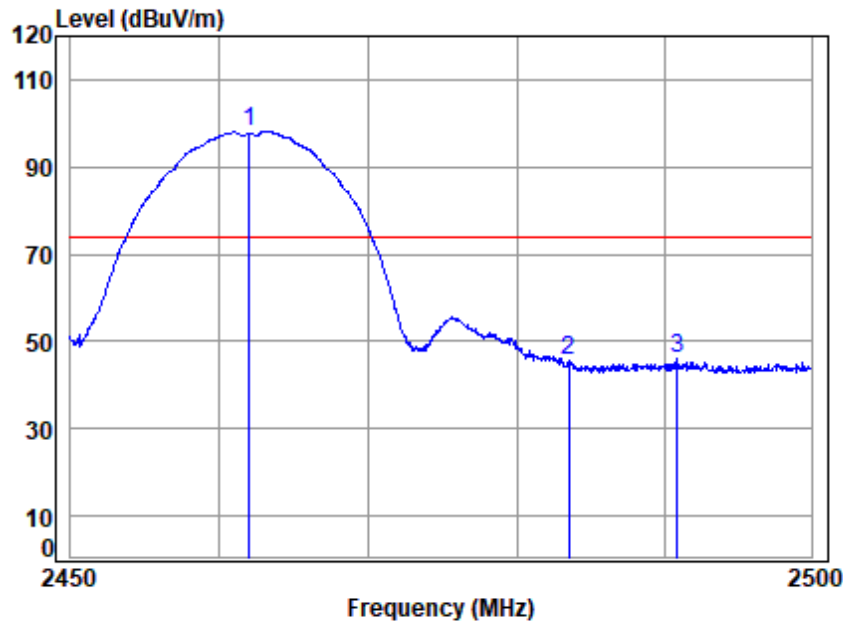


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 100.27 | 98.14  | 74.00  | 24.14  | Peak   |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 47.55  | 45.58  | 74.00  | -28.42 | Peak   |
| 3   | 2490.875 | 4.35  | 29.35  | 35.61  | 47.97  | 46.06  | 74.00  | -27.94 | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

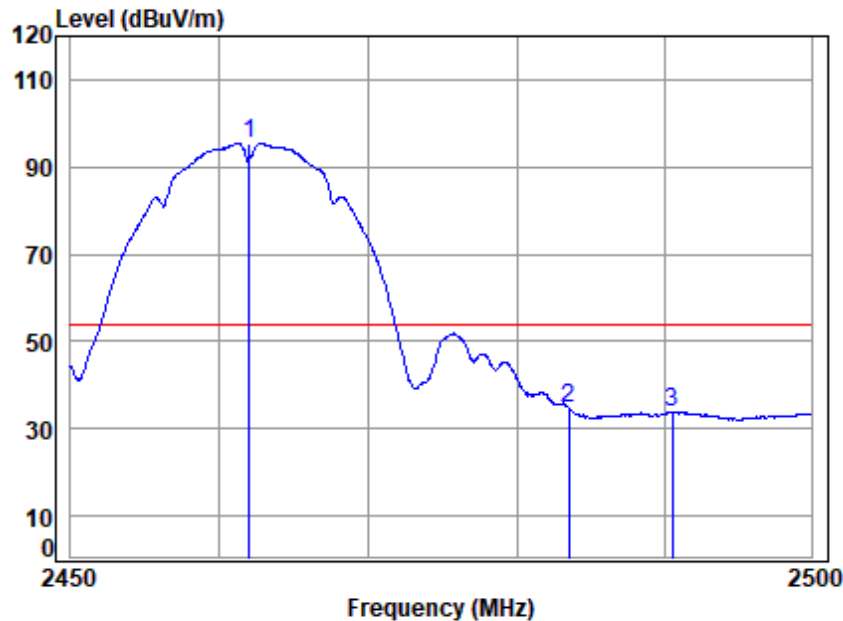


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11B

|              |  | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|--------------|--|-------|--------|--------|-------|--------|--------|----------------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark   |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 97.55 | 95.42  | 54.00  | 41.42 Average  |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 36.78 | 34.81  | 54.00  | -19.19 Average |
| 3 2490.523   |  | 4.35  | 29.34  | 35.61  | 35.82 | 33.90  | 54.00  | -20.10 Average |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

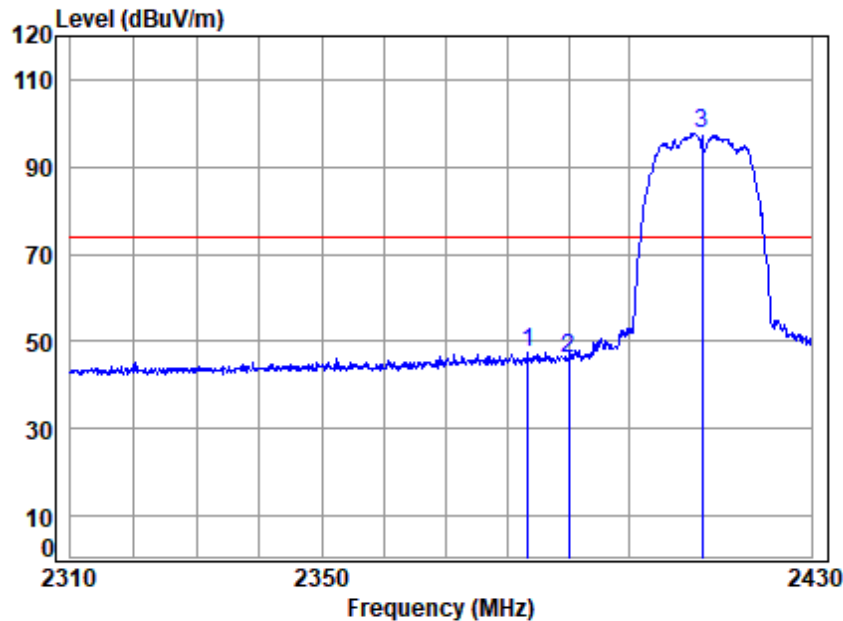


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2383.441 | 4.24  | 28.73  | 35.64  | 49.98  | 47.31  | 74.00  | -26.69 | peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 48.85  | 46.22  | 74.00  | -27.78 | peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 100.08 | 97.59  | 74.00  | 23.59  | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

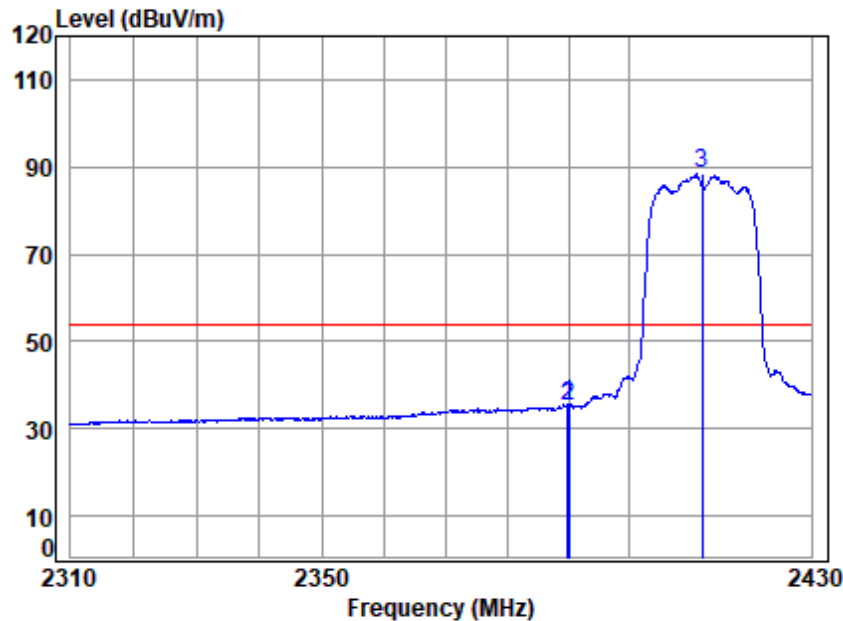


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |         |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |         |
| 1   | 2389.847 | 4.25  | 28.76  | 35.64  | 38.22 | 35.59  | 54.00  | -18.41 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 37.68 | 35.05  | 54.00  | -18.95 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 90.80 | 88.31  | 54.00  | 34.31  | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

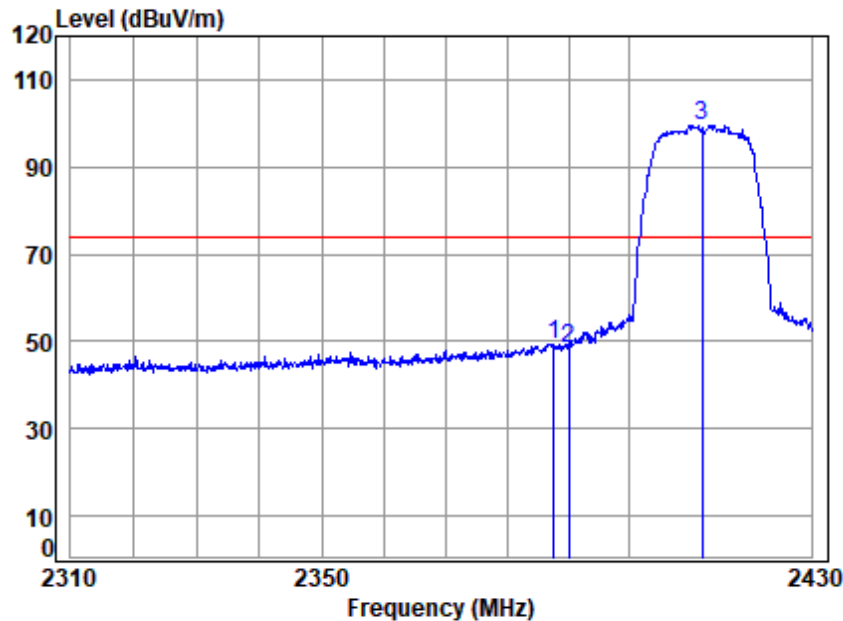


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|-----|----------|-------|--------|--------|--------|--------|--------|--------------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1   | 2387.670 | 4.25  | 28.75  | 35.64  | 52.12  | 49.48  | 74.00  | -24.52 Peak  |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 50.92  | 48.29  | 74.00  | -25.71 Peak  |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 102.17 | 99.68  | 74.00  | 25.68 Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

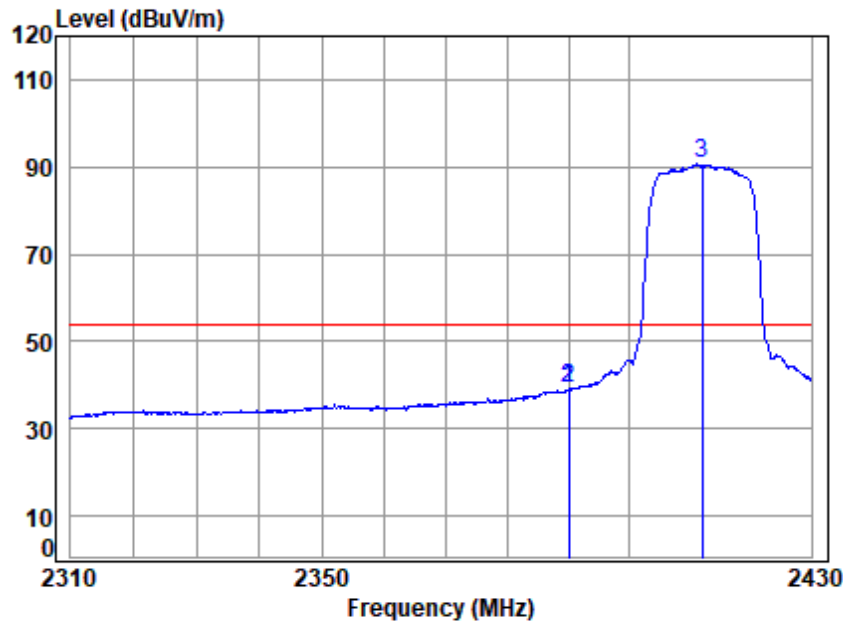


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |         |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |         |
| 1   | 2389.968 | 4.25  | 28.76  | 35.64  | 41.66 | 39.03  | 54.00  | -14.97 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 41.66 | 39.03  | 54.00  | -14.97 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 93.07 | 90.58  | 54.00  | 36.58  | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

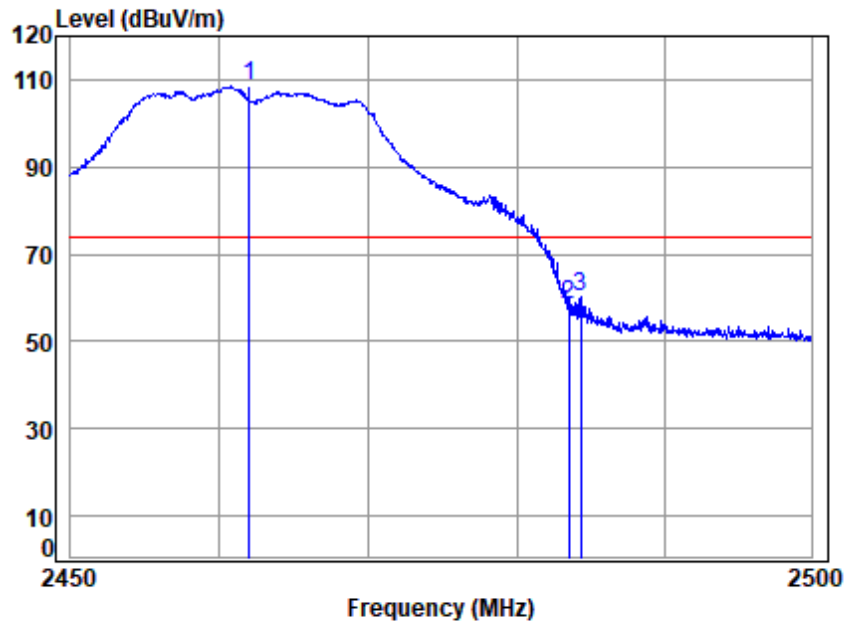


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 110.52 | 108.39 | 74.00  | 34.39  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 60.44  | 58.47  | 74.00  | -15.53 | peak   |
| 3 2484.342   |  | 4.34  | 29.31  | 35.61  | 62.33  | 60.37  | 74.00  | -13.63 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

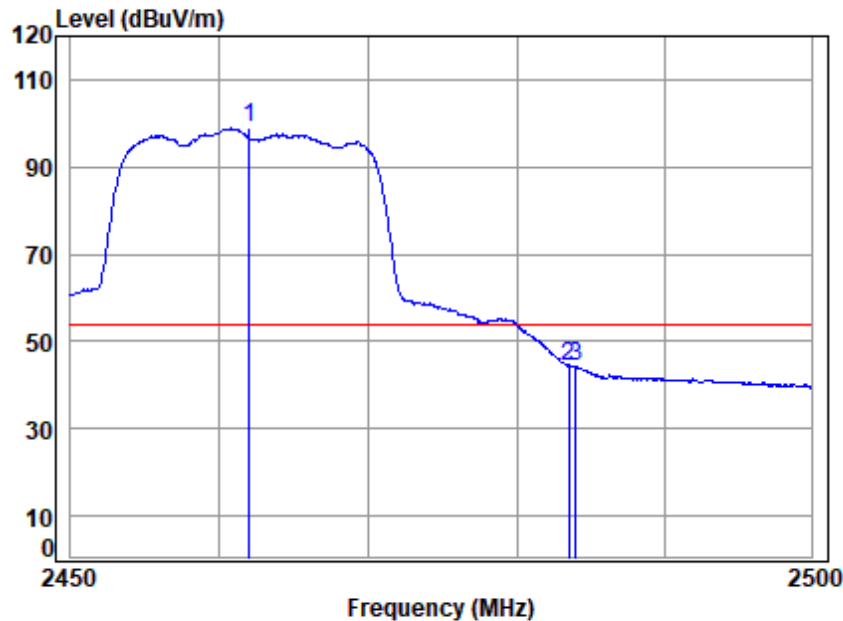


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 100.92 | 98.79  | 54.00  | 44.79 | Average |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 46.41  | 44.44  | 54.00  | -9.56 | Average |
| 3   | 2483.990 | 4.34  | 29.30  | 35.61  | 46.35  | 44.38  | 54.00  | -9.62 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

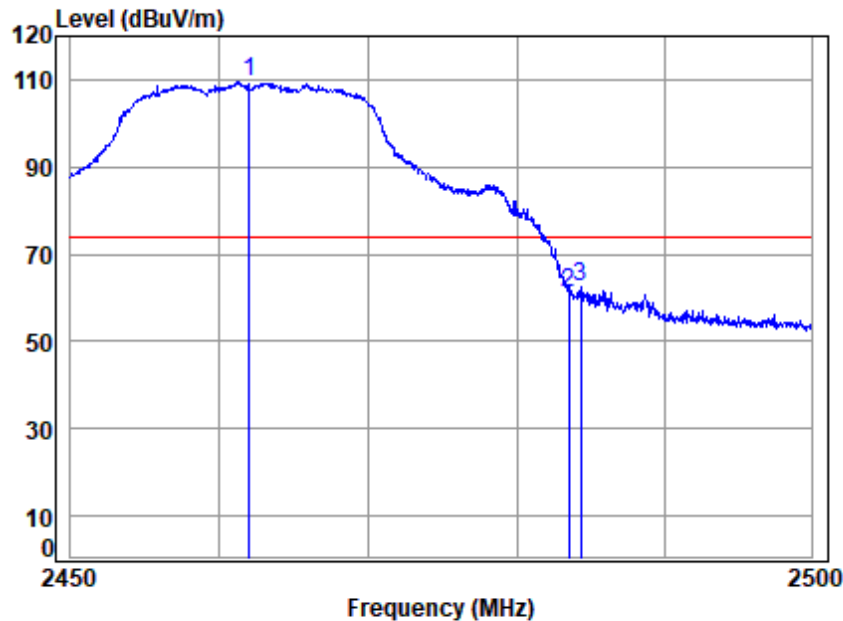


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G

|              |  | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|--------------|--|-------|--------|--------|--------|--------|--------|--------------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 111.54 | 109.41 | 74.00  | 35.41 Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 63.27  | 61.30  | 74.00  | -12.70 Peak  |
| 3 2484.342   |  | 4.34  | 29.31  | 35.61  | 64.57  | 62.61  | 74.00  | -11.39 Peak  |



Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

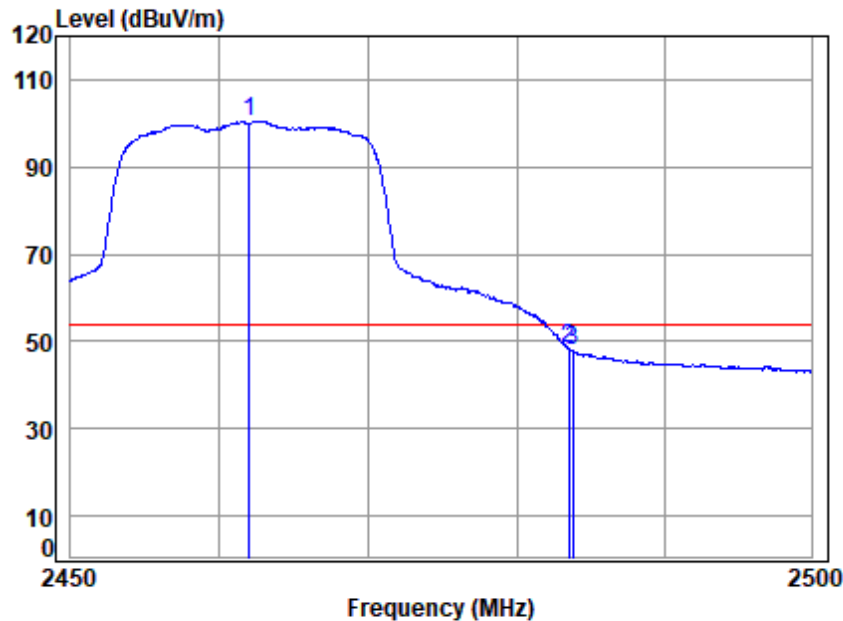


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11G

|   |            | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|---|------------|-------|--------|--------|--------|--------|--------|-------|---------|
|   | Freq       | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|   | MHz        | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 | q 2462.000 | 4.32  | 29.17  | 35.62  | 102.65 | 100.52 | 54.00  | 46.52 | Average |
| 2 | 2483.500   | 4.34  | 29.30  | 35.61  | 50.26  | 48.29  | 54.00  | -5.71 | Average |
| 3 | 2483.790   | 4.34  | 29.30  | 35.61  | 49.87  | 47.90  | 54.00  | -6.10 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

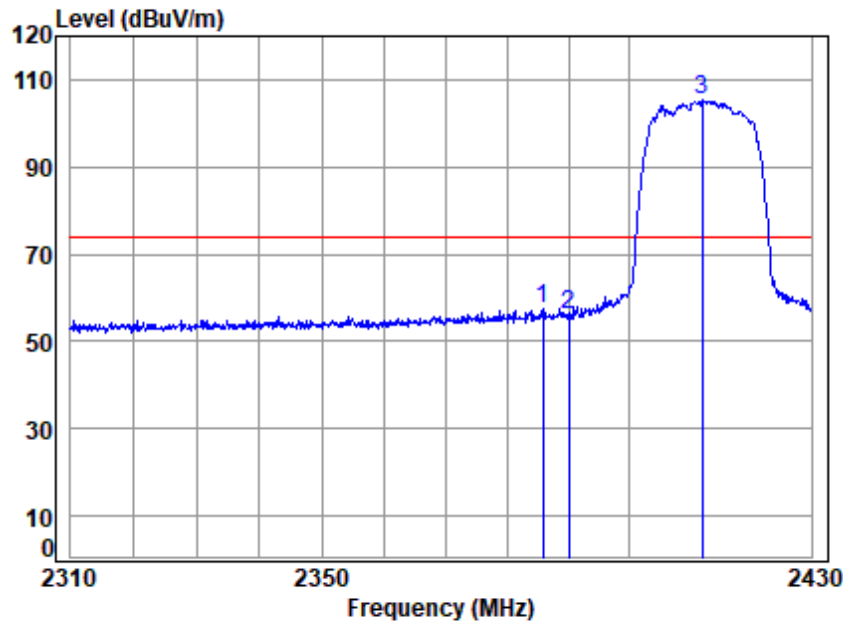


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 Band edge  
 Note : 2.4G WIFI 11N20

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |             |
|------|----------|-------|--------|--------|--------|--------|--------|-------------|
| Freq |          | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark      |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB          |
| 1    | 2385.857 | 4.25  | 28.74  | 35.64  | 59.98  | 57.33  | 74.00  | -16.67 peak |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 58.79  | 56.16  | 74.00  | -17.84 peak |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 107.69 | 105.20 | 74.00  | 31.20 peak  |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

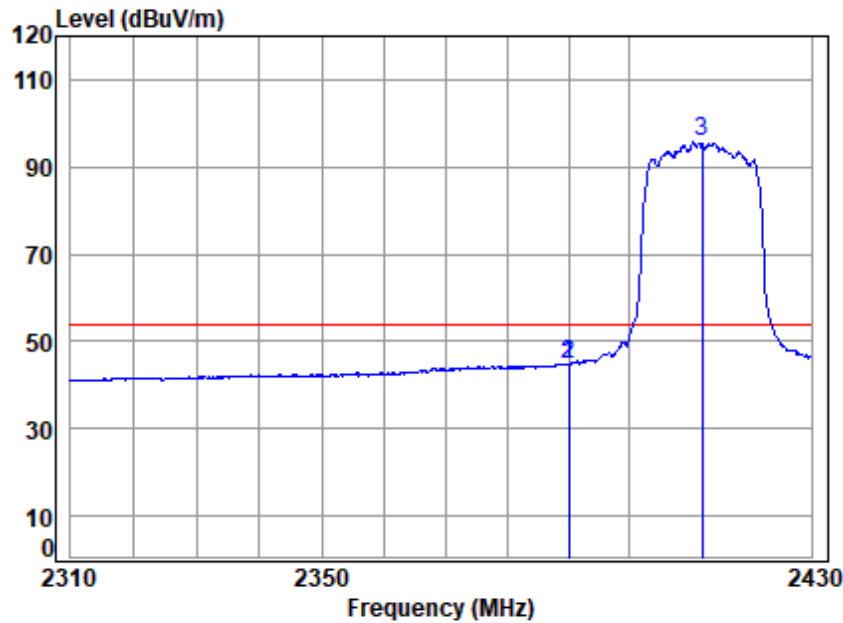


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11N20

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1   | 2389.968 | 4.25  | 28.76  | 35.64  | 47.56 | 44.93  | 54.00  | -9.07 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 47.56 | 44.93  | 54.00  | -9.07 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 98.11 | 95.62  | 54.00  | 41.62 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

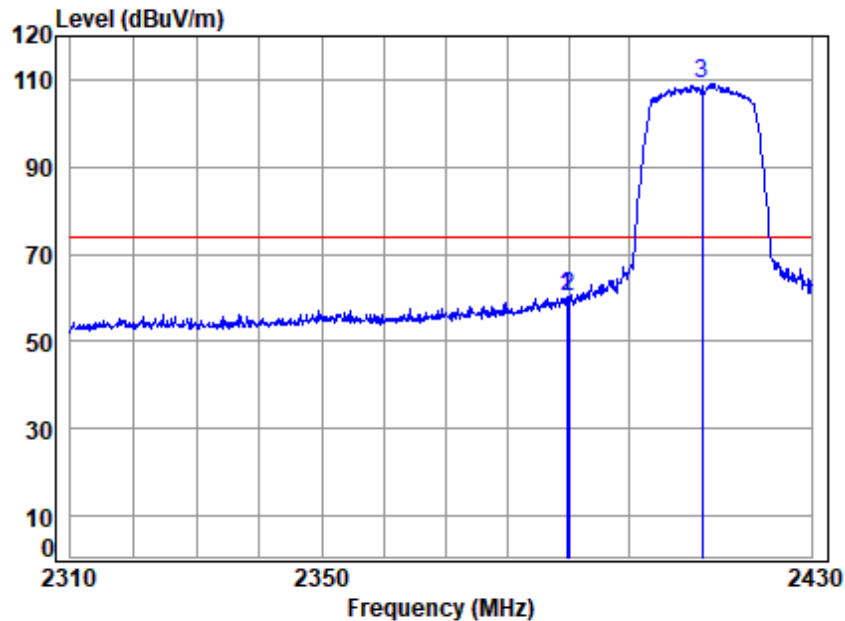


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11N20

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1    | 2389.726 | 4.25  | 28.76  | 35.64  | 62.95  | 60.32  | 74.00  | -13.68 | Peak   |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 62.66  | 60.03  | 74.00  | -13.97 | Peak   |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 111.76 | 109.27 | 74.00  | 35.27  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

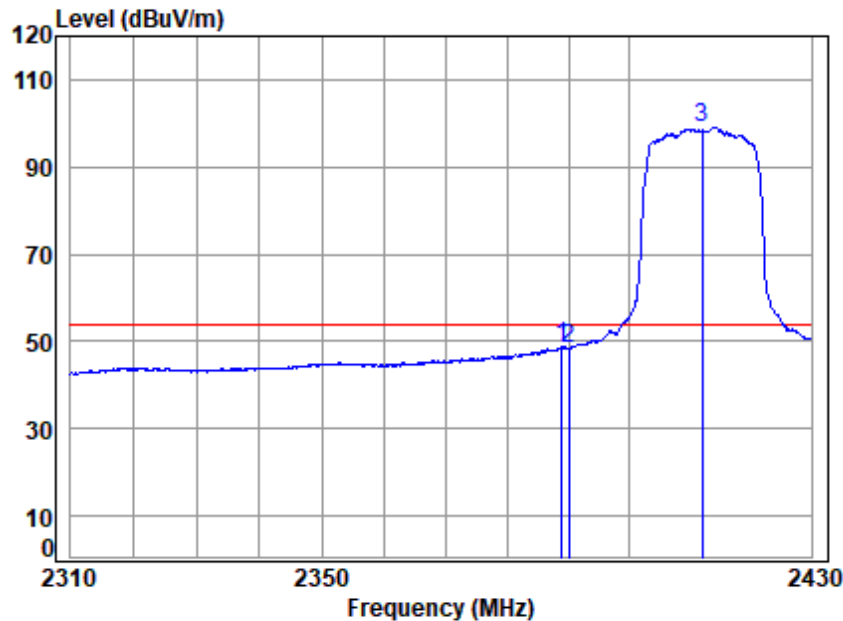


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11N20

|     |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|-----|----------|-------|--------|--------|--------|--------|--------|---------------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1   | 2388.879 | 4.25  | 28.76  | 35.64  | 51.55  | 48.92  | 54.00  | -5.08 Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 51.11  | 48.48  | 54.00  | -5.52 Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 101.52 | 99.03  | 54.00  | 45.03 Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

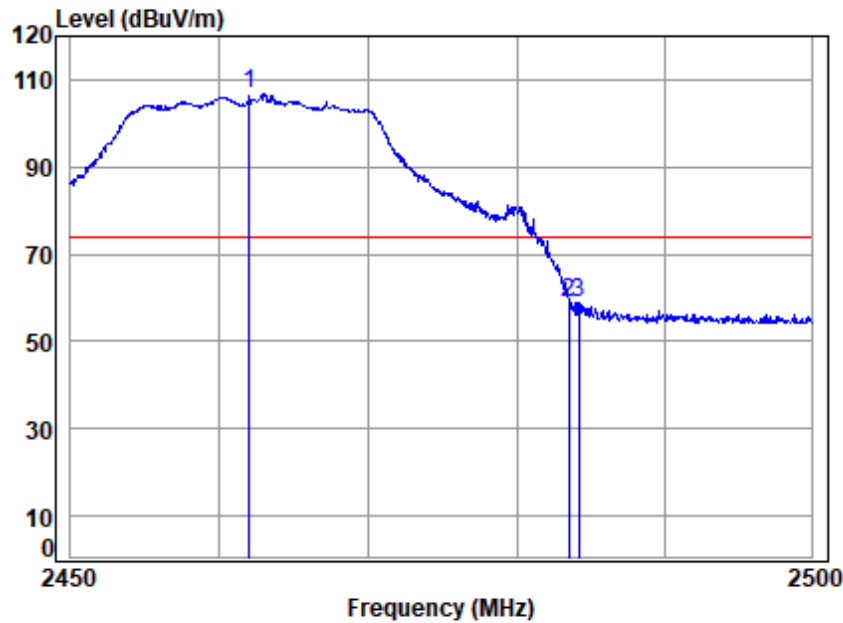


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 108.75 | 106.62 | 74.00  | 32.62  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 60.66  | 58.69  | 74.00  | -15.31 | peak   |
| 3 2484.191   |  | 4.34  | 29.31  | 35.61  | 60.63  | 58.67  | 74.00  | -15.33 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

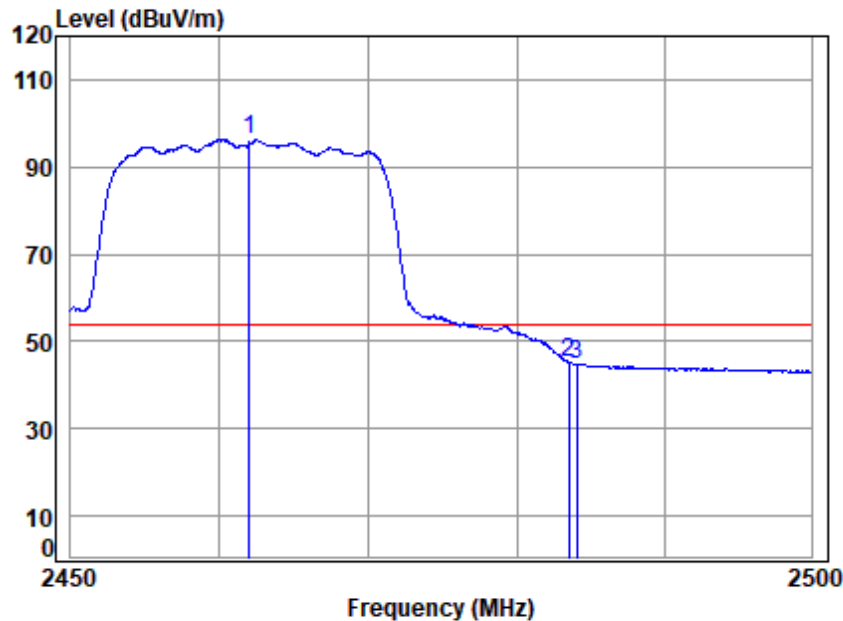


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|-------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 98.61 | 96.48  | 54.00  | 42.48 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 47.24 | 45.27  | 54.00  | -8.73 | Average |
| 3 2484.041   |  | 4.34  | 29.30  | 35.61  | 46.91 | 44.94  | 54.00  | -9.06 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

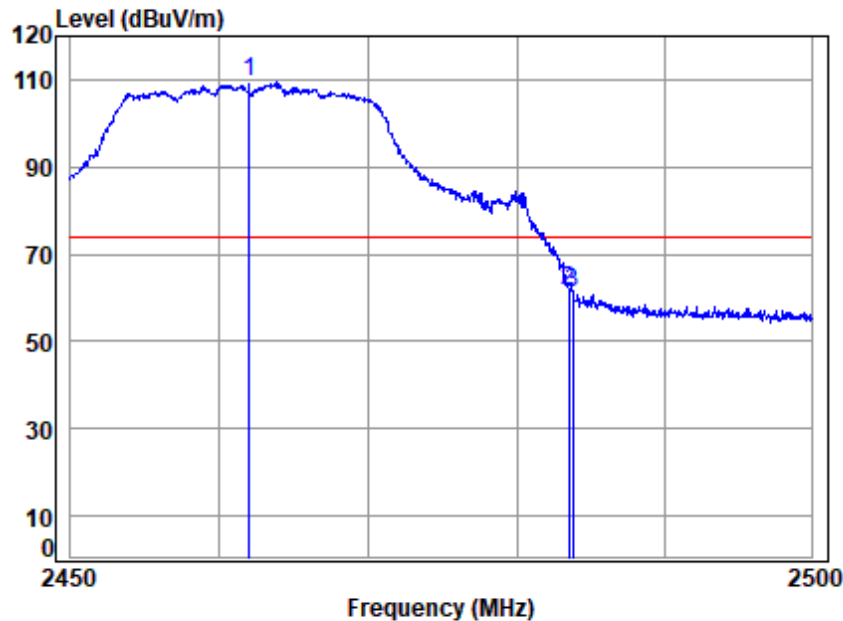


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20

|              |  | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|--------------|--|-------|--------|--------|--------|--------|--------|--------------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 111.50 | 109.37 | 74.00  | 35.37 Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 63.49  | 61.52  | 74.00  | -12.48 Peak  |
| 3 2483.790   |  | 4.34  | 29.30  | 35.61  | 63.02  | 61.05  | 74.00  | -12.95 Peak  |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

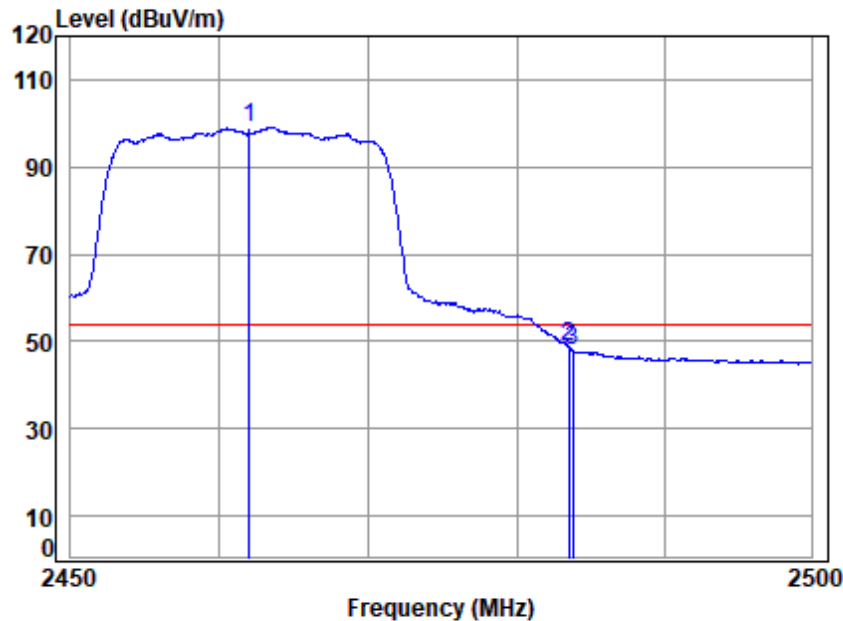


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11N20

|              |  | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|--------------|--|-------|--------|--------|--------|--------|--------|---------------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 101.35 | 99.22  | 54.00  | 45.22 Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 50.61  | 48.64  | 54.00  | -5.36 Average |
| 3 2483.790   |  | 4.34  | 29.30  | 35.61  | 49.85  | 47.88  | 54.00  | -6.12 Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

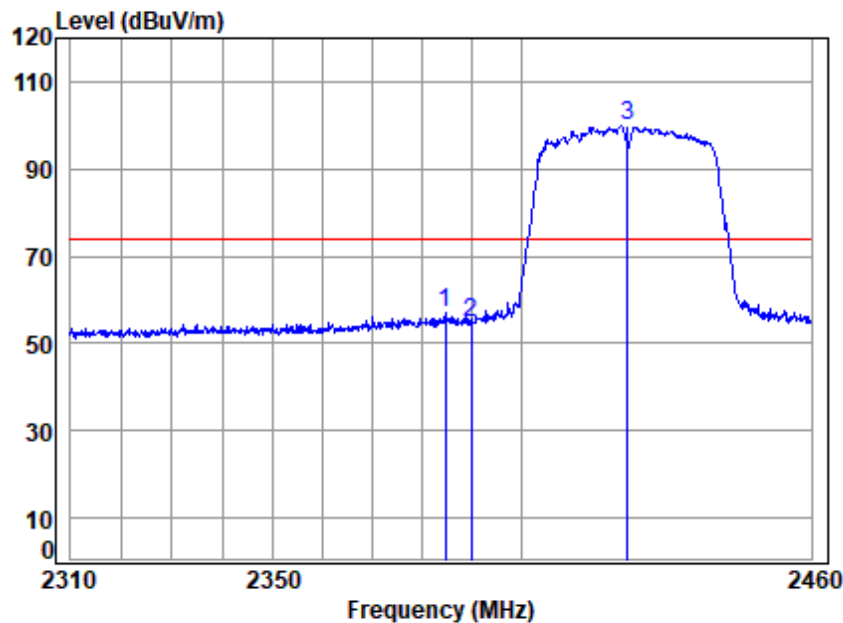


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1    | 2384.720 | 4.24  | 28.74  | 35.64  | 59.90  | 57.24  | 74.00  | -16.76 | peak   |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 57.22  | 54.59  | 74.00  | -19.41 | peak   |
| 3 q  | 2422.000 | 4.28  | 28.93  | 35.63  | 102.51 | 100.09 | 74.00  | 26.09  | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

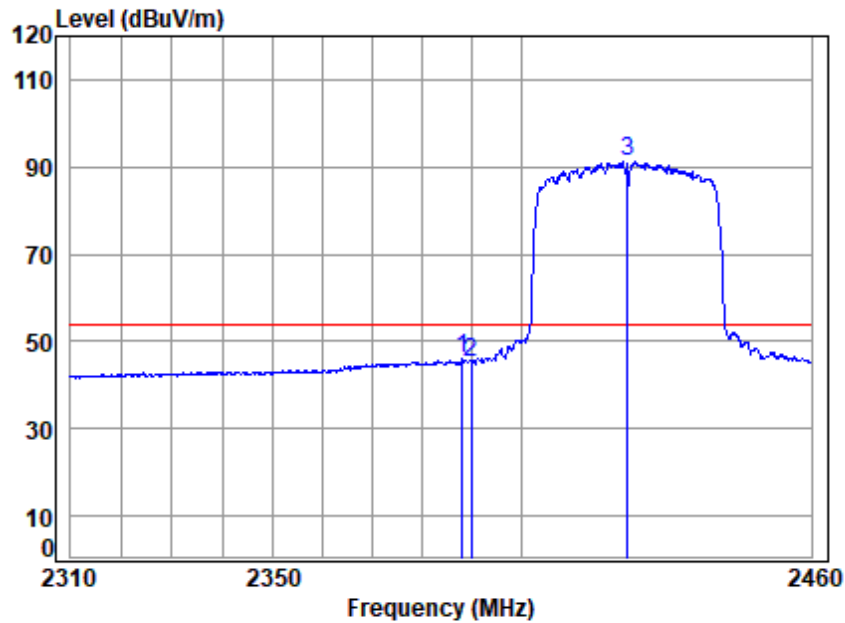


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read  | Limit  | Over   |               |
|------|----------|-------|--------|--------|-------|--------|--------|---------------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark  |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB            |
| 1    | 2388.174 | 4.25  | 28.75  | 35.64  | 48.59 | 45.95  | 54.00  | -8.05 Average |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 47.79 | 45.16  | 54.00  | -8.84 Average |
| 3 q  | 2422.000 | 4.28  | 28.93  | 35.63  | 93.85 | 91.43  | 54.00  | 37.43 Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

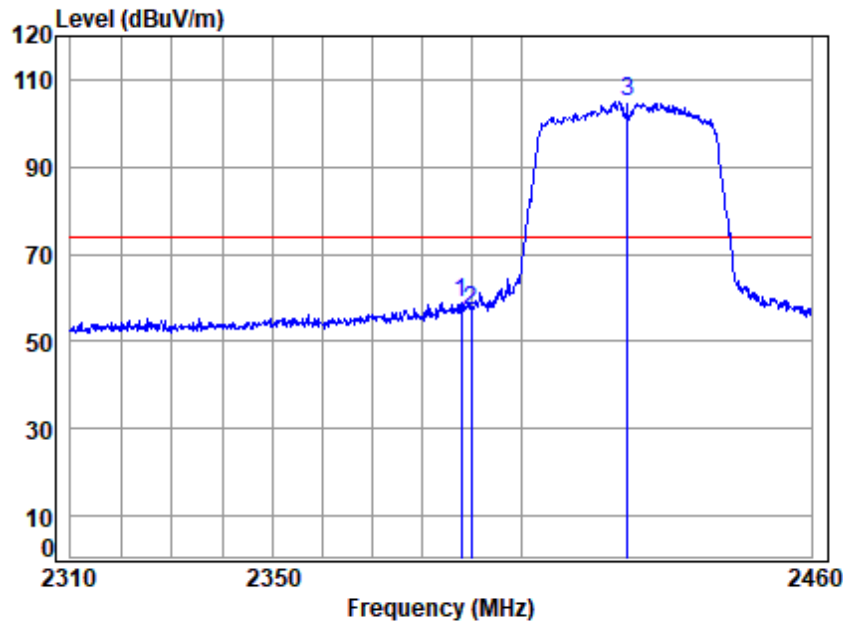


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1    | 2387.873 | 4.25  | 28.75  | 35.64  | 61.29  | 58.65  | 74.00  | -15.35 | Peak   |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 59.50  | 56.87  | 74.00  | -17.13 | Peak   |
| 3 q  | 2422.000 | 4.28  | 28.93  | 35.63  | 107.47 | 105.05 | 74.00  | 31.05  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

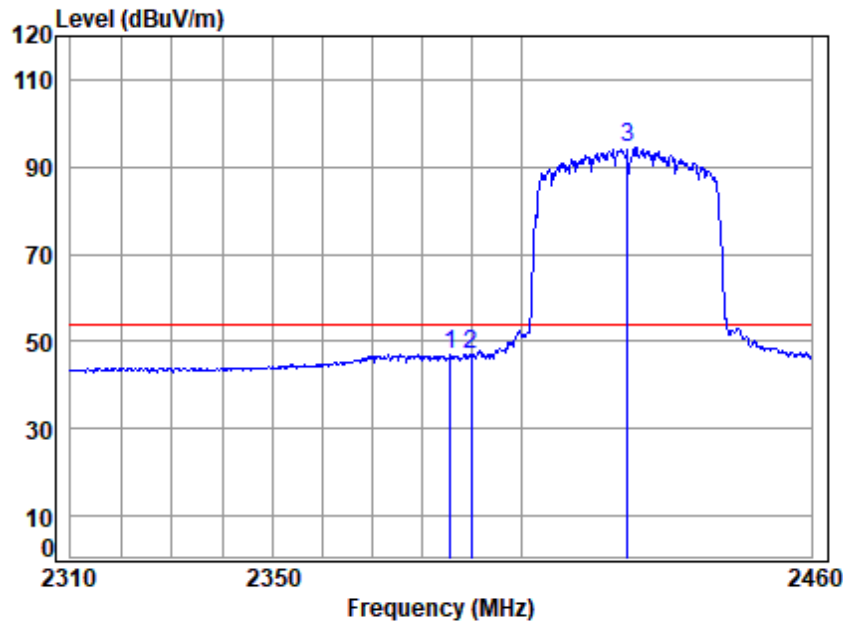


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11N40

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1   | 2385.771 | 4.24  | 28.74  | 35.64  | 49.72 | 47.06  | 54.00  | -6.94 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 49.74 | 47.11  | 54.00  | -6.89 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 97.05 | 94.63  | 54.00  | 40.63 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

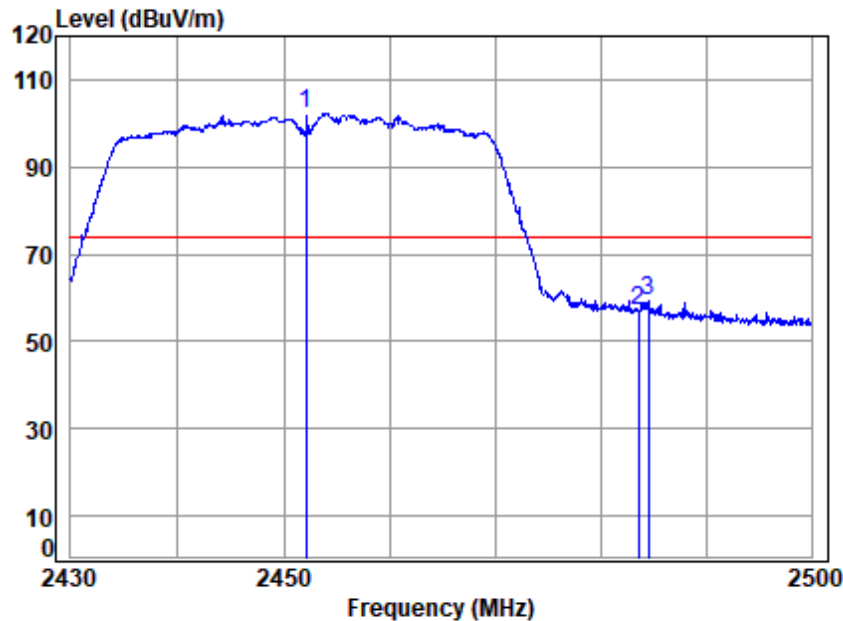


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11N40

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 104.50 | 102.30 | 74.00  | 28.30  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 58.97  | 57.00  | 74.00  | -17.00 | peak   |
| 3 2484.429   |  | 4.34  | 29.31  | 35.61  | 61.24  | 59.28  | 74.00  | -14.72 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

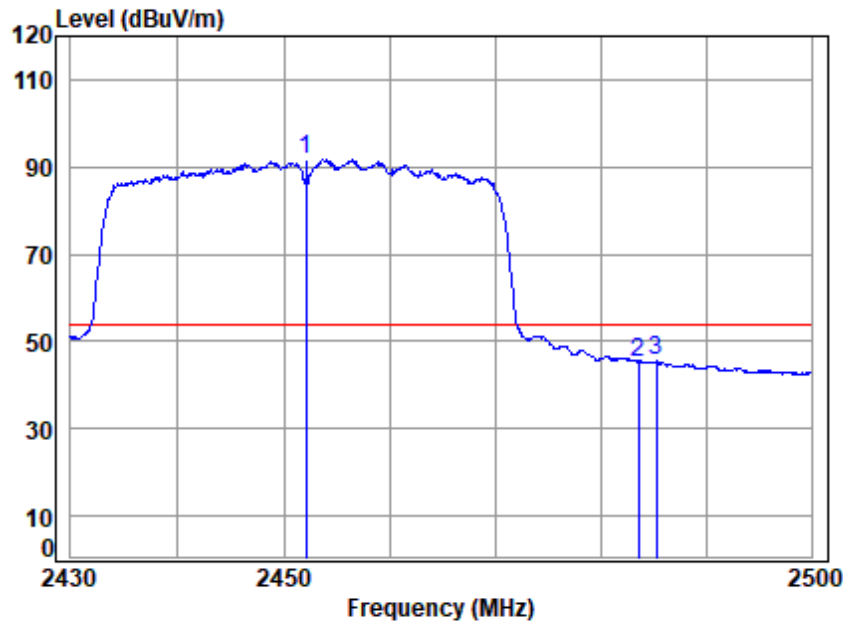


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11N40

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|-------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 94.02 | 91.82  | 54.00  | 37.82 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 47.31 | 45.34  | 54.00  | -8.66 | Average |
| 3 2485.205   |  | 4.35  | 29.31  | 35.61  | 47.41 | 45.46  | 54.00  | -8.54 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

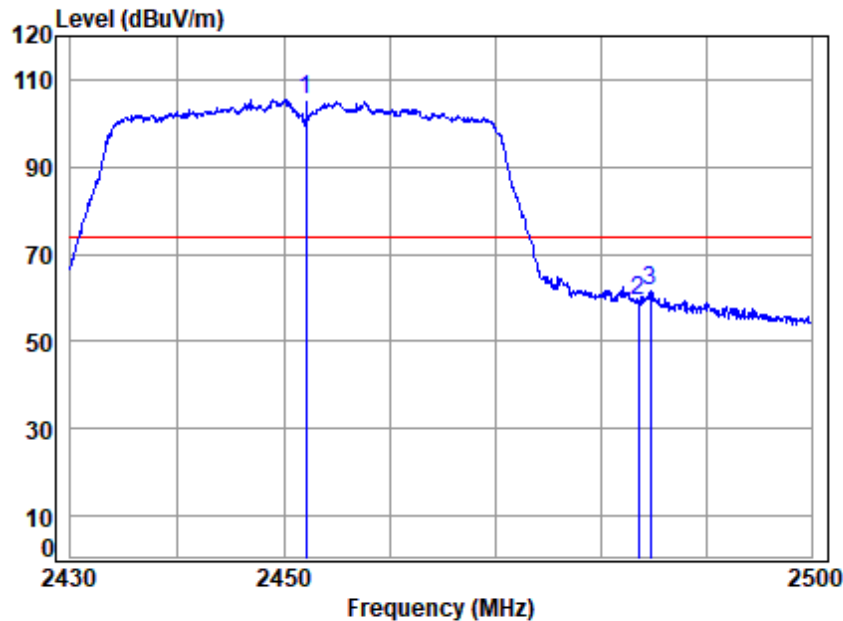


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11N40

|   |            | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|---|------------|-------|--------|--------|--------|--------|--------|--------|--------|
|   | Freq       | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|   | MHz        | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 | q 2452.000 | 4.31  | 29.11  | 35.62  | 107.66 | 105.46 | 74.00  | 31.46  | Peak   |
| 2 | 2483.500   | 4.34  | 29.30  | 35.61  | 61.51  | 59.54  | 74.00  | -14.46 | Peak   |
| 3 | 2484.641   | 4.35  | 29.31  | 35.61  | 63.46  | 61.51  | 74.00  | -12.49 | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

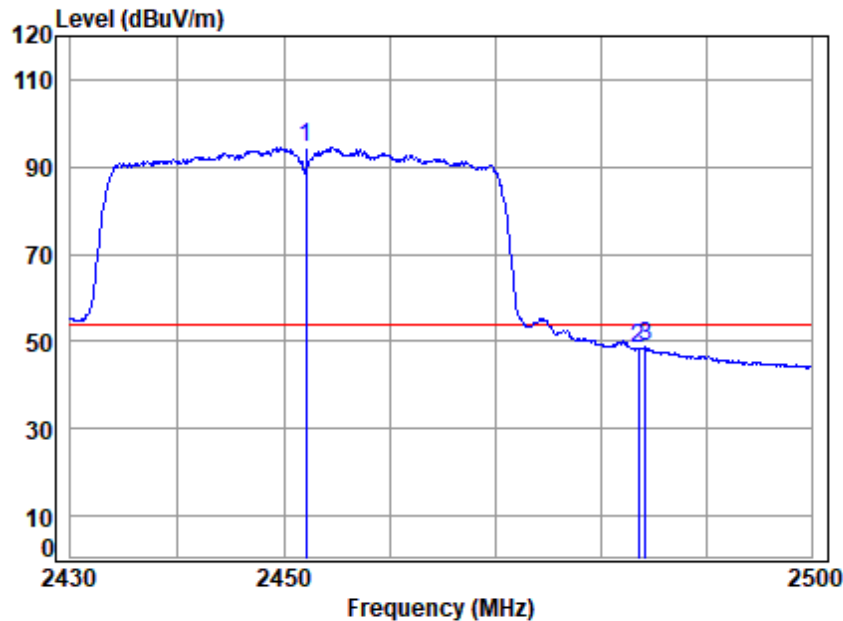


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11N40

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|-------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 96.61 | 94.41  | 54.00  | 40.41 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 50.36 | 48.39  | 54.00  | -5.61 | Average |
| 3 2484.147   |  | 4.34  | 29.31  | 35.61  | 50.65 | 48.69  | 54.00  | -5.31 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

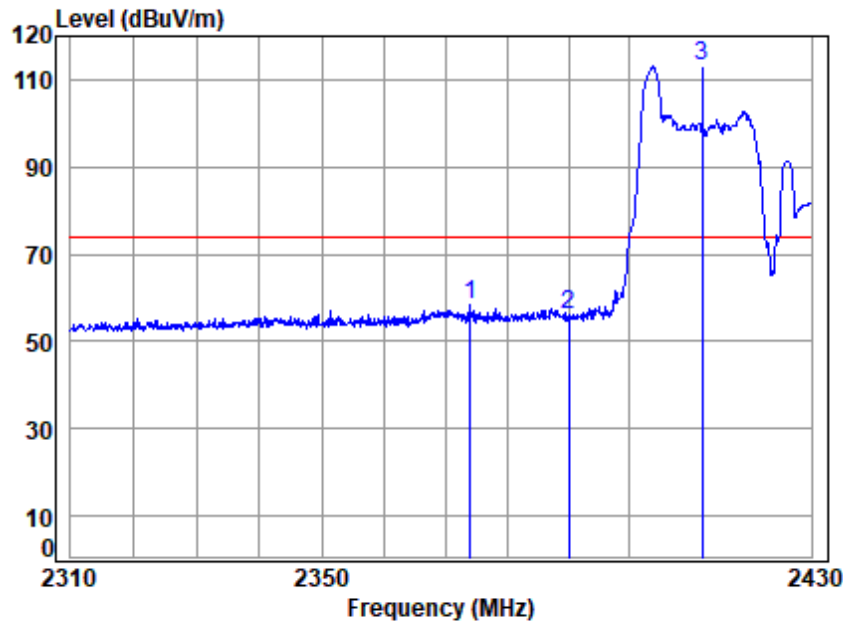


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 Band edge  
 Note : 2.4G WIFI 11AX20 26 RU

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1    | 2374.045 | 4.23  | 28.70  | 35.65  | 60.96  | 58.24  | 74.00  | -15.76 | peak   |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 58.84  | 56.21  | 74.00  | -17.79 | peak   |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 115.69 | 113.20 | 74.00  | 39.20  | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

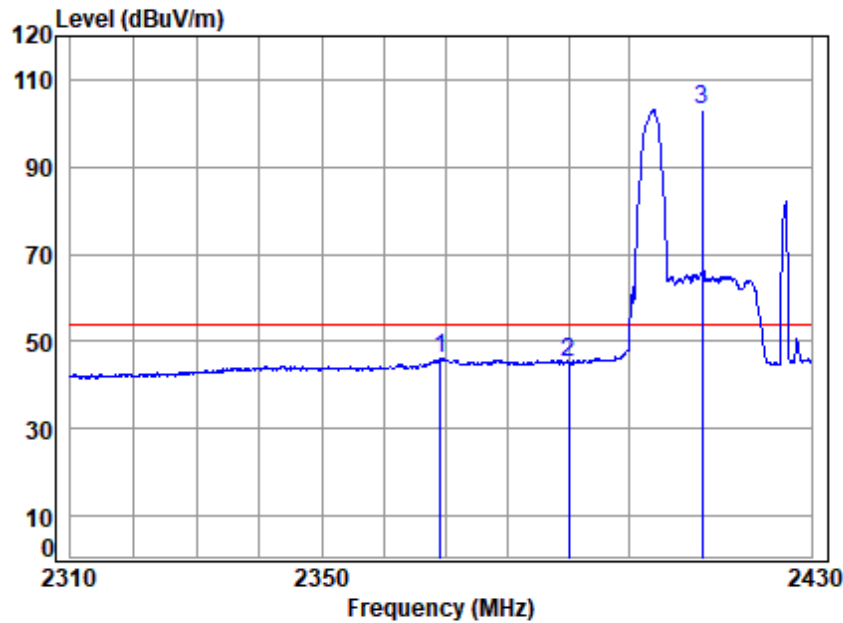


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 26 RU

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|------|----------|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1    | 2369.120 | 4.23  | 28.68  | 35.65  | 48.97  | 46.23  | 54.00  | -7.77 | Average |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 48.03  | 45.40  | 54.00  | -8.60 | Average |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 105.65 | 103.16 | 54.00  | 49.16 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

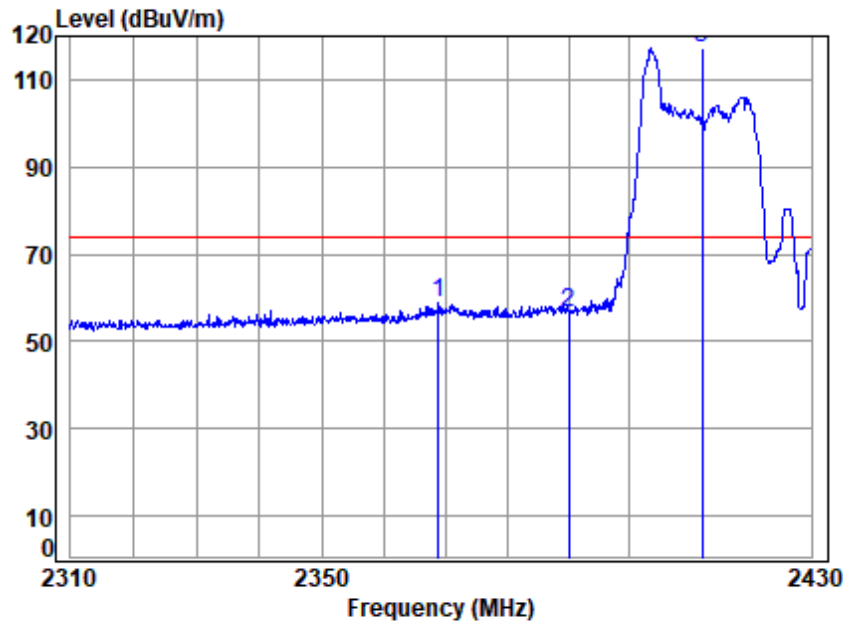


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 26 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2368.760 | 4.23  | 28.68  | 35.65  | 61.62  | 58.88  | 74.00  | -15.12 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 59.26  | 56.63  | 74.00  | -17.37 | Peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 119.77 | 117.28 | 74.00  | 43.28  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

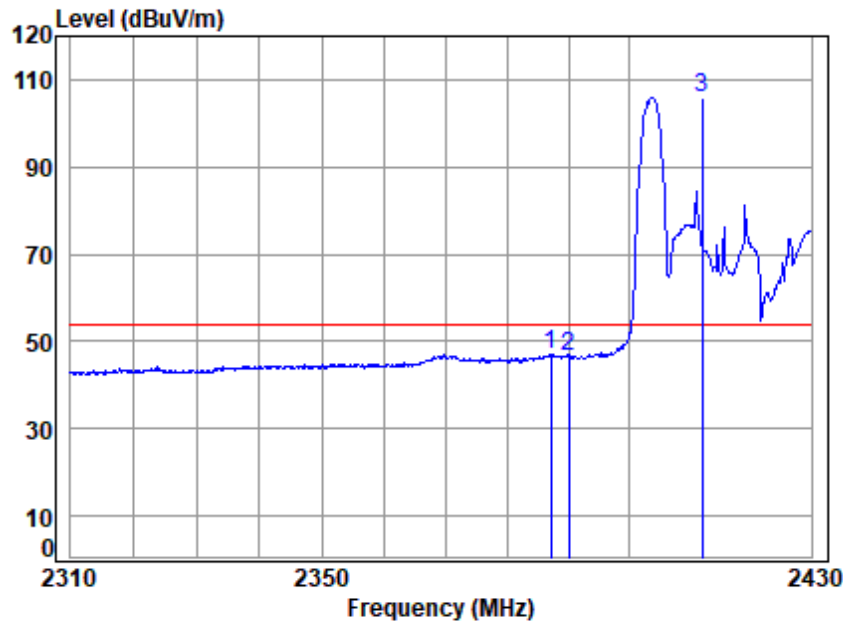

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 26 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2387.065 | 4.25  | 28.75  | 35.64  | 49.55  | 46.91  | 54.00  | -7.09 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 49.17  | 46.54  | 54.00  | -7.46 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 108.44 | 105.95 | 54.00  | 51.95 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 64 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:Low

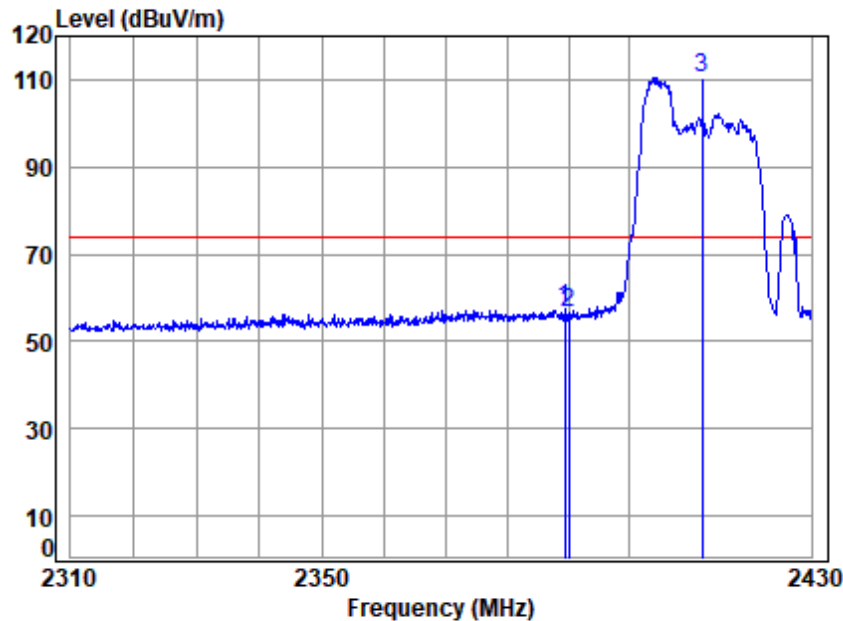

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|      |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |             |
|------|----------|-------|--------|--------|--------|--------|--------|-------------|
| Freq |          | Loss  | Factor | Factor | Level  | Line   | Limit  | Remark      |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB          |
| 1    | 2389.363 | 4.25  | 28.76  | 35.64  | 60.01  | 57.38  | 74.00  | -16.62 peak |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 59.15  | 56.52  | 74.00  | -17.48 peak |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 112.87 | 110.38 | 74.00  | 36.38 peak  |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:Low

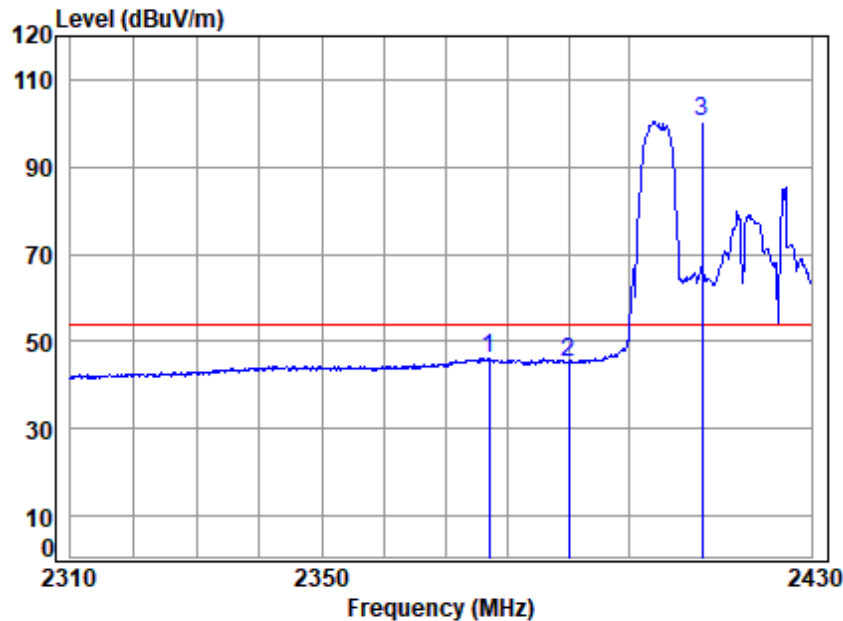


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|------|----------|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|      | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1    | 2377.052 | 4.24  | 28.71  | 35.65  | 48.67  | 45.97  | 54.00  | -8.03 | Average |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 47.73  | 45.10  | 54.00  | -8.90 | Average |
| 3 q  | 2412.000 | 4.27  | 28.87  | 35.63  | 102.96 | 100.47 | 54.00  | 46.47 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:Low

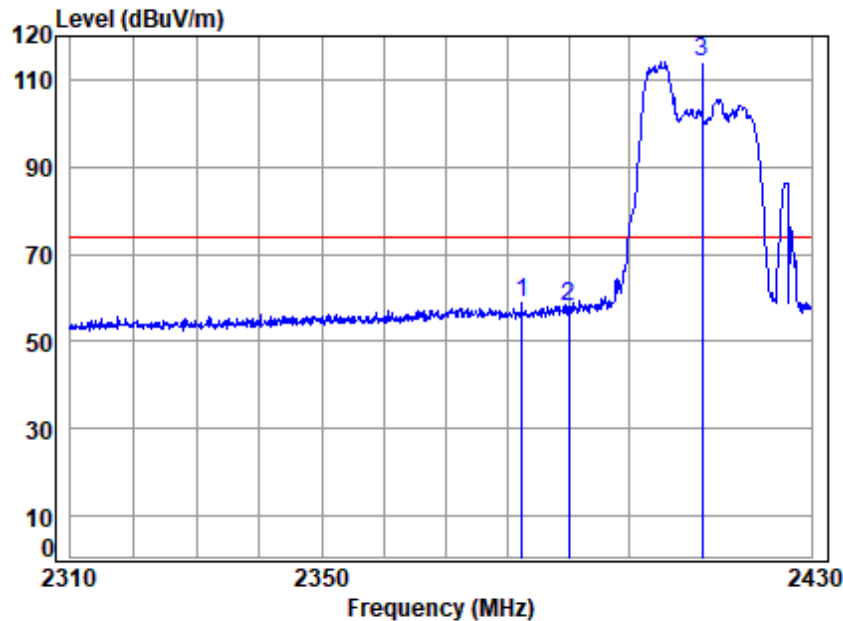


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2382.355 | 4.24  | 28.73  | 35.64  | 61.68  | 59.01  | 74.00  | -14.99 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 60.73  | 58.10  | 74.00  | -15.90 | Peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 116.78 | 114.29 | 74.00  | 40.29  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:Low

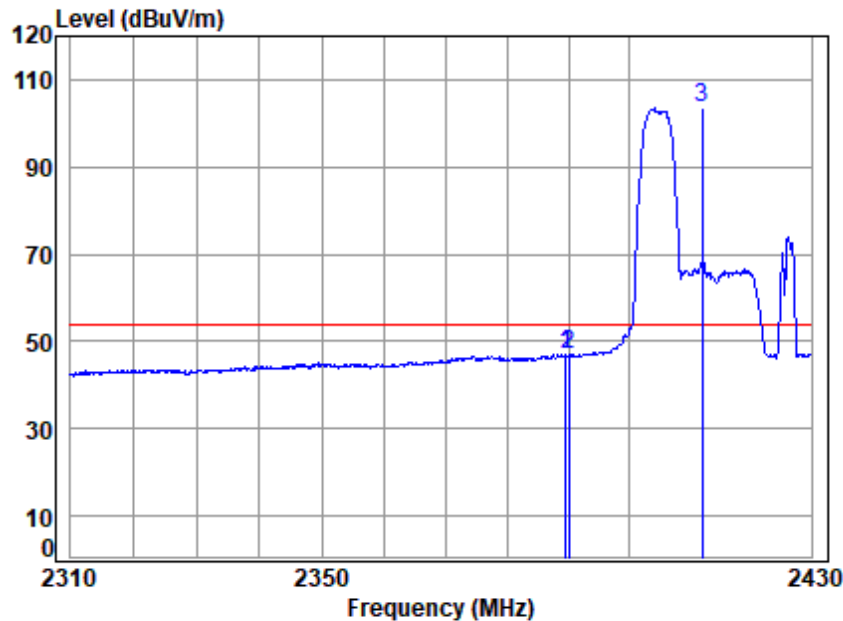

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2389.484 | 4.25  | 28.76  | 35.64  | 49.78  | 47.15  | 54.00  | -6.85 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 49.59  | 46.96  | 54.00  | -7.04 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 106.26 | 103.77 | 54.00  | 49.77 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 68 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

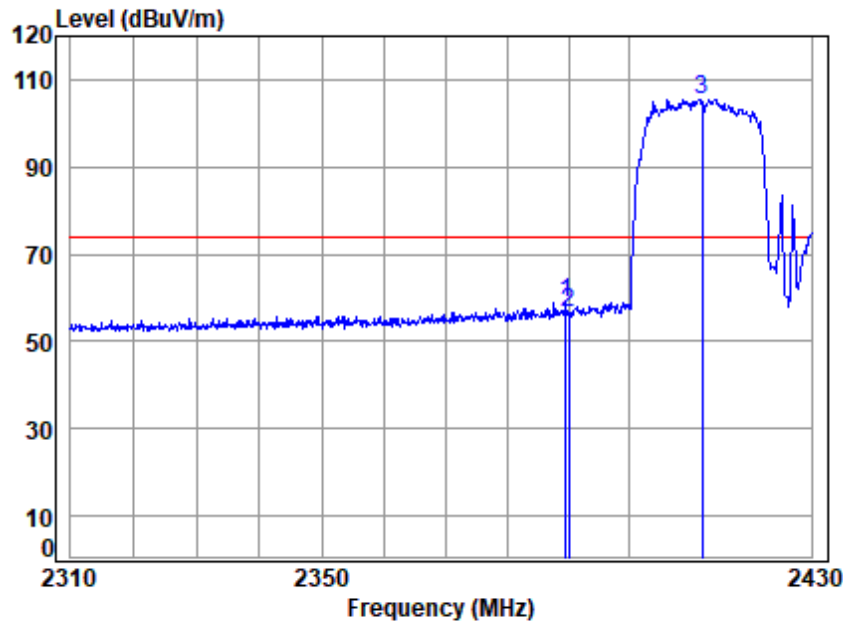

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2389.605 | 4.25  | 28.76  | 35.64  | 61.48  | 58.85  | 74.00  | -15.15 | peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 59.12  | 56.49  | 74.00  | -17.51 | peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 107.86 | 105.37 | 74.00  | 31.37  | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 69 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

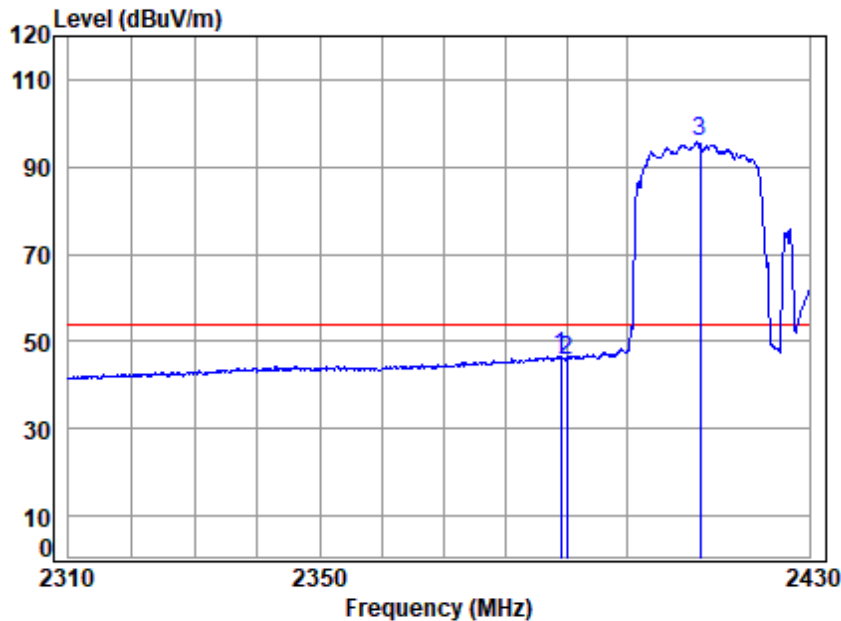

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1   | 2389.121 | 4.25  | 28.76  | 35.64  | 49.16 | 46.53  | 54.00  | -7.47 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 48.39 | 45.76  | 54.00  | -8.24 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 98.29 | 95.80  | 54.00  | 41.80 | Average |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

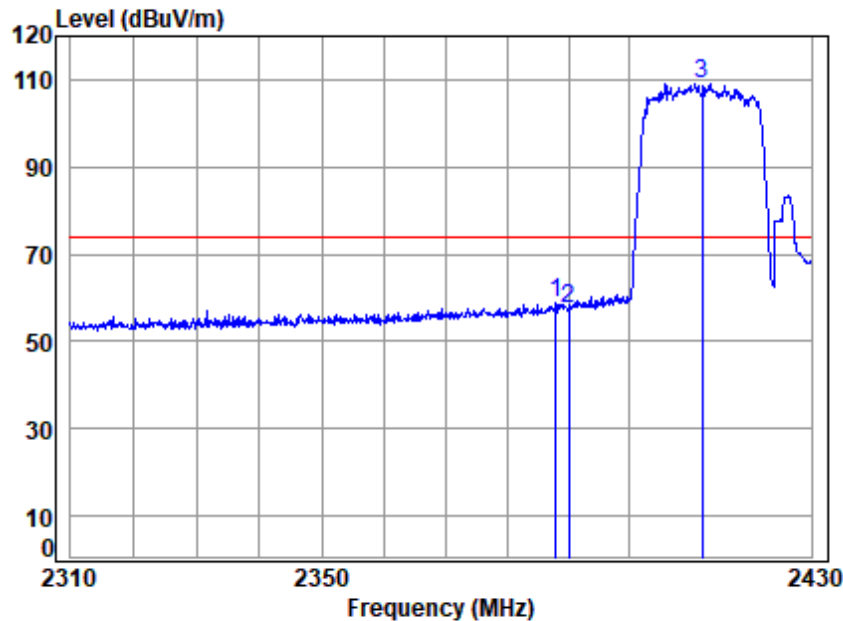


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2387.912 | 4.25  | 28.75  | 35.64  | 61.56  | 58.92  | 74.00  | -15.08 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 60.32  | 57.69  | 74.00  | -16.31 | Peak   |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 111.62 | 109.13 | 74.00  | 35.13  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

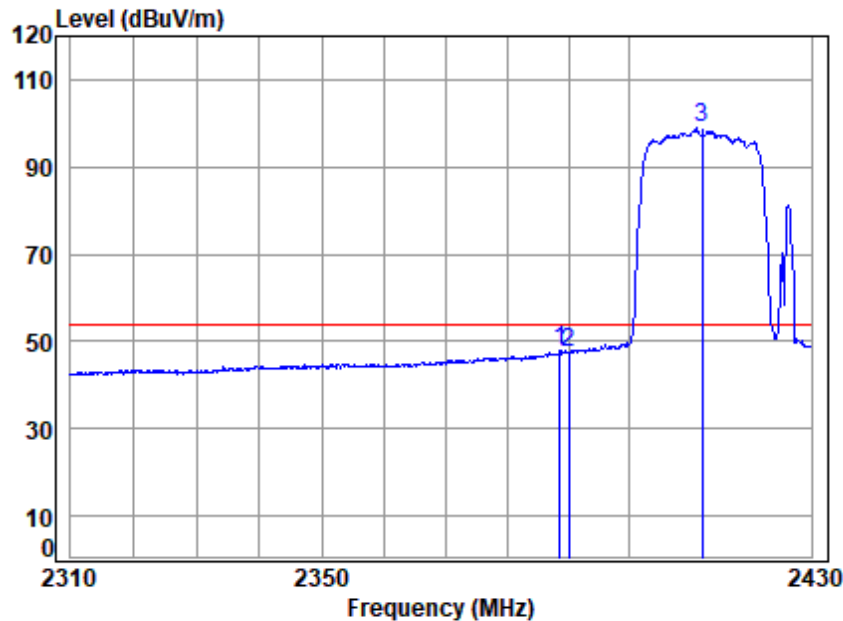


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2388.637 | 4.25  | 28.75  | 35.64  | 50.76  | 48.12  | 54.00  | -5.88 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 50.16  | 47.53  | 54.00  | -6.47 | Average |
| 3 q | 2412.000 | 4.27  | 28.87  | 35.63  | 101.33 | 98.84  | 54.00  | 44.84 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:High

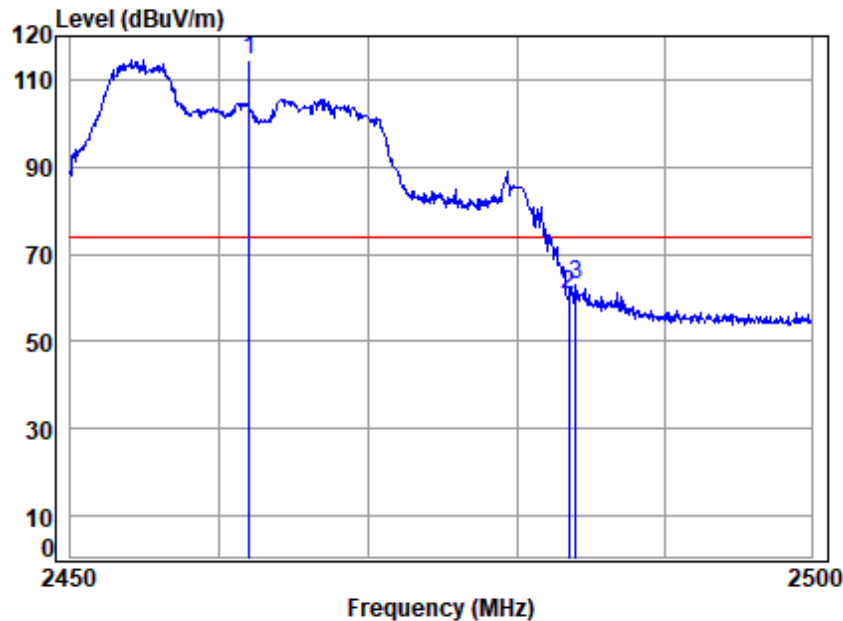


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|   |            | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|---|------------|-------|--------|--------|--------|--------|--------|--------|--------|
|   | Freq       | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|   | MHz        | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 | q 2462.000 | 4.32  | 29.17  | 35.62  | 116.53 | 114.40 | 74.00  | 40.40  | peak   |
| 2 | 2483.500   | 4.34  | 29.30  | 35.61  | 62.81  | 60.84  | 74.00  | -13.16 | peak   |
| 3 | 2483.990   | 4.34  | 29.30  | 35.61  | 65.01  | 63.04  | 74.00  | -10.96 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:High

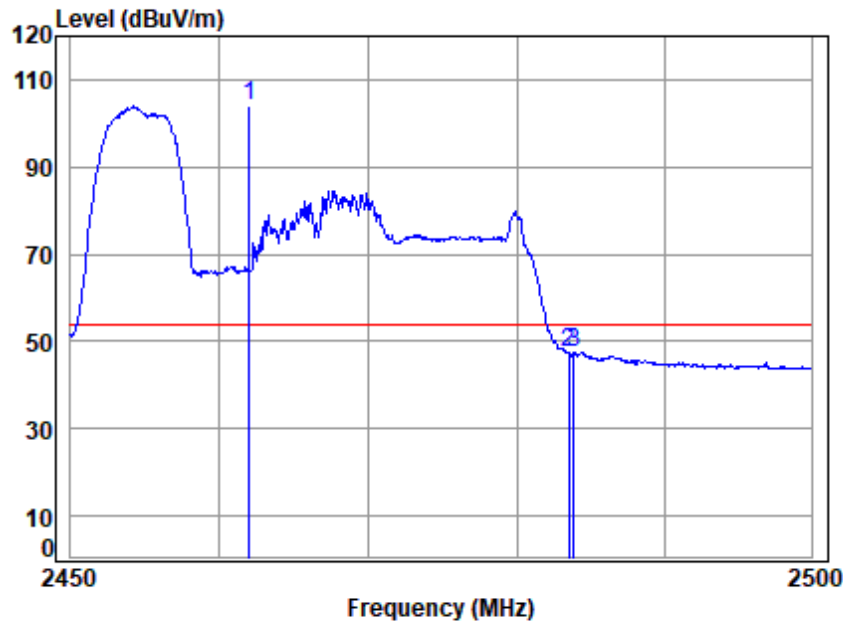

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 105.94 | 103.81 | 54.00  | 49.81 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 49.27  | 47.30  | 54.00  | -6.70 | Average |
| 3 2483.890   |  | 4.34  | 29.30  | 35.61  | 49.65  | 47.68  | 54.00  | -6.32 | Average |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:High

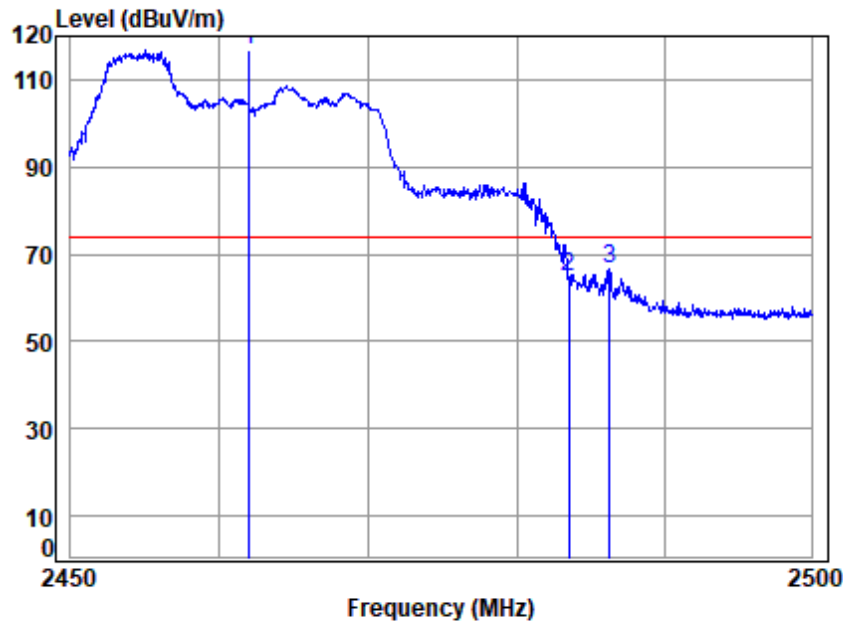


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |        |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |        |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 118.89 | 116.76 | 74.00  | 42.76 | Peak   |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 66.68  | 64.71  | 74.00  | -9.29 | Peak   |
| 3   | 2486.300 | 4.35  | 29.32  | 35.61  | 68.49  | 66.55  | 74.00  | -7.45 | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:20MHz; Channel:High

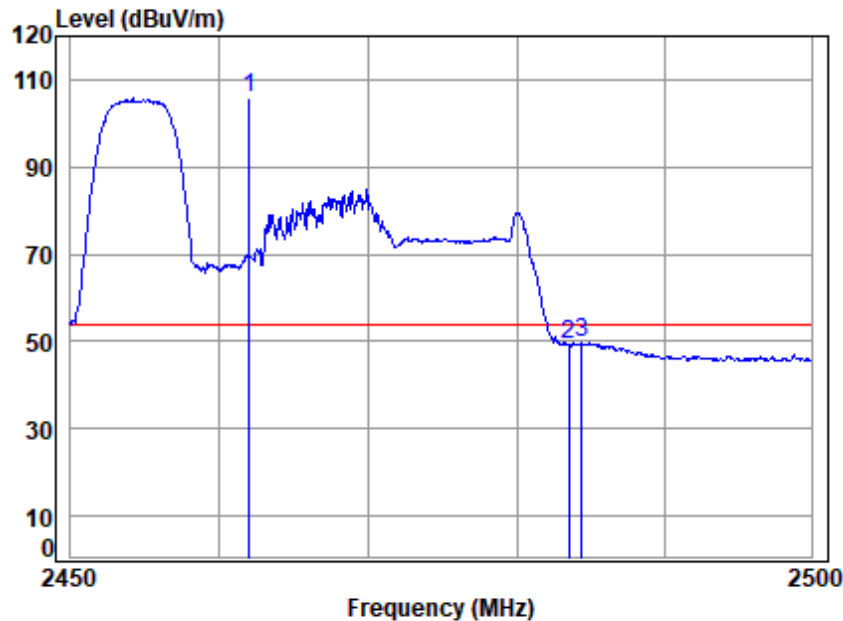


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 107.96 | 105.83 | 54.00  | 51.83 | Average |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 51.17  | 49.20  | 54.00  | -4.80 | Average |
| 3   | 2484.392 | 4.34  | 29.31  | 35.61  | 51.65  | 49.69  | 54.00  | -4.31 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106); Bandwidth:20MHz; Channel:High

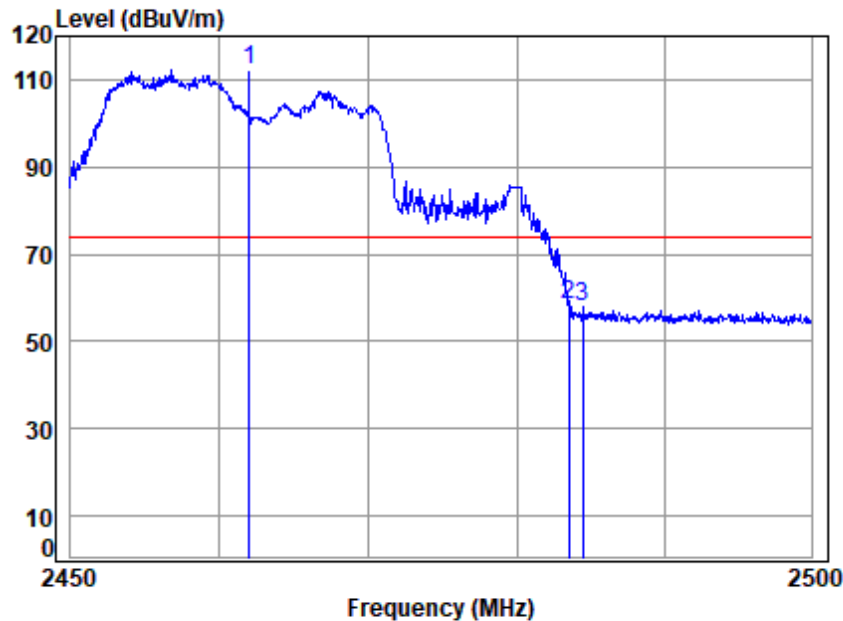

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 106 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 114.24 | 112.11 | 74.00  | 38.11  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 60.41  | 58.44  | 74.00  | -15.56 | peak   |
| 3 2484.492   |  | 4.34  | 29.31  | 35.61  | 59.83  | 57.87  | 74.00  | -16.13 | peak   |






## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 77 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106); Bandwidth:20MHz; Channel:High

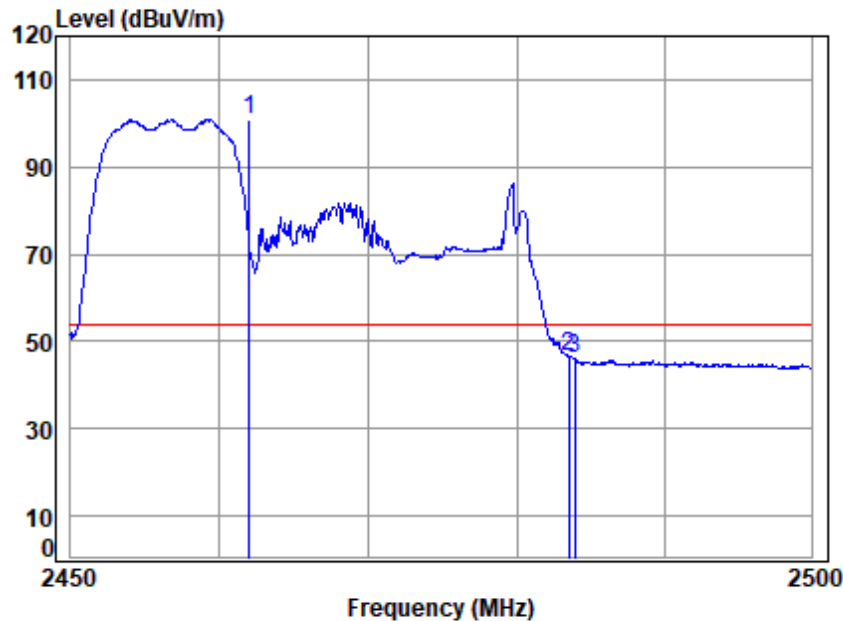

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 106 RU

|              |  | Cable | Ant    | Preamp | Read   | Limit  | Over   |               |
|--------------|--|-------|--------|--------|--------|--------|--------|---------------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB            |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 103.10 | 100.97 | 54.00  | 46.97 Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 48.71  | 46.74  | 54.00  | -7.26 Average |
| 3 2483.940   |  | 4.34  | 29.30  | 35.61  | 48.07  | 46.10  | 54.00  | -7.90 Average |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106); Bandwidth:20MHz; Channel:High

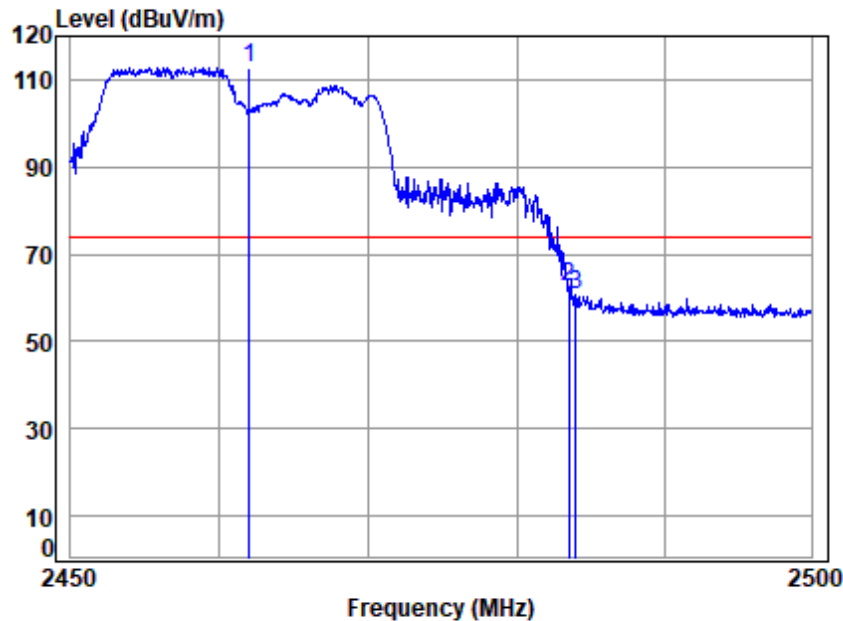


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 106 RU

|              |  | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|--------------|--|-------|--------|--------|--------|--------|--------|--------------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 114.98 | 112.85 | 74.00  | 38.85 Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 64.31  | 62.34  | 74.00  | -11.66 Peak  |
| 3 2483.990   |  | 4.34  | 29.30  | 35.61  | 62.53  | 60.56  | 74.00  | -13.44 Peak  |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106); Bandwidth:20MHz; Channel:High

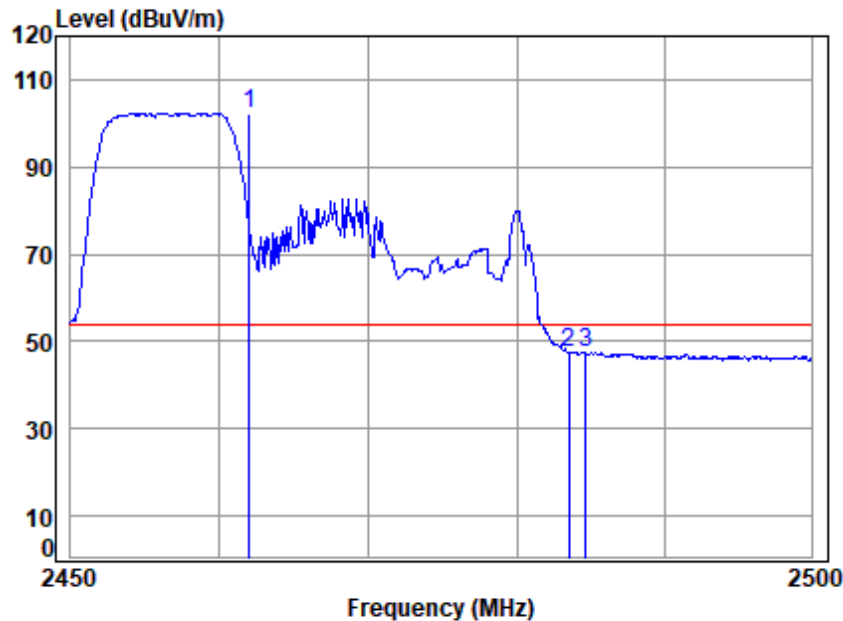


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 106 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 104.52 | 102.39 | 54.00  | 48.39 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 49.55  | 47.58  | 54.00  | -6.42 | Average |
| 3 2484.693   |  | 4.35  | 29.31  | 35.61  | 49.55  | 47.60  | 54.00  | -6.40 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

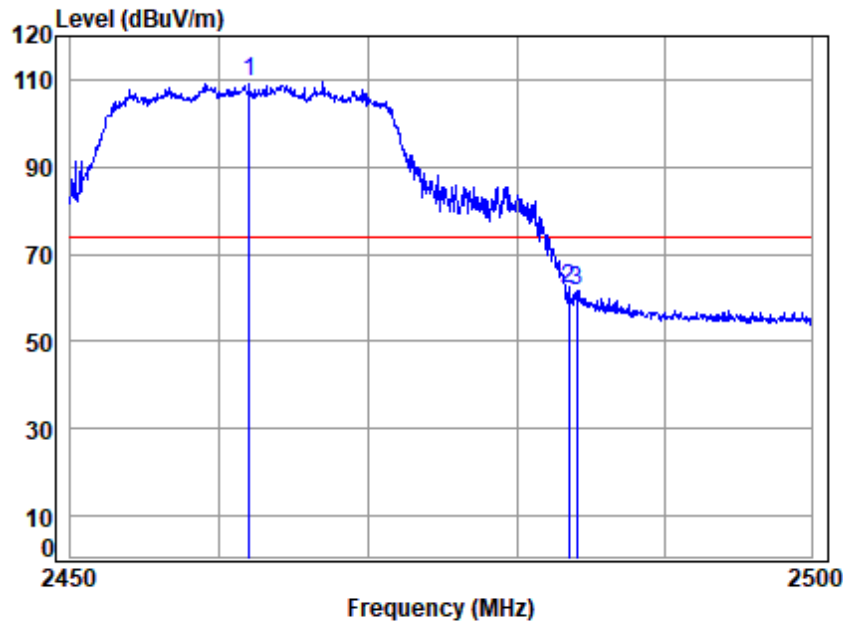


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|   |            | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|---|------------|-------|--------|--------|--------|--------|--------|--------|--------|
|   | Freq       | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|   | MHz        | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 | q 2462.000 | 4.32  | 29.17  | 35.62  | 111.55 | 109.42 | 74.00  | 35.42  | peak   |
| 2 | 2483.500   | 4.34  | 29.30  | 35.61  | 63.84  | 61.87  | 74.00  | -12.13 | peak   |
| 3 | 2484.041   | 4.34  | 29.30  | 35.61  | 63.50  | 61.53  | 74.00  | -12.47 | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

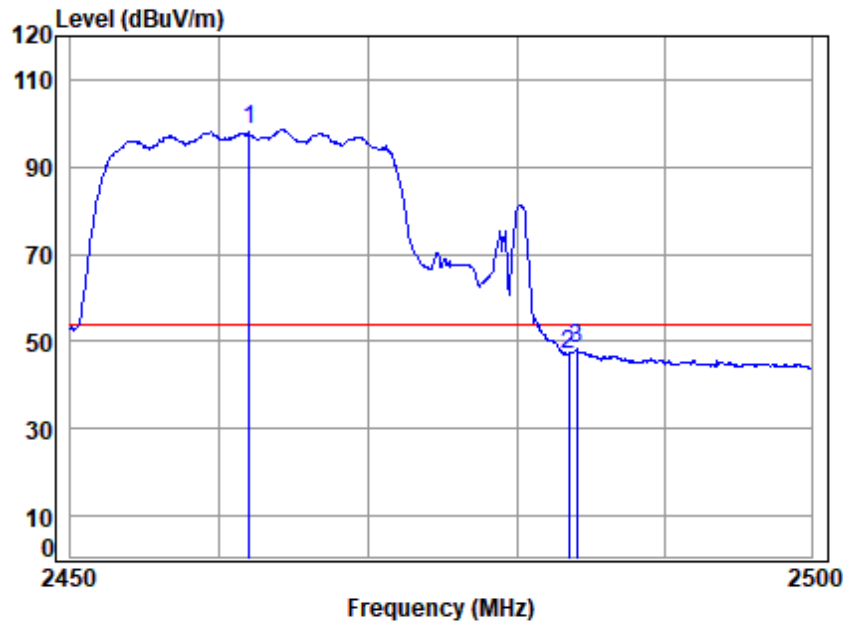


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q | 2462.000 | 4.32  | 29.17  | 35.62  | 100.66 | 98.53  | 54.00  | 44.53 | Average |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 49.16  | 47.19  | 54.00  | -6.81 | Average |
| 3   | 2484.041 | 4.34  | 29.30  | 35.61  | 50.13  | 48.16  | 54.00  | -5.84 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

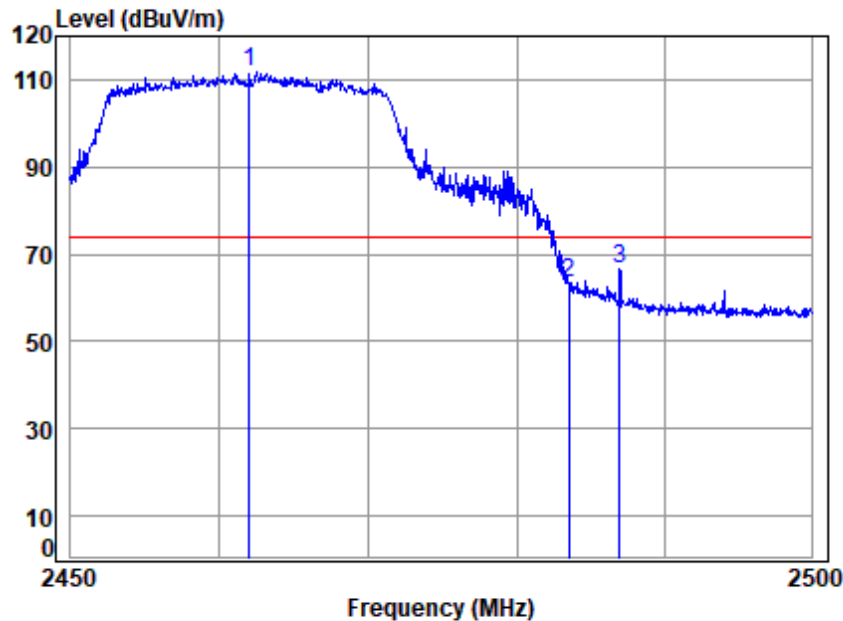


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 113.82 | 111.69 | 74.00  | 37.69  | Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 65.43  | 63.46  | 74.00  | -10.54 | Peak   |
| 3 2486.953   |  | 4.35  | 29.32  | 35.61  | 68.34  | 66.40  | 74.00  | -7.60  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

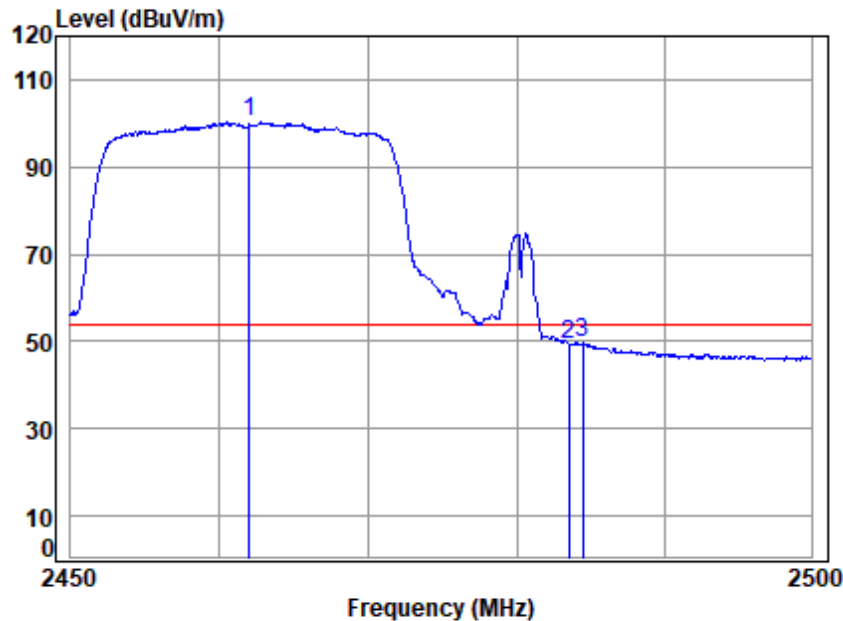


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 Band edge  
Note : 2.4G WIFI 11AX20 242 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q 2462.000 |  | 4.32  | 29.17  | 35.62  | 102.33 | 100.20 | 54.00  | 46.20 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 51.19  | 49.22  | 54.00  | -4.78 | Average |
| 3 2484.442   |  | 4.34  | 29.31  | 35.61  | 51.56  | 49.60  | 54.00  | -4.40 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

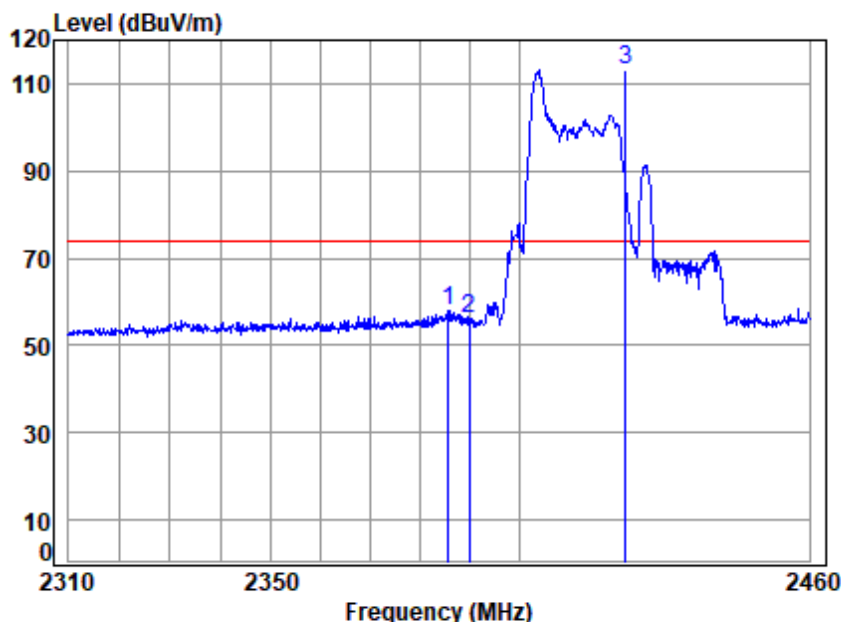


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 26 RU

|     |          | Cable | Ant    | Preamp | Read   | Limit  | Over   |              |
|-----|----------|-------|--------|--------|--------|--------|--------|--------------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB           |
| 1   | 2385.771 | 4.24  | 28.74  | 35.64  | 60.52  | 57.86  | 74.00  | -16.14 peak  |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 58.69  | 56.06  | 74.00  | -17.94 peak  |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 115.60 | 113.18 | 74.00  | 39.18 peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

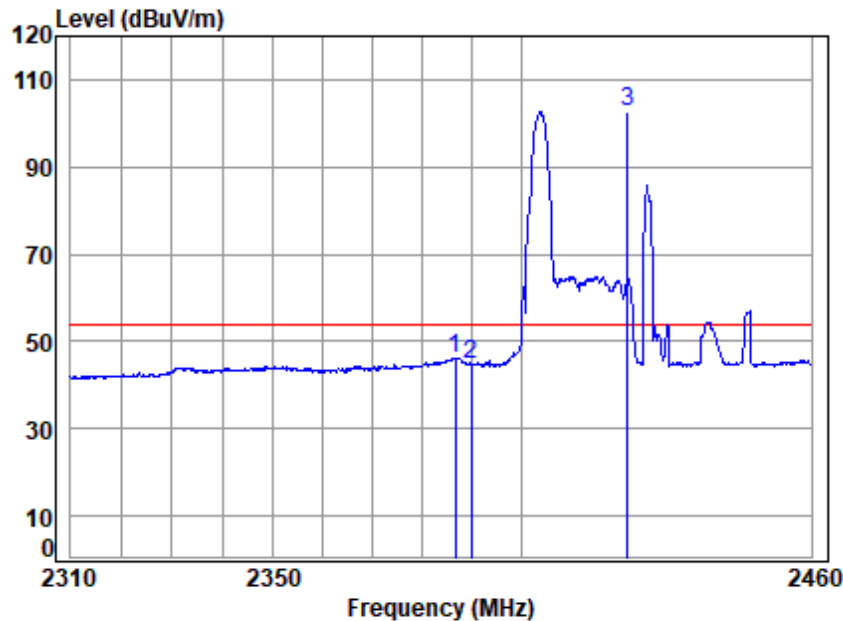


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 26 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2386.672 | 4.25  | 28.75  | 35.64  | 48.93  | 46.29  | 54.00  | -7.71 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 47.20  | 44.57  | 54.00  | -9.43 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 105.00 | 102.58 | 54.00  | 48.58 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

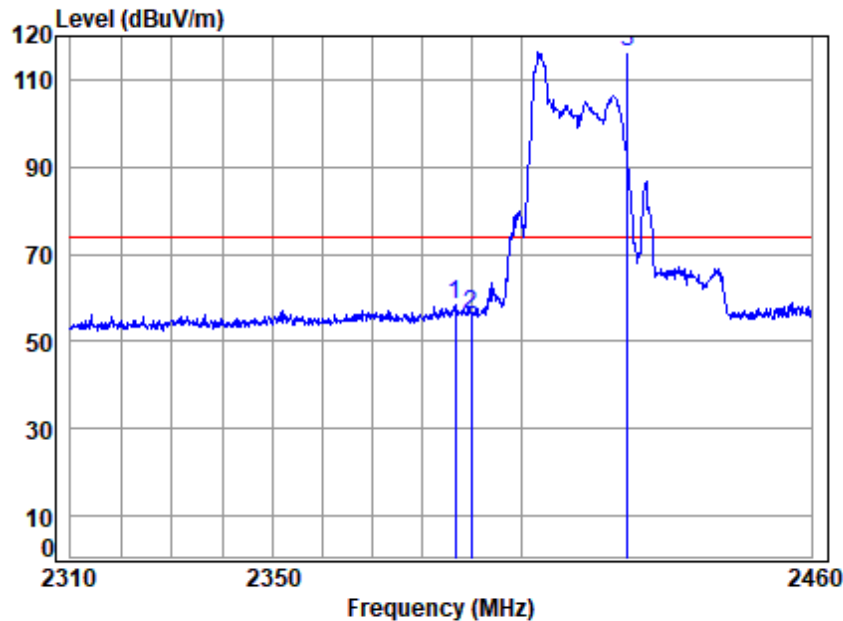


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 26 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2386.822 | 4.25  | 28.75  | 35.64  | 60.98  | 58.34  | 74.00  | -15.66 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 58.53  | 55.90  | 74.00  | -18.10 | Peak   |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 118.56 | 116.14 | 74.00  | 42.14  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

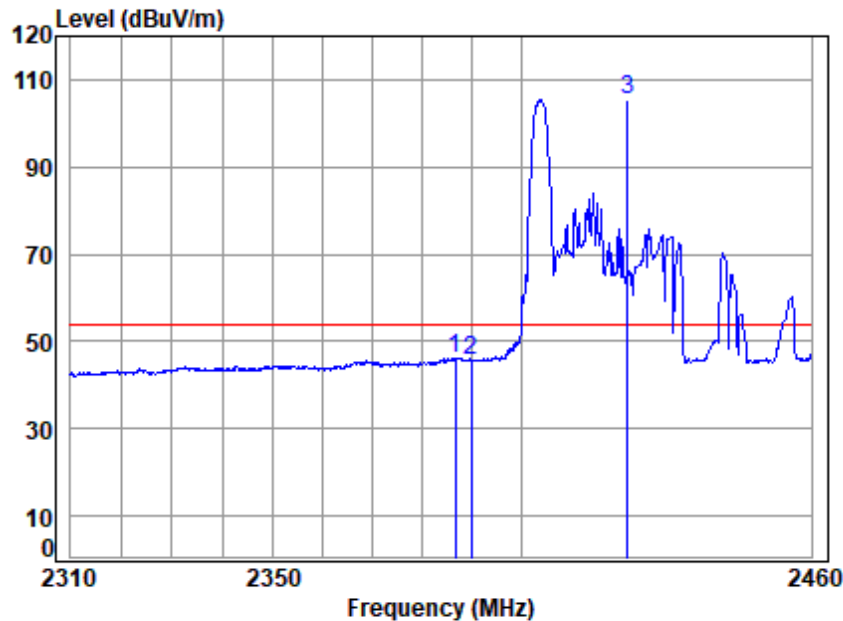


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 26 RU

|      |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|------|----------|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq |          | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz  |          | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1    | 2386.672 | 4.25  | 28.75  | 35.64  | 48.87  | 46.23  | 54.00  | -7.77 | Average |
| 2    | 2390.000 | 4.25  | 28.76  | 35.64  | 48.27  | 45.64  | 54.00  | -8.36 | Average |
| 3 q  | 2422.000 | 4.28  | 28.93  | 35.63  | 107.86 | 105.44 | 54.00  | 51.44 | Average |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:40MHz; Channel:Low

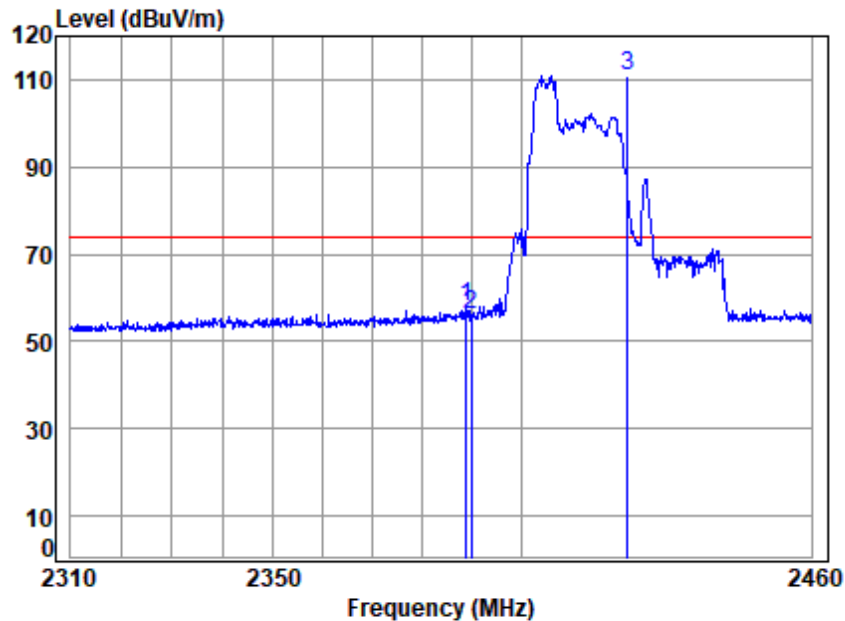


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2388.925 | 4.25  | 28.76  | 35.64  | 60.68  | 58.05  | 74.00  | -15.95 | peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 58.79  | 56.16  | 74.00  | -17.84 | peak   |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 113.36 | 110.94 | 74.00  | 36.94  | peak   |





Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU52); Bandwidth:40MHz; Channel:Low

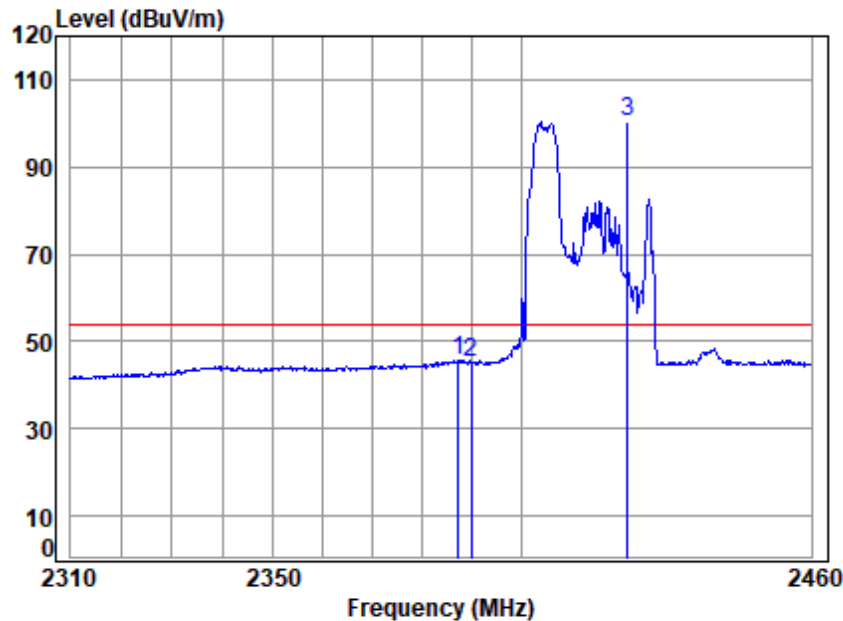

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2387.272 | 4.25  | 28.75  | 35.64  | 48.31  | 45.67  | 54.00  | -8.33 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 47.62  | 44.99  | 54.00  | -9.01 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 103.00 | 100.58 | 54.00  | 46.58 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 90 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:40MHz; Channel:Low

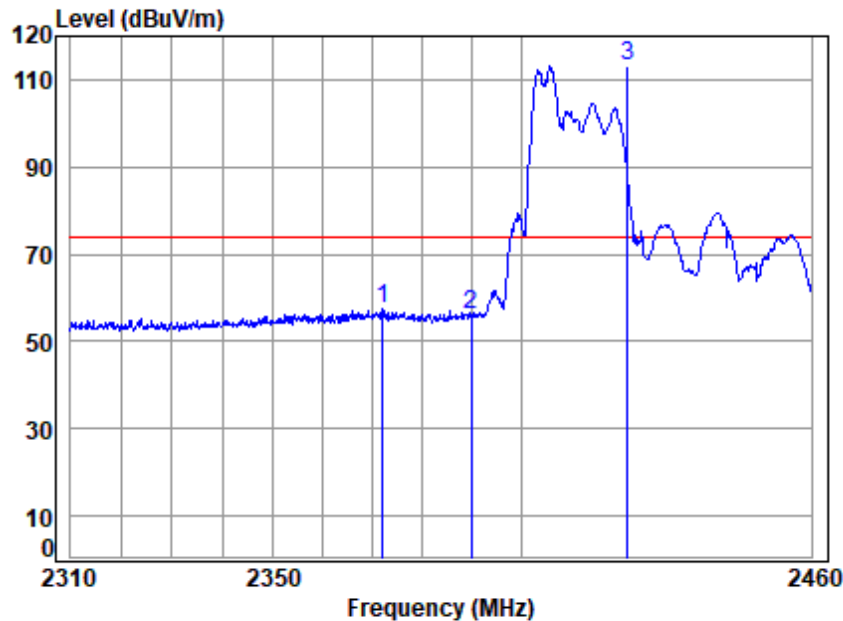

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2372.002 | 4.23  | 28.69  | 35.65  | 60.06  | 57.33  | 74.00  | -16.67 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 58.70  | 56.07  | 74.00  | -17.93 | Peak   |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 115.40 | 112.98 | 74.00  | 38.98  | Peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Shenzhen) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU52); Bandwidth:40MHz; Channel:Low

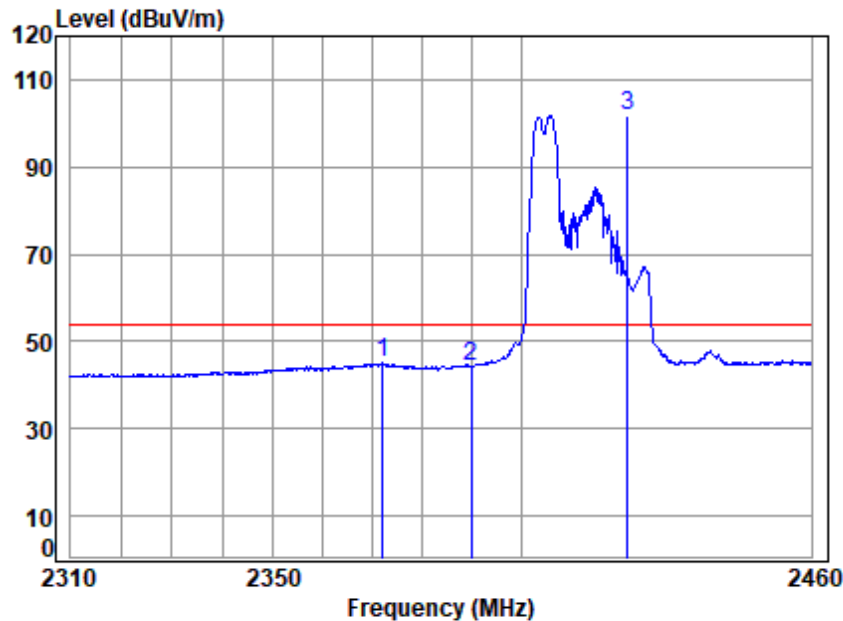

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 52 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|--------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1   | 2372.151 | 4.23  | 28.69  | 35.65  | 47.80  | 45.07  | 54.00  | -8.93 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 47.06  | 44.43  | 54.00  | -9.57 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 104.12 | 101.70 | 54.00  | 47.70 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 92 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

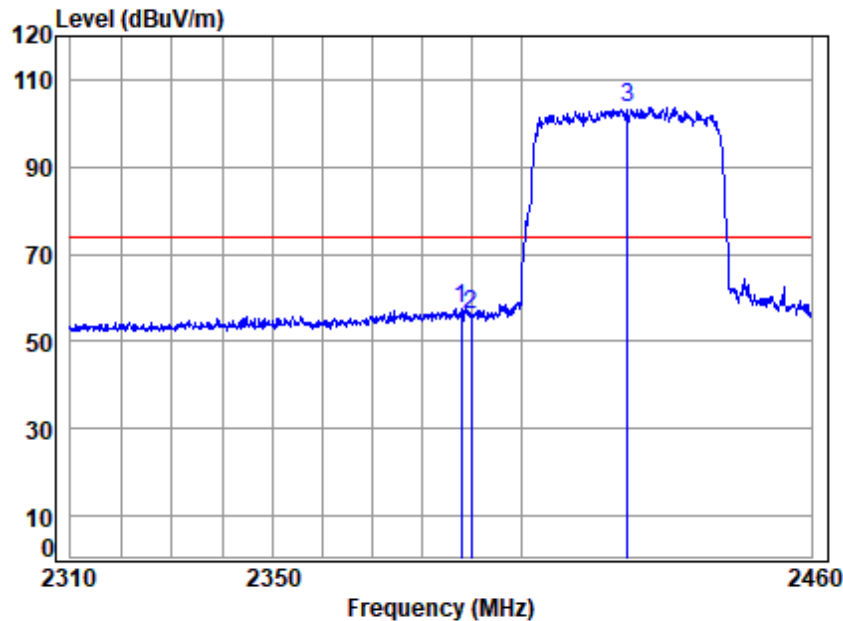

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2388.023 | 4.25  | 28.75  | 35.64  | 60.21  | 57.57  | 74.00  | -16.43 | peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 58.61  | 55.98  | 74.00  | -18.02 | peak   |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 106.07 | 103.65 | 74.00  | 29.65  | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

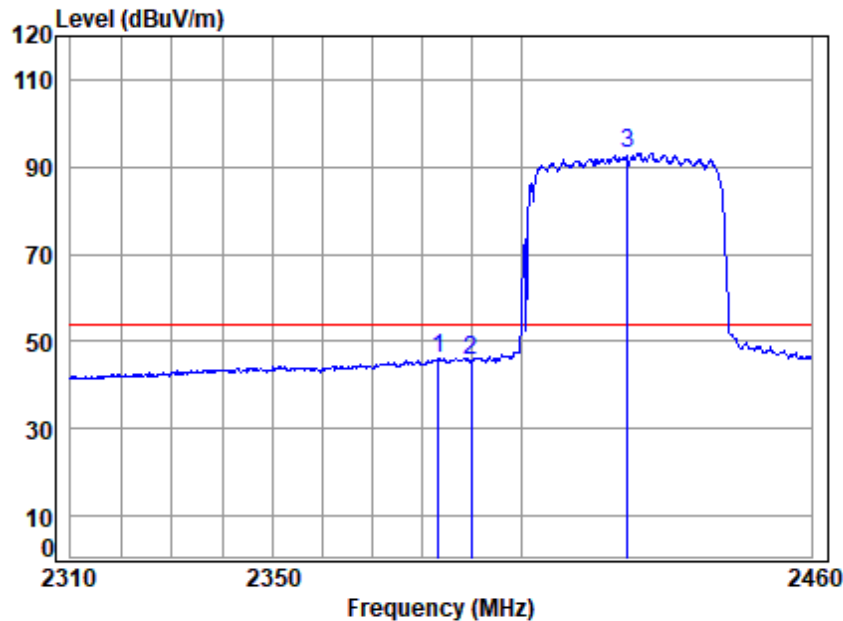


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1   | 2383.371 | 4.24  | 28.73  | 35.64  | 48.89 | 46.22  | 54.00  | -7.78 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 48.24 | 45.61  | 54.00  | -8.39 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 95.53 | 93.11  | 54.00  | 39.11 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

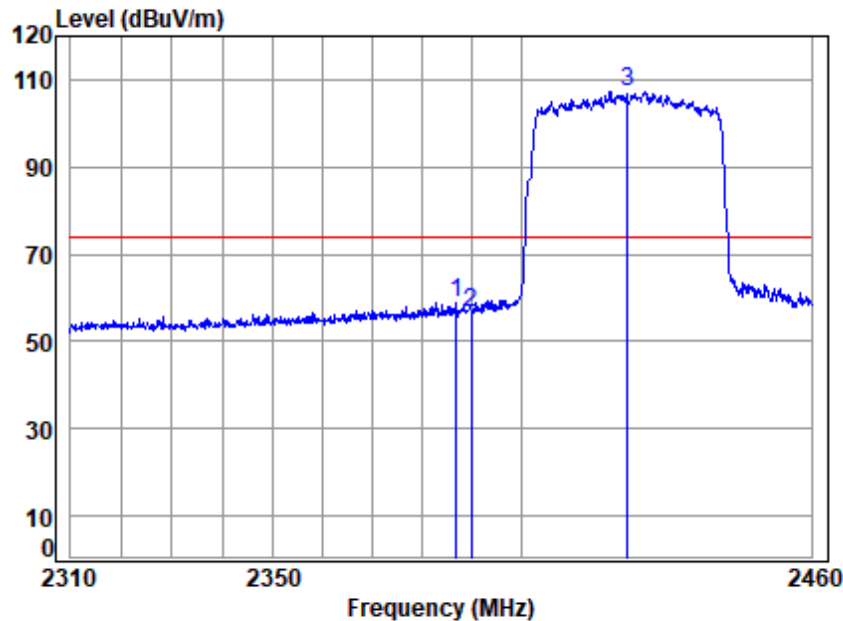


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1   | 2386.972 | 4.25  | 28.75  | 35.64  | 61.48  | 58.84  | 74.00  | -15.16 | Peak   |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 59.43  | 56.80  | 74.00  | -17.20 | Peak   |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 109.66 | 107.24 | 74.00  | 33.24  | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

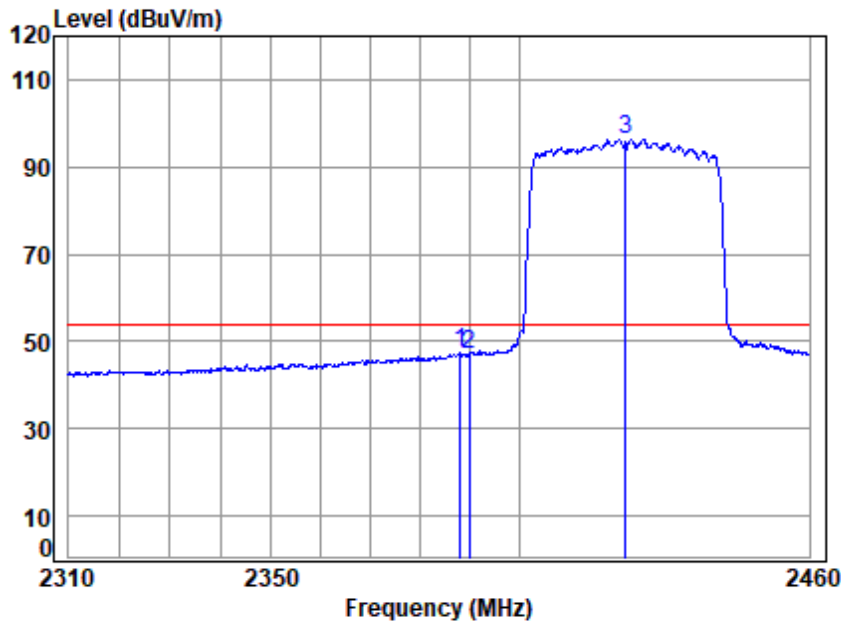

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1   | 2388.174 | 4.25  | 28.75  | 35.64  | 49.93 | 47.29  | 54.00  | -6.71 | Average |
| 2   | 2390.000 | 4.25  | 28.76  | 35.64  | 49.43 | 46.80  | 54.00  | -7.20 | Average |
| 3 q | 2422.000 | 4.28  | 28.93  | 35.63  | 98.83 | 96.41  | 54.00  | 42.41 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 96 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106); Bandwidth:40MHz; Channel:High

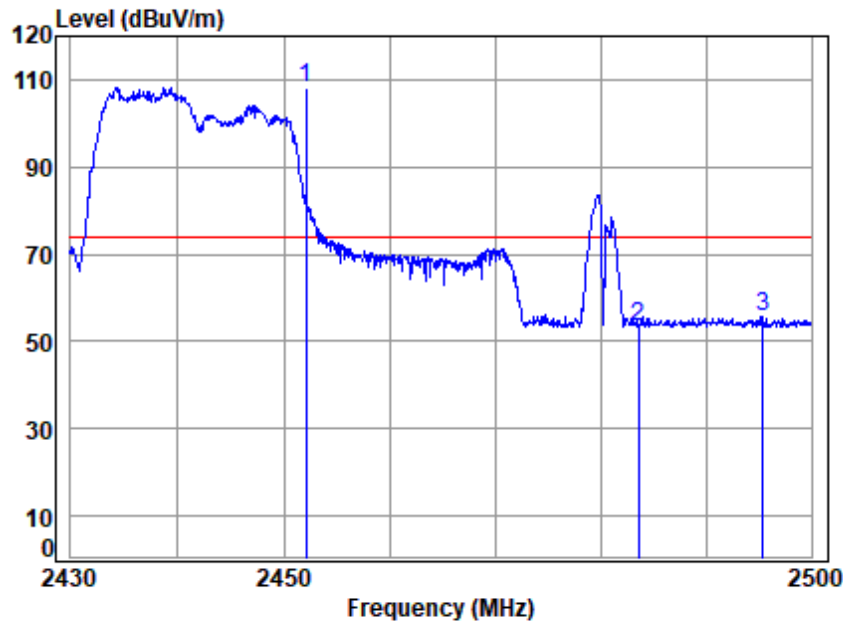

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 106 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 110.42 | 108.22 | 74.00  | 34.22  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 55.53  | 53.56  | 74.00  | -20.44 | peak   |
| 3 2495.389   |  | 4.36  | 29.37  | 35.60  | 57.57  | 55.70  | 74.00  | -18.30 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 97 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU106); Bandwidth:40MHz; Channel:High

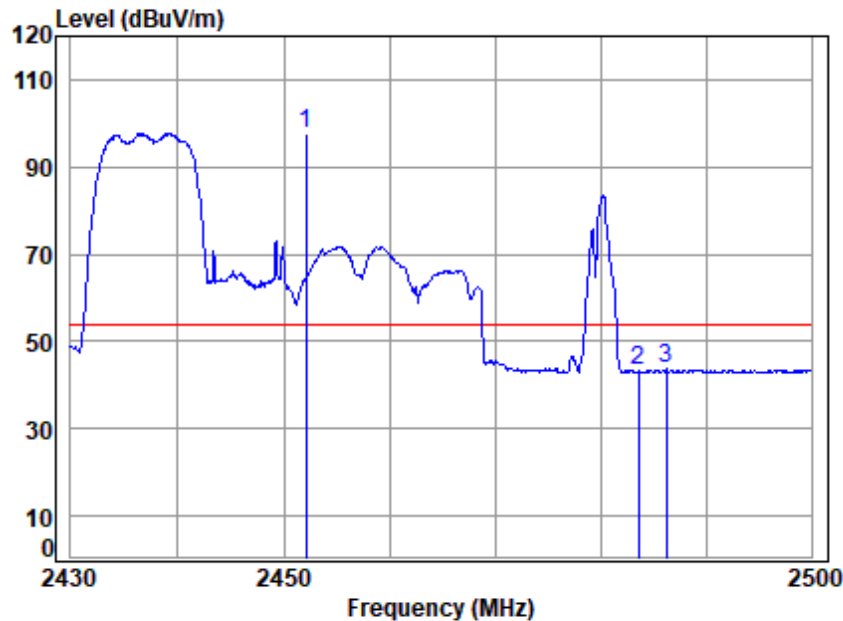

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 106 RU

|              |  | Cable | Ant    | Preamp | Read  | Limit  | Over   |                |
|--------------|--|-------|--------|--------|-------|--------|--------|----------------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark   |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB             |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 99.75 | 97.55  | 54.00  | 43.55 Average  |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 45.09 | 43.12  | 54.00  | -10.88 Average |
| 3 2486.123   |  | 4.35  | 29.32  | 35.61  | 45.53 | 43.59  | 54.00  | -10.41 Average |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Limited Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 98 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106); Bandwidth:40MHz; Channel:High

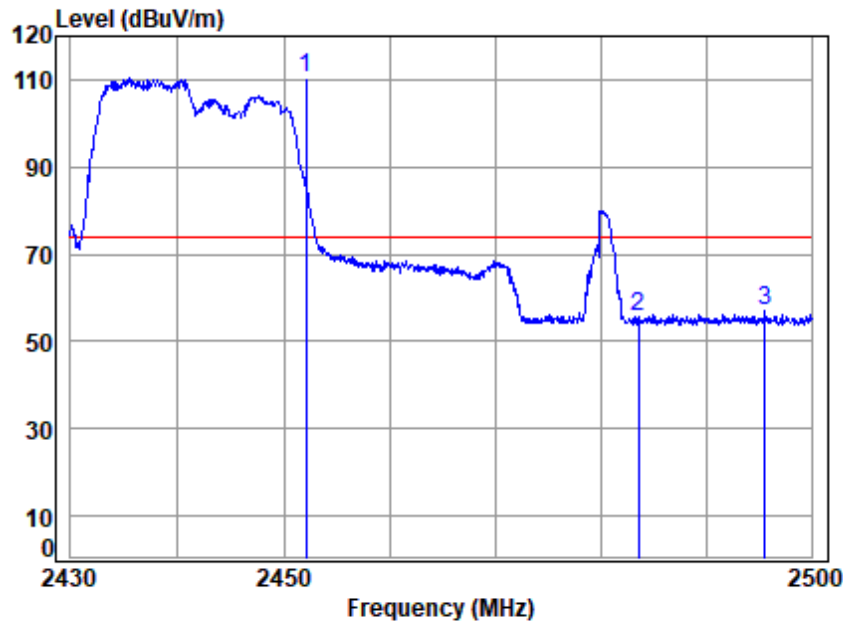

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 106 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 112.76 | 110.56 | 74.00  | 36.56  | Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 57.66  | 55.69  | 74.00  | -18.31 | Peak   |
| 3 2495.602   |  | 4.36  | 29.37  | 35.60  | 58.96  | 57.09  | 74.00  | -16.91 | Peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU106); Bandwidth:40MHz; Channel:High

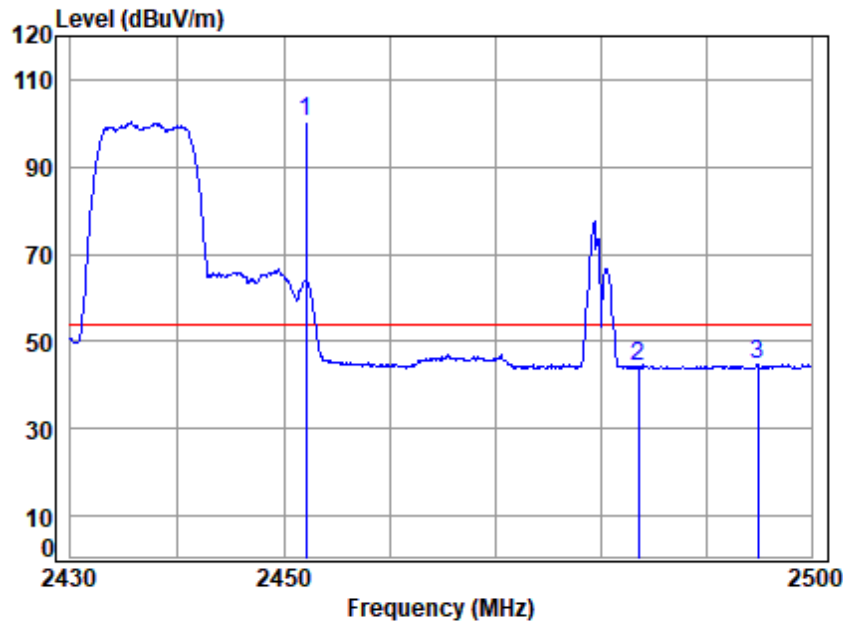

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 106 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|--------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB    |         |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 102.42 | 100.22 | 54.00  | 46.22 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 46.07  | 44.10  | 54.00  | -9.90 | Average |
| 3 2494.893   |  | 4.36  | 29.37  | 35.60  | 46.62  | 44.75  | 54.00  | -9.25 | Average |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) Limited Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 100 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU242); Bandwidth:40MHz; Channel:High

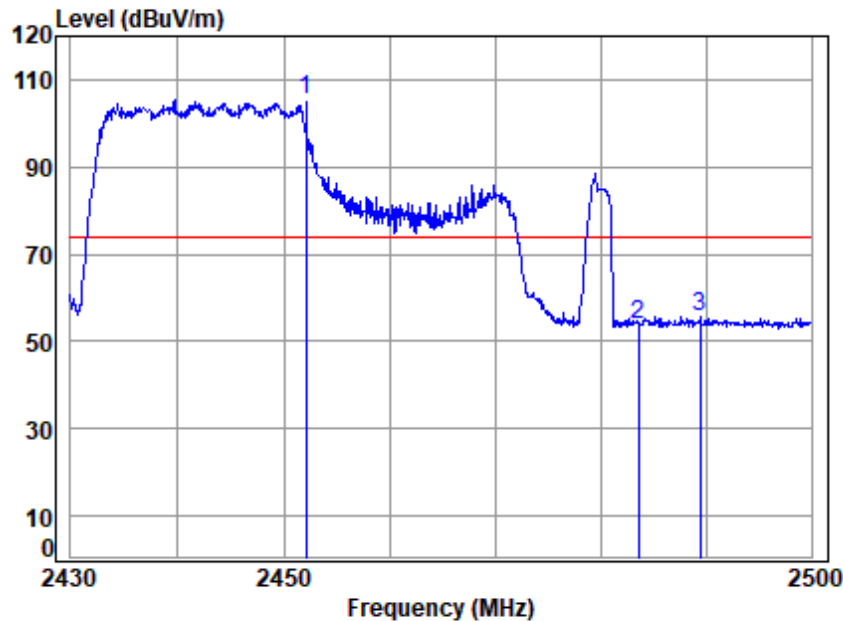

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 242 RU

|     |          | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|--------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q | 2452.000 | 4.31  | 29.11  | 35.62  | 107.37 | 105.17 | 74.00  | 31.17  | peak   |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 55.75  | 53.78  | 74.00  | -20.22 | peak   |
| 3   | 2489.373 | 4.35  | 29.34  | 35.61  | 57.74  | 55.82  | 74.00  | -18.18 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU242); Bandwidth:40MHz; Channel:High

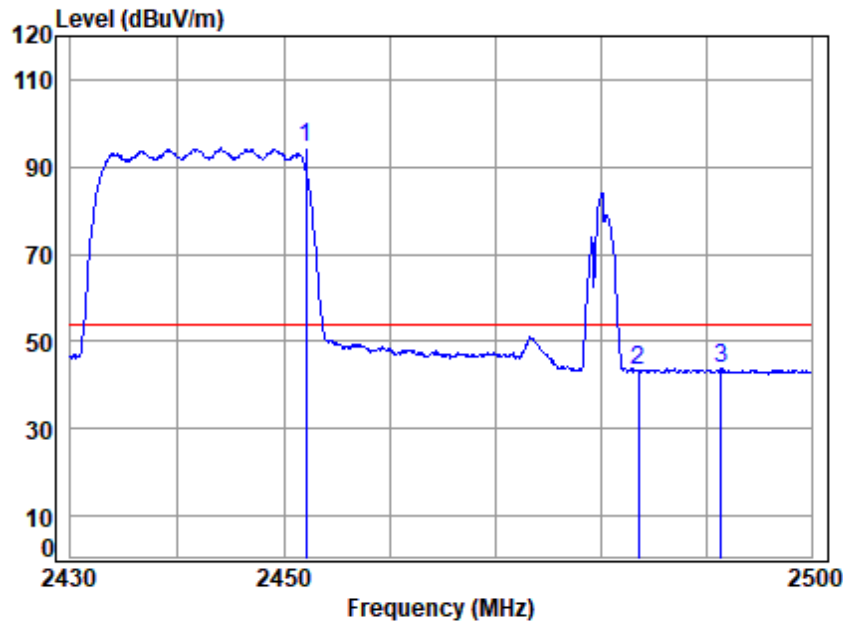


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 242 RU

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |         |
|--------------|--|-------|--------|--------|-------|--------|--------|--------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |         |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 96.45 | 94.25  | 54.00  | 40.25  | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 45.11 | 43.14  | 54.00  | -10.86 | Average |
| 3 2491.353   |  | 4.35  | 29.35  | 35.61  | 45.60 | 43.69  | 54.00  | -10.31 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU242); Bandwidth:40MHz; Channel:High

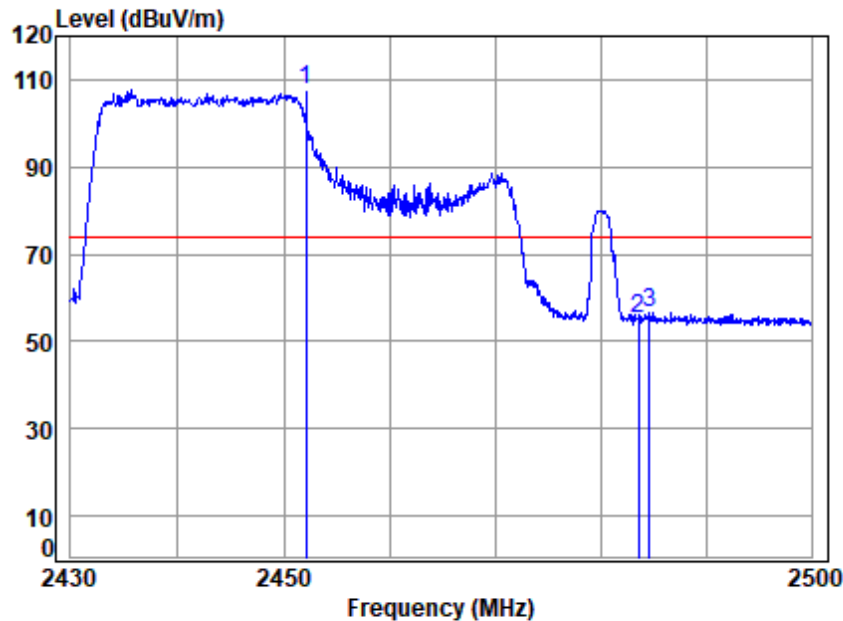


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 242 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 109.68 | 107.48 | 74.00  | 33.48  | Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 56.96  | 54.99  | 74.00  | -19.01 | Peak   |
| 3 2484.500   |  | 4.35  | 29.31  | 35.61  | 58.38  | 56.43  | 74.00  | -17.57 | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU242); Bandwidth:40MHz; Channel:High

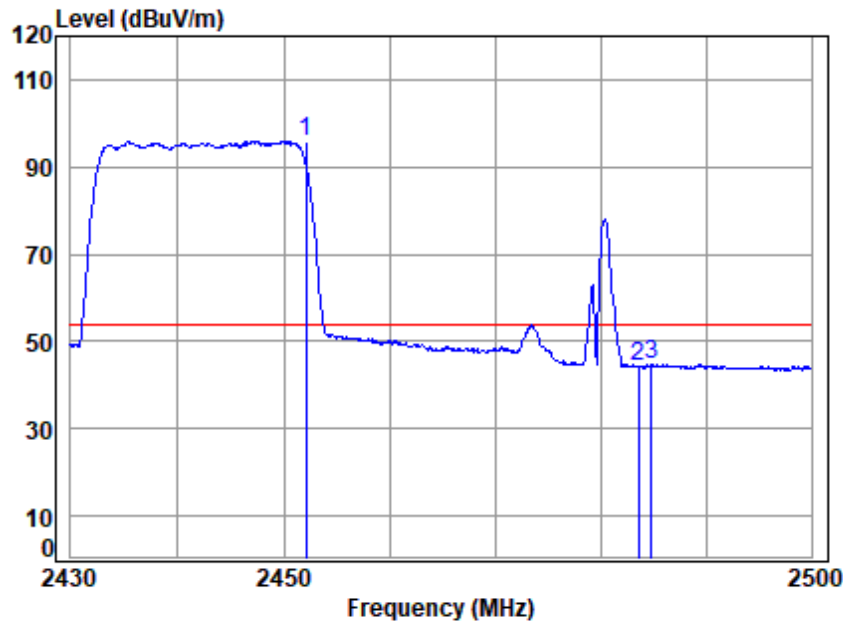

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 242 RU

|              |  | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|--------------|--|-------|--------|--------|-------|--------|--------|-------|---------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 98.21 | 96.01  | 54.00  | 42.01 | Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 46.43 | 44.46  | 54.00  | -9.54 | Average |
| 3 2484.711   |  | 4.35  | 29.31  | 35.61  | 46.69 | 44.74  | 54.00  | -9.26 | Average |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 104 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

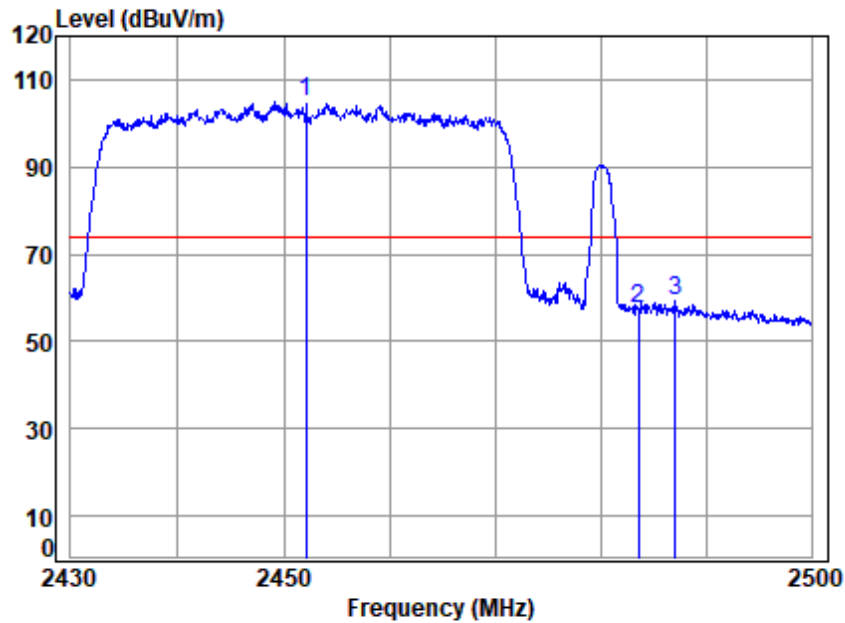

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 107.08 | 104.88 | 74.00  | 30.88  | peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 59.33  | 57.36  | 74.00  | -16.64 | peak   |
| 3 2486.970   |  | 4.35  | 29.32  | 35.61  | 61.22  | 59.28  | 74.00  | -14.72 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (Internal Use Only) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

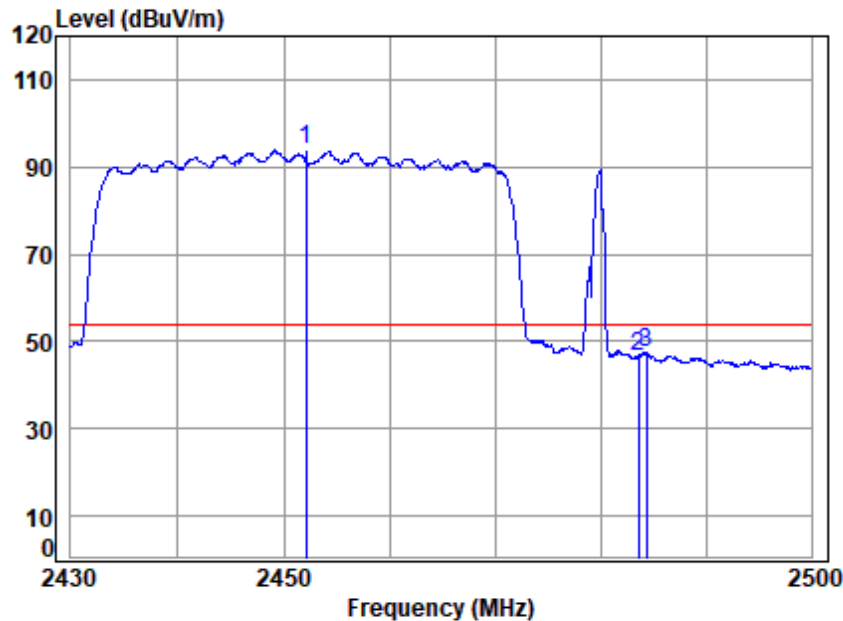


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over  |         |
|-----|----------|-------|--------|--------|-------|--------|--------|-------|---------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit | Remark  |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB    |         |
| 1 q | 2452.000 | 4.31  | 29.11  | 35.62  | 95.99 | 93.79  | 54.00  | 39.79 | Average |
| 2   | 2483.500 | 4.34  | 29.30  | 35.61  | 48.71 | 46.74  | 54.00  | -7.26 | Average |
| 3   | 2484.217 | 4.34  | 29.31  | 35.61  | 49.44 | 47.48  | 54.00  | -6.52 | Average |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

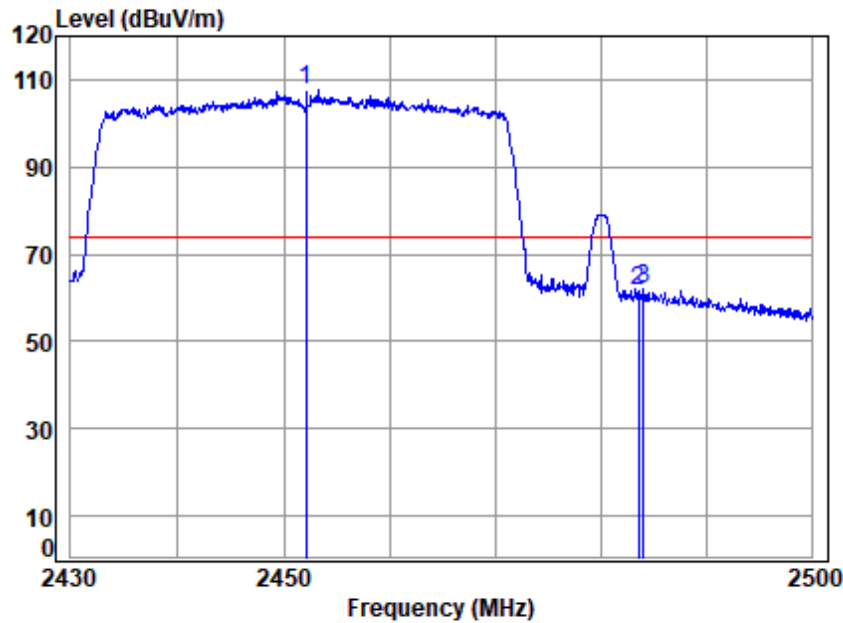


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|              |  | Cable | Ant    | Preamp | Read   |        | Limit  | Over   |        |
|--------------|--|-------|--------|--------|--------|--------|--------|--------|--------|
| Freq         |  | Loss  | Factor | Factor | Level  | Level  | Line   | Limit  | Remark |
| MHz          |  | dB    | dB/m   | dB     | dBuV   | dBuV/m | dBuV/m | dB     |        |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 109.98 | 107.78 | 74.00  | 33.78  | Peak   |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 63.34  | 61.37  | 74.00  | -12.63 | Peak   |
| 3 2483.935   |  | 4.34  | 29.30  | 35.61  | 63.97  | 62.00  | 74.00  | -12.00 | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

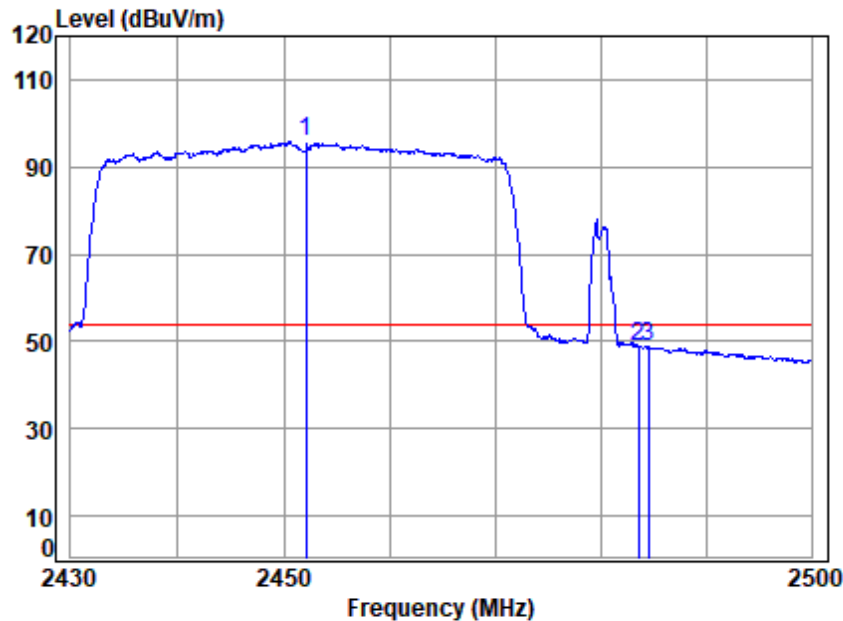

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2452 Band edge  
Note : 2.4G WIFI 11AX40 484 RU

|              |  | Cable | Ant    | Preamp | Read  | Limit  | Over   |               |
|--------------|--|-------|--------|--------|-------|--------|--------|---------------|
| Freq         |  | Loss  | Factor | Factor | Level | Level  | Line   | Limit Remark  |
| MHz          |  | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB            |
| 1 q 2452.000 |  | 4.31  | 29.11  | 35.62  | 97.80 | 95.60  | 54.00  | 41.60 Average |
| 2 2483.500   |  | 4.34  | 29.30  | 35.61  | 50.68 | 48.71  | 54.00  | -5.29 Average |
| 3 2484.429   |  | 4.34  | 29.31  | 35.61  | 50.87 | 48.91  | 54.00  | -5.09 Average |



## 7.8 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| 960-1000       | 500                              | 3                            |

### 7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 47.6 % RH

Atmospheric Pressure: 1015 mbar


### 7.8.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Pre-scan              | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.                         |
| Final test            | 08        | Charging + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |





### 7.8.3 Test Setup Diagram

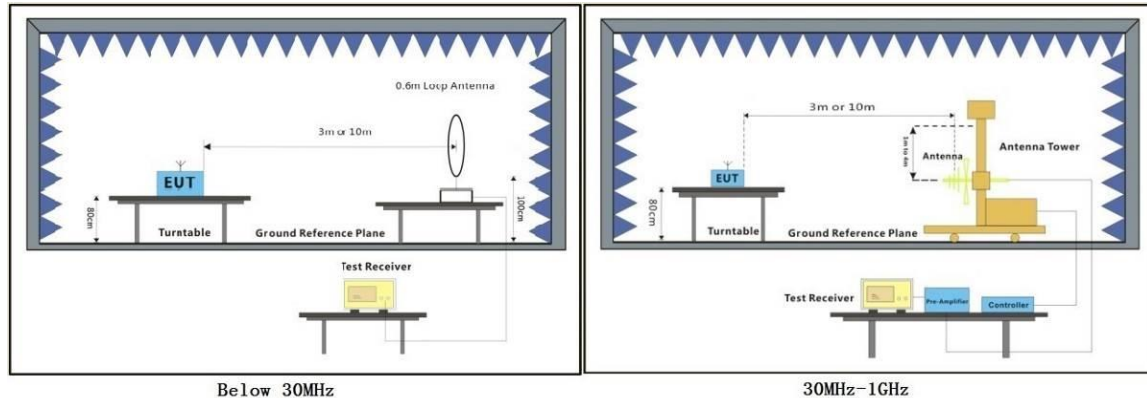

### 7.8.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 110 of 352

Test Mode: 08; Polarity: Horizontal

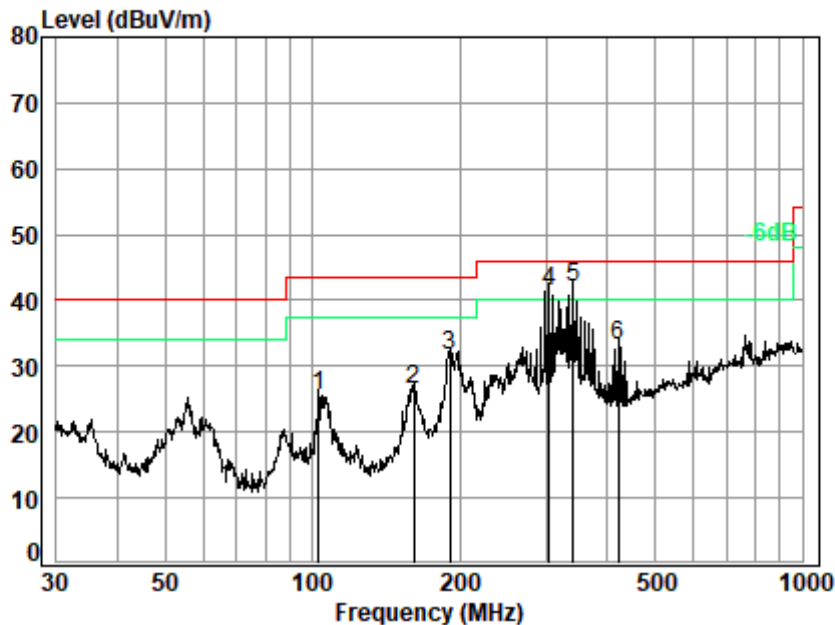

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : 00478AT/00479AT  
Test Mode: 08

|     |        | Ant    | Cable | Preamp | Read  | Limit  | Over   |              |
|-----|--------|--------|-------|--------|-------|--------|--------|--------------|
|     | Freq   | Factor | Loss  | Factor | Level | Level  | Line   | Limit Remark |
|     | MHz    | dB/m   | dB    | dB     | dBuV  | dBuV/m | dBuV/m | dB           |
| 1   | 103.08 | 12.98  | 1.16  | 26.99  | 38.43 | 25.58  | 43.50  | -17.92 QP    |
| 2   | 160.91 | 13.73  | 1.47  | 26.76  | 38.09 | 26.53  | 43.50  | -16.97 QP    |
| 3   | 190.41 | 14.68  | 1.64  | 26.64  | 41.80 | 31.48  | 43.50  | -12.02 QP    |
| 4   | 304.61 | 18.96  | 2.14  | 26.21  | 46.60 | 41.49  | 46.00  | -4.51 QP     |
| 5 q | 340.78 | 19.64  | 2.27  | 26.32  | 46.33 | 41.92  | 46.00  | -4.08 QP     |
| 6   | 420.58 | 21.23  | 2.55  | 26.56  | 36.05 | 33.27  | 46.00  | -12.73 QP    |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 111 of 352

Test Mode: 08; Polarity: Vertical

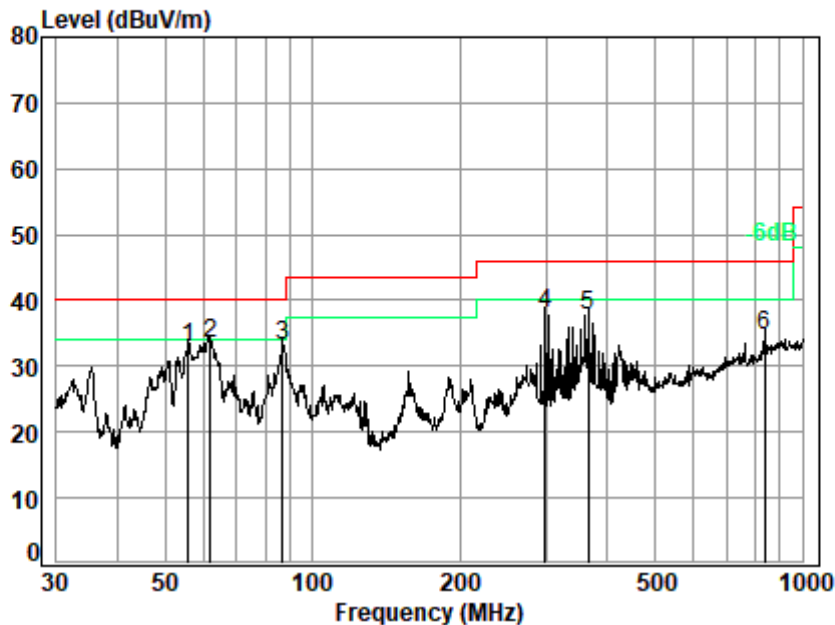

Site : chamber

Condition: 3m VERTICAL

Job No. : 00478AT/00479AT

Test Mode: 08

|     |        | Ant    | Cable | Preamp | Read  | Limit  | Over   |              |
|-----|--------|--------|-------|--------|-------|--------|--------|--------------|
|     | Freq   | Factor | Loss  | Factor | Level | Level  | Line   | Limit Remark |
|     | MHz    | dB/m   | dB    | dB     | dBuV  | dBuV/m | dBuV/m | dB           |
| 1   | 55.80  | 11.80  | 0.82  | 27.15  | 47.48 | 32.95  | 40.00  | -7.05 QP     |
| 2 q | 62.00  | 10.98  | 0.87  | 27.13  | 48.83 | 33.55  | 40.00  | -6.45 QP     |
| 3   | 86.81  | 11.51  | 1.06  | 27.04  | 47.55 | 33.08  | 40.00  | -6.92 QP     |
| 4   | 298.27 | 18.55  | 2.11  | 26.21  | 43.56 | 38.01  | 46.00  | -7.99 QP     |
| 5   | 365.54 | 21.03  | 2.36  | 26.40  | 40.68 | 37.67  | 46.00  | -8.33 QP     |
| 6   | 836.24 | 27.44  | 3.79  | 26.16  | 29.53 | 34.60  | 46.00  | -11.40 QP    |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (China) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 112 of 352

## 7.9 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209  
Test Method: ANSI C63.10 (2013) Section 6.6  
Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| Above 1000     | 500                              | 3                            |

### 7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 20.8 °C Humidity: 56.3 % RH Atmospheric Pressure: 1015 mbar

### 7.9.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description  |
|-----------------------|-----------|--|
| Pre-scan              | 07        | TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.                         |
| Final test            | 08        | Charging + TX mode_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW20); data rate @ MCS0 is the worst case of IEEE 802.11ax(HEW40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



### 7.9.3 Test Setup Diagram

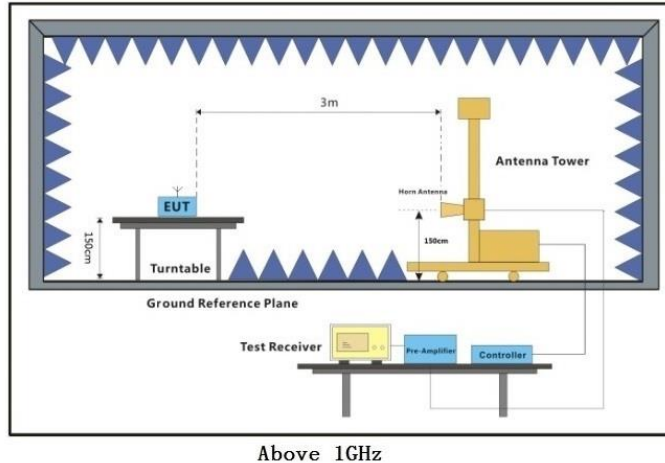

## 7.9.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

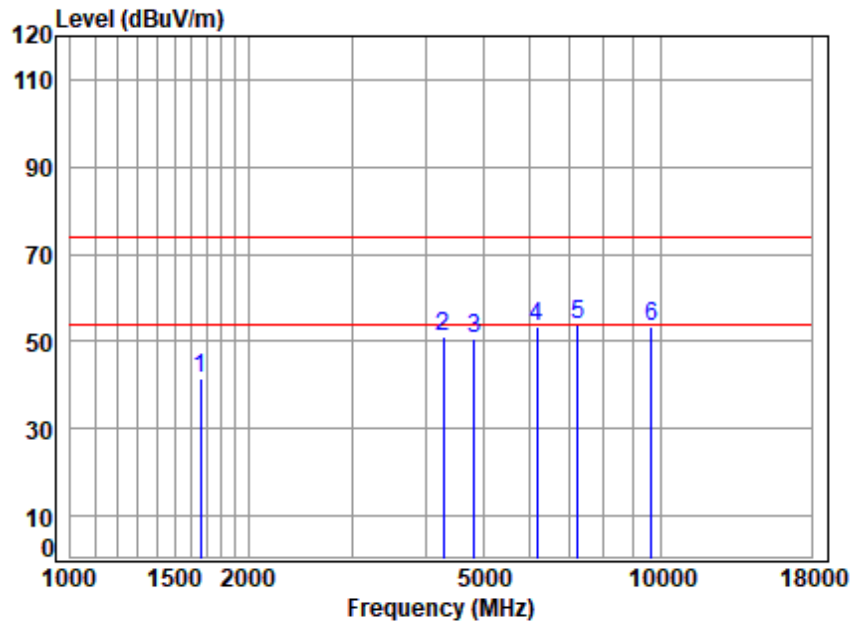

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11B

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1663.137 | 3.45  | 26.73  | 36.48  | 47.77 | 41.47  | 74.00  | -32.53 | peak   |
| 2    | 4279.589 | 6.56  | 33.60  | 34.53  | 45.52 | 51.15  | 74.00  | -22.85 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 44.57 | 50.65  | 74.00  | -23.35 | peak   |
| 4    | 6159.797 | 8.19  | 35.20  | 35.19  | 45.28 | 53.48  | 74.00  | -20.52 | peak   |
| 5 q  | 7236.000 | 8.54  | 35.80  | 35.95  | 45.45 | 53.84  | 74.00  | -20.16 | peak   |
| 6    | 9648.000 | 10.41 | 37.10  | 35.55  | 41.27 | 53.23  | 74.00  | -20.77 | peak   |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 116 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:Low

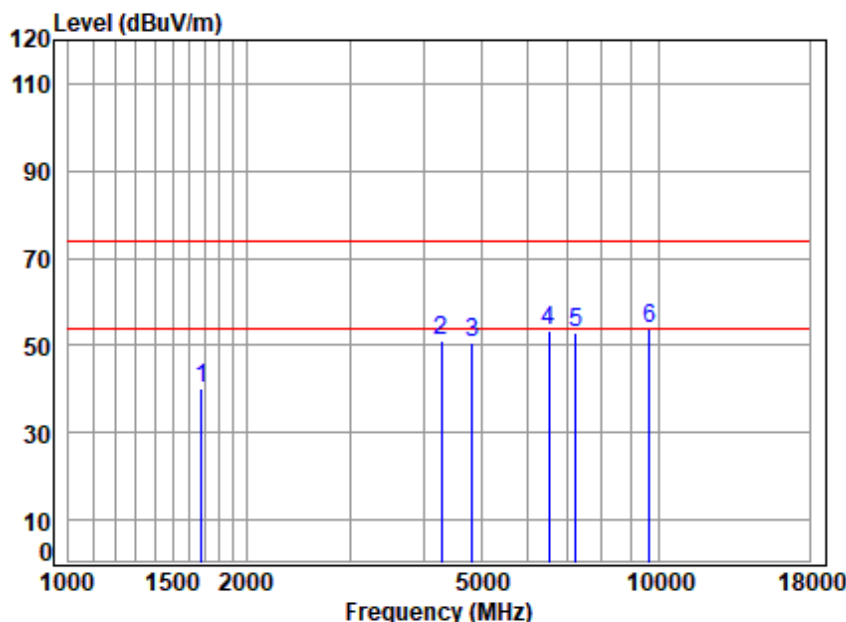

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11B

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1682.477 | 3.47  | 26.77  | 36.44  | 46.56 | 40.36  | 74.00  | -33.64 | peak   |
| 2    | 4291.977 | 6.57  | 33.60  | 34.54  | 45.35 | 50.98  | 74.00  | -23.02 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 44.67 | 50.75  | 74.00  | -23.25 | peak   |
| 4    | 6507.536 | 8.24  | 35.52  | 35.50  | 44.97 | 53.23  | 74.00  | -20.77 | peak   |
| 5    | 7236.000 | 8.54  | 35.80  | 35.95  | 44.42 | 52.81  | 74.00  | -21.19 | peak   |
| 6 q  | 9648.000 | 10.41 | 37.10  | 35.55  | 41.87 | 53.83  | 74.00  | -20.17 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 117 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

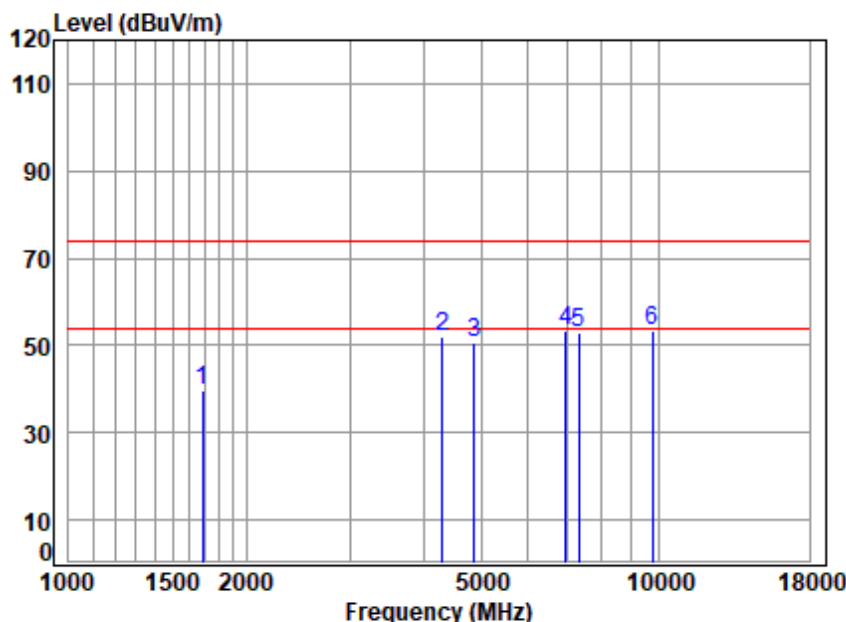

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11B

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1687.347 | 3.47  | 26.77  | 36.43  | 45.73 | 39.54  | 74.00  | -34.46 | peak   |
| 2    | 4304.400 | 6.59  | 33.60  | 34.54  | 46.29 | 51.94  | 74.00  | -22.06 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 44.19 | 50.43  | 74.00  | -23.57 | peak   |
| 4    | 6954.852 | 8.31  | 35.71  | 35.87  | 45.14 | 53.29  | 74.00  | -20.71 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.44 | 52.98  | 74.00  | -21.02 | peak   |
| 6 q  | 9748.000 | 10.45 | 37.20  | 35.56  | 41.48 | 53.57  | 74.00  | -20.43 | peak   |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:middle

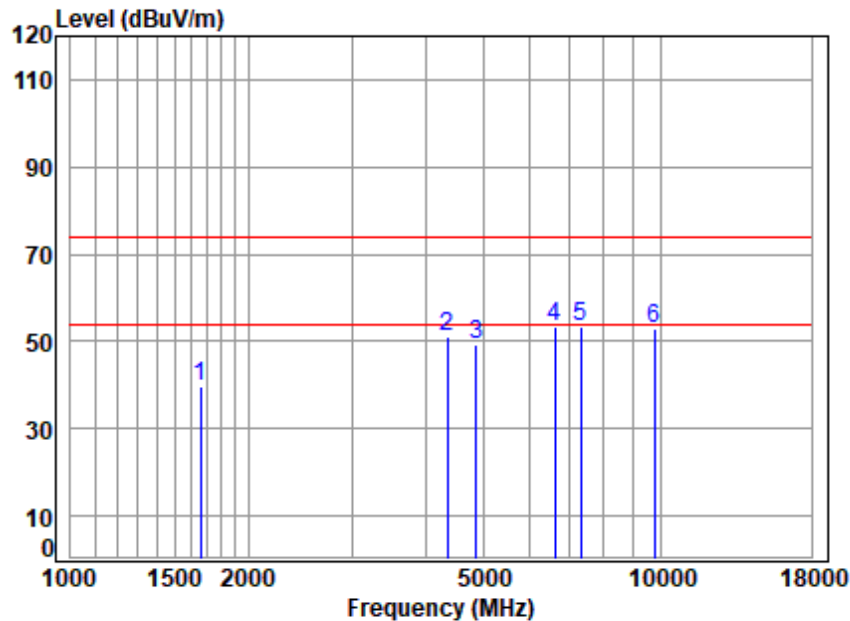


Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1663.137 | 3.45  | 26.73  | 36.48  | 45.85 | 39.55  | 74.00  | -34.45 | peak   |
| 2   | 4354.454 | 6.63  | 33.59  | 34.58  | 45.69 | 51.33  | 74.00  | -22.67 | peak   |
| 3   | 4874.000 | 7.10  | 34.05  | 34.91  | 43.02 | 49.26  | 74.00  | -24.74 | peak   |
| 4 q | 6621.375 | 8.26  | 35.60  | 35.60  | 45.17 | 53.43  | 74.00  | -20.57 | peak   |
| 5   | 7311.000 | 8.61  | 35.90  | 35.97  | 44.73 | 53.27  | 74.00  | -20.73 | peak   |
| 6   | 9748.000 | 10.45 | 37.20  | 35.56  | 40.95 | 53.04  | 74.00  | -20.96 | peak   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Horizontal; Modulation:802.11b; Bandwidth:20MHz; Channel:High

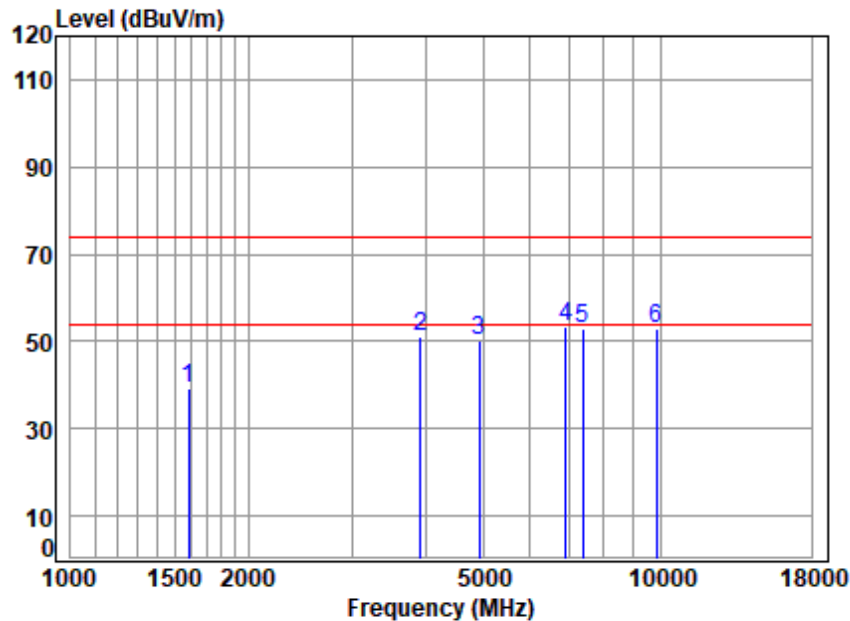


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 TX RSE  
: 2.4G WIFI 11B

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1583.392 | 3.35  | 26.30  | 36.67  | 46.45 | 39.43  | 74.00  | -34.57 | peak   |
| 2    | 3912.809 | 6.17  | 32.60  | 34.42  | 46.53 | 50.88  | 74.00  | -23.12 | peak   |
| 3    | 4924.000 | 7.15  | 34.15  | 34.94  | 43.99 | 50.35  | 74.00  | -23.65 | peak   |
| 4 q  | 6914.763 | 8.31  | 35.63  | 35.84  | 45.20 | 53.30  | 74.00  | -20.70 | peak   |
| 5    | 7386.000 | 8.68  | 35.90  | 35.98  | 44.36 | 52.96  | 74.00  | -21.04 | peak   |
| 6    | 9848.000 | 10.49 | 37.30  | 35.57  | 40.79 | 53.01  | 74.00  | -20.99 | peak   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test Mode: 08; Polarity: Vertical; Modulation:802.11b; Bandwidth:20MHz; Channel:High

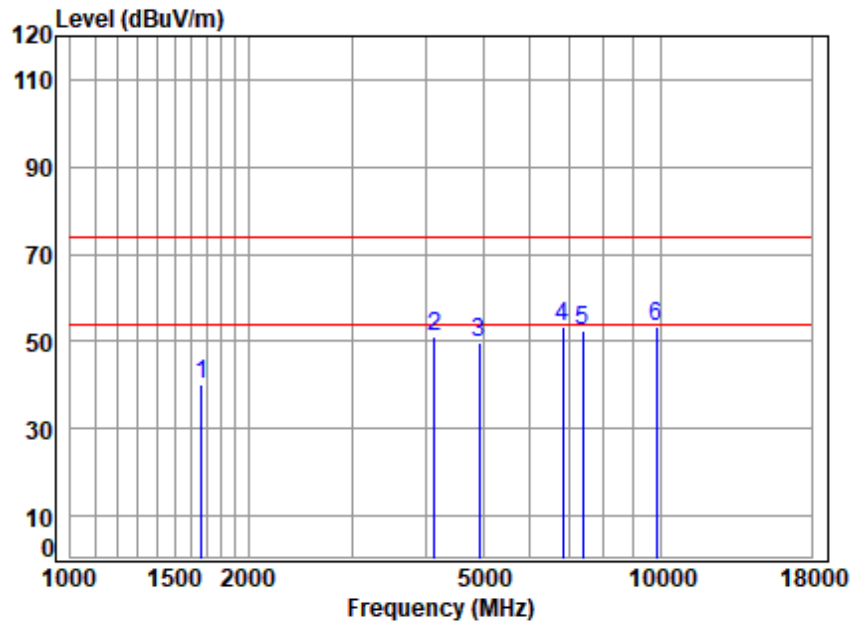

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11B

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1667.951 | 3.45  | 26.74  | 36.47  | 46.32 | 40.04  | 74.00  | -33.96 | peak   |
| 2   | 4133.699 | 6.42  | 33.07  | 34.43  | 45.91 | 50.97  | 74.00  | -23.03 | peak   |
| 3   | 4924.000 | 7.15  | 34.15  | 34.94  | 43.38 | 49.74  | 74.00  | -24.26 | peak   |
| 4 q | 6815.551 | 8.29  | 35.53  | 35.76  | 45.47 | 53.53  | 74.00  | -20.47 | peak   |
| 5   | 7386.000 | 8.68  | 35.90  | 35.98  | 44.07 | 52.67  | 74.00  | -21.33 | peak   |
| 6   | 9848.000 | 10.49 | 37.30  | 35.57  | 41.07 | 53.29  | 74.00  | -20.71 | peak   |






## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 121 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

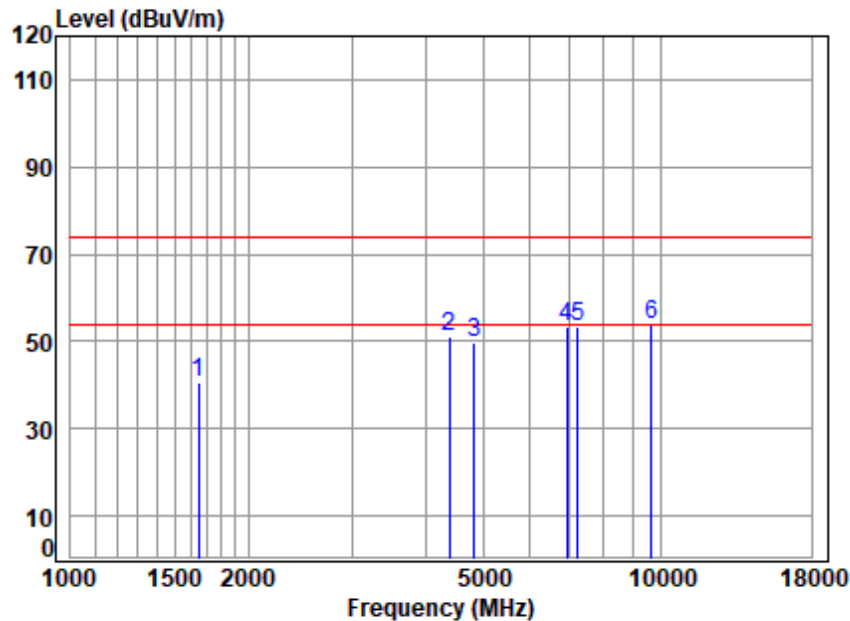

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11G

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1648.778 | 3.43  | 26.70  | 36.52  | 46.89 | 40.50  | 74.00  | -33.50 | peak   |
| 2    | 4379.699 | 6.66  | 33.54  | 34.59  | 45.56 | 51.17  | 74.00  | -22.83 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 43.74 | 49.82  | 74.00  | -24.18 | peak   |
| 4    | 6934.778 | 8.31  | 35.67  | 35.86  | 45.16 | 53.28  | 74.00  | -20.72 | peak   |
| 5    | 7236.000 | 8.54  | 35.80  | 35.95  | 45.01 | 53.40  | 74.00  | -20.60 | peak   |
| 6 q  | 9648.000 | 10.41 | 37.10  | 35.55  | 41.88 | 53.84  | 74.00  | -20.16 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 122 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:Low

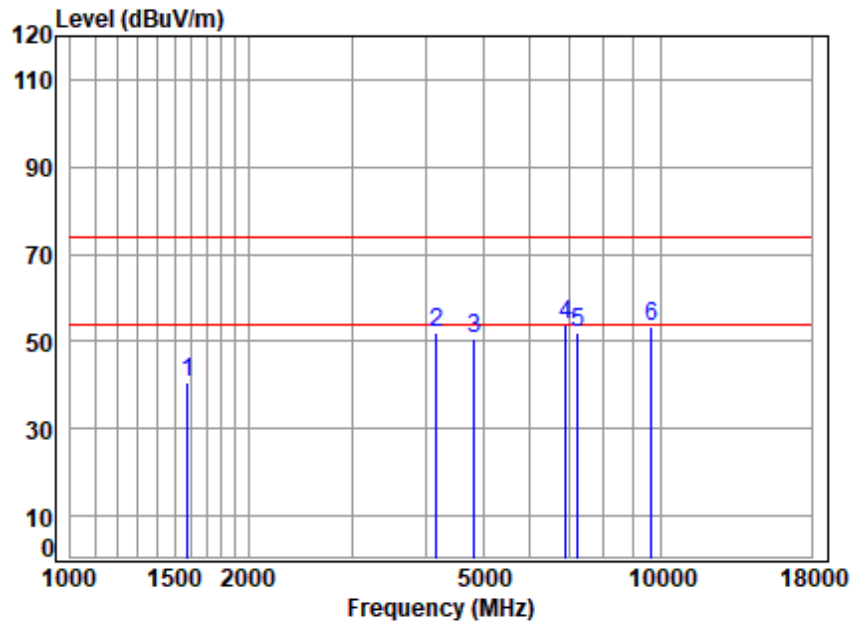

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 TX RSE  
 : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1578.822 | 3.34  | 26.25  | 36.68  | 47.53 | 40.44  | 74.00  | -33.56 | peak   |
| 2   | 4169.698 | 6.45  | 33.22  | 34.45  | 46.99 | 52.21  | 74.00  | -21.79 | peak   |
| 3   | 4824.000 | 7.06  | 33.90  | 34.88  | 44.41 | 50.49  | 74.00  | -23.51 | peak   |
| 4 q | 6894.806 | 8.30  | 35.60  | 35.82  | 45.64 | 53.72  | 74.00  | -20.28 | peak   |
| 5   | 7236.000 | 8.54  | 35.80  | 35.95  | 43.81 | 52.20  | 74.00  | -21.80 | peak   |
| 6   | 9648.000 | 10.41 | 37.10  | 35.55  | 41.58 | 53.54  | 74.00  | -20.46 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 123 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

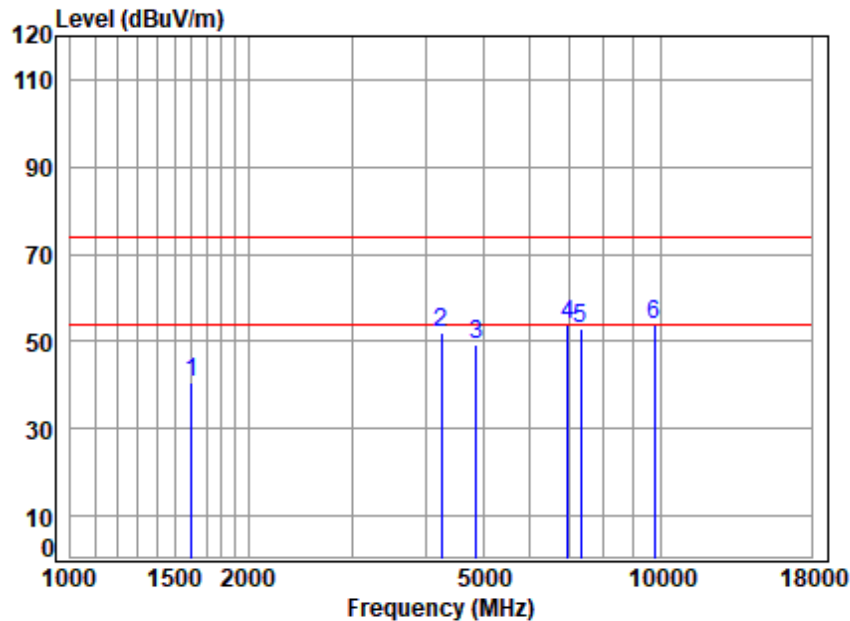

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11G

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1601.804 | 3.37  | 26.51  | 36.63  | 47.49 | 40.74  | 74.00  | -33.26 | peak   |
| 2    | 4254.921 | 6.54  | 33.60  | 34.51  | 46.34 | 51.97  | 74.00  | -22.03 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.11 | 49.35  | 74.00  | -24.65 | peak   |
| 4 q  | 6954.852 | 8.31  | 35.71  | 35.87  | 45.73 | 53.88  | 74.00  | -20.12 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.49 | 53.03  | 74.00  | -20.97 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.59 | 53.68  | 74.00  | -20.32 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 124 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:middle

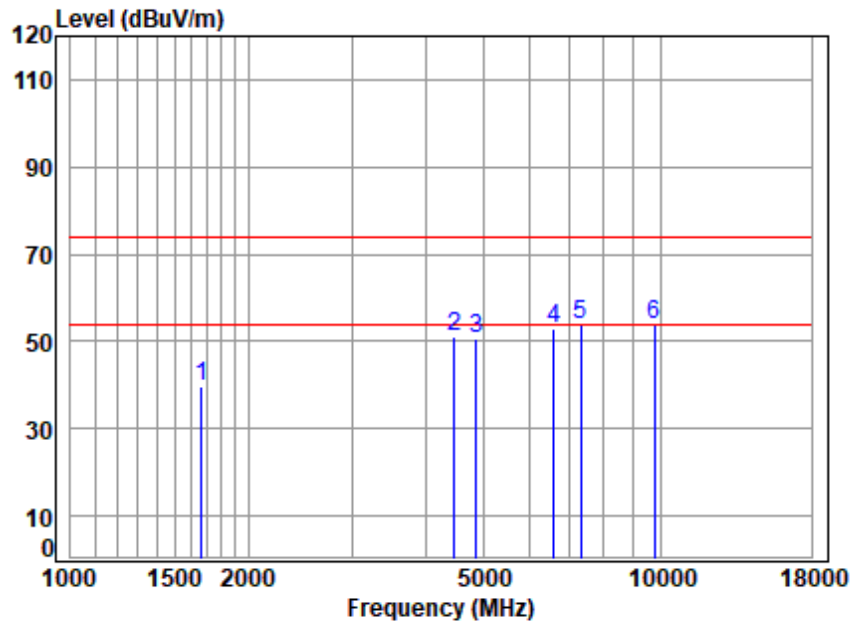

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11G

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1667.951 | 3.45  | 26.74  | 36.47  | 45.96 | 39.68  | 74.00  | -34.32 | peak   |
| 2    | 4469.214 | 6.74  | 33.50  | 34.65  | 45.40 | 50.99  | 74.00  | -23.01 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 44.28 | 50.52  | 74.00  | -23.48 | peak   |
| 4    | 6602.265 | 8.26  | 35.60  | 35.58  | 44.75 | 53.03  | 74.00  | -20.97 | peak   |
| 5 q  | 7311.000 | 8.61  | 35.90  | 35.97  | 45.23 | 53.77  | 74.00  | -20.23 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.55 | 53.64  | 74.00  | -20.36 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (CMAA) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11g; Bandwidth:20MHz; Channel:High

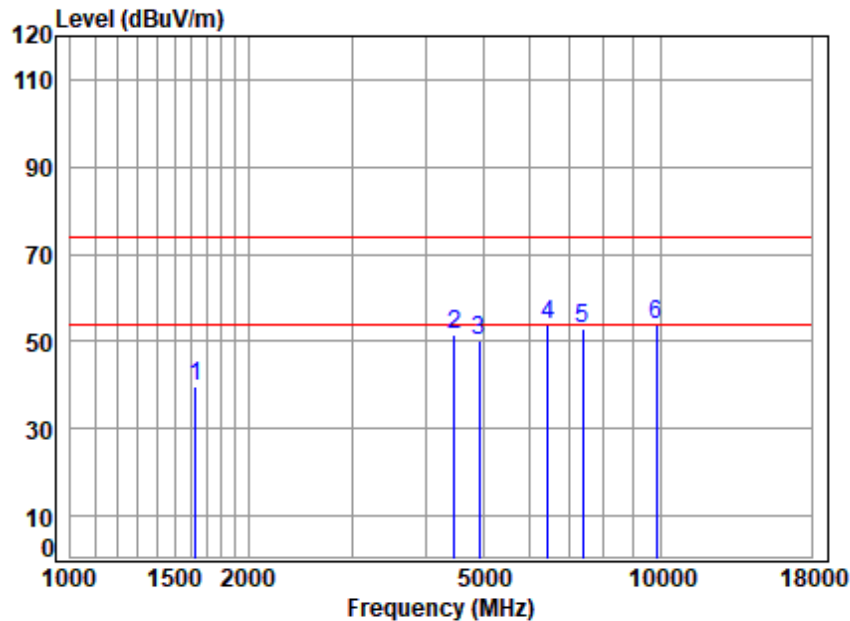

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11G

|     | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit  | Over   | Remark |
|-----|----------|------------|------------|---------------|------------|--------|--------|--------|--------|
|     | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1   | 1629.825 | 3.41       | 26.62      | 36.56         | 46.15      | 39.62  | 74.00  | -34.38 | peak   |
| 2   | 4469.214 | 6.74       | 33.50      | 34.65         | 46.02      | 51.61  | 74.00  | -22.39 | peak   |
| 3   | 4924.000 | 7.15       | 34.15      | 34.94         | 43.74      | 50.10  | 74.00  | -23.90 | peak   |
| 4 q | 6451.353 | 8.24       | 35.40      | 35.45         | 45.75      | 53.94  | 74.00  | -20.06 | peak   |
| 5   | 7386.000 | 8.68       | 35.90      | 35.98         | 44.47      | 53.07  | 74.00  | -20.93 | peak   |
| 6   | 9848.000 | 10.49      | 37.30      | 35.57         | 41.43      | 53.65  | 74.00  | -20.35 | peak   |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 126 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11g; Bandwidth:20MHz; Channel:High

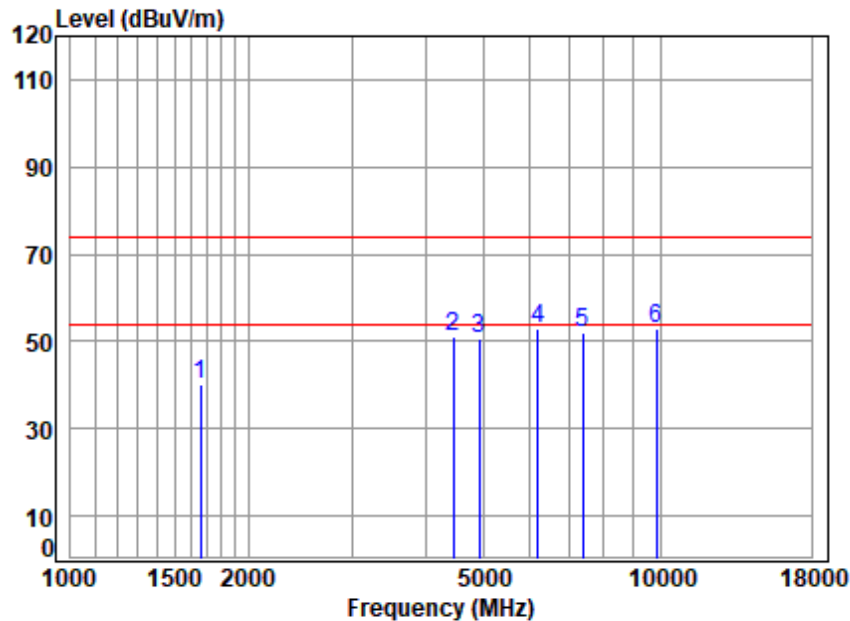

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11G

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1663.137 | 3.45  | 26.73  | 36.48  | 46.40 | 40.10  | 74.00  | -33.90 | peak   |
| 2   | 4456.315 | 6.73  | 33.50  | 34.64  | 45.59 | 51.18  | 74.00  | -22.82 | peak   |
| 3   | 4924.000 | 7.15  | 34.15  | 34.94  | 44.33 | 50.69  | 74.00  | -23.31 | peak   |
| 4 q | 6195.508 | 8.19  | 35.20  | 35.22  | 44.93 | 53.10  | 74.00  | -20.90 | peak   |
| 5   | 7386.000 | 8.68  | 35.90  | 35.98  | 43.55 | 52.15  | 74.00  | -21.85 | peak   |
| 6   | 9848.000 | 10.49 | 37.30  | 35.57  | 40.83 | 53.05  | 74.00  | -20.95 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

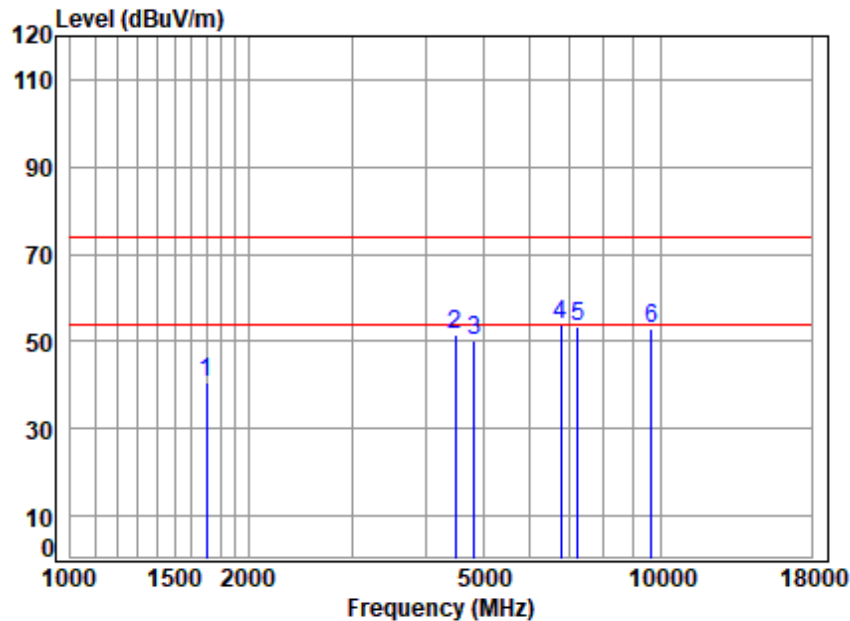


Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11N20

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1702.042 | 3.49  | 26.80  | 36.40  | 46.55 | 40.44  | 74.00  | -33.56 | peak   |
| 2   | 4495.125 | 6.77  | 33.50  | 34.67  | 45.99 | 51.59  | 74.00  | -22.41 | peak   |
| 3   | 4824.000 | 7.06  | 33.90  | 34.88  | 44.19 | 50.27  | 74.00  | -23.73 | peak   |
| 4 q | 6776.265 | 8.29  | 35.50  | 35.73  | 45.71 | 53.77  | 74.00  | -20.23 | peak   |
| 5   | 7236.000 | 8.54  | 35.80  | 35.95  | 44.77 | 53.16  | 74.00  | -20.84 | peak   |
| 6   | 9648.000 | 10.41 | 37.10  | 35.55  | 41.08 | 53.04  | 74.00  | -20.96 | peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

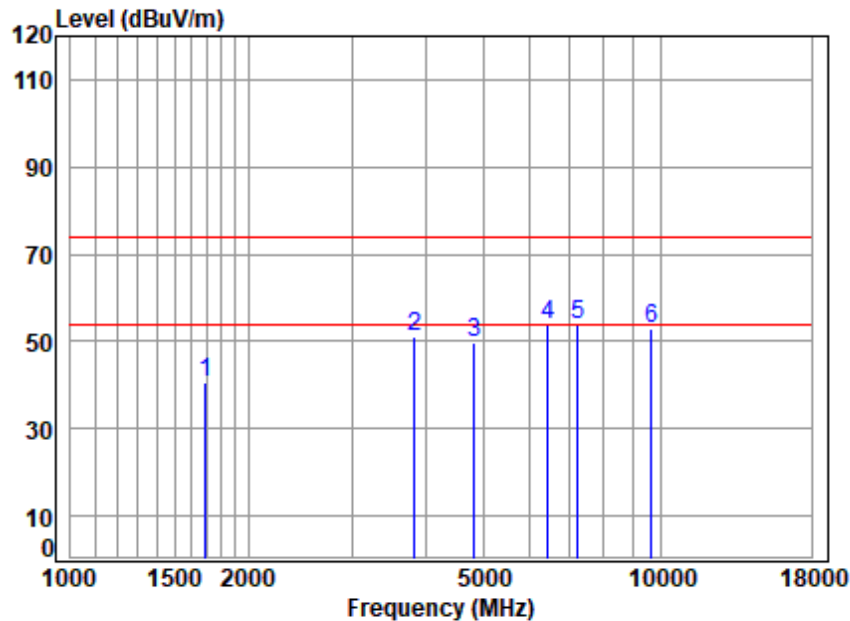

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 TX RSE  
 : 2.4G WIFI 11N20

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1692.231 | 3.48  | 26.78  | 36.42  | 46.71 | 40.55  | 74.00  | -33.45 | peak   |
| 2    | 3823.371 | 6.05  | 32.75  | 34.51  | 46.65 | 50.94  | 74.00  | -23.06 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 43.86 | 49.94  | 74.00  | -24.06 | peak   |
| 4    | 6451.353 | 8.24  | 35.40  | 35.45  | 45.54 | 53.73  | 74.00  | -20.27 | peak   |
| 5 q  | 7236.000 | 8.54  | 35.80  | 35.95  | 45.55 | 53.94  | 74.00  | -20.06 | peak   |
| 6    | 9648.000 | 10.41 | 37.10  | 35.55  | 41.16 | 53.12  | 74.00  | -20.88 | peak   |






## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 129 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

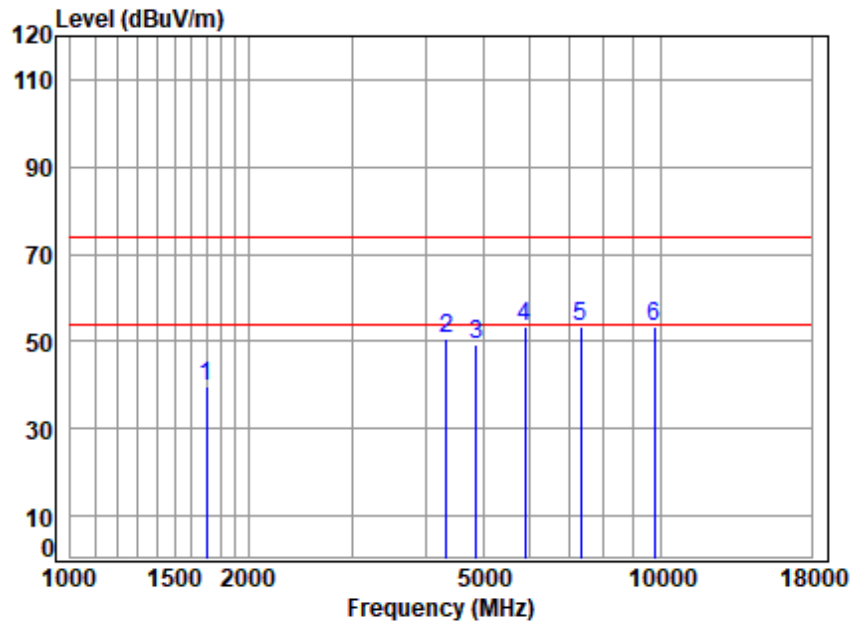

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11N20

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1697.129 | 3.49  | 26.79  | 36.41  | 45.76 | 39.63  | 74.00  | -34.37 | peak   |
| 2    | 4329.354 | 6.61  | 33.60  | 34.56  | 45.19 | 50.84  | 74.00  | -23.16 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.14 | 49.38  | 74.00  | -24.62 | peak   |
| 4    | 5881.418 | 8.06  | 34.76  | 35.03  | 45.39 | 53.18  | 74.00  | -20.82 | peak   |
| 5 q  | 7311.000 | 8.61  | 35.90  | 35.97  | 45.07 | 53.61  | 74.00  | -20.39 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.26 | 53.35  | 74.00  | -20.65 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:middle

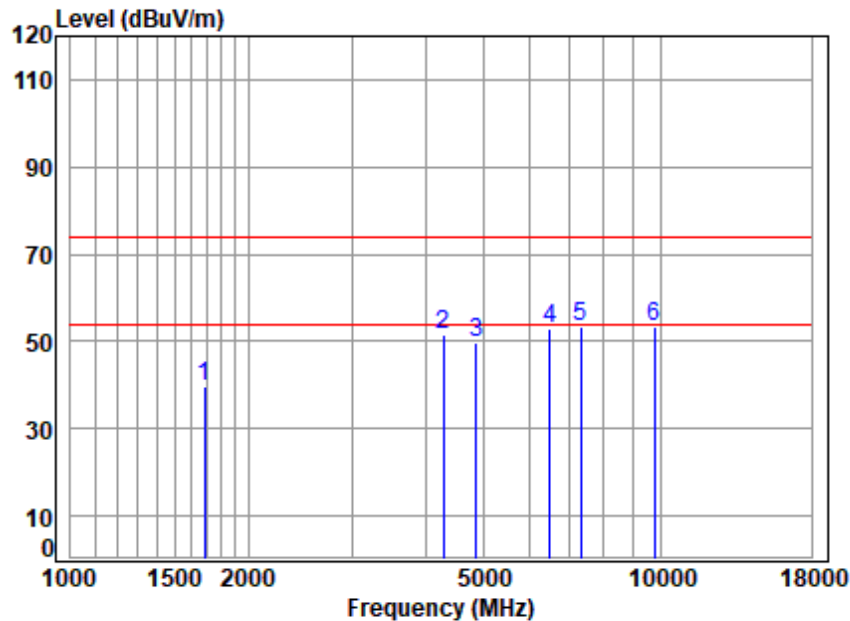

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11N20

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1687.347 | 3.47  | 26.77  | 36.43  | 45.68 | 39.49  | 74.00  | -34.51 | peak   |
| 2    | 4291.977 | 6.57  | 33.60  | 34.54  | 45.86 | 51.49  | 74.00  | -22.51 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.51 | 49.75  | 74.00  | -24.25 | peak   |
| 4    | 6488.754 | 8.24  | 35.48  | 35.48  | 44.82 | 53.06  | 74.00  | -20.94 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.68 | 53.22  | 74.00  | -20.78 | peak   |
| 6 q  | 9748.000 | 10.45 | 37.20  | 35.56  | 41.14 | 53.23  | 74.00  | -20.77 | peak   |




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 131 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

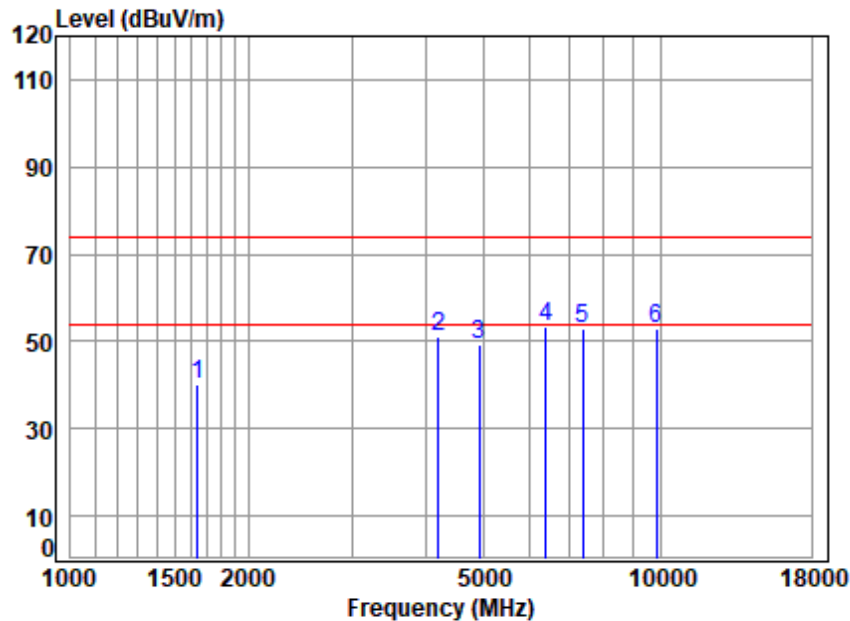

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 TX RSE  
: 2.4G WIFI 11N20

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1644.019 | 3.42  | 26.68  | 36.53  | 46.52 | 40.09  | 74.00  | -33.91 | peak   |
| 2   | 4193.872 | 6.48  | 33.36  | 34.47  | 45.67 | 51.04  | 74.00  | -22.96 | peak   |
| 3   | 4924.000 | 7.15  | 34.15  | 34.94  | 43.12 | 49.48  | 74.00  | -24.52 | peak   |
| 4 q | 6395.654 | 8.23  | 35.29  | 35.40  | 45.35 | 53.47  | 74.00  | -20.53 | peak   |
| 5   | 7386.000 | 8.68  | 35.90  | 35.98  | 44.35 | 52.95  | 74.00  | -21.05 | peak   |
| 6   | 9848.000 | 10.49 | 37.30  | 35.57  | 40.81 | 53.03  | 74.00  | -20.97 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 132 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

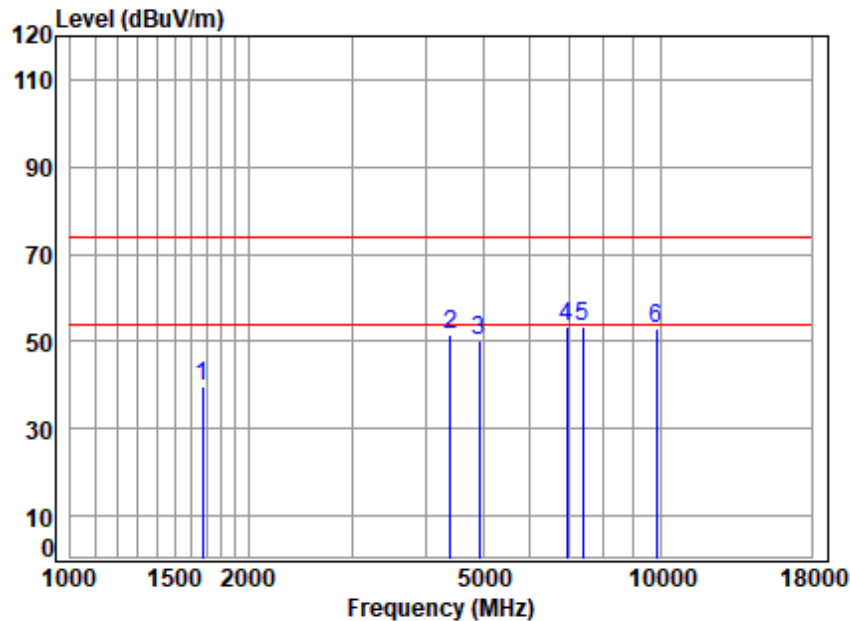

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2462 TX RSE  
: 2.4G WIFI 11N20

|     | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit  | Over   | Remark |
|-----|----------|------------|------------|---------------|------------|--------|--------|--------|--------|
|     | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1   | 1672.779 | 3.46       | 26.75      | 36.46         | 45.81      | 39.56  | 74.00  | -34.44 | peak   |
| 2   | 4405.090 | 6.68       | 33.50      | 34.61         | 45.95      | 51.52  | 74.00  | -22.48 | peak   |
| 3   | 4924.000 | 7.15       | 34.15      | 34.94         | 43.86      | 50.22  | 74.00  | -23.78 | peak   |
| 4   | 6934.778 | 8.31       | 35.67      | 35.86         | 45.08      | 53.20  | 74.00  | -20.80 | peak   |
| 5 q | 7386.000 | 8.68       | 35.90      | 35.98         | 44.78      | 53.38  | 74.00  | -20.62 | peak   |
| 6   | 9848.000 | 10.49      | 37.30      | 35.57         | 40.81      | 53.03  | 74.00  | -20.97 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

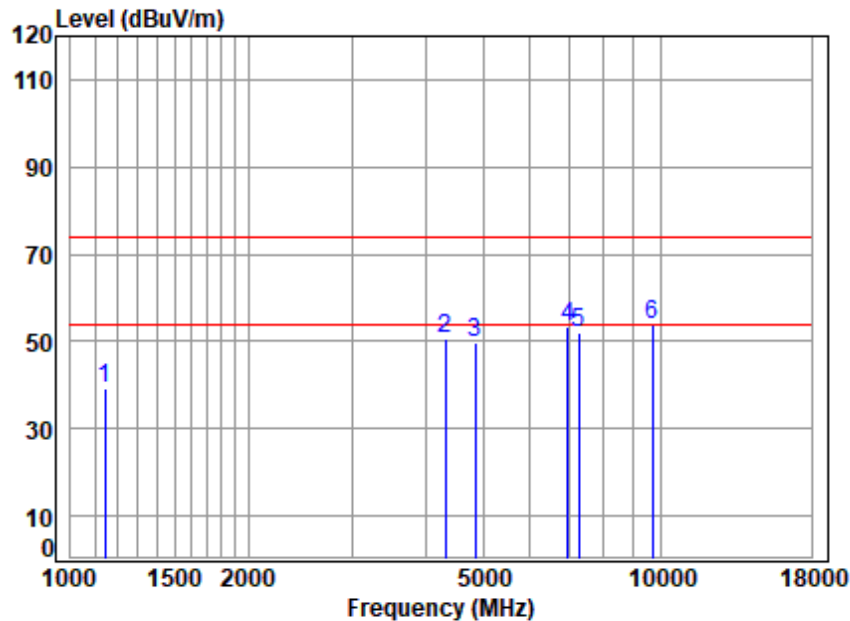

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 TX RSE  
: 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1142.201 | 2.70  | 24.17  | 37.90  | 50.23 | 39.20  | 74.00  | -34.80 | peak   |
| 2    | 4316.859 | 6.60  | 33.60  | 34.55  | 45.12 | 50.77  | 74.00  | -23.23 | peak   |
| 3    | 4844.000 | 7.08  | 33.98  | 34.89  | 43.72 | 49.89  | 74.00  | -24.11 | peak   |
| 4    | 6954.852 | 8.31  | 35.71  | 35.87  | 45.08 | 53.23  | 74.00  | -20.77 | peak   |
| 5    | 7266.000 | 8.57  | 35.83  | 35.96  | 43.76 | 52.20  | 74.00  | -21.80 | peak   |
| 6 q  | 9688.000 | 10.42 | 37.10  | 35.56  | 41.89 | 53.85  | 74.00  | -20.15 | peak   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 134 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

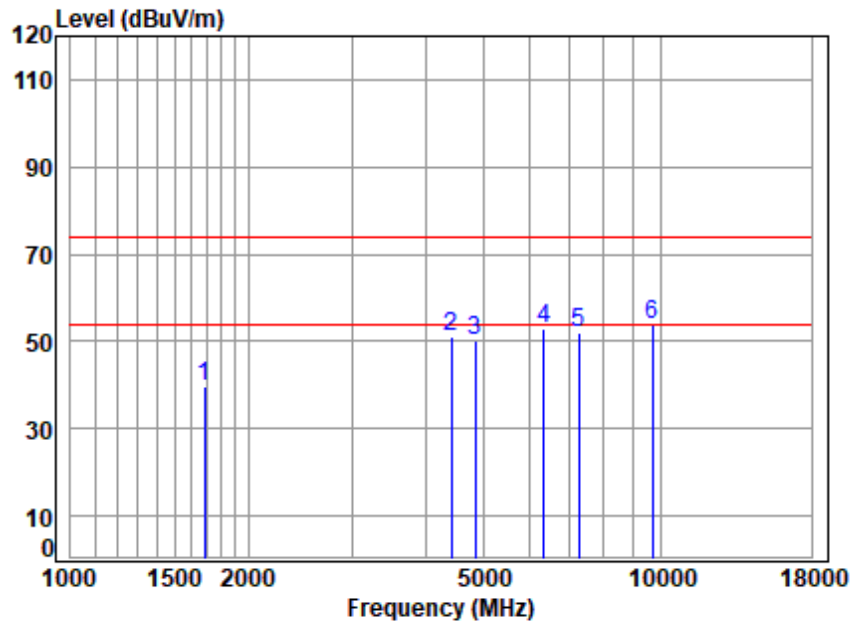

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2422 TX RSE  
 : 2.4G WIFI 11N40

|     | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit  | Over   | Remark |
|-----|----------|------------|------------|---------------|------------|--------|--------|--------|--------|
|     | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1   | 1687.347 | 3.47       | 26.77      | 36.43         | 45.74      | 39.55  | 74.00  | -34.45 | peak   |
| 2   | 4417.841 | 6.69       | 33.50      | 34.62         | 45.58      | 51.15  | 74.00  | -22.85 | peak   |
| 3   | 4844.000 | 7.08       | 33.98      | 34.89         | 43.87      | 50.04  | 74.00  | -23.96 | peak   |
| 4   | 6340.436 | 8.22       | 35.20      | 35.35         | 45.01      | 53.08  | 74.00  | -20.92 | peak   |
| 5   | 7266.000 | 8.57       | 35.83      | 35.96         | 43.67      | 52.11  | 74.00  | -21.89 | peak   |
| 6 q | 9688.000 | 10.42      | 37.10      | 35.56         | 41.98      | 53.94  | 74.00  | -20.06 | peak   |




SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

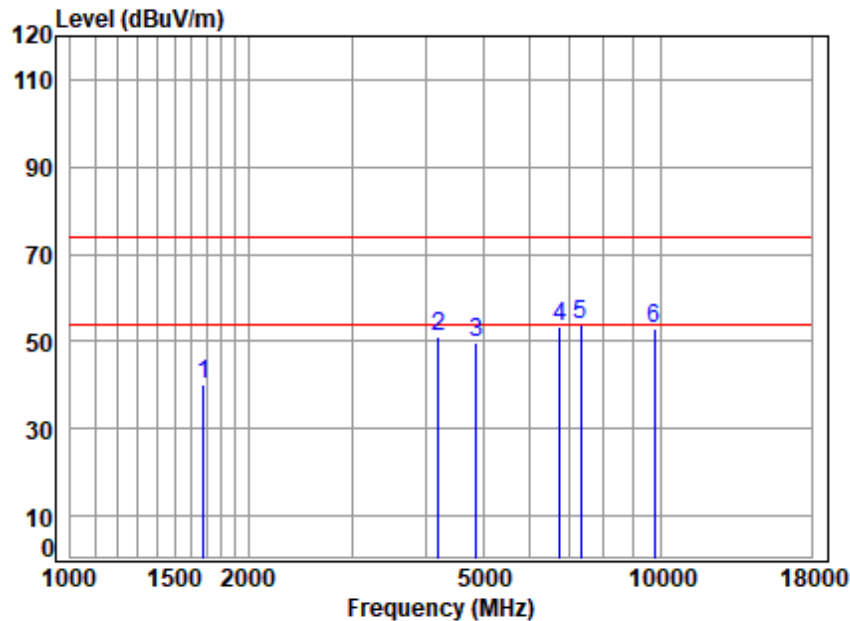


Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1682.477 | 3.47  | 26.77  | 36.44  | 46.16 | 39.96  | 74.00  | -34.04 | peak   |
| 2    | 4193.872 | 6.48  | 33.36  | 34.47  | 45.69 | 51.06  | 74.00  | -22.94 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.69 | 49.93  | 74.00  | -24.07 | peak   |
| 4    | 6756.708 | 8.28  | 35.50  | 35.71  | 45.16 | 53.23  | 74.00  | -20.77 | peak   |
| 5 q  | 7311.000 | 8.61  | 35.90  | 35.97  | 45.24 | 53.78  | 74.00  | -20.22 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 40.99 | 53.08  | 74.00  | -20.92 | peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:middle

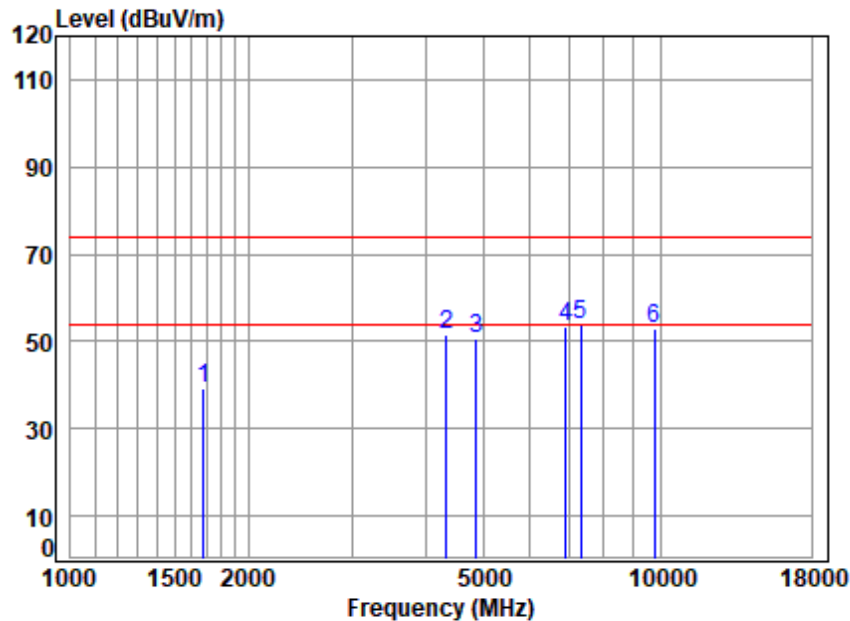

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1677.621 | 3.46  | 26.76  | 36.45  | 45.46 | 39.23  | 74.00  | -34.77 | peak   |
| 2    | 4341.886 | 6.62  | 33.60  | 34.57  | 45.69 | 51.34  | 74.00  | -22.66 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 44.36 | 50.60  | 74.00  | -23.40 | peak   |
| 4    | 6894.806 | 8.30  | 35.60  | 35.82  | 45.48 | 53.56  | 74.00  | -20.44 | peak   |
| 5 q  | 7311.000 | 8.61  | 35.90  | 35.97  | 45.09 | 53.63  | 74.00  | -20.37 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 40.91 | 53.00  | 74.00  | -21.00 | peak   |






## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 137 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

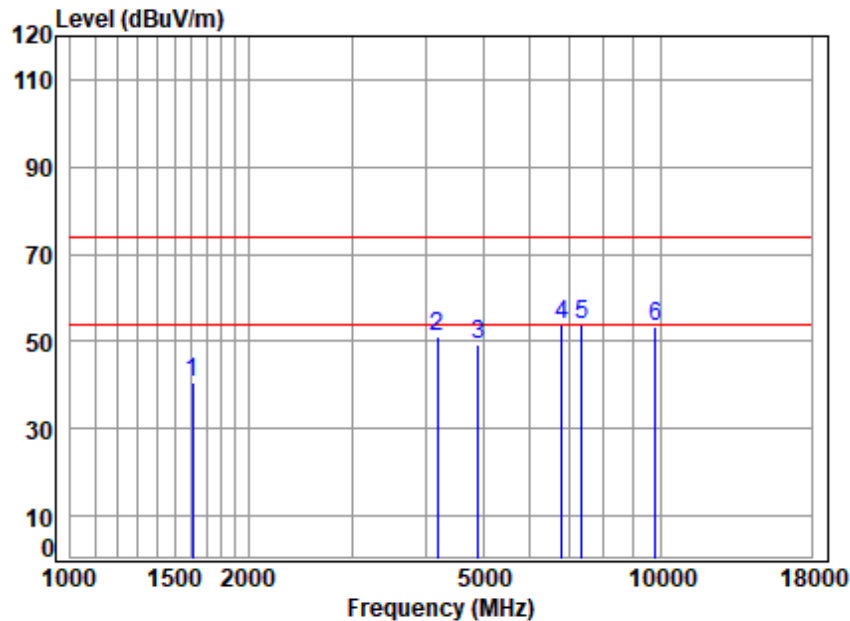

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 TX RSE  
: 2.4G WIFI 11N40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1611.091 | 3.38  | 26.54  | 36.60  | 47.25 | 40.57  | 74.00  | -33.43 | peak   |
| 2    | 4181.768 | 6.47  | 33.29  | 34.46  | 45.59 | 50.89  | 74.00  | -23.11 | peak   |
| 3    | 4904.000 | 7.13  | 34.11  | 34.92  | 43.08 | 49.40  | 74.00  | -24.60 | peak   |
| 4 q  | 6795.879 | 8.29  | 35.50  | 35.74  | 45.78 | 53.83  | 74.00  | -20.17 | peak   |
| 5    | 7356.000 | 8.65  | 35.90  | 35.98  | 45.16 | 53.73  | 74.00  | -20.27 | peak   |
| 6    | 9808.000 | 10.47 | 37.22  | 35.57  | 41.24 | 53.36  | 74.00  | -20.64 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 138 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

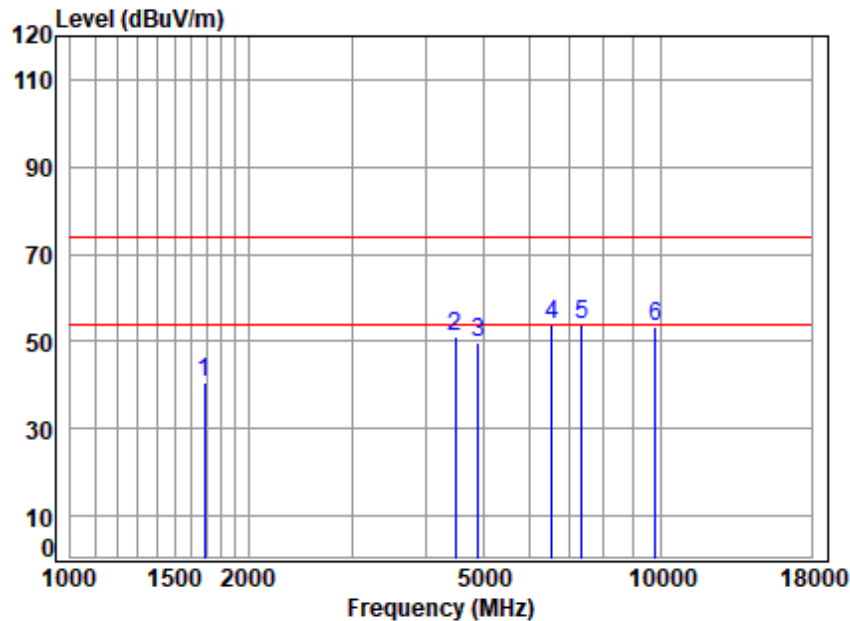

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2452 TX RSE  
 : 2.4G WIFI 11N40

|     | Freq     | Cable Loss | Ant Factor | Preamp Factor | Read Level | Level  | Limit  | Over   | Remark |
|-----|----------|------------|------------|---------------|------------|--------|--------|--------|--------|
|     | MHz      | dB         | dB/m       | dB            | dBuV       | dBuV/m | dBuV/m | dB     |        |
| 1   | 1687.347 | 3.47       | 26.77      | 36.43         | 46.88      | 40.69  | 74.00  | -33.31 | peak   |
| 2   | 4482.150 | 6.75       | 33.50      | 34.66         | 45.33      | 50.92  | 74.00  | -23.08 | peak   |
| 3   | 4904.000 | 7.13       | 34.11      | 34.92         | 43.31      | 49.63  | 74.00  | -24.37 | peak   |
| 4 q | 6545.263 | 8.25       | 35.59      | 35.53         | 45.61      | 53.92  | 74.00  | -20.08 | peak   |
| 5   | 7356.000 | 8.65       | 35.90      | 35.98         | 45.27      | 53.84  | 74.00  | -20.16 | peak   |
| 6   | 9808.000 | 10.47      | 37.22      | 35.57         | 41.10      | 53.22  | 74.00  | -20.78 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 139 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

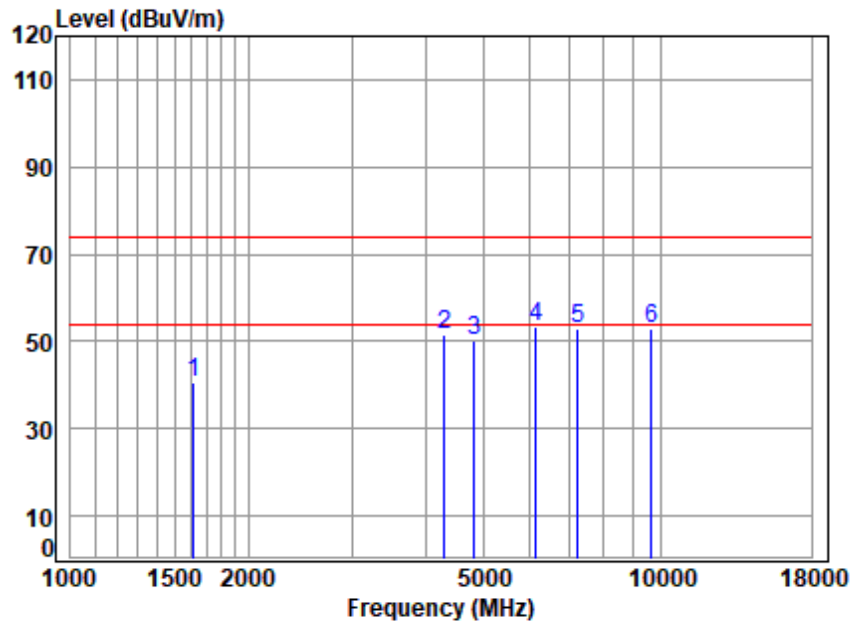

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 TX RSE  
 : 2.4G WIFI 11AX20

|     | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit  | Over Limit | Remark |
|-----|----------|------------|------------|---------------------|------------|--------|--------|------------|--------|
|     | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m | dB         |        |
| 1   | 1615.754 | 3.39       | 26.56      | 36.59               | 47.21      | 40.57  | 74.00  | -33.43     | peak   |
| 2   | 4304.400 | 6.59       | 33.60      | 34.54               | 45.95      | 51.60  | 74.00  | -22.40     | peak   |
| 3   | 4824.000 | 7.06       | 33.90      | 34.88               | 43.98      | 50.06  | 74.00  | -23.94     | peak   |
| 4 q | 6142.019 | 8.18       | 35.18      | 35.17               | 45.18      | 53.37  | 74.00  | -20.63     | peak   |
| 5   | 7236.000 | 8.54       | 35.80      | 35.95               | 44.67      | 53.06  | 74.00  | -20.94     | peak   |
| 6   | 9648.000 | 10.41      | 37.10      | 35.55               | 41.05      | 53.01  | 74.00  | -20.99     | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 140 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:Low

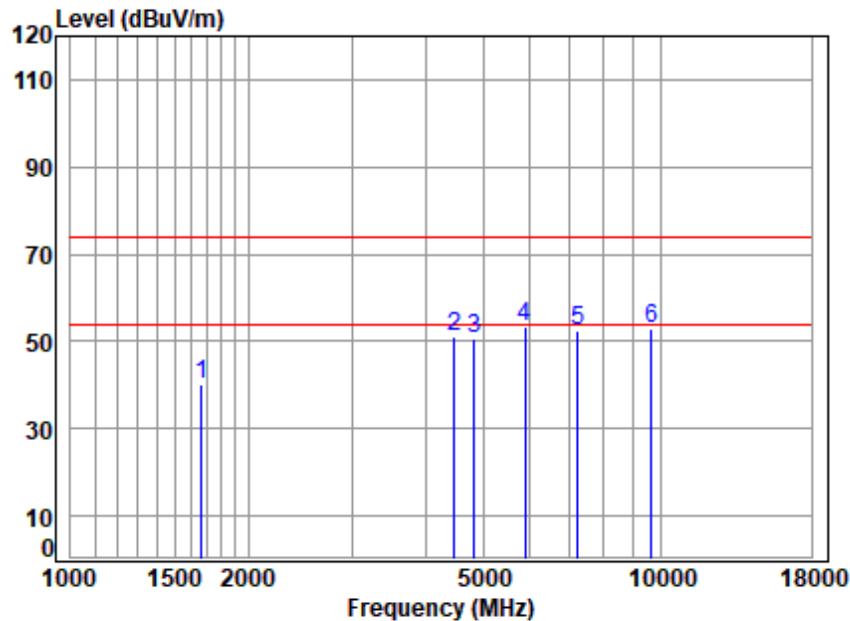

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2412 TX RSE  
 : 2.4G WIFI 11AX20

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1667.951 | 3.45  | 26.74  | 36.47  | 46.30 | 40.02  | 74.00  | -33.98 | peak   |
| 2   | 4469.214 | 6.74  | 33.50  | 34.65  | 45.33 | 50.92  | 74.00  | -23.08 | peak   |
| 3   | 4824.000 | 7.06  | 33.90  | 34.88  | 44.68 | 50.76  | 74.00  | -23.24 | peak   |
| 4 q | 5898.442 | 8.07  | 34.80  | 35.03  | 45.54 | 53.38  | 74.00  | -20.62 | peak   |
| 5   | 7236.000 | 8.54  | 35.80  | 35.95  | 44.24 | 52.63  | 74.00  | -21.37 | peak   |
| 6   | 9648.000 | 10.41 | 37.10  | 35.55  | 41.09 | 53.05  | 74.00  | -20.95 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 141 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

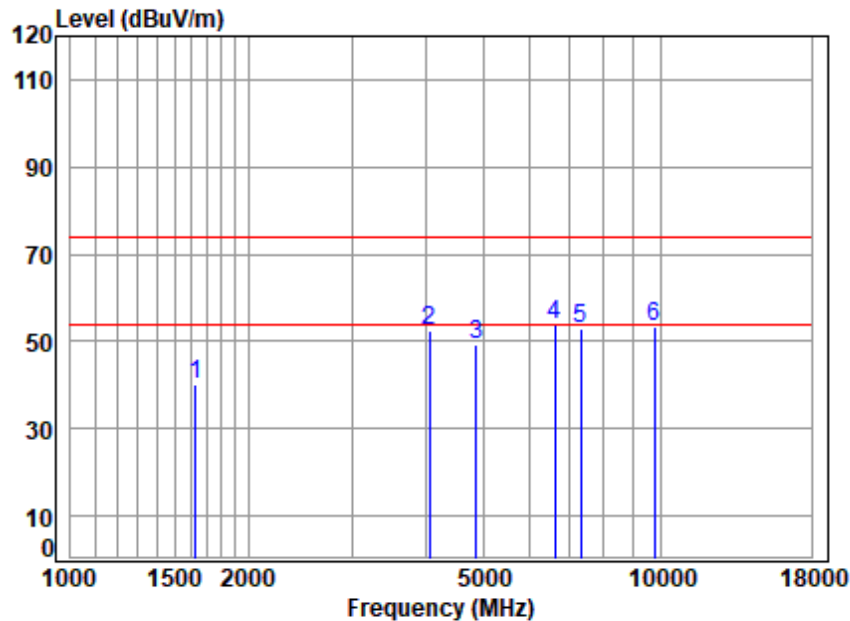

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11AX20

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1629.825 | 3.41  | 26.62  | 36.56  | 46.83 | 40.30  | 74.00  | -33.70 | peak   |
| 2    | 4050.904 | 6.33  | 32.90  | 34.37  | 47.65 | 52.51  | 74.00  | -21.49 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.23 | 49.47  | 74.00  | -24.53 | peak   |
| 4 q  | 6621.375 | 8.26  | 35.60  | 35.60  | 45.46 | 53.72  | 74.00  | -20.28 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.43 | 52.97  | 74.00  | -21.03 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.13 | 53.22  | 74.00  | -20.78 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 142 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:middle

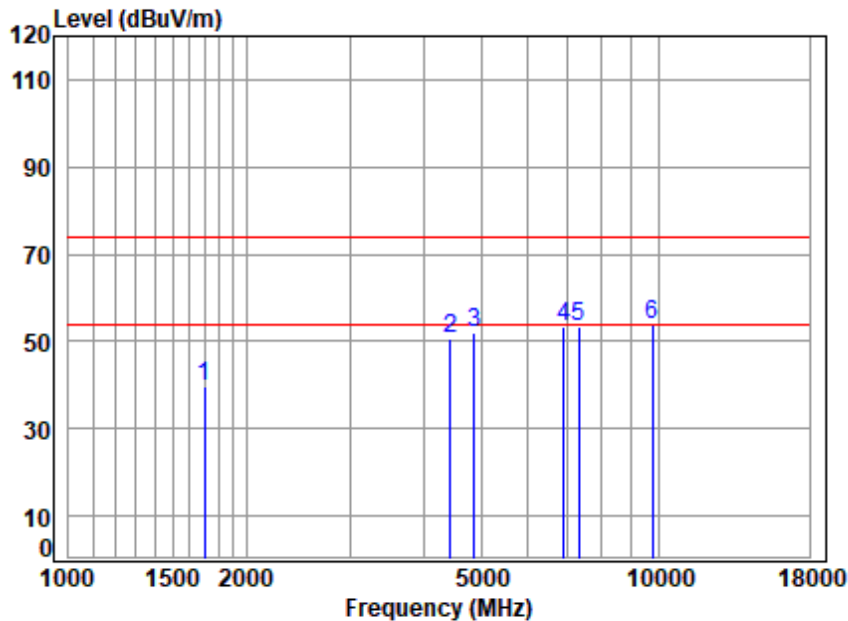

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11AX20

|     | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit  | Over Limit | Remark |
|-----|----------|------------|------------|---------------------|------------|--------|--------|------------|--------|
|     | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m | dB         |        |
| 1   | 1697.129 | 3.49       | 26.79      | 36.41               | 45.91      | 39.78  | 74.00  | -34.22     | peak   |
| 2   | 4443.453 | 6.72       | 33.50      | 34.64               | 45.27      | 50.85  | 74.00  | -23.15     | peak   |
| 3   | 4874.000 | 7.10       | 34.05      | 34.91               | 45.77      | 52.01  | 74.00  | -21.99     | peak   |
| 4   | 6894.806 | 8.30       | 35.60      | 35.82               | 45.29      | 53.37  | 74.00  | -20.63     | peak   |
| 5   | 7311.000 | 8.61       | 35.90      | 35.97               | 44.75      | 53.29  | 74.00  | -20.71     | peak   |
| 6 q | 9748.000 | 10.45      | 37.20      | 35.56               | 41.59      | 53.68  | 74.00  | -20.32     | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 143 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

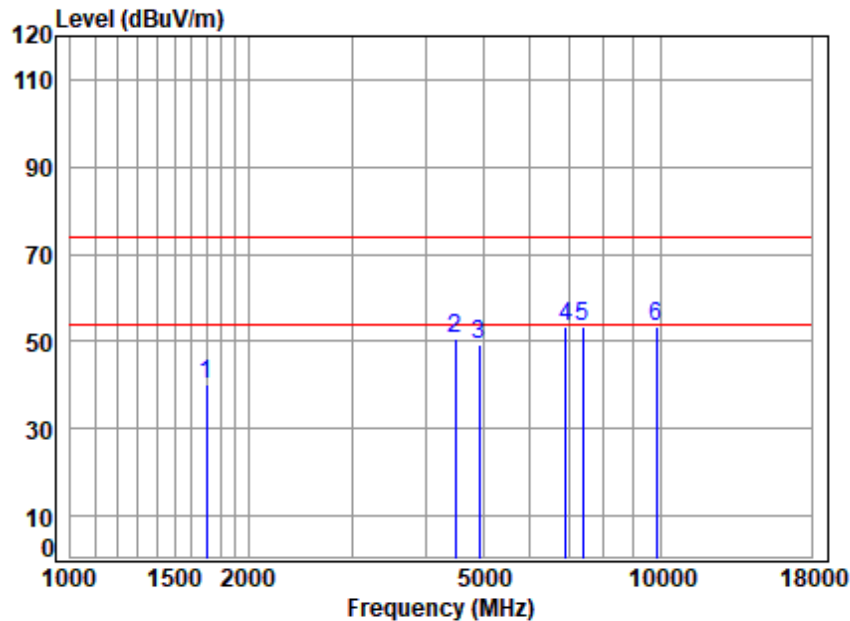

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11AX20

|     | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit  | Over Limit | Remark |
|-----|----------|------------|------------|---------------------|------------|--------|--------|------------|--------|
|     | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m | dB         |        |
| 1   | 1702.042 | 3.49       | 26.80      | 36.40               | 46.41      | 40.30  | 74.00  | -33.70     | peak   |
| 2   | 4482.150 | 6.75       | 33.50      | 34.66               | 44.93      | 50.52  | 74.00  | -23.48     | peak   |
| 3   | 4924.000 | 7.15       | 34.15      | 34.94               | 43.14      | 49.50  | 74.00  | -24.50     | peak   |
| 4   | 6894.806 | 8.30       | 35.60      | 35.82               | 45.38      | 53.46  | 74.00  | -20.54     | peak   |
| 5   | 7386.000 | 8.68       | 35.90      | 35.98               | 44.62      | 53.22  | 74.00  | -20.78     | peak   |
| 6 q | 9848.000 | 10.49      | 37.30      | 35.57               | 41.35      | 53.57  | 74.00  | -20.43     | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 144 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:20MHz; Channel:High

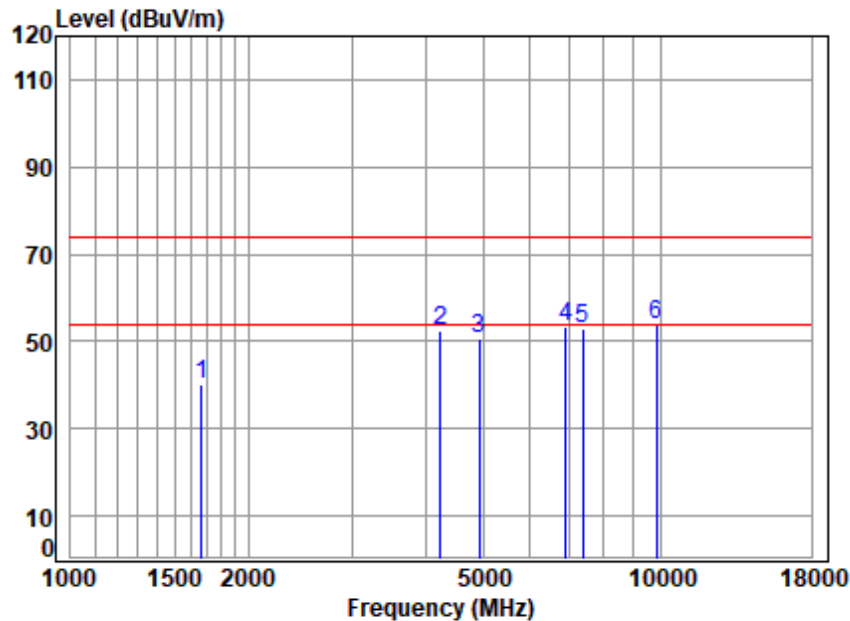

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11AX20

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1667.951 | 3.45  | 26.74  | 36.47  | 46.54 | 40.26  | 74.00  | -33.74 | peak   |
| 2    | 4230.396 | 6.51  | 33.52  | 34.49  | 46.86 | 52.40  | 74.00  | -21.60 | peak   |
| 3    | 4924.000 | 7.15  | 34.15  | 34.94  | 44.25 | 50.61  | 74.00  | -23.39 | peak   |
| 4    | 6914.763 | 8.31  | 35.63  | 35.84  | 45.11 | 53.21  | 74.00  | -20.79 | peak   |
| 5    | 7386.000 | 8.68  | 35.90  | 35.98  | 44.47 | 53.07  | 74.00  | -20.93 | peak   |
| 6 q  | 9848.000 | 10.49 | 37.30  | 35.57  | 41.77 | 53.99  | 74.00  | -20.01 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 145 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

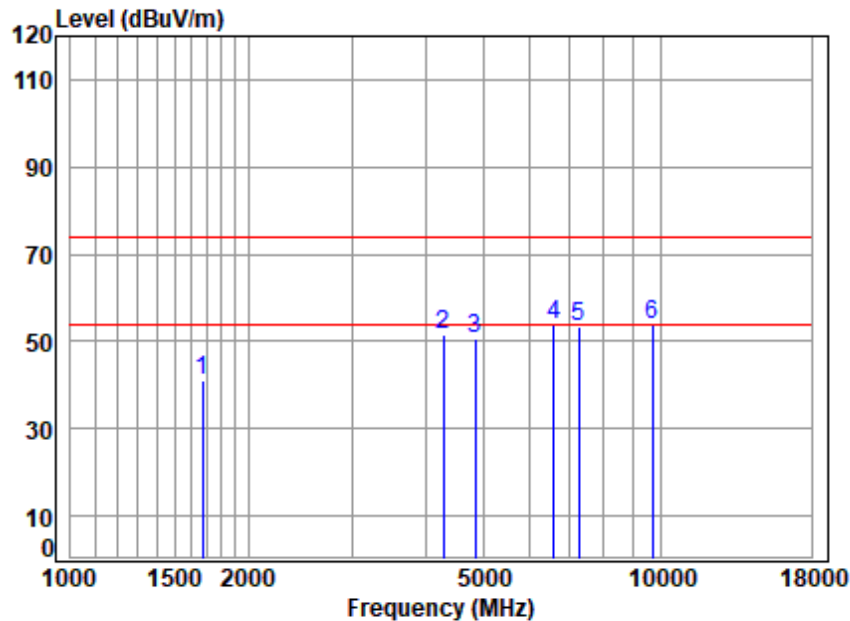

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 TX RSE  
: 2.4G WIFI 11AX40

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1672.779 | 3.46  | 26.75  | 36.46  | 47.53 | 41.28  | 74.00  | -32.72 | peak   |
| 2   | 4279.589 | 6.56  | 33.60  | 34.53  | 45.76 | 51.39  | 74.00  | -22.61 | peak   |
| 3   | 4844.000 | 7.08  | 33.98  | 34.89  | 44.32 | 50.49  | 74.00  | -23.51 | peak   |
| 4   | 6583.209 | 8.26  | 35.60  | 35.56  | 45.32 | 53.62  | 74.00  | -20.38 | peak   |
| 5   | 7266.000 | 8.57  | 35.83  | 35.96  | 44.83 | 53.27  | 74.00  | -20.73 | peak   |
| 6 q | 9688.000 | 10.42 | 37.10  | 35.56  | 41.68 | 53.64  | 74.00  | -20.36 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 146 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:Low

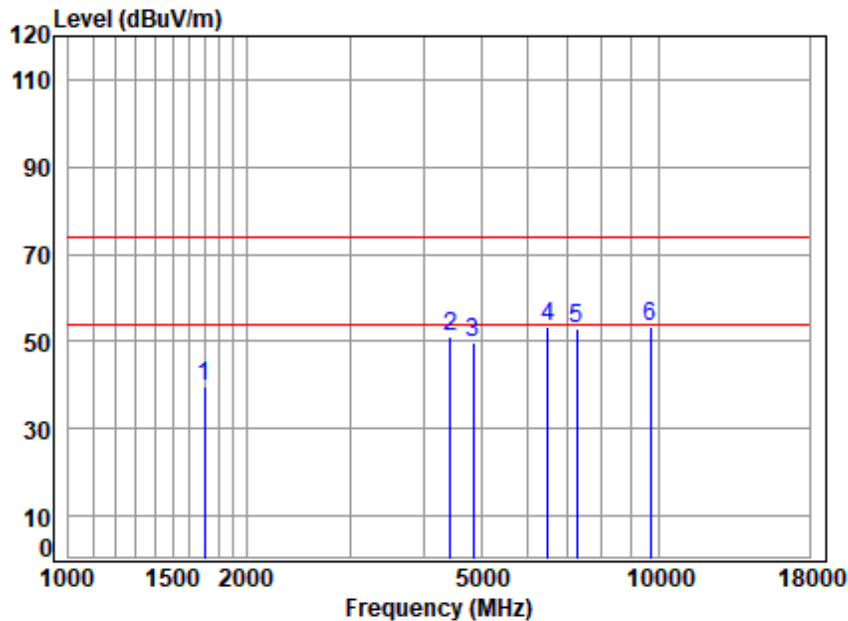

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 TX RSE  
: 2.4G WIFI 11AX40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1702.042 | 3.49  | 26.80  | 36.40  | 45.65 | 39.54  | 74.00  | -34.46 | peak   |
| 2    | 4443.453 | 6.72  | 33.50  | 34.64  | 45.33 | 50.91  | 74.00  | -23.09 | peak   |
| 3    | 4844.000 | 7.08  | 33.98  | 34.89  | 43.50 | 49.67  | 74.00  | -24.33 | peak   |
| 4    | 6488.754 | 8.24  | 35.48  | 35.48  | 44.97 | 53.21  | 74.00  | -20.79 | peak   |
| 5    | 7266.000 | 8.57  | 35.83  | 35.96  | 44.39 | 52.83  | 74.00  | -21.17 | peak   |
| 6 q  | 9688.000 | 10.42 | 37.10  | 35.56  | 41.41 | 53.37  | 74.00  | -20.63 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 147 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:middle

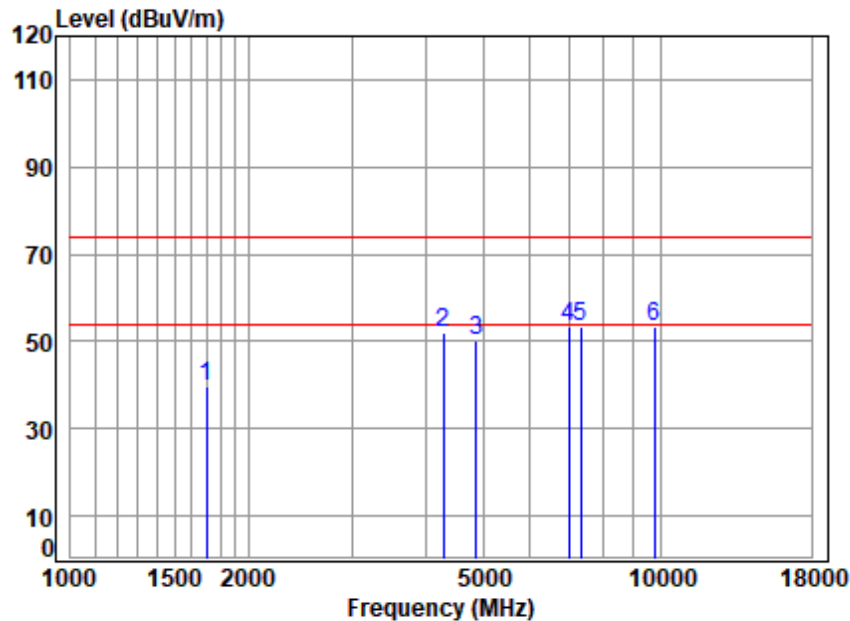

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11AX40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1697.129 | 3.49  | 26.79  | 36.41  | 45.96 | 39.83  | 74.00  | -34.17 | peak   |
| 2    | 4279.589 | 6.56  | 33.60  | 34.53  | 46.57 | 52.20  | 74.00  | -21.80 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.78 | 50.02  | 74.00  | -23.98 | peak   |
| 4    | 6974.982 | 8.32  | 35.75  | 35.89  | 45.04 | 53.22  | 74.00  | -20.78 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.82 | 53.36  | 74.00  | -20.64 | peak   |
| 6 q  | 9748.000 | 10.45 | 37.20  | 35.56  | 41.51 | 53.60  | 74.00  | -20.40 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (CMAA) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 148 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:middle

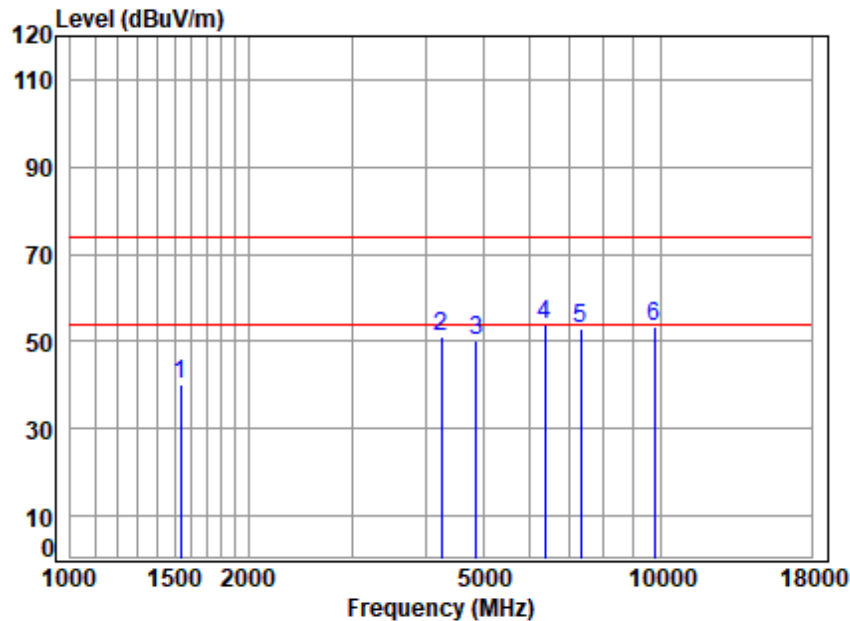

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11AX40

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1533.841 | 3.29  | 25.74  | 36.79  | 47.72 | 39.96  | 74.00  | -34.04 | peak   |
| 2    | 4254.921 | 6.54  | 33.60  | 34.51  | 45.30 | 50.93  | 74.00  | -23.07 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.93 | 50.17  | 74.00  | -23.83 | peak   |
| 4 q  | 6377.195 | 8.22  | 35.25  | 35.38  | 45.57 | 53.66  | 74.00  | -20.34 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.46 | 53.00  | 74.00  | -21.00 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.38 | 53.47  | 74.00  | -20.53 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 149 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

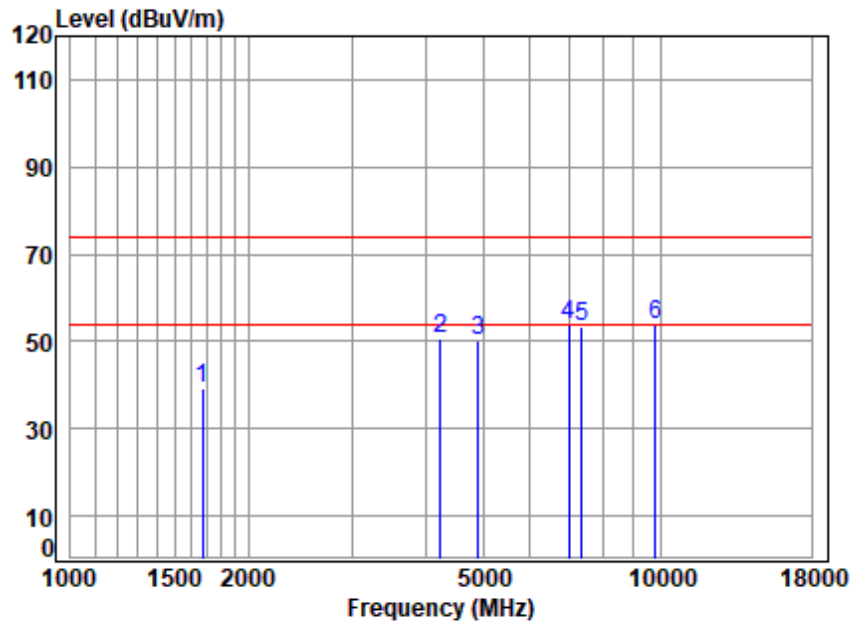

Site : chamber  
 Condition: 3m HORIZONTAL  
 Job No : 00478AT\00479AT  
 Mode : 2452 TX RSE  
 : 2.4G WIFI 11AX40

|     | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit  | Over Limit | Remark |
|-----|----------|------------|------------|---------------------|------------|--------|--------|------------|--------|
|     | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m | dB         |        |
| 1   | 1672.779 | 3.46       | 26.75      | 36.46               | 45.64      | 39.39  | 74.00  | -34.61     | peak   |
| 2   | 4230.396 | 6.51       | 33.52      | 34.49               | 45.27      | 50.81  | 74.00  | -23.19     | peak   |
| 3   | 4904.000 | 7.13       | 34.11      | 34.92               | 43.64      | 49.96  | 74.00  | -24.04     | peak   |
| 4 q | 6995.172 | 8.32       | 35.79      | 35.91               | 45.59      | 53.79  | 74.00  | -20.21     | peak   |
| 5   | 7356.000 | 8.65       | 35.90      | 35.98               | 44.70      | 53.27  | 74.00  | -20.73     | peak   |
| 6   | 9808.000 | 10.47      | 37.22      | 35.57               | 41.59      | 53.71  | 74.00  | -20.29     | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 150 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(Full RU); Bandwidth:40MHz; Channel:High

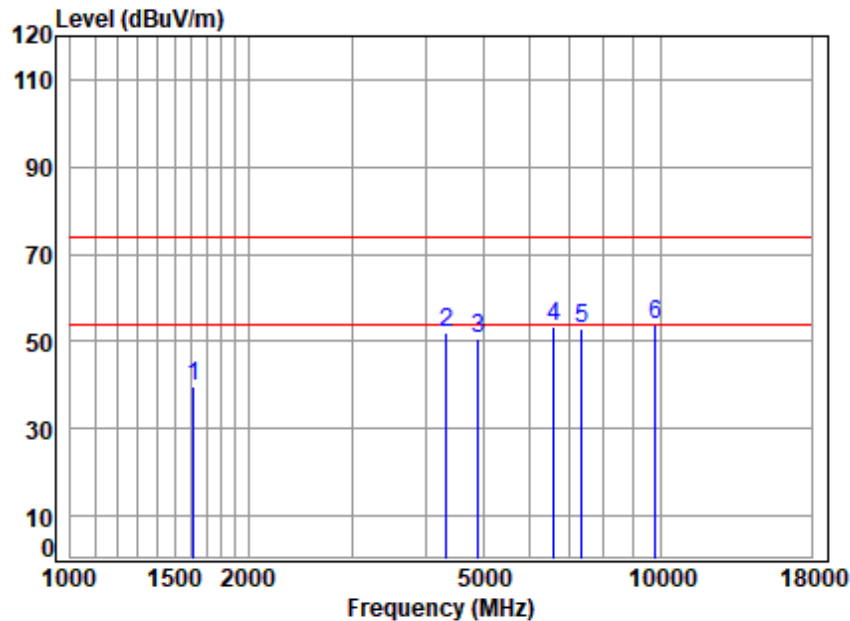

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2452 TX RSE  
 : 2.4G WIFI 11AX40

|     | Freq     | Cable Loss | Ant Factor | Preamplifier Factor | Read Level | Level  | Limit  | Over Limit | Remark |
|-----|----------|------------|------------|---------------------|------------|--------|--------|------------|--------|
|     | MHz      | dB         | dB/m       | dB                  | dBuV       | dBuV/m | dBuV/m | dB         |        |
| 1   | 1615.754 | 3.39       | 26.56      | 36.59               | 46.52      | 39.88  | 74.00  | -34.12     | peak   |
| 2   | 4341.886 | 6.62       | 33.60      | 34.57               | 46.44      | 52.09  | 74.00  | -21.91     | peak   |
| 3   | 4904.000 | 7.13       | 34.11      | 34.92               | 44.23      | 50.55  | 74.00  | -23.45     | peak   |
| 4   | 6583.209 | 8.26       | 35.60      | 35.56               | 45.25      | 53.55  | 74.00  | -20.45     | peak   |
| 5   | 7356.000 | 8.65       | 35.90      | 35.98               | 44.52      | 53.09  | 74.00  | -20.91     | peak   |
| 6 q | 9808.000 | 10.47      | 37.22      | 35.57               | 41.80      | 53.92  | 74.00  | -20.08     | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 151 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

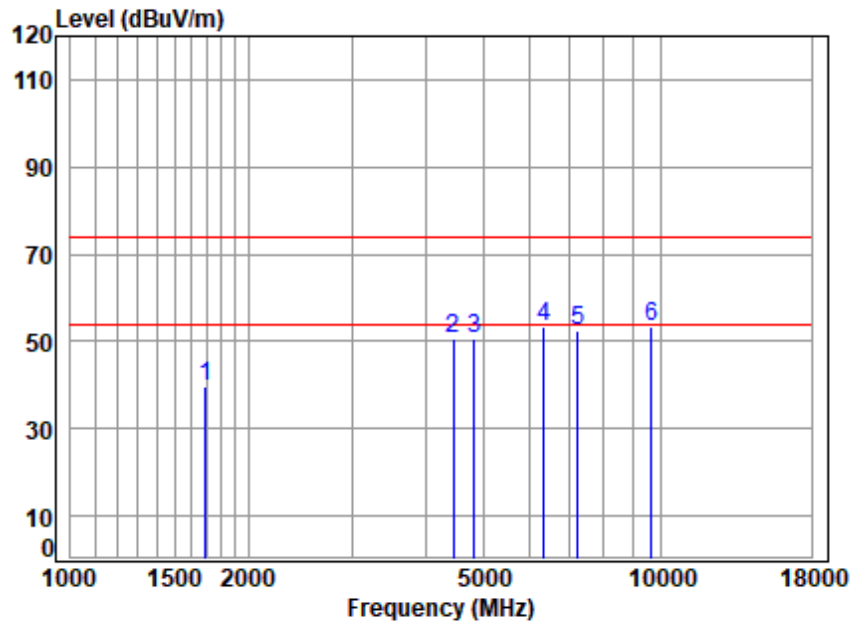

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11AX20 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1692.231 | 3.48  | 26.78  | 36.42  | 45.75 | 39.59  | 74.00  | -34.41 | peak   |
| 2    | 4456.315 | 6.73  | 33.50  | 34.64  | 44.85 | 50.44  | 74.00  | -23.56 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 44.42 | 50.50  | 74.00  | -23.50 | peak   |
| 4    | 6340.436 | 8.22  | 35.20  | 35.35  | 45.29 | 53.36  | 74.00  | -20.64 | peak   |
| 5    | 7236.000 | 8.54  | 35.80  | 35.95  | 44.16 | 52.55  | 74.00  | -21.45 | peak   |
| 6 q  | 9648.000 | 10.41 | 37.10  | 35.55  | 41.50 | 53.46  | 74.00  | -20.54 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 152 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:Low

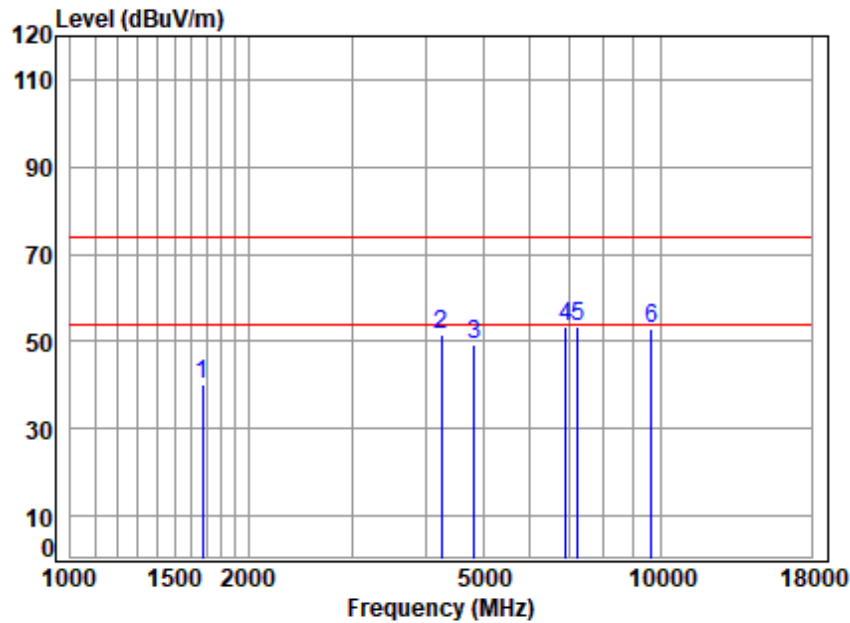

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2412 TX RSE  
: 2.4G WIFI 11AX20 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1672.779 | 3.46  | 26.75  | 36.46  | 46.25 | 40.00  | 74.00  | -34.00 | peak   |
| 2    | 4242.641 | 6.53  | 33.57  | 34.50  | 46.18 | 51.78  | 74.00  | -22.22 | peak   |
| 3    | 4824.000 | 7.06  | 33.90  | 34.88  | 43.39 | 49.47  | 74.00  | -24.53 | peak   |
| 4 q  | 6914.763 | 8.31  | 35.63  | 35.84  | 45.48 | 53.58  | 74.00  | -20.42 | peak   |
| 5    | 7236.000 | 8.54  | 35.80  | 35.95  | 45.10 | 53.49  | 74.00  | -20.51 | peak   |
| 6    | 9648.000 | 10.41 | 37.10  | 35.55  | 41.07 | 53.03  | 74.00  | -20.97 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 153 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:middle

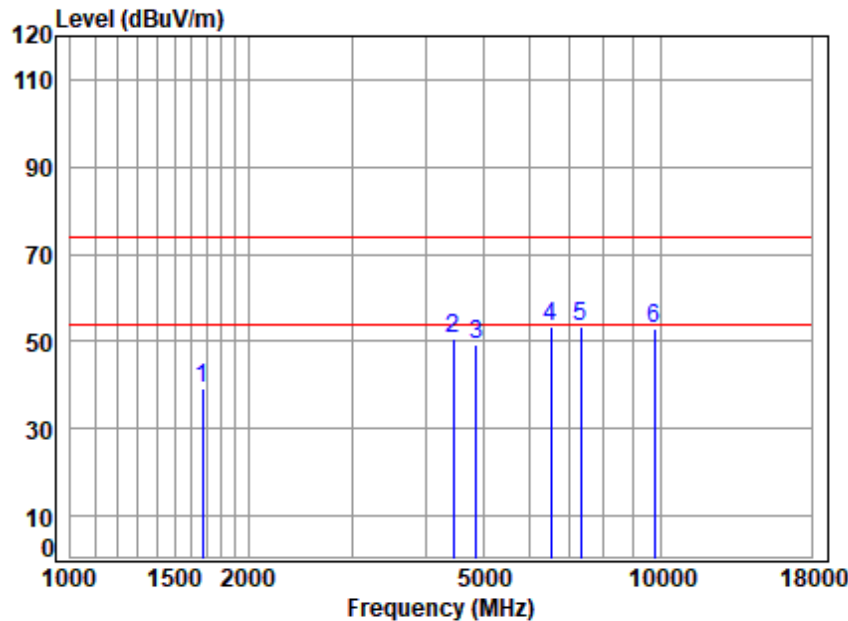

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11AX20 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1672.779 | 3.46  | 26.75  | 36.46  | 45.66 | 39.41  | 74.00  | -34.59 | peak   |
| 2    | 4456.315 | 6.73  | 33.50  | 34.64  | 45.09 | 50.68  | 74.00  | -23.32 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.26 | 49.50  | 74.00  | -24.50 | peak   |
| 4 q  | 6507.536 | 8.24  | 35.52  | 35.50  | 45.29 | 53.55  | 74.00  | -20.45 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.75 | 53.29  | 74.00  | -20.71 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 40.92 | 53.01  | 74.00  | -20.99 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (CMAA) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 154 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:middle

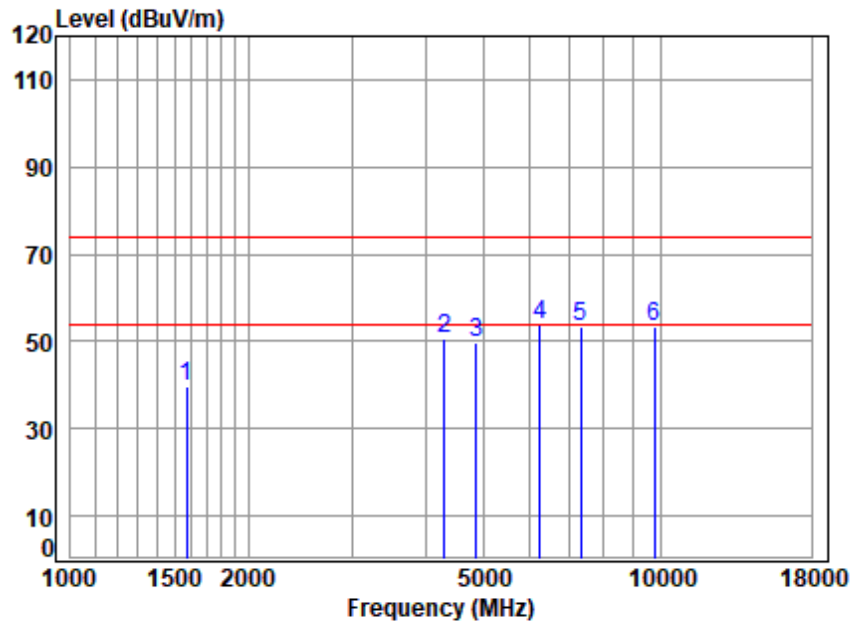

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11AX20 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1574.265 | 3.34  | 26.19  | 36.69  | 47.08 | 39.92  | 74.00  | -34.08 | peak   |
| 2    | 4304.400 | 6.59  | 33.60  | 34.54  | 45.08 | 50.73  | 74.00  | -23.27 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.61 | 49.85  | 74.00  | -24.15 | peak   |
| 4 q  | 6249.464 | 8.20  | 35.20  | 35.27  | 45.75 | 53.88  | 74.00  | -20.12 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.64 | 53.18  | 74.00  | -20.82 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.12 | 53.21  | 74.00  | -20.79 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 155 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:High

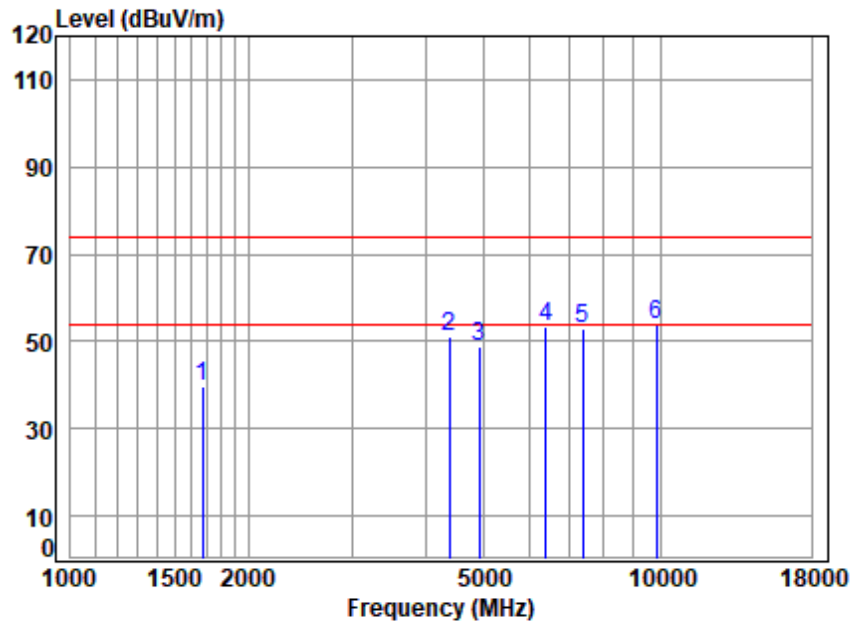

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2462 TX RSE  
: 2.4G WIFI 11AX20 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1672.779 | 3.46  | 26.75  | 36.46  | 46.04 | 39.79  | 74.00  | -34.21 | peak   |
| 2    | 4379.699 | 6.66  | 33.54  | 34.59  | 45.61 | 51.22  | 74.00  | -22.78 | peak   |
| 3    | 4924.000 | 7.15  | 34.15  | 34.94  | 42.60 | 48.96  | 74.00  | -25.04 | peak   |
| 4    | 6395.654 | 8.23  | 35.29  | 35.40  | 45.22 | 53.34  | 74.00  | -20.66 | peak   |
| 5    | 7386.000 | 8.68  | 35.90  | 35.98  | 44.12 | 52.72  | 74.00  | -21.28 | peak   |
| 6 q  | 9848.000 | 10.49 | 37.30  | 35.57  | 41.65 | 53.87  | 74.00  | -20.13 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 156 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:20MHz; Channel:High

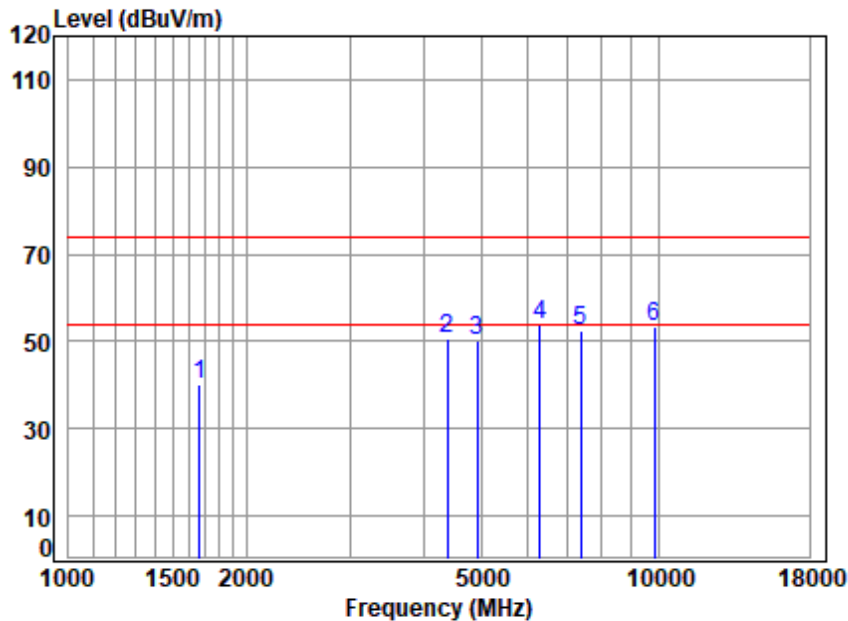

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2462 TX RSE  
 : 2.4G WIFI 11AX20 RU

|     |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|-----|----------|-------|--------|--------|-------|--------|--------|--------|--------|
|     | Freq     | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|     | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1   | 1667.951 | 3.45  | 26.74  | 36.47  | 46.28 | 40.00  | 74.00  | -34.00 | peak   |
| 2   | 4392.376 | 6.67  | 33.52  | 34.60  | 44.85 | 50.44  | 74.00  | -23.56 | peak   |
| 3   | 4924.000 | 7.15  | 34.15  | 34.94  | 43.73 | 50.09  | 74.00  | -23.91 | peak   |
| 4 q | 6303.890 | 8.21  | 35.20  | 35.32  | 45.56 | 53.65  | 74.00  | -20.35 | peak   |
| 5   | 7386.000 | 8.68  | 35.90  | 35.98  | 44.10 | 52.70  | 74.00  | -21.30 | peak   |
| 6   | 9848.000 | 10.49 | 37.30  | 35.57  | 41.25 | 53.47  | 74.00  | -20.53 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 157 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

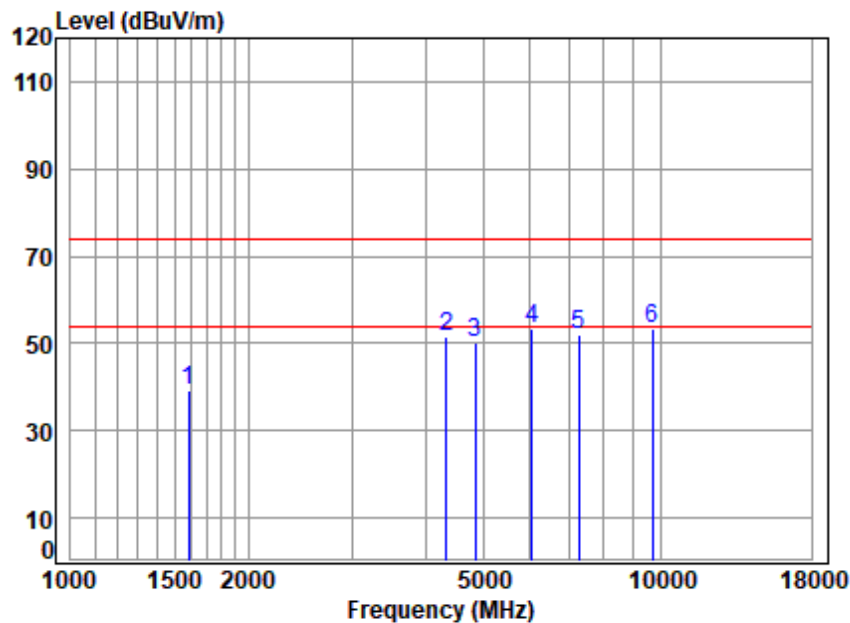

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2422 TX RSE  
: 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1587.975 | 3.35  | 26.36  | 36.66  | 46.29 | 39.34  | 74.00  | -34.66 | peak   |
| 2    | 4329.354 | 6.61  | 33.60  | 34.56  | 45.92 | 51.57  | 74.00  | -22.43 | peak   |
| 3    | 4844.000 | 7.08  | 33.98  | 34.89  | 43.86 | 50.03  | 74.00  | -23.97 | peak   |
| 4 q  | 6053.894 | 8.17  | 35.01  | 35.09  | 45.32 | 53.41  | 74.00  | -20.59 | peak   |
| 5    | 7266.000 | 8.57  | 35.83  | 35.96  | 43.76 | 52.20  | 74.00  | -21.80 | peak   |
| 6    | 9688.000 | 10.42 | 37.10  | 35.56  | 41.33 | 53.29  | 74.00  | -20.71 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report and certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 158 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:Low

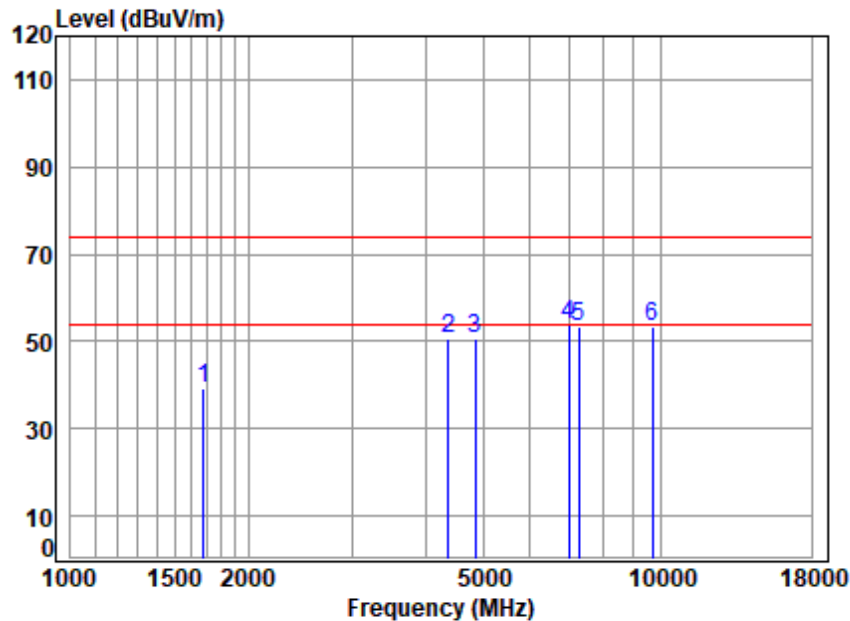

Site : chamber  
Condition: 3m VERTICAL  
Job No : 00478AT\00479AT  
Mode : 2422 TX RSE  
: 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1682.477 | 3.47  | 26.77  | 36.44  | 45.42 | 39.22  | 74.00  | -34.78 | peak   |
| 2    | 4367.058 | 6.65  | 33.57  | 34.59  | 45.08 | 50.71  | 74.00  | -23.29 | peak   |
| 3    | 4844.000 | 7.08  | 33.98  | 34.89  | 44.40 | 50.57  | 74.00  | -23.43 | peak   |
| 4 q  | 6974.982 | 8.32  | 35.75  | 35.89  | 45.44 | 53.62  | 74.00  | -20.38 | peak   |
| 5    | 7266.000 | 8.57  | 35.83  | 35.96  | 44.85 | 53.29  | 74.00  | -20.71 | peak   |
| 6    | 9688.000 | 10.42 | 37.10  | 35.56  | 41.33 | 53.29  | 74.00  | -20.71 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 159 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:middle

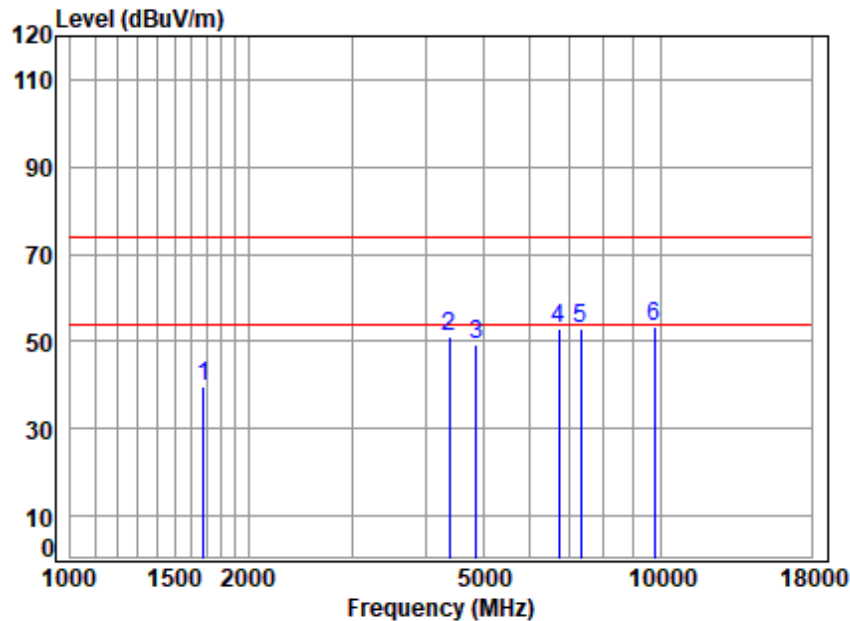

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2437 TX RSE  
: 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1682.477 | 3.47  | 26.77  | 36.44  | 45.81 | 39.61  | 74.00  | -34.39 | peak   |
| 2    | 4379.699 | 6.66  | 33.54  | 34.59  | 45.53 | 51.14  | 74.00  | -22.86 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 43.20 | 49.44  | 74.00  | -24.56 | peak   |
| 4    | 6717.762 | 8.28  | 35.56  | 35.68  | 44.89 | 53.05  | 74.00  | -20.95 | peak   |
| 5    | 7311.000 | 8.61  | 35.90  | 35.97  | 44.18 | 52.72  | 74.00  | -21.28 | peak   |
| 6 q  | 9748.000 | 10.45 | 37.20  | 35.56  | 41.45 | 53.54  | 74.00  | -20.46 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 160 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:middle

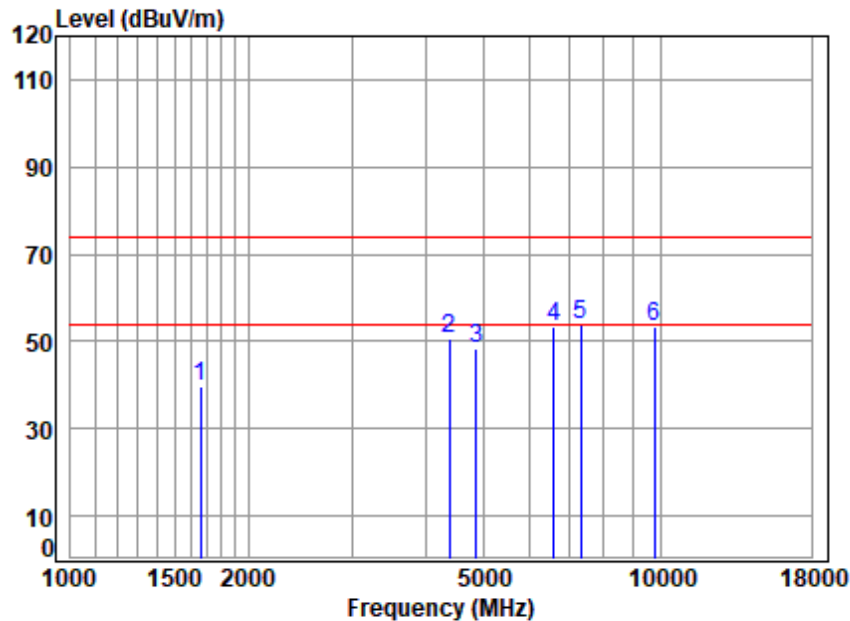

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2437 TX RSE  
 : 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1663.137 | 3.45  | 26.73  | 36.48  | 46.04 | 39.74  | 74.00  | -34.26 | peak   |
| 2    | 4379.699 | 6.66  | 33.54  | 34.59  | 45.23 | 50.84  | 74.00  | -23.16 | peak   |
| 3    | 4874.000 | 7.10  | 34.05  | 34.91  | 42.17 | 48.41  | 74.00  | -25.59 | peak   |
| 4    | 6583.209 | 8.26  | 35.60  | 35.56  | 45.24 | 53.54  | 74.00  | -20.46 | peak   |
| 5 q  | 7311.000 | 8.61  | 35.90  | 35.97  | 45.26 | 53.80  | 74.00  | -20.20 | peak   |
| 6    | 9748.000 | 10.45 | 37.20  | 35.56  | 41.27 | 53.36  | 74.00  | -20.64 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com




## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 161 of 352

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:High

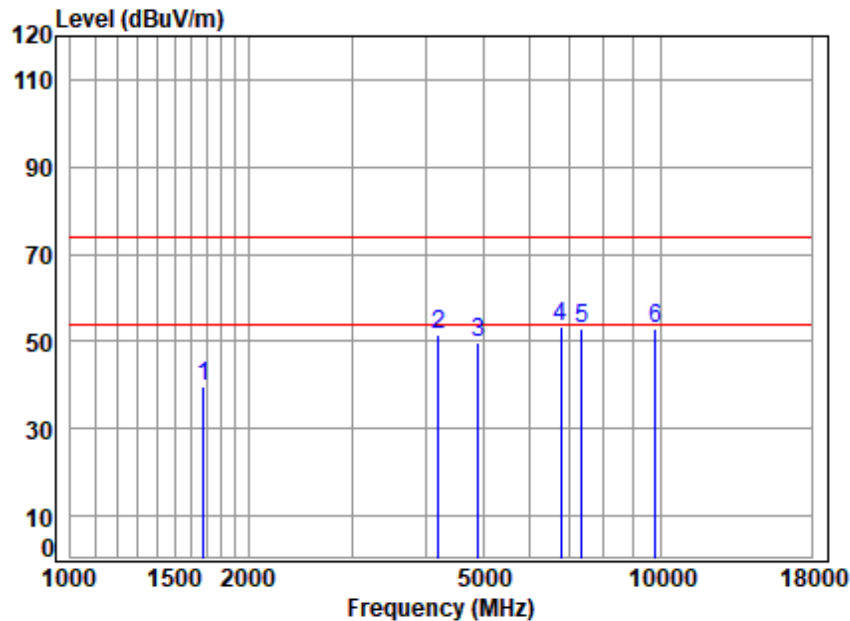

Site : chamber  
Condition: 3m HORIZONTAL  
Job No : 00478AT\00479AT  
Mode : 2452 TX RSE  
: 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
|      | MHz      | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1682.477 | 3.47  | 26.77  | 36.44  | 45.99 | 39.79  | 74.00  | -34.21 | peak   |
| 2    | 4206.011 | 6.49  | 33.42  | 34.48  | 45.97 | 51.40  | 74.00  | -22.60 | peak   |
| 3    | 4904.000 | 7.13  | 34.11  | 34.92  | 43.47 | 49.79  | 74.00  | -24.21 | peak   |
| 4 q  | 6776.265 | 8.29  | 35.50  | 35.73  | 45.29 | 53.35  | 74.00  | -20.65 | peak   |
| 5    | 7356.000 | 8.65  | 35.90  | 35.98  | 44.29 | 52.86  | 74.00  | -21.14 | peak   |
| 6    | 9808.000 | 10.47 | 37.22  | 35.57  | 40.88 | 53.00  | 74.00  | -21.00 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch (CMAA) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 162 of 352

Test Mode: 08; Polarity: Vertical; Modulation:802.11ax(RU26); Bandwidth:40MHz; Channel:High

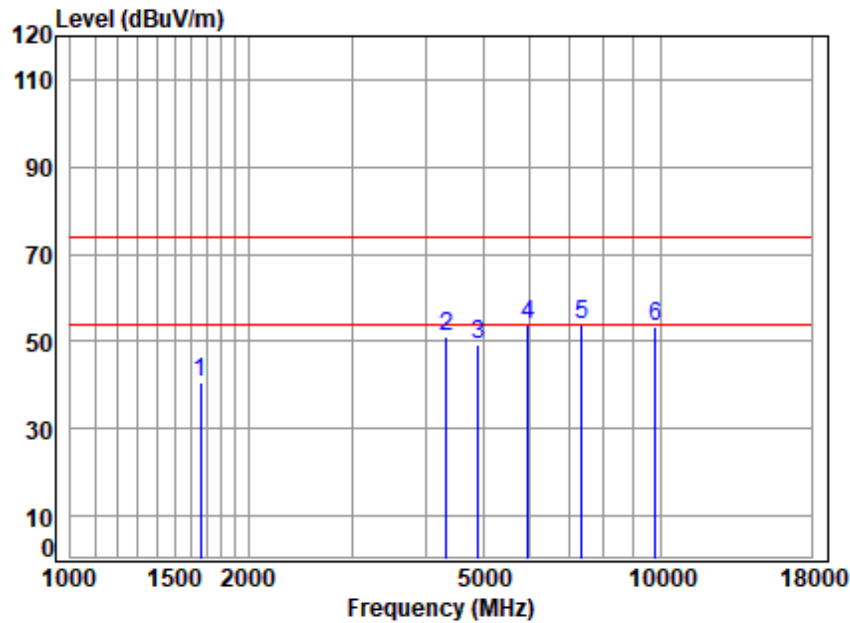

Site : chamber  
 Condition: 3m VERTICAL  
 Job No : 00478AT\00479AT  
 Mode : 2452 TX RSE  
 : 2.4G WIFI 11AX40 RU

|      |          | Cable | Ant    | Preamp | Read  |        | Limit  | Over   |        |
|------|----------|-------|--------|--------|-------|--------|--------|--------|--------|
| Freq |          | Loss  | Factor | Factor | Level | Level  | Line   | Limit  | Remark |
| MHz  |          | dB    | dB/m   | dB     | dBuV  | dBuV/m | dBuV/m | dB     |        |
| 1    | 1658.337 | 3.44  | 26.72  | 36.50  | 46.78 | 40.44  | 74.00  | -33.56 | peak   |
| 2    | 4341.886 | 6.62  | 33.60  | 34.57  | 45.49 | 51.14  | 74.00  | -22.86 | peak   |
| 3    | 4904.000 | 7.13  | 34.11  | 34.92  | 42.90 | 49.22  | 74.00  | -24.78 | peak   |
| 4 q  | 5949.811 | 8.12  | 34.90  | 35.04  | 45.80 | 53.78  | 74.00  | -20.22 | peak   |
| 5    | 7356.000 | 8.65  | 35.90  | 35.98  | 45.19 | 53.76  | 74.00  | -20.24 | peak   |
| 6    | 9808.000 | 10.47 | 37.22  | 35.57  | 41.09 | 53.21  | 74.00  | -20.79 | peak   |



SGS-CSTC Standards Technical Services Co., Ltd.  
 Shenzhen Branch (SZEMC) EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
 Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

## 8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SZCR2302000478AT

## 9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2302000478AT



## 10 Appendix

### 1. Duty Cycle


#### 1.1 Ant1

##### 1.1.1 Test Result


| Ant1             |         |                 |       |        |           |             |                |                                   |                       |
|------------------|---------|-----------------|-------|--------|-----------|-------------|----------------|-----------------------------------|-----------------------|
| Mode             | TX Type | Frequency (MHz) | RU    | RU Pos | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| 802.11b          | MIMO    | 2412            | /     | /      | 8.384     | 9.034       | 92.80          | 0.32                              | 0.31                  |
|                  |         | 2437            | /     | /      | 8.387     | 9.053       | 92.64          | 0.33                              | 0.48                  |
|                  |         | 2462            | /     | /      | 8.383     | 9.033       | 92.80          | 0.32                              | 0.31                  |
| 802.11g          | MIMO    | 2412            | /     | /      | 1.395     | 2.040       | 68.38          | 1.65                              | 0.96                  |
|                  |         | 2437            | /     | /      | 1.394     | 2.040       | 68.33          | 1.65                              | 0.95                  |
|                  |         | 2462            | /     | /      | 1.393     | 2.039       | 68.32          | 1.65                              | 0.97                  |
| 802.11n (HT20)   | MIMO    | 2412            | /     | /      | 1.304     | 1.975       | 66.03          | 1.80                              | 1.86                  |
|                  |         | 2437            | /     | /      | 1.303     | 1.947       | 66.92          | 1.74                              | 0.95                  |
|                  |         | 2462            | /     | /      | 1.302     | 1.929       | 67.50          | 1.71                              | 0.34                  |
| 802.11n (HT40)   | MIMO    | 2422            | /     | /      | 0.650     | 1.286       | 50.54          | 2.96                              | 0.39                  |
|                  |         | 2437            | /     | /      | 0.650     | 1.286       | 50.54          | 2.96                              | 0.39                  |
|                  |         | 2452            | /     | /      | 0.650     | 1.294       | 50.23          | 2.99                              | 26.74                 |
| 802.11ax (HEW20) | MIMO    | 2412            | RU242 | Left   | 0.525     | 1.288       | 40.76          | 3.90                              | 0.34                  |
|                  |         | 2437            | RU242 | Left   | 0.526     | 0.829       | 63.45          | 1.98                              | 0.72                  |
|                  |         | 2462            | RU242 | Left   | 0.526     | 0.829       | 63.45          | 1.98                              | 0.71                  |
| 802.11ax (HEW40) | MIMO    | 2422            | RU484 | Left   | 0.526     | 1.495       | 35.18          | 4.54                              | 1.58                  |
|                  |         | 2437            | RU484 | Left   | 0.526     | 1.441       | 36.50          | 4.38                              | 0.26                  |
|                  |         | 2452            | RU484 | Left   | 0.526     | 1.504       | 34.97          | 4.56                              | 1.79                  |




### 1.1.2 Test Graph

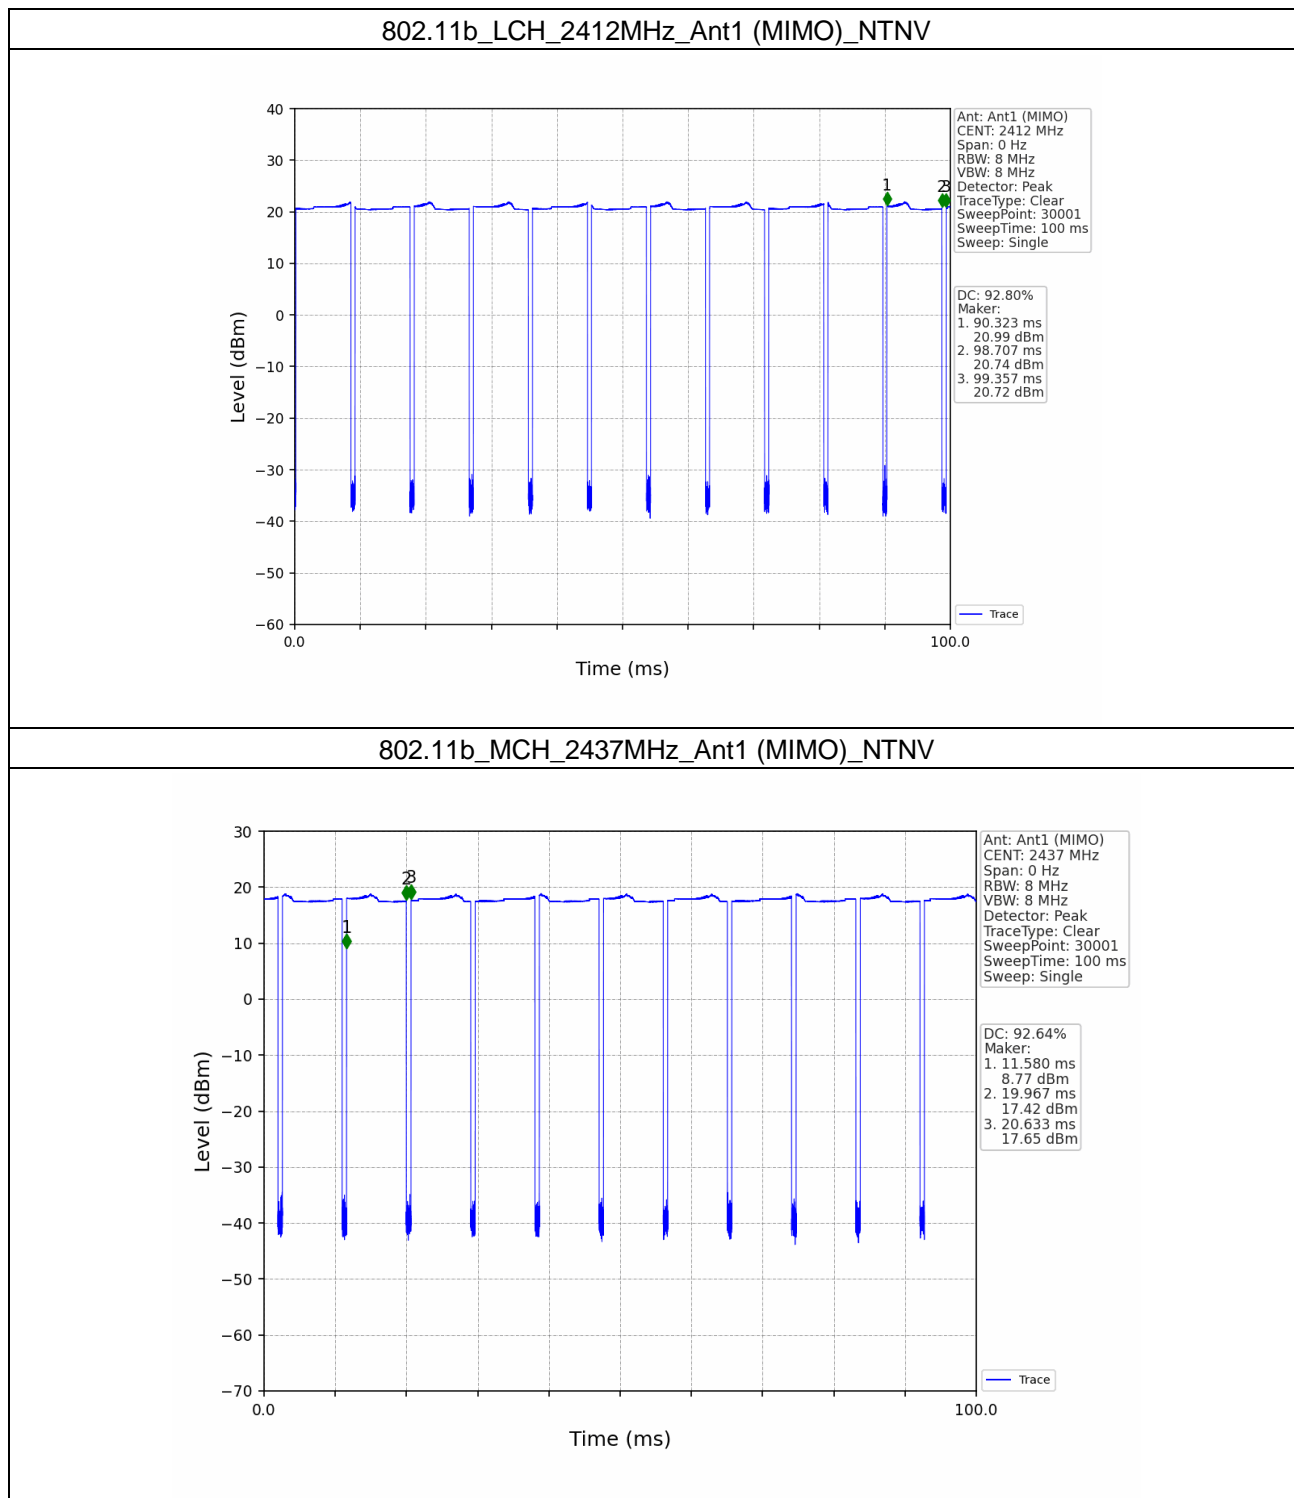


### 802.11b\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

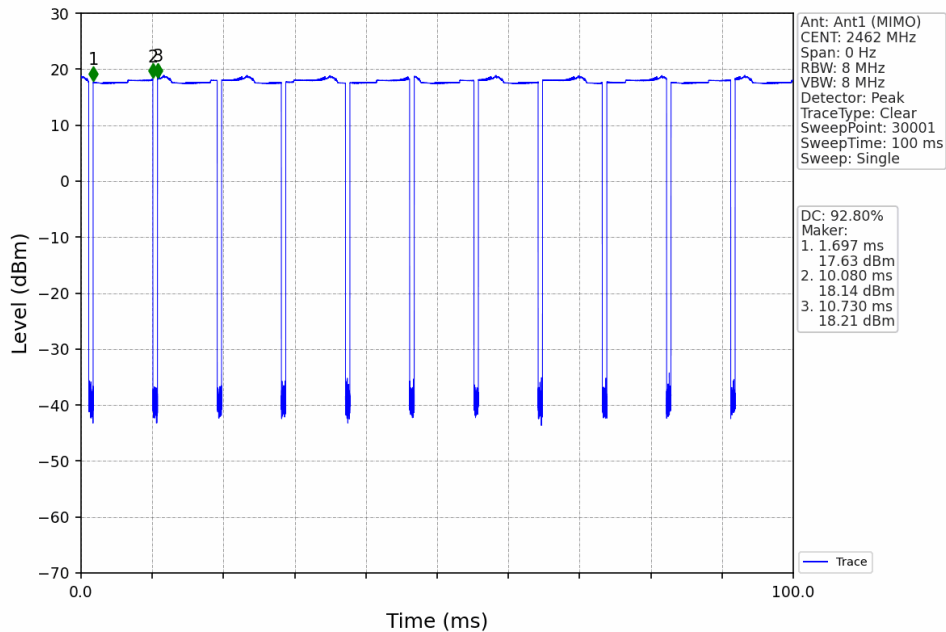


### 802.11g\_LCH\_2412MHz\_Ant1 (MIMO)\_NTNV

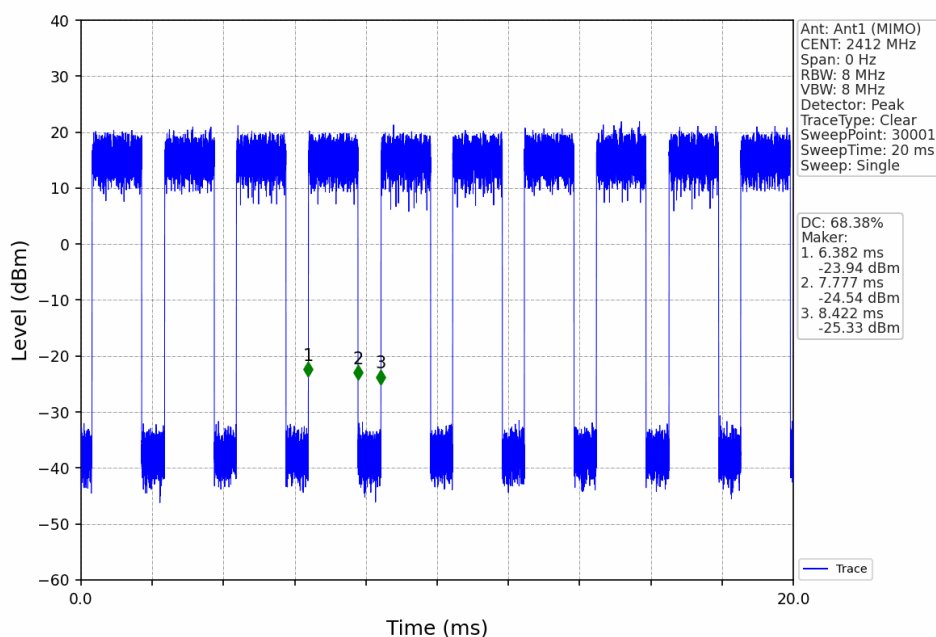


### 802.11g\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

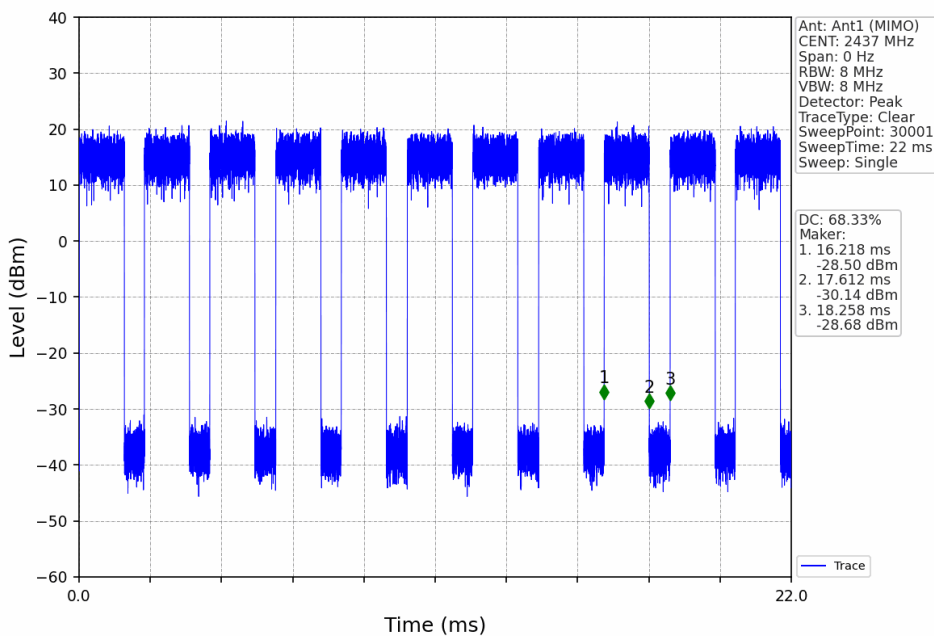


### 802.11g\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

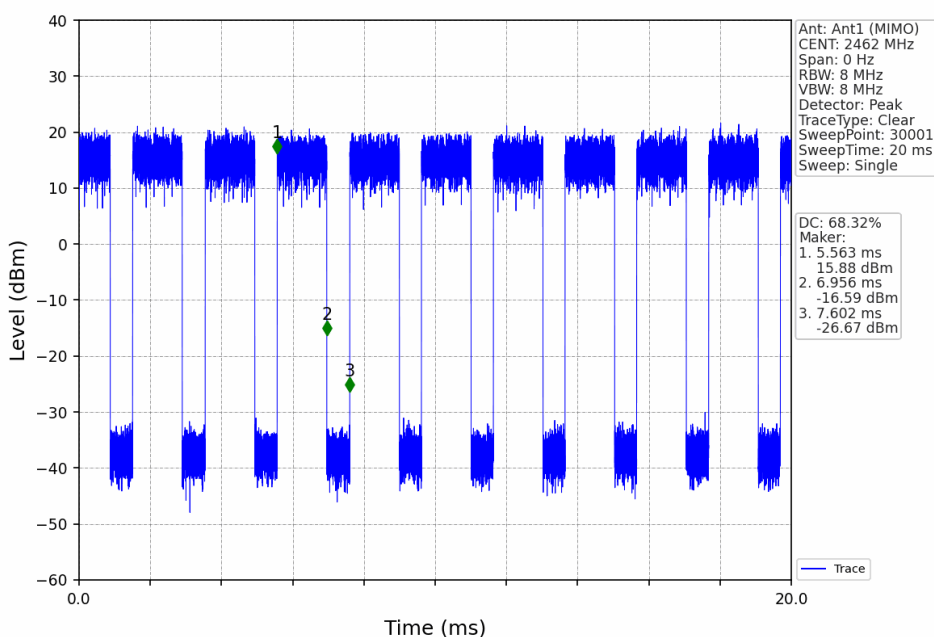

### 802.11n(HT20)\_LCH\_2412MHz\_Ant1 (MIMO)\_NTNV

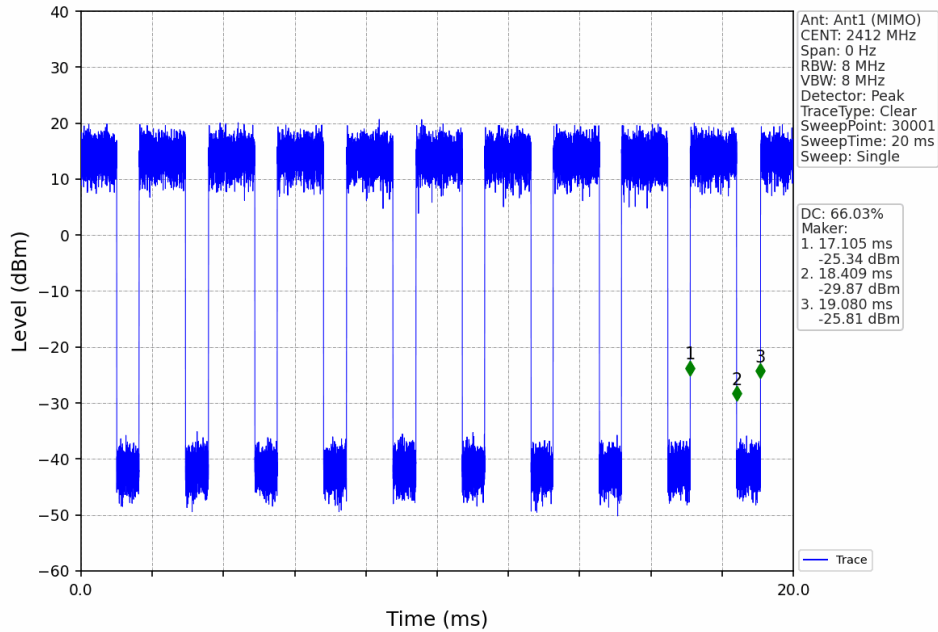


### 802.11n(HT20)\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

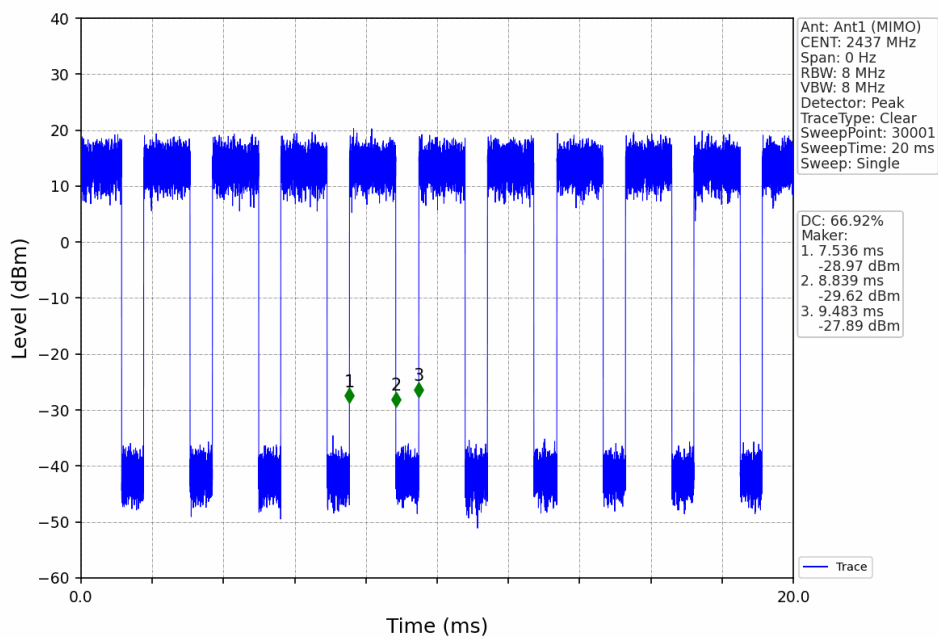





### 802.11n(HT20)\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

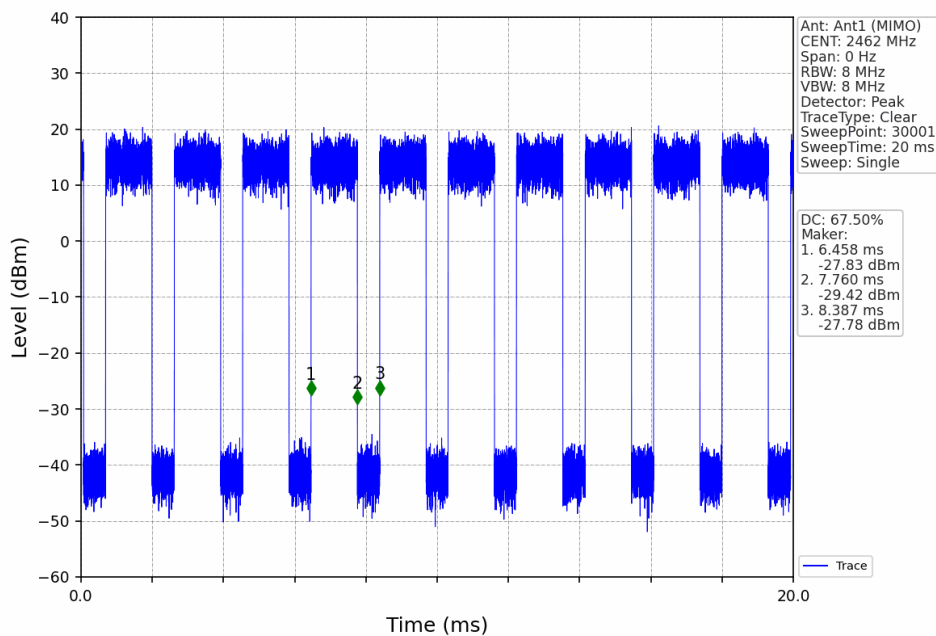


### 802.11n(HT40)\_LCH\_2422MHz\_Ant1 (MIMO)\_NTNV

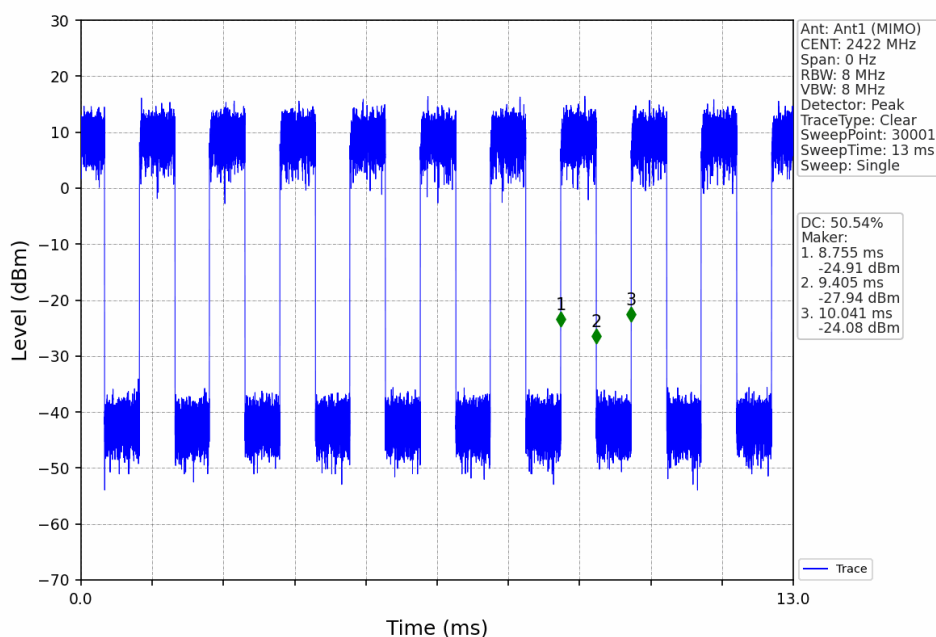


### 802.11n(HT40)\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

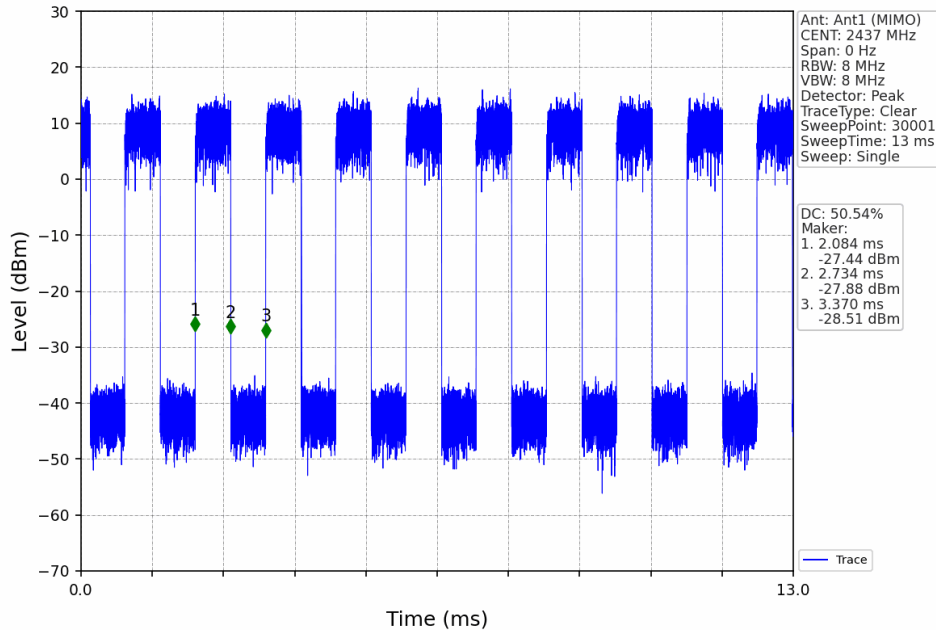


### 802.11n(HT40)\_HCH\_2452MHz\_Ant1 (MIMO)\_NTNV

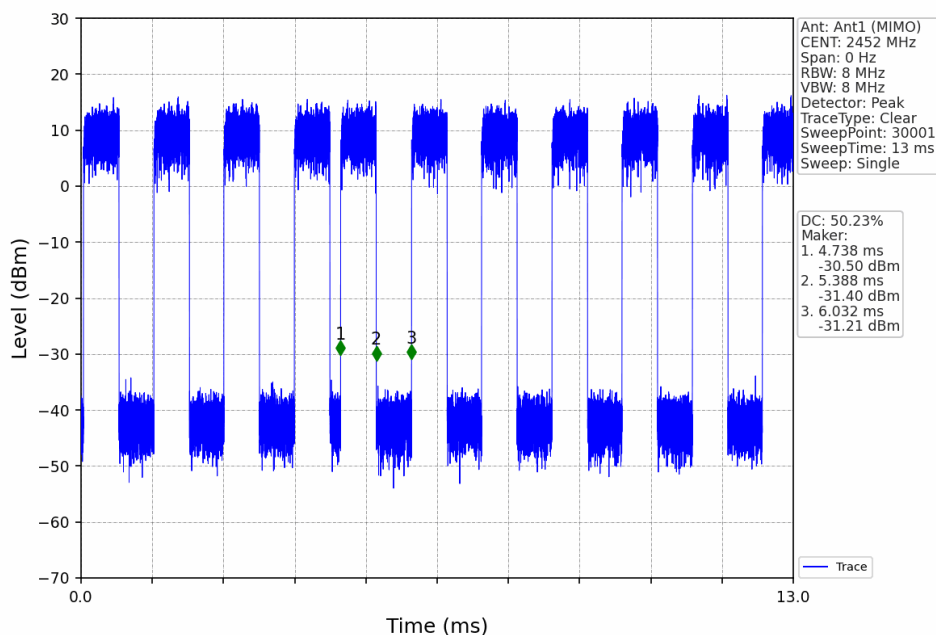


### 802.11ax(HEW20)\_LCH\_2412MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

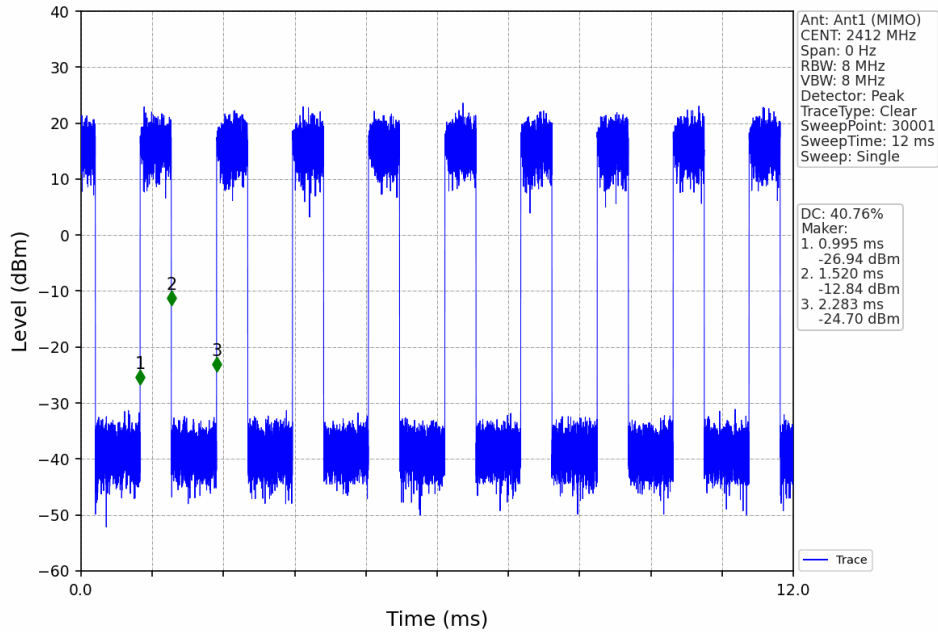


### 802.11ax(HEW20)\_MCH\_2437MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

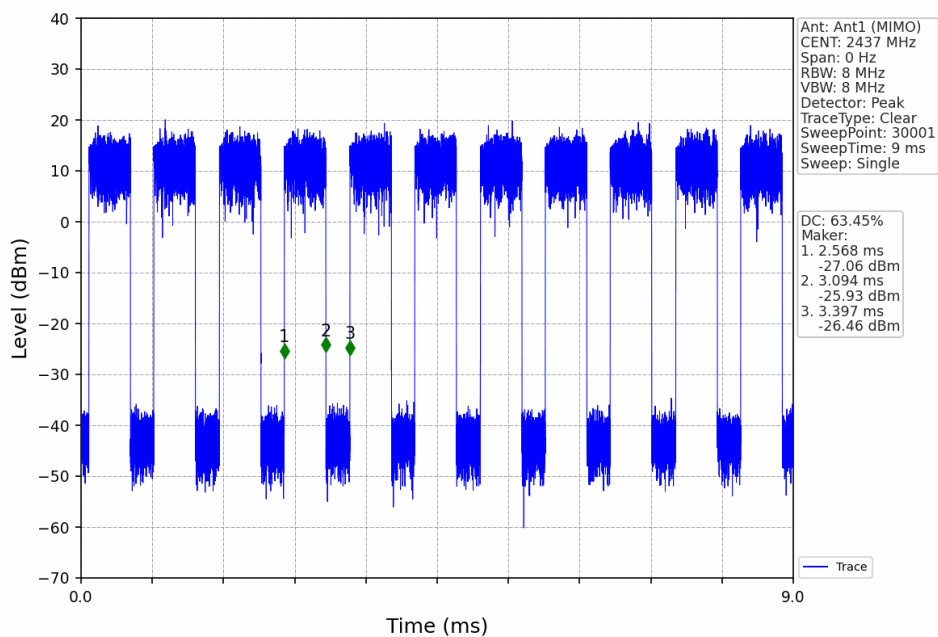

### 802.11ax(HEW20)\_HCH\_2462MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

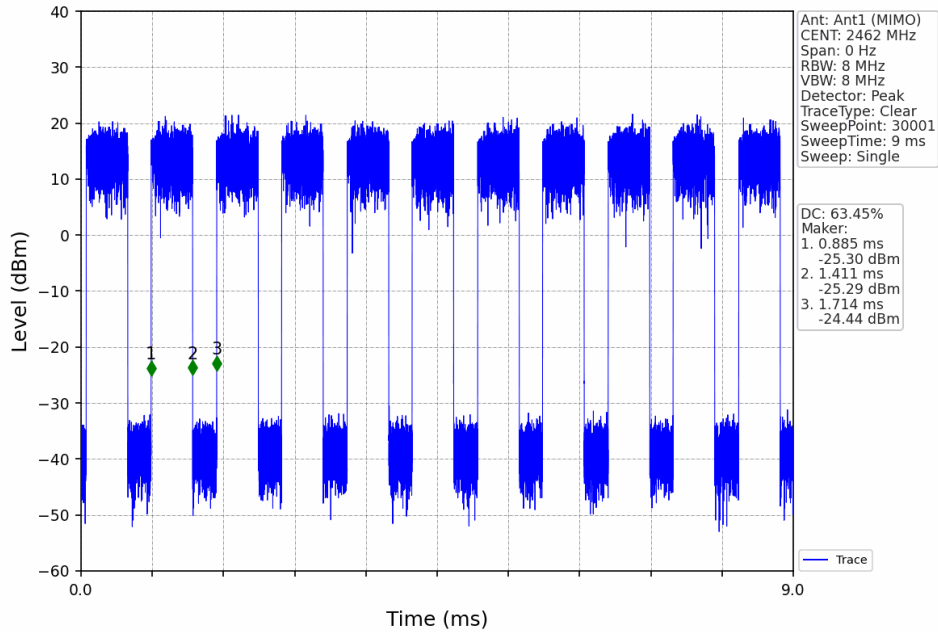


### 802.11ax(HEW40)\_LCH\_2422MHz\_RU484\_Left\_Ant1 (MIMO)\_NTNV

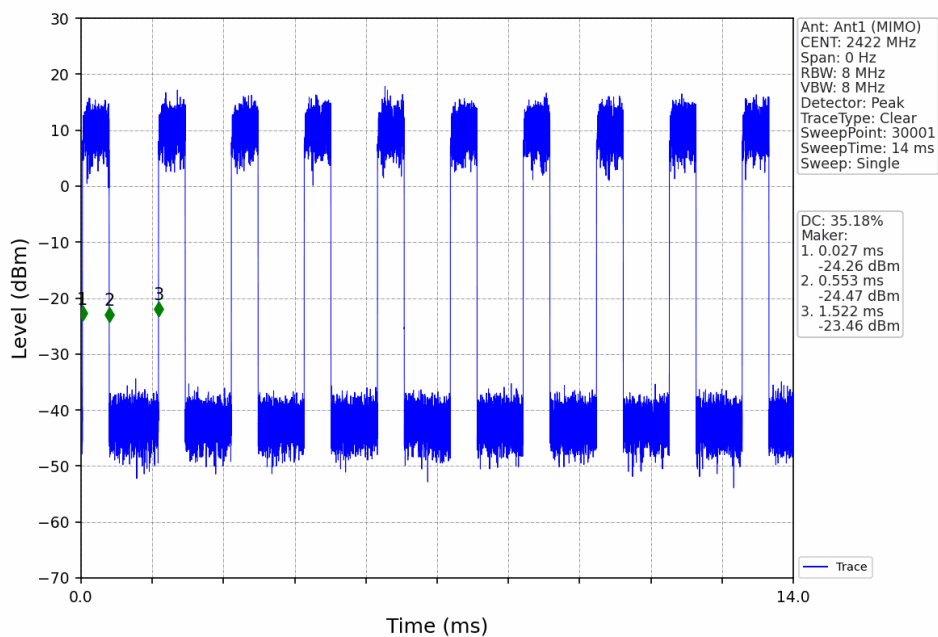




### 802.11ax(HEW40)\_MCH\_2437MHz\_RU484\_Left\_Ant1 (MIMO)\_NTNV

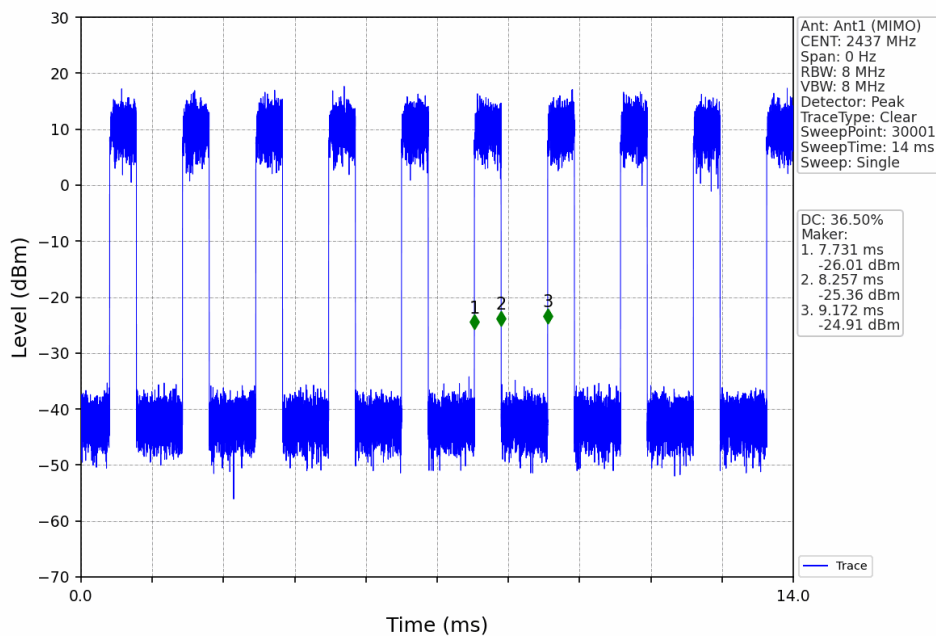

### 802.11ax(HEW40)\_HCH\_2452MHz\_RU484\_Left\_Ant1 (MIMO)\_NTNV

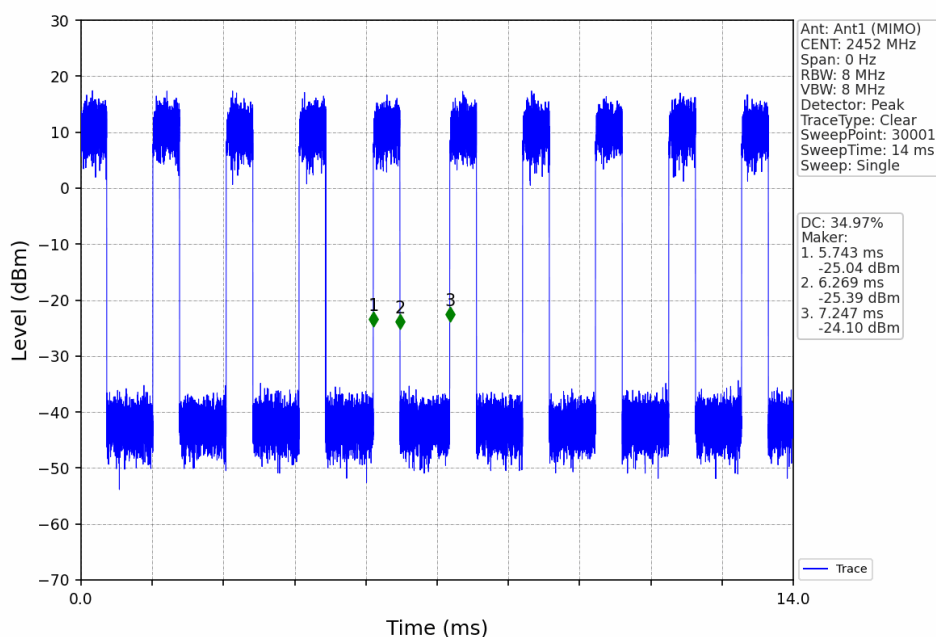

# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/0 Aug01,2022

Report No.: SZCR230200047804

Page: 174 of 352

## 2. Bandwidth

### 2.1 OBW

#### 2.1.1 Test Result


| Mode             | TX Type | Frequency (MHz) | RU    | RU Pos | ANT | 99% Occupied Bandwidth (MHz) | Verdict |
|------------------|---------|-----------------|-------|--------|-----|------------------------------|---------|
|                  |         |                 |       |        |     | Result                       |         |
| 802.11b          | MIMO    | 2412            | /     | /      | 1   | 12.669                       | Pass    |
|                  |         | 2437            | /     | /      | 1   | 12.636                       | Pass    |
|                  |         | 2462            | /     | /      | 1   | 12.611                       | Pass    |
| 802.11g          | MIMO    | 2412            | /     | /      | 1   | 17.304                       | Pass    |
|                  |         | 2437            | /     | /      | 1   | 19.563                       | Pass    |
|                  |         | 2462            | /     | /      | 1   | 19.545                       | Pass    |
| 802.11n (HT20)   | MIMO    | 2412            | /     | /      | 1   | 18.030                       | Pass    |
|                  |         | 2437            | /     | /      | 1   | 20.227                       | Pass    |
|                  |         | 2462            | /     | /      | 1   | 20.178                       | Pass    |
| 802.11n (HT40)   | MIMO    | 2422            | /     | /      | 1   | 36.142                       | Pass    |
|                  |         | 2437            | /     | /      | 1   | 36.167                       | Pass    |
|                  |         | 2452            | /     | /      | 1   | 36.149                       | Pass    |
| 802.11ax (HEW20) | MIMO    | 2412            | RU242 | Left   | 1   | 18.935                       | Pass    |
|                  |         | 2437            | RU242 | Left   | 1   | 19.488                       | Pass    |
|                  |         | 2462            | RU242 | Left   | 1   | 19.402                       | Pass    |
| 802.11ax (HEW40) | MIMO    | 2422            | RU484 | Left   | 1   | 37.726                       | Pass    |
|                  |         | 2437            | RU484 | Left   | 1   | 37.722                       | Pass    |
|                  |         | 2452            | RU484 | Left   | 1   | 37.643                       | Pass    |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn  
 中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


### 2.1.2 Test Graph

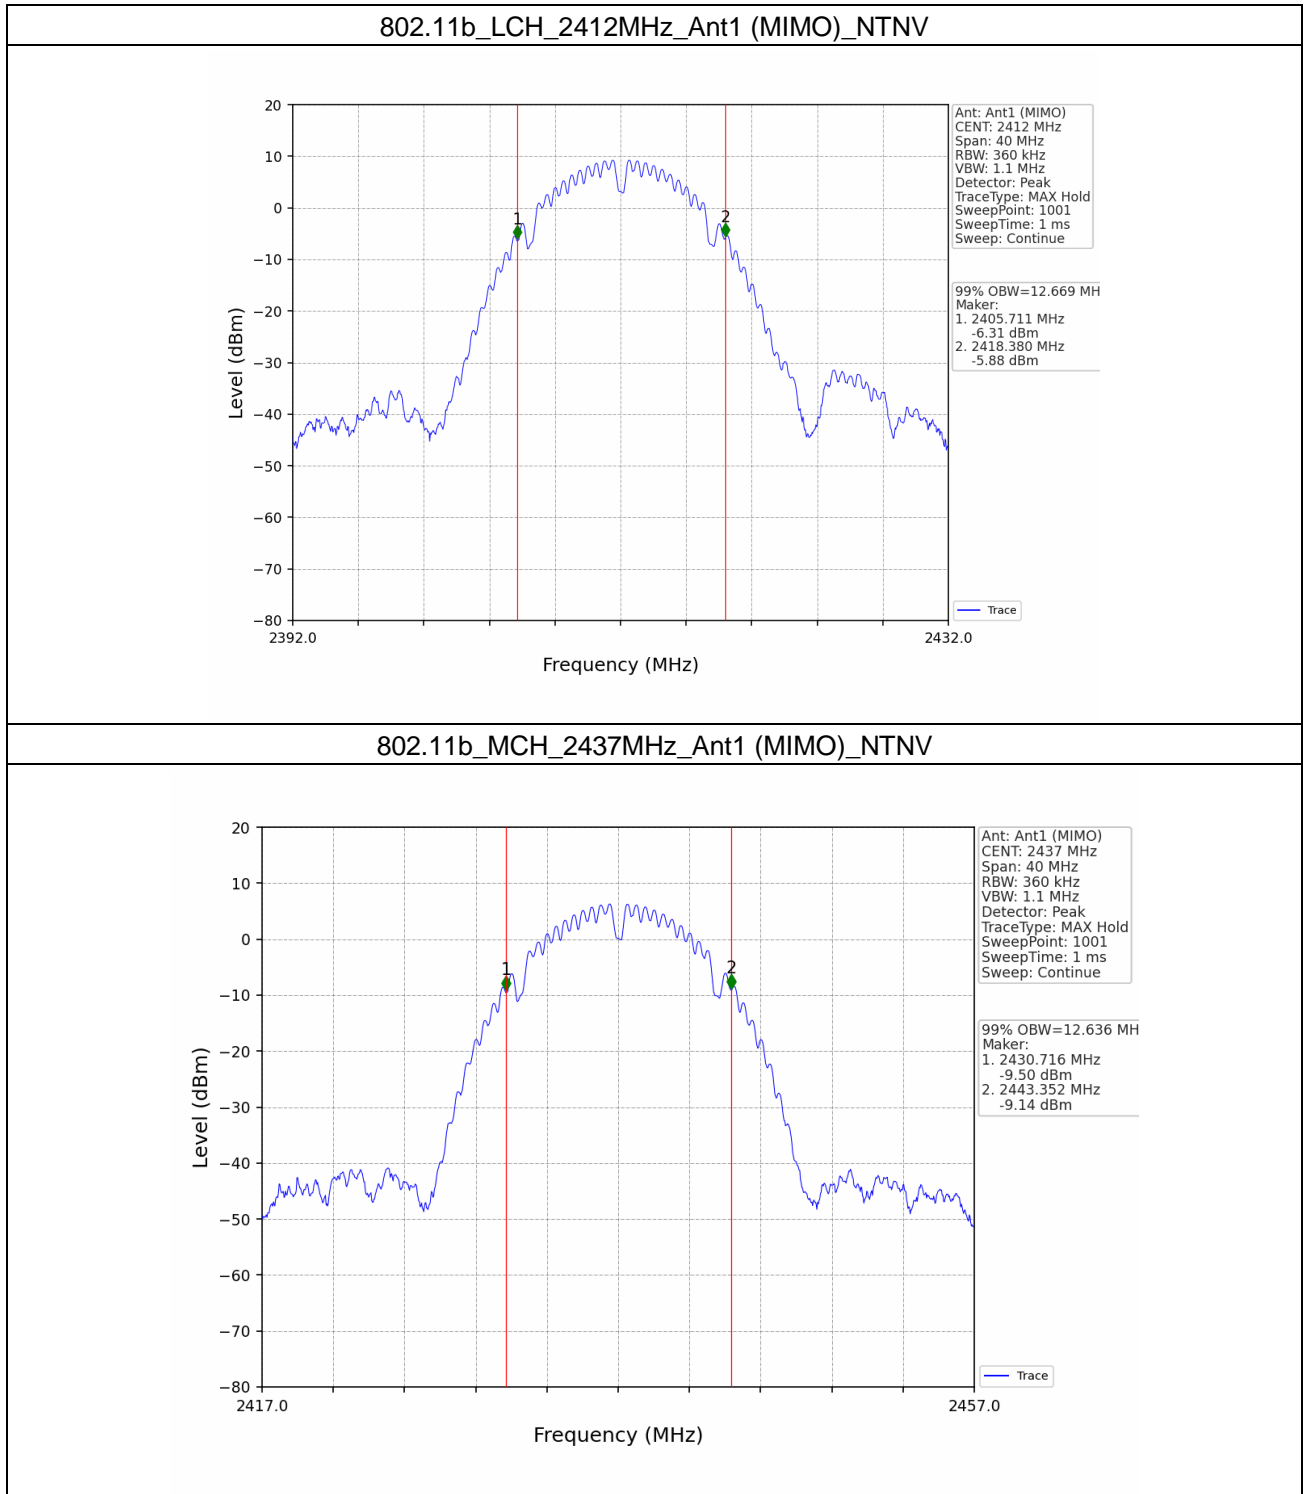

### 802.11b\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

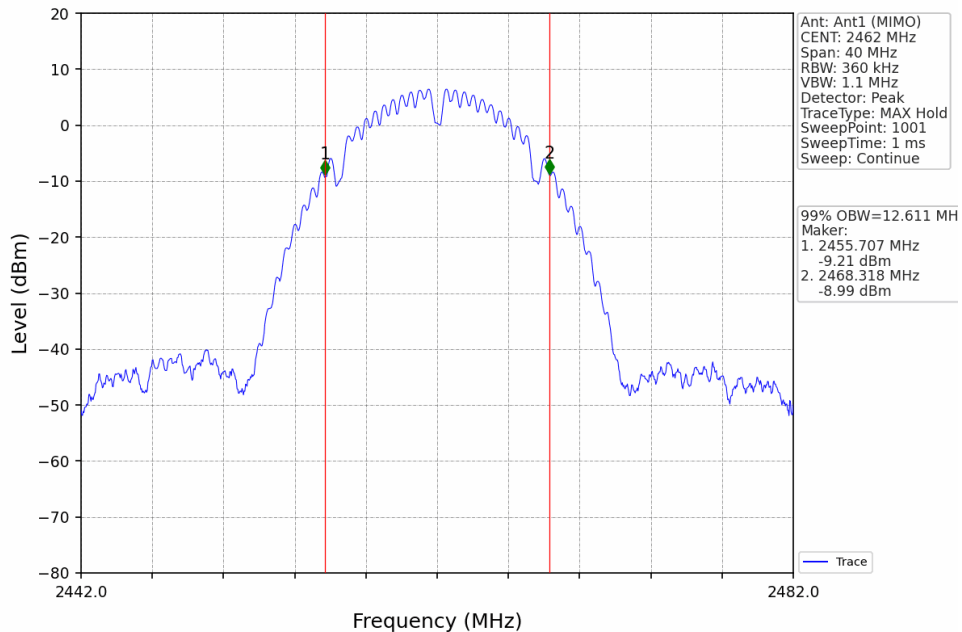


### 802.11g\_LCH\_2412MHz\_Ant1 (MIMO)\_NTNV

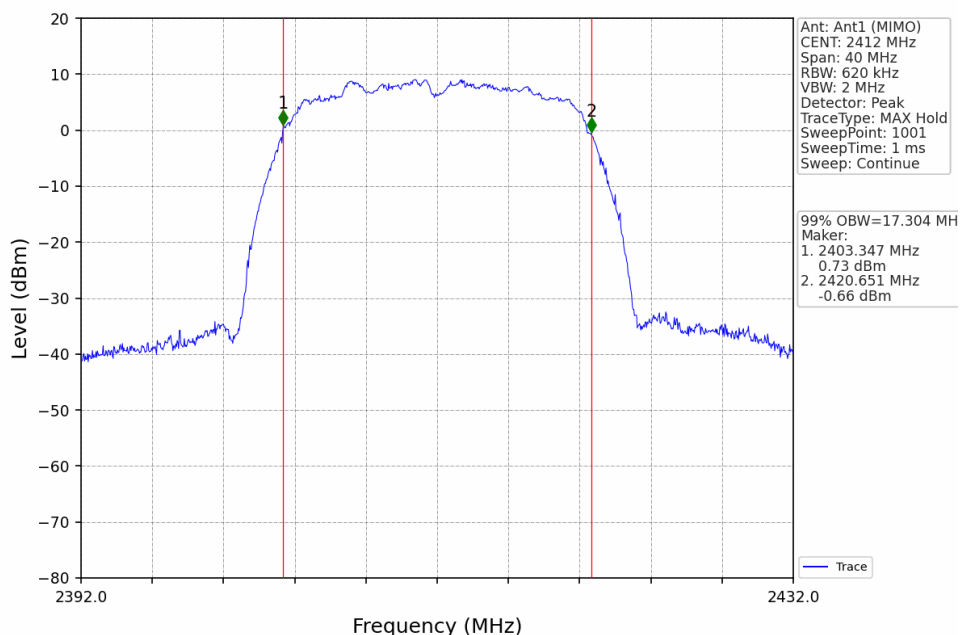





### 802.11g\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

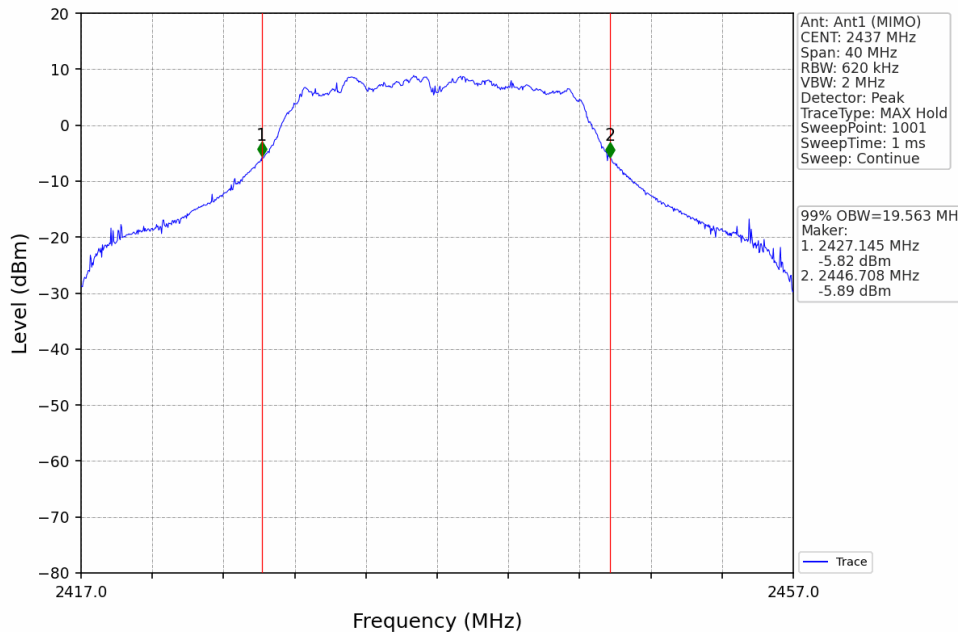


### 802.11g\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

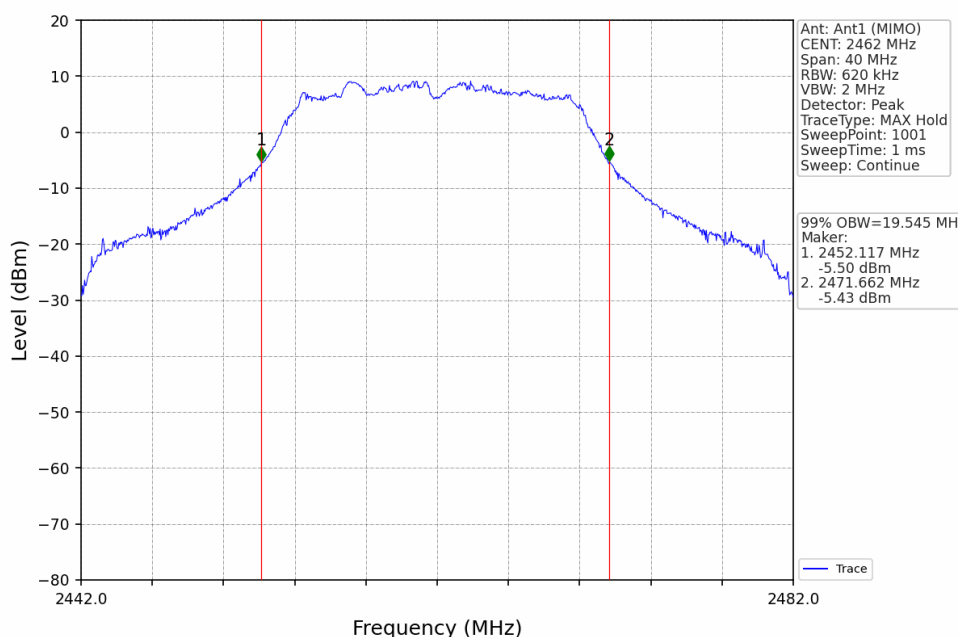


### 802.11n(HT20)\_LCH\_2412MHz\_Ant1 (MIMO)\_NTNV

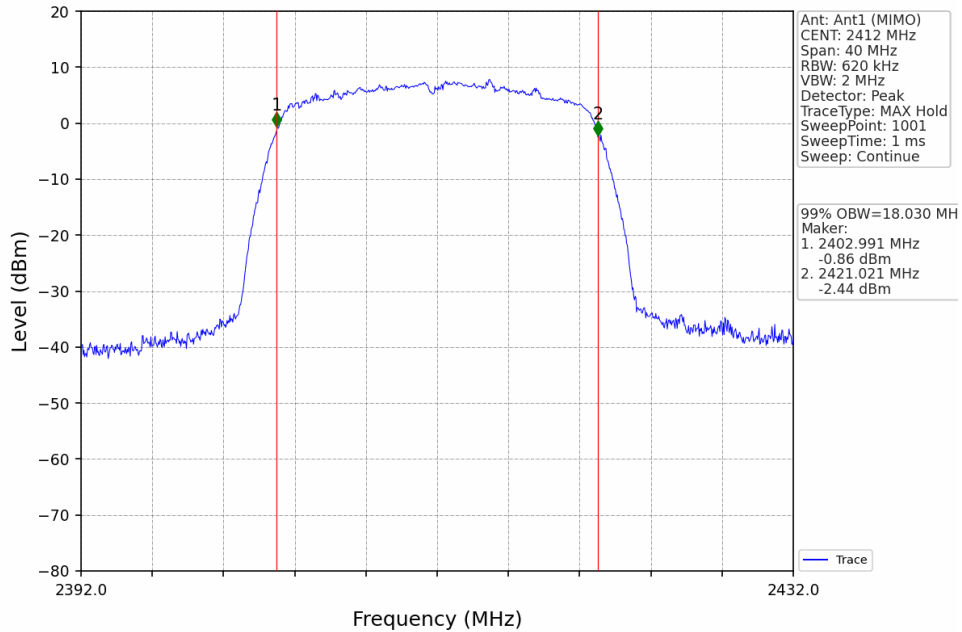


### 802.11n(HT20)\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

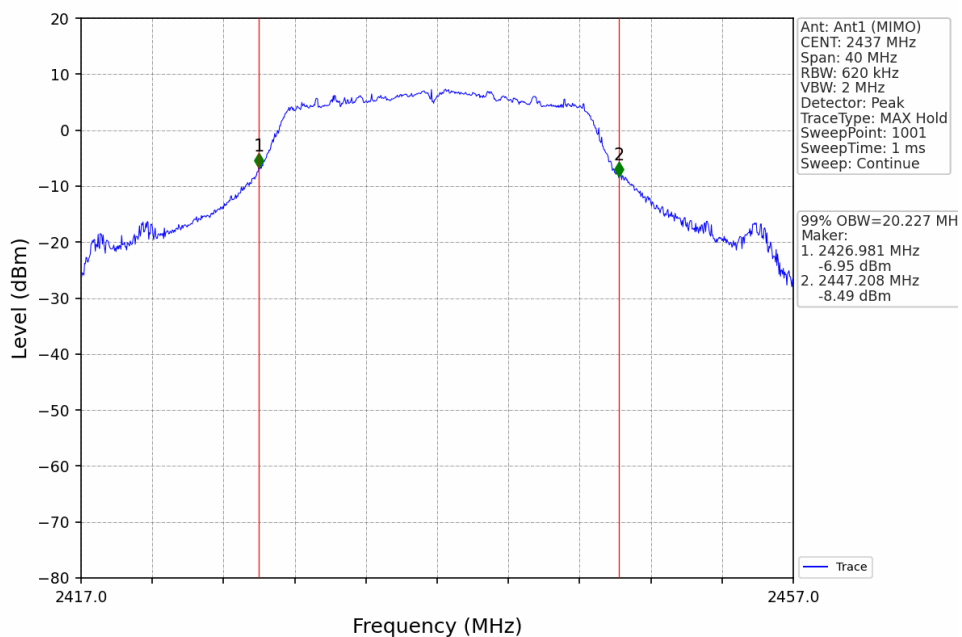


### 802.11n(HT20)\_HCH\_2462MHz\_Ant1 (MIMO)\_NTNV

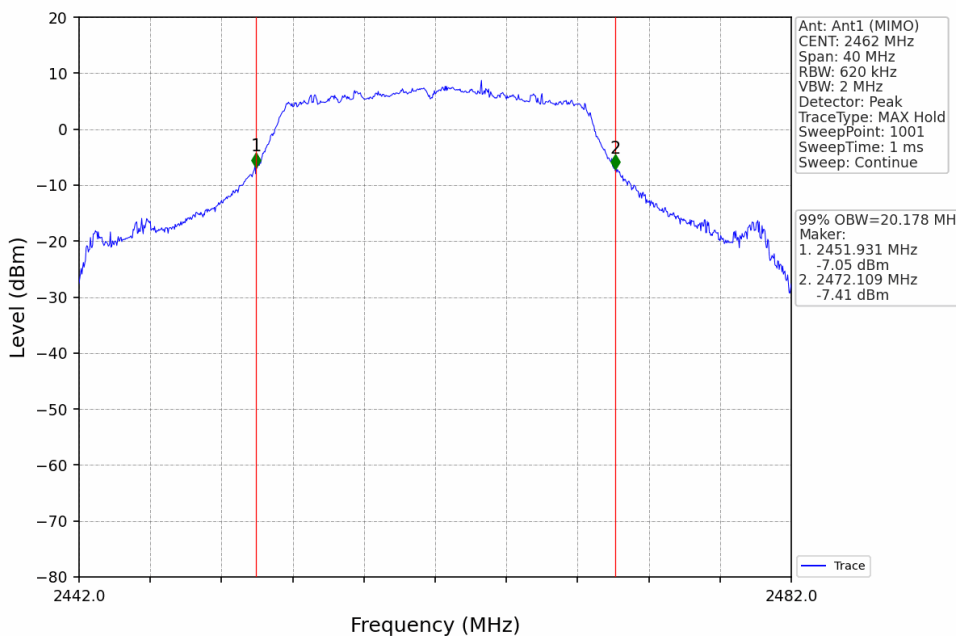


### 802.11n(HT40)\_LCH\_2422MHz\_Ant1 (MIMO)\_NTNV

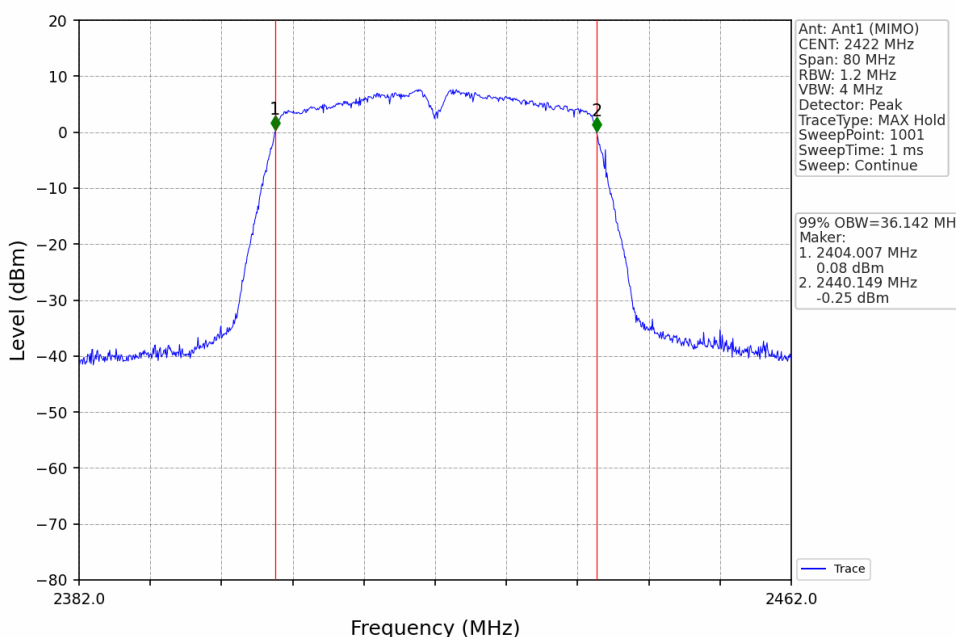

### 802.11n(HT40)\_MCH\_2437MHz\_Ant1 (MIMO)\_NTNV

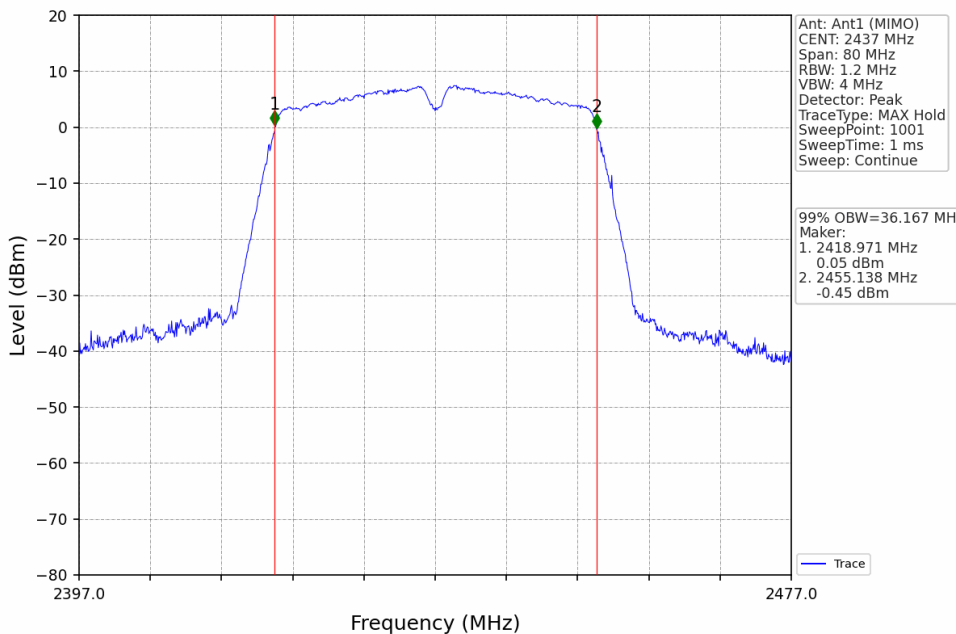


### 802.11n(HT40)\_HCH\_2452MHz\_Ant1 (MIMO)\_NTNV

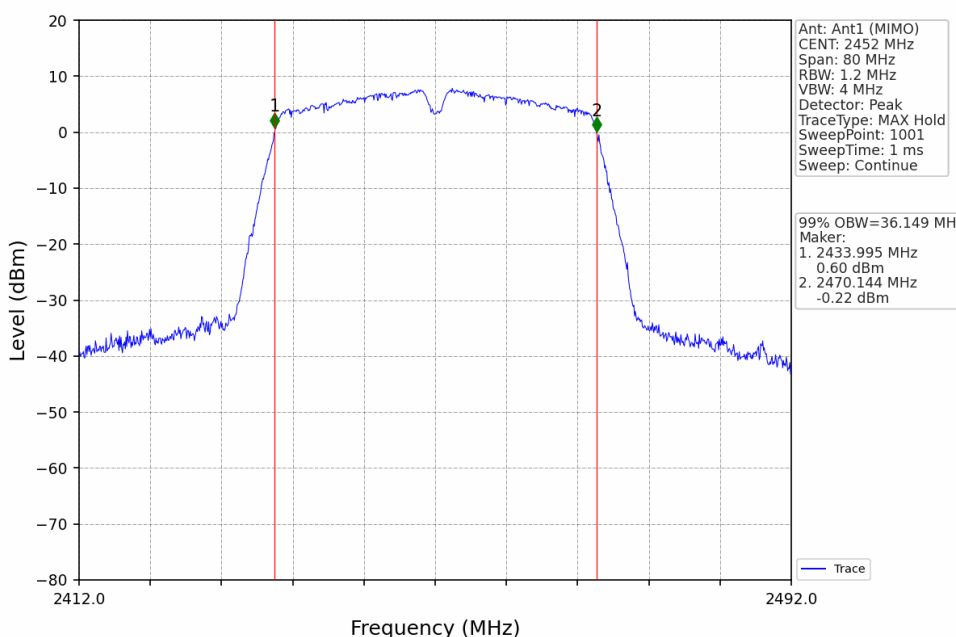





### 802.11ax(HEW20)\_LCH\_2412MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

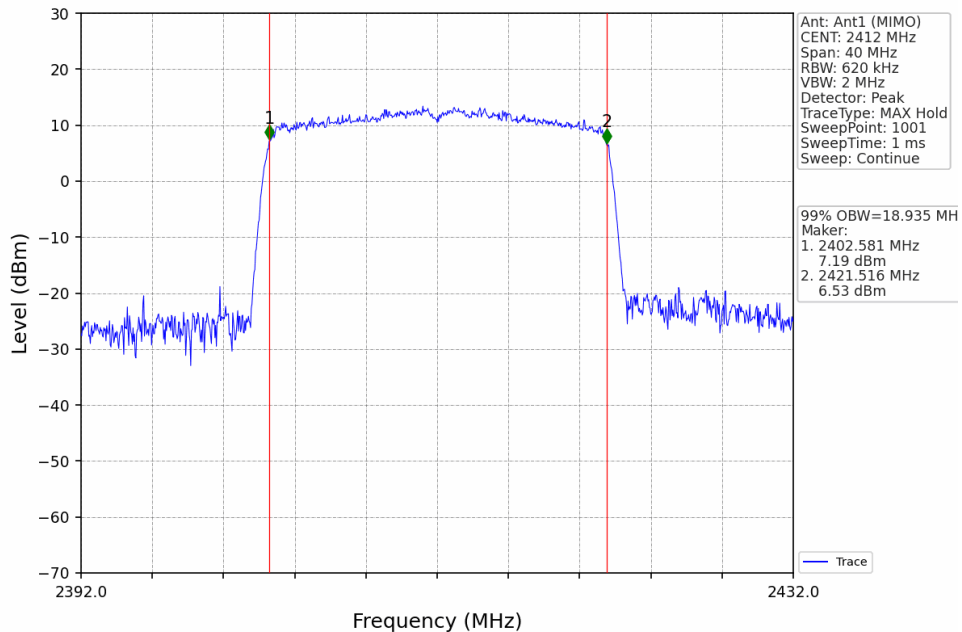

### 802.11ax(HEW20)\_MCH\_2437MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

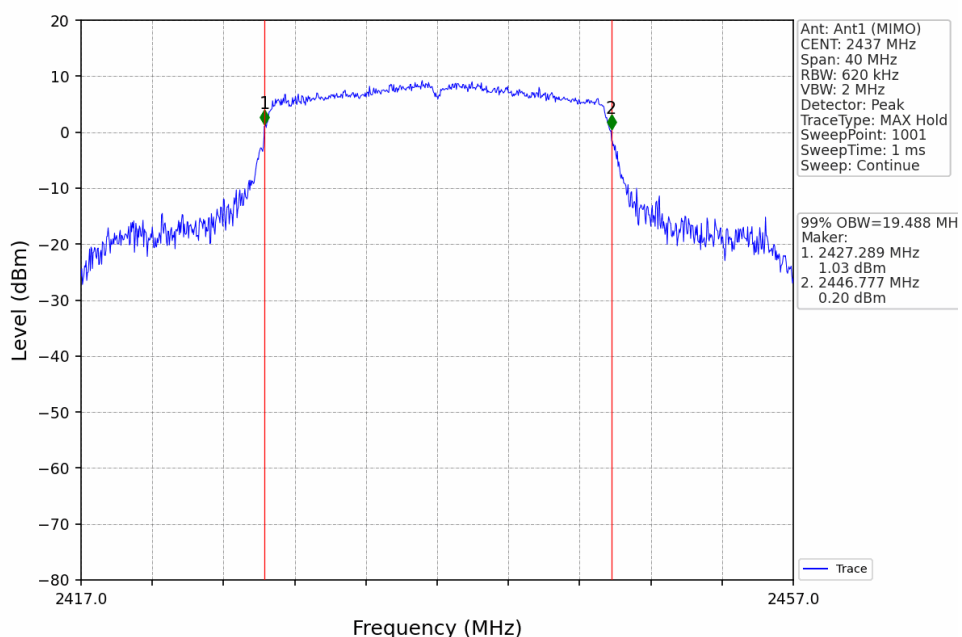

### 802.11ax(HEW20)\_HCH\_2462MHz\_RU242\_Left\_Ant1 (MIMO)\_NTNV

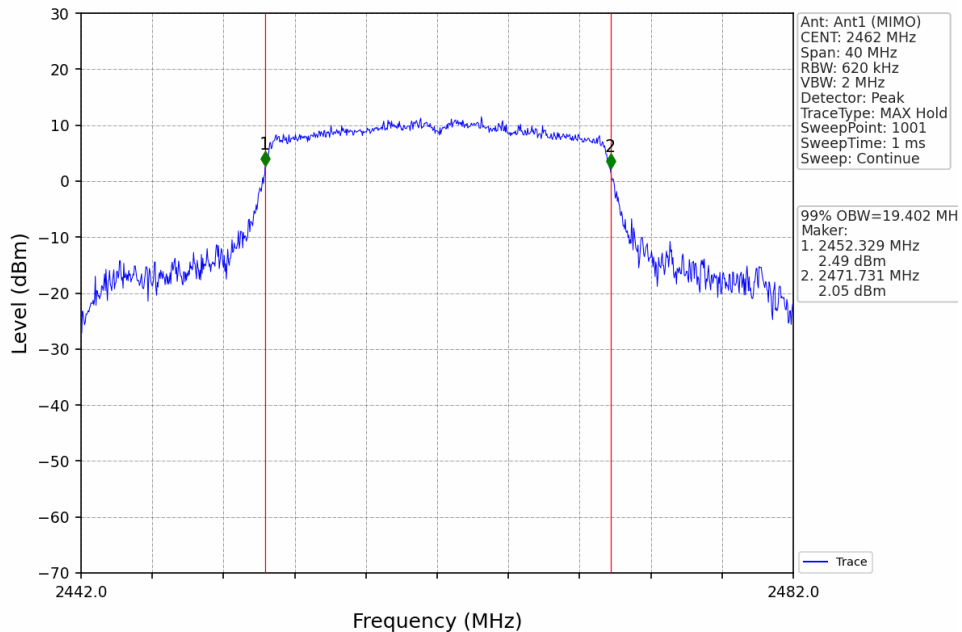

### 802.11ax(HEW40)\_LCH\_2422MHz\_RU484\_Left\_Ant1 (MIMO)\_NTNV

