

TEST REPORT

Product : WCDMA Digital Mobile Phone
Trade mark : RugGear
Model/Type reference : RG310, RG310EX, RG320EX
Serial Number : N/A
Report Number : EED32I00185902
FCC ID : ZLE-RG310
Date of Issue : Jul. 18, 2016
Test Standards : 47 CFR Part 15 Subpart C (2015)
Test result : PASS

Prepared for:

Power Idea Technology Limited.

**4th Floor, A Section, Languang Science&technology Xinxu RD,
Hi-Tech Industrial Park North, Nanshan, ShenZhen, China**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested By:

Tom - chen

Tom chen (Test Project)

Compiled by:

Kevin Yang

Kevin yang (Project Engineer)

Reviewed by:

Sheek, Luo

Sheek Luo (Reviewer)

Approved by:

Sheek, Luo

Sheek Luo (Lab supervisor)

Date:

Jul. 18, 2016

Check No.: 2384307786



2 Version

Version No.	Date	Description
00	Jul. 18, 2016	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample and the sample information are provided by the client.

Model No.: RG310, RG310EX, RG320EX

Only the model RG310 was tested, the PCB, Schematic, Hardware etc were identical for the above models, Only different model name due to difference agent and marketing purposes.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	8
6.5 TEST LOCATION	8
6.6 TEST FACILITY	8
6.7 DEVIATION FROM STANDARDS	9
6.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth	14
Appendix B): Carrier Frequency Separation	18
Appendix C): Dwell Time	22
Appendix D): Hopping Channel Number	26
Appendix E): Conducted Peak Output Power	28
Appendix F): Band-edge for RF Conducted Emissions	32
Appendix G): RF Conducted Spurious Emissions	37
Appendix H): Pseudorandom Frequency Hopping Sequence	47
Appendix I): Antenna Requirement	48
Appendix J): AC Power Line Conducted Emission	49
Appendix K): Restricted bands around fundamental frequency (Radiated)	52
Appendix L): Radiated Spurious Emissions	61
PHOTOGRAPHS OF TEST SETUP	69
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	71

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

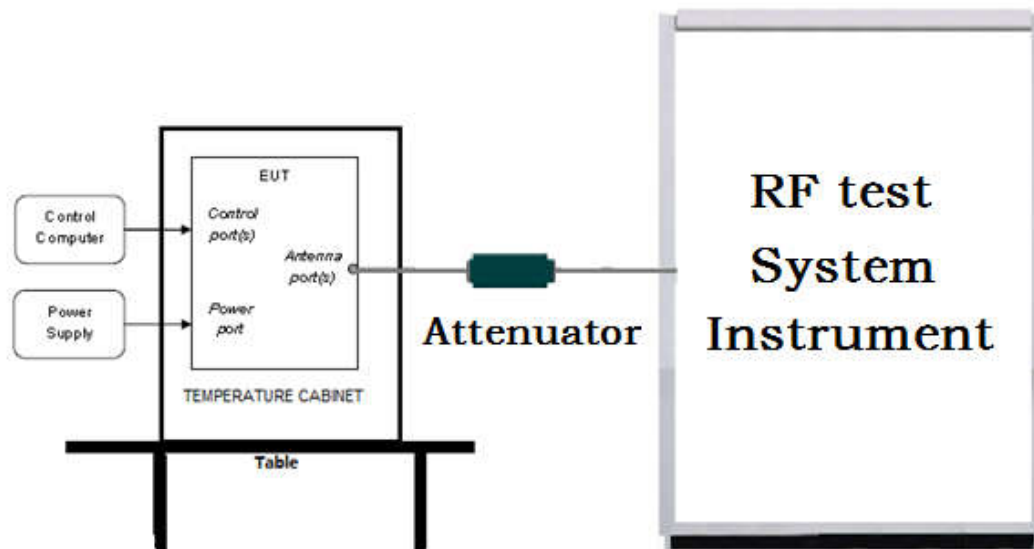

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

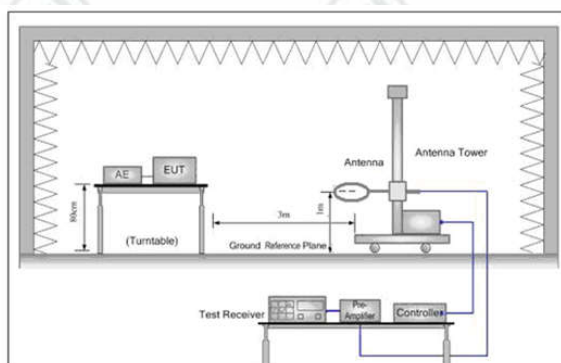


Figure 1. Below 30MHz

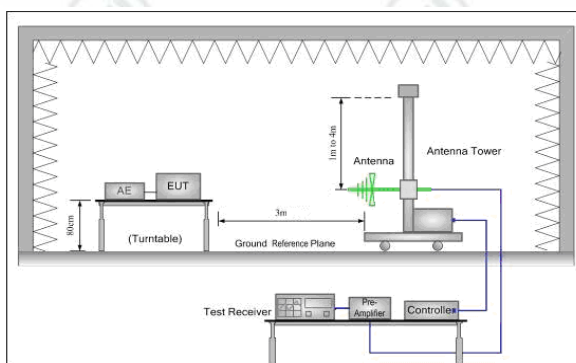


Figure 2. 30MHz to 1GHz


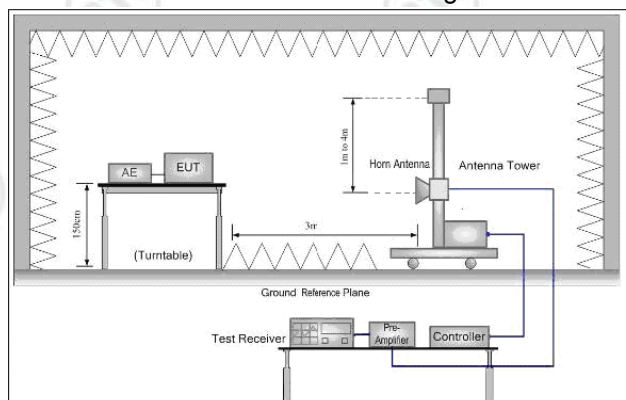


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

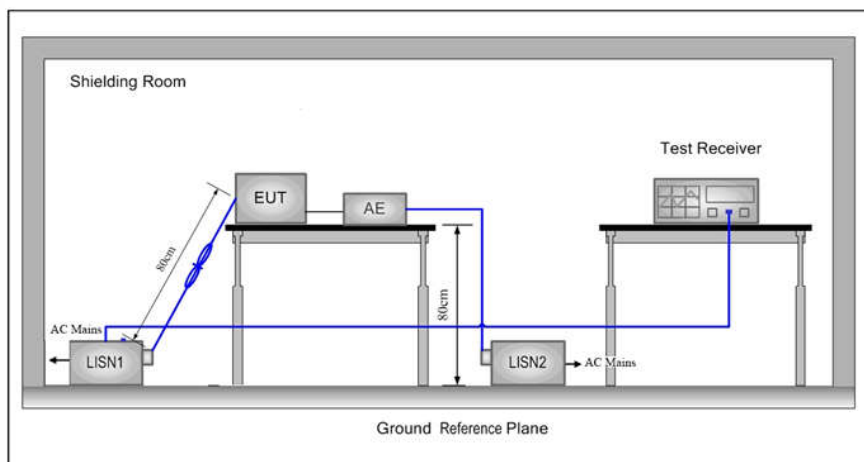

5.2 Test Environment

Operating Environment:	
Temperature:	21°C
Humidity:	54% RH
Atmospheric Pressure:	10105mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3,DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

Test mode:

Pre-scan under all rate at Highest channel 79

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	1.920	1.920	1.924

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	1.888	1.891	1.893
Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	1.927	1.930	1.932

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK,

6 General Information

6.1 Client Information

Applicant:	Power Idea Technology Limited.
Address of Applicant:	4th Floor, A Section, Languang Science&technology Xinx RD, Hi-Tech Industrial Park North, Nanshan, ShenZhen, China
Manufacturer:	Power Idea Technology Limited.
Address of Manufacturer:	4th Floor, A Section, Languang Science&technology Xinx RD, Hi-Tech Industrial Park North, Nanshan, ShenZhen, China

6.2 General Description of EUT

Product Name:	WCDMA Digital Mobile Phone
Mode No.(EUT):	RG310, RG310EX, RG320EX
Test Mode No.:	RG310
Trade Mark:	RugGear
EUT Supports Radios application:	Bluetooth V3.0+EDR
Power Supply:	Model: HKC0055010-2D Input: 100-240V~ 50/60Hz 0.2A Output: 5.0V \approx 1.0A
Battery	Li-ion 3.7V/3600mAh
Sample Received Date:	Jun. 30, 2016
Sample tested Date:	Jun. 30, 2016 to Jul. 18, 2016

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz						
Bluetooth Version:	3.0+EDR						
Modulation Type:	GFSK, π /4DQPSK, 8DPSK						
Number of Channel:	79						
Sample Type:	Portable production						
Test Power Grade:	max						
Test software of EUT	Engineer Mode						
Antenna Type:	Integral						
Antenna Gain:	1.8dBi						
Test voltage:	AC 120V/60Hz						
Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz

9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Hongwei Industrial Zone, Bao'an 70 District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

6.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1910

Centre Testing International Group Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories..

A2LA-Lab Cert. No. 3061.01

Centre Testing International Group Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 886427

Centre Testing International Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 886427.

IC-Registration No.: 7408A-2

The 3m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408A-2 .

IC-Registration No.: 7408B-1

The 10m Alternate Test Site of Centre Testing International Group Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 7408B-1.

NEMKO-Aut. No.: ELA503

Centre Testing International Group Co., Ltd. has been assessed the quality assurance system, the testing facilities, qualifications and testing practices of the relevant parts of the organization. The quality assurance system of the Laboratory has been validated against ISO/IEC 17025 or equivalent. The laboratory also fulfils the conditions described in Nemko Document NLA-10.

VCCI

The Radiation 3 & 10 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-4096.

Main Ports Conducted Interference Measurement of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-4563.

Telecommunication Ports Conducted Disturbance Measurement of

Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-2146.

The Radiation 3 meters site of Centre Testing International Group Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-758

6.7 Deviation from Standards

None.

6.8 Abnormalities from Standard Conditions

None.

6.9 Other Information Requested by the Customer

None.

6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Communication test set test set	Agilent	N4010A	MY51400230	04-01-2016	03-31-2017
Spectrum Analyzer	Keysight	N9010A	MY54510339	04-01-2016	03-31-2017
Signal Generator	Keysight	N5182B	MY53051549	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-12-2016	01-11-2017
DC Power	Keysight	E3642A	MY54436035	04-01-2016	03-31-2017
PC-1	Lenovo	R4960d	---	04-01-2016	03-31-2017
power meter & power sensor	R&S	OSP120	101374	04-01-2016	03-31-2017
RF control unit	JS Tonscend	JS0806-2	158060006	04-01-2016	03-31-2017
BT&WI-FI Automatic test software	JS Tonscend	JS1120-2	---	04-01-2016	03-31-2017

Conducted disturbance Test					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	06-16-2016	06-15-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
LISN	R&S	ENV216	100098	06-16-2016	06-15-2017
LISN	schwarzbeck	NNLK8121	8121-529	06-16-2016	06-15-2017
Voltage Probe	R&S	ESH2-Z3	--	07-09-2014	07-07-2017
Current Probe	R&S	EZ17	100106	06-16-2016	06-15-2017
ISN	TESEQ GmbH	ISN T800	30297	01-29-2015	01-27-2017

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-05-2016	06-05-2019
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-484	05-23-2016	05-22-2017
Microwave Preamplifier	Agilent	8449B	3008A02425	02-04-2016	02-03-2017
Horn Antenna	ETS-LINDGREN	3117	00057410	06-30-2015	06-28-2018
Horn Antenna	A.H.SYSTEMS	SAS-574	374	06-30-2015	06-28-2018
Loop Antenna	ETS	6502	00071730	07-30-2015	07-28-2017
Spectrum Analyzer	R&S	FSP40	100416	06-16-2016	06-15-2017
Receiver	R&S	ESCI	100435	06-16-2016	06-15-2017
Multi device Controller	maturo	NCD/070/10711 112	---	01-12-2016	01-11-2017
LISN	schwarzbeck	NNBM8125	81251547	06-16-2016	06-15-2017
LISN	schwarzbeck	NNBM8125	81251548	06-16-2016	06-15-2017
Signal Generator	Agilent	E4438C	MY45095744	04-01-2016	03-31-2017
Signal Generator	Keysight	E8257D	MY53401106	04-01-2016	03-31-2017
Temperature/ Humidity Indicator	TAYLOR	1451	1905	04-27-2016	04-26-2017
Communication test set	Agilent	E5515C	GB47050534	04-01-2016	03-31-2017
Cable line	Fulai(7M)	SF106	5219/6A	01-12-2016	01-11-2017
Cable line	Fulai(6M)	SF106	5220/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5216/6A	01-12-2016	01-11-2017
Cable line	Fulai(3M)	SF106	5217/6A	01-12-2016	01-11-2017
Communication test set	R&S	CMW500	152394	04-01-2016	03-31-2017
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-12-2016	01-11-2017
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA09C L12-0395-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX01CA08C L12-0393-001	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA04C L12-0396-002	---	01-12-2016	01-11-2017
band rejection filter	Sinoscite	FL5CX02CA03C L12-0394-001	---	01-12-2016	01-11-2017

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C (2015)	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)




Appendix A): 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	0.9559	0.87874	PASS	Peak detector
GFSK	MCH	0.9547	0.87398	PASS	
GFSK	HCH	0.9646	0.88861	PASS	
$\pi/4$ DQPSK	LCH	1.279	1.1645	PASS	
$\pi/4$ DQPSK	MCH	1.277	1.1777	PASS	
$\pi/4$ DQPSK	HCH	1.285	1.1699	PASS	
8DPSK	LCH	1.277	1.1747	PASS	
8DPSK	MCH	1.274	1.1669	PASS	
8DPSK	HCH	1.277	1.1671	PASS	

Test Graph

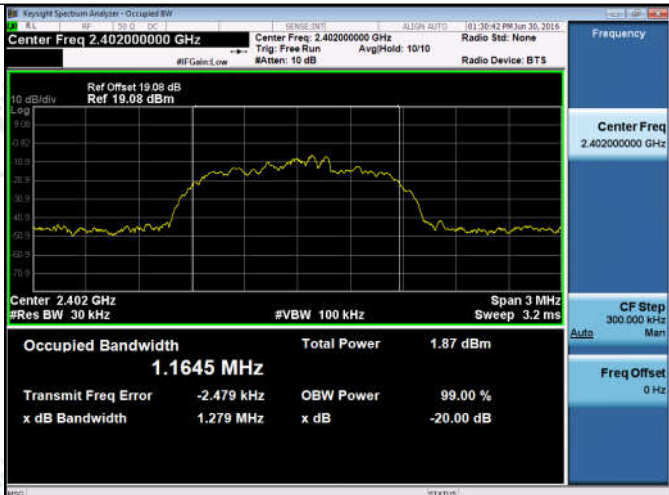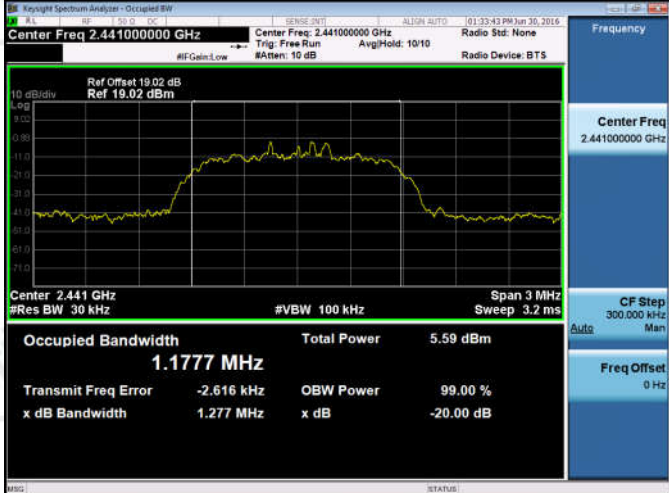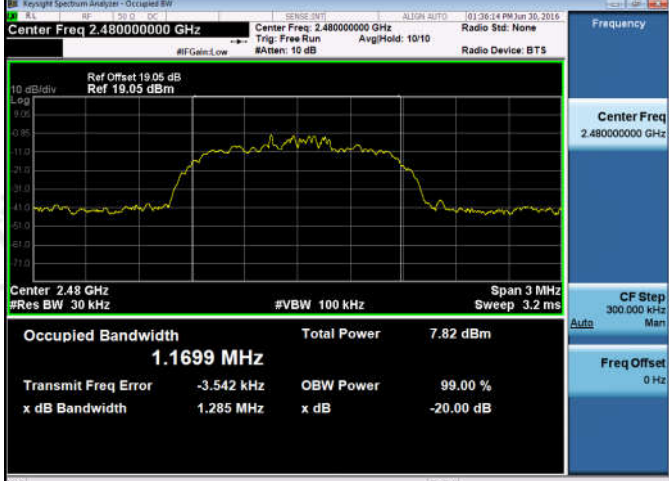

<p>$\pi/4$DQPSK/LCH</p>	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1645 MHz Total Power 1.87 dBm</p> <p>Transmit Freq Error -2.479 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.279 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/MCH</p>	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1777 MHz Total Power 5.59 dBm</p> <p>Transmit Freq Error -2.616 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.277 MHz x dB -20.00 dB</p>
<p>$\pi/4$DQPSK/HCH</p>	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1699 MHz Total Power 7.82 dBm</p> <p>Transmit Freq Error -3.542 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.285 MHz x dB -20.00 dB</p>

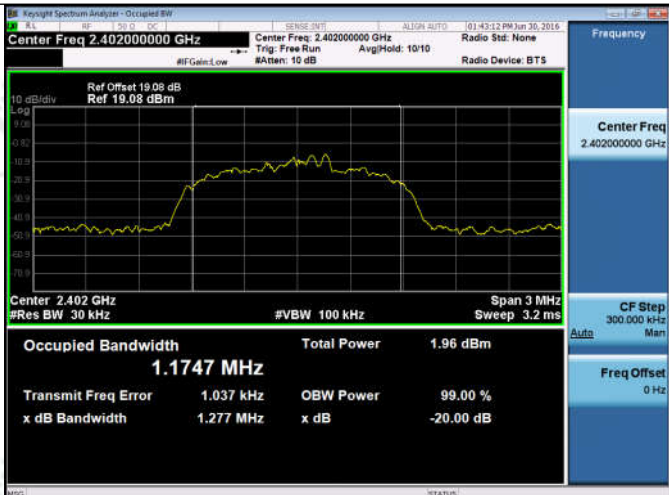
8DPSK/LCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1747 MHz Total Power 1.96 dBm</p> <p>Transmit Freq Error 1.037 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.277 MHz x dB -20.00 dB</p>
8DPSK/MCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1669 MHz Total Power 6.82 dBm</p> <p>Transmit Freq Error -1.770 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.274 MHz x dB -20.00 dB</p>
8DPSK/HCH	 <p>Keyight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1671 MHz Total Power 8.59 dBm</p> <p>Transmit Freq Error 358 Hz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.277 MHz x dB -20.00 dB</p>




Appendix B): Carrier Frequency Separation

Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	0.950	PASS
GFSK	MCH	0.912	PASS
GFSK	HCH	0.912	PASS
$\pi/4$ DQPSK	LCH	0.910	PASS
$\pi/4$ DQPSK	MCH	0.994	PASS
$\pi/4$ DQPSK	HCH	1.030	PASS
8DPSK	LCH	1.082	PASS
8DPSK	MCH	1.016	PASS
8DPSK	HCH	1.008	PASS

Test Graph

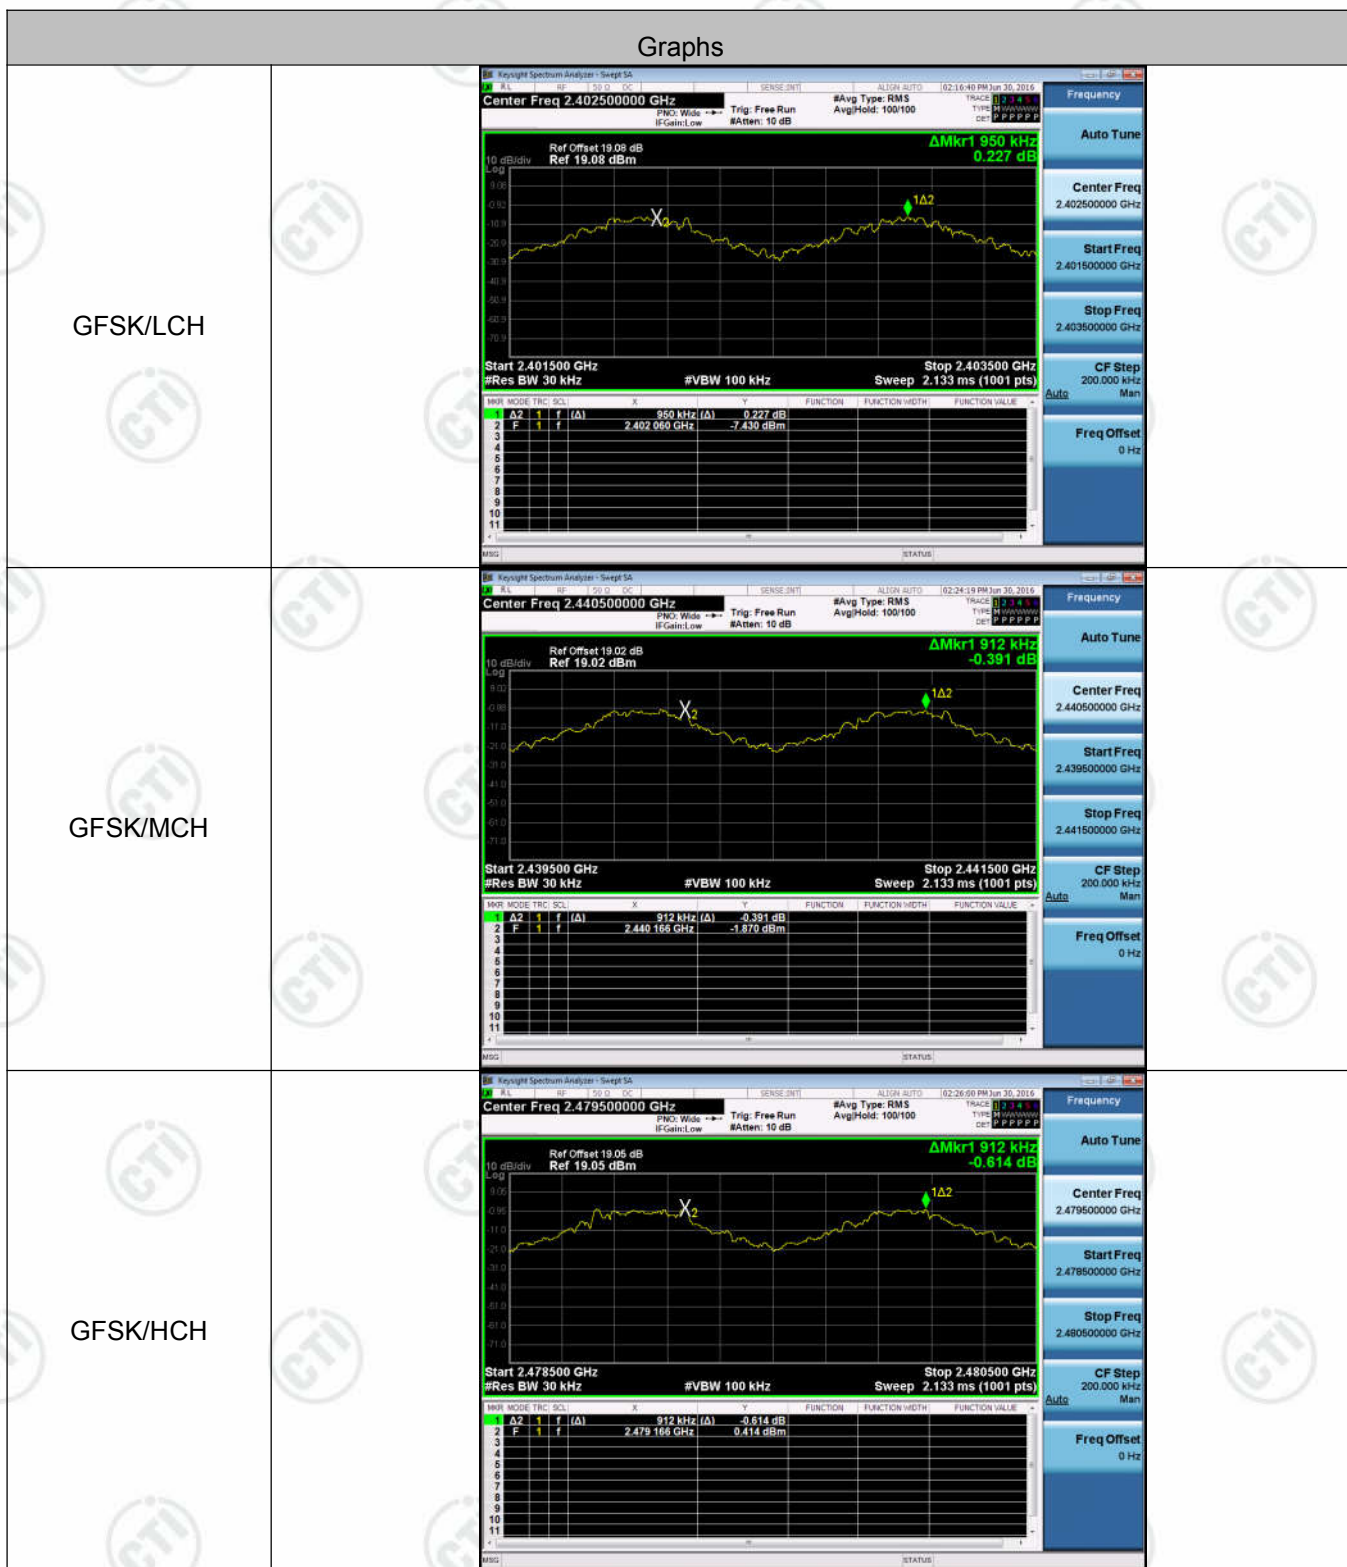
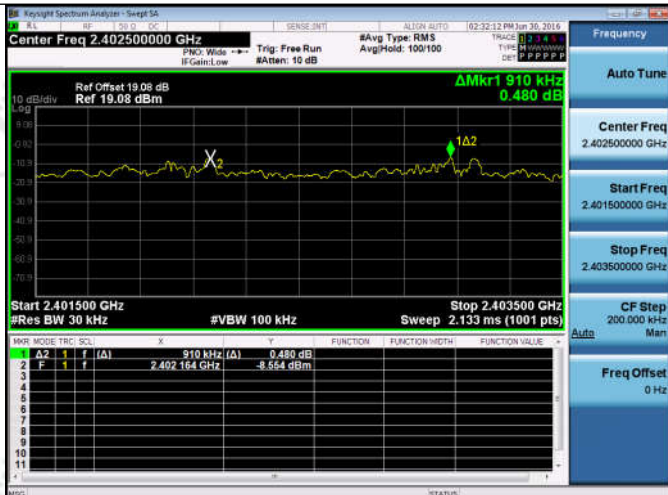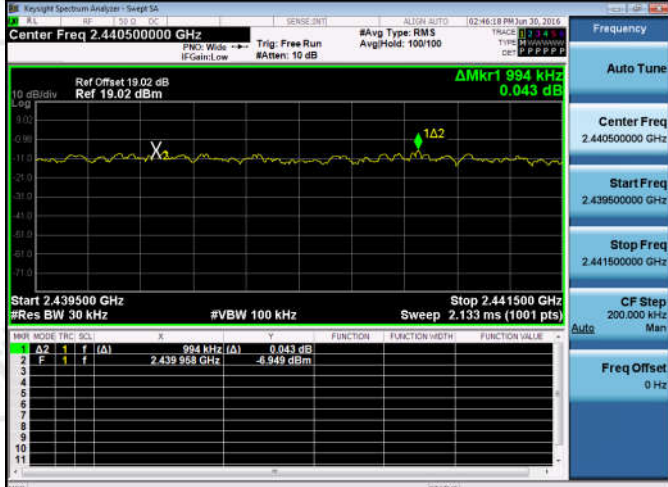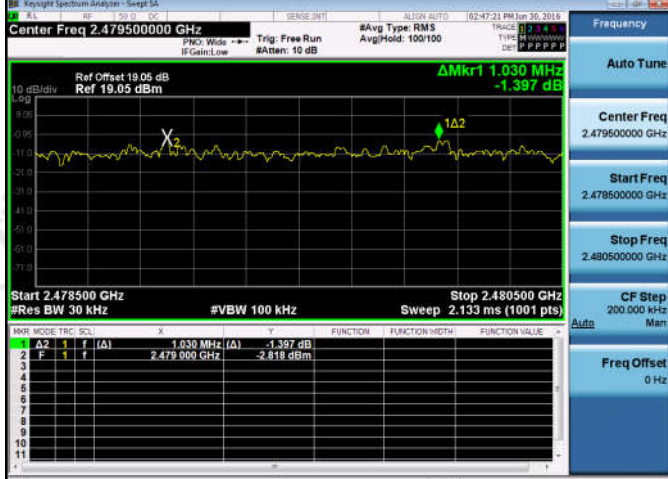
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

8DPSK/LCH	<p>Key parameters for 8DPSK/LCH:</p> <ul style="list-style-type: none"> Center Freq: 2.402500000 GHz Ref Offset: 19.08 dB, Ref: 19.08 dBm Delta Mkr1: 1.082 MHz, 0.634 dB Start: 2.401500 GHz, Stop: 2.403500 GHz Res BW: 30 kHz, #VBW: 100 kHz, Sweep: 2.133 ms (1001 pts)
8DPSK/MCH	<p>Key parameters for 8DPSK/MCH:</p> <ul style="list-style-type: none"> Center Freq: 2.440500000 GHz Ref Offset: 19.02 dB, Ref: 19.02 dBm Delta Mkr1: 1.016 MHz, 0.198 dB Start: 2.439500 GHz, Stop: 2.441500 GHz Res BW: 30 kHz, #VBW: 100 kHz, Sweep: 2.133 ms (1001 pts)
8DPSK/HCH	<p>Key parameters for 8DPSK/HCH:</p> <ul style="list-style-type: none"> Center Freq: 2.479500000 GHz Ref Offset: 19.05 dB, Ref: 19.05 dBm Delta Mkr1: 1.008 MHz, -1.456 dB Start: 2.478500 GHz, Stop: 2.480500 GHz Res BW: 30 kHz, #VBW: 100 kHz, Sweep: 2.133 ms (1001 pts)


Appendix C): Dwell Time

Result Table


Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.3699	320	0.118	0.30	PASS
GFSK	DH1	MCH	0.3699	320	0.118	0.30	PASS
GFSK	DH1	HCH	0.36987	320	0.118	0.30	PASS
GFSK	DH3	LCH	1.624	160	0.260	0.43	PASS
GFSK	DH3	MCH	1.624	160	0.260	0.43	PASS
GFSK	DH3	HCH	1.6241	160	0.260	0.43	PASS
GFSK	DH5	LCH	2.873	106.7	0.306	0.46	PASS
GFSK	DH5	MCH	2.871	106.7	0.306	0.46	PASS
GFSK	DH5	HCH	2.873	106.7	0.306	0.46	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph

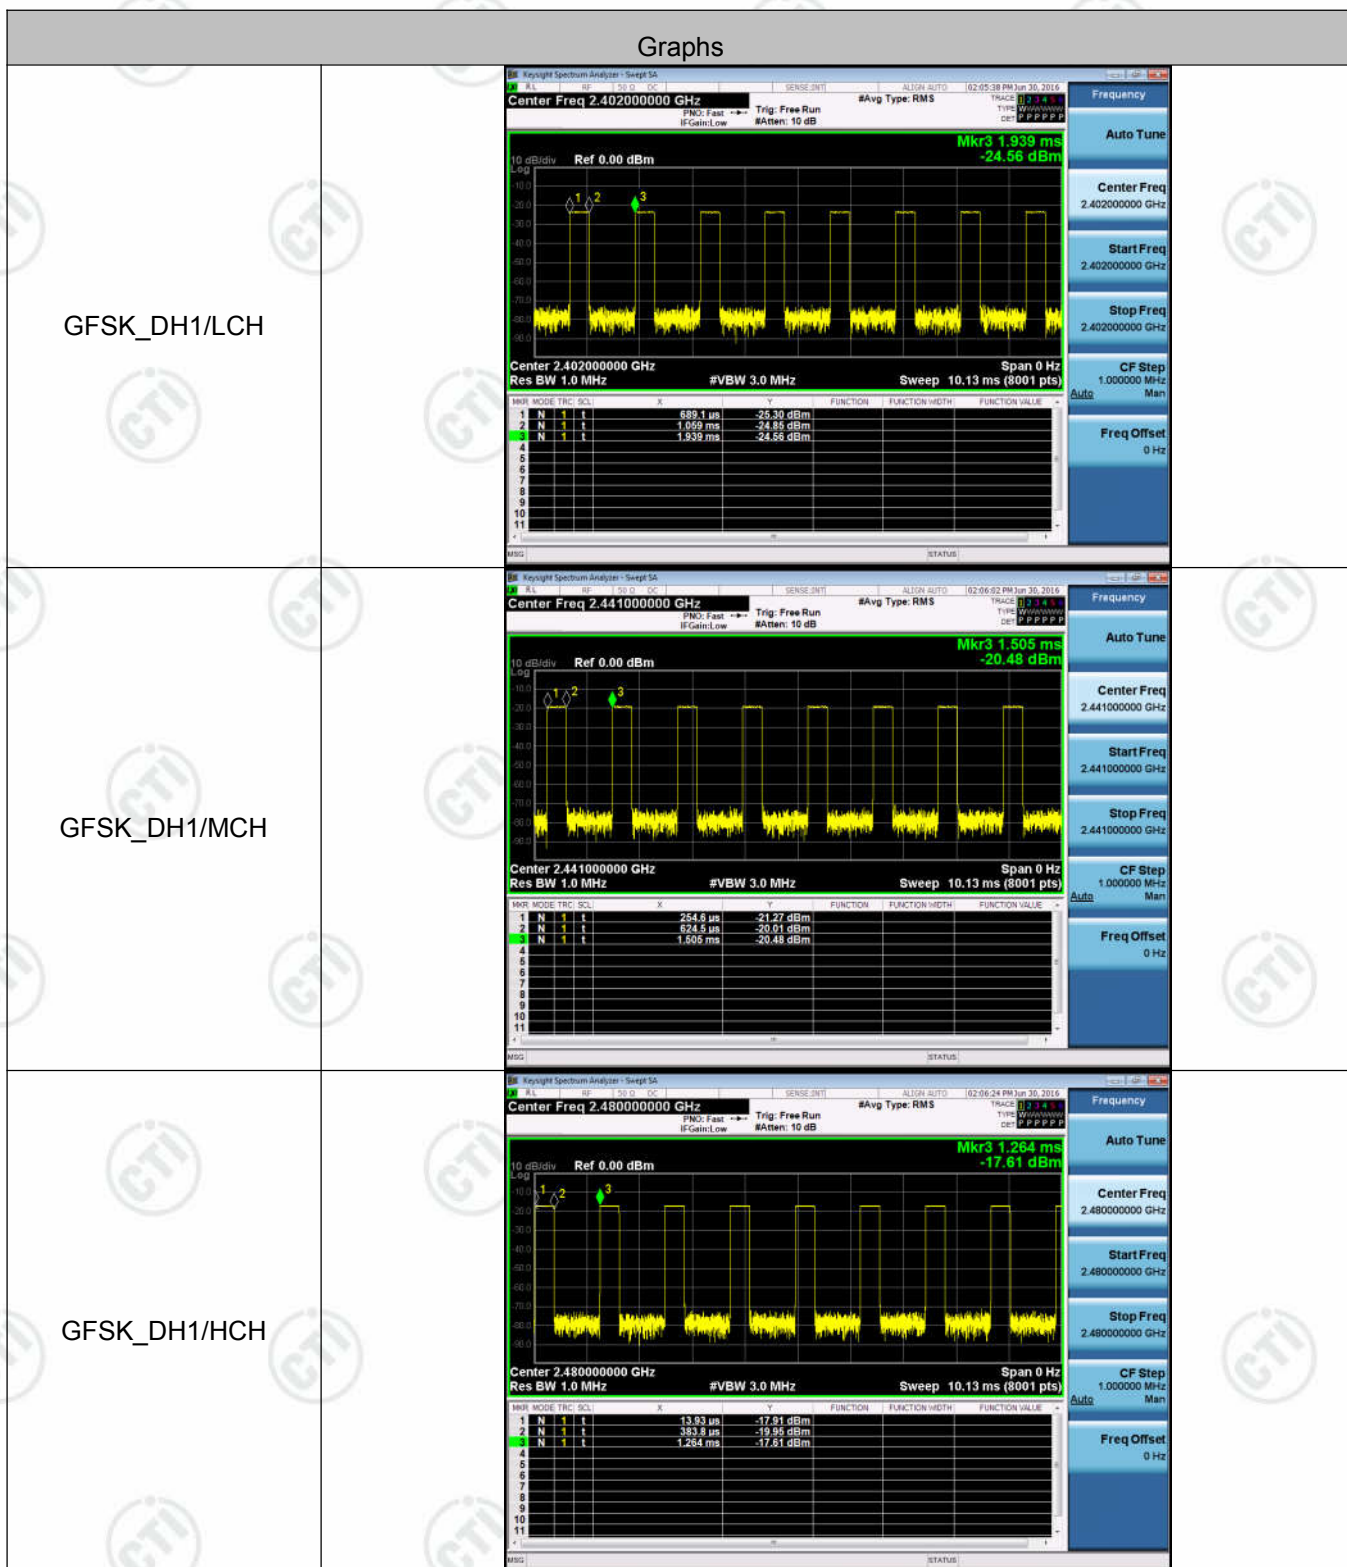



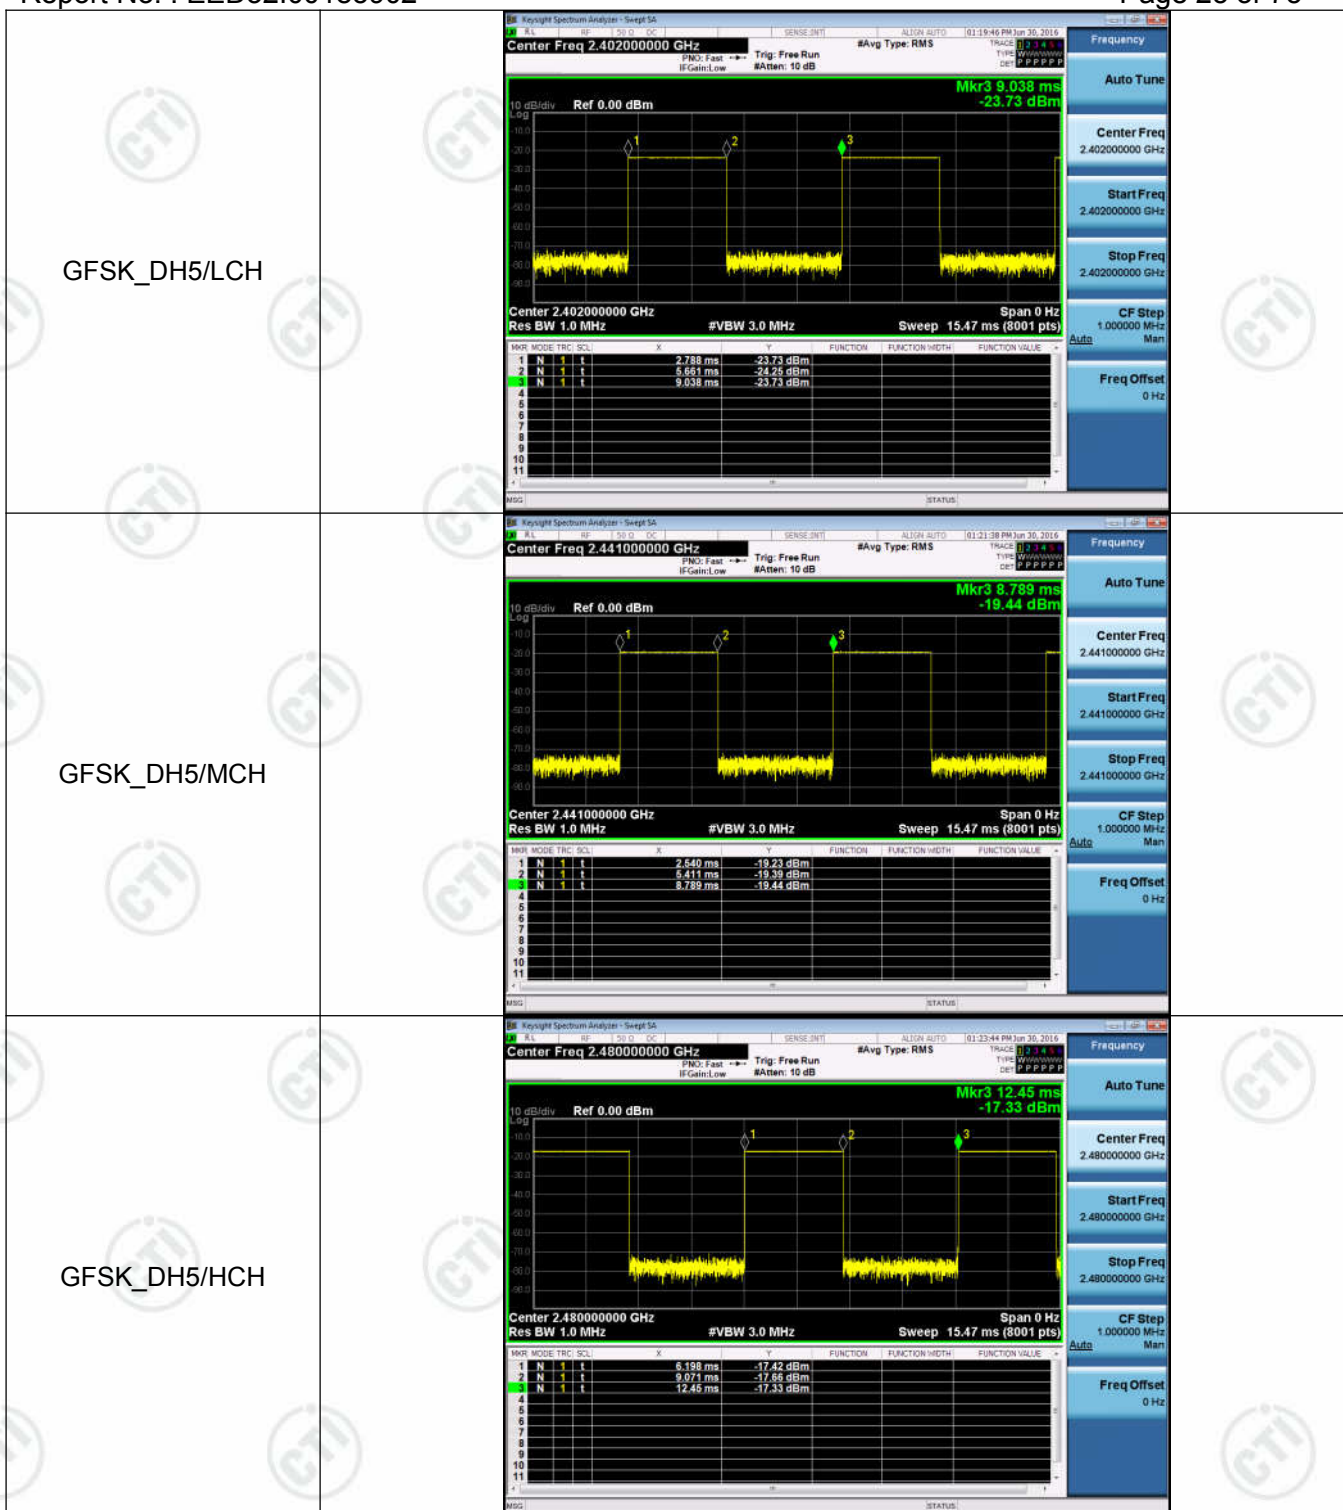


Appendix D): Hopping Channel Number

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

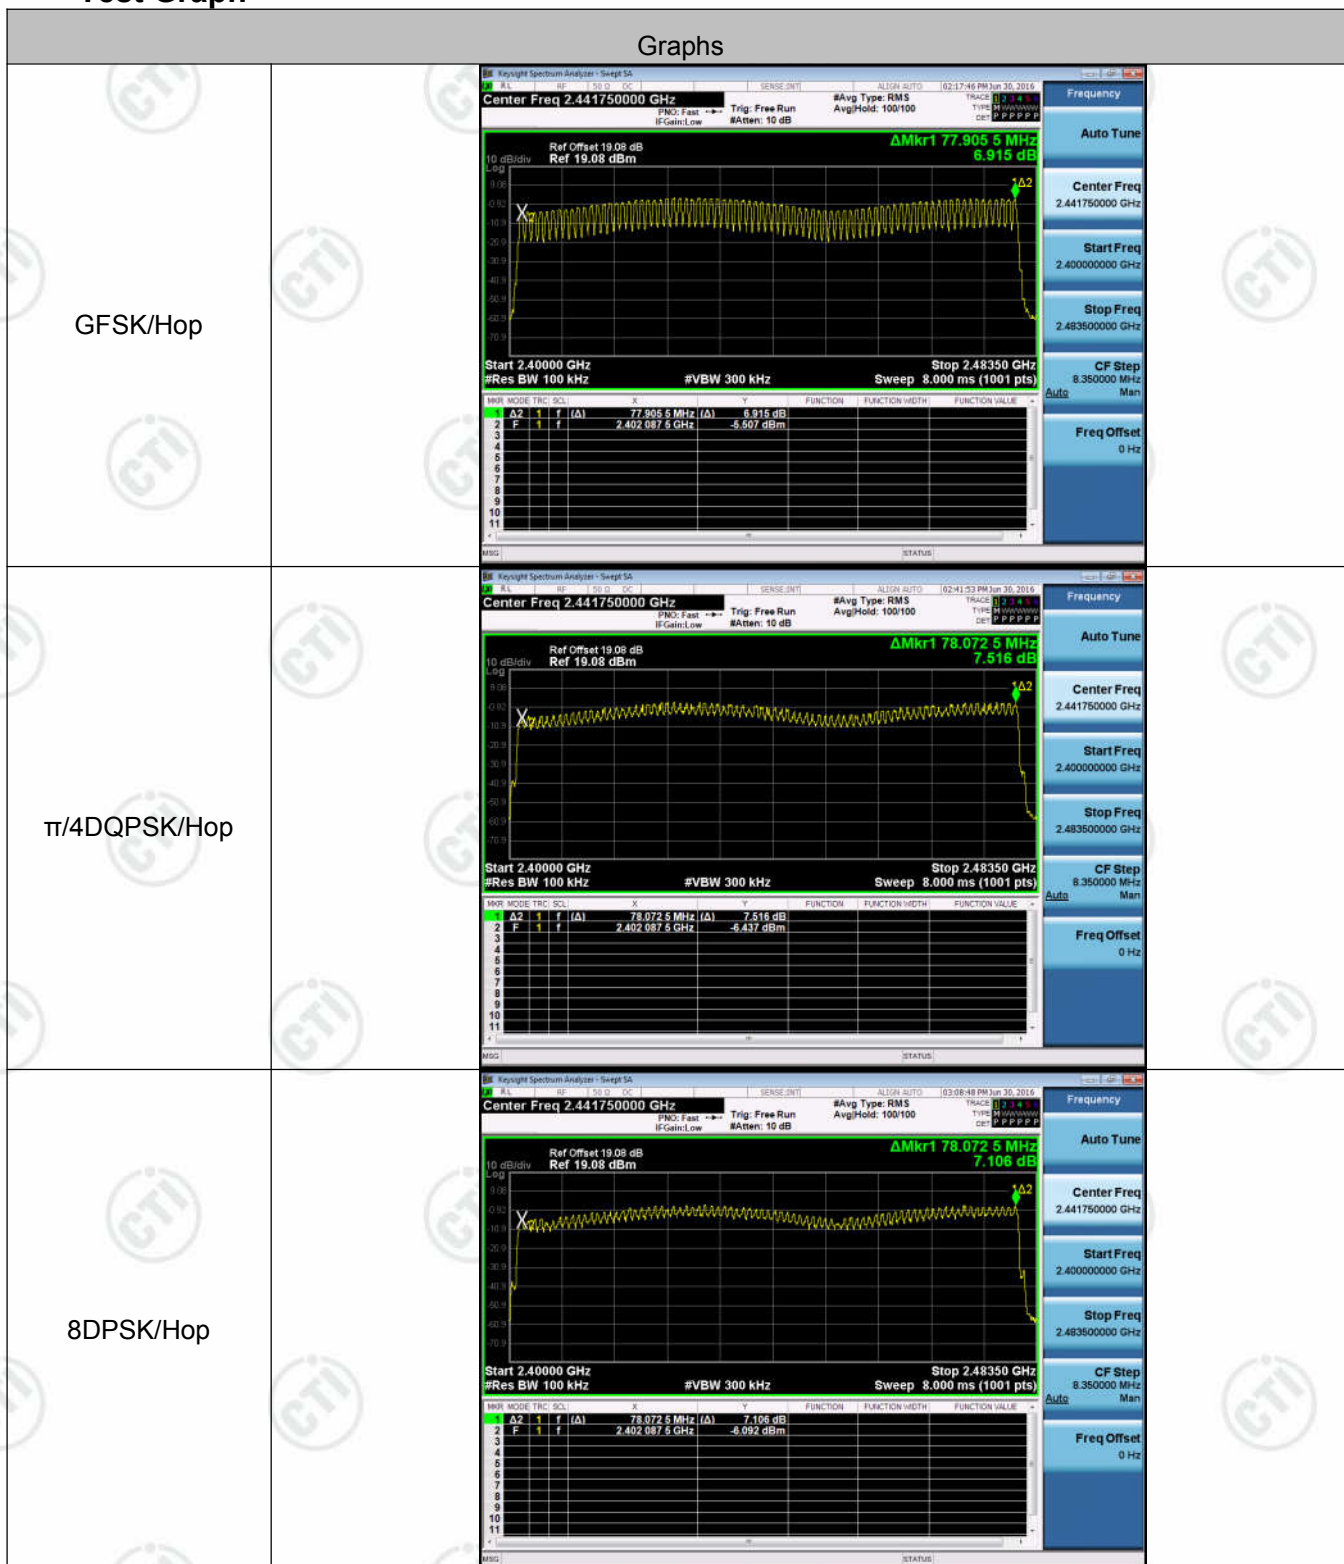





Appendix E): Conducted Peak Output Power




Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-4.375	PASS
GFSK	MCH	0.027	PASS
GFSK	HCH	1.924	PASS
$\pi/4$ DQPSK	LCH	-4.378	PASS
$\pi/4$ DQPSK	MCH	-0.004	PASS
$\pi/4$ DQPSK	HCH	1.893	PASS
8DPSK	LCH	-4.337	PASS
8DPSK	MCH	0.048	PASS
8DPSK	HCH	1.932	PASS

Test Graph

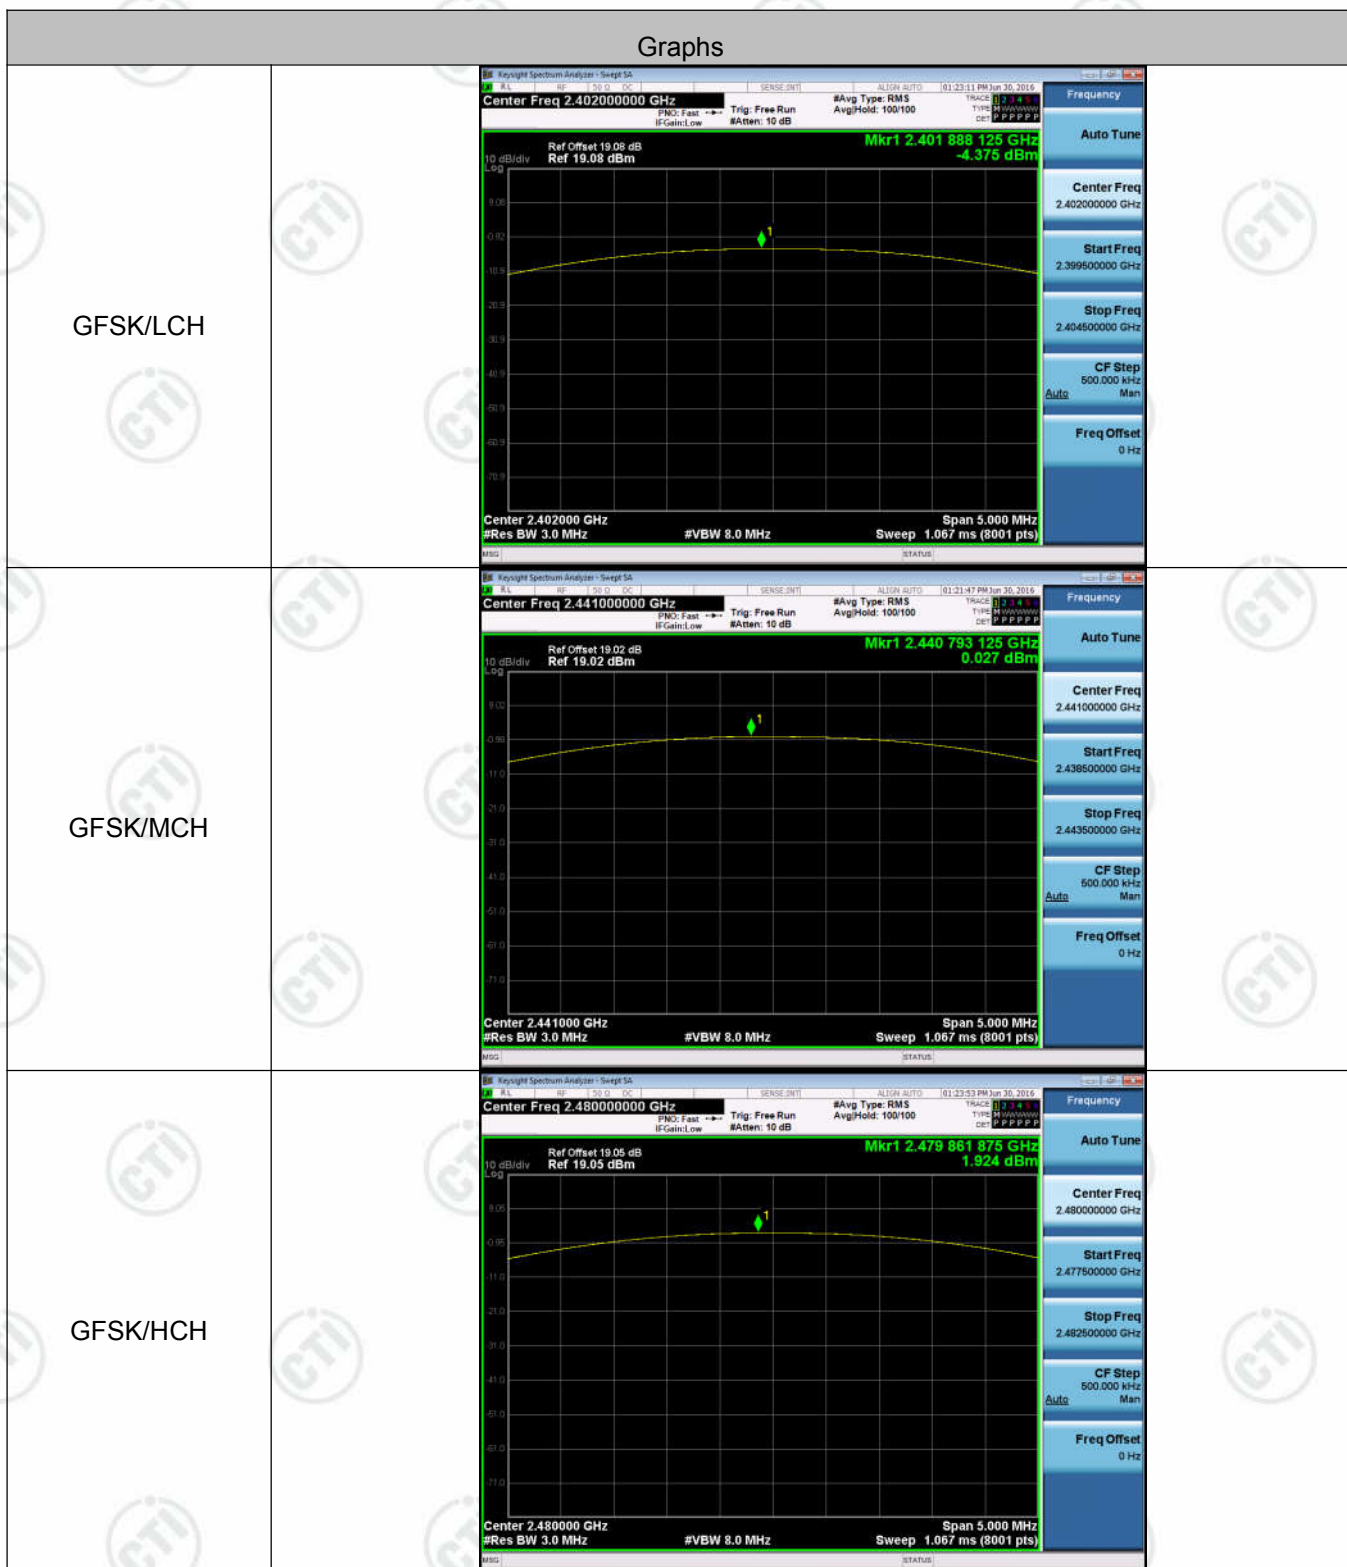
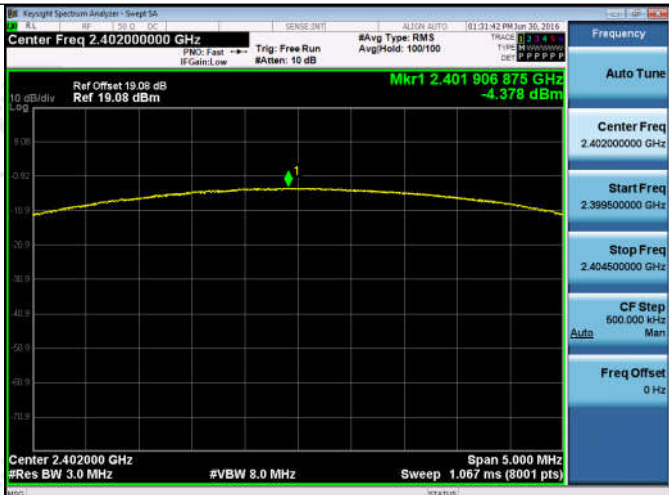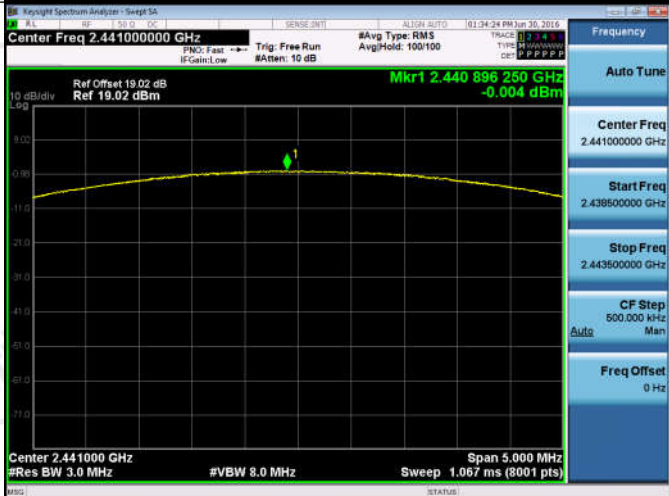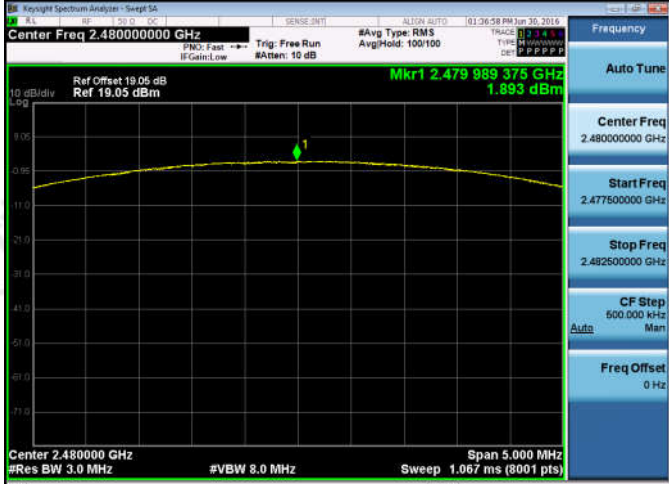
<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

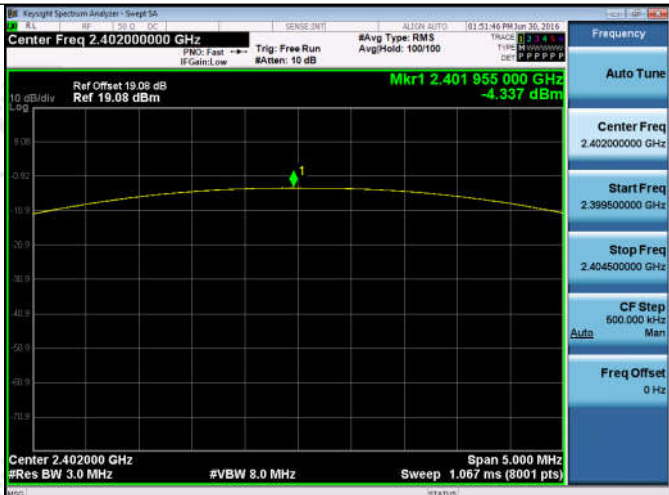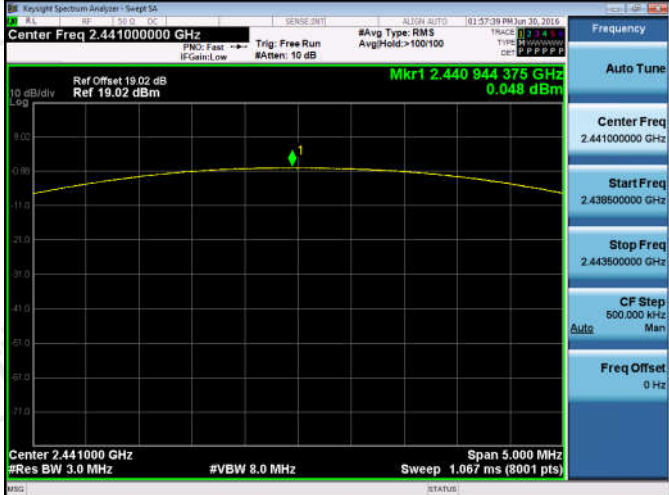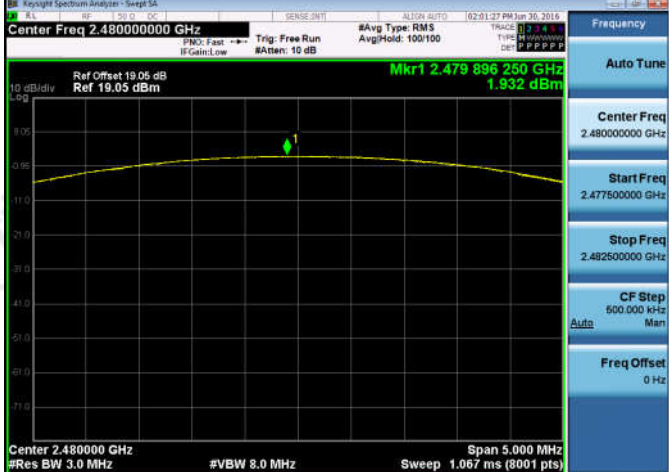
8DPSK/LCH	
8DPSK/MCH	
8DPSK/HCH	




Appendix F): Band-edge for RF Conducted Emissions




Result Table




Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-4.676	Off	-60.383	-24.68	PASS
			-4.570	On	-60.293	-24.57	PASS
GFSK	HCH	2480	1.660	Off	-59.624	-18.34	PASS
			1.860	On	-59.238	-18.14	PASS
$\pi/4$ DQPSK	LCH	2402	-4.698	Off	-61.099	-24.70	PASS
			-5.355	On	-59.761	-25.36	PASS
$\pi/4$ DQPSK	HCH	2480	-0.441	Off	-57.637	-20.44	PASS
			1.210	On	-58.386	-18.79	PASS
8DPSK	LCH	2402	-6.533	Off	-60.554	-26.53	PASS
			-5.164	On	-59.623	-25.16	PASS
8DPSK	HCH	2480	0.880	Off	-59.078	-19.12	PASS
			1.442	On	-58.963	-18.56	PASS

Test Graph

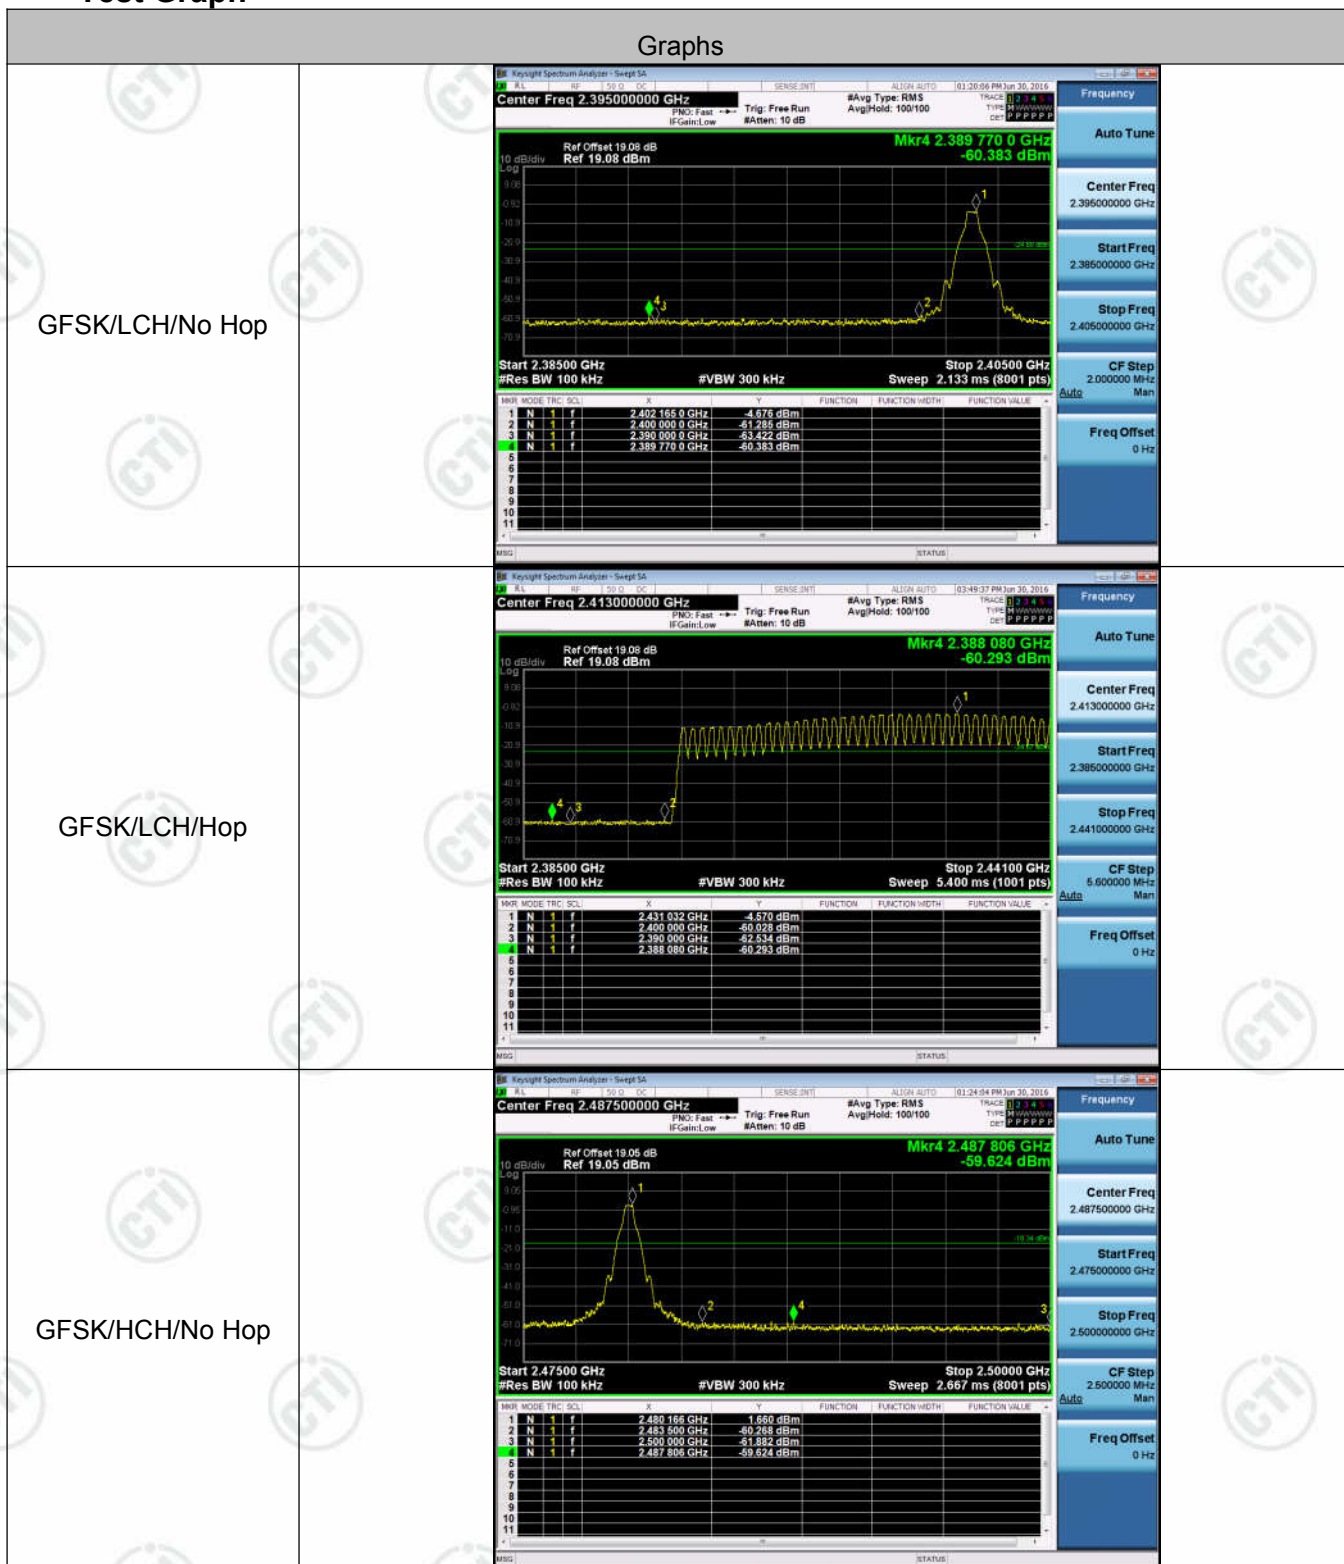

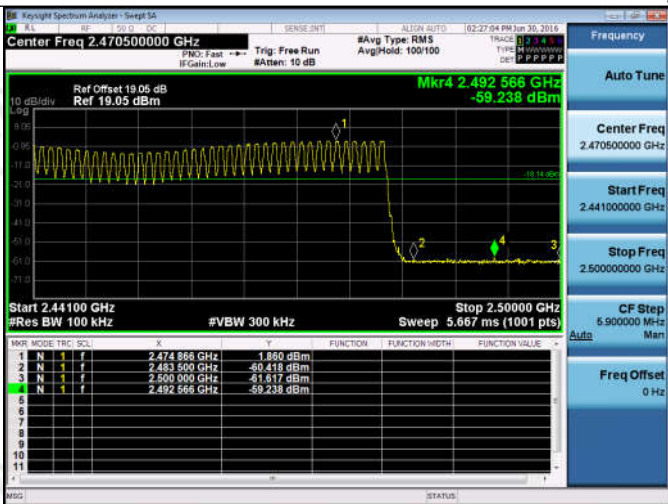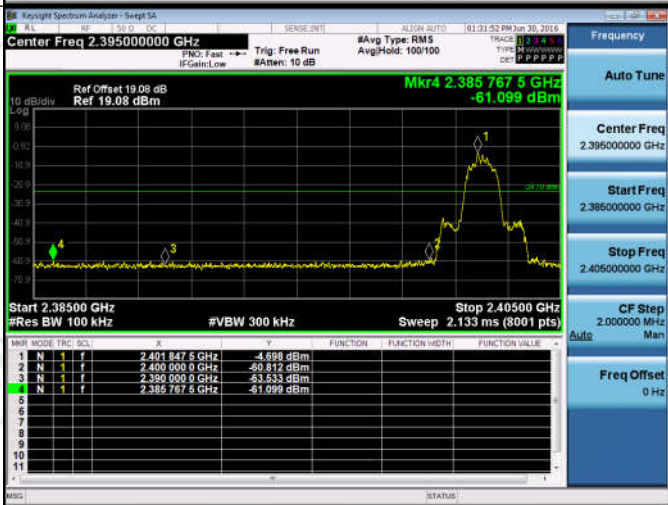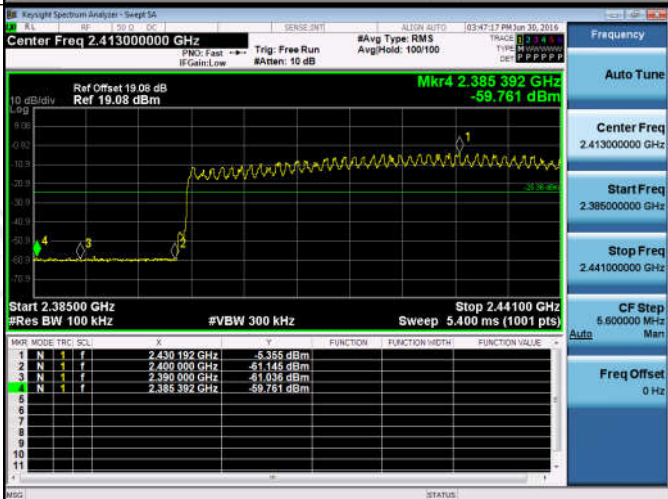GFSK/HCH/Hop	 <p>Center Freq 2.470500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Mkr4 2.492 566 GHz -69.238 dBm</p> <p>Start 2.44100 GHz #Res BW 100 kHz</p> <p>Stop 2.50000 GHz #VBW 300 kHz Sweep 5.667 ms (1001 pts)</p> <table><tr><th>N</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>M</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.474 868 GHz</td><td>-69.238 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-60.419 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-61.817 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.492 566 GHz</td><td>-69.238 dBm</td><td></td><td></td><td></td></tr></table>	N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.474 868 GHz	-69.238 dBm				2	N	1	f	2.483 500 GHz	-60.419 dBm				3	N	1	f	2.500 000 GHz	-61.817 dBm				4	N	1	f	2.492 566 GHz	-69.238 dBm			
N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.474 868 GHz	-69.238 dBm																																									
2	N	1	f	2.483 500 GHz	-60.419 dBm																																									
3	N	1	f	2.500 000 GHz	-61.817 dBm																																									
4	N	1	f	2.492 566 GHz	-69.238 dBm																																									
$\pi/4$ DQPSK/LCH/No Hop	 <p>Center Freq 2.395000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Mkr4 2.385 767 5 GHz -61.099 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz</p> <p>Stop 2.40500 GHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table><tr><th>N</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>M</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 847 5 GHz</td><td>-61.099 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-61.812 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-61.533 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.385 767 5 GHz</td><td>-61.099 dBm</td><td></td><td></td><td></td></tr></table>	N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 847 5 GHz	-61.099 dBm				2	N	1	f	2.400 000 0 GHz	-61.812 dBm				3	N	1	f	2.390 000 0 GHz	-61.533 dBm				4	N	1	f	2.385 767 5 GHz	-61.099 dBm			
N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 847 5 GHz	-61.099 dBm																																									
2	N	1	f	2.400 000 0 GHz	-61.812 dBm																																									
3	N	1	f	2.390 000 0 GHz	-61.533 dBm																																									
4	N	1	f	2.385 767 5 GHz	-61.099 dBm																																									
$\pi/4$ DQPSK/LCH/Hop	 <p>Center Freq 2.413000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Mkr4 2.385 392 GHz -69.761 dBm</p> <p>Start 2.38500 GHz #Res BW 100 kHz</p> <p>Stop 2.44100 GHz #VBW 300 kHz Sweep 5.400 ms (1001 pts)</p> <table><tr><th>N</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>M</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.430 192 GHz</td><td>-61.355 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-61.145 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-61.036 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.385 392 GHz</td><td>-69.761 dBm</td><td></td><td></td><td></td></tr></table>	N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 192 GHz	-61.355 dBm				2	N	1	f	2.400 000 GHz	-61.145 dBm				3	N	1	f	2.390 000 GHz	-61.036 dBm				4	N	1	f	2.385 392 GHz	-69.761 dBm			
N	MODE	TRC	SCL	F	M	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.430 192 GHz	-61.355 dBm																																									
2	N	1	f	2.400 000 GHz	-61.145 dBm																																									
3	N	1	f	2.390 000 GHz	-61.036 dBm																																									
4	N	1	f	2.385 392 GHz	-69.761 dBm																																									
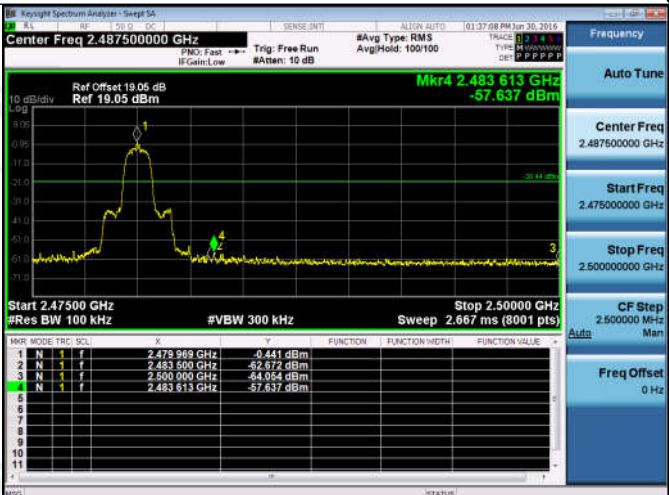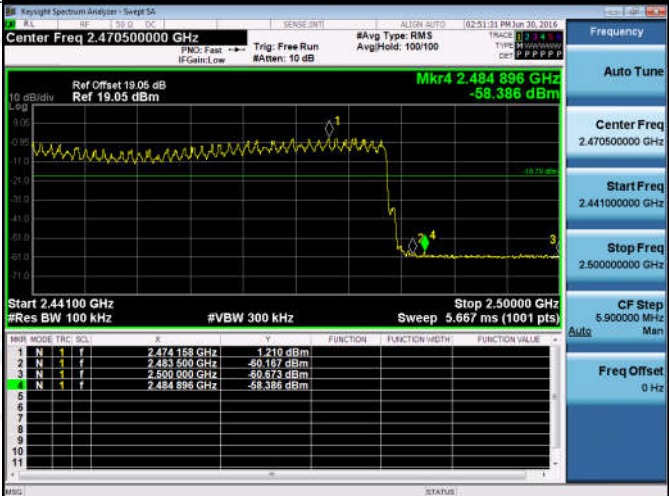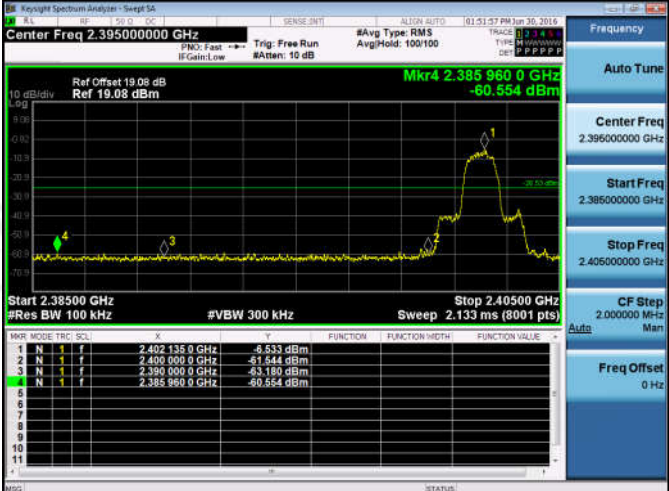
<p>$\pi/4$DQPSK/HCH/No Hop</p>	
<p>$\pi/4$DQPSK/HCH/Hop</p>	
<p>8DPSK/LCH/No Hop</p>	

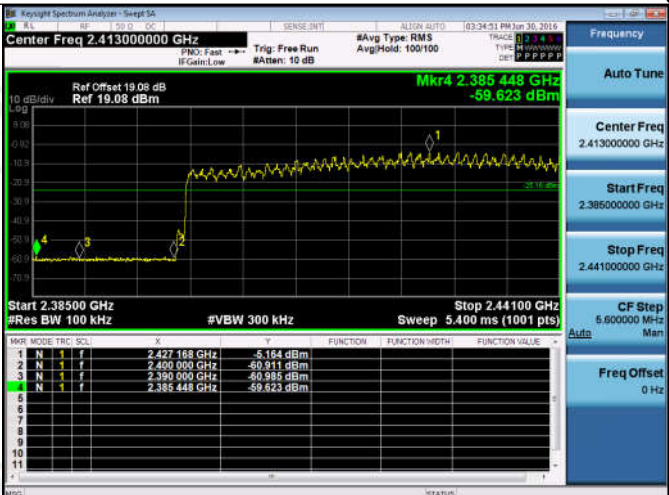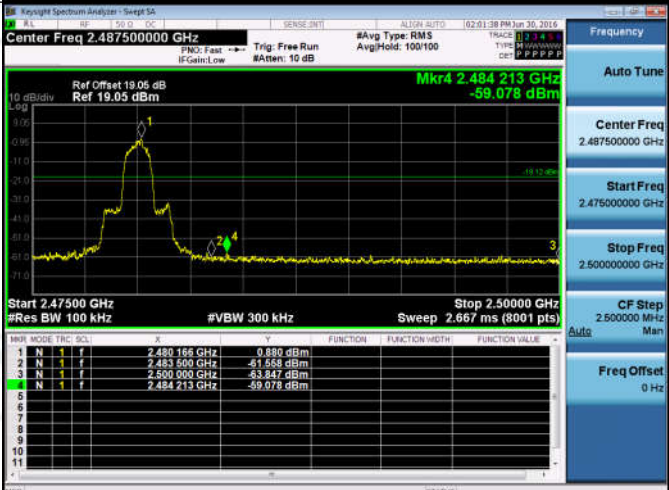8DPSK/LCH/Hop	
8DPSK/HCH/No Hop	
8DPSK/HCH/Hop	

Appendix G): RF Conducted Spurious Emissions


Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-5.121	<Limit	PASS
GFSK	MCH	-0.158	<Limit	PASS
GFSK	HCH	1.764	<Limit	PASS
$\pi/4$ DQPSK	LCH	-5.529	<Limit	PASS
$\pi/4$ DQPSK	MCH	-0.358	<Limit	PASS
$\pi/4$ DQPSK	HCH	0.701	<Limit	PASS
8DPSK	LCH	-5.372	<Limit	PASS
8DPSK	MCH	-0.219	<Limit	PASS
8DPSK	HCH	1.137	<Limit	PASS


Test Graph




GFSK_MCH_Graphs

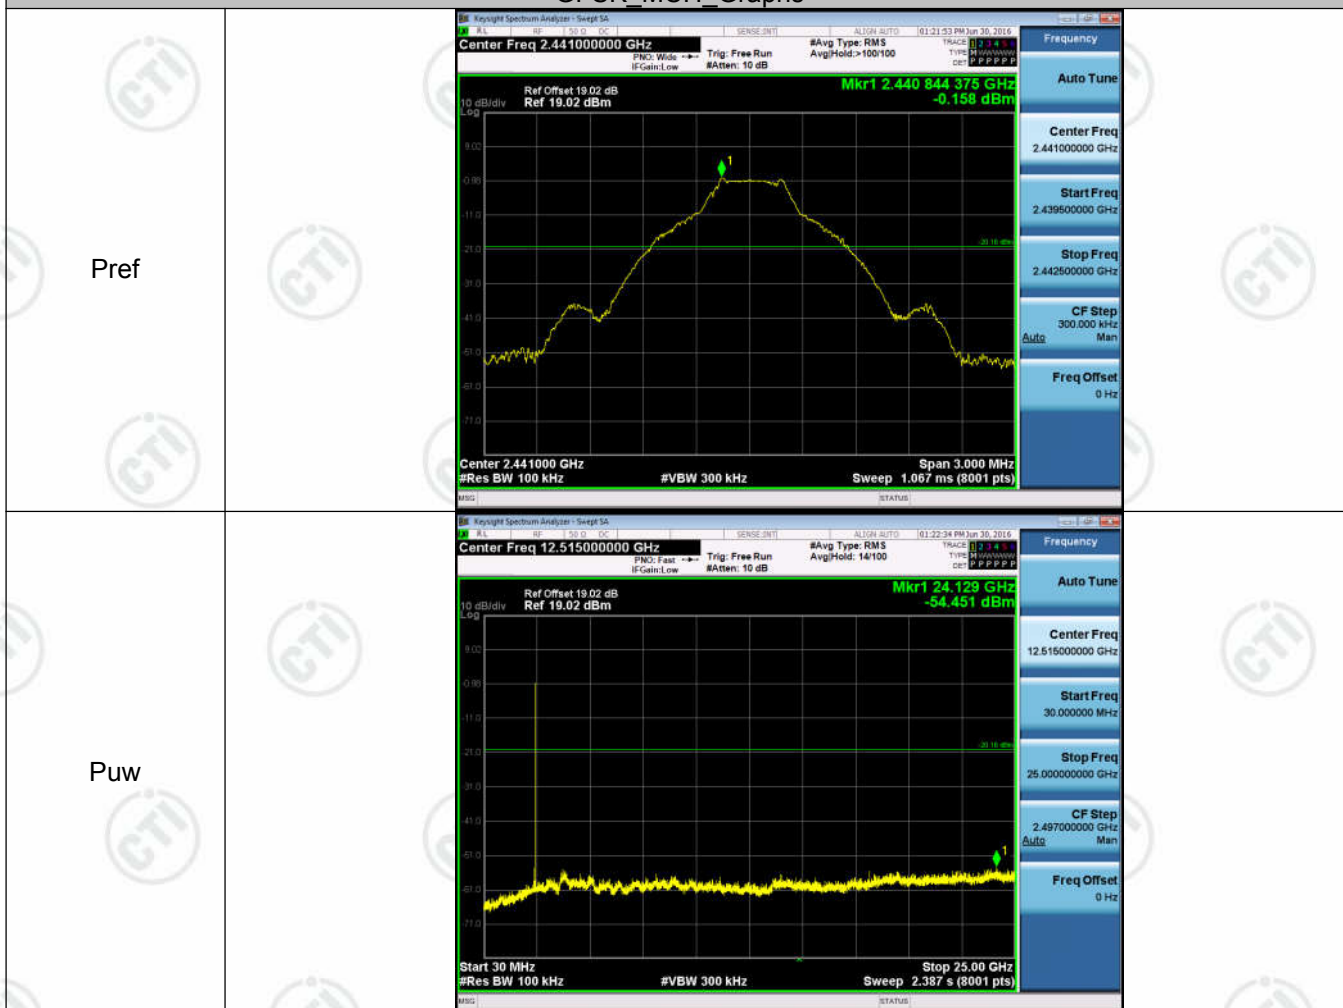

GFSK_HCH_Graphs

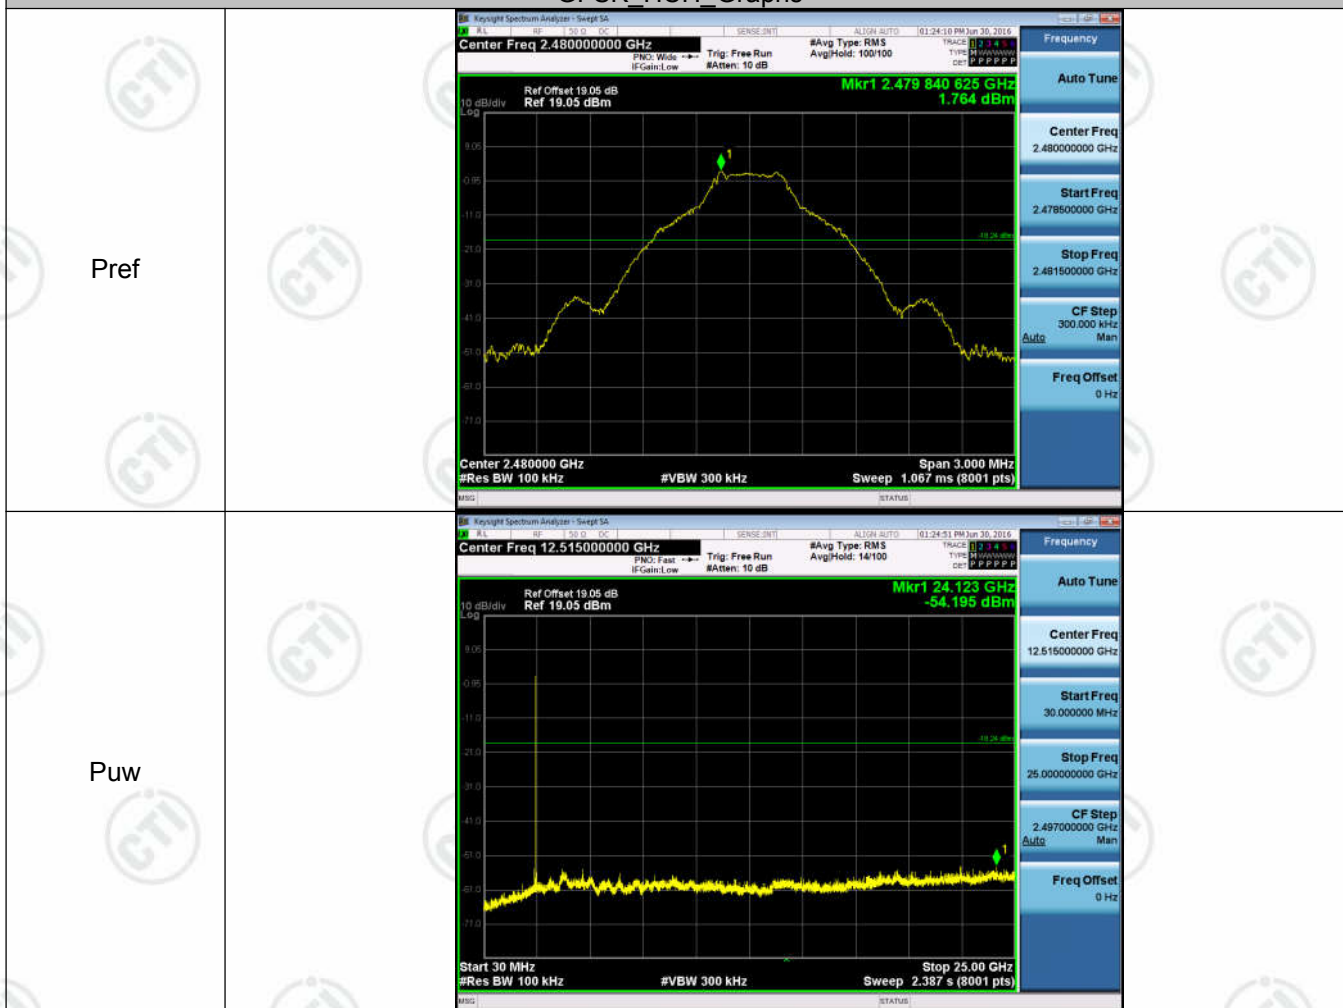


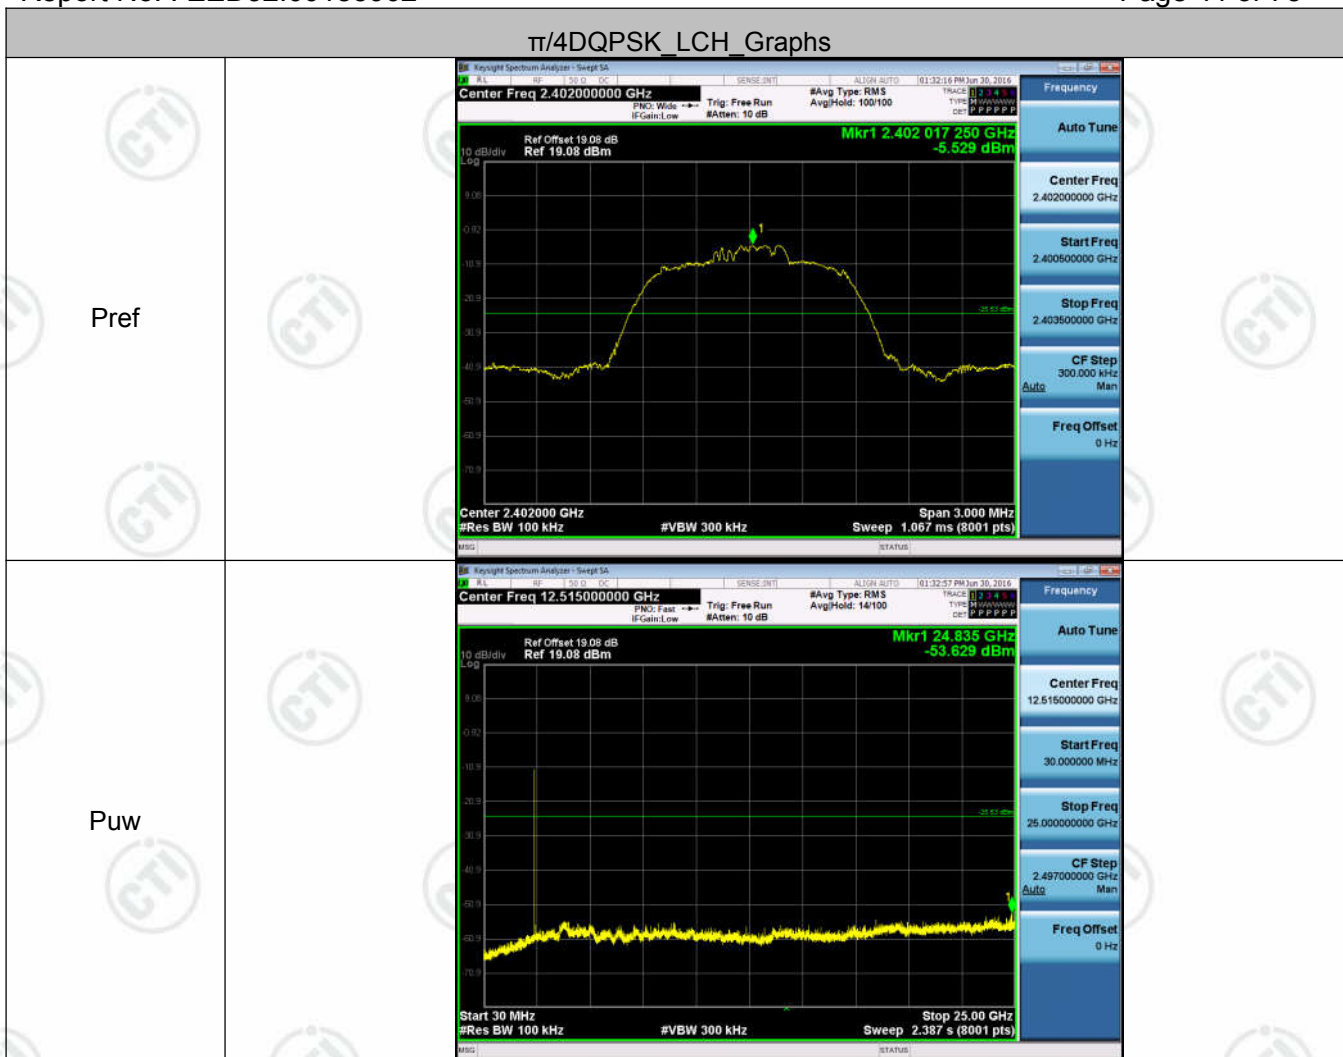






8DPSK_LCH_Graphs

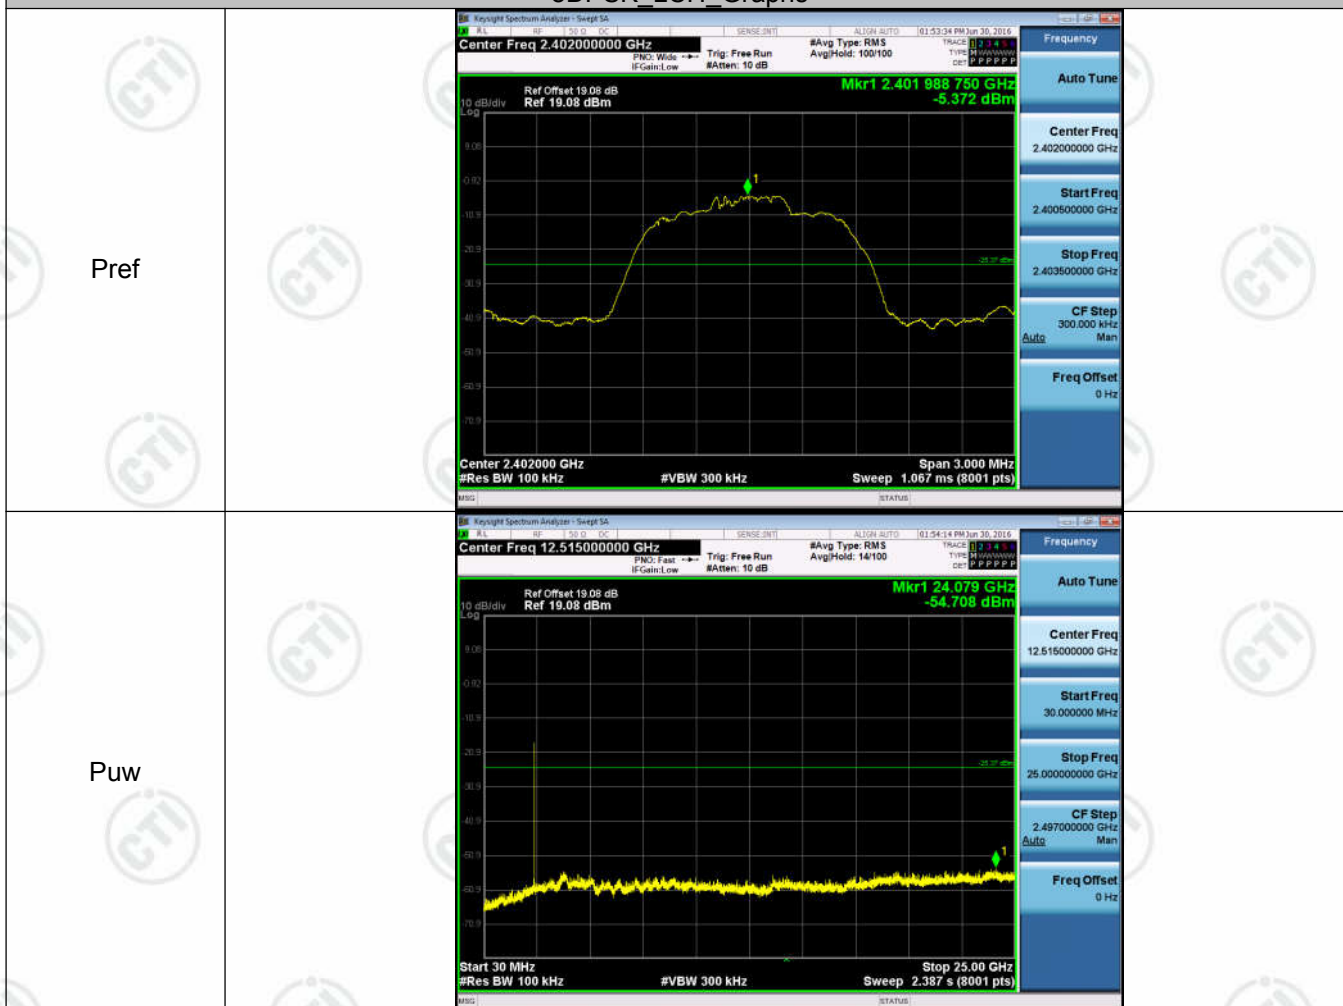



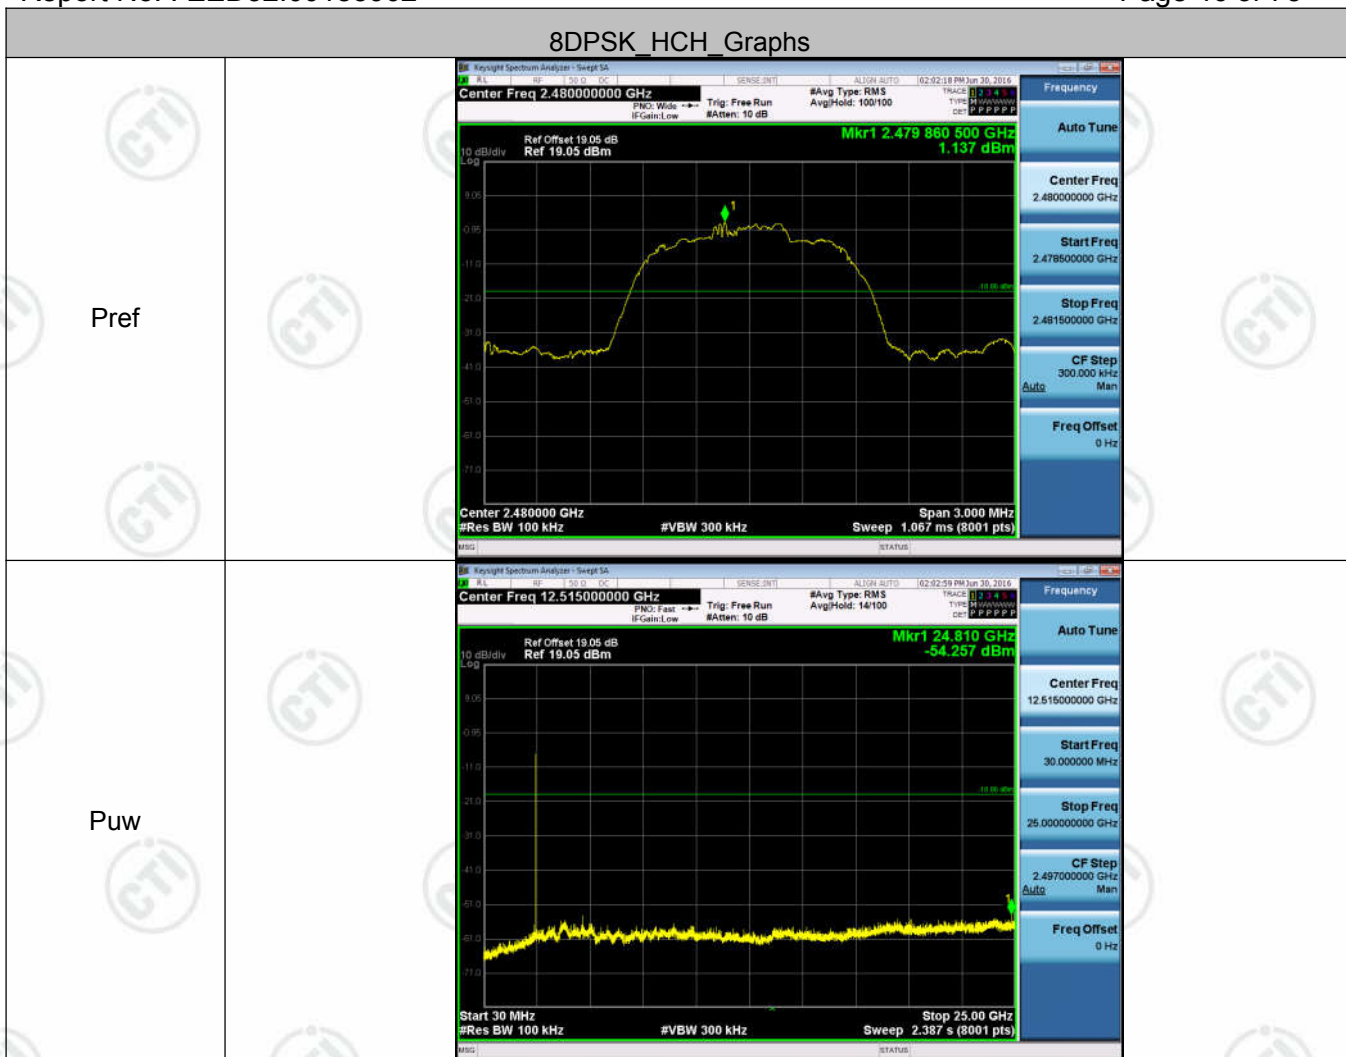

Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.</p> <p>The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
<p>EUT Pseudorandom Frequency Hopping Sequence</p> <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="316 981 1369 1131" data-label="Diagram"> </div> <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="288 1227 1273 1377" data-label="Figure"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 1.8dBi.

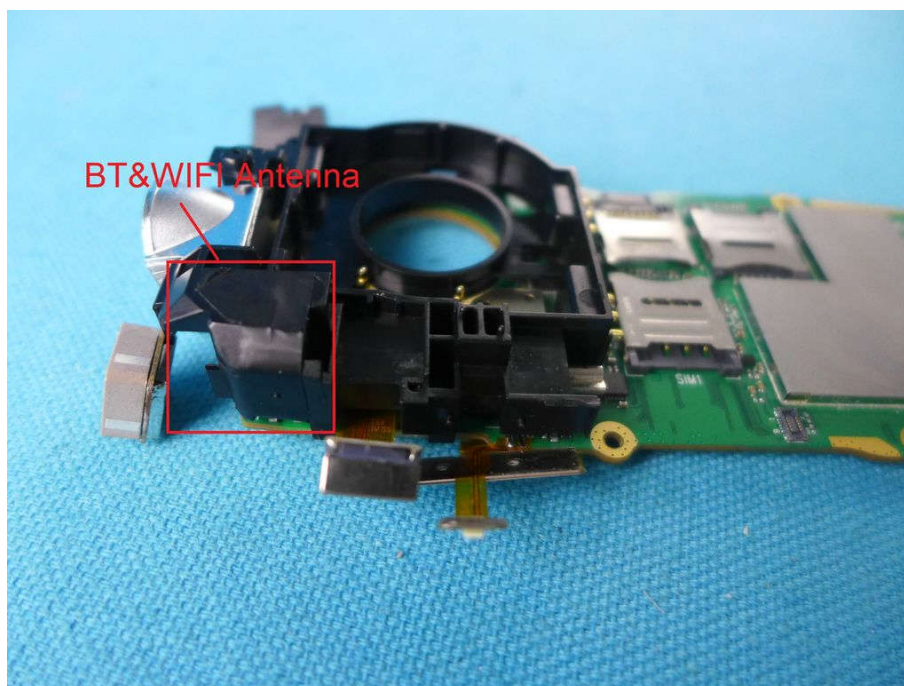

Appendix J): AC Power Line Conducted Emission

Test Procedure:	<p>Test frequency range :150KHz-30MHz</p> <p>1)The mains terminal disturbance voltage test was conducted in a shielded room.</p> <p>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</p> <p>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</p> <p>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</p> <p>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</p>														
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.</p> <p>NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dBμV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBμV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

80.0 dBuV

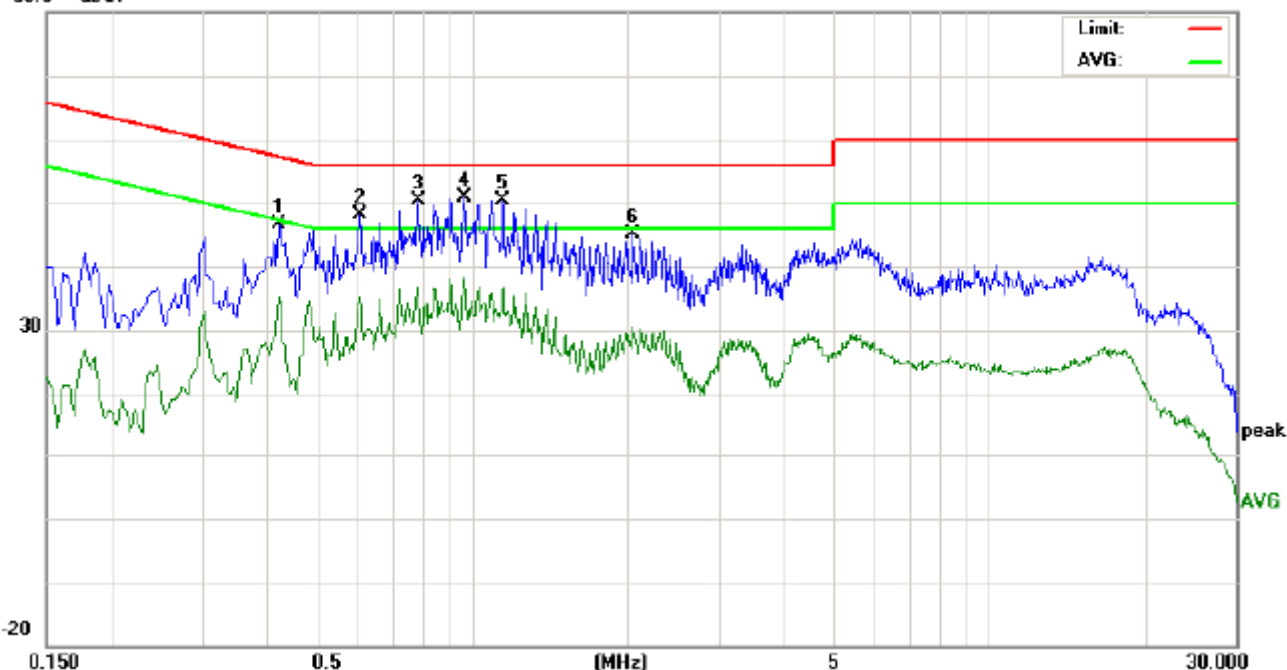

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.4220	36.70	33.50	25.12	9.90	46.60	43.40	35.02	57.41	47.41	-14.01	-12.39	P	
2	0.6060	38.15	33.40	25.28	9.90	48.05	43.30	35.18	56.00	46.00	-12.70	-10.82	P	
3	0.7860	40.37	35.60	27.08	9.90	50.27	45.50	36.98	56.00	46.00	-10.50	-9.02	P	
4	0.9660	40.96	36.50	28.42	10.00	50.96	46.50	38.42	56.00	46.00	-9.50	-7.58	P	
5	1.1460	40.37	35.10	26.17	10.00	50.37	45.10	36.17	56.00	46.00	-10.90	-9.83	P	
6	2.0540	35.05	28.80	20.40	10.00	45.05	38.80	30.40	56.00	46.00	-17.20	-15.60	P	

Neutral line:

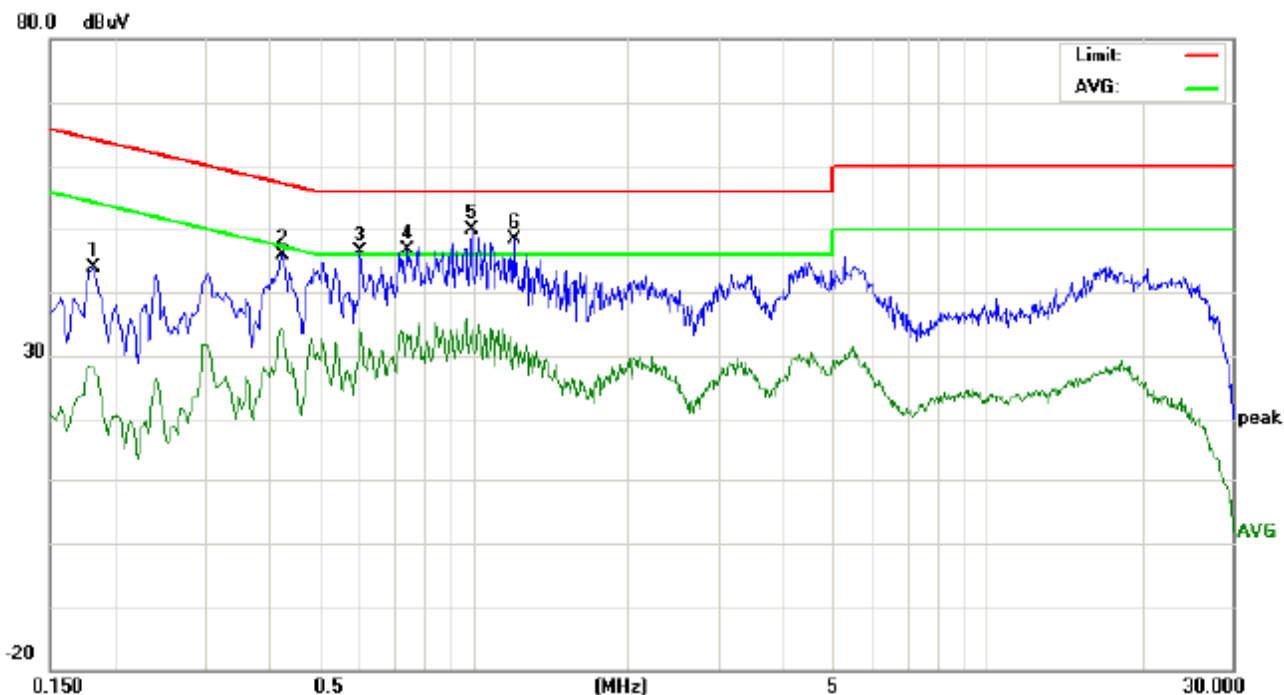

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1819	34.12	29.00	18.22	9.80	43.92	38.80	28.02	64.39	54.39	-25.59	-26.37	P	
2	0.4260	35.98	32.50	23.51	9.90	45.88	42.40	33.41	57.33	47.33	-14.93	-13.92	P	
3	0.6020	36.60	31.50	24.25	9.90	46.50	41.40	34.15	56.00	46.00	-14.60	-11.85	P	
4	0.7460	36.81	31.30	23.44	9.90	46.71	41.20	33.34	56.00	46.00	-14.80	-12.66	P	
5	0.9940	39.80	31.80	23.26	10.00	49.80	41.80	33.26	56.00	46.00	-14.20	-12.74	P	
6	1.1980	38.26	29.80	21.39	10.00	48.26	39.80	31.39	56.00	46.00	-16.20	-14.61	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. AC120V and 240V are tested and found the worst case is 120V, So only the 120V data were shown in the above.

Appendix K): Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel <p>Above 1GHz test procedure as below:</p> <ol style="list-style-type: none"> Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter). b. Test the EUT in the lowest channel , the Highest channel The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete. 				
Limit:	Frequency	Limit (dBμV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	


Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

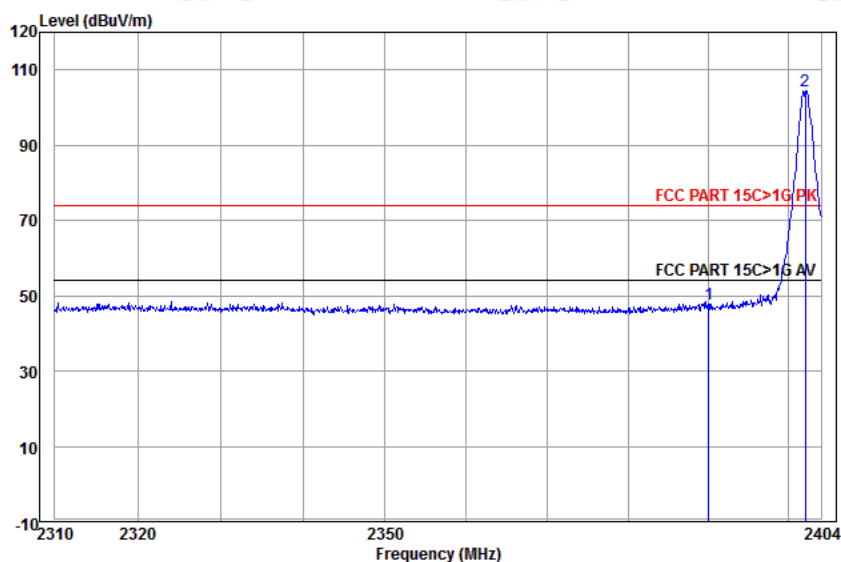


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Pol/Phase
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Remark
1	2390.000	32.53	4.28	34.39	45.24	47.66	74.00	-26.34 Horizontal
2	pp 2402.083	32.56	4.31	34.39	102.10	104.58	74.00	30.58 Horizontal

Worse case mode:	GFSK(1-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

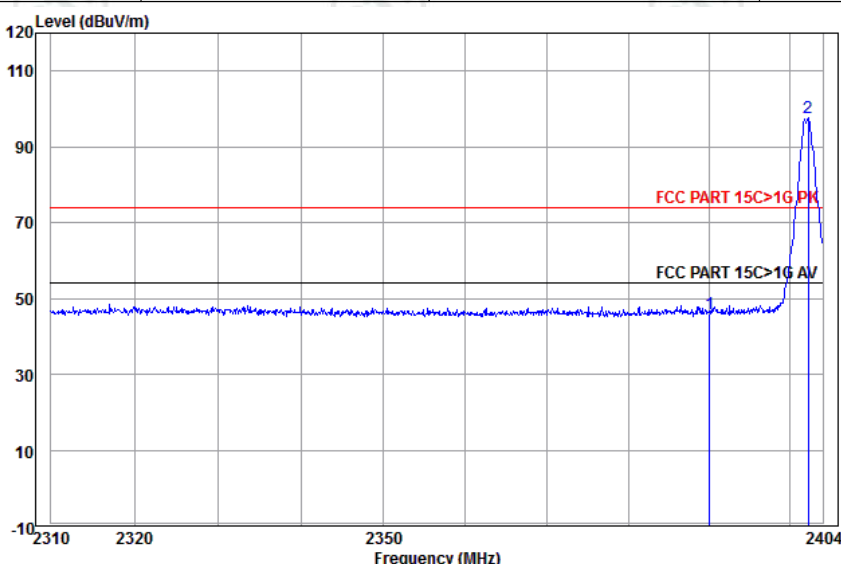


	Ant	Cable	Preamp	Read	Limit	Over		
Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Pol/Phase
MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	Remark
1	2390.000	32.53	4.28	34.39	43.68	46.10	74.00	-27.90 Vertical
2	pp 2402.179	32.56	4.31	34.39	95.03	97.51	74.00	23.51 Vertical

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

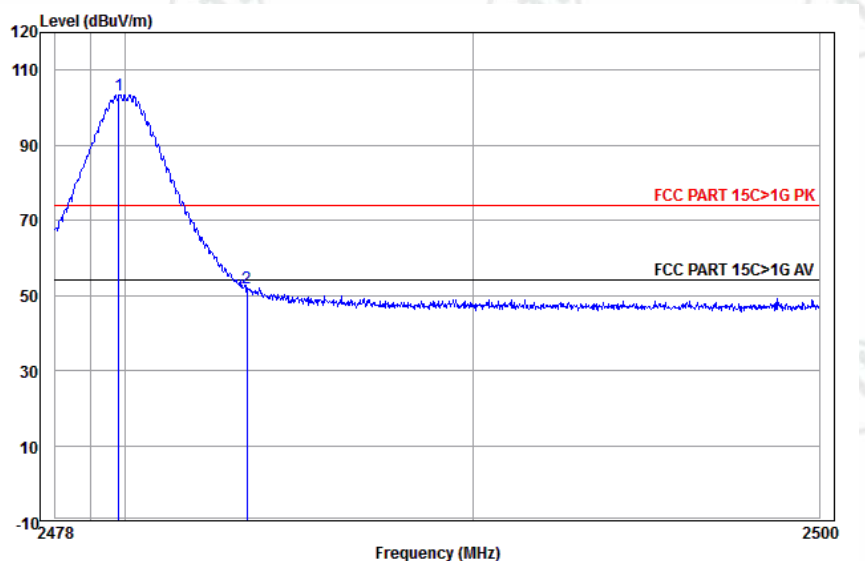


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.819	32.71	4.50	34.41	100.61	103.41	74.00	29.41	Horizontal	
2	2483.500	32.71	4.51	34.41	49.18	51.99	74.00	-22.01	Horizontal	

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

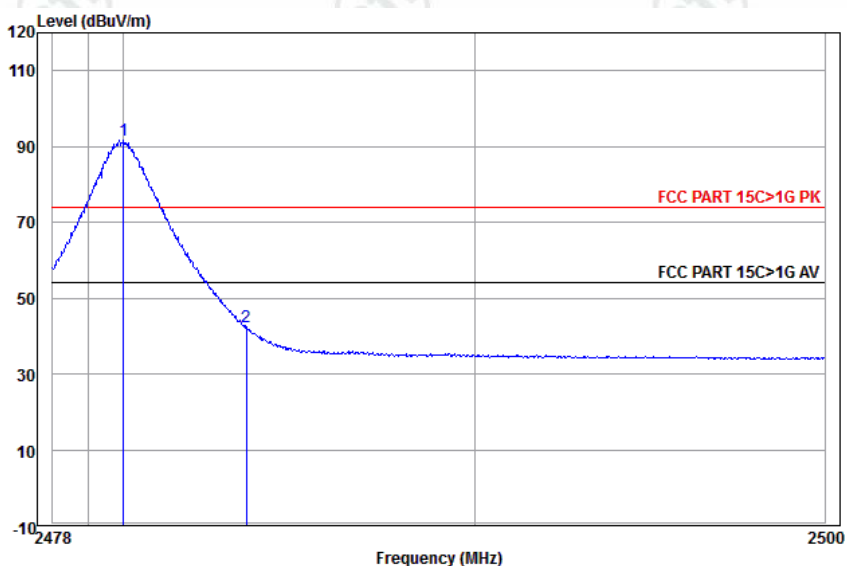


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.016	32.71	4.50	34.41	88.93	91.73	54.00	37.73	Horizontal	Average
2	2483.500	32.71	4.51	34.41	39.57	42.38	54.00	-11.62	Horizontal	Average

Worse case mode:	GFSK(1-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

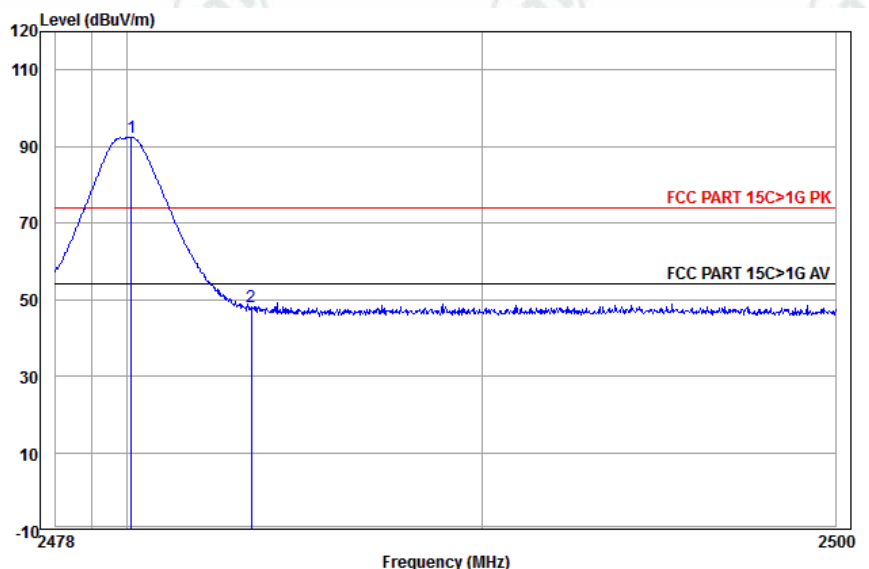


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1 pp	2480.125	32.71	4.50	34.41	89.50	92.30	74.00	18.30 Vertical
2	2483.500	32.71	4.51	34.41	45.19	48.00	74.00	-26.00 Vertical

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

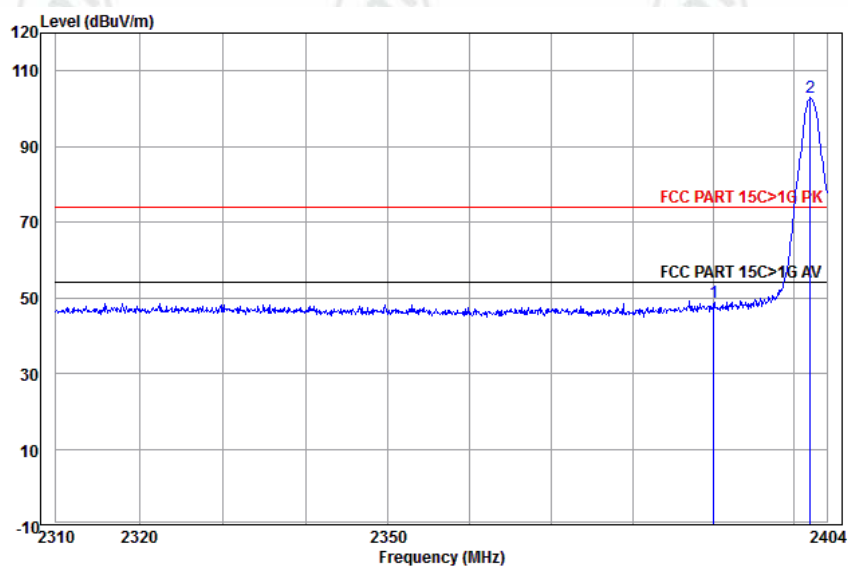


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	46.42	48.84	74.00	-25.16 Horizontal
2 pp	2401.987	32.56	4.31	34.39	100.60	103.08	74.00	29.08 Horizontal

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

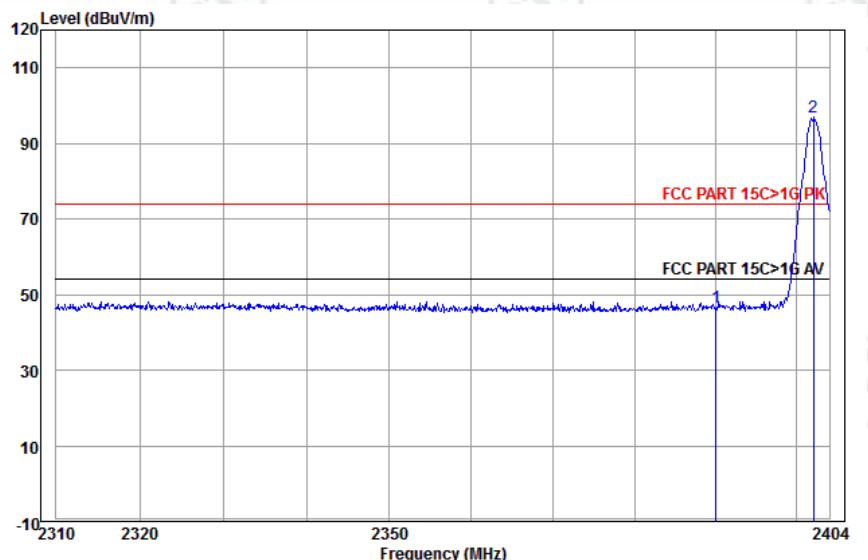


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	44.24	46.66	74.00	-27.34	Vertical
2 pp	2402.083	32.56	4.31	34.39	94.47	96.95	74.00	22.95	Vertical

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

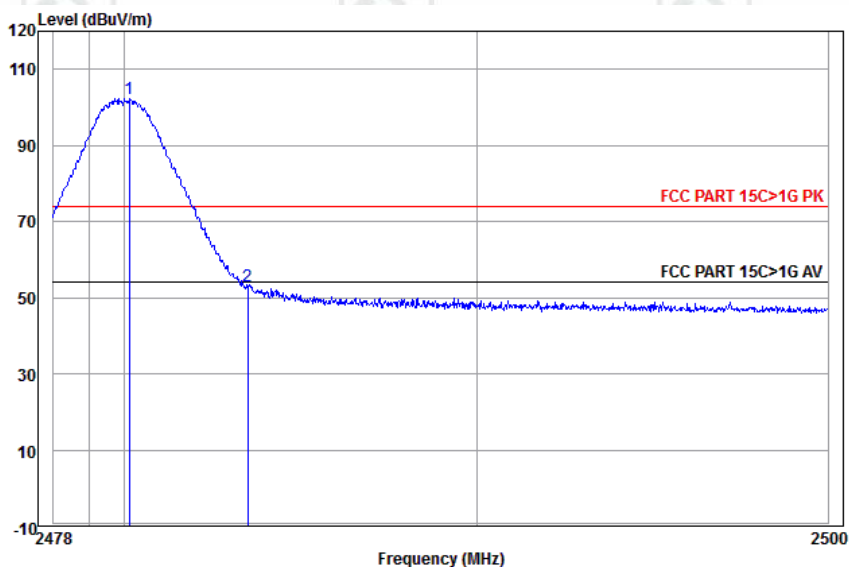


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2480.147	32.71	4.50	34.41	99.66	102.46	74.00	28.46	Horizontal
2	2483.500	32.71	4.51	34.41	50.24	53.05	74.00	-20.95	Horizontal

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

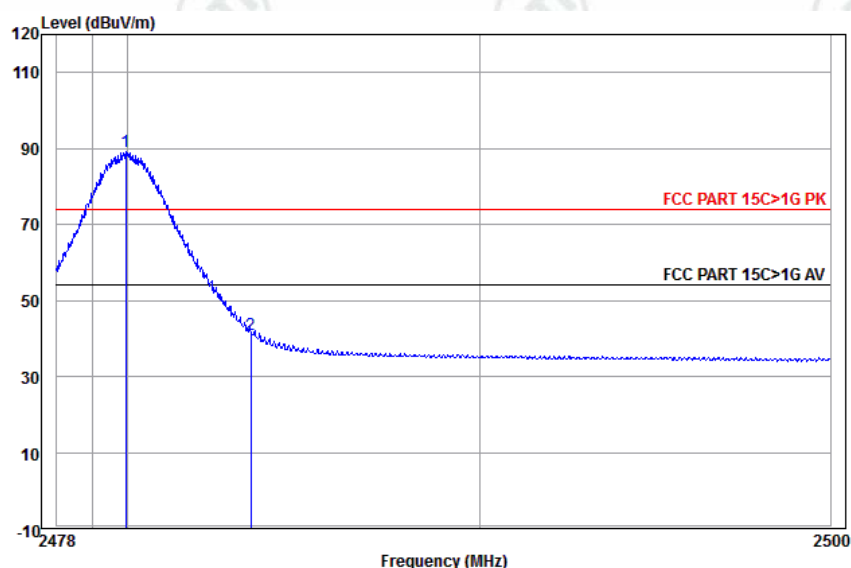


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.950	32.71	4.50	34.41	86.39	89.19	54.00	35.19	Horizontal	Average
2	2483.500	32.71	4.51	34.41	38.23	41.04	54.00	-12.96	Horizontal	Average

Worse case mode:	$\pi/4$ DQPSK(2-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

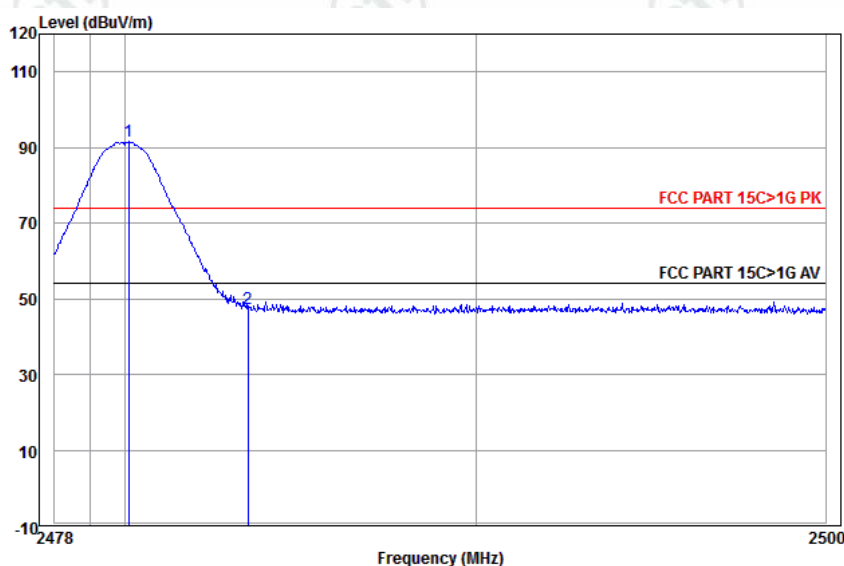


	Ant Freq	Cable Factor	Preamp Loss	Preamp Factor	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.104	32.71	4.50	34.41	88.70	91.50	74.00	17.50	Vertical	
2	2483.500	32.71	4.51	34.41	44.53	47.34	74.00	-26.66	Vertical	

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

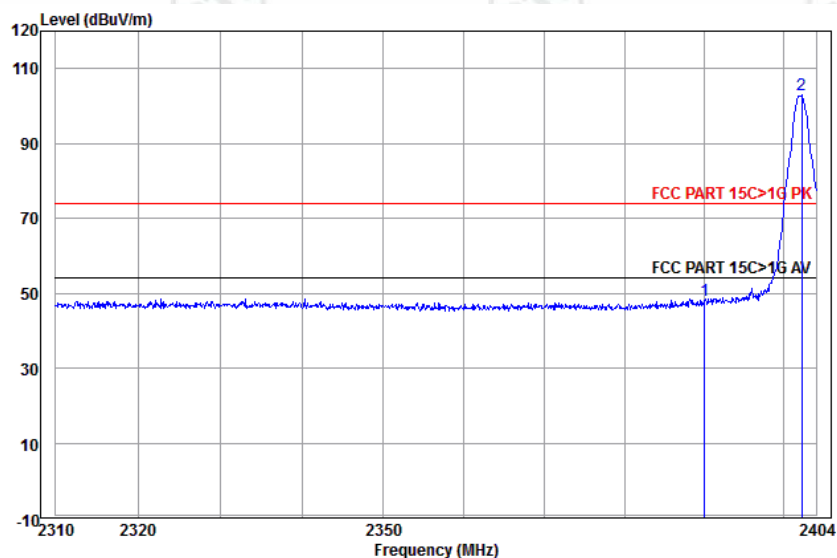


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	45.54	47.96	74.00	-26.04	Horizontal
2 pp	2402.179	32.56	4.31	34.39	100.35	102.83	54.00	48.83	Horizontal Average

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2390.0MHz	Test channel: Lowest	Polarization: Vertical	Remark: Peak

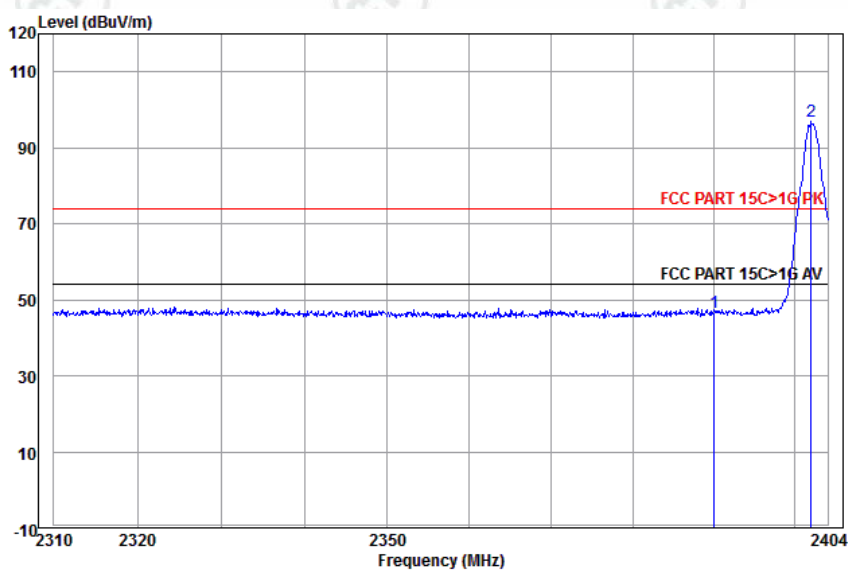


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	4.28	34.39	44.27	46.69	74.00	-27.31	Vertical
2 pp	2401.987	32.56	4.31	34.39	94.34	96.82	74.00	22.82	Vertical

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Peak

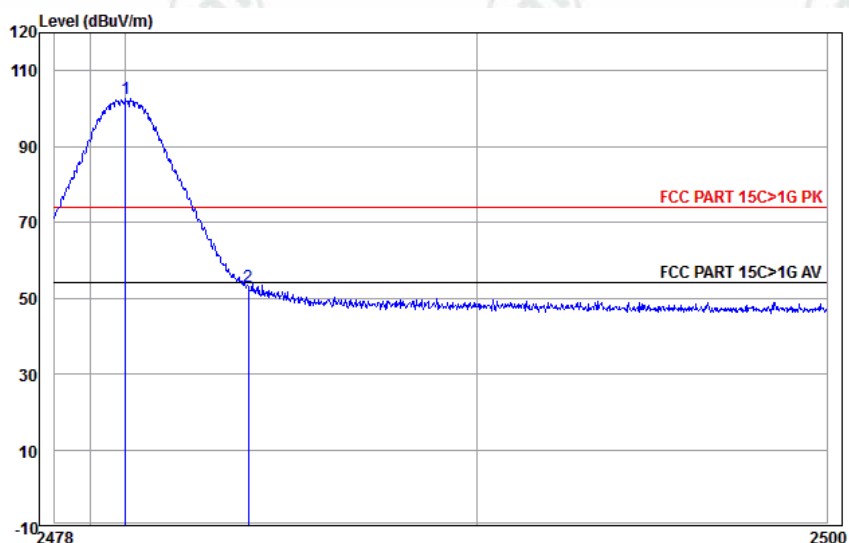


	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV dBuV/m	dBuV/m	dB		
1 pp	2480.016	32.71	4.50	34.41	99.75 102.55	74.00	28.55	Horizontal	
2	2483.500	32.71	4.51	34.41	50.16 52.97	74.00	-21.03	Horizontal	

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Horizontal	Remark: Average

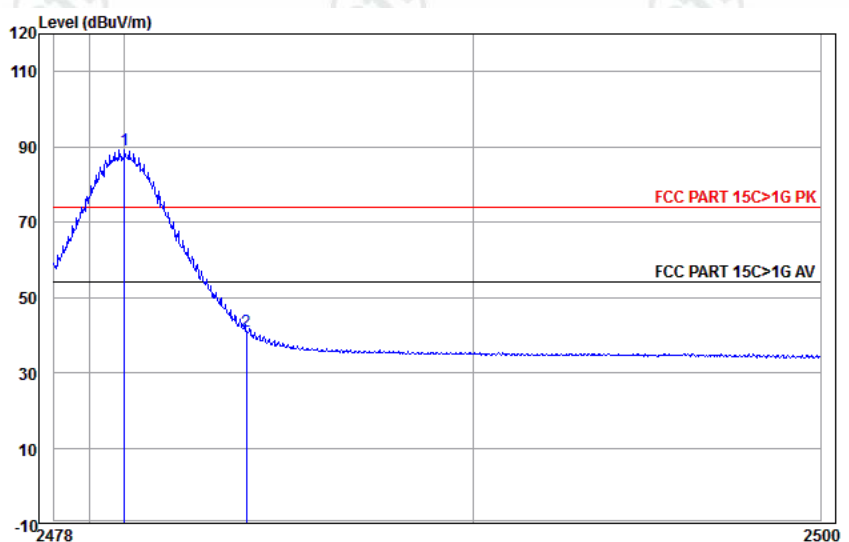

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dB	dBuV dBuV/m	dBuV/m	dB		
1 pp	2480.016	32.71	4.50	34.41	86.41 89.21	54.00	35.21	Horizontal	Average
2	2483.500	32.71	4.51	34.41	38.30 41.11	54.00	-12.89	Horizontal	Average

Worse case mode:	8DPSK(3-DH5)		
Frequency: 2483.5MHz	Test channel: Highest	Polarization: Vertical	Remark: Peak

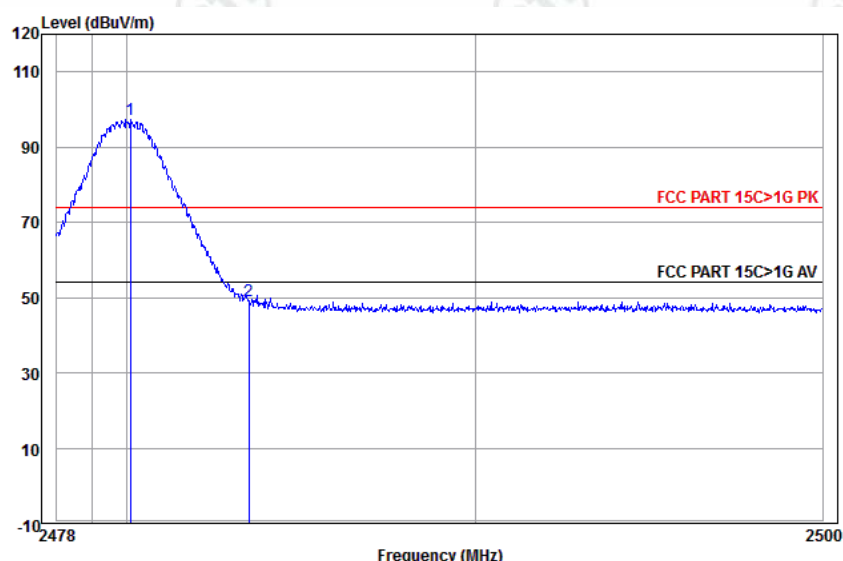

	Ant	Cable	Preamp	Read	Limit	Over		
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2480.104	32.71	4.50	34.41	94.46	97.26	74.00	23.26 Vertical
2	2483.500	32.71	4.51	34.41	46.43	49.24	74.00	-24.76 Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L): Radiated Spurious Emissions

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

Test Procedure:

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.

j. Repeat above procedures until all frequencies measured was complete.


Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3


Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

30MHz~1GHz (QP)

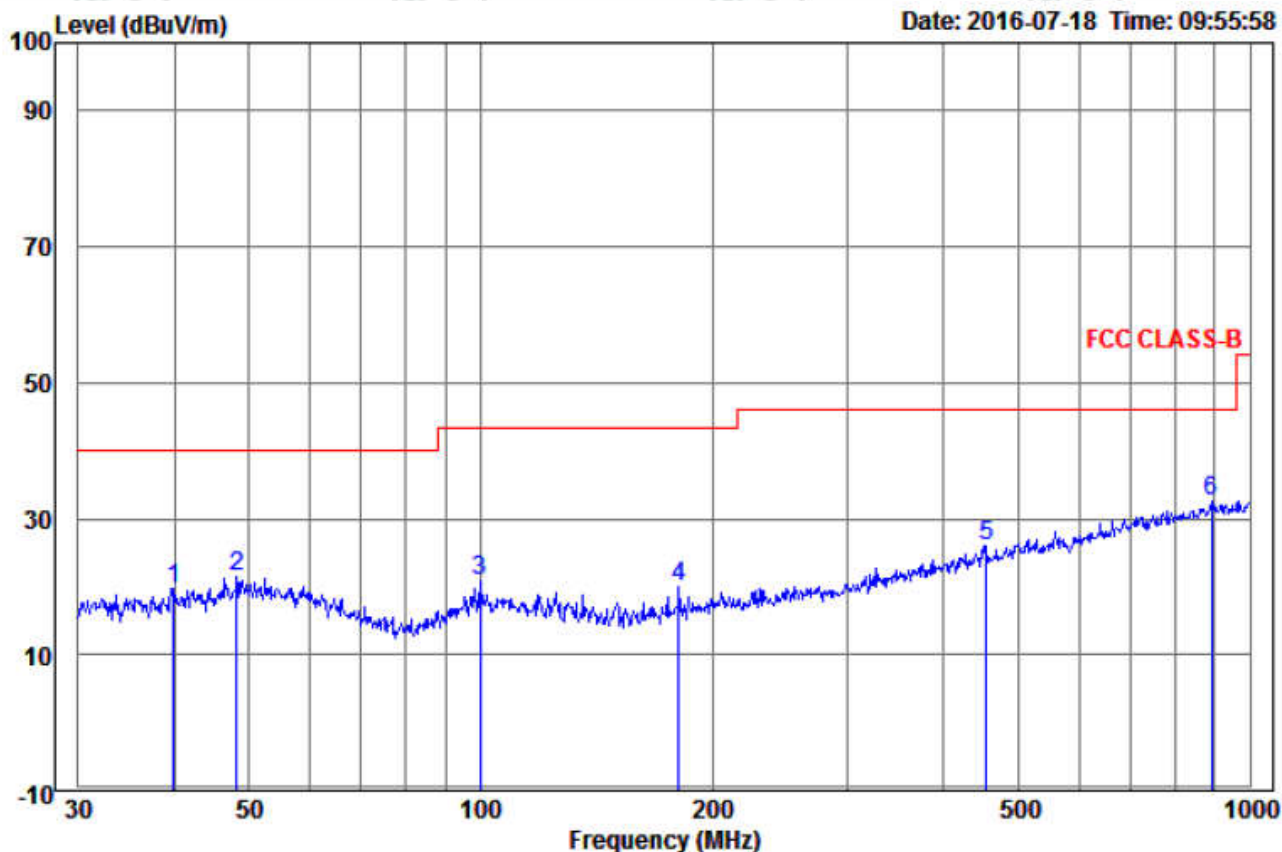

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Line	Over Limit	Pol/Phase	Remark
	MHz		dB	dBuV	dBuV/m	dBuV/m	dB		
1	39.854	14.18	0.54	5.05	19.77	40.00	-20.23	Horizontal	
2	48.163	14.95	1.25	5.22	21.42	40.00	-18.58	Horizontal	
3	99.878	13.18	1.57	6.25	21.00	43.50	-22.50	Horizontal	
4	181.283	10.95	1.99	7.08	20.02	43.50	-23.48	Horizontal	
5	454.310	17.22	3.00	5.76	25.98	46.00	-20.02	Horizontal	
6 pp	890.728	22.31	4.31	6.06	32.68	46.00	-13.32	Horizontal	

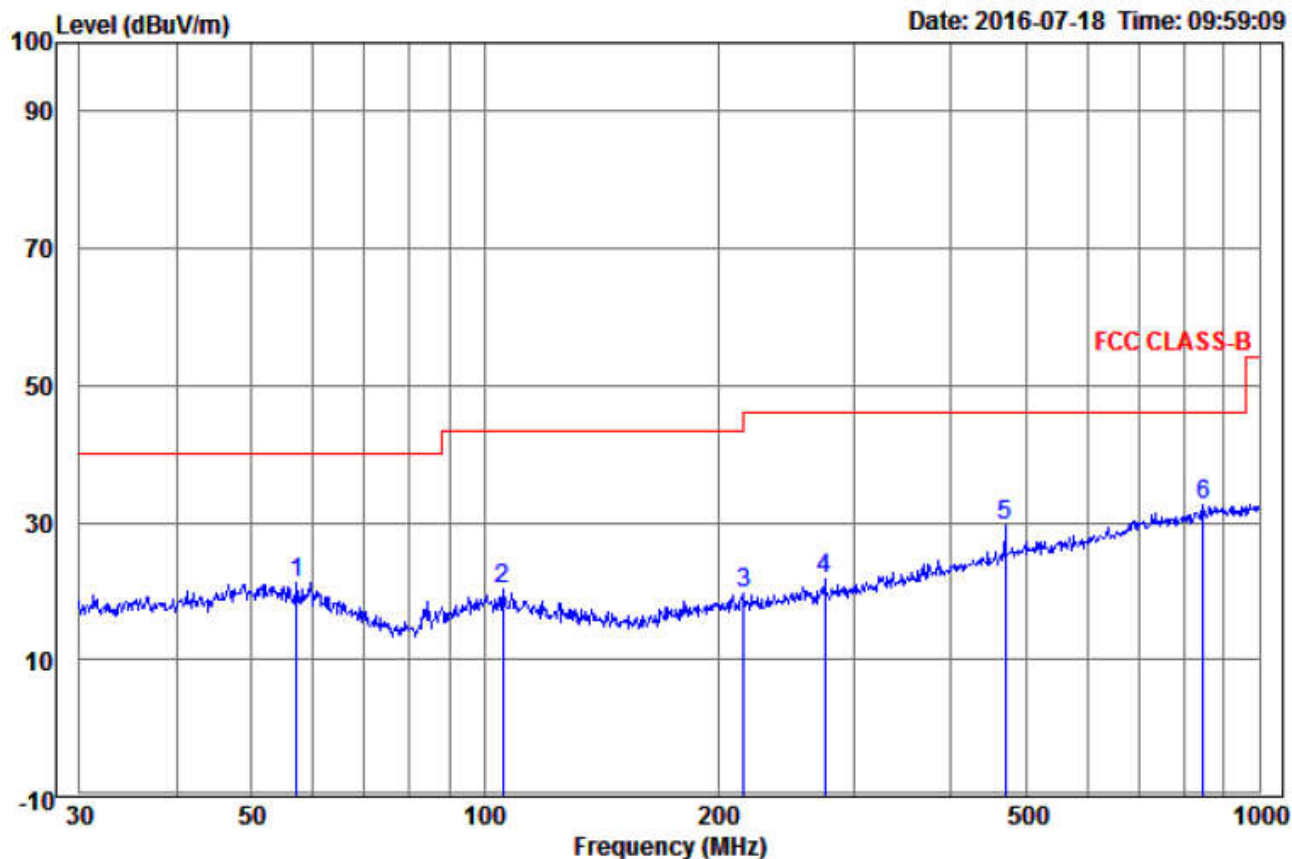

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	57.191	14.14	1.42	5.47	21.03	40.00	-18.97	Vertical	
2	105.642	12.73	1.57	6.03	20.33	43.50	-23.17	Vertical	
3	216.024	11.88	2.26	5.61	19.75	46.00	-26.25	Vertical	
4	275.157	12.98	2.37	6.53	21.88	46.00	-24.12	Vertical	
5	470.523	17.65	3.05	8.76	29.46	46.00	-16.54	Vertical	
6 pp	848.056	21.89	4.17	6.45	32.51	46.00	-13.49	Vertical	

Transmitter Emission above 1GHz

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1350.362	30.57	2.68	34.81	44.21	42.65	74	-31.35	Pass	Horizontal
1832.785	31.45	3.11	34.41	44.20	44.35	74	-29.65	Pass	Horizontal
3690.853	33.02	5.49	34.57	43.23	47.17	74	-26.83	Pass	Horizontal
4804.000	34.69	5.11	34.35	42.41	47.86	74	-26.14	Pass	Horizontal
7206.000	36.42	6.66	34.90	41.04	49.22	74	-24.78	Pass	Horizontal
9608.000	37.88	7.73	35.08	40.14	50.67	74	-23.33	Pass	Horizontal
1273.572	30.40	2.60	34.89	44.60	42.71	74	-31.29	Pass	Vertical
1786.719	31.37	3.07	34.45	42.84	42.83	74	-31.17	Pass	Vertical
3274.672	33.36	5.57	34.53	43.87	48.27	74	-25.73	Pass	Vertical
4804.000	34.69	5.11	34.35	41.79	47.24	74	-26.76	Pass	Vertical
7206.000	36.42	6.66	34.90	42.06	50.24	74	-23.76	Pass	Vertical
9608.000	37.88	7.73	35.08	39.50	50.03	74	-23.97	Pass	Vertical

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1235.257	30.31	2.56	34.93	45.37	43.31	74	-30.69	Pass	Horizontal
1642.761	31.13	2.95	34.56	44.38	43.90	74	-30.10	Pass	Horizontal
3738.129	32.99	5.48	34.58	44.55	48.44	74	-25.56	Pass	Horizontal
4882.000	34.85	5.08	34.33	43.59	49.19	74	-24.81	Pass	Horizontal
7323.000	36.43	6.77	34.90	42.11	50.41	74	-23.59	Pass	Horizontal
9764.000	38.05	7.60	35.05	40.13	50.73	74	-23.27	Pass	Horizontal
1296.469	30.45	2.62	34.86	45.75	43.96	74	-30.04	Pass	Vertical
1894.450	31.54	3.15	34.37	43.06	43.38	74	-30.62	Pass	Vertical
3498.735	33.17	5.52	34.55	43.42	47.56	74	-26.44	Pass	Vertical
4882.000	34.85	5.08	34.33	42.15	47.75	74	-26.25	Pass	Vertical
7323.000	36.43	6.77	34.90	41.22	49.52	74	-24.48	Pass	Vertical
9764.000	38.05	7.60	35.05	39.61	50.21	74	-23.79	Pass	Vertical

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1213.441	30.26	2.53	34.95	43.58	41.42	74	-32.58	Pass	Horizontal
2003.569	31.71	3.24	34.30	44.00	44.65	74	-29.35	Pass	Horizontal
3498.735	33.17	5.52	34.55	43.14	47.28	74	-26.72	Pass	Horizontal
4960.000	35.02	5.05	34.31	41.42	47.18	74	-26.82	Pass	Horizontal
7440.000	36.45	6.88	34.90	40.93	49.36	74	-24.64	Pass	Horizontal
9920.000	38.22	7.47	35.02	39.47	50.14	74	-23.86	Pass	Horizontal
1283.335	30.42	2.61	34.88	43.35	41.50	74	-32.50	Pass	Vertical
1773.127	31.35	3.06	34.46	42.97	42.92	74	-31.08	Pass	Vertical
3616.451	33.08	5.50	34.56	44.05	48.07	74	-25.93	Pass	Vertical
4960.000	35.02	5.05	34.31	42.99	48.75	74	-25.25	Pass	Vertical
7440.000	36.45	6.88	34.90	40.93	49.36	74	-24.64	Pass	Vertical
9920.000	38.22	7.47	35.02	40.02	50.69	74	-23.31	Pass	Vertical

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1286.606	30.43	2.61	34.87	43.69	41.86	74	-32.14	Pass	Horizontal
1973.201	31.66	3.21	34.32	44.42	44.97	74	-29.03	Pass	Horizontal
3525.555	33.15	5.52	34.56	43.67	47.78	74	-26.22	Pass	Horizontal
4804.000	34.69	5.11	34.35	42.61	48.06	74	-25.94	Pass	Horizontal
7206.000	36.42	6.66	34.90	41.28	49.46	74	-24.54	Pass	Horizontal
9608.000	37.88	7.73	35.08	39.35	49.88	74	-24.12	Pass	Horizontal
1238.405	30.32	2.56	34.92	47.49	45.45	74	-28.55	Pass	Vertical
1823.477	31.43	3.10	34.42	43.29	43.40	74	-30.60	Pass	Vertical
3498.735	33.17	5.52	34.55	43.24	47.38	74	-26.62	Pass	Vertical
4804.000	34.69	5.11	34.35	42.82	48.27	74	-25.73	Pass	Vertical
7206.000	36.42	6.66	34.90	41.14	49.32	74	-24.68	Pass	Vertical
9608.000	37.88	7.73	35.08	40.27	50.80	74	-23.20	Pass	Vertical

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1228.984	30.29	2.55	34.93	43.88	41.79	74	-32.21	Pass	Horizontal
1899.278	31.55	3.16	34.37	43.34	43.68	74	-30.32	Pass	Horizontal
3367.661	33.28	5.55	34.54	43.45	47.74	74	-26.26	Pass	Horizontal
4884.000	34.86	5.08	34.33	43.57	49.18	74	-24.82	Pass	Horizontal
7323.000	36.43	6.77	34.90	41.48	49.78	74	-24.22	Pass	Horizontal
9764.000	38.05	7.60	35.05	39.46	50.06	74	-23.94	Pass	Horizontal
1167.982	30.15	2.48	35.00	45.00	42.63	74	-31.37	Pass	Vertical
1856.261	31.48	3.13	34.40	44.36	44.57	74	-29.43	Pass	Vertical
3480.968	33.19	5.53	34.55	43.30	47.47	74	-26.53	Pass	Vertical
4882.000	34.85	5.08	34.33	41.90	47.50	74	-26.50	Pass	Vertical
7323.000	36.43	6.77	34.90	42.16	50.46	74	-23.54	Pass	Vertical
9764.000	38.05	7.60	35.05	39.41	50.01	74	-23.99	Pass	Vertical

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB μ V)	Level (dB μ V/m)	Limit Line (dB μ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1219.635	30.27	2.54	34.94	46.03	43.90	74	-30.10	Pass	Horizontal
1777.646	31.36	3.07	34.45	44.50	44.48	74	-29.52	Pass	Horizontal
3359.099	33.29	5.55	34.54	43.30	47.60	74	-26.40	Pass	Horizontal
4960.000	35.02	5.05	34.31	41.09	46.85	74	-27.15	Pass	Horizontal
7440.000	36.45	6.88	34.90	40.95	49.38	74	-24.62	Pass	Horizontal
9920.000	38.22	7.47	35.02	40.01	50.68	74	-23.32	Pass	Horizontal
1198.095	30.22	2.51	34.97	48.01	45.77	74	-28.23	Pass	Vertical
1889.633	31.54	3.15	34.37	43.20	43.52	74	-30.48	Pass	Vertical
3662.775	33.04	5.50	34.57	42.52	46.49	74	-27.51	Pass	Vertical
4960.000	35.02	5.05	34.31	40.83	46.59	74	-27.41	Pass	Vertical
7440.000	36.45	6.88	34.90	40.86	49.29	74	-24.71	Pass	Vertical
9920.000	38.22	7.47	35.02	40.14	50.81	74	-23.19	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Lowest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1402.920	30.68	2.73	34.76	44.25	42.90	74	-31.10	Pass	Horizontal
1884.829	31.53	3.15	34.38	44.72	45.02	74	-28.98	Pass	Horizontal
3410.797	33.24	5.54	34.54	43.62	47.86	74	-26.14	Pass	Horizontal
4804.000	34.69	5.11	34.35	44.40	49.85	74	-24.15	Pass	Horizontal
7206.000	36.42	6.66	34.90	41.64	49.82	74	-24.18	Pass	Horizontal
9608.000	37.88	7.73	35.08	38.85	49.38	74	-24.62	Pass	Horizontal
1276.818	30.41	2.60	34.88	47.12	45.25	74	-28.75	Pass	Vertical
1746.251	31.31	3.04	34.48	46.49	46.36	74	-27.64	Pass	Vertical
3135.986	33.48	5.59	34.52	45.46	50.01	74	-23.99	Pass	Vertical
4804.000	34.69	5.11	34.35	42.03	47.48	74	-26.52	Pass	Vertical
7206.000	36.42	6.66	34.90	42.60	50.78	74	-23.22	Pass	Vertical
9608.000	37.88	7.73	35.08	39.13	49.66	74	-24.34	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Middle			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1222.743	30.28	2.54	34.94	46.91	44.79	74	-29.21	Pass	Horizontal
1823.477	31.43	3.10	34.42	42.58	42.69	74	-31.31	Pass	Horizontal
3943.392	32.84	5.45	34.60	42.61	46.30	74	-27.70	Pass	Horizontal
4882.000	34.85	5.08	34.33	44.37	49.97	74	-24.03	Pass	Horizontal
7323.000	36.43	6.77	34.90	41.35	49.65	74	-24.35	Pass	Horizontal
9764.000	38.05	7.60	35.05	40.08	50.68	74	-23.32	Pass	Horizontal
1247.899	30.34	2.57	34.91	49.36	47.36	74	-26.64	Pass	Vertical
1880.038	31.52	3.14	34.38	43.00	43.28	74	-30.72	Pass	Vertical
3454.486	33.21	5.53	34.55	42.79	46.98	74	-27.02	Pass	Vertical
4882.000	34.85	5.08	34.33	42.95	48.55	74	-25.45	Pass	Vertical
7323.000	36.43	6.77	34.90	41.74	50.04	74	-23.96	Pass	Vertical
9764.000	38.05	7.60	35.05	39.98	50.58	74	-23.42	Pass	Vertical

Worse case mode:		8DPSK(3-DH5)		Test channel:		Highest			
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1402.920	30.68	2.73	34.76	45.86	44.51	74	-29.49	Pass	Horizontal
1958.189	31.64	3.20	34.33	44.16	44.67	74	-29.33	Pass	Horizontal
3463.291	33.20	5.53	34.55	43.63	47.81	74	-26.19	Pass	Horizontal
4960.000	35.02	5.05	34.31	42.59	48.35	74	-25.65	Pass	Horizontal
7440.000	36.45	6.88	34.90	41.29	49.72	74	-24.28	Pass	Horizontal
9920.000	38.22	7.47	35.02	39.26	49.93	74	-24.07	Pass	Horizontal
1198.095	30.22	2.51	34.97	50.16	47.92	74	-26.08	Pass	Vertical
1818.842	31.43	3.10	34.42	43.04	43.15	74	-30.85	Pass	Vertical
3419.491	33.24	5.54	34.55	42.91	47.14	74	-26.86	Pass	Vertical
4960.000	35.02	5.05	34.31	41.19	46.95	74	-27.05	Pass	Vertical
7440.000	36.45	6.88	34.90	41.78	50.21	74	-23.79	Pass	Vertical
9920.000	38.22	7.47	35.02	39.86	50.53	74	-23.47	Pass	Vertical

Note:

1) Through Pre-scan transmitting mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP


Test mode No.: RG310

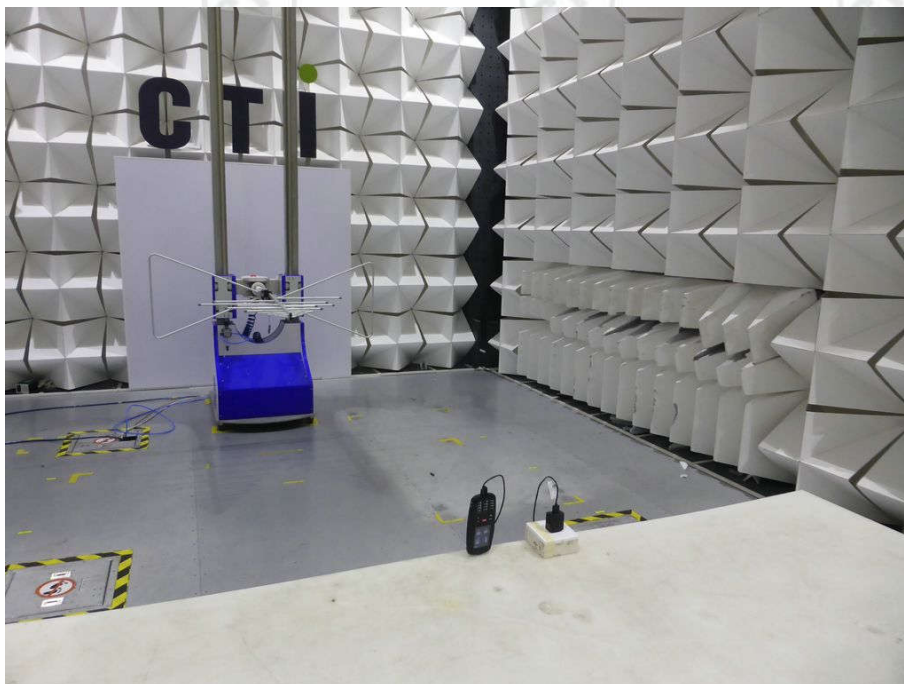

Radiated spurious emission Test Setup-1(Below 1GHz)

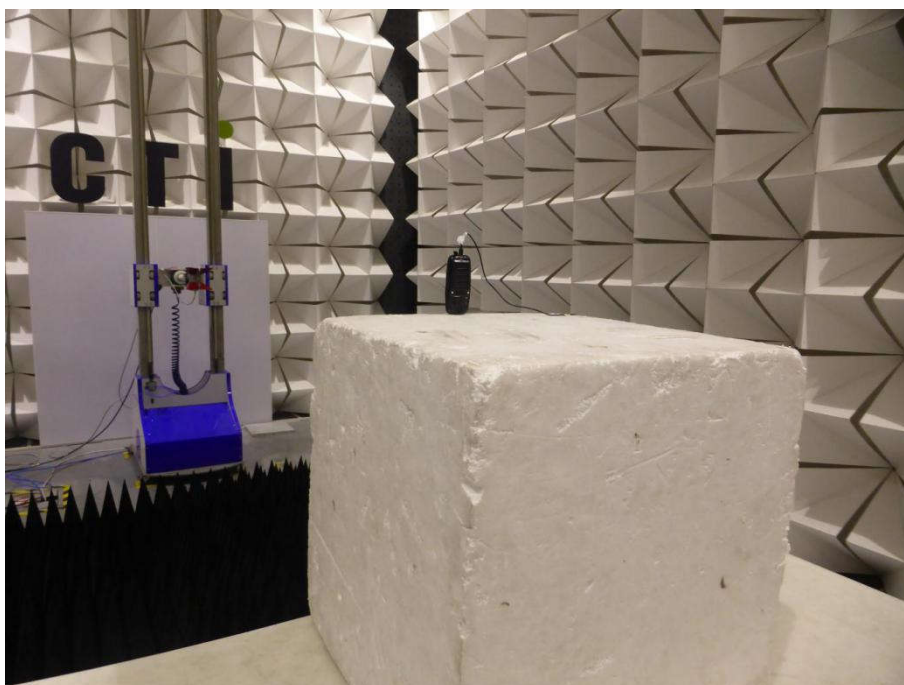

Radiated spurious emission Test Setup-2(Above 1GHz)

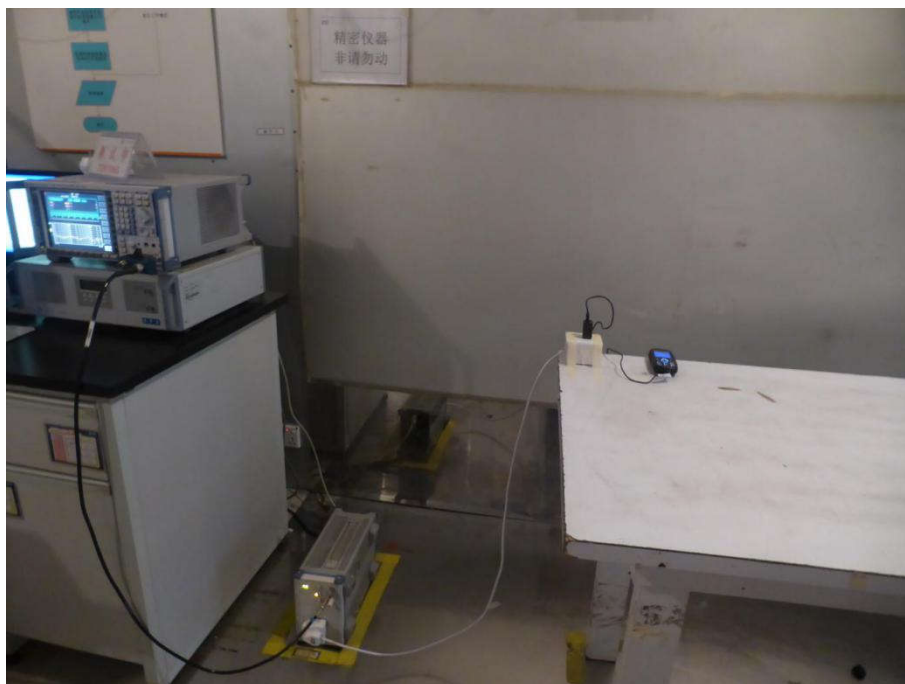

Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Test mode No.: RG310



View of Product-1



View of Product-2



View of Product-3



View of Product-4



View of Product-5



View of Product-6




View of Product-7



View of Product-8




View of Product-9

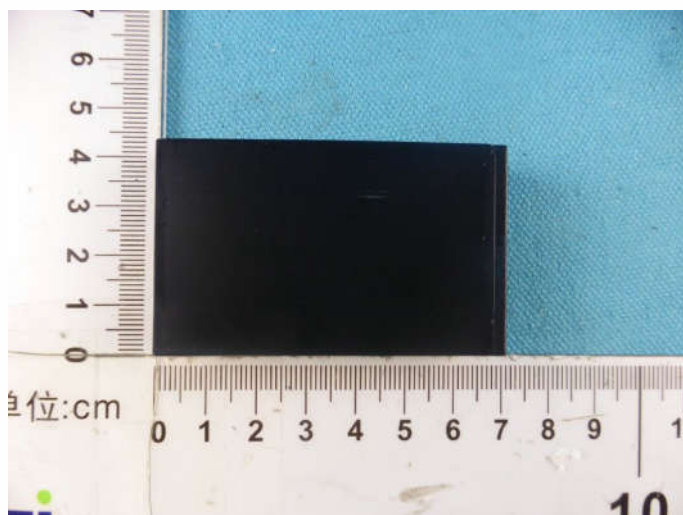

View of Product-10



View of Product-11

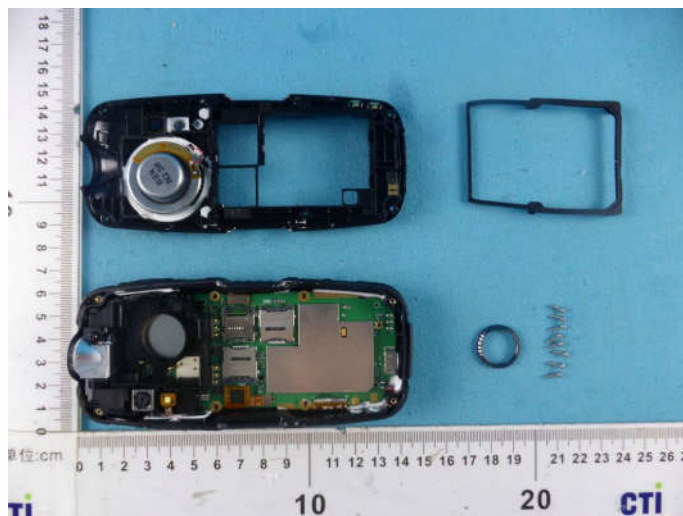


View of Product-12



View of Product-13




View of Product-14

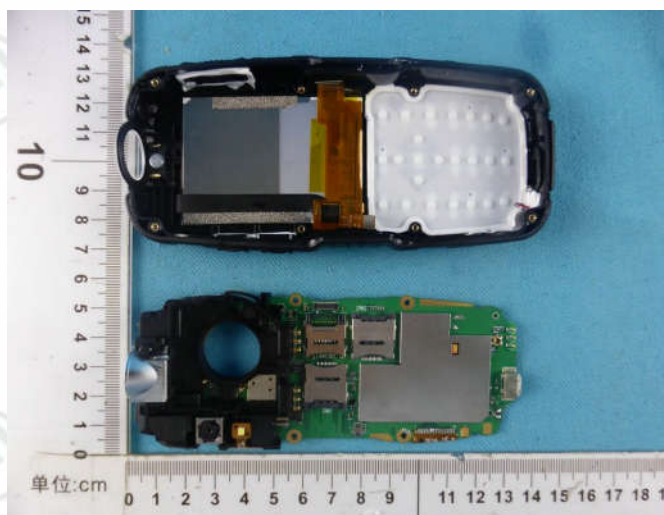


View of Product-15




View of Product-16

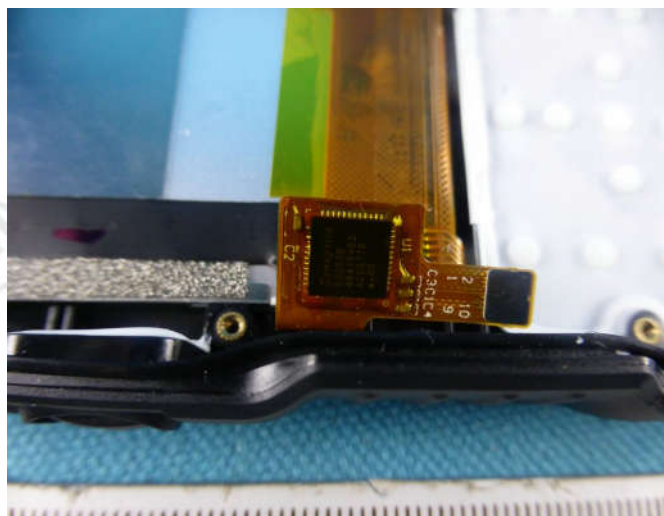


View of Product-17

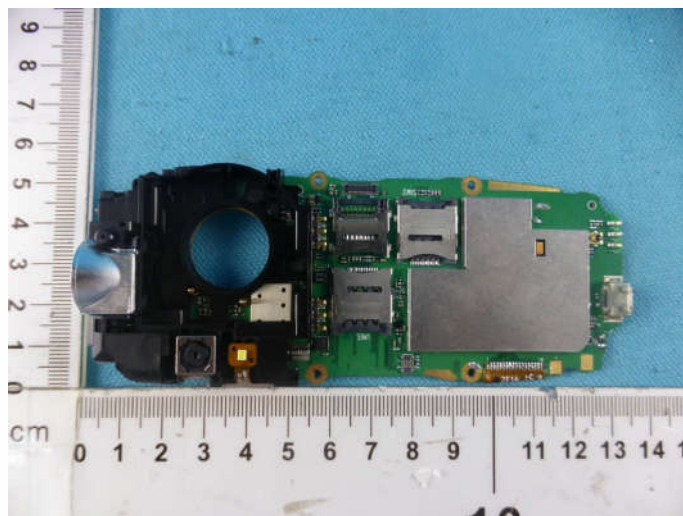


View of Product-18

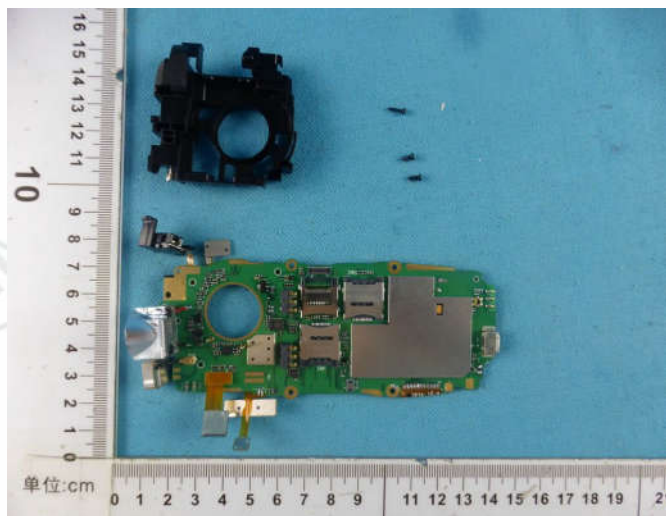


View of Product-19

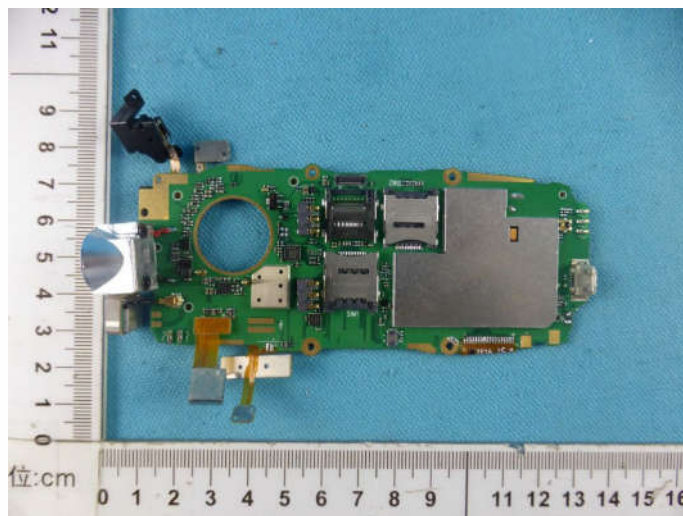


View of Product-20

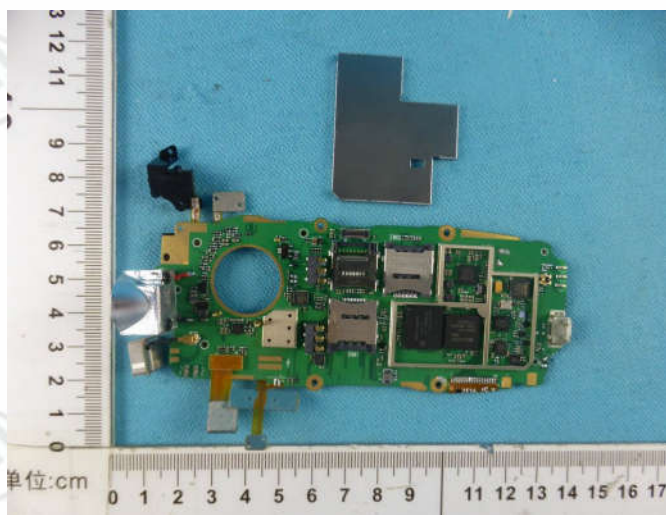

View of Product-21

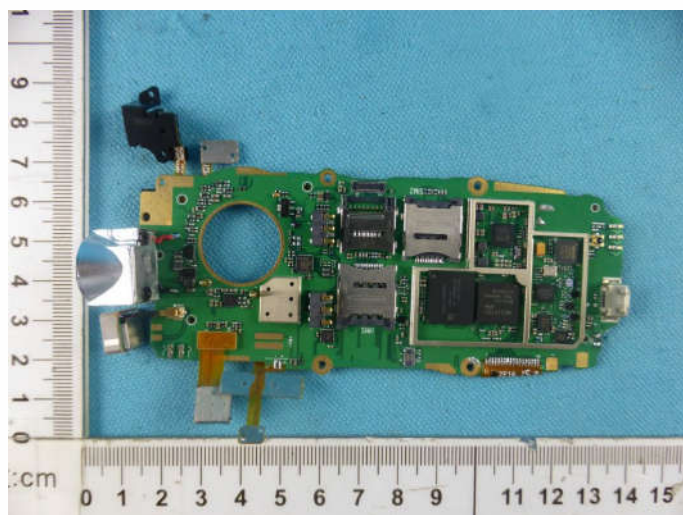

View of Product-22

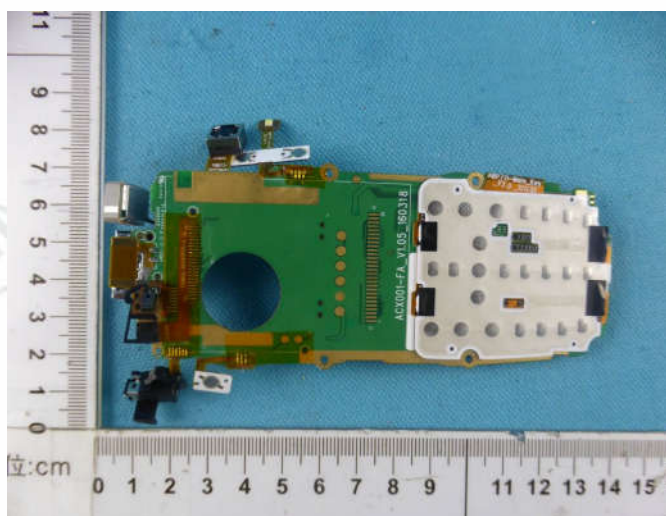


View of Product-23



View of Product-24



View of Product-25

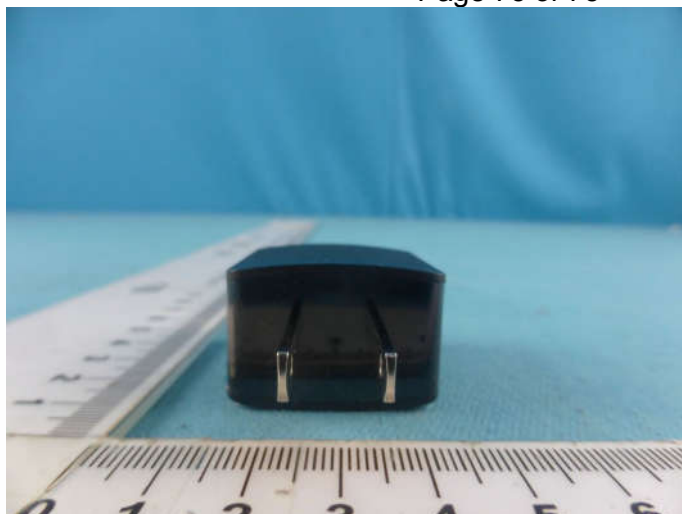


View of Product-26



View of Product-27



View of Product-28

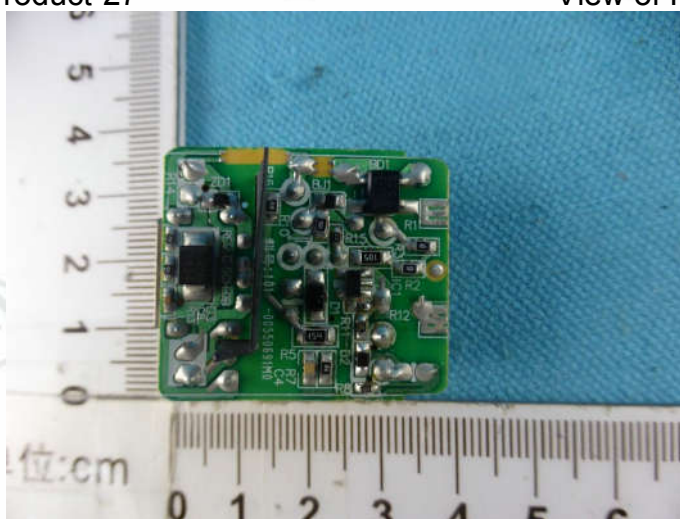

View of Product-29

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.