



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: Evolve 3 Holdings Pty Ltd

Address: PO BOX 6222, NARRAWEENA, NSW, Australia

FCC ID: 2AWLG-EVOXSV1

Product Name: Cloud Gaming console

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230956606-00C

Date Of Issue: 2023/10/16

Reviewed By: Calvin Chen

Title: RF Engineer

Reviewed By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 Measurement Uncertainty	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 MINIMUM 6 DB BANDWIDTH:	18
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure	18
3.4 99% OCCUPIED BANDWIDTH:	19
3.4.1 EUT Setup.....	19
3.4.2 Test Procedure	19
3.5 MAXIMUM CONDUCTED OUTPUT POWER:	20
3.5.1 Applicable Standard.....	20
3.5.2 EUT Setup.....	20
3.5.3 Test Procedure	20
3.6 MAXIMUM POWER SPECTRAL DENSITY:	21
3.6.1 Applicable Standard.....	21
3.6.2 EUT Setup.....	21
3.6.3 Test Procedure	21
3.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	22
3.7.1 Applicable Standard.....	22
3.7.2 EUT Setup.....	22
3.7.3 Test Procedure	22

3.8 DUTY CYCLE:	23
3.8.1 EUT Setup.....	23
3.8.2 Test Procedure	23
3.9 ANTENNA REQUIREMENT	23
3.9.1 Applicable Standard.....	23
3.9.2 Judgment.....	23
4. Test DATA AND RESULTS	24
4.1 AC LINE CONDUCTED EMISSIONS	24
4.2 RADIATION SPURIOUS EMISSIONS	27
4.3 MINIMUM 6 dB EMISSION BANDWIDTH	41
4.4 99% OCCUPIED BANDWIDTH	46
4.5 MAXIMUM CONDUCTED OUTPUT POWER	51
4.6 MAXIMUM POWER SPECTRAL DENSITY	52
4.7 100 KHz BANDWIDTH OF FREQUENCY BAND EDGE:	61
4.8 DUTY CYCLE	70
5. MPE Based Exemption	72
5.1 APPLICABLE STANDARD	72
5.2 MEASUREMENT RESULT	72
6. EUT PHOTOGRAPHS	73
7. TEST SETUP PHOTOGRAPHS	74

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230956606-00C	Original Report	2023/10/16

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Cloud Gaming console
EUT Model:	EVOXSV1
Trade Name:	Evolve III
Operation Frequency:	2412-2462 MHz (802.11b/g/n ht20) 2422-2452 MHz (802.11n ht40)
Maximum Peak Output Power (Conducted):	22.86dBm
Modulation Type:	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n/: OFDM-BPSK, QPSK, 16QAM, 64QAM
Rated Input Voltage:	DC 19V from AC/DC Adapter
Serial Number:	2BQ8-1
EUT Received Date:	2023/9/25
EUT Received Status:	Good

Operation Frequency Detail: For 802.11b/g/n/ ht20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/
Per section 15.31(m), the below frequencies were performed to test:			
Test Channel		Frequency (MHz)	
Lowest		2412	
Middle		2437	
Highest		2462	

For 802.11n ht40:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437	/	/
Per section 15.31(m), the below frequencies were performed to test:			
Test Channel		Frequency (MHz)	
Lowest		2422	
Middle		2437	
Highest		2452	

Antenna Information Detail▲:

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Antenna 1 (Support BT+WLAN)	FPC Antenna	50	2.4~2.5GHz	2.28dBi
			5.15~5.85GHz	2.95dBi
Antenna 2 (Support WLAN)	FPC Antenna	50	2.4~2.5GHz	2.83dBi
			5.15~5.85GHz	2.98dBi

The Method of §15.203 Compliance:

- ☒ Antenna was permanently attached to the unit.
☐ Antenna use a unique type of connector to attach to the EUT.
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
AC/DC Adapter	Shenzhen Jihongda Power Co., Ltd.	JHD-AP045U-190236-AF	Input: 100-240V~50/60Hz1.5A Output: 19V = 2360mA
HDMI Cable	/	/	shielded without ferrite, 1.2 Meter

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.				
Equipment Modifications:	No				
EUT Exercise Software:	DRTU.exe				
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:					
Mode	Channel	Frequency (MHz)	Data Rate	Power Level Setting	
				Chain 0	Chain 1
802.11b	Lowest	2412	1Mbps	14	14
	Middle	2437	1Mbps	14	14
	Highest	2462	1Mbps	14	14
802.11g	Lowest	2412	6Mbps	14	14
	Middle	2437	6Mbps	14	14
	Highest	2462	6Mbps	14	14
802.11n ht20	Lowest	2412	MCS8	14	14
	Middle	2437	MCS8	14	14
	Highest	2462	MCS8	14	14
802.11n ht40	Lowest	2422	MCS8	14	14
	Middle	2437	MCS8	14	14
	Highest	2452	MCS8	14	14
Note:					
1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the power and PSD across all data rates, bandwidths, and modulations.					
2. The device supports SISO in all modes, and MIMO 2T2R in 802.11n mode, per pretest, 2T2R mode was the worst mode and reported for 802.11n mode.					

1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
TOTO LINK	Router	X5000R	X5000RK9T0560
PHILIPS	Mouse	SPK7214	M214BQ210411615
PHILIPS	Keyboard	SPT6234	K234210510742
HP	USB Disk	HPFD206W-32	PAA6918477
HP	USB Disk	HPFD206W-32	PAA6902271
CLC	Earphone	Whiteview5.0	EP21107125
PHILIPS	Monitor1	24PFF5595/T3	XM2A2124000343
AOC	Monitor2	24M2	OHWL5YA000130 H7

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
RJ45 Cable	No	No	1.5	EUT	Router
Mouse Cable	No	No	1.2	EUT	Mouse
Keyboard Cable	No	No	1.2	EUT	Keyboard
Earphone Cable	No	No	0.8	EUT	Earphone
HDMI Cable	No	No	3	Monitor	EUT

AC line conducted emissions:



1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC line conducted emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.203	Antenna Requirement	Compliant
§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

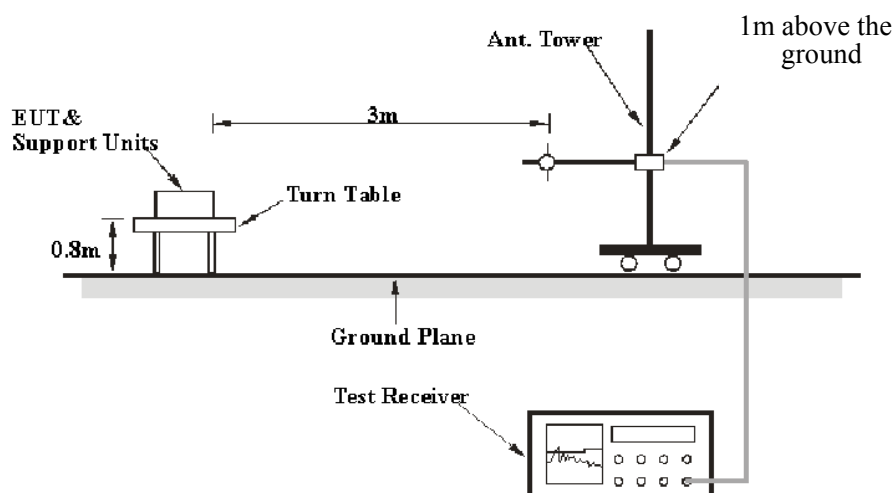
3.2.1 Applicable Standard

FCC §15.247 (d)


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

9kHz~30MHz:



30MHz~1GHz:

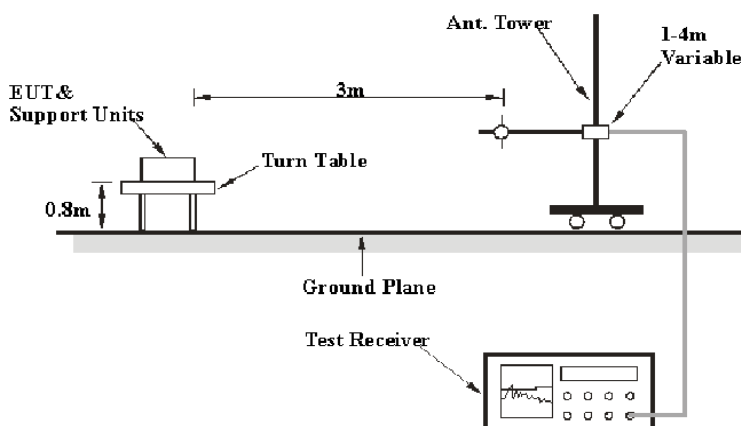

Above 1GHz:

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

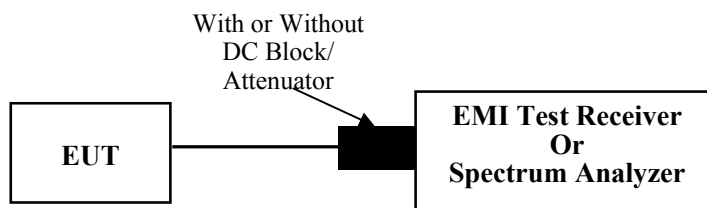
3.3 Minimum 6 dB Bandwidth:

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup




3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.4 99% Occupied Bandwidth:

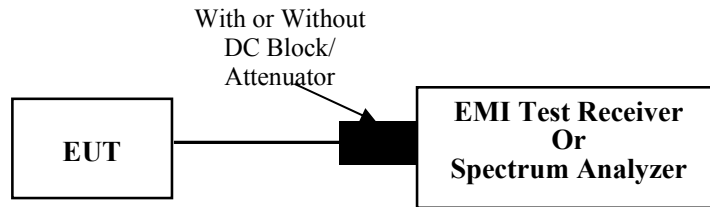3.4.1 EUT Setup



3.4.2 Test Procedure

According to ANSI C63.10-2013 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

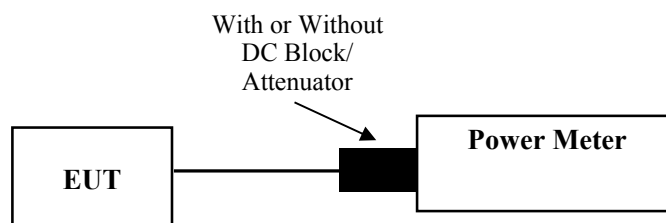
3.5 Maximum Conducted Output Power:

3.5.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

According to ANSI C63.10-2013 Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- a) Set the EUT in transmitting mode.
- b) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- c) Add a correction factor to the display.
- d) Set the power meter to test peak output power, record the result.

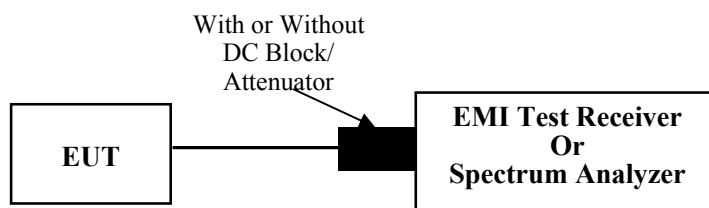
3.6 Maximum Power Spectral Density:

3.6.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2 EUT Setup



3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \cdot \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

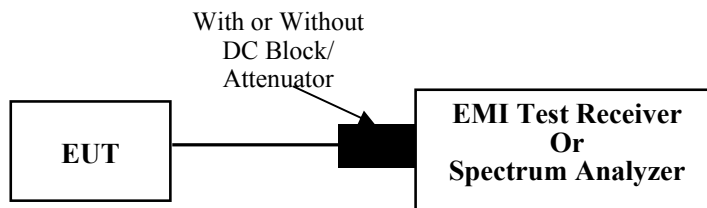
3.7 100 kHz Bandwidth of Frequency Band Edge:

3.7.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.7.2 EUT Setup



3.7.3 Test Procedure

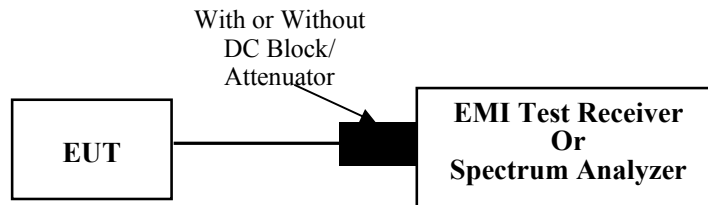
According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.8 Duty Cycle:

3.8.1 EUT Setup



3.8.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2BQ8-1	Test Date:	2023/10/07
Test Site:	CE	Test Mode:	Transmitting (Tested at maximum output power mode 802.11n ht20 Middle channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.4	Relative Humidity: (%)	55	ATM Pressure: (kPa)	100.5
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

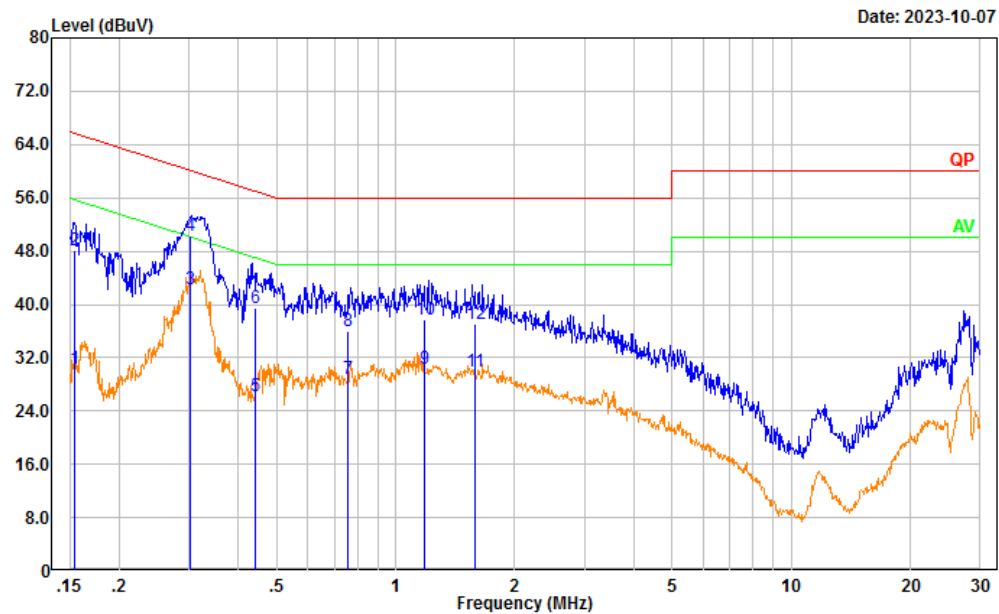
Test Data:

Project No.: CR230956606-RF

Tester: David Huang

Port: Line

Note:




No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	20.67	9.61	30.28	55.77	25.49	Average
2	0.154	38.43	9.61	48.04	65.77	17.73	QP
3	0.302	32.68	9.61	42.29	50.20	7.91	Average
4	0.302	40.74	9.61	50.35	60.20	9.85	QP
5	0.440	16.55	9.61	26.16	47.06	20.90	Average
6	0.440	29.78	9.61	39.39	57.06	17.67	QP
7	0.754	19.15	9.62	28.77	46.00	17.23	Average
8	0.754	26.47	9.62	36.09	56.00	19.91	QP
9	1.181	20.82	9.62	30.44	46.00	15.56	Average
10	1.181	28.01	9.62	37.63	56.00	18.37	QP
11	1.588	20.30	9.63	29.93	46.00	16.07	Average
12	1.588	27.36	9.63	36.99	56.00	19.01	QP

Project No.: CR230956606-RF

Tester: David Huang

Port: neutral

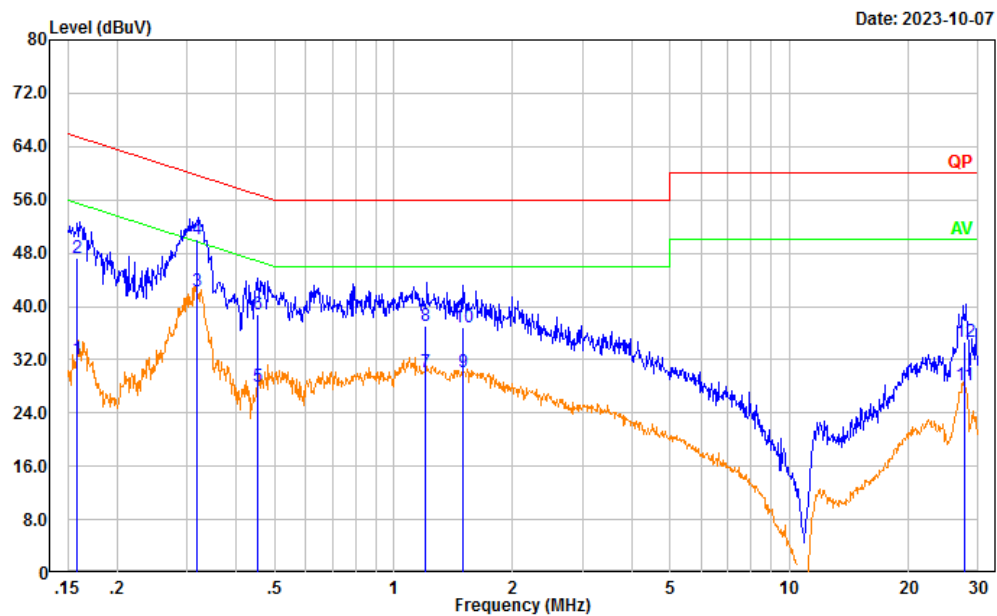Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.158	22.55	9.61	32.16	55.54	23.38	Average
2	0.158	37.61	9.61	47.22	65.54	18.32	QP
3	0.319	32.59	9.61	42.20	49.73	7.53	Average
4	0.319	40.58	9.61	50.19	59.73	9.54	QP
5	0.453	18.40	9.61	28.01	46.81	18.80	Average
6	0.453	29.28	9.61	38.89	56.81	17.92	QP
7	1.206	20.47	9.62	30.09	46.00	15.91	Average
8	1.206	27.50	9.62	37.12	56.00	18.88	QP
9	1.495	20.60	9.62	30.22	46.00	15.78	Average
10	1.495	27.27	9.62	36.89	56.00	19.11	QP
11	27.742	18.38	9.81	28.19	50.00	21.81	Average
12	27.742	24.84	9.81	34.65	60.00	25.35	QP

4.2 Radiation Spurious Emissions

Serial Number:	2BQ8-1	Test Date:	2023/10/1~2023/10/9
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Jeff Luo, Tao Zhu	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26~26.3	Relative Humidity: (%)	53~62	ATM Pressure: (kPa)	100.5~100.7
----------------------	---------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Spurious Emissions Below 1GHz					
EMCO	Passive Loop Antenna	6512	9706-1209	2023/02/15	2026/02/14
Sunol Sciences	Antenna	JB6	A082520-5	2020/10/19	2023/10/18
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Radiation Spurious Emissions Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/08/06	2024/08/05
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/08/06	2024/08/05
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/09	2023/11/08
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/02/05	2024/02/04
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/09/15	2024/09/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/08/06	2024/08/05
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/08/06	2024/08/05
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/08/06	2024/08/05
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

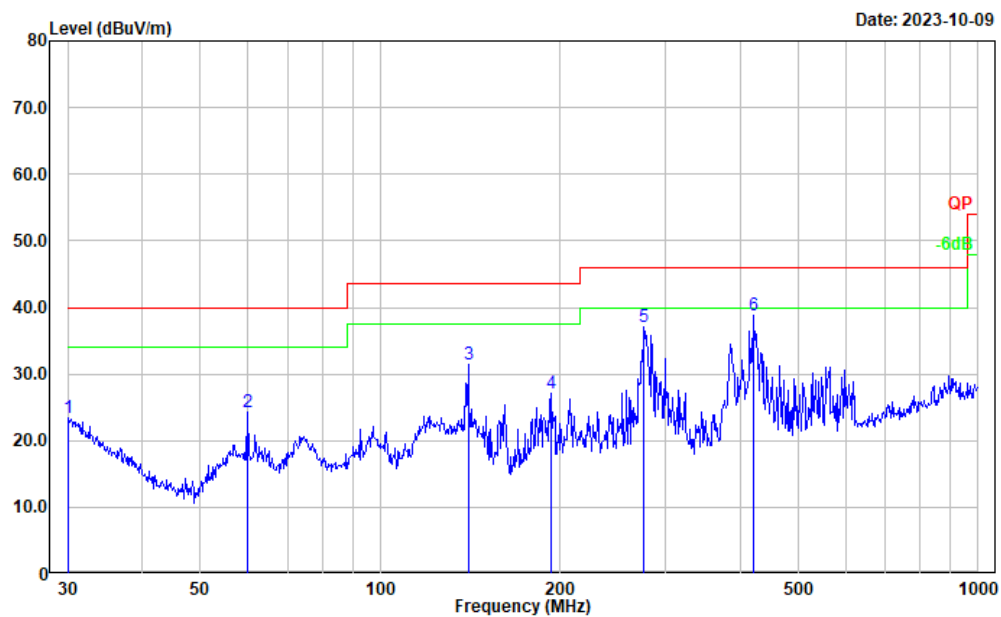
Please refer to the below table and plots.

1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


2) 30MHz-1GHz (Tested at maximum output power mode 802.11n ht20 Middle channel)

Project No.: CR230956606-RF
Tester: Jeff
Polarization: horizontal
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	26.99	-3.60	23.39	40.00	16.61	Peak
2	59.859	41.77	-17.41	24.36	40.00	15.64	Peak
3	140.342	43.40	-11.89	31.51	43.50	11.99	Peak
4	193.095	40.13	-13.04	27.09	43.50	16.41	Peak
5	276.124	48.87	-11.84	37.03	46.00	8.97	Peak
6	420.580	46.71	-7.90	38.81	46.00	7.19	Peak

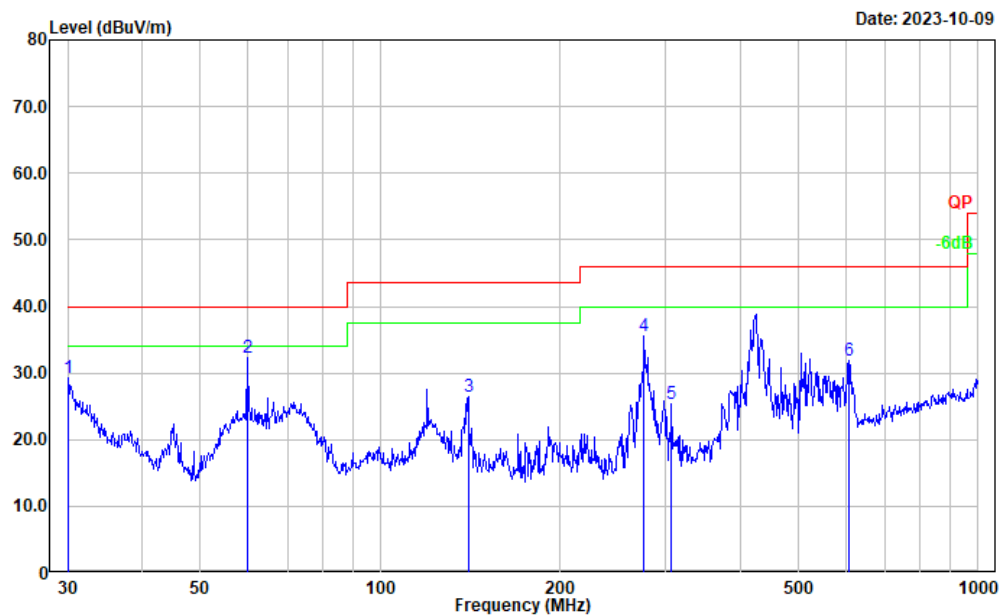Project No.: CR230956606-RF
Tester: Jeff
Polarization: vertical
Note:



No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	32.94	-3.60	29.34	40.00	10.66	Peak
2	59.859	49.75	-17.41	32.34	40.00	7.66	Peak
3	140.342	38.36	-11.89	26.47	43.50	17.03	Peak
4	276.124	47.48	-11.84	35.64	46.00	10.36	Peak
5	306.754	35.87	-10.58	25.29	46.00	20.71	Peak
6	607.787	36.65	-4.82	31.83	46.00	14.17	Peak

3) 1-25GHz:**802.11b Mode, Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2412.000	66.00	PK	H	31.53	97.53	N/A	N/A
2412.000	61.88	AV	H	31.53	93.41	N/A	N/A
2412.000	68.23	PK	V	31.53	99.76	N/A	N/A
2412.000	63.80	AV	V	31.53	95.33	N/A	N/A
2390.000	27.61	PK	V	31.46	59.07	74.00	14.93
2390.000	14.36	AV	V	31.46	45.82	54.00	8.18
4824.000	35.75	PK	V	10.94	46.69	74.00	27.31
4824.000	22.68	AV	V	10.94	33.62	54.00	20.38
7236.000	34.23	PK	V	14.44	48.67	74.00	25.33
7236.000	21.23	AV	V	14.44	35.67	54.00	18.33
Middle Channel: 2437 MHz							
2437.000	65.44	PK	H	31.60	97.04	N/A	N/A
2437.000	60.36	AV	H	31.60	91.96	N/A	N/A
2437.000	67.83	PK	V	31.60	99.43	N/A	N/A
2437.000	62.44	AV	V	31.60	94.04	N/A	N/A
4874.000	36.66	PK	V	11.05	47.71	74.00	26.29
4874.000	23.74	AV	V	11.05	34.79	54.00	19.21
7311.000	34.19	PK	V	14.80	48.99	74.00	25.01
7311.000	21.41	AV	V	14.80	36.21	54.00	17.79
High Channel: 2462MHz							
2462.000	65.25	PK	H	31.63	96.88	N/A	N/A
2462.000	60.44	AV	H	31.63	92.07	N/A	N/A
2462.000	67.69	PK	V	31.63	99.32	N/A	N/A
2462.000	62.58	AV	V	31.63	94.21	N/A	N/A
2483.500	27.36	PK	V	31.64	59.00	74.00	15.00
2483.500	14.57	AV	V	31.64	46.21	54.00	7.79
4924.000	37.80	PK	V	11.18	48.98	74.00	25.02
4924.000	24.63	AV	V	11.18	35.81	54.00	18.19
7386.000	34.28	PK	V	14.89	49.17	74.00	24.83
7386.000	21.42	AV	V	14.89	36.31	54.00	17.69

802.11b Mode, Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2412.000	65.76	PK	H	31.53	97.29	N/A	N/A
2412.000	60.41	AV	H	31.53	91.94	N/A	N/A
2412.000	67.82	PK	V	31.53	99.35	N/A	N/A
2412.000	62.36	AV	V	31.53	93.89	N/A	N/A
2390.000	27.25	PK	V	31.46	58.71	74.00	15.29
2390.000	14.41	AV	V	31.46	45.87	54.00	8.13
4824.000	35.60	PK	V	10.94	46.54	74.00	27.46
4824.000	21.41	AV	V	10.94	32.35	54.00	21.65
7236.000	34.48	PK	V	14.44	48.92	74.00	25.08
7236.000	21.43	AV	V	14.44	35.87	54.00	18.13
Middle Channel: 2437 MHz							
2437.000	65.82	PK	H	31.60	97.42	N/A	N/A
2437.000	60.15	AV	H	31.60	91.75	N/A	N/A
2437.000	67.47	PK	V	31.60	99.07	N/A	N/A
2437.000	62.39	AV	V	31.60	93.99	N/A	N/A
4874.000	35.46	PK	V	11.05	46.51	74.00	27.49
4874.000	22.56	AV	V	11.05	33.61	54.00	20.39
7311.000	34.51	PK	V	14.80	49.31	74.00	24.69
7311.000	21.47	AV	V	14.80	36.27	54.00	17.73
High Channel: 2462MHz							
2462.000	66.42	PK	H	31.63	98.05	N/A	N/A
2462.000	61.20	AV	H	31.63	92.83	N/A	N/A
2462.000	68.36	PK	V	31.63	99.99	N/A	N/A
2462.000	63.28	AV	V	31.63	94.91	N/A	N/A
2483.500	27.66	PK	V	31.64	59.30	74.00	14.70
2483.500	14.24	AV	V	31.64	45.88	54.00	8.12
4924.000	36.62	PK	V	11.18	47.80	74.00	26.20
4924.000	23.79	AV	V	11.18	34.97	54.00	19.03
7386.000	34.59	PK	V	14.89	49.48	74.00	24.52
7386.000	21.33	AV	V	14.89	36.22	54.00	17.78

802.11g Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2412.000	70.15	PK	H	31.53	101.68	N/A	N/A
2412.000	57.63	AV	H	31.53	89.16	N/A	N/A
2412.000	71.23	PK	V	31.53	102.76	N/A	N/A
2412.000	58.64	AV	V	31.53	90.17	N/A	N/A
2390.000	26.92	PK	V	31.46	58.38	74.00	15.62
2390.000	14.06	AV	V	31.46	45.52	54.00	8.48
4824.000	35.28	PK	V	10.94	46.22	74.00	27.78
4824.000	22.45	AV	V	10.94	33.39	54.00	20.61
7236.000	33.47	PK	V	14.44	47.91	74.00	26.09
7236.000	20.12	AV	V	14.44	34.56	54.00	19.44
Middle Channel: 2437 MHz							
2437.000	70.61	PK	H	31.60	102.21	N/A	N/A
2437.000	57.25	AV	H	31.60	88.85	N/A	N/A
2437.000	71.42	PK	V	31.60	103.02	N/A	N/A
2437.000	57.92	AV	V	31.60	89.52	N/A	N/A
4874.000	34.88	PK	V	11.05	45.93	74.00	28.07
4874.000	21.41	AV	V	11.05	32.46	54.00	21.54
7311.000	33.74	PK	V	14.80	48.54	74.00	25.46
7311.000	20.36	AV	V	14.80	35.16	54.00	18.84
High Channel: 2462MHz							
2462.000	69.88	PK	H	31.63	101.51	N/A	N/A
2462.000	56.32	AV	H	31.63	87.95	N/A	N/A
2462.000	70.25	PK	V	31.63	101.88	N/A	N/A
2462.000	57.14	AV	V	31.63	88.77	N/A	N/A
2483.500	27.56	PK	V	31.64	59.20	74.00	14.80
2483.500	14.17	AV	V	31.64	45.81	54.00	8.19
4924.000	35.29	PK	V	11.18	46.47	74.00	27.53
4924.000	22.45	AV	V	11.18	33.63	54.00	20.37
7386.000	34.66	PK	V	14.89	49.55	74.00	24.45
7386.000	21.23	AV	V	14.89	36.12	54.00	17.88

802.11g Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2412.000	69.56	PK	H	31.53	101.09	N/A	N/A
2412.000	56.31	AV	H	31.53	87.84	N/A	N/A
2412.000	70.45	PK	V	31.53	101.98	N/A	N/A
2412.000	57.63	AV	V	31.53	89.16	N/A	N/A
2390.000	26.89	PK	V	31.46	58.35	74.00	15.65
2390.000	14.12	AV	V	31.46	45.58	54.00	8.42
4824.000	35.18	PK	V	10.94	46.12	74.00	27.88
4824.000	22.46	AV	V	10.94	33.40	54.00	20.60
7236.000	33.58	PK	V	14.44	48.02	74.00	25.98
7236.000	20.39	AV	V	14.44	34.83	54.00	19.17
Middle Channel: 2437 MHz							
2437.000	69.23	PK	H	31.60	100.83	N/A	N/A
2437.000	56.49	AV	H	31.60	88.09	N/A	N/A
2437.000	70.40	PK	V	31.60	102.00	N/A	N/A
2437.000	57.86	AV	V	31.60	89.46	N/A	N/A
4874.000	34.16	PK	V	11.05	45.21	74.00	28.79
4874.000	21.69	AV	V	11.05	32.74	54.00	21.26
7311.000	33.78	PK	V	14.80	48.58	74.00	25.42
7311.000	20.14	AV	V	14.80	34.94	54.00	19.06
High Channel: 2462MHz							
2462.000	70.46	PK	H	31.63	102.09	N/A	N/A
2462.000	57.88	AV	H	31.63	89.51	N/A	N/A
2462.000	71.69	PK	V	31.63	103.32	N/A	N/A
2462.000	58.46	AV	V	31.63	90.09	N/A	N/A
2483.500	27.63	PK	V	31.64	59.27	74.00	14.73
2483.500	14.41	AV	V	31.64	46.05	54.00	7.95
4924.000	34.96	PK	V	11.18	46.14	74.00	27.86
4924.000	21.47	AV	V	11.18	32.65	54.00	21.35
7386.000	34.60	PK	V	14.89	49.49	74.00	24.51
7386.000	21.55	AV	V	14.89	36.44	54.00	17.56

802.11n ht20 Mode (MIMO):


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2412 MHz							
2412.000	72.69	PK	H	31.53	104.22	N/A	N/A
2412.000	57.49	AV	H	31.53	89.02	N/A	N/A
2412.000	74.54	PK	V	31.53	106.07	N/A	N/A
2412.000	59.87	AV	V	31.53	91.40	N/A	N/A
2390.000	27.87	PK	V	31.46	59.33	74.00	14.67
2390.000	14.68	AV	V	31.46	46.14	54.00	7.86
4824.000	35.31	PK	V	10.94	46.25	74.00	27.75
4824.000	22.44	AV	V	10.94	33.38	54.00	20.62
7236.000	34.53	PK	V	14.44	48.97	74.00	25.03
7236.000	21.51	AV	V	14.44	35.95	54.00	18.05
Middle Channel: 2437 MHz							
2437.000	72.56	PK	H	31.60	104.16	N/A	N/A
2437.000	57.34	AV	H	31.60	88.94	N/A	N/A
2437.000	73.97	PK	V	31.60	105.57	N/A	N/A
2437.000	59.63	AV	V	31.60	91.23	N/A	N/A
4874.000	35.86	PK	V	11.05	46.91	74.00	27.09
4874.000	22.74	AV	V	11.05	33.79	54.00	20.21
7311.000	33.83	PK	V	14.80	48.63	74.00	25.37
7311.000	20.44	AV	V	14.80	35.24	54.00	18.76
High Channel: 2462MHz							
2462.000	73.64	PK	H	31.63	105.27	N/A	N/A
2462.000	60.78	AV	H	31.63	92.41	N/A	N/A
2462.000	75.36	PK	V	31.63	106.99	N/A	N/A
2462.000	62.58	AV	V	31.63	94.21	N/A	N/A
2483.500	28.22	PK	V	31.64	59.86	74.00	14.14
2483.500	14.55	AV	V	31.64	46.19	54.00	7.81
4924.000	35.71	PK	V	11.18	46.89	74.00	27.11
4924.000	22.58	AV	V	11.18	33.76	54.00	20.24
7386.000	34.28	PK	V	14.89	49.17	74.00	24.83
7386.000	21.85	AV	V	14.89	36.74	54.00	17.26

802.11n ht40 Mode (MIMO):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 2422 MHz							
2422.000	68.44	PK	H	31.56	100.00	N/A	N/A
2422.000	55.35	AV	H	31.56	86.91	N/A	N/A
2422.000	69.81	PK	V	31.56	101.37	N/A	N/A
2422.000	56.84	AV	V	31.56	88.40	N/A	N/A
2390.000	30.25	PK	V	31.46	61.71	74.00	12.29
2390.000	17.35	AV	V	31.46	48.81	54.00	5.19
4844.000	33.60	PK	V	10.96	44.56	74.00	29.44
4844.000	20.47	AV	V	10.96	31.43	54.00	22.57
7266.000	33.59	PK	V	14.63	48.22	74.00	25.78
7266.000	20.39	AV	V	14.63	35.02	54.00	18.98
Middle Channel: 2437 MHz							
2437.000	69.72	PK	H	31.60	101.32	N/A	N/A
2437.000	56.39	AV	H	31.60	87.99	N/A	N/A
2437.000	70.24	PK	V	31.60	101.84	N/A	N/A
2437.000	57.34	AV	V	31.60	88.94	N/A	N/A
4874.000	34.25	PK	V	11.05	45.30	74.00	28.70
4874.000	21.14	AV	V	11.05	32.19	54.00	21.81
7311.000	33.68	PK	V	14.80	48.48	74.00	25.52
7311.000	20.23	AV	V	14.80	35.03	54.00	18.97
High Channel: 2452 MHz							
2452.000	69.32	PK	H	31.63	100.95	N/A	N/A
2452.000	56.47	AV	H	31.63	88.10	N/A	N/A
2452.000	70.61	PK	V	31.63	102.24	N/A	N/A
2452.000	57.38	AV	V	31.63	89.01	N/A	N/A
2483.500	29.65	PK	V	31.64	61.29	74.00	12.71
2483.500	17.36	AV	V	31.64	49.00	54.00	5.00
4904.000	33.57	PK	V	11.14	44.71	74.00	29.29
4904.000	20.38	AV	V	11.14	31.52	54.00	22.48
7356.000	33.70	PK	V	14.80	48.50	74.00	25.50
7356.000	20.40	AV	V	14.80	35.20	54.00	18.80


Worst Test plots (802.11n ht20 MIMO High channel was the worst):

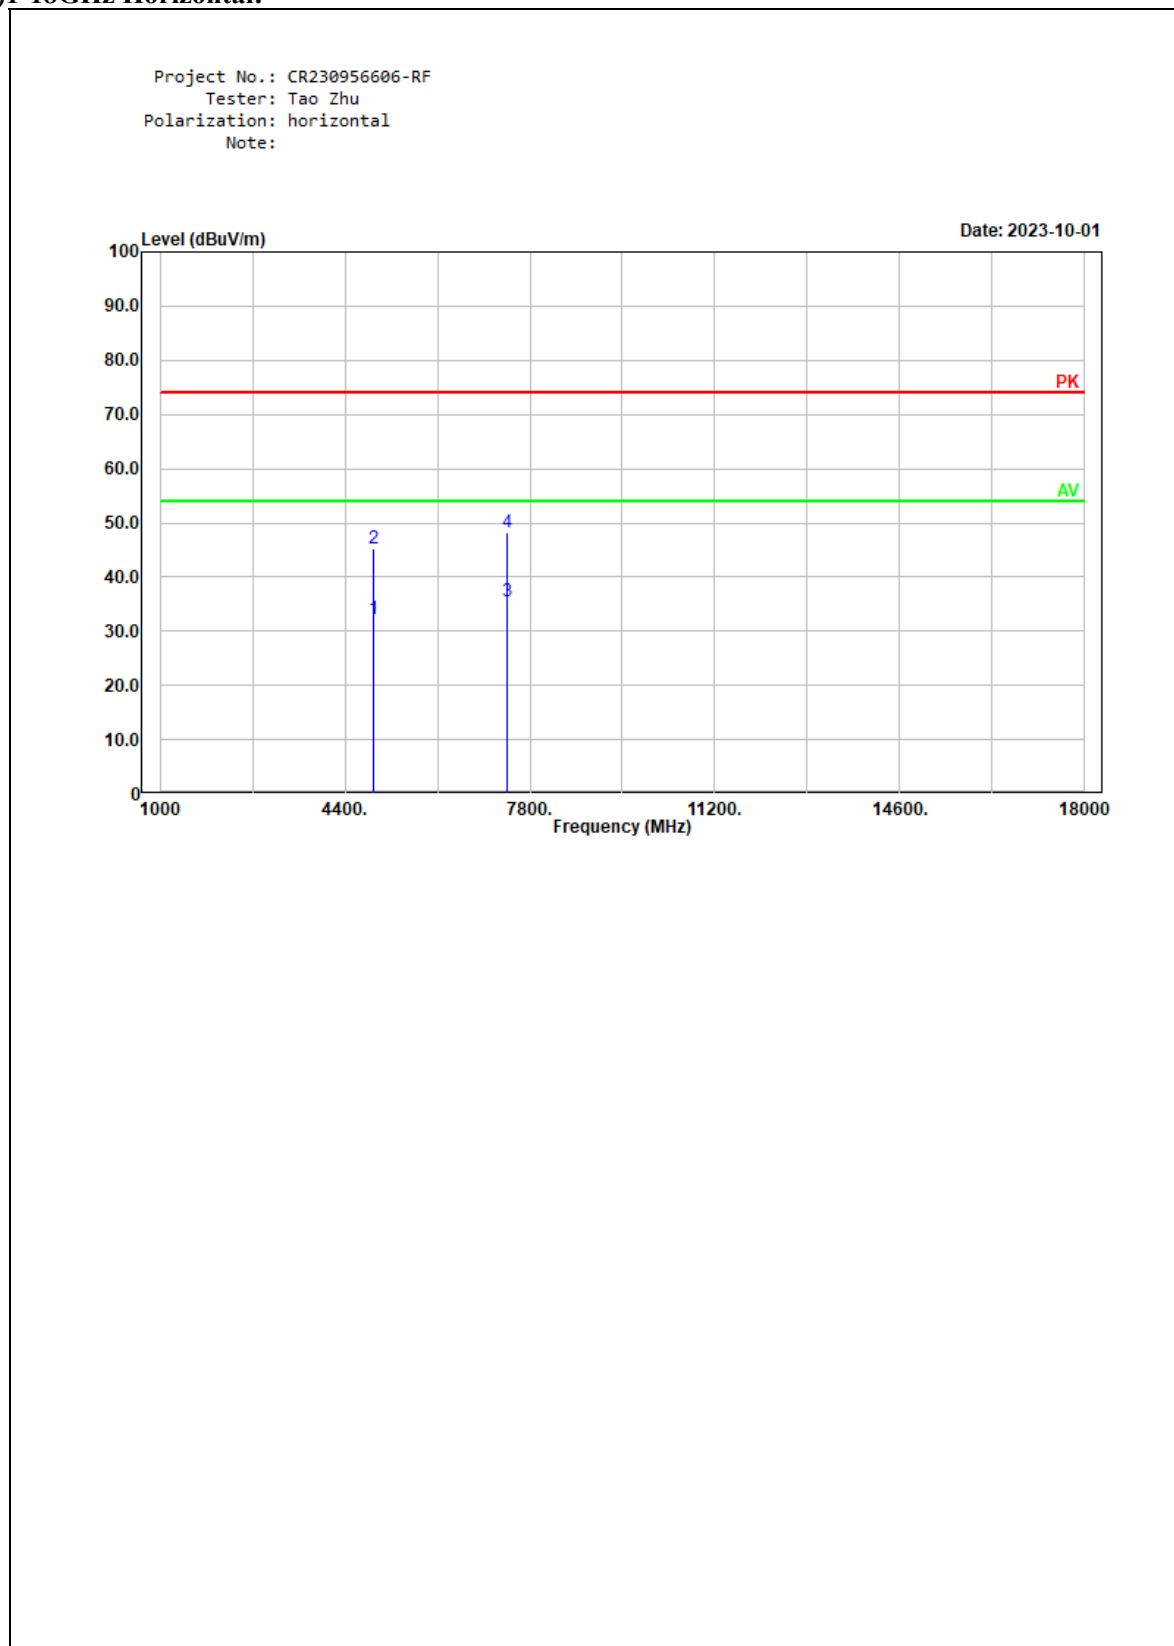1) 1-18GHz Horizontal:




1-18GHz Vertical:

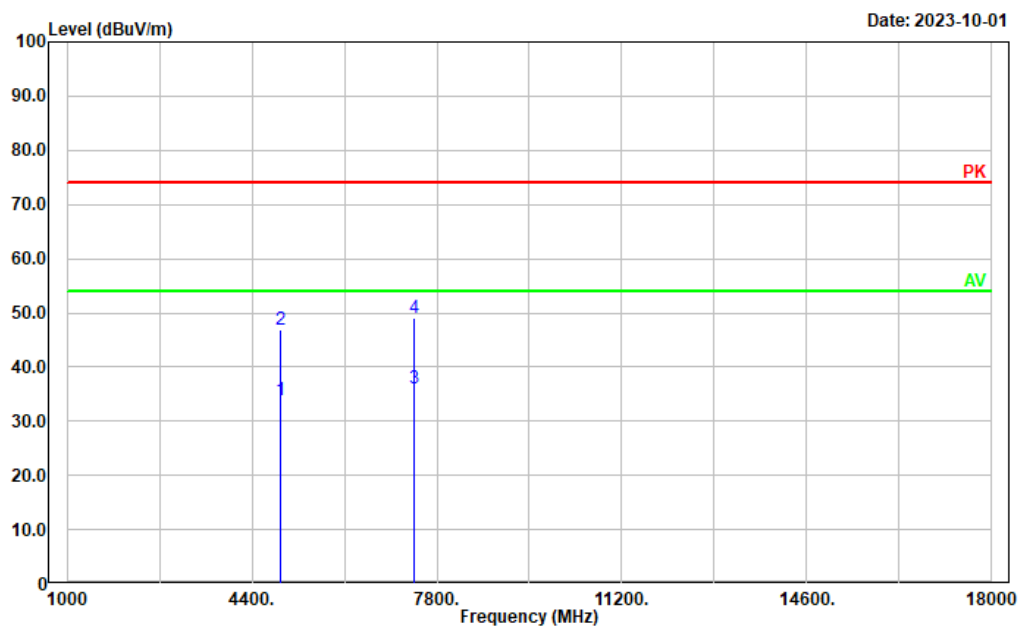Project No.: CR230956606-RF
Tester: Tao Zhu
Polarization: Vertical
Note:




2)18-25GHz Horizontal:

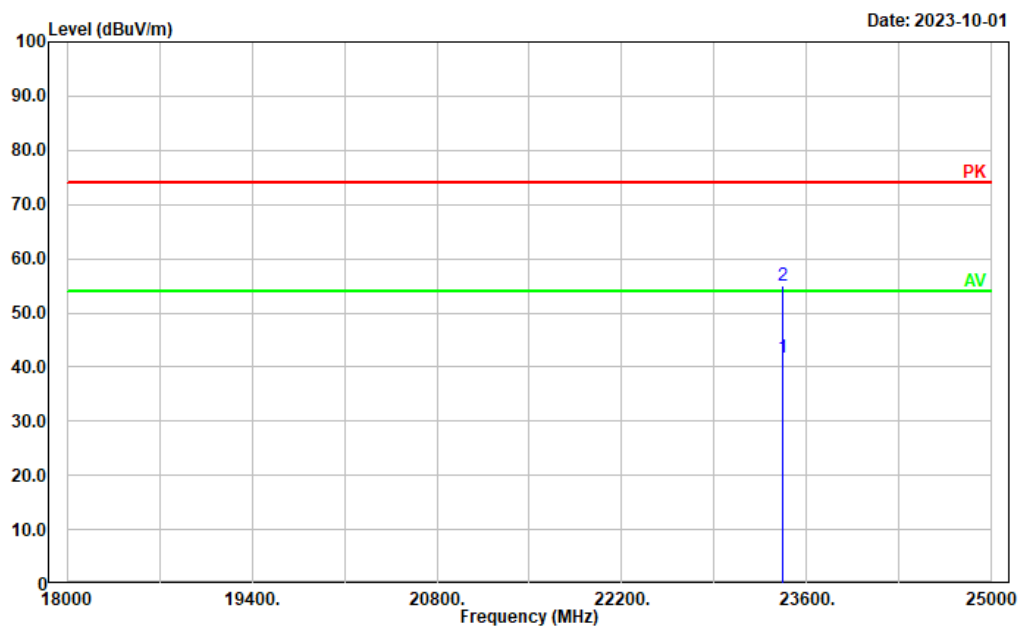Project No.: CR230956606-RF
Tester: Tao Zhu
Polarization: Horizontal
Note:



18-25GHz Vertical:

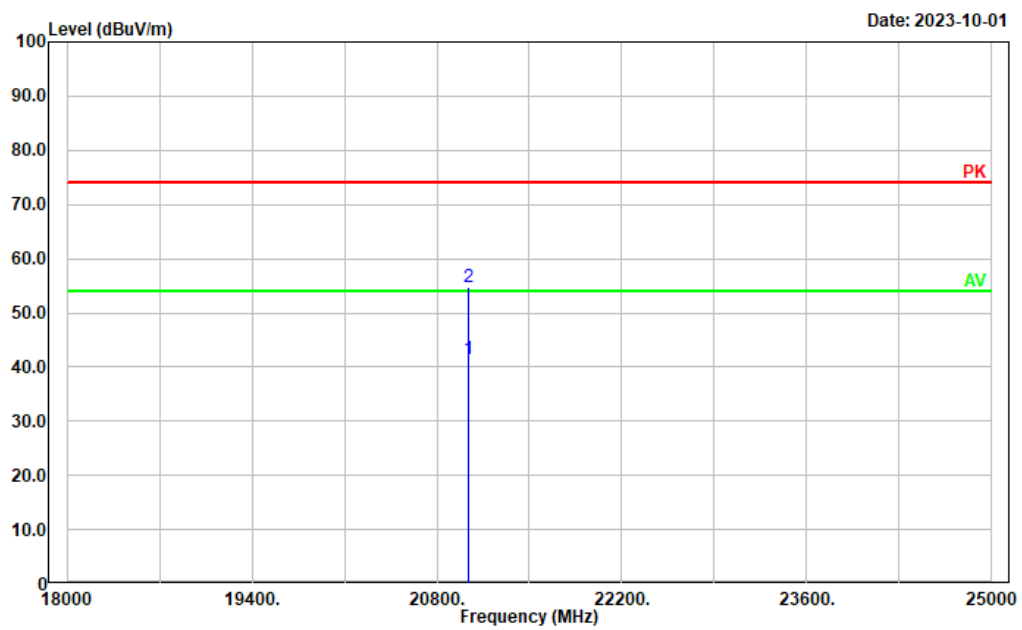Project No.: CR230956606-RF
Tester: Tao Zhu
Polarization: Vertical
Note:



4.3 Minimum 6 dB Emission Bandwidth

Serial Number:	2BQ8-1	Test Date:	2023/10/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A




* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:




Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
802.11b	2412	10.24	0.5
	2437	10.16	0.5
	2462	10.08	0.5
802.11g	2412	15.20	0.5
	2437	15.20	0.5
	2462	15.20	0.5
802.11n ht20	2412	18.72	0.5
	2437	18.56	0.5
	2462	18.40	0.5
802.11n ht40	2422	37.76	0.5
	2437	37.60	0.5
	2452	37.60	0.5

Note: Pre-scan all antennas, worst case (Chain 0) was reported.

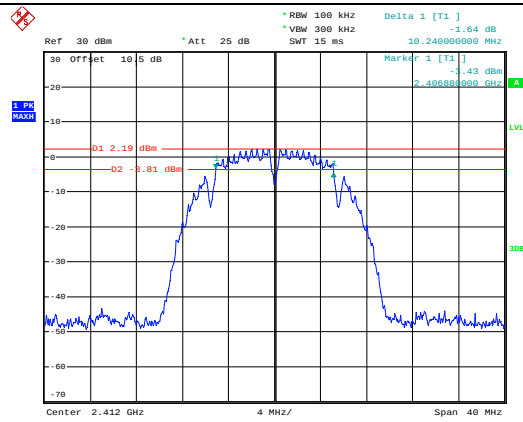
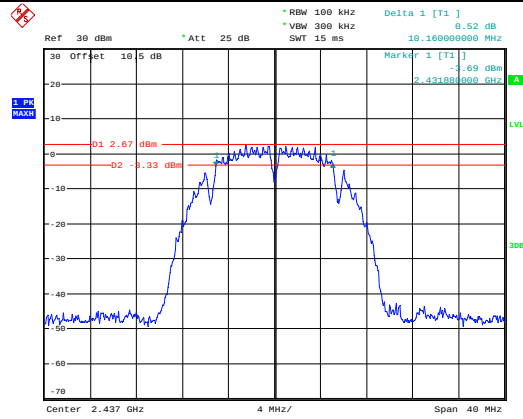
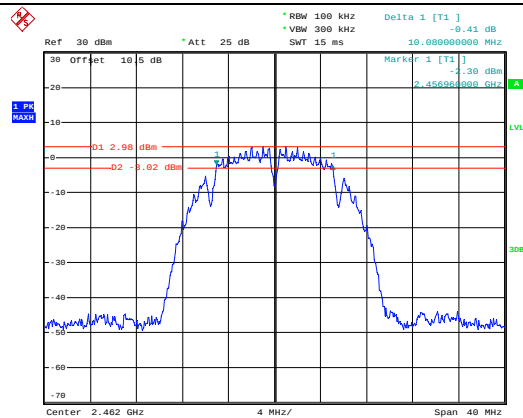
6dB Emission Bandwidth

802.11b
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:10:21802.11b
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:12:01802.11b
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:13:15

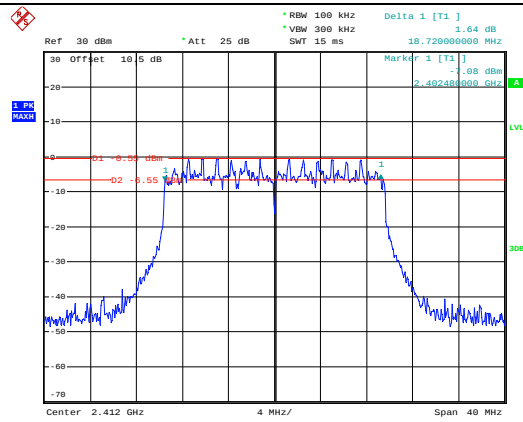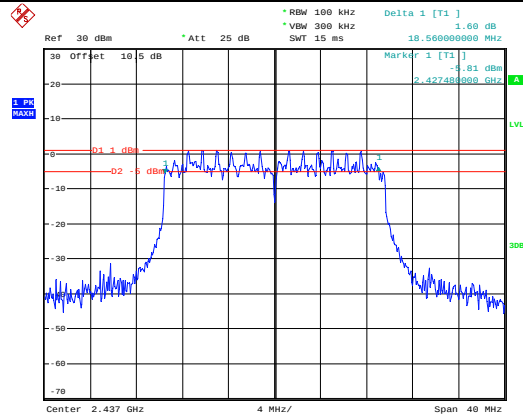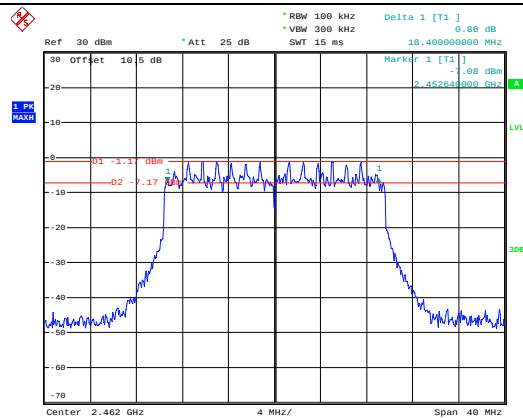6dB Emission Bandwidth

802.11n ht20
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:23:19802.11n ht20
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:25:39802.11n ht20
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:28:35

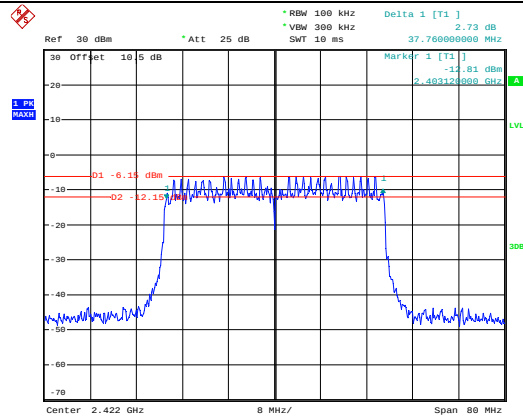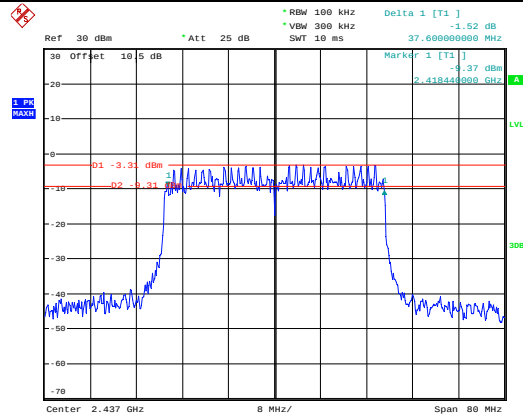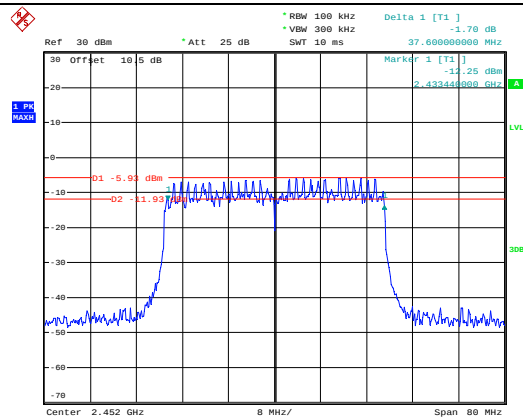6dB Emission Bandwidth

802.11n ht40
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:31:07802.11n ht40
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:34:19802.11n ht40
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:37:49

4.4 99% Occupied Bandwidth

Serial Number:	2BQ8-1	Test Date:	2023/10/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A




* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:




Test Modes	Test Channel	Test Frequency (MHz)	99% Occupied Bandwidth (MHz)
802.11b	Lowest	2412	13.44
	Middle	2437	13.52
	Highest	2462	13.52
802.11g	Lowest	2412	16.64
	Middle	2437	16.72
	Highest	2462	16.72
802.11n ht20	Lowest	2412	19.04
	Middle	2437	19.04
	Highest	2462	19.04
802.11n ht40	Lowest	2422	38.08
	Middle	2437	38.08
	Highest	2452	38.08

Note: Pre-scan all antennas, worst case (Chain 0) was reported.

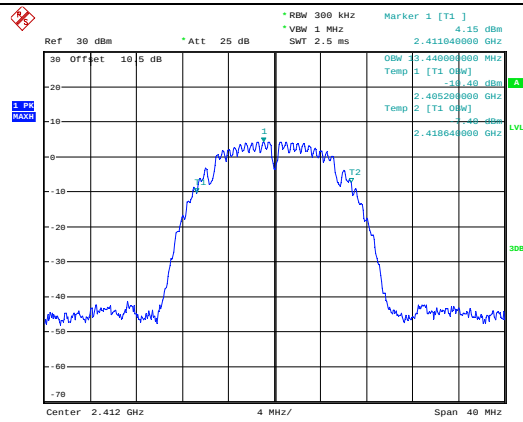
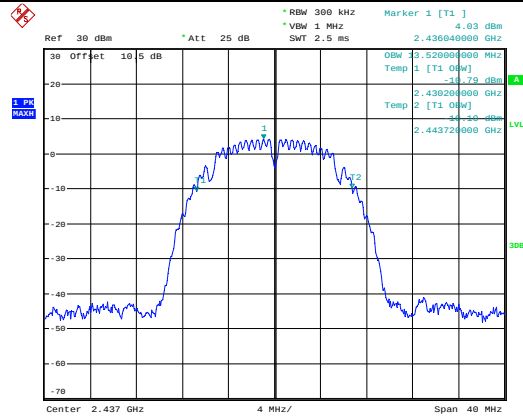
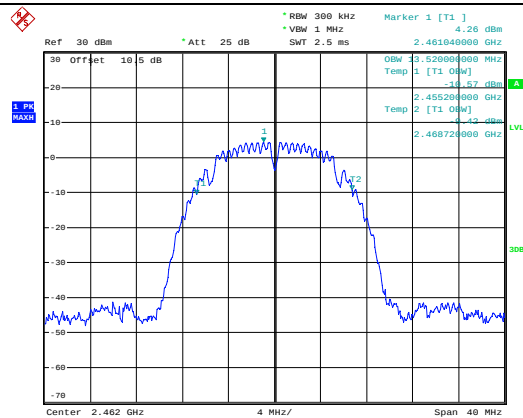
99% Occupied Bandwidth

802.11b
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:10:34802.11b
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:12:14802.11b
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:13:28

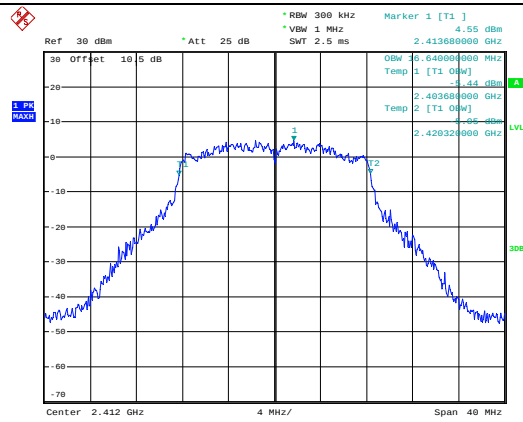
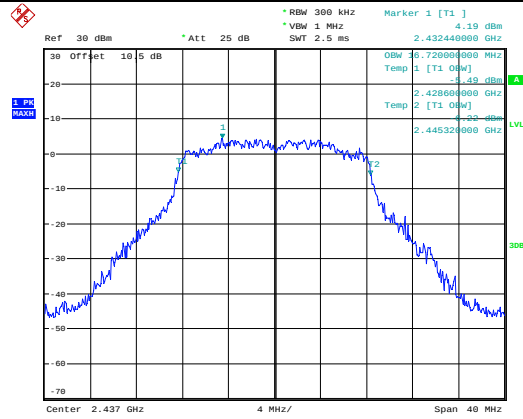
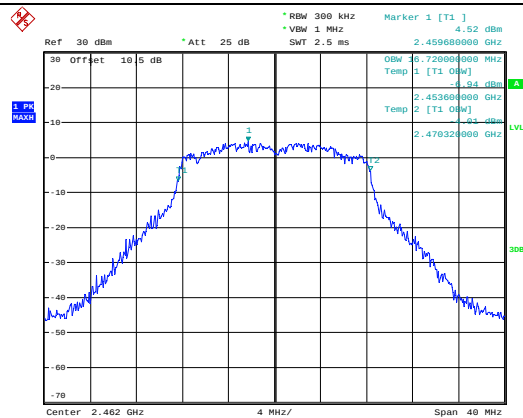
99% Occupied Bandwidth

802.11g
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:19:05802.11g
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:17:24802.11g
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:15:24

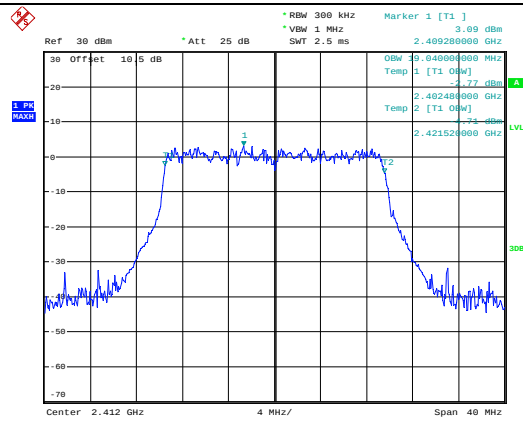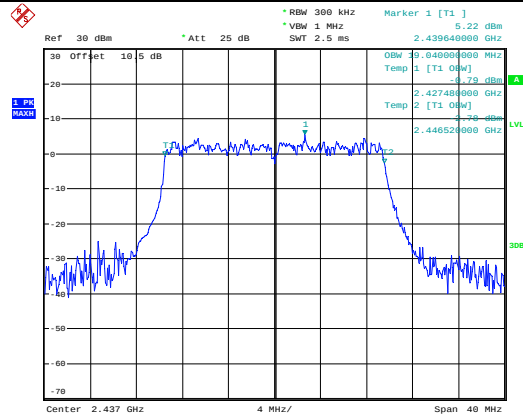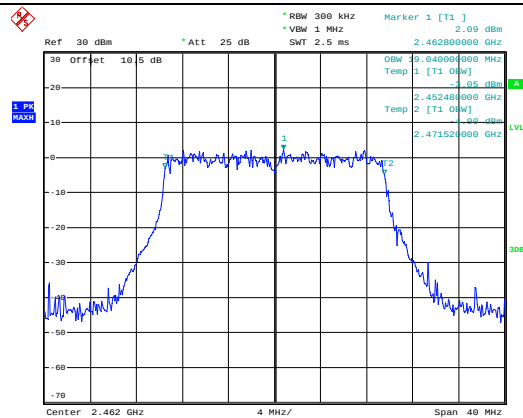99% Occupied Bandwidth

802.11n ht20
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:23:45802.11n ht20
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:26:02802.11n ht20
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:28:51

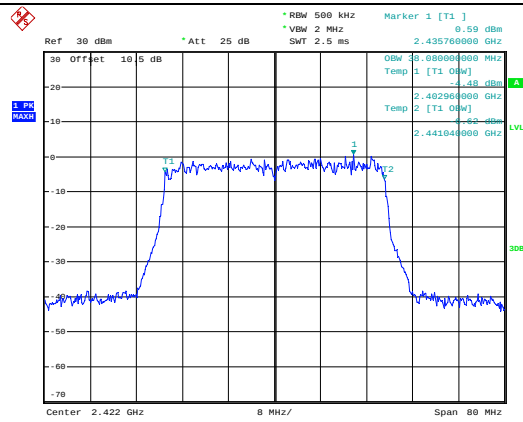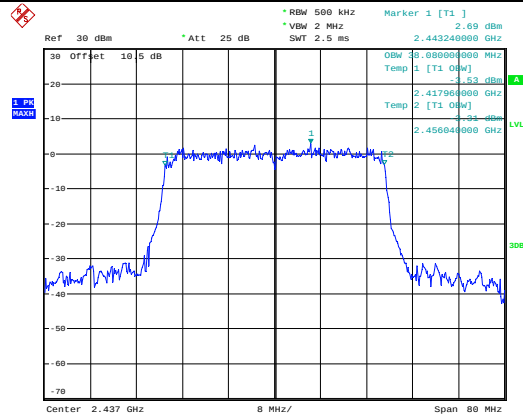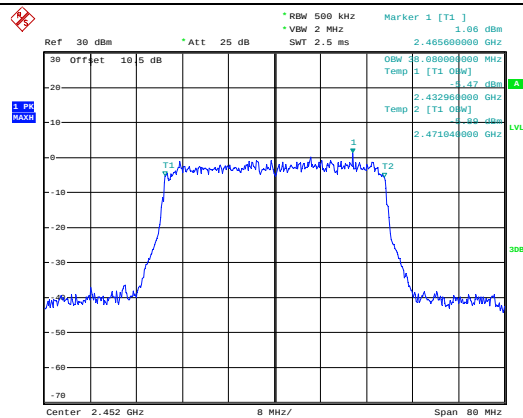99% Occupied Bandwidth

802.11n ht40
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:31:27802.11n ht40
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:34:36802.11n ht40
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:38:09

4.5 Maximum Conducted Output Power

Serial Number:	2BQ8-1	Test Date:	2023/9/27
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.6	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.5
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)			Limit (dBm)
		Chain 0	Chain 1	Total	
802.11b	2412	16.46	17.34	/	30
	2437	16.43	15.42	/	30
	2462	16.49	15.76	/	30
802.11g	2412	19.87	19.88	/	30
	2437	20.12	19.69	/	30
	2462	19.86	19.86	/	30
802.11n ht20	2412	19.09	20.36	22.78	30
	2437	20.05	19.65	22.86	30
	2462	18.43	18.03	21.24	30
802.11n ht40	2422	16.54	16.42	19.49	30
	2437	18.98	18.14	21.59	30
	2452	16.67	16.65	19.67	30

Note:

- The total Peak output power = $10 \cdot \log [(10^{\text{Chain 0 Peak output power}/10}) + (10^{\text{Chain 1 Peak output power}/10})]$
- The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:
Array Gain = 0 dB (i.e., no array gain) for $N_{\text{ANT}} \leq 4$
Directional gain = $G_{\text{ANT MAX}} + \text{Array Gain} = 2.83\text{dBi} < 6\text{dBi}$
So, the maximum output power limit does not need to be reduced.

4.6 Maximum Power Spectral Density

Serial Number:	2BQ8-1	Test Date:	2023/10/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Test Frequency (MHz)	Reading(dBm/3kHz)		Maximum Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
		Chain 0	Chain 1		
802.11b	2412	-11.08	-12.27	/	8.00
	2437	-12.31	-10.77	/	8.00
	2462	-11.96	-12.24	/	8.00
802.11g	2412	-11.87	-12.24	/	8.00
	2437	-12.63	-11.56	/	8.00
	2462	-11.66	-13.18	/	8.00
802.11n ht20	2412	-14.06	-14.37	-11.20	8.00
	2437	-12.07	-13.6	-9.76	8.00
	2462	-14.66	-15.48	-12.04	8.00
802.11n ht40	2422	-17.64	-16.57	-14.06	8.00
	2437	-15.58	-15.65	-12.60	8.00
	2452	-17.85	-18.34	-15.08	8.00

Note:

1. The total Power Spectral Density = $10 \cdot \log [(10^{\text{Chain 0 Power Spectral Density}/10}) + (10^{\text{Chain 1 Power Spectral Density}/10})]$


2. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on IEEE 802.11 devices, the Array Gain = $10 \log (N_{\text{ANT}}/N_{\text{SS}})$ dB;

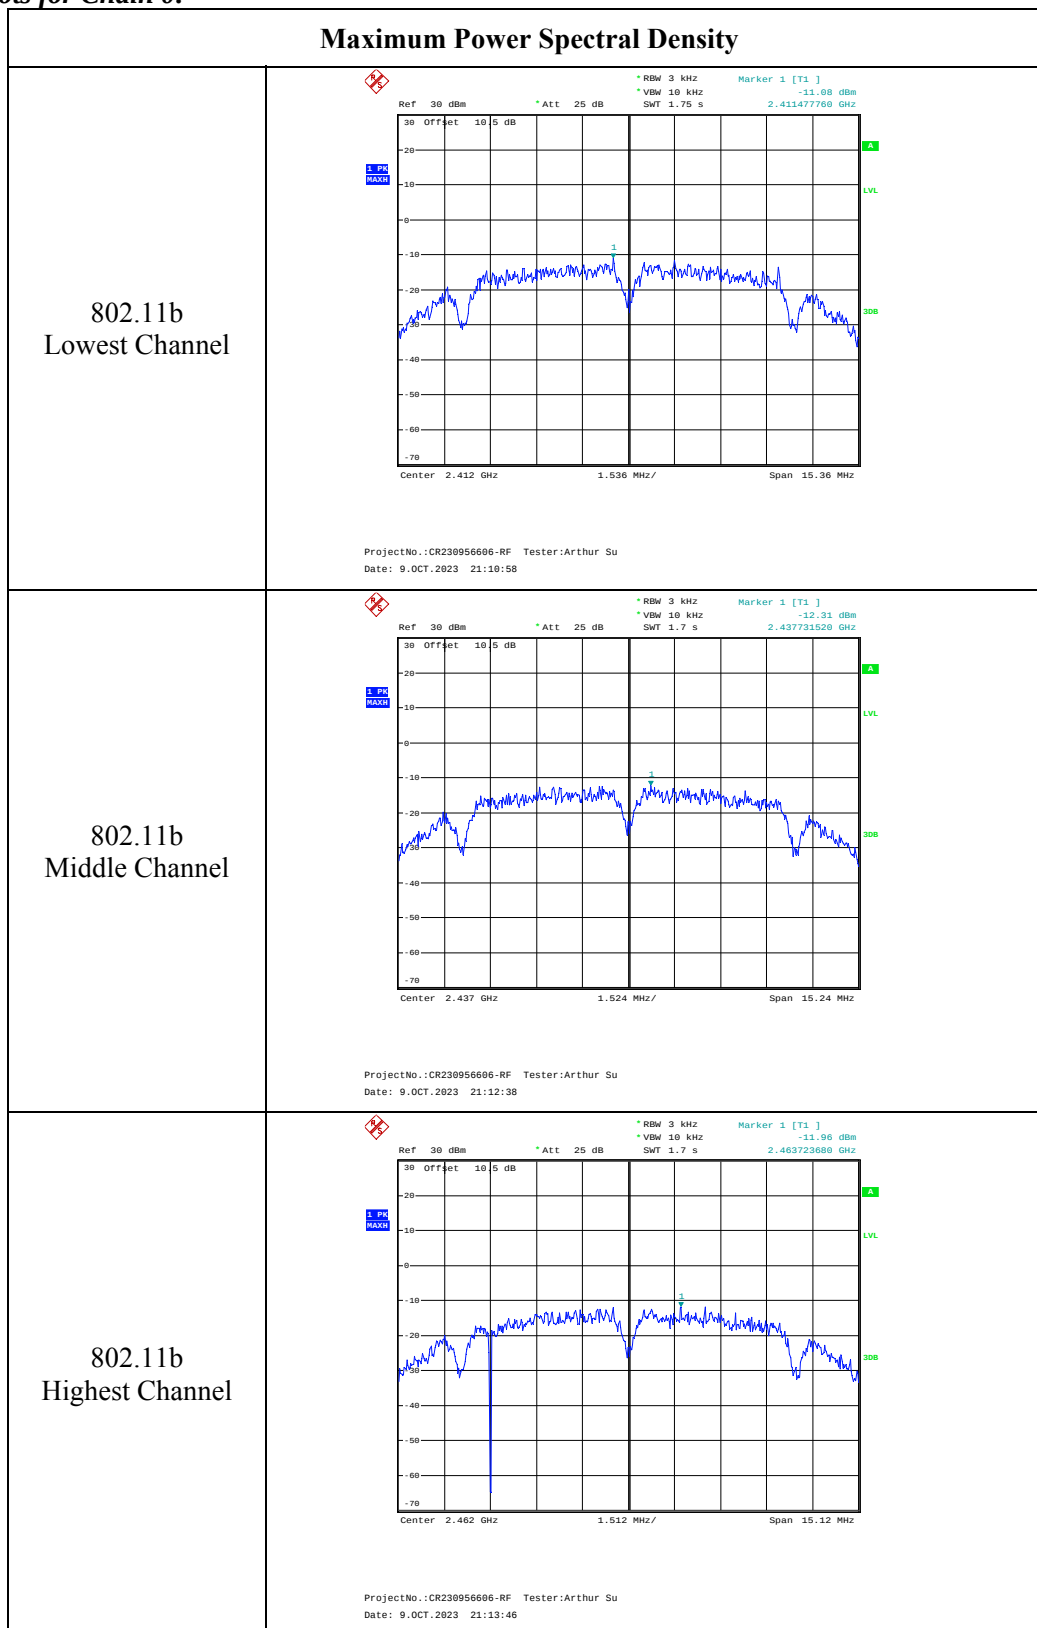So, the Directional gain = $G_{\text{ANT MAX}} + 10 \log (N_{\text{ANT}}/N_{\text{SS}}) = 2.83 + 10 \log (2/1) = 5.83\text{dBi} < 6 \text{ dBi}$.
So, the power spectral density (PSD) limit does not need to be reduced.

Test Plots for Chain 0:


Maximum Power Spectral Density

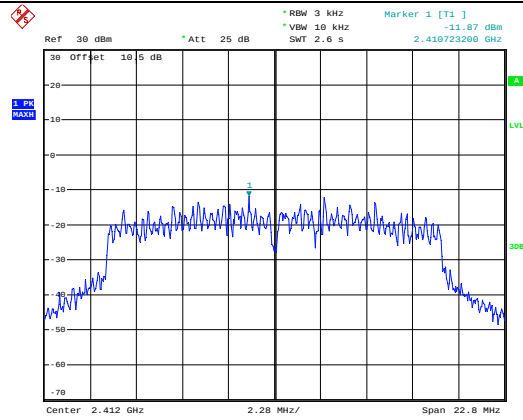802.11g
Lowest Channel




ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:19:56

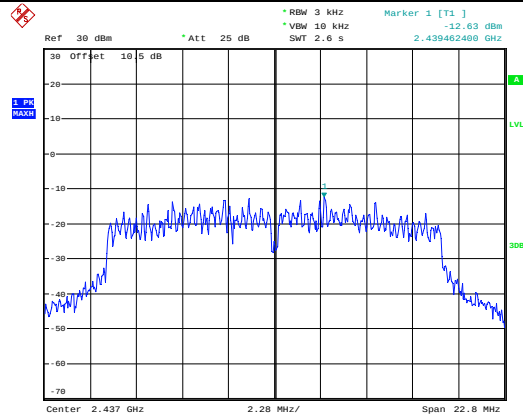802.11g
Middle Channel






ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:18:06



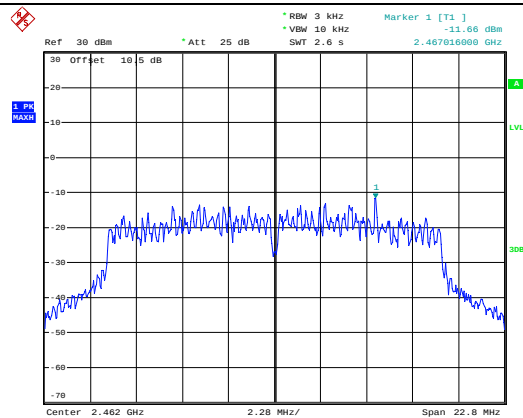
802.11g
Highest Channel




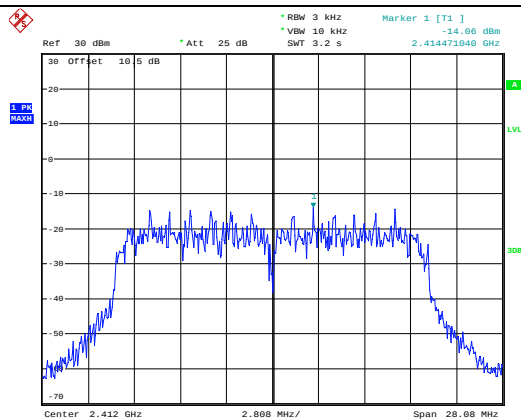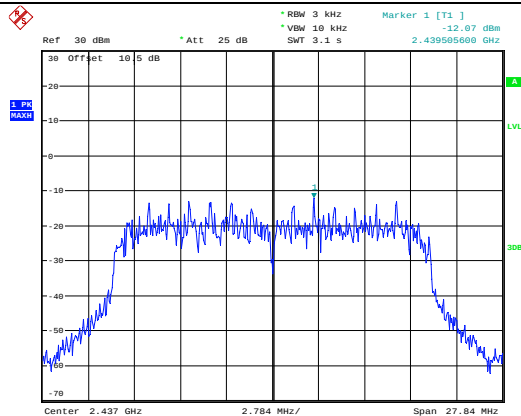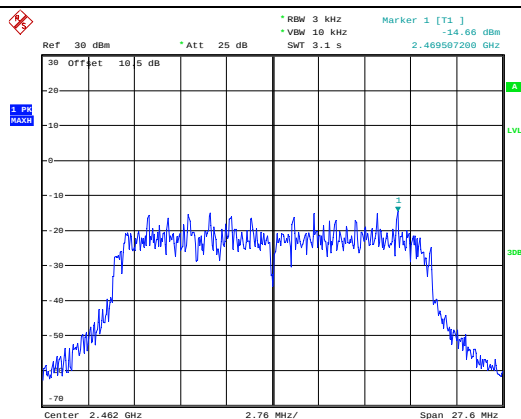ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:16:14

Maximum Power Spectral Density802.11n ht20
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:24:45802.11n ht20
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:27:49802.11n ht20
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:30:06

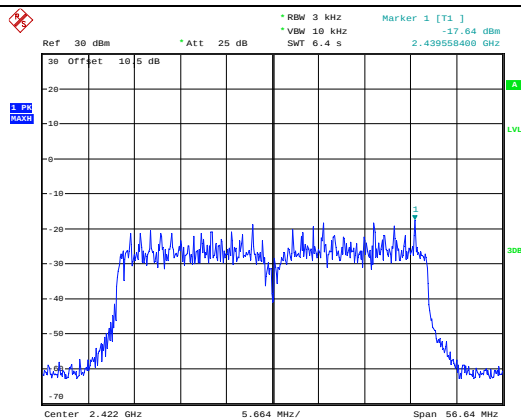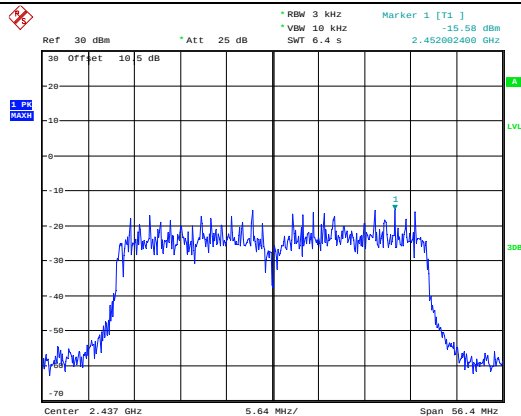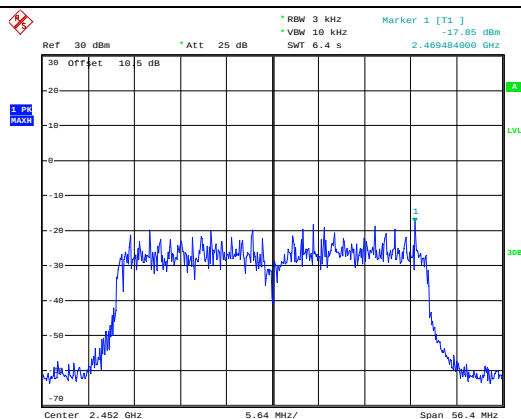
Maximum Power Spectral Density

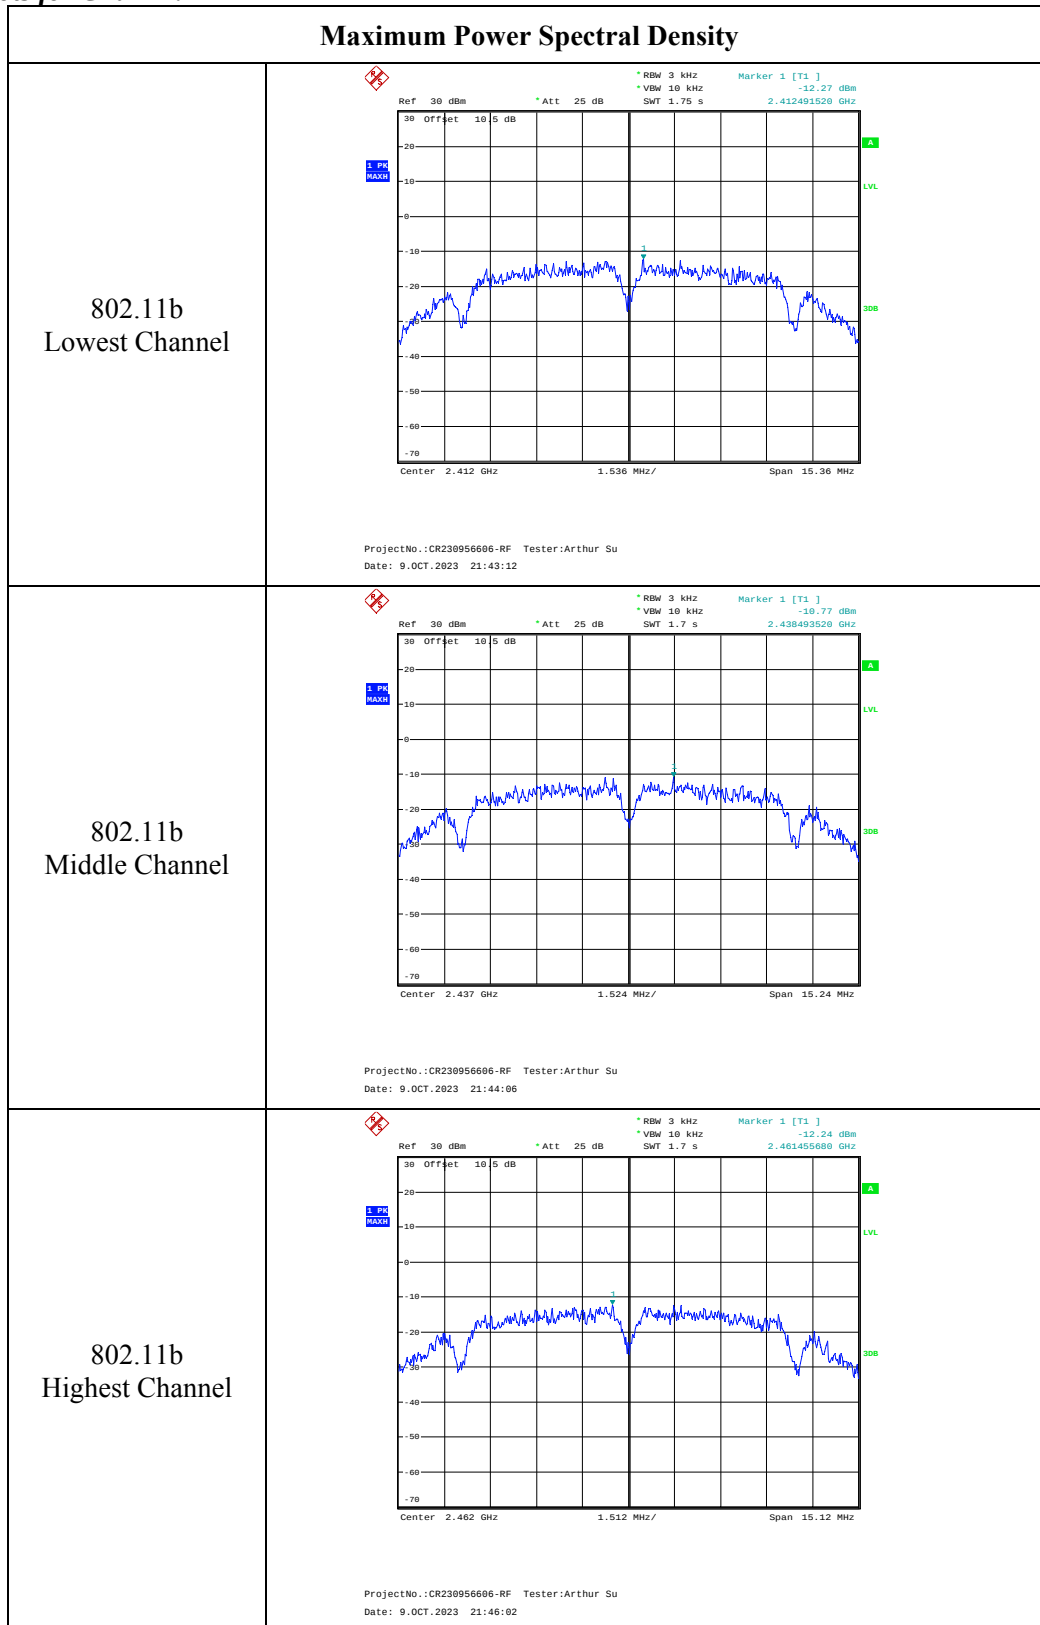802.11n ht40
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:33:29802.11n ht40
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:36:55802.11n ht40
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:39:42

Test Plots for Chain 1:


Maximum Power Spectral Density

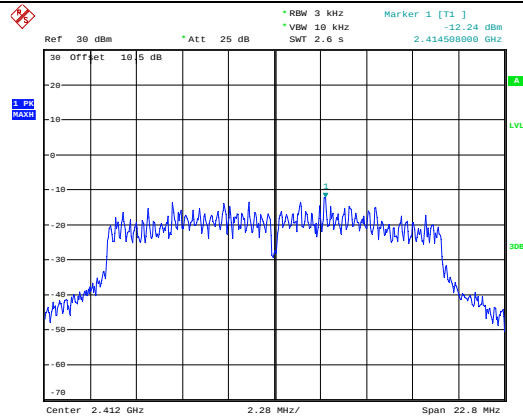802.11g
Lowest Channel




ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:52:11

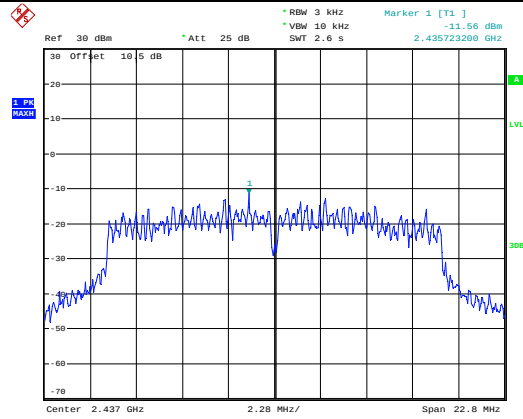802.11g
Middle Channel









ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:50:58

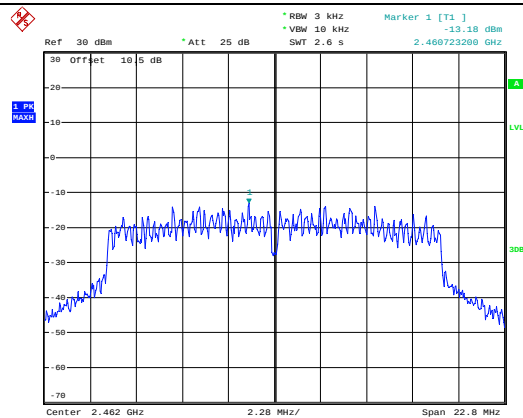802.11g
Highest Channel



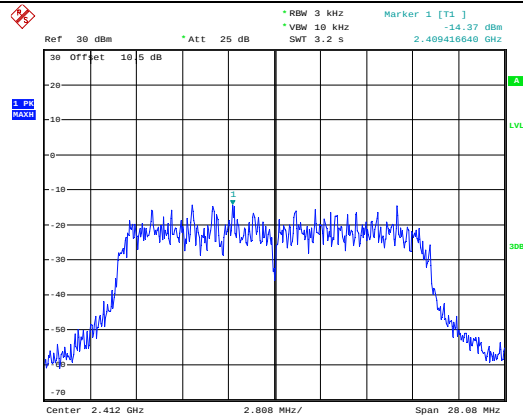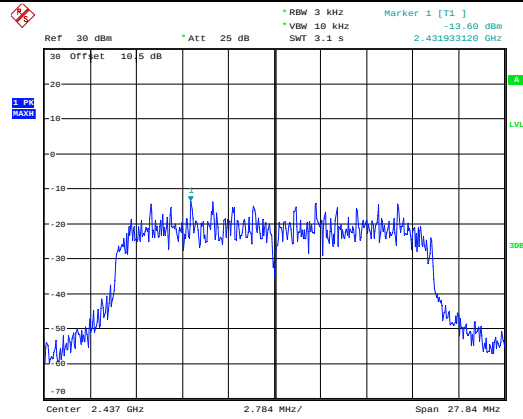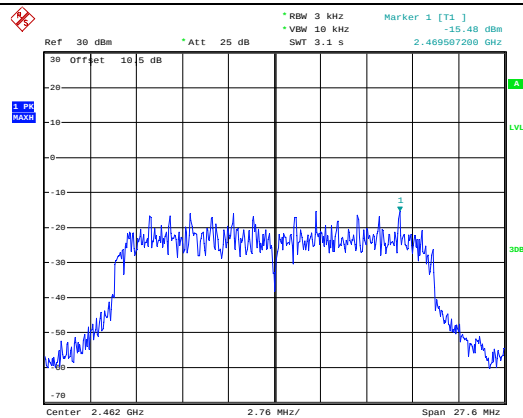ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:48:19

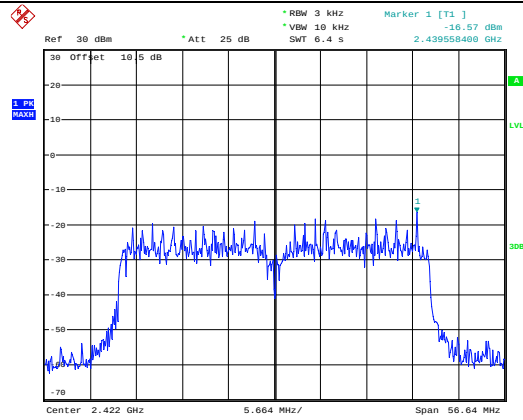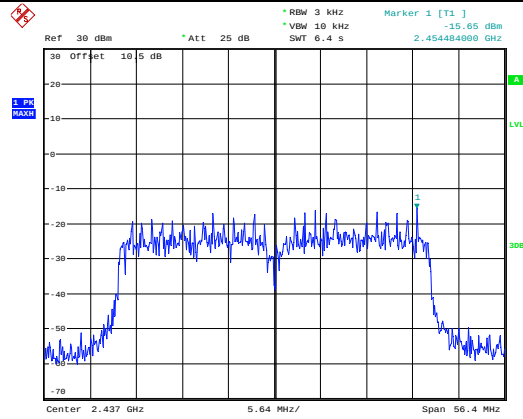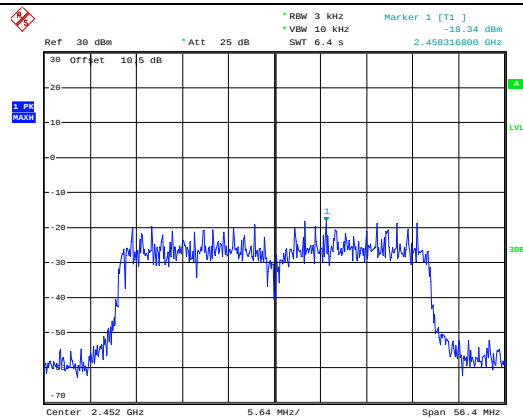Maximum Power Spectral Density802.11n ht20
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:55:02802.11n ht20
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:56:31802.11n ht20
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:58:31

Maximum Power Spectral Density802.11n ht40
Lowest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 22:03:52802.11n ht40
Middle ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 22:06:12802.11n ht40
Highest ChannelProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 22:09:00

4.7 100 kHz Bandwidth of Frequency Band Edge:

Serial Number:	2BQ8-1	Test Date:	2023/10/9
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.7
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:



Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Chain 0:

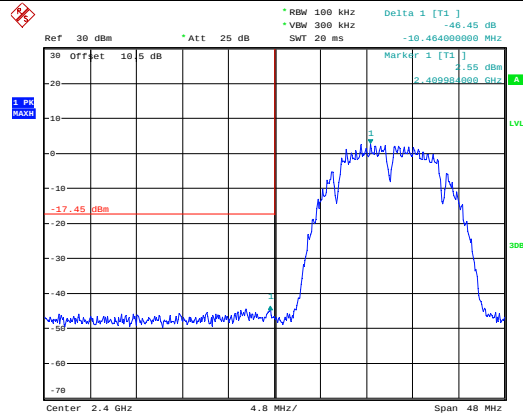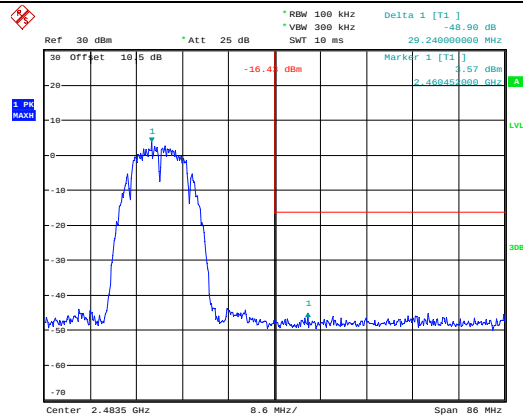100 kHz Bandwidth of Frequency Band Edge

802.11b
Lowest Band edgeProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:11:15802.11b
Highest Band edgeProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:13:59


100 kHz Bandwidth of Frequency Band Edge

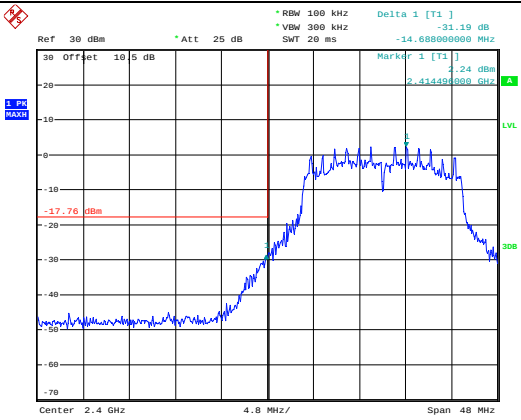802.11g
Lowest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:20:13

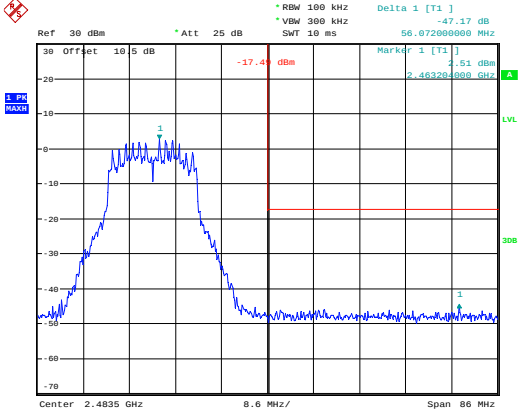
802.11g
Highest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:16:27


100 kHz Bandwidth of Frequency Band Edge

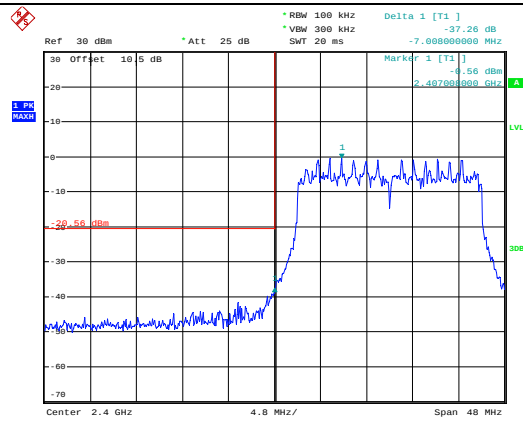802.11n ht20
Lowest Band edge



ProjectNo.: CR230956606-RF Tester: Arthur Su
Date: 9.OCT.2023 21:24:58

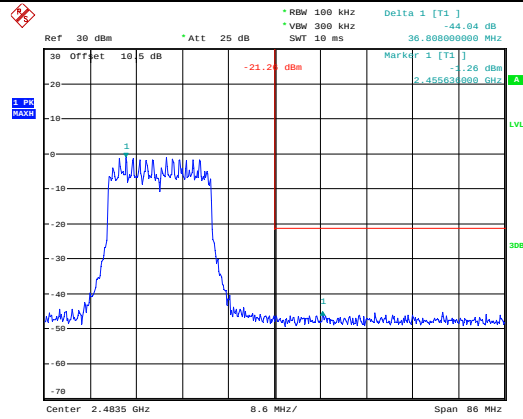
802.11n ht20
Highest Band edge



ProjectNo.: CR230956606-RF Tester: Arthur Su
Date: 9.OCT.2023 21:30:22


100 kHz Bandwidth of Frequency Band Edge

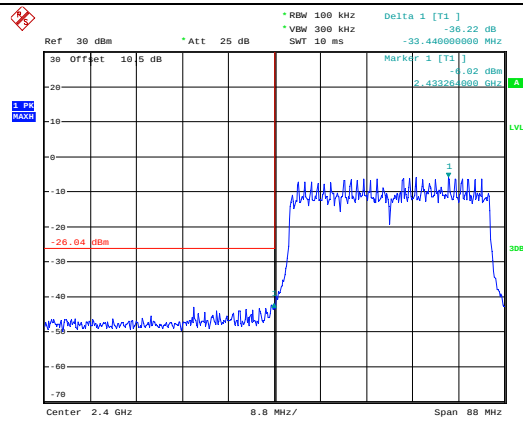802.11n ht40
Lowest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:33:43

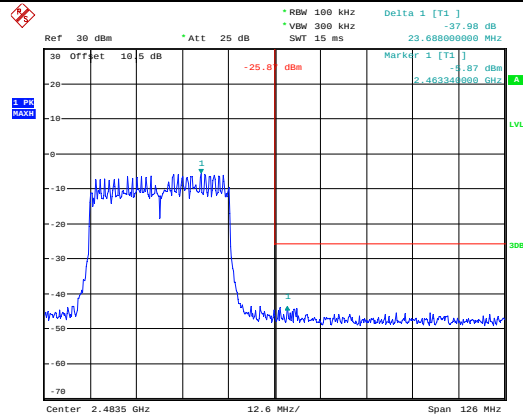802.11n ht40
Highest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:39:56

100 kHz Bandwidth of Frequency Band Edge

Ref 30 dBm Att 25 dB RBW 100 kHz VBW 300 kHz Delta 1 [T1] -40.18 dB -15.456000000 MHz

30 Offset 10 5 dB

20

10

0

-10

-20

-30

-40

-50

-60

-70

Marker 1 [T1] 2.52 dBm 2.432450000 GHz

1

2

-17.48 dBm


Center 2.4 GHz 4.8 MHz/ Span 48 MHz

Ref 30 dBm Att 25 dB SWT 10 ms Delta 1 [T1] -47.38 dB
 35.432000000 MHz
 30 Offset 10 5 dB
 -17.0 dBm
 Marker 1 [T1] 2.17 dBm
 2.4835000 GHz
 1. PR MAX1
 Center 2.4835 GHz 8.6 MHz/ Span 86 MHz

Page 66 of 74


100 kHz Bandwidth of Frequency Band Edge

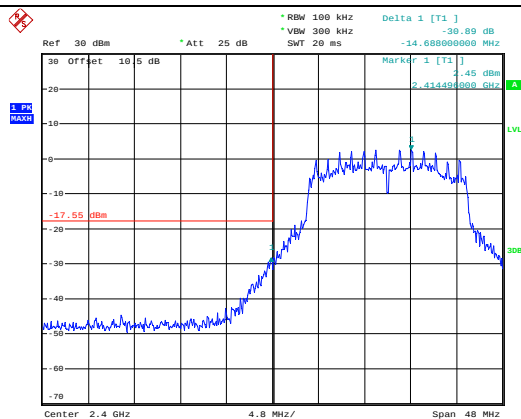802.11g
Lowest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:52:28

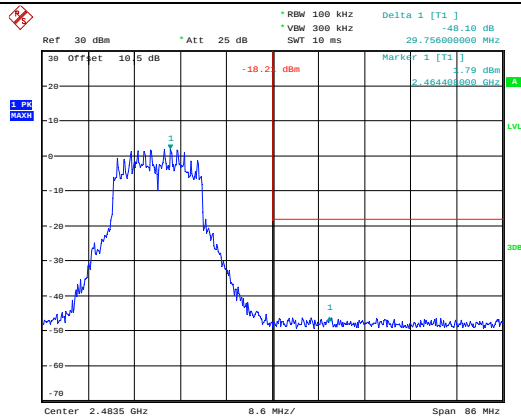
802.11g
Highest Band edge



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:48:33


100 kHz Bandwidth of Frequency Band Edge

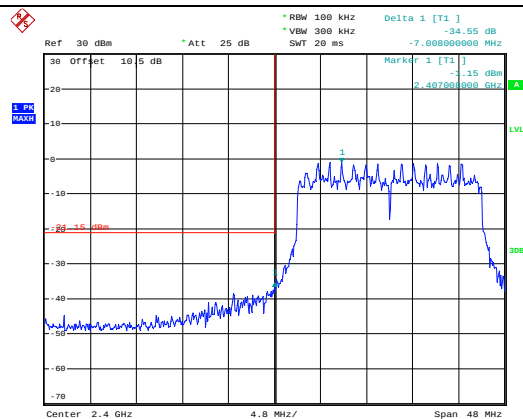802.11n ht20
Lowest Band edge





ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:55:18

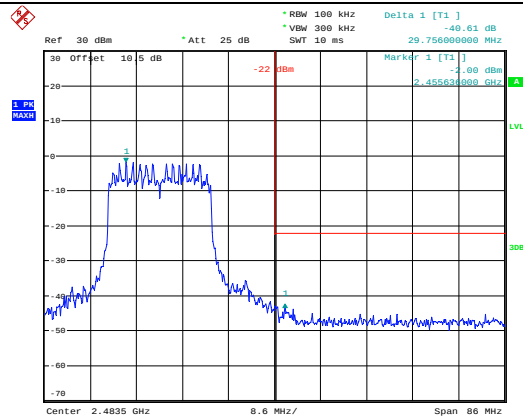802.11n ht20
Highest Band edge




ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:58:48

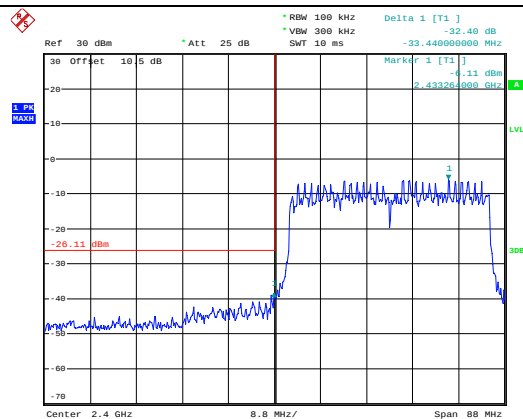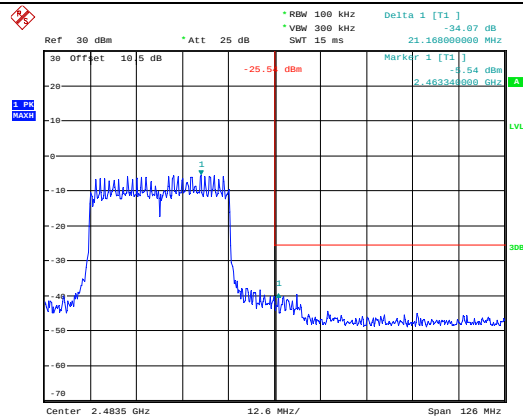100 kHz Bandwidth of Frequency Band Edge


802.11n ht40
Lowest Band edgeProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 22:04:09802.11n ht40
Highest Band edgeProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 22:09:17

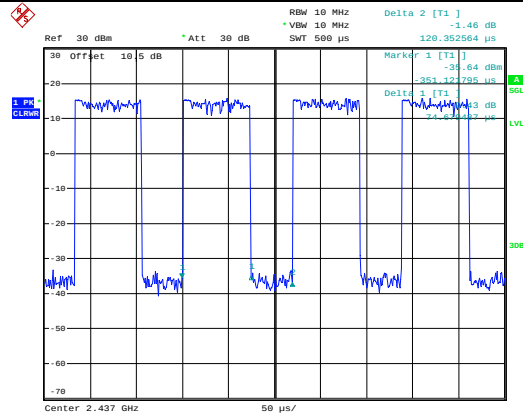802.11g




ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:02:14

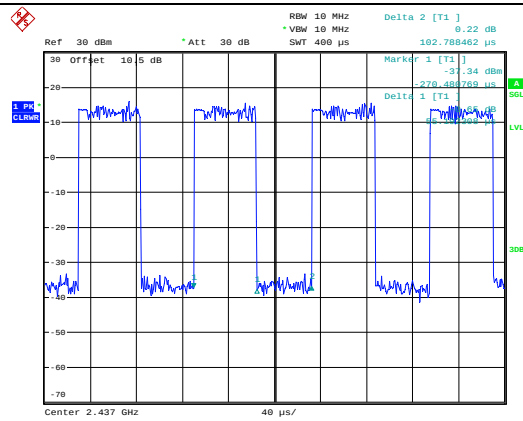802.11n ht20



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:05:11

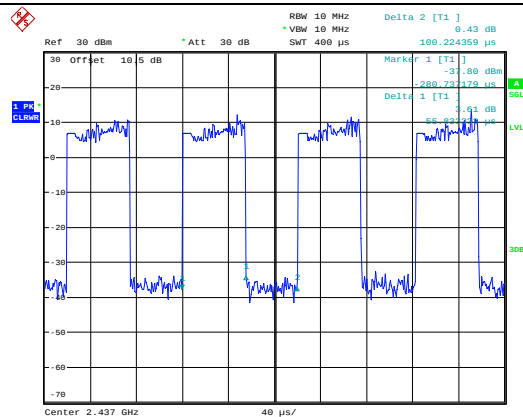802.11n ht40



ProjectNo.:CR230956606-RF Tester:Arthur Su
Date: 9.OCT.2023 21:07:26

5. MPE Based Exemption

5.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

5.2 Measurement Result

Radio	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
							dBm	mW	
2.4GHz WLAN	2412-2462	19.81	200	768	23	2.83	23.68	233.35	Compliant
BLE	2402-2480	19.89	200	768	1	2.28	1.13	1.30	Compliant
BT 3.0	2402-2480	19.89	200	768	5	2.28	5.13	3.26	Compliant
5.2GHz WLAN	5180-5240	9.22	200	768	12.5	2.98	13.33	21.53	Compliant
5.8GHz WLAN	5745-5825	8.32	200	768	12.5	2.98	13.33	21.53	Compliant

Note:

1. The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.
2. WLAN and Bluetooth can't simultaneously transmit.
3. ERP= Maximum Conducted Power including Tune-up Tolerance + Antenna Gain -2.15.

Result: The device compliant the MPE-Based Exemption at 20cm distances.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230956606-EXP EUT EXTERNAL PHOTOGRAPHS and CR230956606-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230956606-00C-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====