

FCC TEST REPORT

FCC ID: 2A9NX-OJD-126

On Behalf of

Huizhou OJD Technology Co., Ltd

4-in-1 Magnetic Wireless Charger

Model No.: OJD-126, OJD-119, OJD-132, OJD-133, OJD-135, OJD-136,
OJD-138, P9, OJD-C08, OJD-C09

Prepared for : Huizhou OJD Technology Co., Ltd
Address : 7F, Building 20, Zoina Hi-tech Industrial Park, No.6 xinhua Avenue, Chenjiang
Street, Zhongkai High-tech Zone, Huizhou city, Guangdong Province, China

Prepared By : Shenzhen PSI Testing Co., Ltd.
Address : 1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing
Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Report Number : psi2503168-C01-R02
Date of Receipt : March 4, 2025
Date of Test : March 4, 2025-April 17, 2025
Date of Report : May 9, 2025
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1.	Test Result Summary	5
2.	EUT Description	6
2.1.	DESCRIPTION OF DEVICE (EUT)	6
2.2.	ACCESSORIES OF DEVICE (EUT)	7
2.3.	TESTED SUPPORTING SYSTEM DETAILS	7
2.4.	BLOCK DIAGRAM OF CONNECTION BETWEEN EUT AND SIMULATORS	7
2.5.	DESCRIPTION OF TEST MODES	8
2.6.	TEST CONDITIONS	9
2.7.	TEST FACILITY	9
2.8.	MEASUREMENT UNCERTAINTY	9
3.	Test Results and Measurement Data	10
3.1.	RF EXPOSURE TEST	10
4.	Photos of test setup	13

TEST REPORT DECLARATION

Applicant : Huizhou OJD Technology Co., Ltd
Address : 7F, Building 20, Zoina Hi-tech Industrial Park, No.6 xinhua Avenue, Chenjiang Street,
Zhongkai High-tech Zone, Huizhou city, Guangdong Province, China
Manufacturer : Huizhou OJD Technology Co., Ltd
Address : 7F, Building 20, Zoina Hi-tech Industrial Park, No.6 xinhua Avenue, Chenjiang Street,
Zhongkai High-tech Zone, Huizhou city, Guangdong Province, China
EUT Description : 4-in-1 Magnetic Wireless Charger
(A) Model No. : OJD-126, OJD-119, OJD-132, OJD-133, OJD-135,
OJD-136, OJD-138, P9, OJD-C08, OJD-C09
(B) Trademark : /

Measurement Standard Used:

FCC CFR 47 PART 1, FCC CFR 47 part1, 1.1307(b), 1.1310

KDB 680106 D01 Wireless Power Transfer v04


Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed full responsibility for the accuracy and completeness test. Also, this report shows that the EUT is technically compliant with the KDB 680106 D01 requirements.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang
Test Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....:

May 9, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 9, 2025	Initial released Issue	Felix Pang

1. Test Result Summary

Requirement	CFR 47 Section	Result
RF EXPOSURE	§1.1307(b)(1), §1.1310& KDB680106	PASS

Note:

1. *PASS: Test item meets the requirement.*
2. *Fail: Test item does not meet the requirement.*
3. *N/A: Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*
5. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. EUT Description

2.1. Description of Device (EUT)

EUT Name	:	4-in-1 Magnetic Wireless Charger
Model No.	:	OJD-126
DIFF.	:	OJD-126 is the test model, while other models are derivative models. These models are the same on the circuit, with only different model names. Therefore, the test data of OJD-126 can represent the remaining models.
Power supply	:	Input: 9 V/2 A Phone output: 5 W/ 7.5 W/ 10 W/ 15 W AirPods output: 3 W(max) Watch output 3 W(max)
Radio Technology	:	Wireless power transmission systems
Operation frequency	:	Phone: 110.1-205 KHz AirPods: 110.1-205 KHz Watch: 315-330 KHz
Modulation	:	MSK
Antenna Type	:	Coil Antenna
Connector cable loss	:	0dBi
Software version	:	V1.0
Hardware version	:	V1.0
Note	:	Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.


2.2. Accessories of Device (EUT)

Accessories	:	N/A
Manufacturer	:	N/A
Model	:	N/A
specifications	:	N/A

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification
1	AC ADAPTER	/	G301CU	/	/
2	Mobile phone	Apple Inc.	iPhone 15 Pro	/	/
3	Earphone	Apple Inc.	A2031	/	/
4	Apple watch	Apple Inc.	ultra 2	/	/

2.4. Block Diagram of connection between EUT and simulators

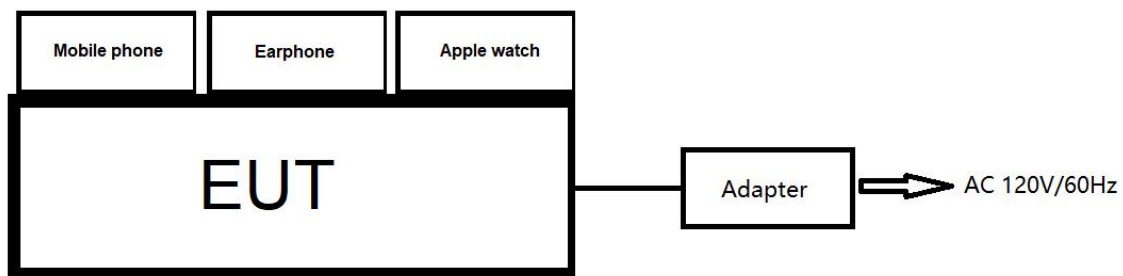

2.5. Description of Test Modes

Number	Modes
1	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Apple Protocol(Battery Status: $\leq 1\%$)
2	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Apple Protocol(Battery Status:50%)
3	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Apple Protocol(Battery Status: $\geq 98\%$)
4	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Samsung Agreement(Battery Status: $\leq 1\%$)
5	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Samsung Agreement(Battery Status:50%)
6	AC Mains + Phone charging port + AirPods charging port + Watch charging port-Samsung Agreement(Battery Status: $\geq 98\%$)
7	Standby
Note:1. All test modes has been tested, this report only reflected the model 1 worst mode.	
2.Watch charging port-Samsung Agreement and Watch charging port-Apple Protocol cannot work simultaneously.	

2.6. Test Conditions

Items	Required
Temperature range:	15-35°C
Humidity range:	25-75%
Pressure range:	86-106kPa

2.7. Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

2.8. Measurement Uncertainty


(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for H-Field	2.39dB
Uncertainty for E-Field	2.45dB
Uncertainty for conducted RF Power	0.65dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

3. Test Results and Measurement Data

3.1. RF EXPOSURE TEST

3.1.1. Test Specification

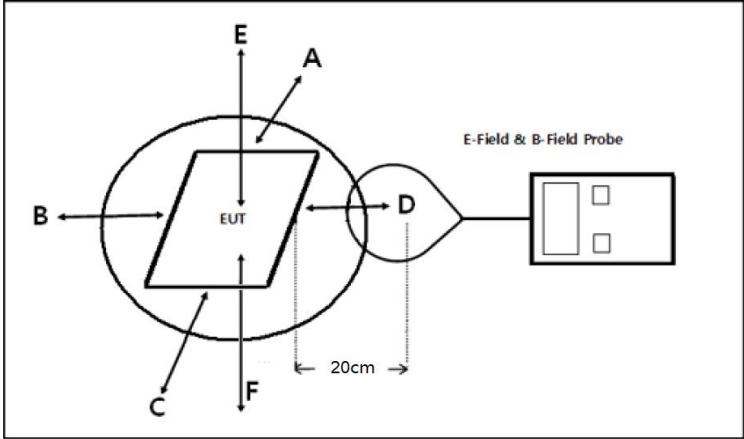Test Requirement:	FCC Rules and Regulations KDB680106
Test Method:	§1.1307(b)(1) & KDB680106
Limits:	According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB 680106 D01 Wireless Power Transfer v04: RF Exposure Wireless Charging.
Test Setup:	 E to position is 20cm, F is the bottom of the product
Test Mode:	Transmitting Mode (Mobile phone will be charge at zero charge, intermediate charge, and full charge.)
Test Procedure:	1. The RF exposure test was carried out on a non-metallic table top 80cm high in the shielding darkroom. 2. The measurement probe was placed at test distance (20 cm for Top side) which is between the edge of the charger and the geometric centre of probe. 3. The test time is maintained for more than one minute. 4. The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed. 5. The EUT were measured according to the dictates of KDB 680106 D01 Wireless Power Transfer v04.
Test Result:	PASS

3.1.2. Test Instruments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Exposure Level Tester	narda	ELT-400	O-0729	2024.05.06	1 Year
2	Magnetic field probe 100cm2	narda	ELT probe 100cm2	M-2116	2024.05.06	1 Year

3.1.3. Test data

We have evaluated mode 1 to mode 7 and the worst mode 1 is showed in this report.


Frequency Range (MHz)	Unit	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	50%Limits (A/m)	Limits (A/m)	test result
0.1101-0.205	(A/m)	0.14	0.14	0.19	0.18	0.21	0.20	0.815	1.63	PASS
	A (uT)	0.18	0.17	0.24	0.23	0.26	0.25			
0.1101-0.205	(A/m)	0.14	0.16	0.19	0.18	0.18	0.18			
	A (uT)	0.17	0.20	0.24	0.22	0.23	0.22			
0.315-0.330	(A/m)	0.14	0.09	0.18	0.19	0.17	0.18			
	A (uT)	0.17	0.11	0.23	0.24	0.21	0.22			



The device could support transmission with ANT1, ANT2, ANT3 simultaneously.


$MPE1/LIMIT + MPE2/LIMIT + MPE3/LIMIT = 0.21/0.815 + 0.19/0.815 + 0.19/0.815 = 0.72 \leq 1$

Note: Calculation: $A/m = uT/1.25$

4. Photos of test setup

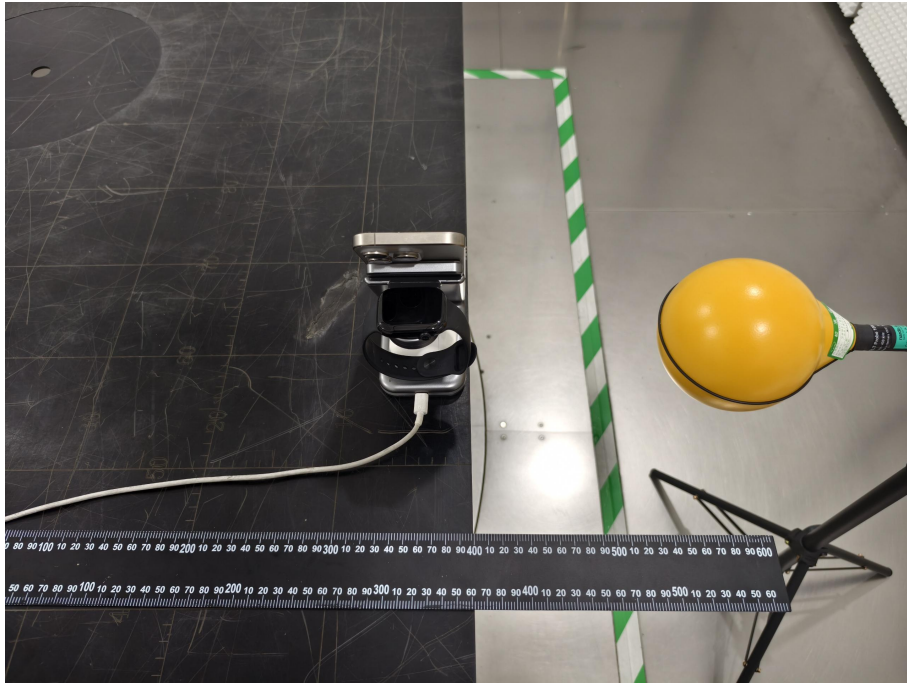

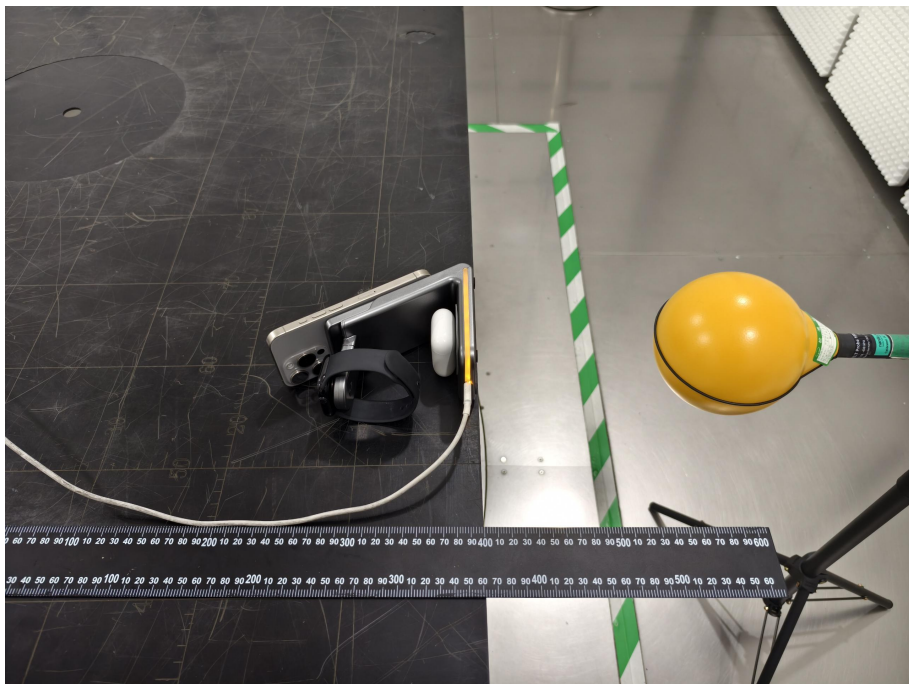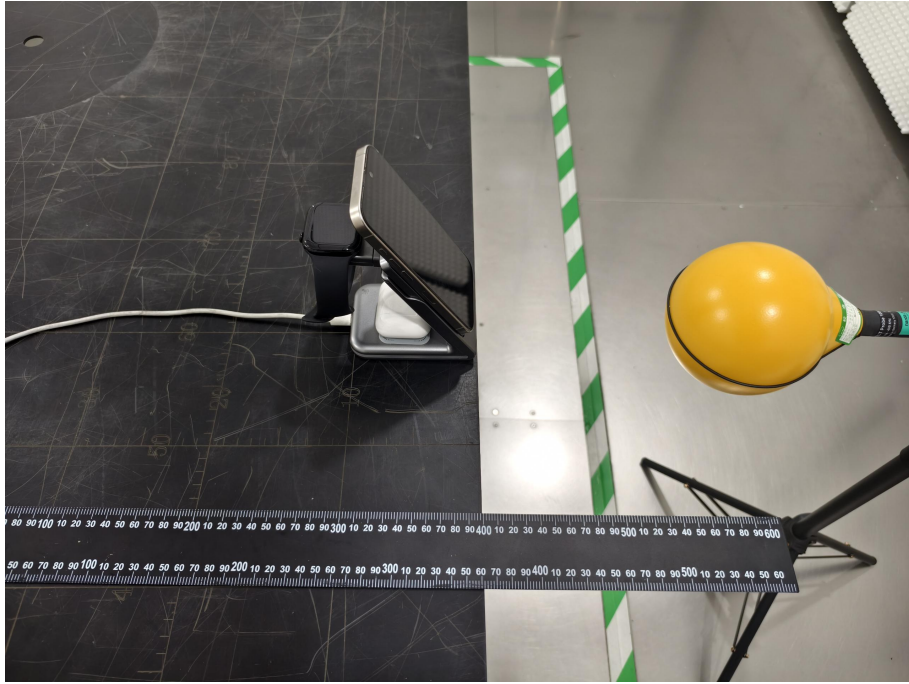

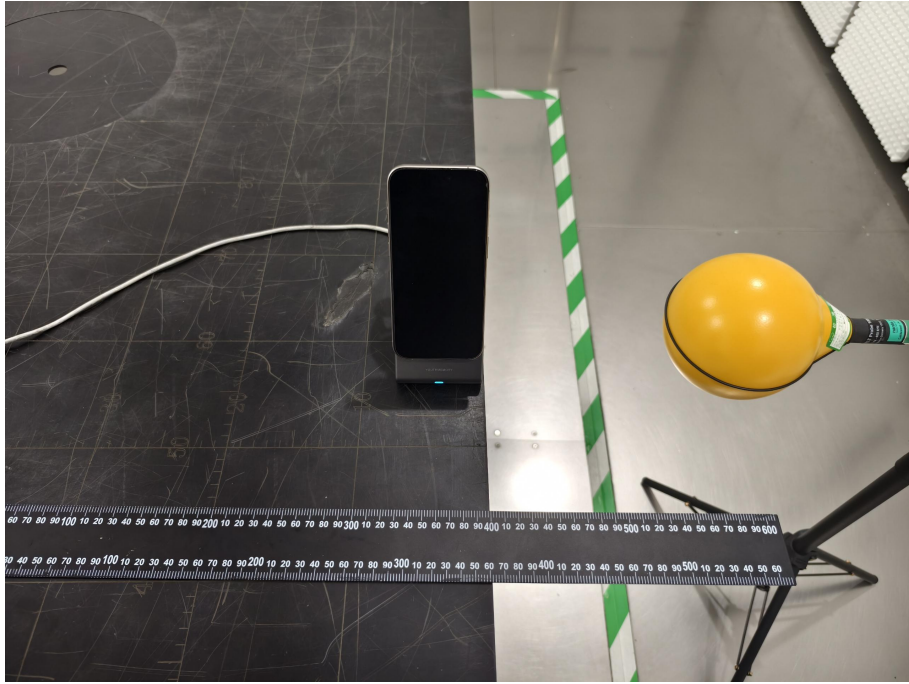

-----END OF REPORT-----