

APPENDIX B PLOTS OF THE SAR MEASUREMENTS

Plots of the measured SAR distributions inside the phantom are given in this Appendix for all tested configurations.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:0

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Bystander ANT 1 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 1 (OFDM) 07-Sep-2015/Channel 60 Test/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.072 W/kg

Body Bystander ANT 1 (OFDM) 07-Sep-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.690 V/m; **Power Drift = 0.18 dB**

Averaged SAR: SAR(1g) = 0.008 W/kg; SAR(10g) = 0.001 W/kg

Maximum value of SAR (interpolated) = 0.138 W/kg

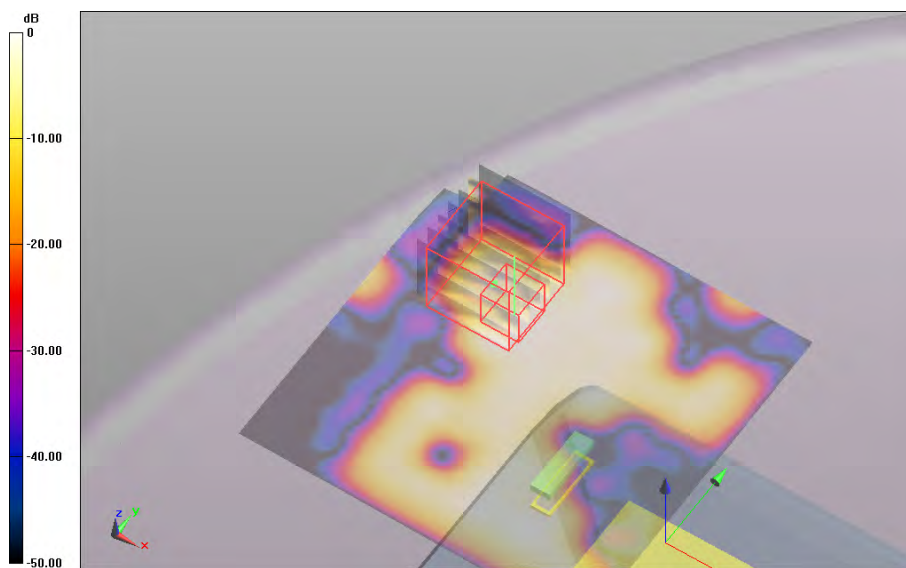


0 dB = 0.0717 W/kg = -11.44 dBW/kg

SAR Measurement Plot 1



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

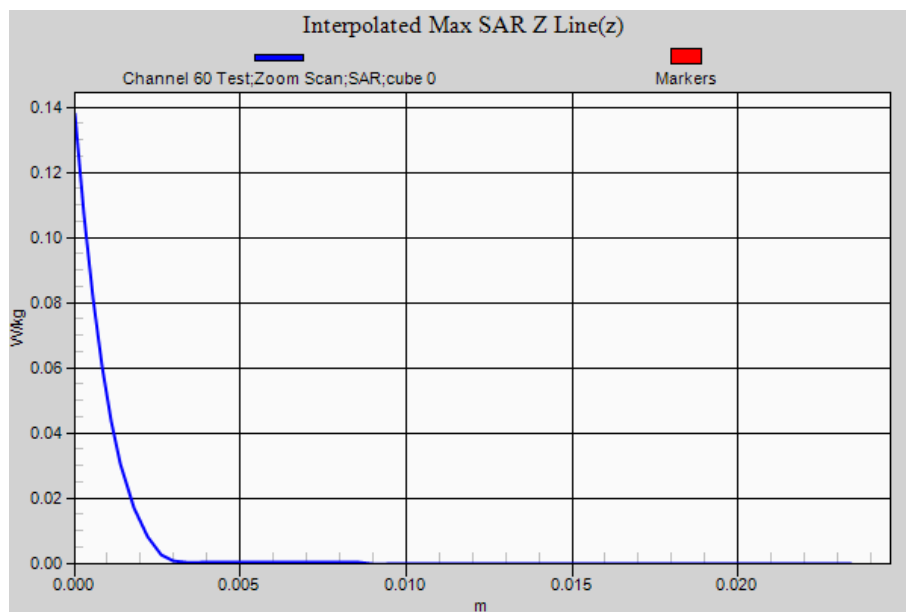

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Bystander ANT 2 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 2 (OFDM) 07-Sep-2015/Channel 54 Test/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.081 W/kg

Body Bystander ANT 2 (OFDM) 07-Sep-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 4.147 V/m; **Power Drift = -0.17 dB**

Averaged SAR: SAR(1g) = 0.021 W/kg; SAR(10g) = 0.008 W/kg

Maximum value of SAR (interpolated) = 0.188 W/kg

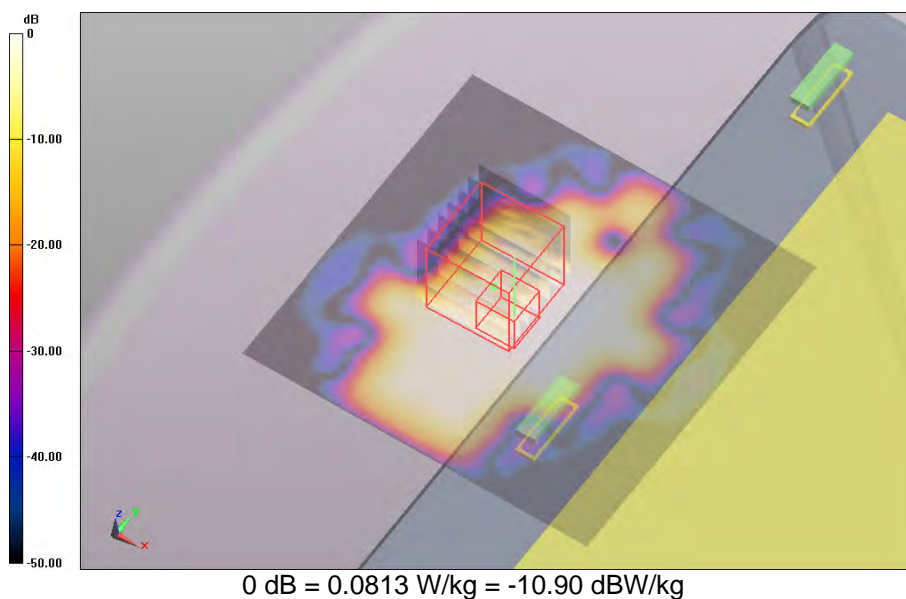


SAR Measurement Plot 2



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

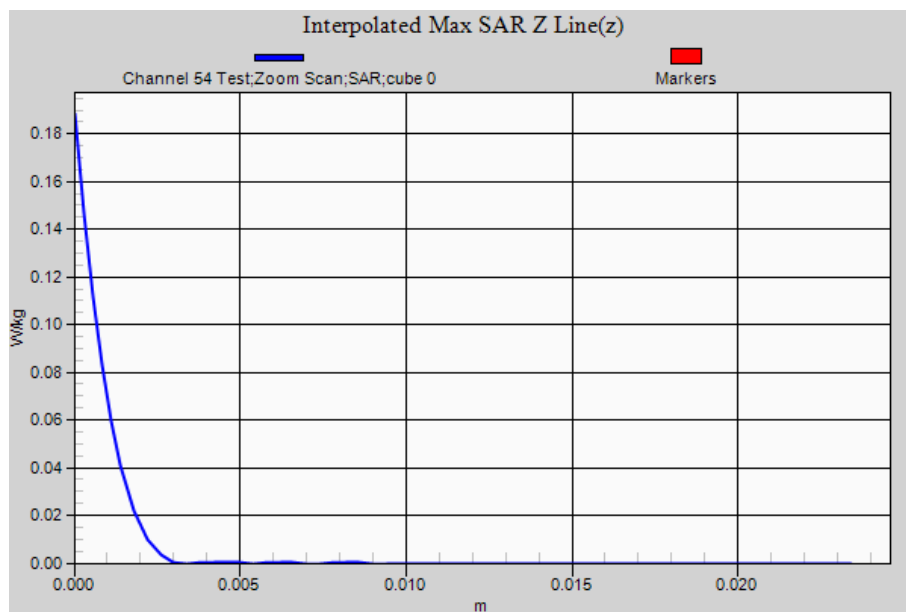

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 48.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 0.129 W/kg

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 1.706 V/m; **Power Drift = 0.15 dB**

Averaged SAR: SAR(1g) = 0.014 W/kg; SAR(10g) = 0.005 W/kg

Maximum value of SAR (interpolated) = 0.130 W/kg

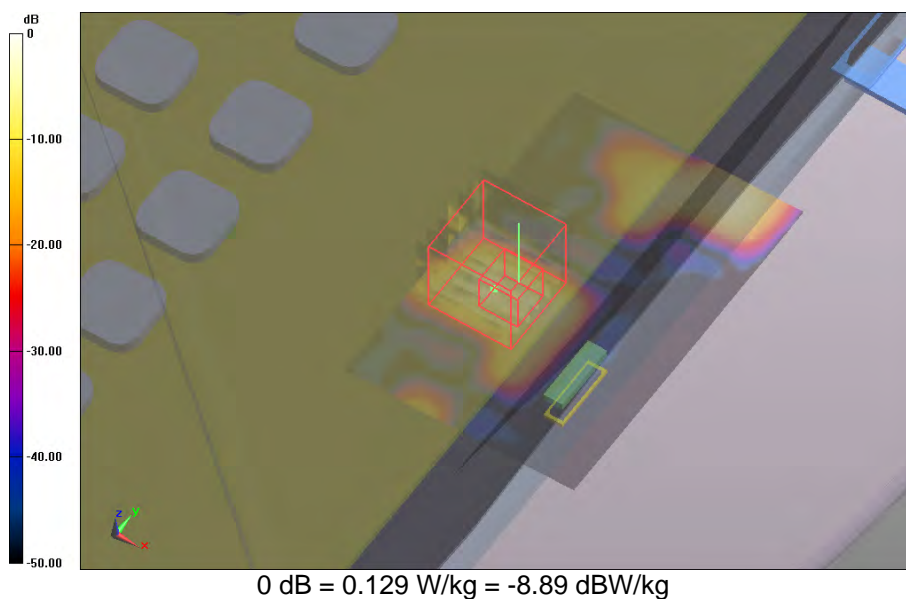


SAR Measurement Plot 3



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

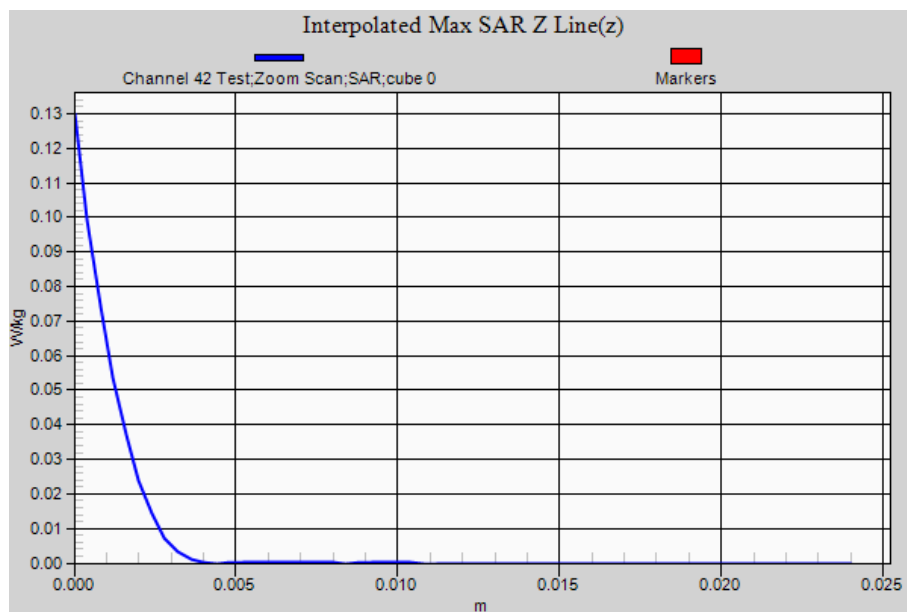

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:3

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 2 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.115 W/kg

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.902 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.013 W/kg; SAR(10g) = 0.004 W/kg

Maximum value of SAR (interpolated) = 0.098 W/kg

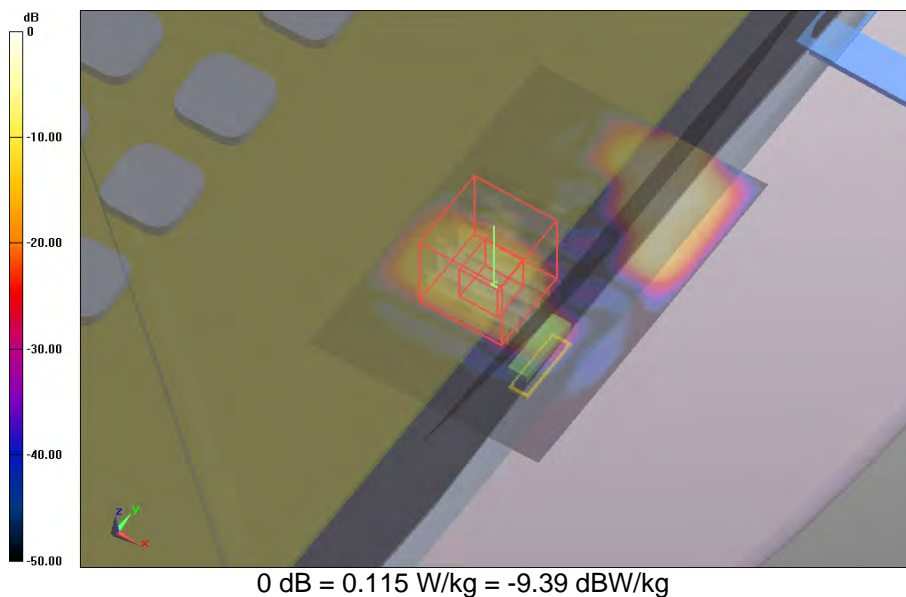


SAR Measurement Plot 4



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

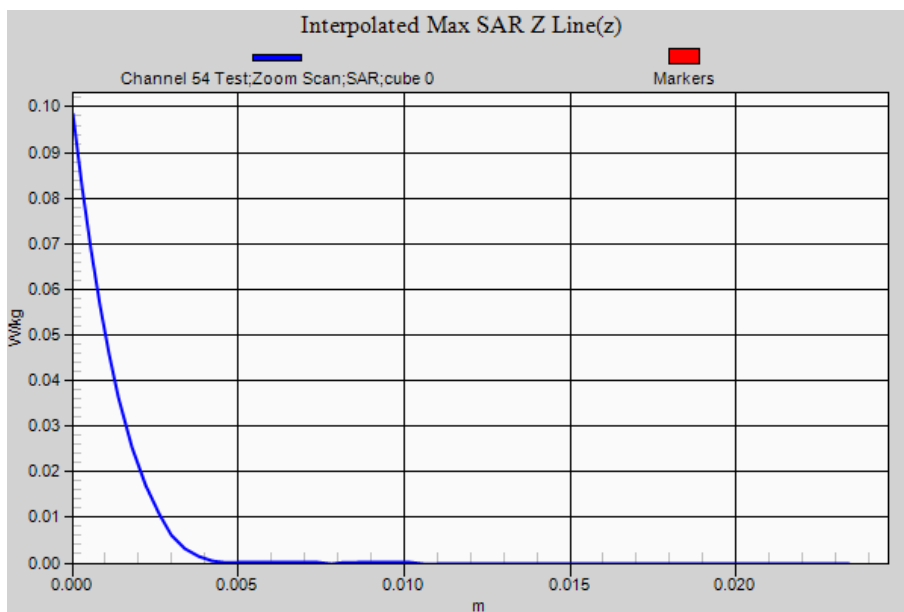

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz) (0); Communication System Band: 5.2 GHz Band;
Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 62 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.118 W/kg

Body Lap Held ANT 2 (OFDM) 07-Sep-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.453 V/m; **Power Drift = 0.21 dB**

Averaged SAR: SAR(1g) = 0.016 W/kg; SAR(10g) = 0.005 W/kg

Maximum value of SAR (interpolated) = 0.190 W/kg

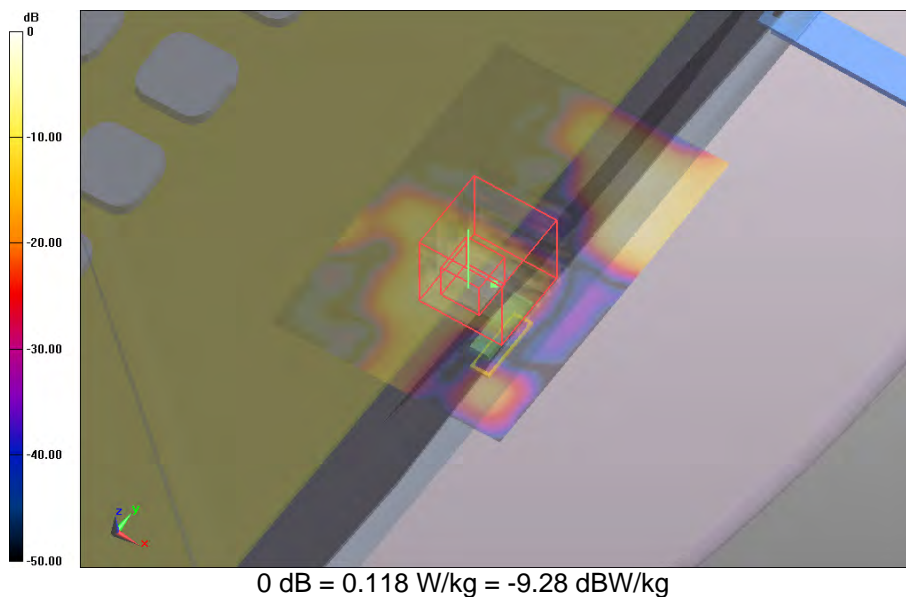


SAR Measurement Plot 5



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

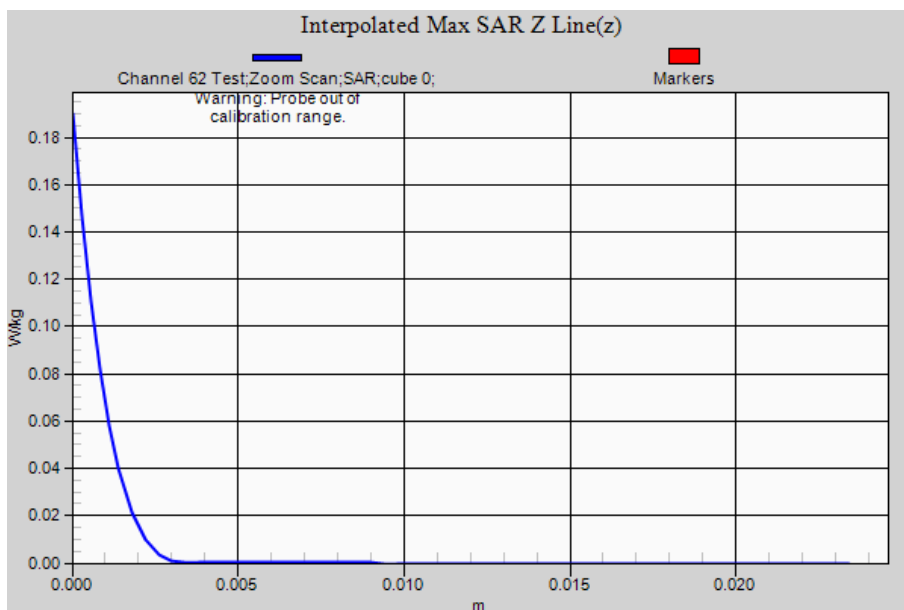

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:4

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 1 (OFDM) 07-Sep-2015

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (OFDM) 07-Sep-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.355 W/kg

Body Lap Held ANT 1 (OFDM) 07-Sep-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 5.936 V/m; **Power Drift = -0.01 dB**

Averaged SAR: SAR(1g) = 0.149 W/kg; SAR(10g) = 0.052 W/kg

Maximum value of SAR (interpolated) = 0.588 W/kg

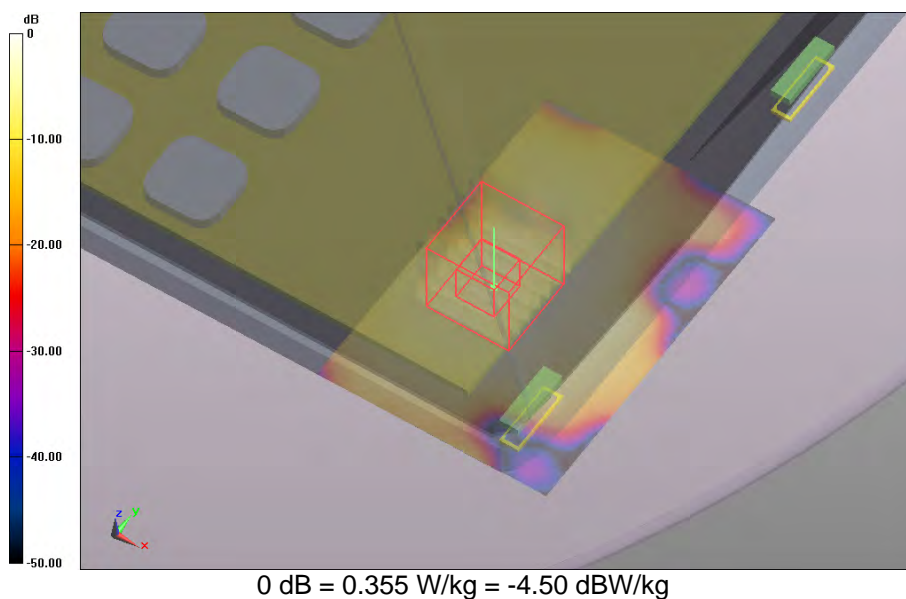


SAR Measurement Plot 6



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

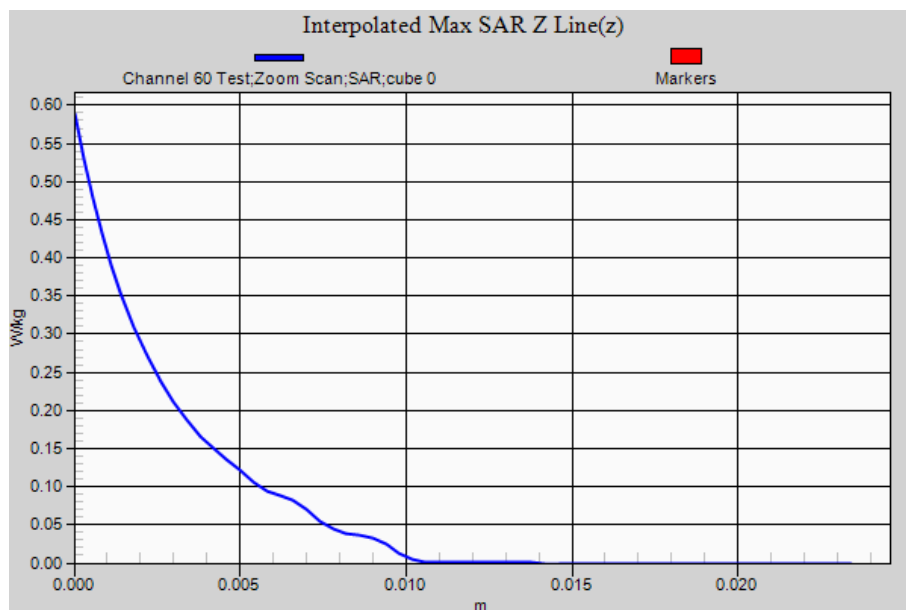

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 2 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 48.3$; $\rho = 1000.0$ g/cm³
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 1.480 W/kg

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 6.625 V/m; **Power Drift = -0.09 dB**

Averaged SAR: SAR(1g) = 0.558 W/kg; SAR(10g) = 0.154 W/kg

Maximum value of SAR (interpolated) = 2.200 W/kg

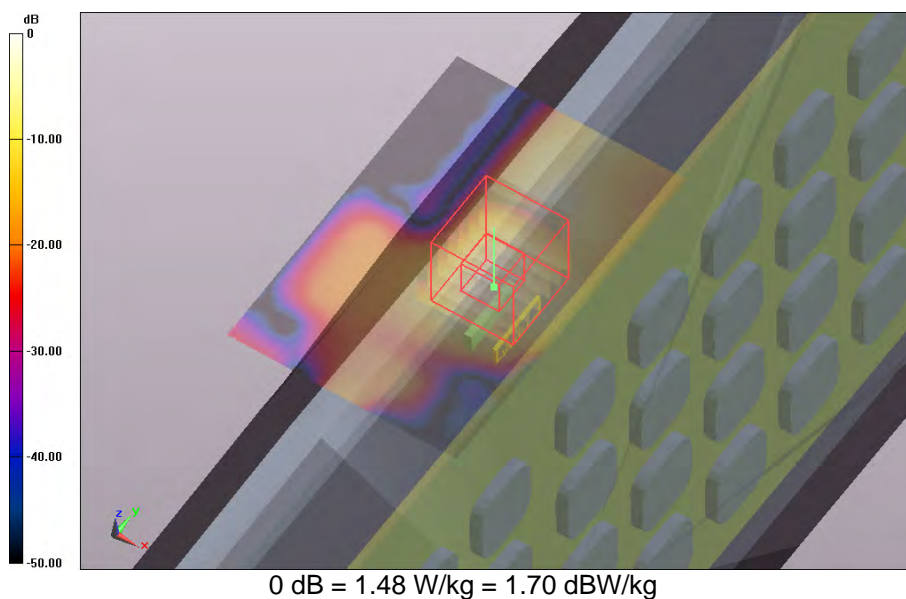


SAR Measurement Plot 7



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

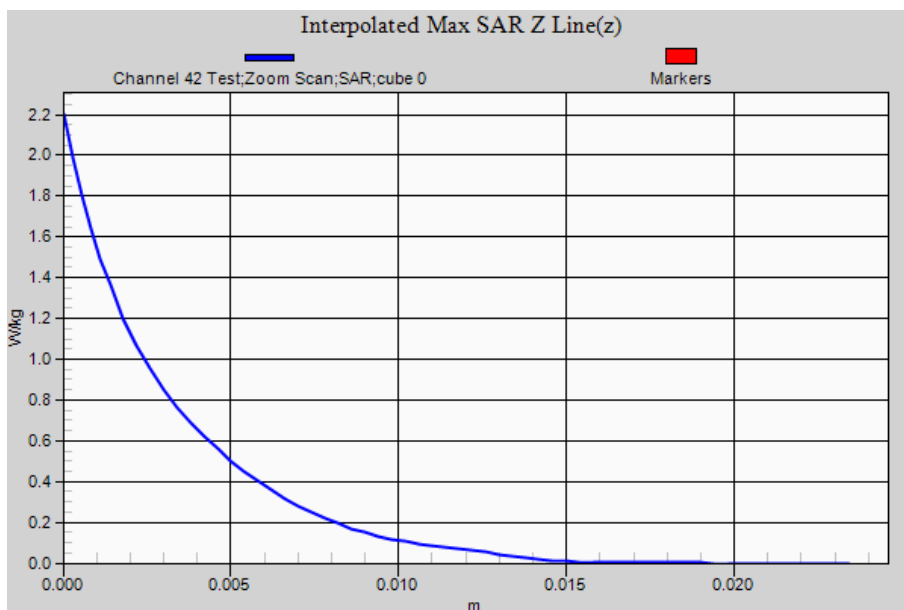

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:5

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 2 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.310 W/kg

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 6.406 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.508 W/kg; SAR(10g) = 0.142 W/kg

Maximum value of SAR (interpolated) = 2.060 W/kg

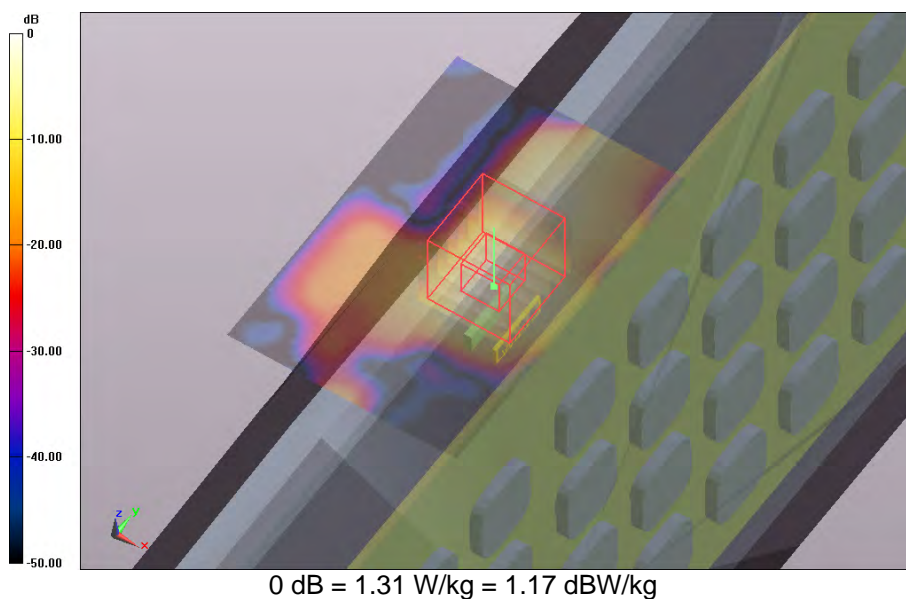


SAR Measurement Plot 8



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

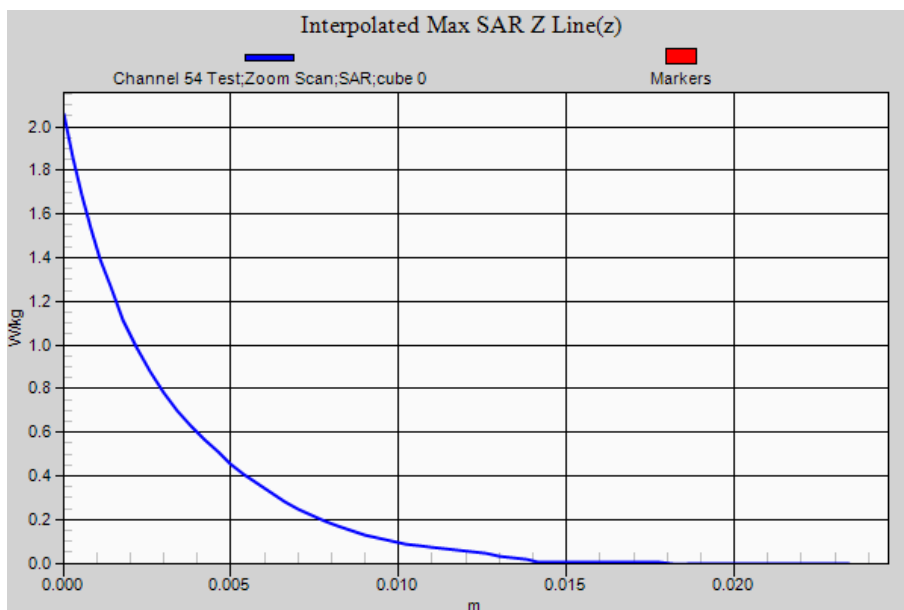

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:5

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 2 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5310 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5310.25$ MHz; $\sigma = 5.41$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 62 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.500 W/kg

Edge 1 ANT 2 (OFDM) 07-Aug-2015/Channel 62 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 13.203 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.566 W/kg; SAR(10g) = 0.157 W/kg

Maximum value of SAR (interpolated) = 2.260 W/kg

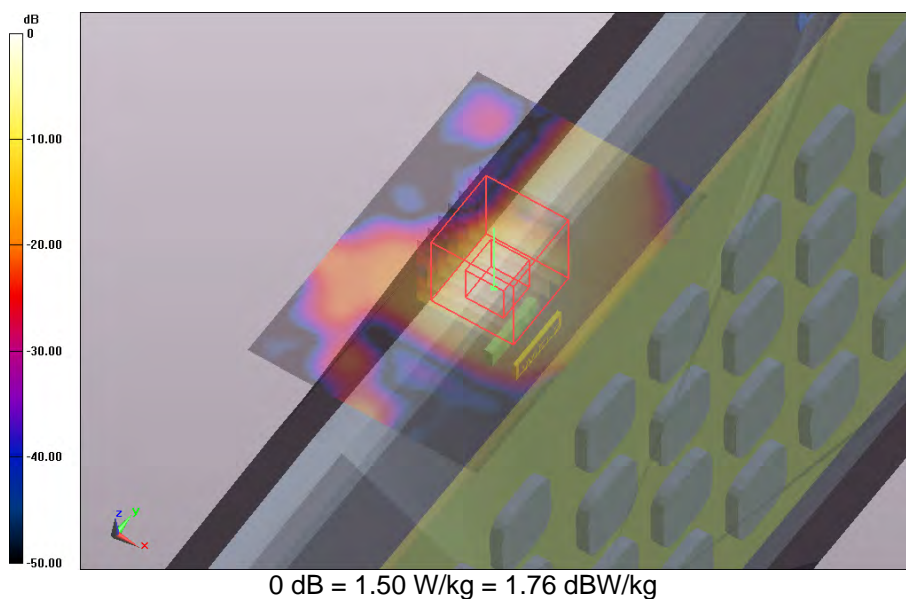


SAR Measurement Plot 9



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

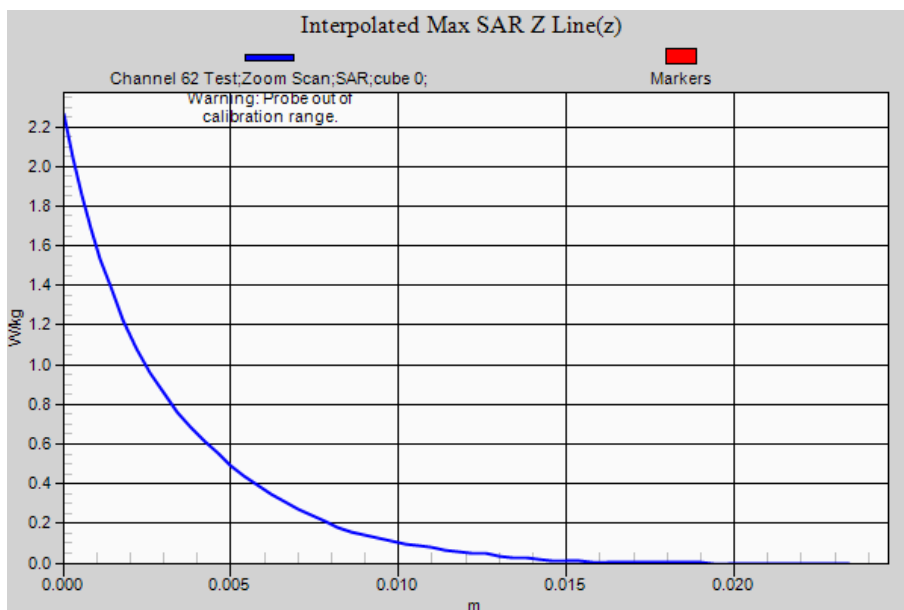

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:6

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 1 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5210 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5209.6$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 48.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 42 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.380 W/kg

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 42 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 11.776 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 0.627 W/kg; SAR(10g) = 0.193 W/kg

Maximum value of SAR (interpolated) = 2.480 W/kg

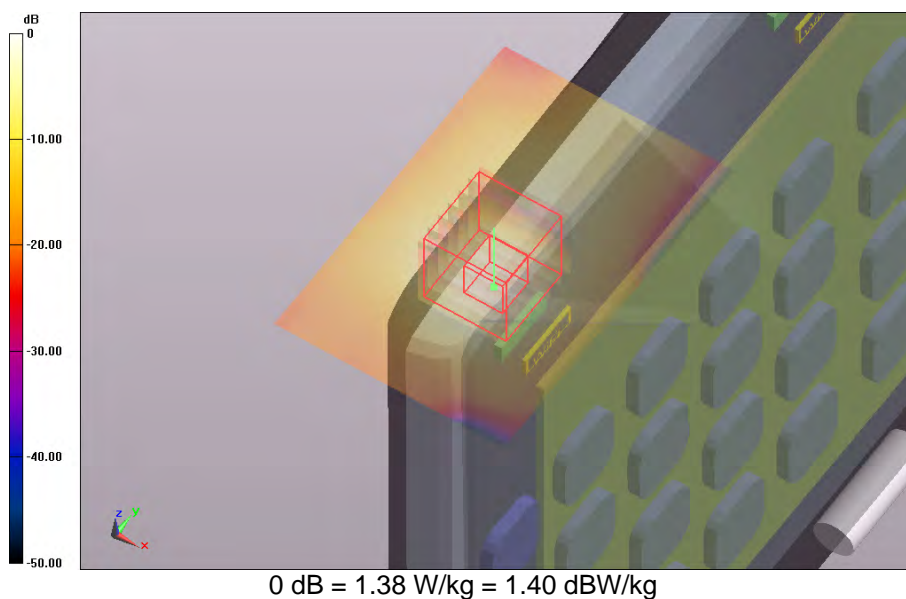


SAR Measurement Plot 10



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

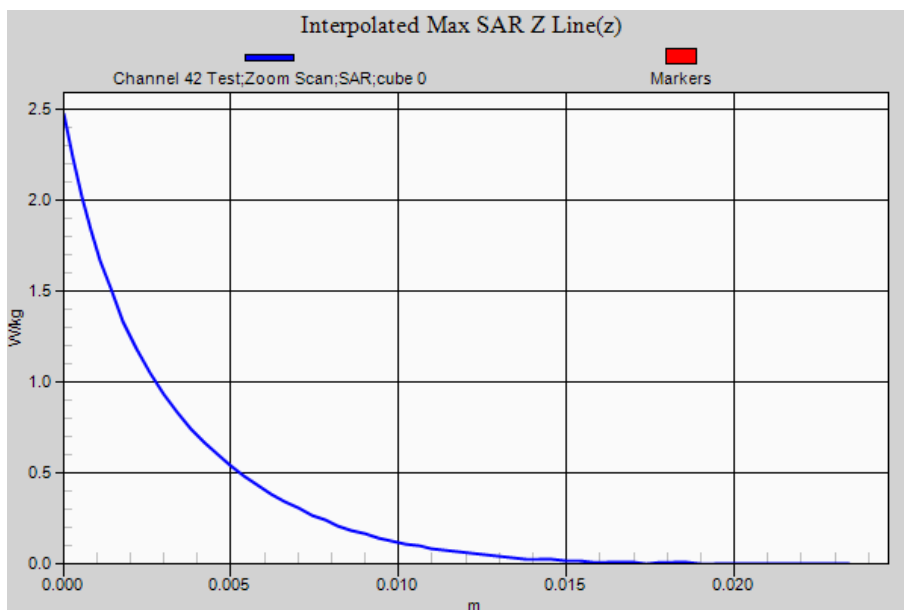

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 1 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.2 GHz Band;
Frequency: 5270 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5270.65$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 48.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 54 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.370 W/kg

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 54 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 11.951 V/m; **Power Drift = -0.10 dB**

Averaged SAR: SAR(1g) = 0.626 W/kg; SAR(10g) = 0.191 W/kg

Maximum value of SAR (interpolated) = 2.540 W/kg

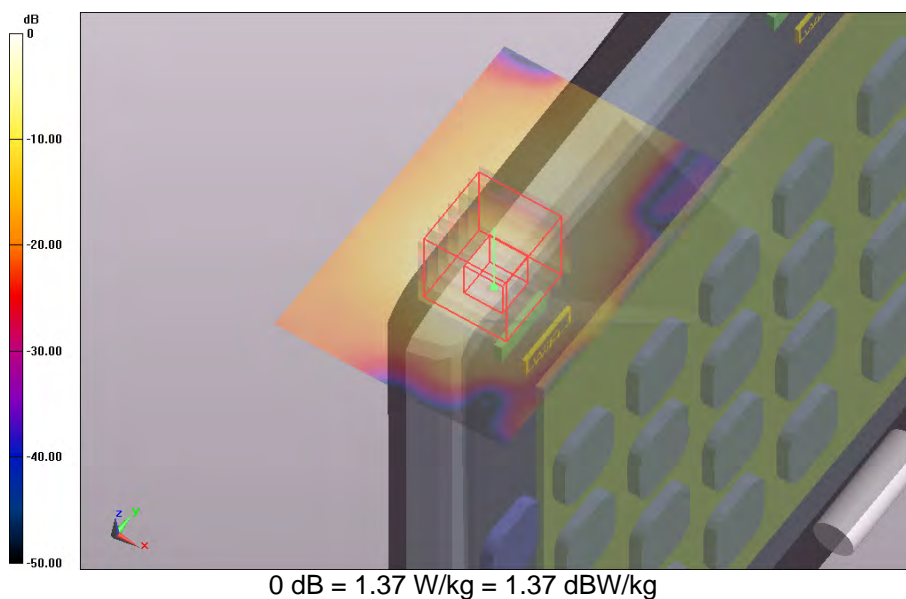


SAR Measurement Plot 11



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

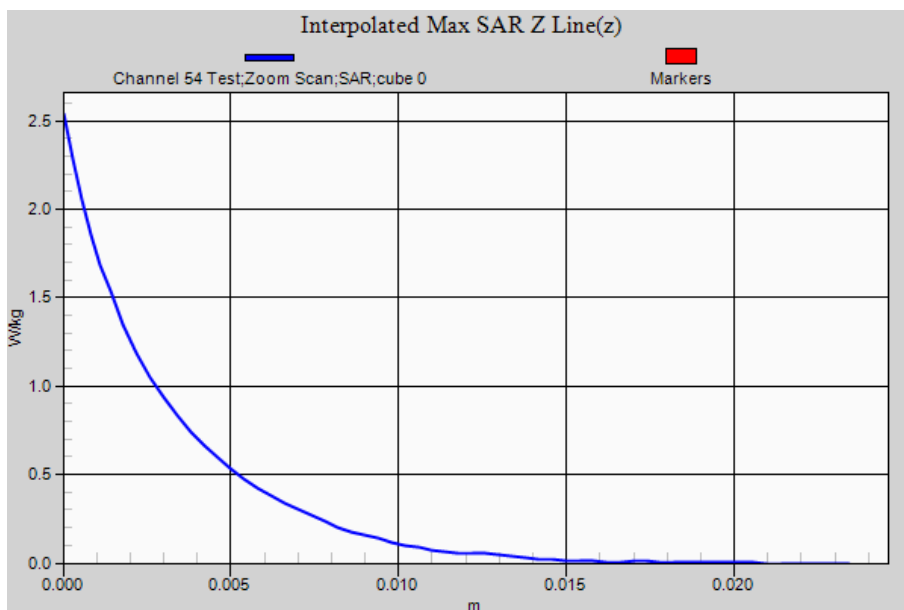

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:6

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 1 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.370 W/kg

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 11.850 V/m; **Power Drift = -0.20 dB**

Averaged SAR: SAR(1g) = 0.615 W/kg; SAR(10g) = 0.188 W/kg

Maximum value of SAR (interpolated) = 2.500 W/kg

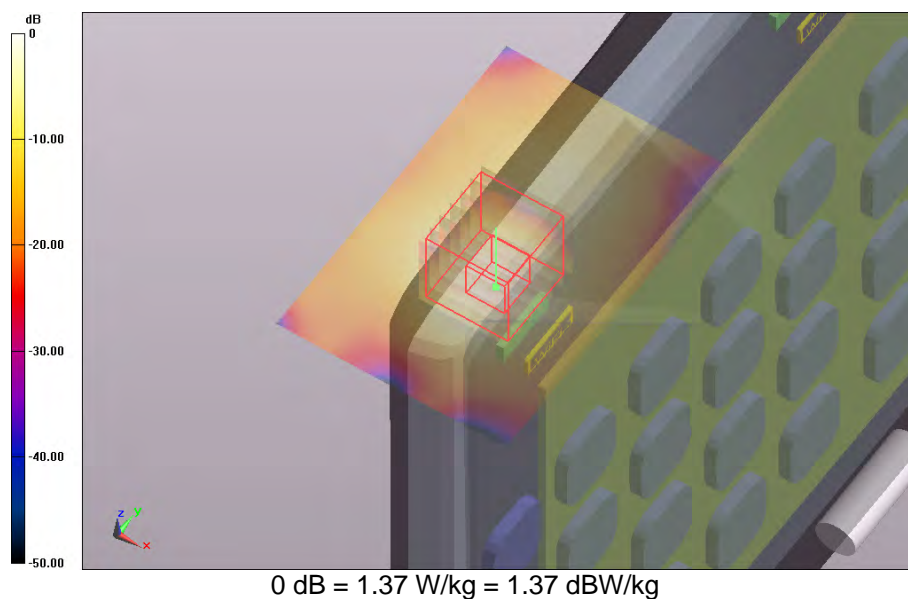


SAR Measurement Plot 12



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

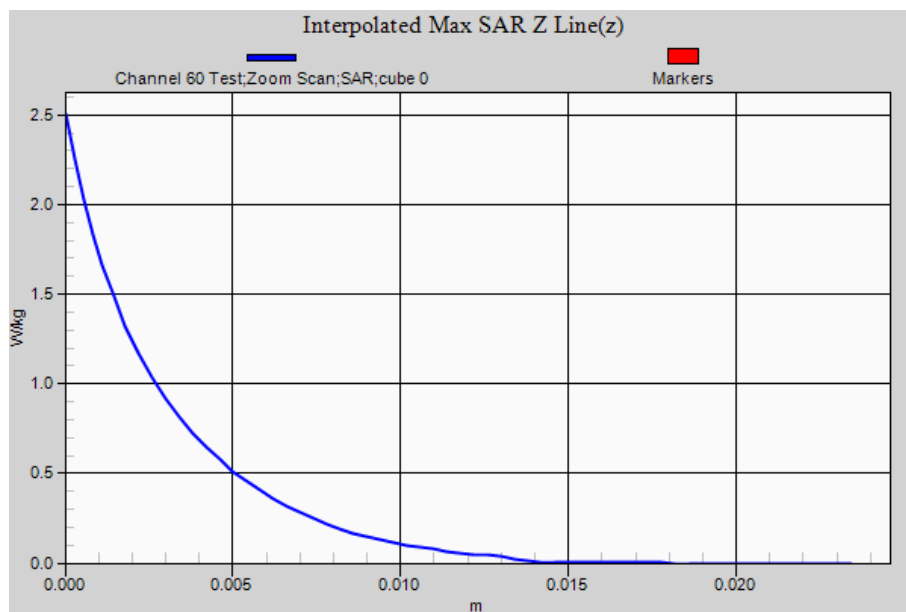

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:6

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 1 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5320 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5320.15$ MHz; $\sigma = 5.44$ S/m; $\epsilon_r = 47.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 64 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.410 W/kg

Edge 1 ANT 1 (OFDM) 07-Aug-2015/Channel 64 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 12.205 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.625 W/kg; SAR(10g) = 0.192 W/kg

Maximum value of SAR (interpolated) = 2.580 W/kg

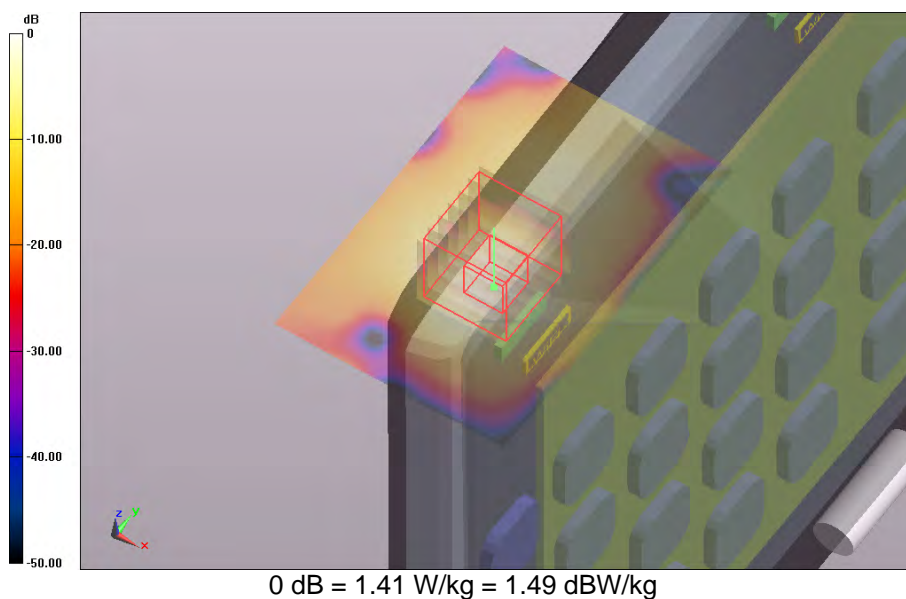


SAR Measurement Plot 13



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

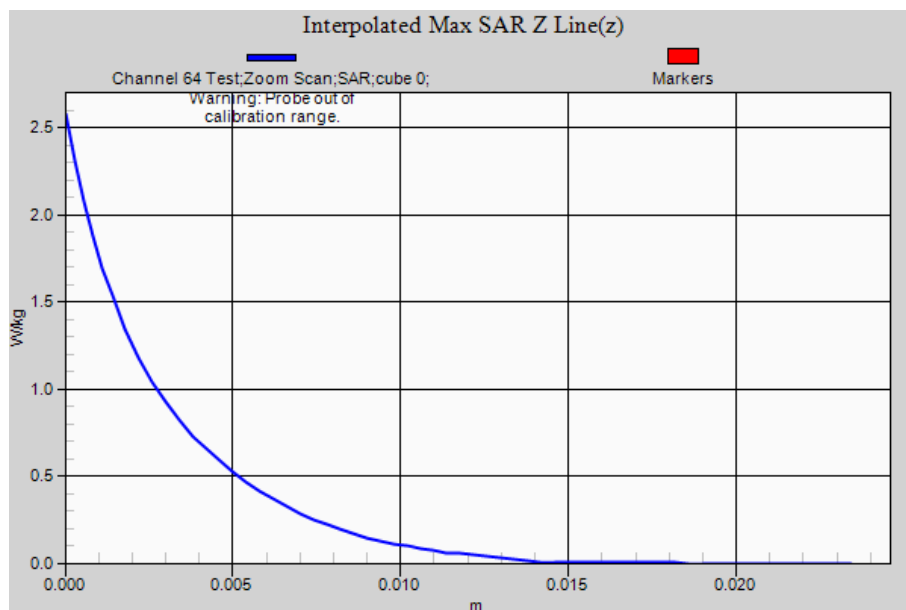

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:8

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 4 ANT 1 (OFDM) 07-Aug-2015

Communication System: 0 - OFDM 5 GHz HT0 (20 MHz); Communication System Band: 5.2 GHz; Frequency: 5300 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5300.35$ MHz; $\sigma = 5.40$ S/m; $\epsilon_r = 48.0$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 1 (OFDM) 07-Aug-2015/Channel 60 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.185 W/kg

Edge 4 ANT 1 (OFDM) 07-Aug-2015/Channel 60 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 5.185 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.071 W/kg; SAR(10g) = 0.022 W/kg

Maximum value of SAR (interpolated) = 0.272 W/kg

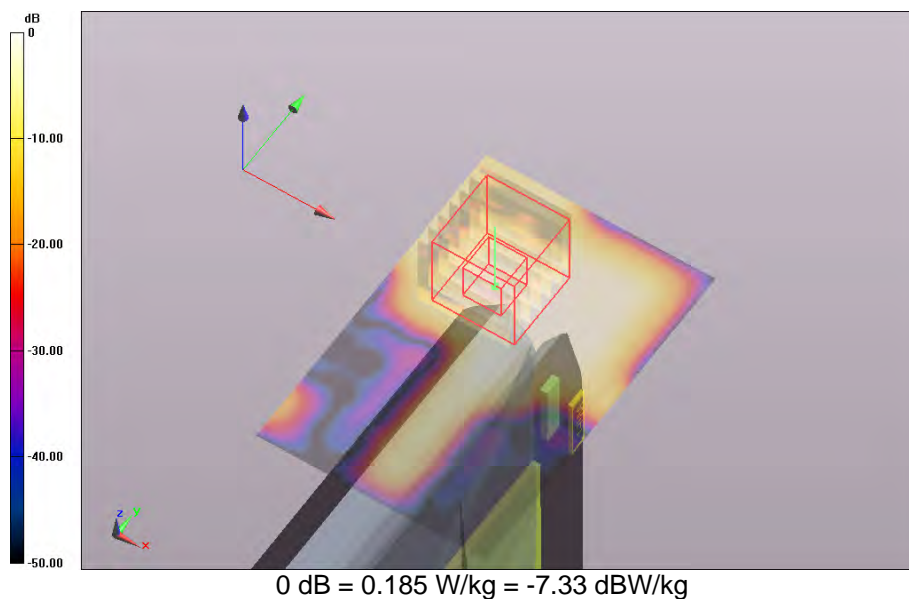


SAR Measurement Plot 14



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

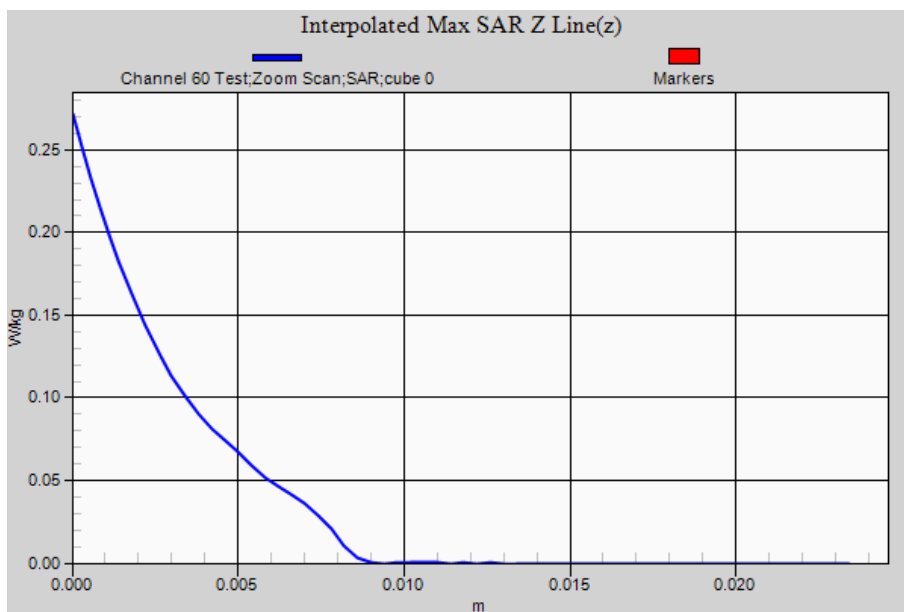

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5200 MHz WLAN FCC.da52:10

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 07-Sep-2015**

Communication System: 0 - CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5200 MHz; Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5199.7$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 48.3$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.67,4.67,4.67); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 07-Sep-2015/d=10mm, Pin=100mW, f=5200 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 18.100 W/kg**System Performance Check with D5GHzV2 Dipole 07-Sep-2015/d=10mm, Pin=100mW, f=5200 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 66.394 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 7.830 W/kg; SAR(10g) = 2.200 W/kg**

Maximum value of SAR (interpolated) = 31.000 W/kg

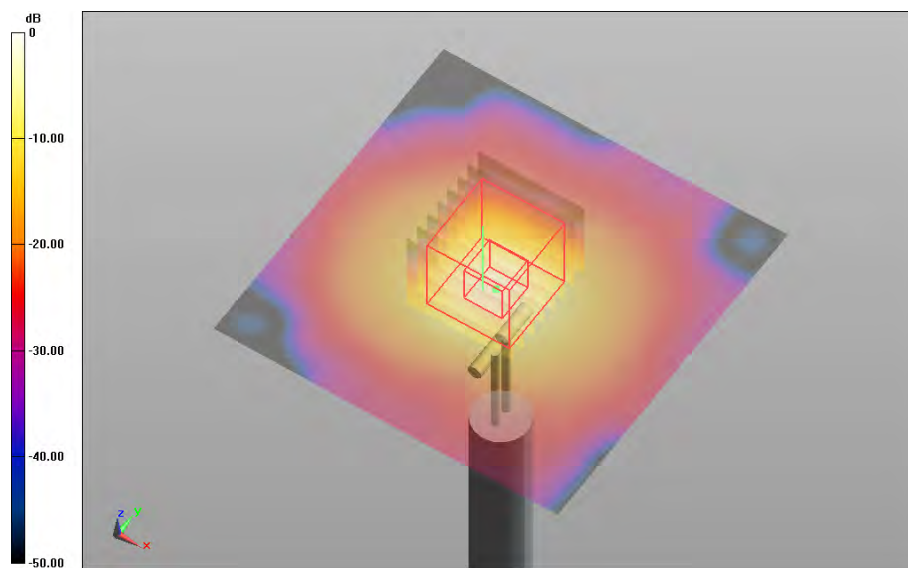


0 dB = 18.1 W/kg = 12.58 dBW/kg

SAR Measurement Plot 15



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

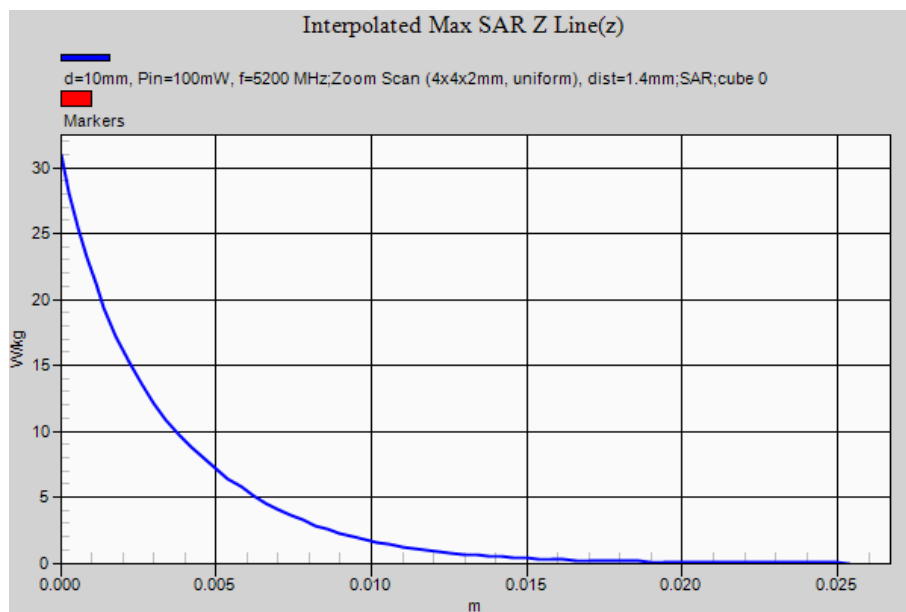

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:0

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Bystander ANT 1 (OFDM) 08-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Bystander ANT 1 (OFDM) 08-Sept-2015/Channel 110 Test/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.079 W/kg

Body Bystander ANT 1 (OFDM) 08-Sept-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0:

Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.694 V/m; **Power Drift = 0.03 dB**

Averaged SAR: SAR(1g) = 0.027 W/kg; SAR(10g) = 0.011 W/kg

Maximum value of SAR (interpolated) = 0.356 W/kg

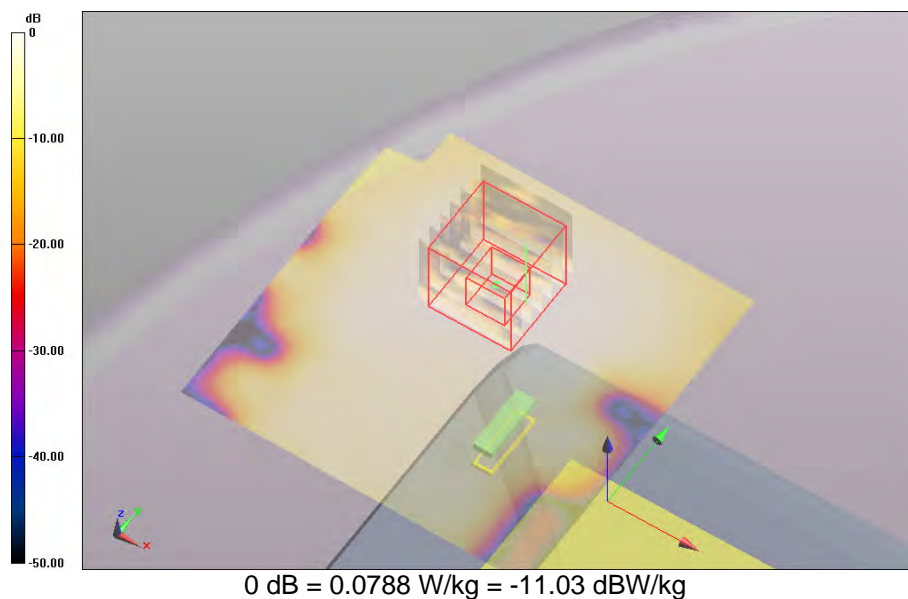


SAR Measurement Plot 16



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

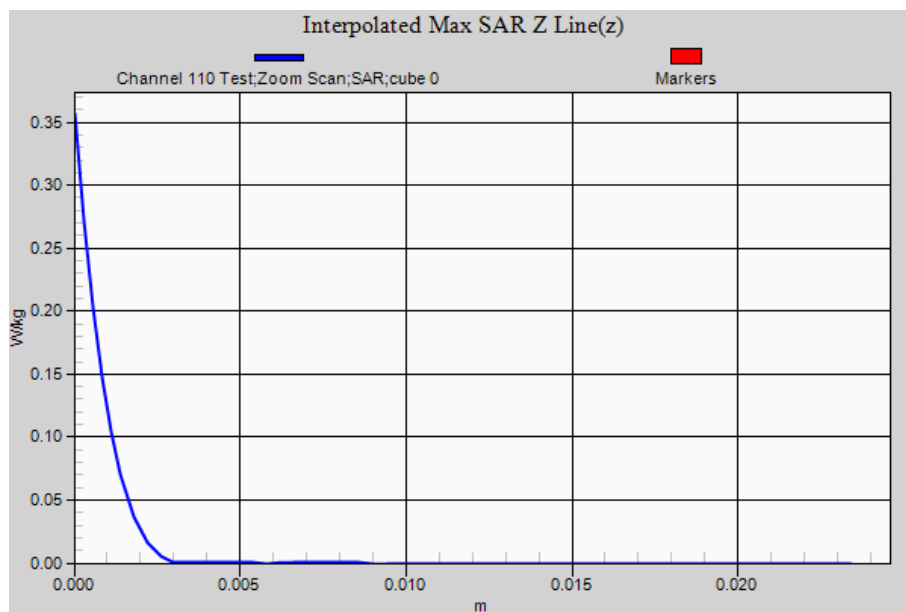

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Bystander ANT 2 (OFDM) 08-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Bystander ANT 2 (OFDM) 08-Sept-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.112 W/kg

Body Bystander ANT 2 (OFDM) 08-Sept-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 4.723 V/m; **Power Drift = -0.18 dB**

Averaged SAR: SAR(1g) = 0.035 W/kg; SAR(10g) = 0.015 W/kg

Maximum value of SAR (interpolated) = 0.345 W/kg

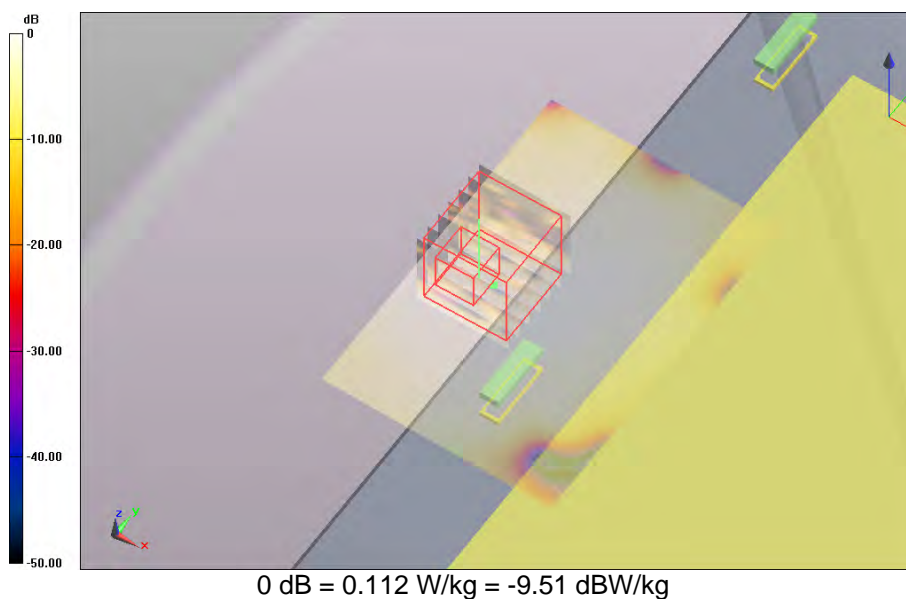


SAR Measurement Plot 17



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

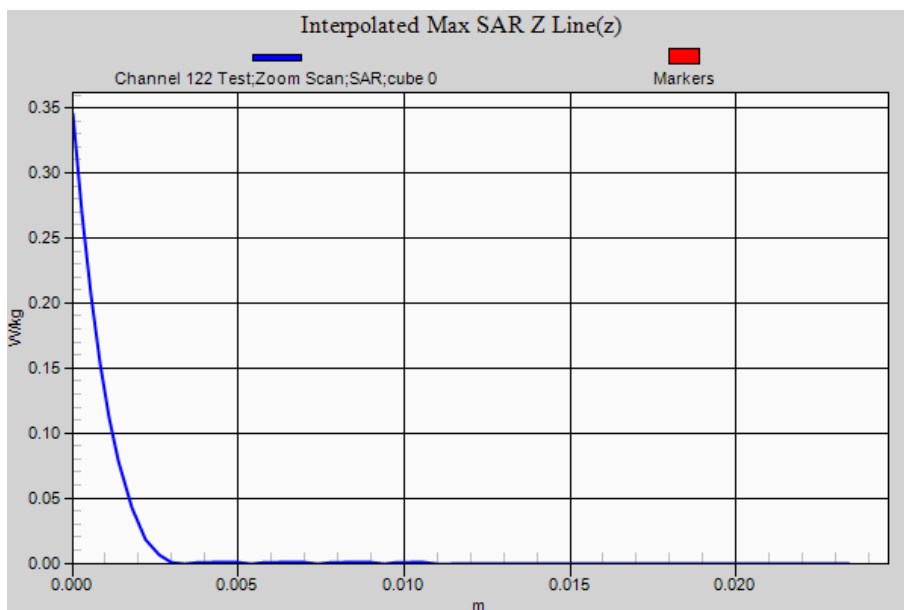

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 (OFDM) 08-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;

Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00

Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.84$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)

Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101


DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 08-Sept-2015/Channel 106 Test/Area Scan (81x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.189 W/kg

Body Lap Held ANT 2 (OFDM) 08-Sept-2015/Channel 106 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 1.972 V/m; **Power Drift = 0.05 dB**

Averaged SAR: SAR(1g) = 0.022 W/kg; SAR(10g) = 0.006 W/kg

Maximum value of SAR (interpolated) = 0.278 W/kg

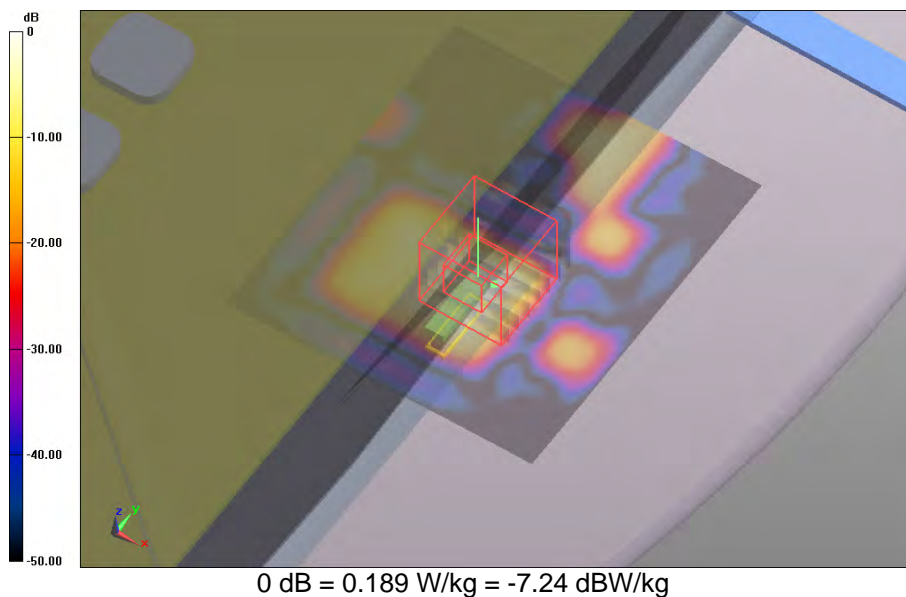


SAR Measurement Plot 18



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

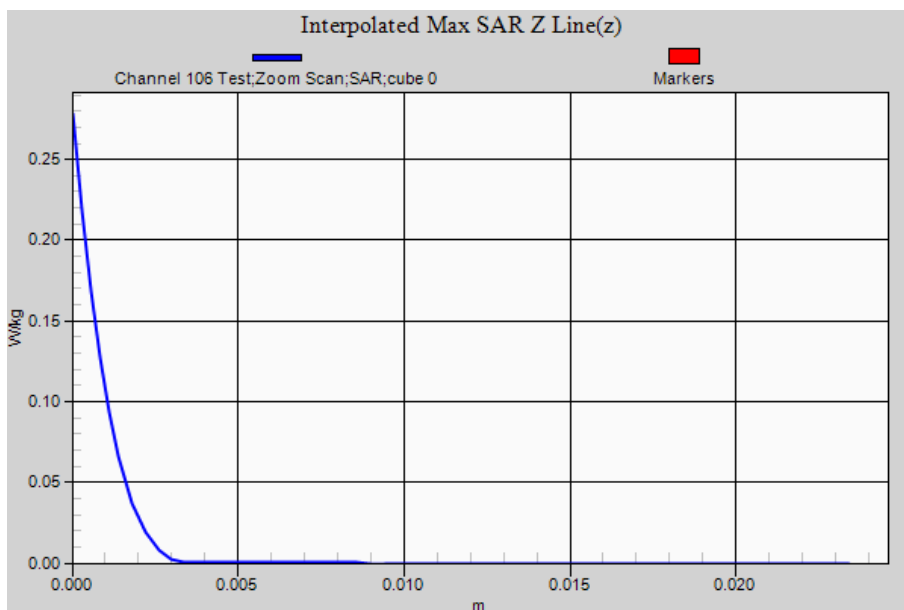

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:3

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 2 (OFDM) 08-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.98$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 08-Sept-2015/Channel 122 Test/Area Scan (81x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.224 W/kg

Body Lap Held ANT 2 (OFDM) 08-Sept-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 1.211 V/m; **Power Drift = 0.13 dB**

Averaged SAR: SAR(1g) = 0.028 W/kg; SAR(10g) = 0.009 W/kg

Maximum value of SAR (interpolated) = 0.328 W/kg

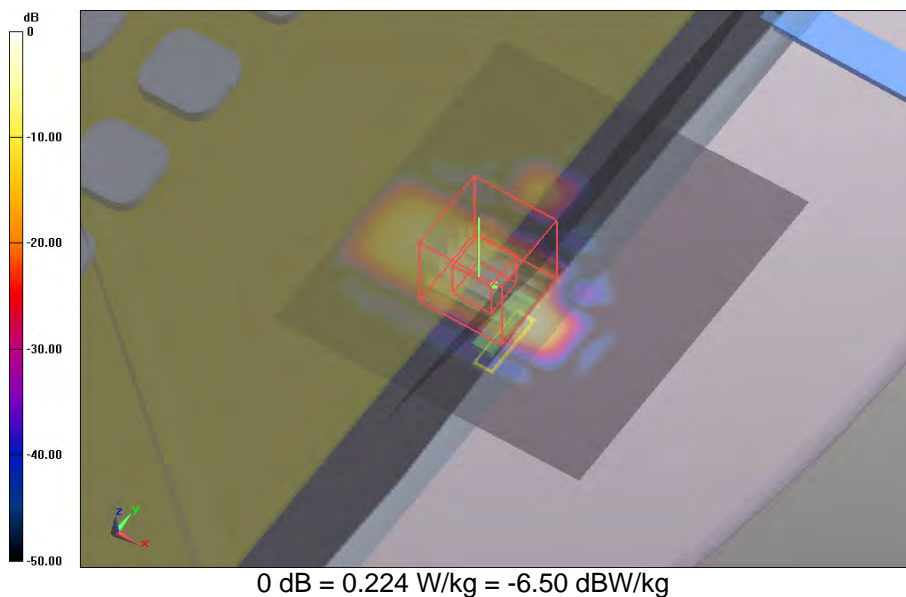


SAR Measurement Plot 19



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

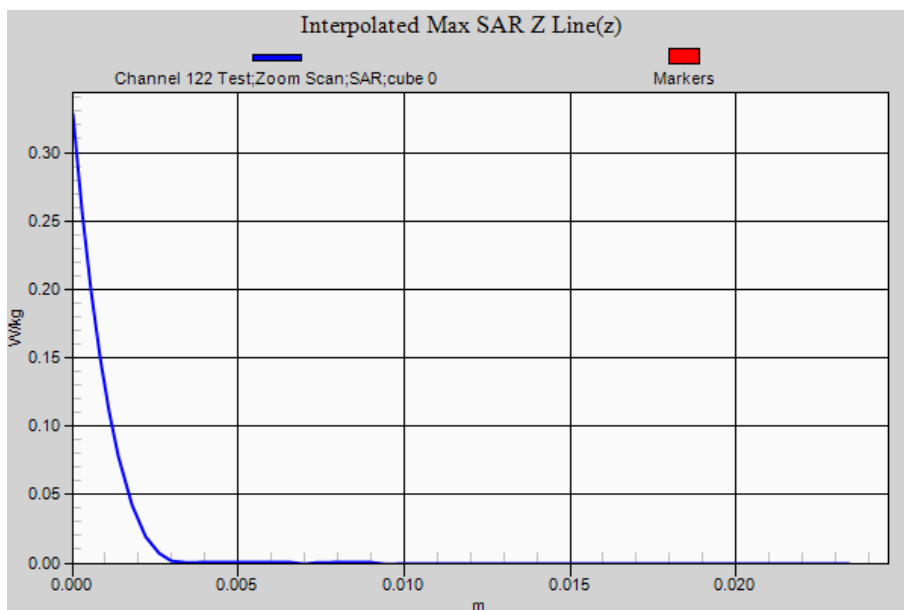

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:4

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 1 (OFDM) 08-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.88$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (OFDM) 08-Sept-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.477 W/kg

Body Lap Held ANT 1 (OFDM) 08-Sept-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 10.220 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.198 W/kg; SAR(10g) = 0.068 W/kg

Maximum value of SAR (interpolated) = 1.360 W/kg

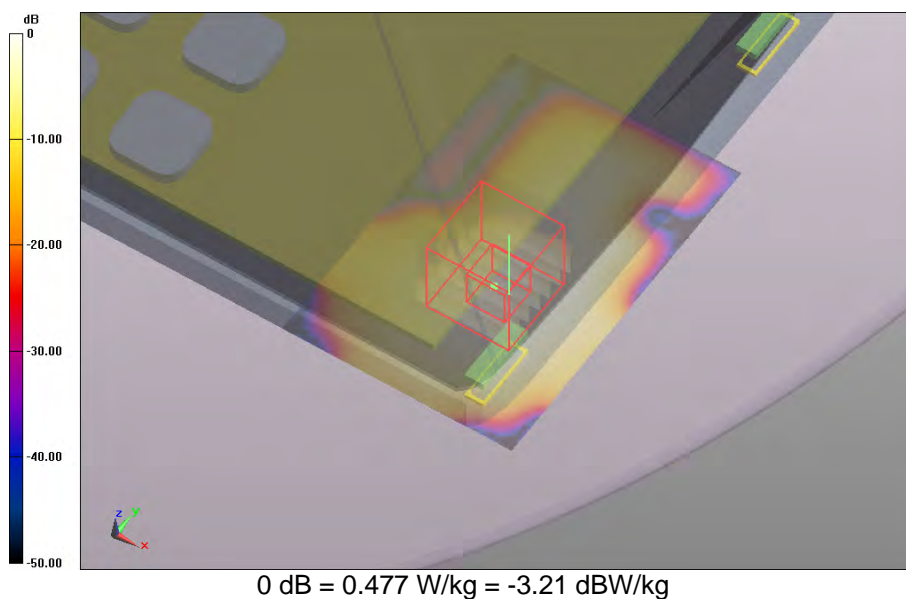


SAR Measurement Plot 20



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

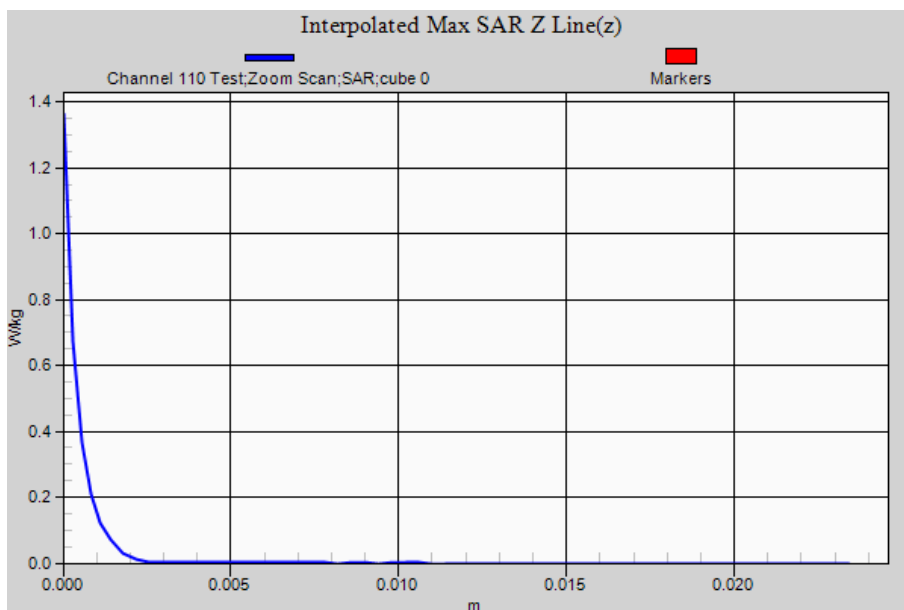

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 2 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5530 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5529.7$ MHz; $\sigma = 5.64$ S/m; $\epsilon_r = 47.2$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 09-Sept-2015/Channel 106 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.710 W/kg

Edge 1 ANT 2 (OFDM) 09-Sept-2015/Channel 106 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 18.653 V/m; **Power Drift = -0.15 dB**

Averaged SAR: SAR(1g) = 0.627 W/kg; SAR(10g) = 0.175 W/kg

Maximum value of SAR (interpolated) = 2.590 W/kg

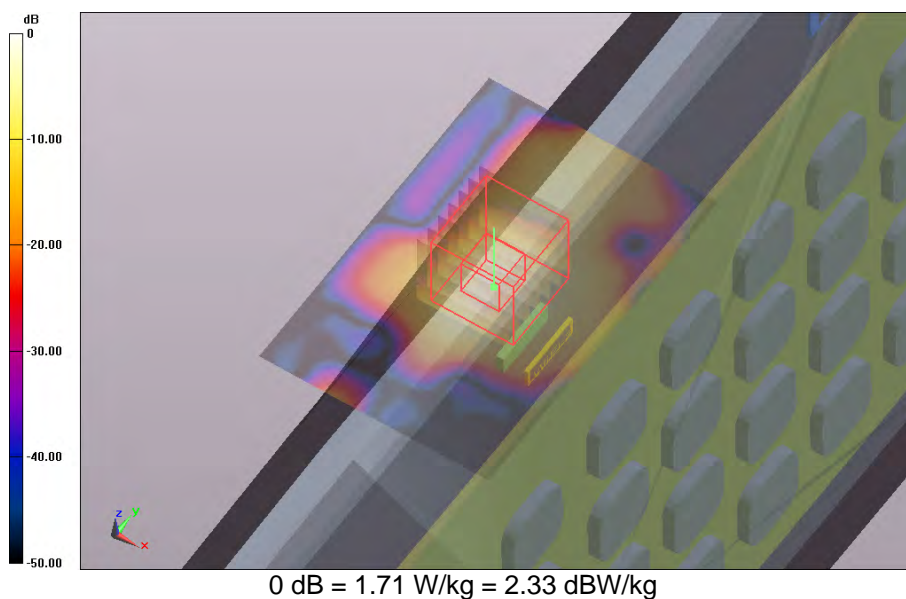


SAR Measurement Plot 21



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

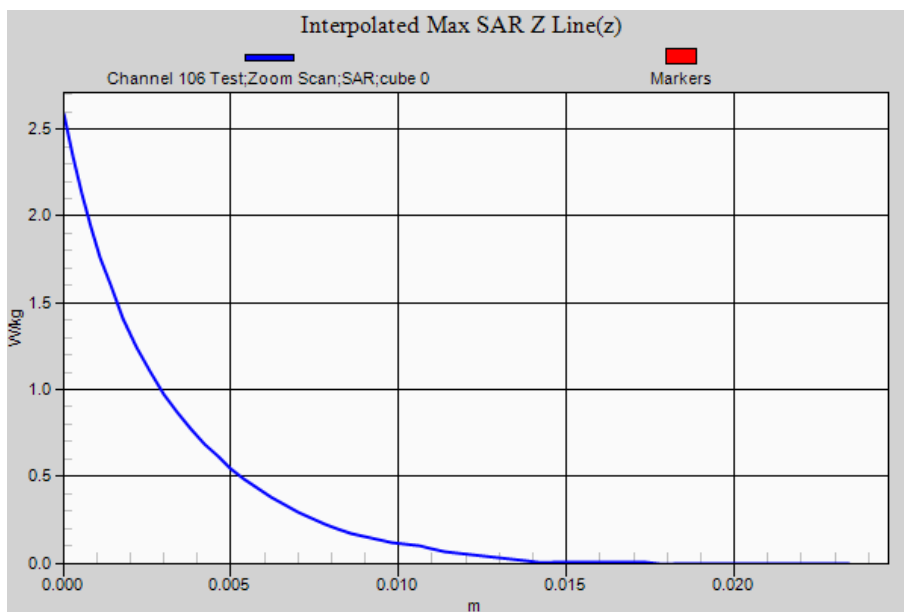

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:5

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 2 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 09-Sept-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.710 W/kg

Edge 1 ANT 2 (OFDM) 09-Sept-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 18.479 V/m; **Power Drift = -0.21 dB**

Averaged SAR: SAR(1g) = 0.615 W/kg; SAR(10g) = 0.177 W/kg

Maximum value of SAR (interpolated) = 2.500 W/kg

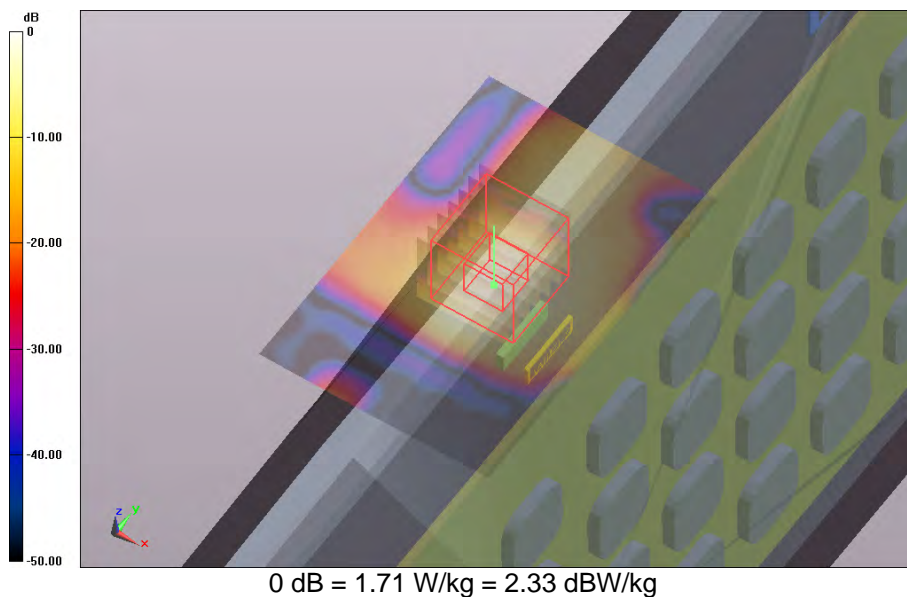


SAR Measurement Plot 22



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

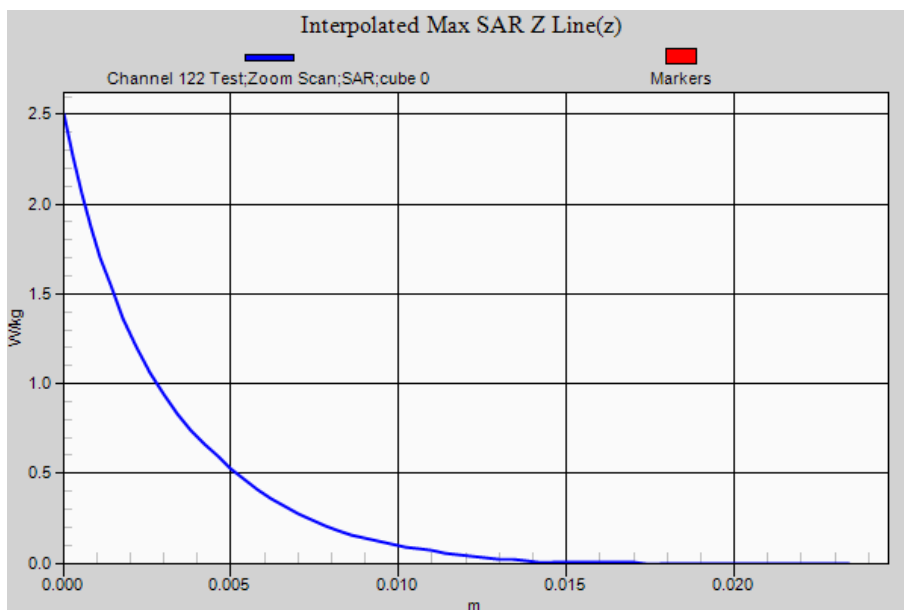

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:6

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 1 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5510 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5509.9$ MHz; $\sigma = 5.61$ S/m; $\epsilon_r = 47.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 102 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.330 W/kg

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 102 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 13.919 V/m; **Power Drift = -0.15 dB**

Averaged SAR: SAR(1g) = 0.585 W/kg; SAR(10g) = 0.182 W/kg

Maximum value of SAR (interpolated) = 2.370 W/kg

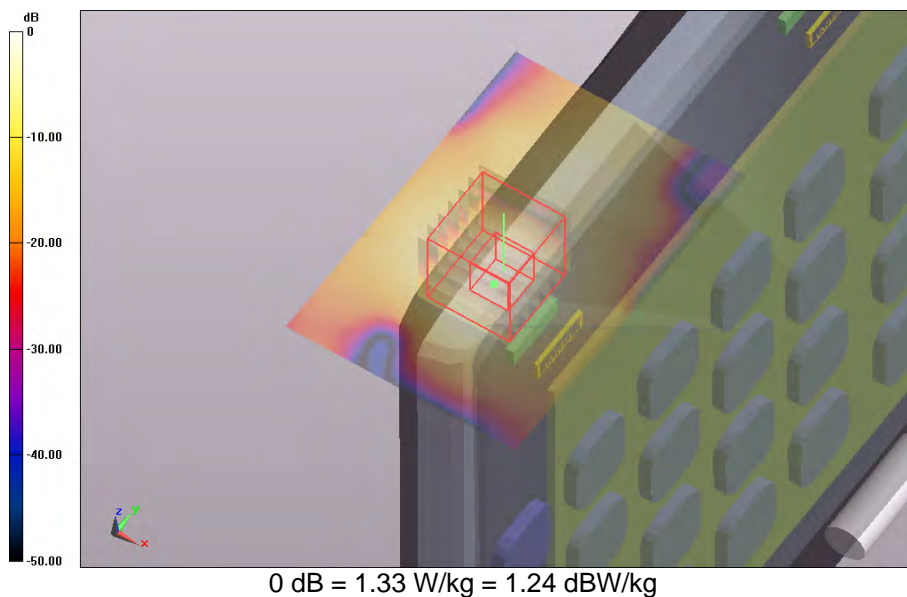


SAR Measurement Plot 23



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

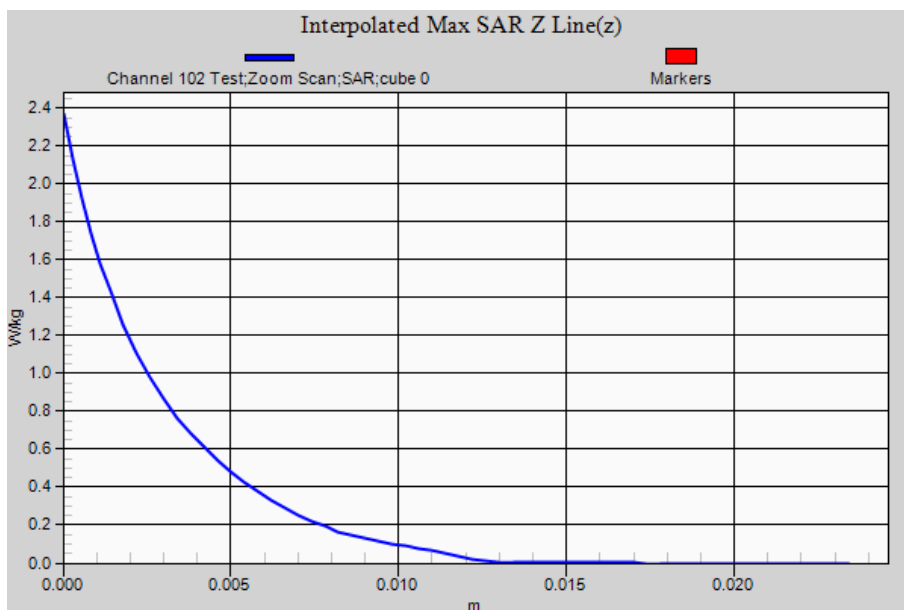

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:6

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 1 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.410 W/kg

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 14.207 V/m; **Power Drift = 0.06 dB**

Averaged SAR: SAR(1g) = 0.625 W/kg; SAR(10g) = 0.196 W/kg

Maximum value of SAR (interpolated) = 2.530 W/kg

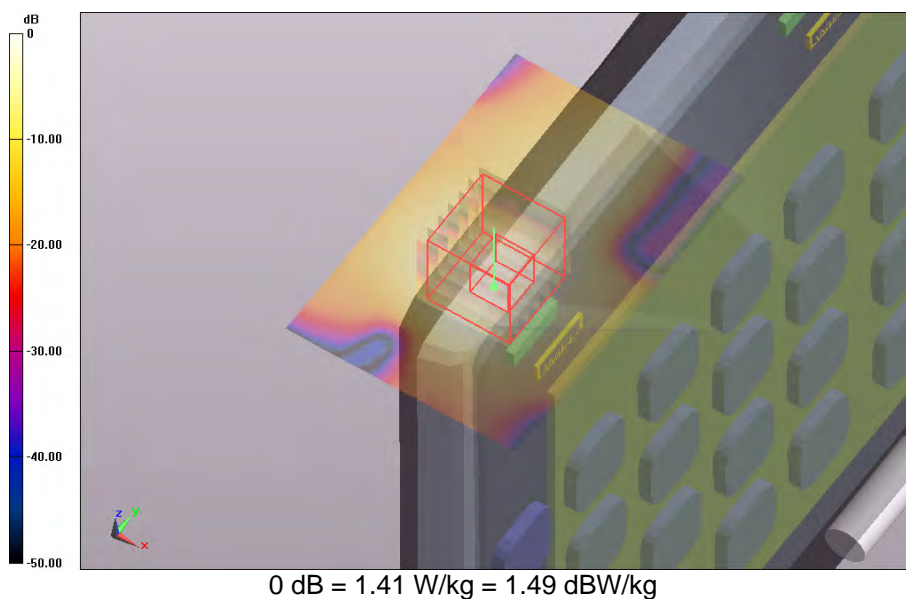


SAR Measurement Plot 24



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

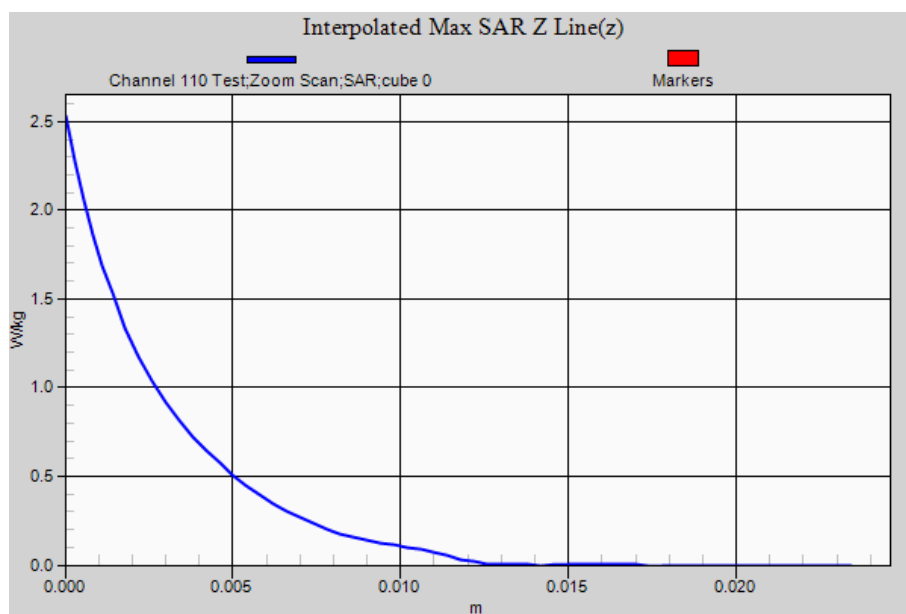

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 1 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5610 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5610.55$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 122 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.210 W/kg

Edge 1 ANT 1 (OFDM) 09-Sept-2015/Channel 122 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 13.695 V/m; **Power Drift = -0.13 dB**

Averaged SAR: SAR(1g) = 0.524 W/kg; SAR(10g) = 0.168 W/kg

Maximum value of SAR (interpolated) = 2.150 W/kg

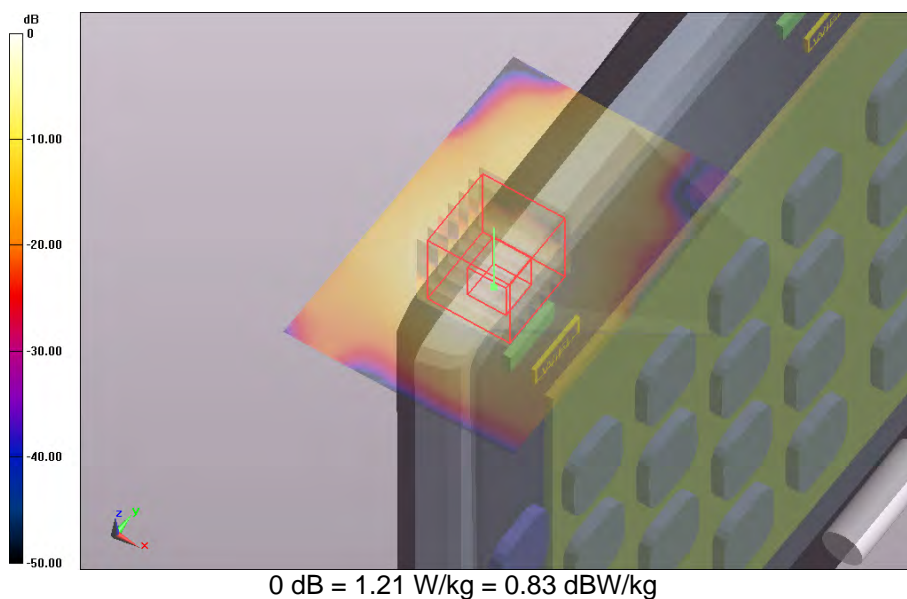


SAR Measurement Plot 25



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

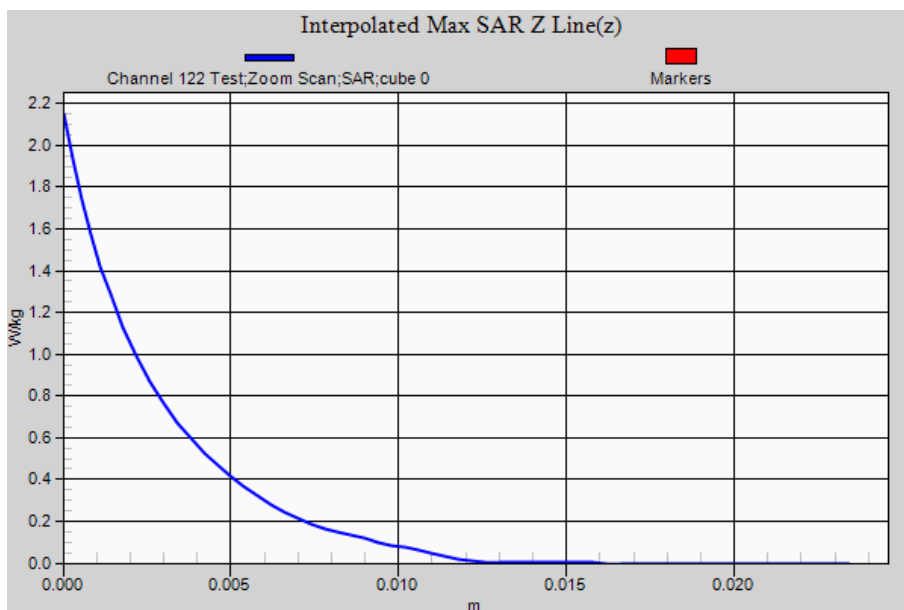

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 4 ANT 1 (OFDM) 09-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (40 MHz); Communication System Band: 5.6 GHz Band;
Frequency: 5550 MHz, Communication System PAR: 0.00 dB; PMF: 1.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5549.5$ MHz; $\sigma = 5.68$ S/m; $\epsilon_r = 47.1$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 1 (OFDM) 09-Sept-2015/Channel 110 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.330 W/kg

Edge 4 ANT 1 (OFDM) 09-Sept-2015/Channel 110 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 6.665 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.123 W/kg; SAR(10g) = 0.040 W/kg

Maximum value of SAR (interpolated) = 0.520 W/kg

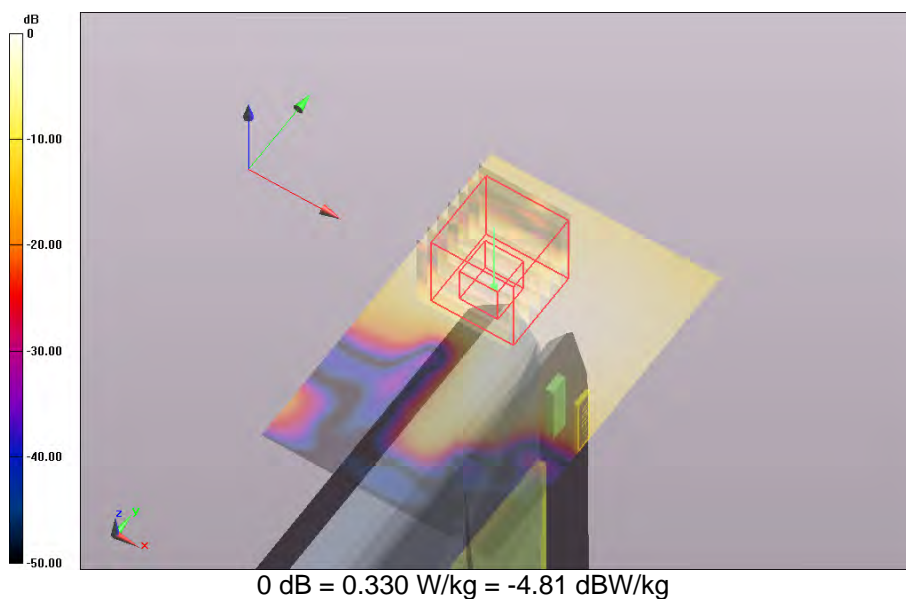


SAR Measurement Plot 26



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

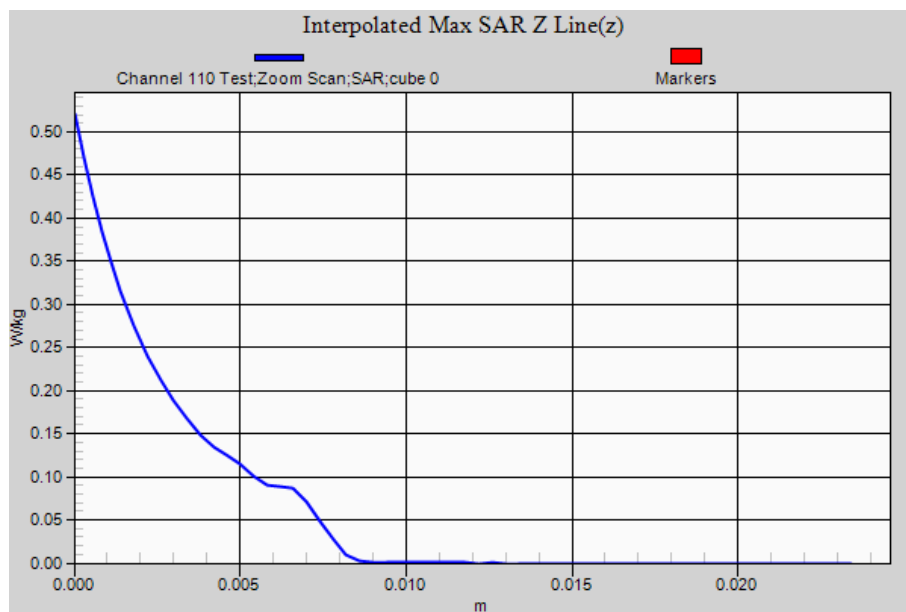

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:10

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 08-Sept-2015**Communication System: 0 - System Check; Communication System Band: 5600 MHz; Frequency: 5600 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00Medium Parameters used: $f=5600.65$ MHz; $\sigma = 5.96$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0\text{g/cm}^3$

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 08-Sept-2015/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 19.900 W/kg**System Performance Check with D5GHzV2 Dipole 08-Sept-2015/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 63.452 V/m; **Power Drift = -0.03 dB****Averaged SAR: SAR(1g) = 8.140 W/kg; SAR(10g) = 2.260 W/kg**

Maximum value of SAR (interpolated) = 34.200 W/kg

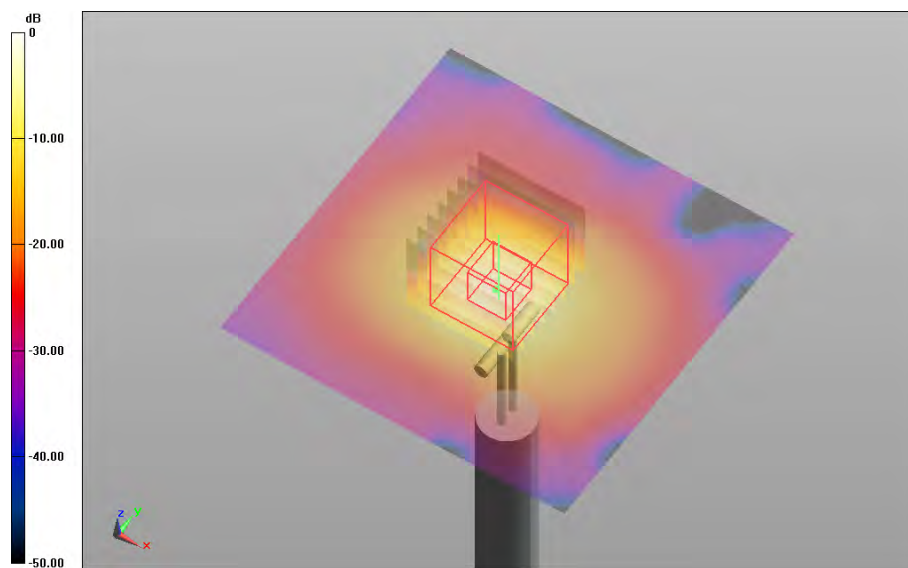


0 dB = 19.9 W/kg = 12.99 dBW/kg

SAR Measurement Plot 27



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

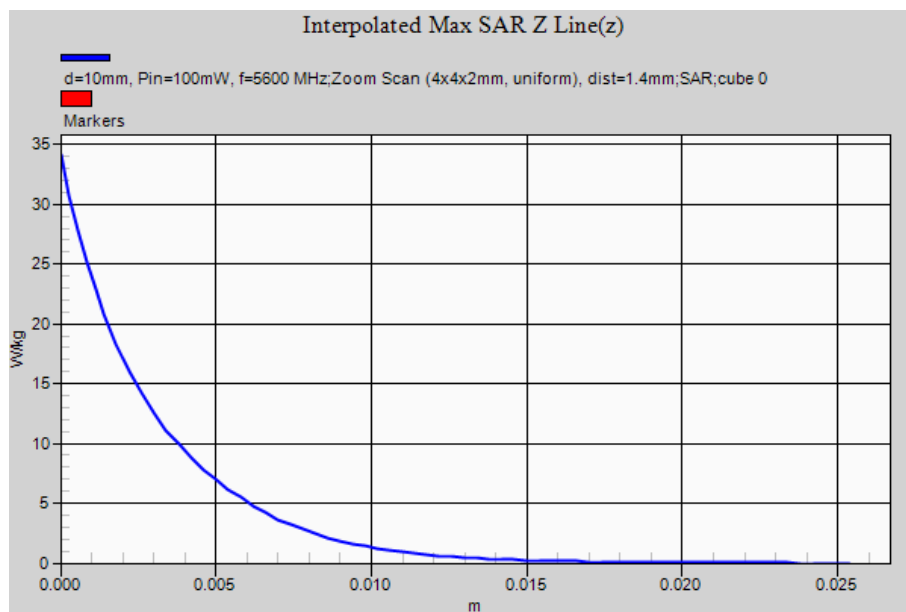

Test Lab: EMCTech

Test File: M150813 5600 MHz WLAN FCC.da52:11

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 09-Sept-2015**Communication System: 0 - System Check; Communication System Band: 5600 MHz; Frequency: 5600 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00Medium Parameters used: $f=5600.65$ MHz; $\sigma = 5.76$ S/m; $\epsilon_r = 46.9$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 09-Sept-2015/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 21.700 W/kg**System Performance Check with D5GHzV2 Dipole 09-Sept-2015/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 62.116 V/m; **Power Drift = 0.02 dB****Averaged SAR: SAR(1g) = 8.550 W/kg; SAR(10g) = 2.380 W/kg**

Maximum value of SAR (interpolated) = 34.300 W/kg

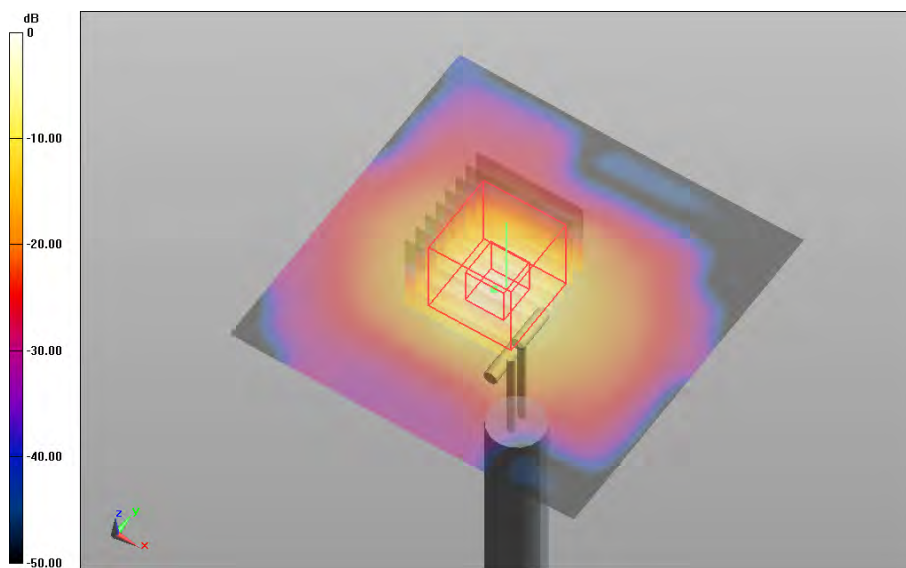


0 dB = 21.7 W/kg = 13.36 dBW/kg

SAR Measurement Plot 28



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

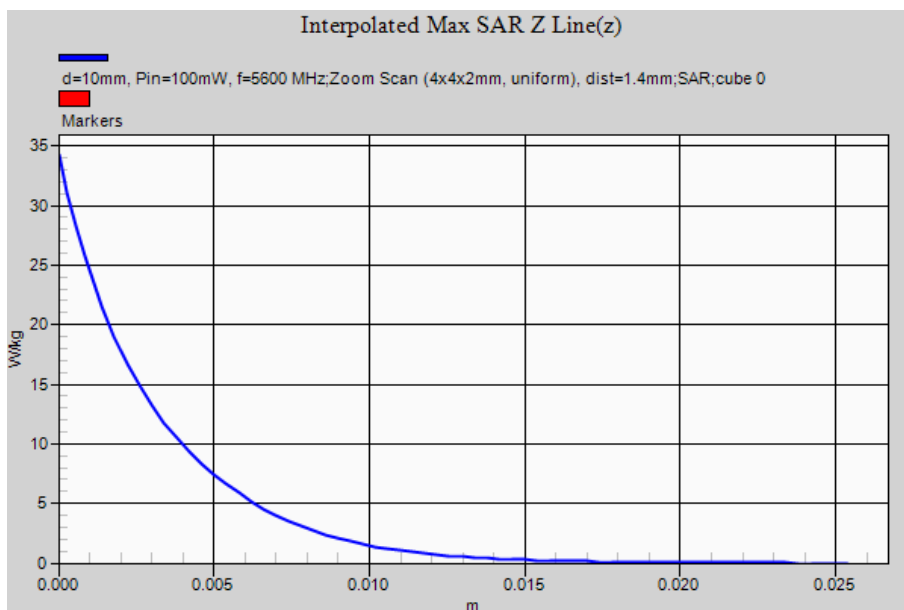

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:0

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Bystander ANT 1 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Bystander ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.088 W/kg

Body Bystander ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:

Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 2.690 V/m; **Power Drift = 0.10 dB**

Averaged SAR: SAR(1g) = 0.022 W/kg; SAR(10g) = 0.008 W/kg

Maximum value of SAR (interpolated) = 0.293 W/kg

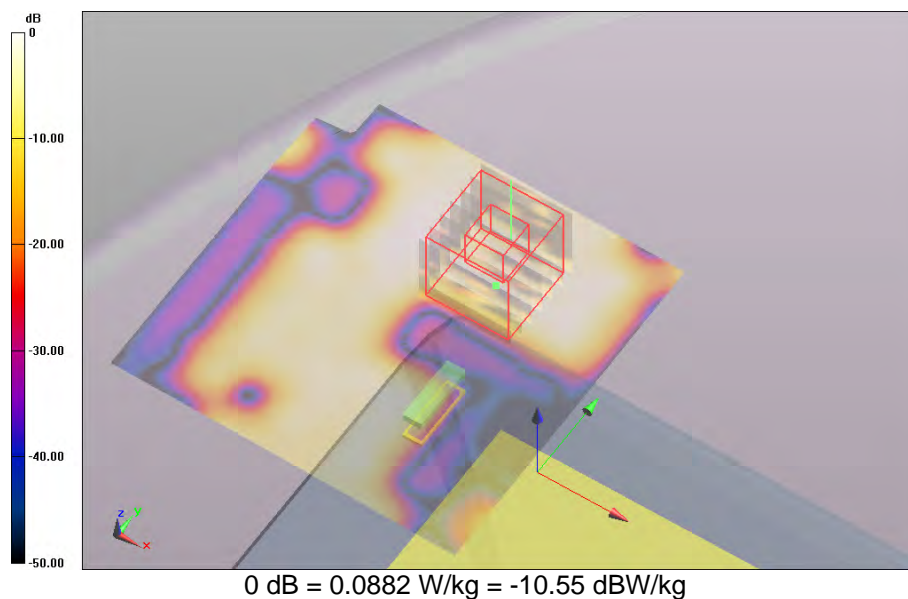


SAR Measurement Plot 29



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

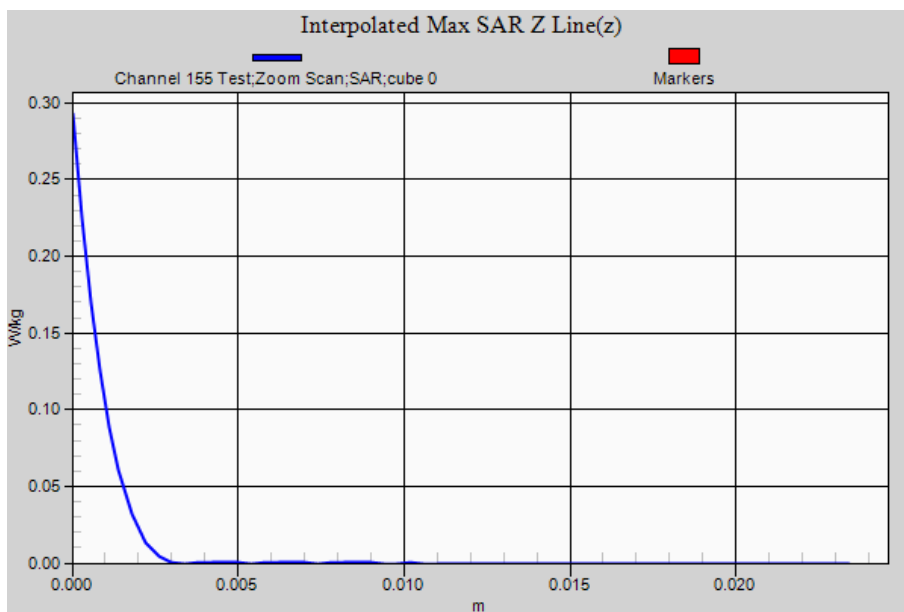

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:1

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Bystander ANT 2 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)


Body Bystander ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (91x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.080 W/kg

Body Bystander ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0:

Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.755 V/m; **Power Drift = -0.16 dB**

Averaged SAR: SAR(1g) = 0.023 W/kg; SAR(10g) = 0.008 W/kg

Maximum value of SAR (interpolated) = 0.336 W/kg

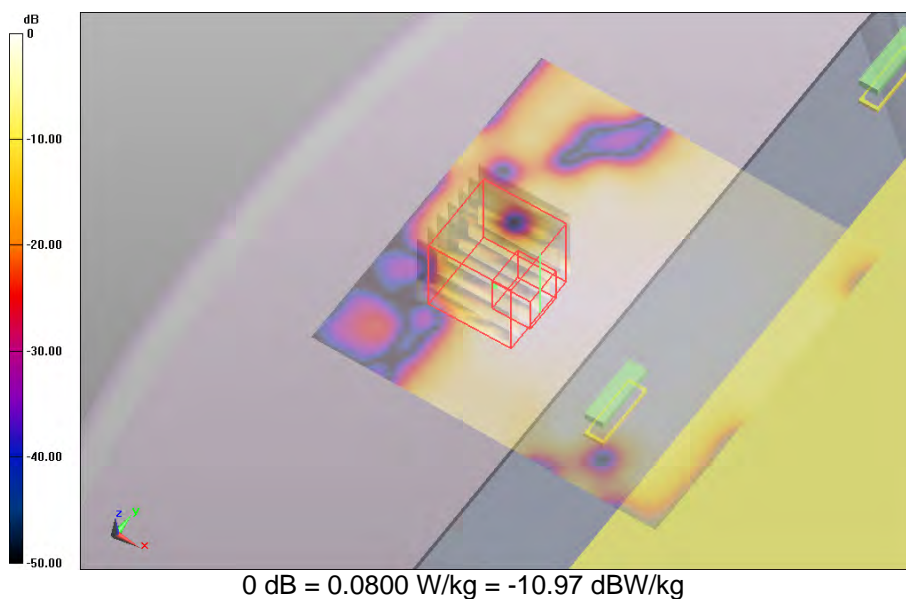


SAR Measurement Plot 30



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

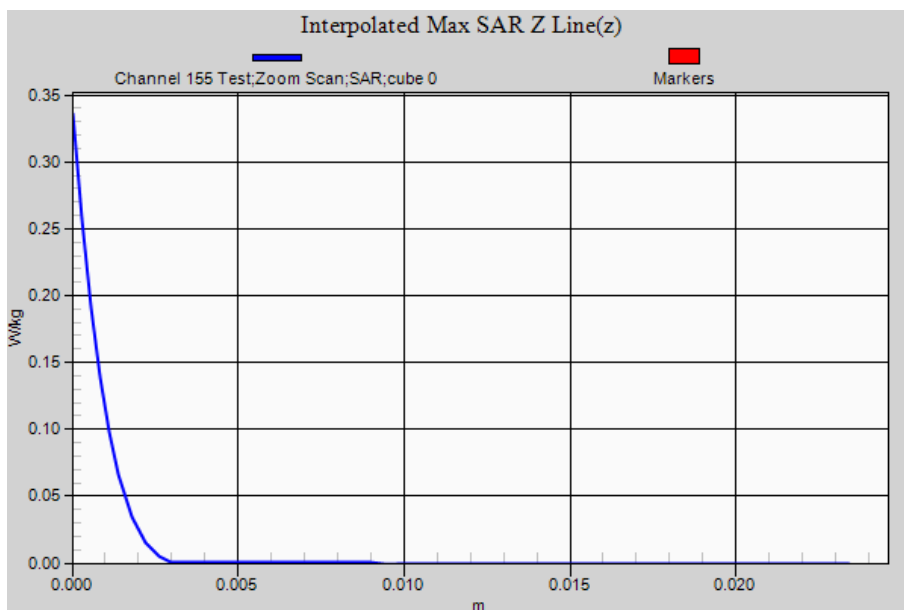

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:3

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Body Lap Held ANT 2 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.04$ S/m; $\epsilon_r = 46.6$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 10-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.214 W/kg

Body Lap Held ANT 2 (OFDM) 10-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 1.881 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.026 W/kg; SAR(10g) = 0.007 W/kg

Maximum value of SAR (interpolated) = 0.288 W/kg

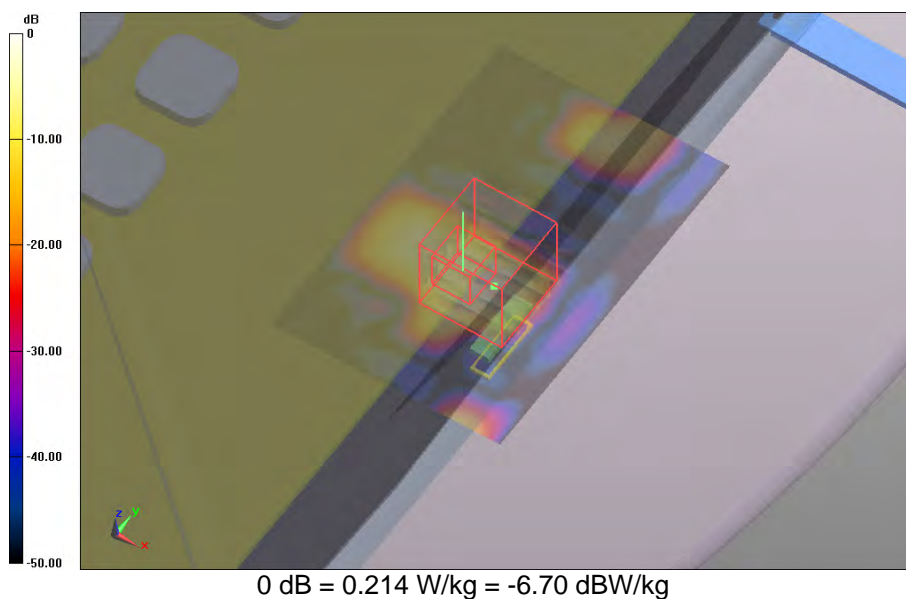


SAR Measurement Plot 31



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

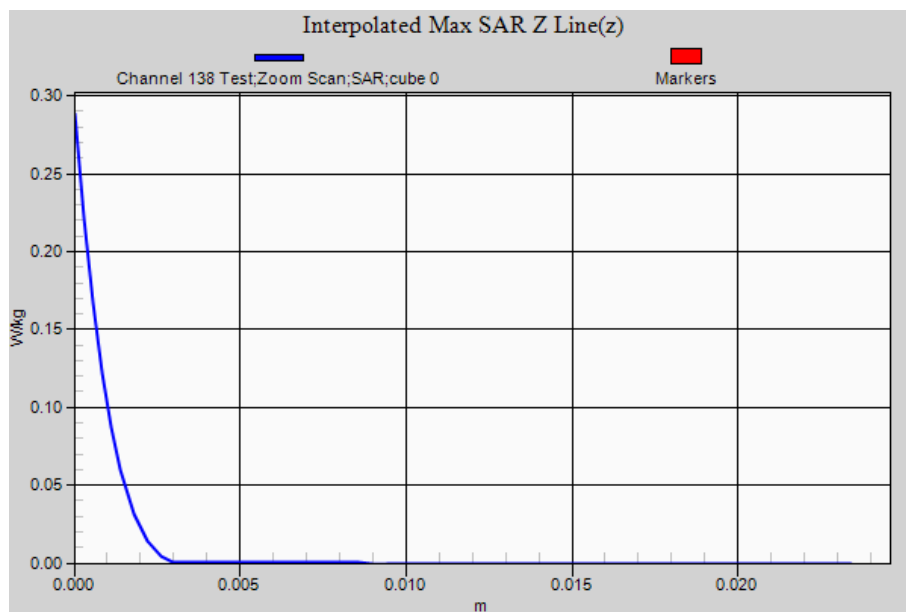

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:3

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 2 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.150 W/kg

Body Lap Held ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 3.022 V/m; **Power Drift = -0.19 dB**

Averaged SAR: SAR(1g) = 0.019 W/kg; SAR(10g) = 0.005 W/kg

Maximum value of SAR (interpolated) = 0.207 W/kg

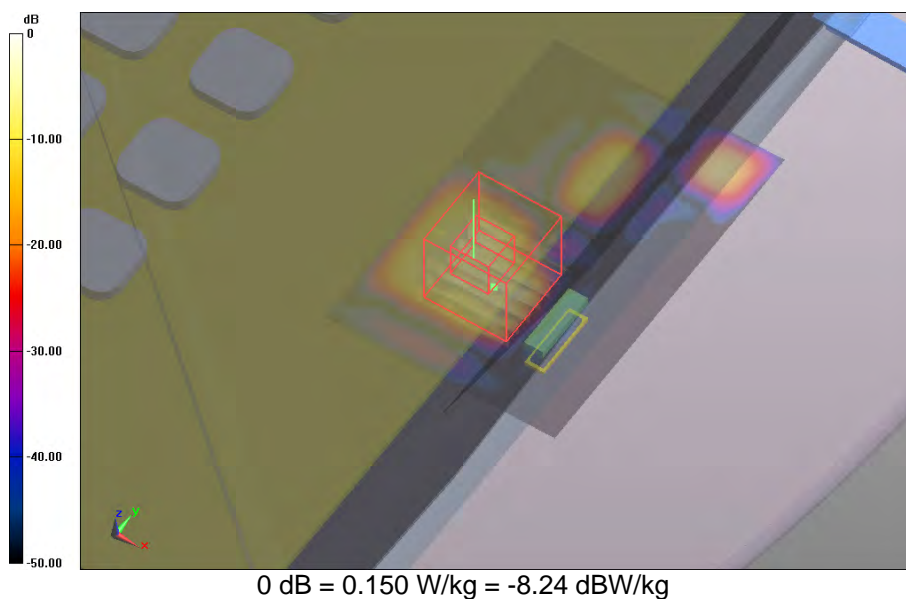


SAR Measurement Plot 32



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

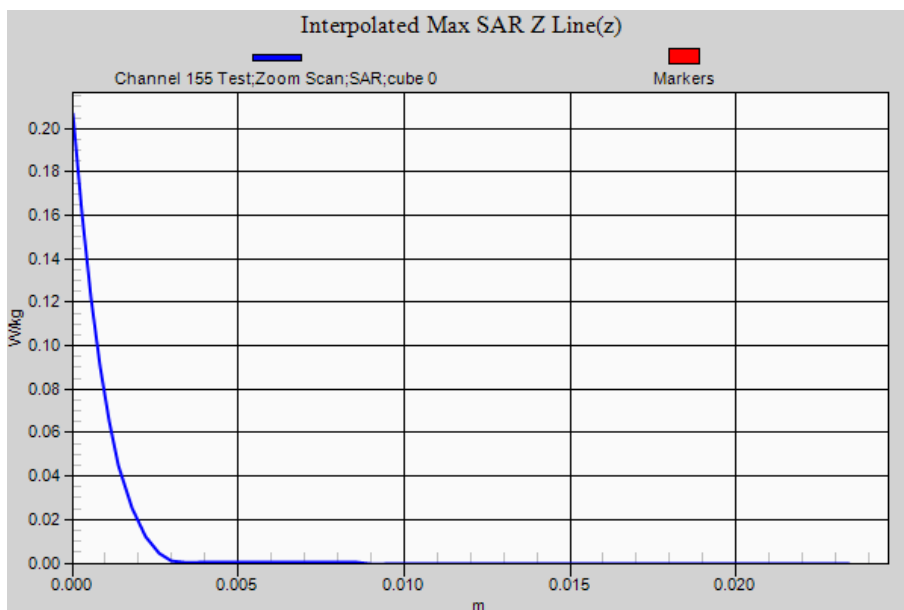

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:4

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Body Lap Held ANT 1 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Body Lap Held ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.351 W/kg

Body Lap Held ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 8.775 V/m; **Power Drift = -0.06 dB**

Averaged SAR: SAR(1g) = 0.139 W/kg; SAR(10g) = 0.046 W/kg

Maximum value of SAR (interpolated) = 0.703 W/kg

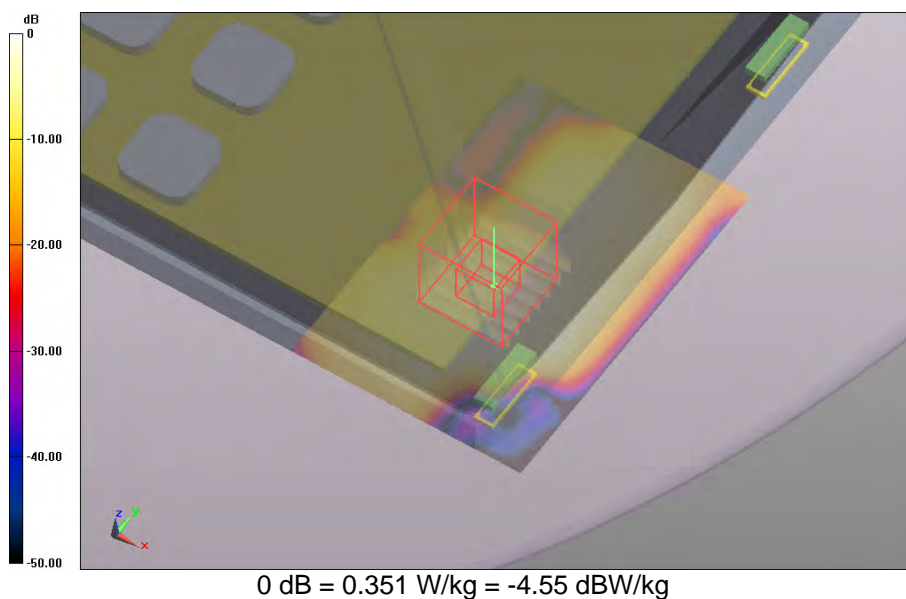


SAR Measurement Plot 33



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

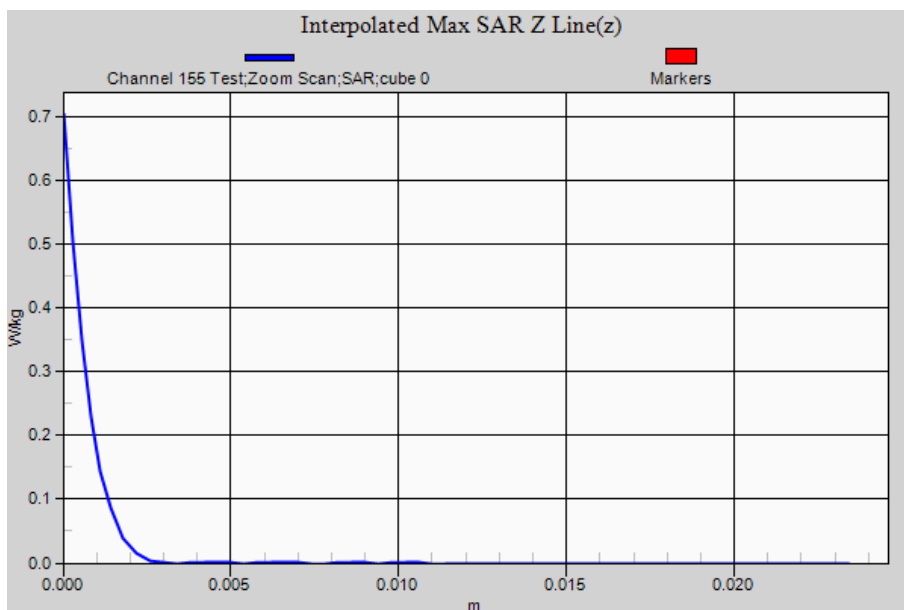

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:5

**DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM
(MAC):A4:34:D9:09:92:96**

Configuration: Edge 1 ANT 2 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.04$ S/m; $\epsilon_r = 46.6$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 10-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.570 W/kg

Edge 1 ANT 2 (OFDM) 10-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 15.326 V/m; **Power Drift = 0.19 dB**

Averaged SAR: SAR(1g) = 0.578 W/kg; SAR(10g) = 0.171 W/kg

Maximum value of SAR (interpolated) = 2.400 W/kg

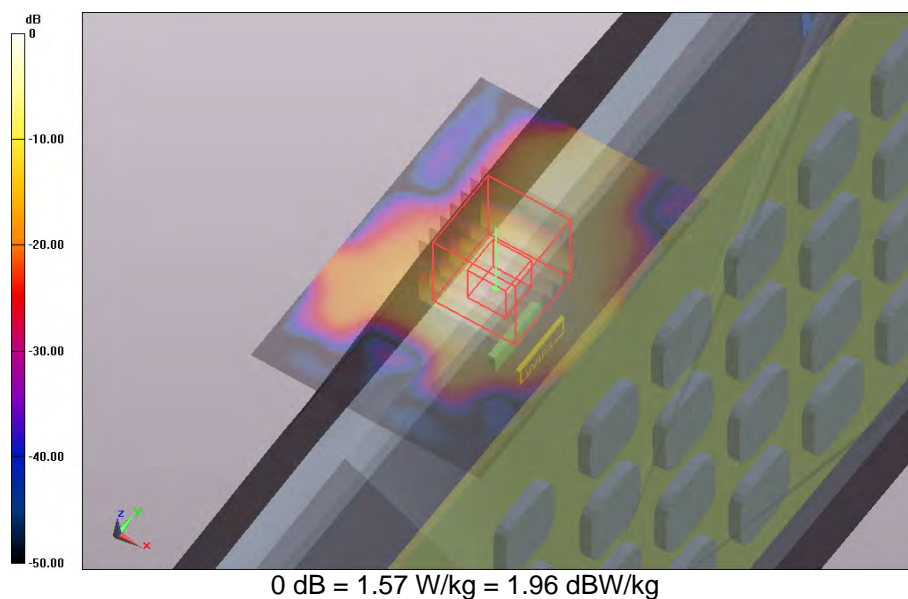


SAR Measurement Plot 34



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

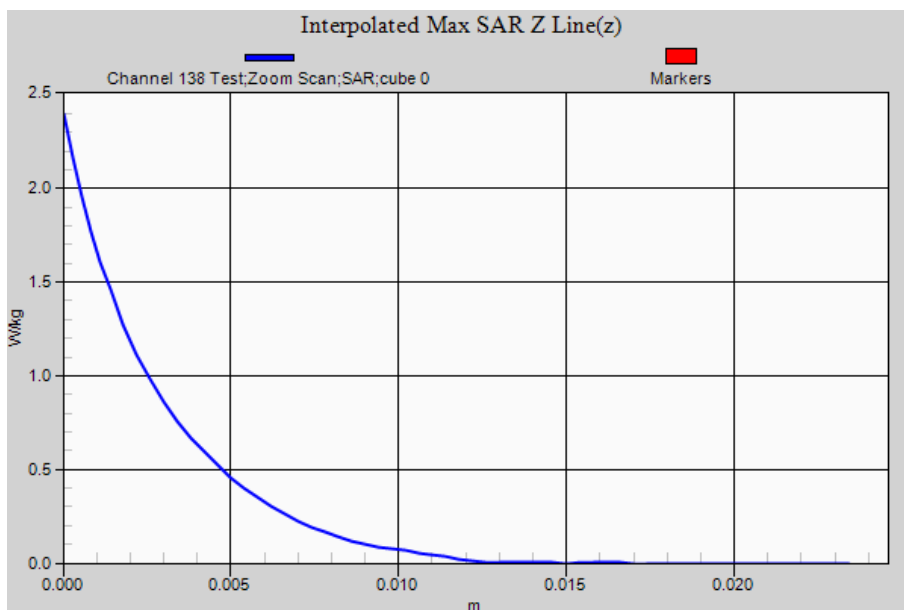

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:5

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 2 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.390 W/kg

Edge 1 ANT 2 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 14.992 V/m; **Power Drift = 0.06 dB**

Averaged SAR: SAR(1g) = 0.492 W/kg; SAR(10g) = 0.143 W/kg

Maximum value of SAR (interpolated) = 2.040 W/kg

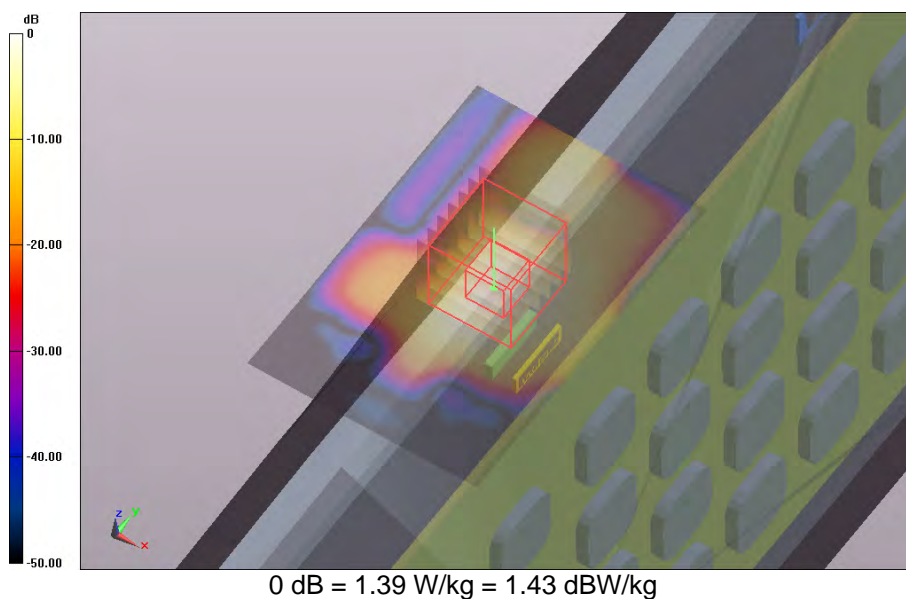


SAR Measurement Plot 35



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

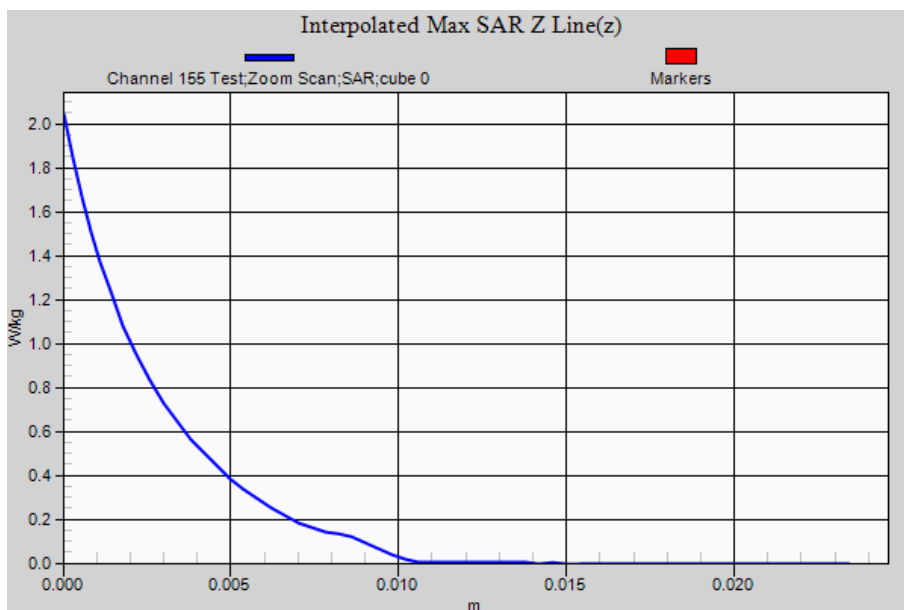

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 1 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5690 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5689.75$ MHz; $\sigma = 6.04$ S/m; $\epsilon_r = 46.6$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (3.95,3.95,3.95); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 10-Sept-2015/Channel 138 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.440 W/kg

Edge 1 ANT 1 (OFDM) 10-Sept-2015/Channel 138 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 13.202 V/m; **Power Drift = 0.07 dB**

Averaged SAR: SAR(1g) = 0.647 W/kg; SAR(10g) = 0.198 W/kg

Maximum value of SAR (interpolated) = 2.850 W/kg

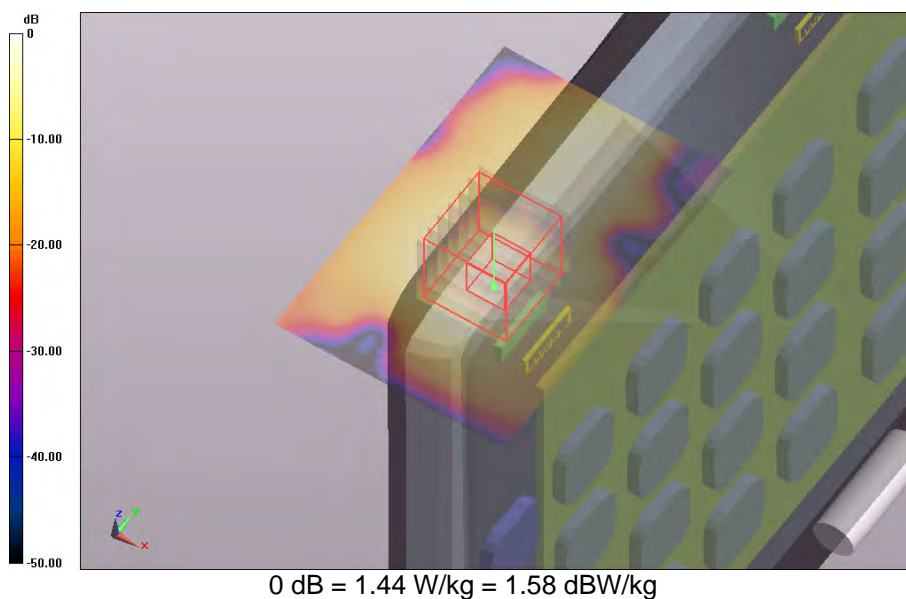


SAR Measurement Plot 36



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

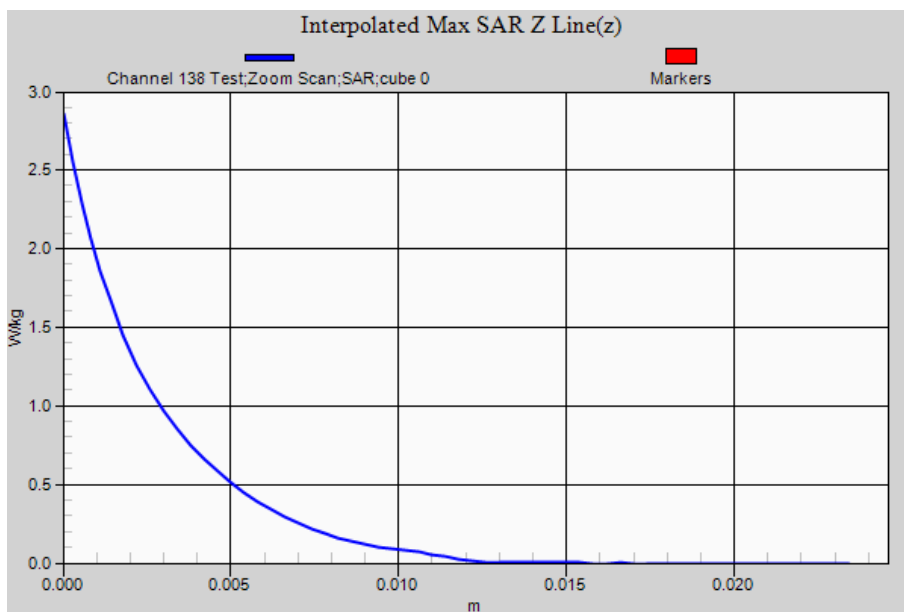

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:6

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 1 ANT 1 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection (Locations From Previous Scan Used))
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 1 ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 1.340 W/kg

Edge 1 ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 13.697 V/m; **Power Drift = -0.11 dB**

Averaged SAR: SAR(1g) = 0.608 W/kg; SAR(10g) = 0.189 W/kg

Maximum value of SAR (interpolated) = 2.680 W/kg

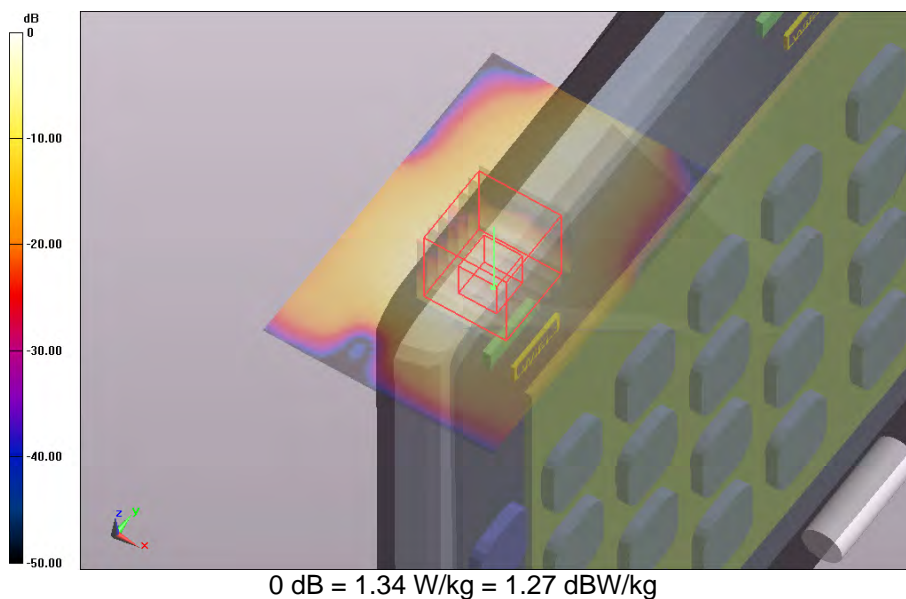


SAR Measurement Plot 37



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

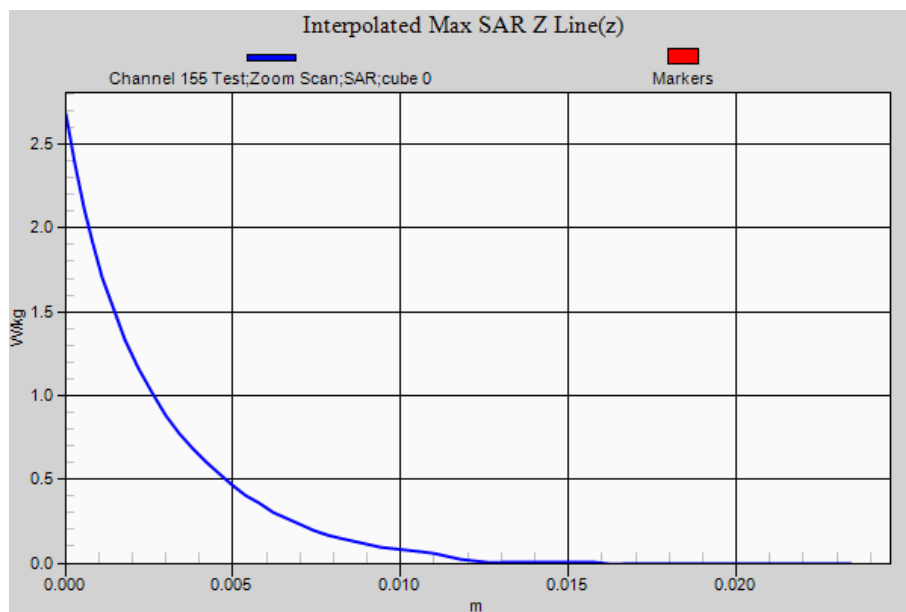

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:9

DUT Name: Fujitsu Tablet Tagra with 11 abgn/ac WLAN, Type: 8260NGW, Serial: WFM (MAC):A4:34:D9:09:92:96

Configuration: Edge 4 ANT 1 (OFDM) 10-Sept-2015

Communication System: 0 - OFDM 5 GHz HT0 (80 MHz); Communication System Band: 5.8 GHz Band;
Frequency: 5775 MHz, Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00
Medium Parameters used: $f=5775.55$ MHz; $\sigma = 6.17$ S/m; $\epsilon_r = 46.3$; $\rho = 1000.0\text{g/cm}^3$
Phantom section: Flat Section

DASY Configuration:


Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;
Sensor-Surface: 1.4 mm (Mechanical Surface Detection)
Electronics: DAE3 Sn442; Calibrated: 3/12/2014
Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1101
DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

Edge 4 ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Area Scan (61x91x1): Interpolated grid: $dx=1.0$ mm, $dy=1.0$ mm; Maximum value of SAR (interpolated) = 0.254 W/kg

Edge 4 ANT 1 (OFDM) 10-Sept-2015/Channel 155 Test/Zoom Scan (31x31x61)/Cube 0: Interpolated grid: $dx=0.8$ mm, $dy=0.8$ mm, $dz=0.4$ mm; Reference Value = 5.414 V/m; **Power Drift = 0.14 dB**

Averaged SAR: SAR(1g) = 0.074 W/kg; SAR(10g) = 0.021 W/kg

Maximum value of SAR (interpolated) = 0.368 W/kg

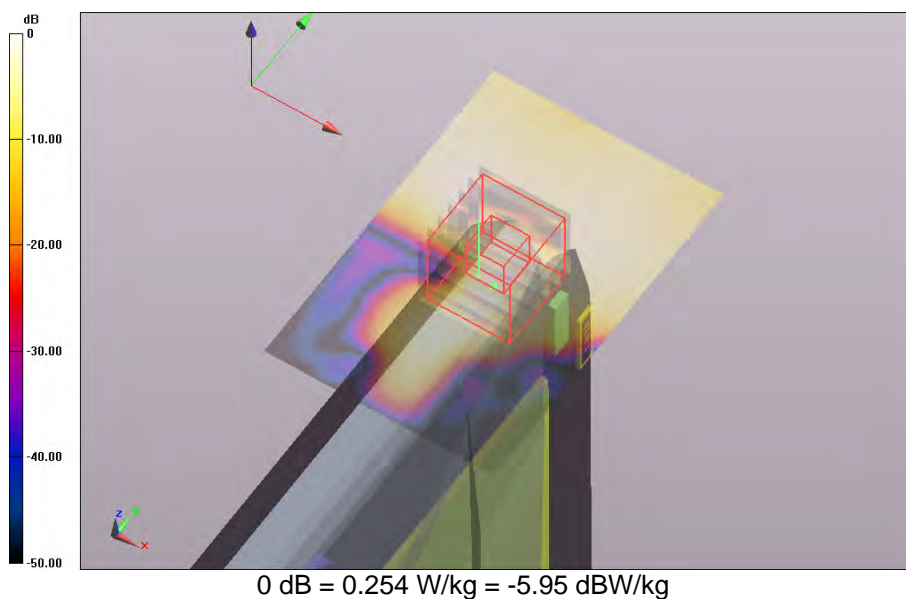


SAR Measurement Plot 38



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

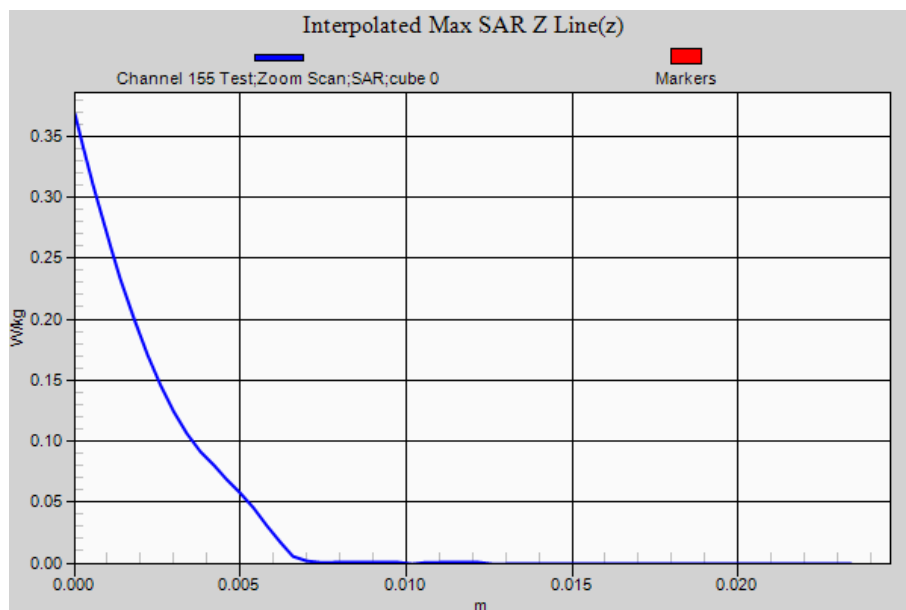

Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

Test Lab: EMCTech

Test File: M150813 5800 MHz WLAN FCC.da52:10

DUT Name: Dipole 5200_5800 MHz, Type: D5GHzV2, Serial: 1008**Configuration: System Performance Check with D5GHzV2 Dipole 10-Sept-2015**Communication System: 0 - System Check; Communication System Band: 5800 MHz; Frequency: 5800 MHz,
Communication System PAR: 0.00 dB; PMF: 0.00; Duty Cycle: 1:1.00Medium Parameters used: $f=5800.3$ MHz; $\sigma = 6.21$ S/m; $\epsilon_r = 46.2$; $\rho = 1000.0$ g/cm³

Phantom section: Flat Section

DASY Configuration:

Probe: EX3DV4 - SN7358; ConvF: (4.13,4.13,4.13); Calibrated: 21/04/2015;

Sensor-Surface: 1.4 mm (Mechanical Surface Detection)


Electronics: DAE3 Sn442; Calibrated: 3/12/2014

Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1101

DASY52 52.8.8(1222); SEMCAD X Version 14.6.10 (7331)

System Performance Check with D5GHzV2 Dipole 10-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Area Scan (91x91x1): Interpolated grid: dx=1.0 mm, dy=1.0 mm; Maximum value of SAR (interpolated) = 19.500 W/kg**System Performance Check with D5GHzV2 Dipole 10-Sept-2015/d=10mm, Pin=100mW, f=5800 MHz/Zoom Scan (4x4x2mm, uniform), dist=1.4mm (36x36x66)/Cube 0:** Interpolated grid: dx=0.8 mm, dy=0.8 mm, dz=0.4 mm; Reference Value = 61.927 V/m; **Power Drift = 0.08 dB****Averaged SAR: SAR(1g) = 8.040 W/kg; SAR(10g) = 2.230 W/kg**

Maximum value of SAR (interpolated) = 34.800 W/kg

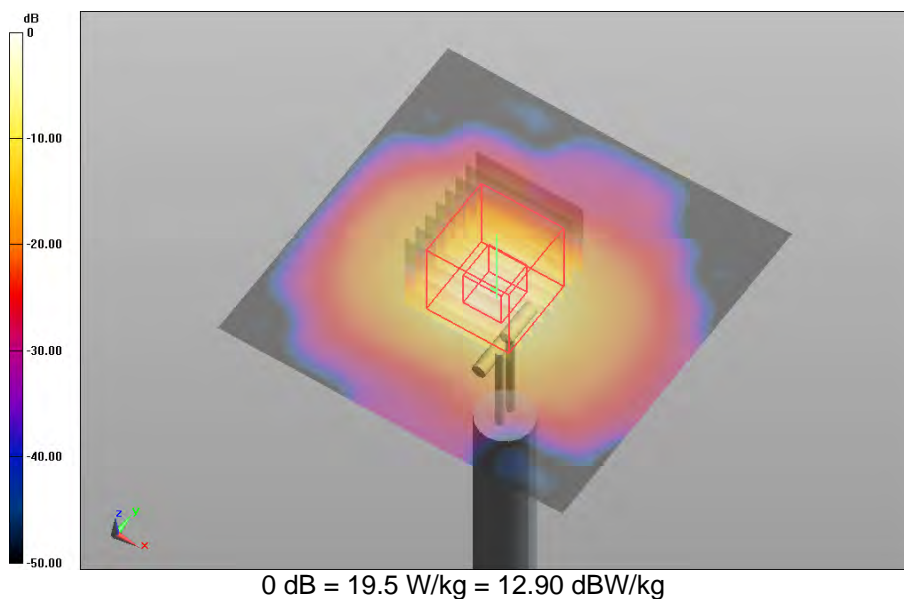

SAR Measurement Plot 39



Accredited for compliance with ISO/IEC 17025. The results of the test, calibrations and/or measurement included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, calibration and inspection reports.

This document shall not be reproduced except in full.

