

ter of acceptance

SPECIFICATION FOR APPROVAL

CUSTOMER's name: Yu Xin Wei Ye

Customer Item (CUSTOMER P/N):6569

Name (DESCRIPTION): Wireless charging coil DATE:2025/5/12

SPECIFICATION) : G41.5 slotting+magnetic tape adhesive /0.08*24*2P/ i EV.NO.:A0

Hongri Shengwei Technology admits to signing and sealing.

departm ent	Confirmation/ date	Audit/date	Approval/ date	(official seal of the company)
quality	Dong wanhong	Lu Hui	Wei hanman	
enginee ring	He weihua	Wei lihong	Wei lihong	

Remarks:

Yuxin Technology acknowledges signing and sealing.

departm ent	Confirmation/ date	Audit/date	Approval/ date	seal of the
Develop ment				
purchas e				
quality				

Remarks:

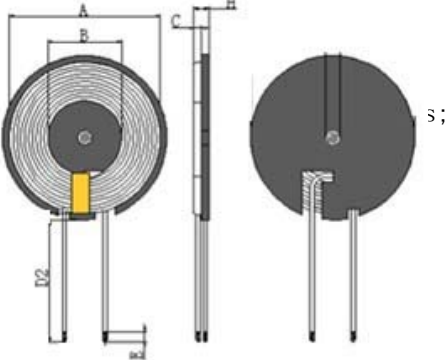
henzhen Hongri Shengwei Technology Limited Compan
HRSW ELECTRONICS CO.,LTD

ADD: Floor 2, Building 1, No.48 Guanlan Huanguan Middle Road, Longhua New TEL: 13682412162

FAX: +86-0755-28015170

page:1/2

SPECIFICATION FOR APPROVAL

1.MECHANICAL DIMENSION (UNIT:mm) magnetic disk, the size of the magnetic disk. 41.5 ± 0.5 mm, a 0.6 ± 0.5 mm. Open 1-slot. 2. Coil outlet 3. Adhesive is			2. SCHEMATICS: 																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th>A</th> <th>B</th> <th>C</th> <th>D2</th> <th>E</th> <th>H</th> <th></th> <th></th> <th>I</th> </tr> <tr> <td>41.5 ± 0.5</td> <td>20.5 ± 1</td> <td>0.6 ± 0.5</td> <td>30 ± 3</td> <td>3.5 ± 2</td> <td>1.5MAX</td> <td></td> <td></td> <td></td> </tr> </table>			A	B	C	D2	E	H			I	41.5 ± 0.5	20.5 ± 1	0.6 ± 0.5	30 ± 3	3.5 ± 2	1.5MAX									
A	B	C	D2	E	H			I																		
41.5 ± 0.5	20.5 ± 1	0.6 ± 0.5	30 ± 3	3.5 ± 2	1.5MAX																					
3.WINDING: 1.1 botto																										
	STE P	START-FINISH	WIRE TYPE			TURNS	TAPE	REMAR K																		
	N1	S-F	$\varnothing 0.08 \times 24 \times 2$ P 2UEW			10TS (Ref)																				
4. ELECTRICAL SPECIFICATION:																										
	ITEM	L	DCR	Q value																						
	TES T CON D	1 plus magnetic sh	S-F	S-F																						
		100KHz, 0.25V	AT 25°C	100KHz, 0.25V																						
	SPEC	$6.4\mu H \pm 10\%$	60mΩ Max	75																						
5.BILF OF MATERIAL:																										
	NO.	ITEM	MATERIAL SPECIFICATION		MANUFACTURER	SGS NO.																				
	1	Hot air line $0.08 \times 24 \times 2$ strands	Hot air line $0.08 \times 24 \times 2$ strands		NANJINGJINNINGCO,LTD																					
	2	Lead-free tin bar	Lead-free tin bar		QIAODO																					
	3	magnetic sheet	41.5 * 0.6 Mn-Zn hard magnetic sheet with L slot.		TAIYI CO.,LTD																					
	4	glue	Yellow gum 9999		LIANCHENG CO.,LTD																					
	5	High temperature adhesive tape	8mm wide high temperature adhesive tape		CUDAK CO.,LTD																					
	6	gum	White adhesive on the back of magnetic disk		CUDAK CO.,LTD																					
HRSW ELECTRONICS CO.,LTD					PART NO																					
					TITLE		etic tape adhesive $0.08 \times 24 \times 2$ P Inner																			
DRAWN BY			CHECKED BY			APPROVED BY																				
He weihua			Wei lihong			Wei lihong																				