

FCC Test Report

(PART 90S)

Report No.: RF181123D01D-2

FCC ID: P27-TPM540

Test Model: TPM540; TPM540M; TPM540S; TPM540MS

Received Date: Jan. 17, 2020

Test Date: Feb. 10 ~ Feb. 27, 2020

Issued Date: Mar. 06, 2020

Applicant: Sercomm Corp.

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. (NanKang Software Park)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Configuration of System under Test.....	8
3.2.1 Description of Support Units.....	8
3.3 Test Mode Applicability and Tested Channel Detail	8
3.4 General Description of Applied Standards and references.....	10
4 Test Types and Results	11
4.1 Output Power Measurement.....	11
4.1.1 Limits of Output Power Measurement	11
4.1.2 Test Procedures.....	11
4.1.3 Test Setup.....	12
4.1.4 Test Results	13
4.2 Modulation Characteristics Measurement	20
4.2.1 Limits of Modulation Characteristics	20
4.2.2 Test Setup.....	20
4.2.3 Test Procedure	20
4.2.4 Test Results	20
4.3 Frequency Stability Measurement	21
4.3.1 Limits of Frequency Stability Measurement	21
4.3.2 Test Procedure	21
4.3.3 Test Setup.....	21
4.3.4 Test Results	22
4.4 Occupied Bandwidth Measurement.....	26
4.4.1 Limits of Occupied Bandwidth Measurement	26
4.4.2 Test Procedure	26
4.4.3 Test Setup.....	26
4.4.4 Test Results	27
4.5 Emission Mask Measurement.....	29
4.5.1 Limits of Emission Mask Measurement.....	29
4.5.2 Test Setup.....	29
4.5.3 Test Procedures.....	29
4.5.4 Test Results	30
4.6 Conducted Spurious Emissions	40
4.6.1 Limits of Conducted Spurious Emissions Measurement	40
4.6.2 Test Setup.....	40
4.6.3 Test Procedure	40
4.6.4 Test Results	41
4.7 Radiated Emission Measurement.....	45
4.7.1 Limits of Radiated Emission Measurement	45
4.7.2 Test Procedure	45
4.7.3 Deviation from Test Standard	45
4.7.4 Test Setup.....	46
4.7.5 Test Results	47
5 Pictures of Test Arrangements.....	61
Appendix – Information of the Testing Laboratories	62

Release Control Record

Issue No.	Description	Date Issued
RF181123D01D-2	Original Release	Mar. 06, 2020

1 Certificate of Conformity

Product: Cat-M1 Module

Brand: Sercomm

Test Model: TPM540; TPM540M; TPM540S; TPM540MS

Sample Status: Engineering Sample

Applicant: Sercomm Corp.

Test Date: Feb. 10 ~ Feb. 27, 2020

Standards: FCC Part 90, Subpart I, S
FCC Part 2

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Gina Liu, **Date:** Mar. 06, 2020
Gina Liu / Specialist

Approved by : Dylan Chiou, **Date:** Mar. 06, 2020
Dylan Chiou / Senior Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 90 & Part 2 (LTE 26)			
FCC Clause	Test Item	Result	Remarks
2.1046 90.635 (b)	Effective Radiated Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	Pass	Meet the requirement.
2.1055 90.213	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 90.209	Occupied Bandwidth	Pass	Meet the requirement of limit.
90.210	Emission Masks	Pass	Meet the requirement of limit.
2.1051 90.691	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 90.691	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -28.31 dB at 3258.8 MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY52220314	Dec. 12, 2019	Dec. 11, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-969	Nov. 24, 2019	Nov. 23, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-160	Nov. 07, 2019	Nov. 06, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-472	Nov. 08, 2019	Nov. 07, 2020
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 25, 2019	Oct. 24, 2020
Preamplifier EMCI	EMC 012645	980115	Oct. 08, 2019	Oct. 07, 2020
Preamplifier EMCI	EMC 330H	980112	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM-1 000(140807)	Oct. 08, 2019	Oct. 07, 2020
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 08, 2019	Oct. 07, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Radio Communication Analyzer Anritsu	MT8821C	6261806803	Jan. 18, 2020	Jan. 17, 2021
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 06, 2019	Sep. 05, 2020
DC Power Supply Topward	33010D	807748	N/A	N/A

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 10.
 3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1 GHz if tested.

3 General Information

3.1 General Description of EUT

Product	Cat-M1 Module	
Brand	Sercomm	
Test Model	TPM540; TPM540M; TPM540S; TPM540MS	
Status of EUT	Engineering Sample	
Power Supply Rating	5.0 Vdc (adapter)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	814.7 ~ 823.3 MHz
	LTE Band 26 (Channel Bandwidth: 3 MHz)	815.5 ~ 822.5 MHz
	LTE Band 26 (Channel Bandwidth: 5 MHz)	816.5 ~ 821.5 MHz
	LTE Band 26 (Channel Bandwidth: 10 MHz)	819 MHz
Emission Designator	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	1M09D7W
	LTE Band 26 (Channel Bandwidth: 3 MHz)	1M08D7W
	LTE Band 26 (Channel Bandwidth: 5 MHz)	1M08G7D
	LTE Band 26 (Channel Bandwidth: 10 MHz)	1M08D7W
Max. ERP Power	LTE Band 26 (Channel Bandwidth: 1.4 MHz)	399.94 mW
	LTE Band 26 (Channel Bandwidth: 3 MHz)	405.51 mW
	LTE Band 26 (Channel Bandwidth: 5 MHz)	410.20 mW
	LTE Band 26 (Channel Bandwidth: 10 MHz)	416.87 mW
Antenna Type	Monopole (PCB) Antenna with 2.25 dBi gain	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:


1. All models are listed as below.

Brand	Model	Difference
Sercomm	TPM540	GNSS embedded
	TPM540M	MCU/GNSS embedded
	TPM540S	Pure Modem
	TPM540MS	MCU embedded

* Above models had been pre-tested, and the worst case was found on model TPM540. Therefore, only this model was chosen for the final test and presented in the test report.

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

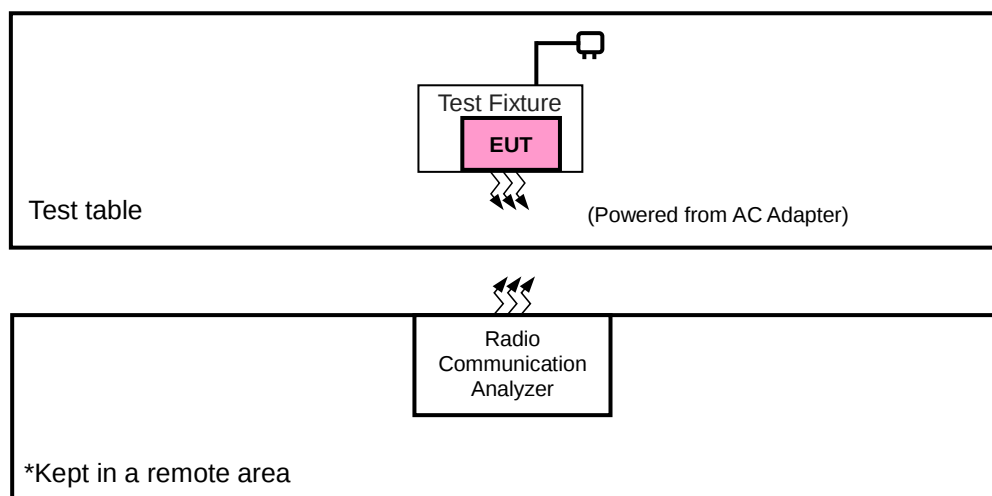

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Adapter	Kted	KSA0050500100VUD	N/A	N/A
2.	Test Fixture	N/A	N/A	N/A	N/A
3.	Radio Communication Analyzer	Anritsu	MT8821C	626180680	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A
2.	N/A
3.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 1-2 were provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP	Radiated Emission
LTE Band 26	X-plane	X-axis

LTE Band 26

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Modulation Characteristics	26740	26740	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Frequency Stability	26697 to 26783	26697, 26783	1.4 MHz	QPSK	6 RB / 0 RB Offset
		26705 to 26775	26705, 26775	3 MHz	QPSK	6 RB / 0 RB Offset
		26715 to 26765	26715, 26765	5 MHz	QPSK	6 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	6 RB / 0 RB Offset
-	Occupied Bandwidth	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Emission Mask	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
-	Conducted Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26705 to 26775	26705, 26740, 26775	3 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission	26697 to 26783	26697, 26740, 26783	1.4 MHz	QPSK	1 RB / 0 RB Offset
		26715 to 26765	26715, 26740, 26765	5 MHz	QPSK	1 RB / 0 RB Offset
		26740	26740	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation. Therefore, only ERP, modulation characteristics, occupied bandwidth and peak to average ratio items had been tested under QPSK, 16QAM mode, the other items were performed under QPSK mode only.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.
3. For radiated emissions below 1 GHz, select the worst radiated emission channel for final testing

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang
Frequency Stability	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Occupied Bandwidth	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Peak to Average Ratio	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Emission Mask	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Band Edge	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Conducted Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Willy Cheng
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Getaz Yang

3.4 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC 47 CFR Part 2

FCC 47 CFR Part 90

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r01

ANSI/TIA/EIA-603-E 2016

Note: All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw) ERP.

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}$.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

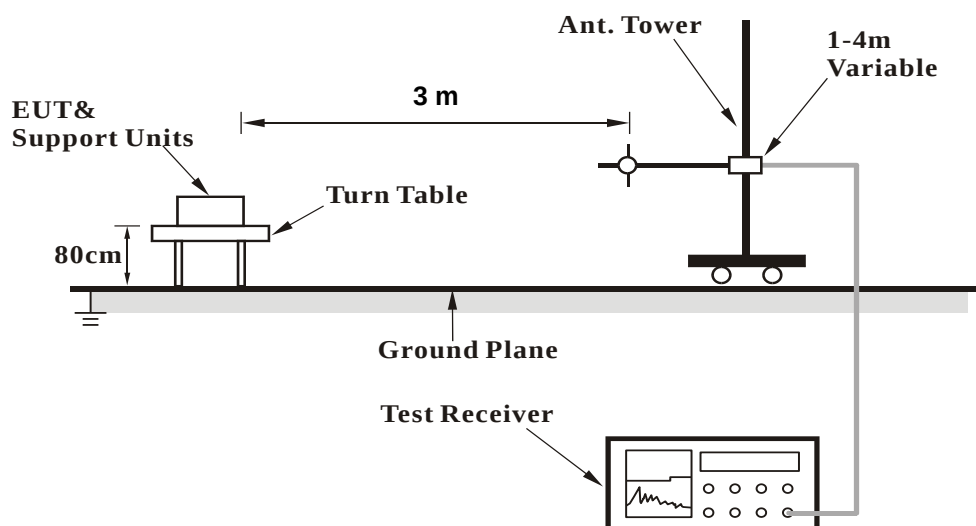

<Radiated Emission above 1 GHz>

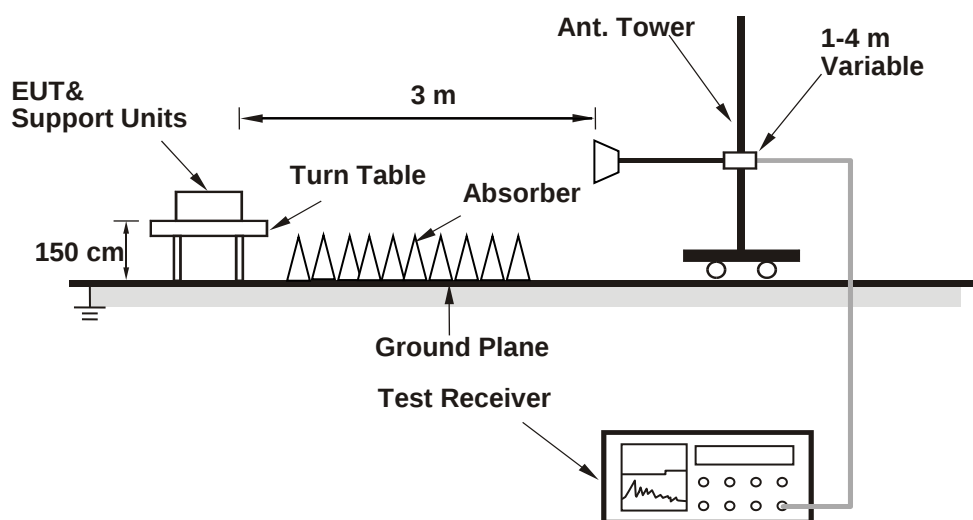

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

BW(MHz):		1.4						
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26697	814.7	QPSK	1	0	0	-85	24.25
			QPSK	1	5	0	-85	24.32
			QPSK	3	3	0	-85	23.62
			QPSK	6	0	0	-85	22.38
			16QAM	1	0	0	-85	23.38
			16QAM	1	5	0	-85	23.13
			16QAM	3	0	0	-85	22.16
			16QAM	5	0	0	-85	22.54
Mid Range	26740	819	QPSK	1	0	0	-85	24.42
			QPSK	1	5	0	-85	24.41
			QPSK	3	3	0	-85	23.62
			QPSK	6	0	0	-85	22.41
			16QAM	1	0	0	-85	23.35
			16QAM	1	5	0	-85	23.13
			16QAM	3	0	0	-85	22.42
			16QAM	5	0	0	-85	22.53
High Range	26783	823.3	QPSK	1	0	0	-85	24.46
			QPSK	1	5	0	-85	24.45
			QPSK	3	3	0	-85	23.59
			QPSK	6	0	0	-85	22.51
			16QAM	1	0	0	-85	23.38
			16QAM	1	5	0	-85	23.3
			16QAM	3	0	0	-85	22.34
			16QAM	5	0	0	-85	22.59

BW(MHz):	3							
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26705	815.5	QPSK	1	0	0	-85	24.24
			QPSK	1	5	0	-85	24.19
			QPSK	1	0	1	-85	24.37
			QPSK	1	5	1	-85	24.34
			QPSK	3	3	0	-85	23.12
			QPSK	3	3	1	-85	23.13
			QPSK	6	0	0	-85	22.35
			QPSK	6	0	1	-85	22.33
			16QAM	1	0	0	-85	23.23
			16QAM	1	5	0	-85	23.06
			16QAM	1	0	1	-85	23.14
			16QAM	1	5	1	-85	23.07
			16QAM	3	0	0	-85	22.33
			16QAM	3	3	1	-85	22.24
			16QAM	5	0	0	-85	22.31
			16QAM	5	0	1	-85	22.33
Mid Range	26740	819	QPSK	1	0	0	-85	24.39
			QPSK	1	5	0	-85	24.37
			QPSK	1	0	1	-85	24.38
			QPSK	1	5	1	-85	24.32
			QPSK	3	3	0	-85	23.15
			QPSK	3	3	1	-85	23.09
			QPSK	6	0	0	-85	22.38
			QPSK	6	0	1	-85	22.29
			16QAM	1	0	0	-85	23.21
			16QAM	1	5	0	-85	23.13
			16QAM	1	0	1	-85	23.18
			16QAM	1	5	1	-85	23.09
			16QAM	3	0	0	-85	22.34
			16QAM	3	3	1	-85	22.25
			16QAM	5	0	0	-85	22.35
			16QAM	5	0	1	-85	22.32

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
High Range	26775	822.5	QPSK	1	0	0	-85	24.43
			QPSK	1	5	0	-85	24.38
			QPSK	1	0	1	-85	24.41
			QPSK	1	5	1	-85	24.35
			QPSK	3	3	0	-85	23.23
			QPSK	3	3	1	-85	23.32
			QPSK	6	0	0	-85	22.44
			QPSK	6	0	1	-85	22.42
			16QAM	1	0	0	-85	23.25
			16QAM	1	5	0	-85	23.13
			16QAM	1	0	1	-85	23.24
			16QAM	1	5	1	-85	23.16
			16QAM	3	0	0	-85	22.36
			16QAM	3	3	1	-85	22.26
			16QAM	5	0	0	-85	22.42
			16QAM	5	0	1	-85	22.41

BW(MHz):	5
----------	---

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Low Range	26715	816.5	QPSK	1	0	0	-85	24.37
			QPSK	1	5	0	-85	24.36
			QPSK	1	0	1	-85	24.48
			QPSK	1	5	1	-85	24.49
			QPSK	1	0	3	-85	24.47
			QPSK	1	5	3	-85	24.46
			QPSK	3	0	0	-85	23.45
			QPSK	3	3	3	-85	23.29
			QPSK	6	0	0	-85	23.42
			QPSK	6	0	1	-85	23.38
			QPSK	6	0	3	-85	23.37
			16QAM	1	0	0	-85	24.68
			16QAM	1	5	0	-85	24.64
			16QAM	1	0	1	-85	24.76
			16QAM	1	5	1	-85	24.77
			16QAM	1	0	3	-85	24.78
			16QAM	1	5	3	-85	24.75
			16QAM	3	0	0	-85	23.57
			16QAM	3	3	3	-85	23.58
			16QAM	5	0	0	-85	22.33
			16QAM	5	0	1	-85	22.36
			16QAM	5	0	3	-85	22.34

Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Mid Range	26740	819	QPSK	1	0	0	-85	24.36
			QPSK	1	5	0	-85	24.41
			QPSK	1	0	1	-85	24.42
			QPSK	1	5	1	-85	24.42
			QPSK	1	0	3	-85	24.41
			QPSK	1	5	3	-85	24.39
			QPSK	3	0	0	-85	23.41
			QPSK	3	3	3	-85	23.24
			QPSK	6	0	0	-85	23.34
			QPSK	6	0	1	-85	23.37
			QPSK	6	0	3	-85	23.32
			16QAM	1	0	0	-85	24.76
			16QAM	1	5	0	-85	24.75
			16QAM	1	0	1	-85	24.74
			16QAM	1	5	1	-85	24.71
			16QAM	1	0	3	-85	24.76
			16QAM	1	5	3	-85	24.74
			16QAM	3	0	0	-85	23.56
			16QAM	3	3	3	-85	23.53
			16QAM	5	0	0	-85	22.34
			16QAM	5	0	1	-85	22.36
			16QAM	5	0	3	-85	22.35
High Range	26765	821.5	QPSK	1	0	0	-85	24.42
			QPSK	1	5	0	-85	24.43
			QPSK	1	0	1	-85	24.44
			QPSK	1	5	1	-85	24.45
			QPSK	1	0	3	-85	24.46
			QPSK	1	5	3	-85	24.44
			QPSK	3	0	0	-85	23.41
			QPSK	3	3	3	-85	23.28
			QPSK	6	0	0	-85	23.38
			QPSK	6	0	1	-85	23.36
			QPSK	6	0	3	-85	23.37
			16QAM	1	0	0	-85	24.66
			16QAM	1	5	0	-85	24.74
			16QAM	1	0	1	-85	24.73
			16QAM	1	5	1	-85	24.74
			16QAM	1	0	3	-85	24.63
			16QAM	1	5	3	-85	24.38
			16QAM	3	0	0	-85	23.52
			16QAM	3	3	3	-85	23.55
			16QAM	5	0	0	-85	22.38
			16QAM	5	0	1	-85	22.41
			16QAM	5	0	3	-85	22.34

BW(MHz):	10							
Test Frequency ID	N _{UL}	Frequency of Uplink [MHz]	Test Configuration Initial of Power				EUT	
			Modulation	RB Size	RB Offset	Narrowband Index	Cell power (dBm/15kHz)	power (dBm)
Mid Range	26740	819	QPSK	1	0	0	-85	24.79
			QPSK	1	5	0	-85	24.66
			QPSK	1	0	3	-85	24.62
			QPSK	1	5	3	-85	24.58
			QPSK	1	0	7	-85	24.52
			QPSK	1	5	7	-85	24.39
			QPSK	4	0	0	-85	24.39
			QPSK	4	2	7	-85	24.53
			QPSK	6	0	0	-85	23.34
			QPSK	6	0	7	-85	23.38
			16QAM	1	0	0	-85	24.65
			16QAM	1	5	0	-85	24.63
			16QAM	1	0	3	-85	24.68
			16QAM	1	5	3	-85	24.65
			16QAM	1	0	7	-85	24.62
			16QAM	1	5	7	-85	24.58
			16QAM	4	2	0	-85	23.53
			16QAM	4	2	7	-85	23.61
			16QAM	5	0	0	-85	23.49
			16QAM	5	0	7	-85	23.35

ERP Power (dBm)

LTE Band 26							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26697	814.7	-3.98	32.01	25.88	387.26	H
	26740	819.0	-3.94	32.11	26.02	399.94	
	26783	823.3	-4.50	32.32	25.67	368.98	
	26697	814.7	-11.52	32.54	18.87	77.09	V
	26740	819.0	-11.29	32.51	19.07	80.72	
	26783	823.3	-11.63	32.51	18.73	74.64	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	26697	814.7	-5.18	32.01	24.68	293.76	H
	26740	819.0	-5.11	32.11	24.85	305.49	
	26783	823.3	-5.68	32.32	24.49	281.19	
	26697	814.7	-12.66	32.54	17.73	59.29	V
	26740	819.0	-12.54	32.51	17.82	60.53	
	26783	823.3	-12.70	32.51	17.66	58.34	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26705	815.5	-3.95	32.02	25.92	390.84	H
	26740	819.0	-3.88	32.11	26.08	405.51	
	26775	822.5	-4.26	32.18	25.77	377.57	
	26705	815.5	-11.41	32.5	18.94	78.34	V
	26740	819.0	-11.26	32.51	19.10	81.28	
	26775	822.5	-11.49	32.47	18.83	76.38	
Channel Bandwidth: 3 MHz / 16QAM							
X	26705	815.5	-5.08	32.02	24.79	301.30	H
	26740	819.0	-5.02	32.11	24.94	311.89	
	26775	822.5	-5.40	32.18	24.63	290.40	
	26705	815.5	-12.49	32.5	17.86	61.09	V
	26740	819.0	-12.44	32.51	17.92	61.94	
	26775	822.5	-12.61	32.47	17.71	59.02	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26715	816.5	-3.91	32.04	25.98	396.28	H
	26740	819.0	-3.83	32.11	26.13	410.20	
	26765	821.5	-3.82	31.79	25.82	381.94	
	26715	816.5	-11.35	32.52	19.02	79.80	V
	26740	819.0	-11.20	32.51	19.16	82.41	
	26765	821.5	-11.13	32.17	18.89	77.45	
Channel Bandwidth: 5 MHz / 16QAM							
X	26715	816.5	-4.93	32.04	24.96	313.33	H
	26740	819.0	-4.84	32.11	25.12	325.09	
	26765	821.5	-4.90	31.79	24.74	297.85	
	26715	816.5	-12.40	32.52	17.97	62.66	V
	26740	819.0	-12.22	32.51	18.14	65.16	
	26765	821.5	-12.18	32.17	17.84	60.81	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 26							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	26740	819.0	-3.76	32.11	26.20	416.87	H
	26740	819.0	-11.13	32.51	19.23	83.75	V
Channel Bandwidth: 10 MHz / 16QAM							
X	26740	819.0	-4.78	32.11	25.18	329.61	H
	26740	819.0	-12.19	32.51	18.17	65.61	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.3.2 Test Procedure

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

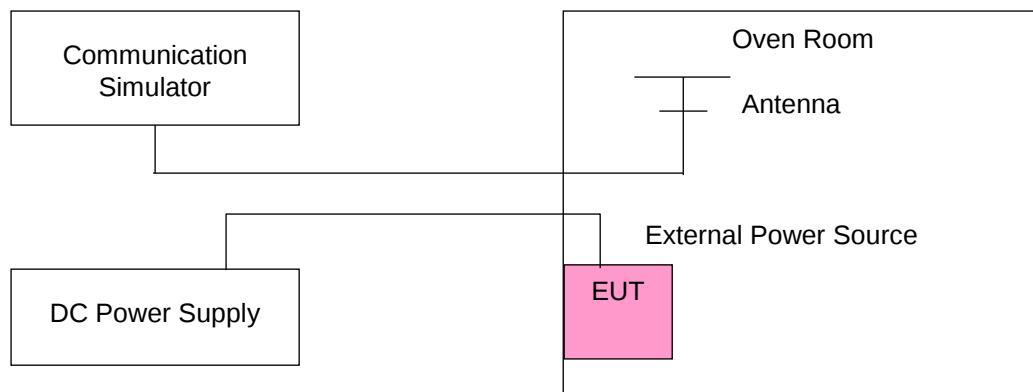

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
4.25	814.700001	0.001	823.300002	0.002	2.5
5.00	814.700001	0.002	823.300004	0.005	2.5
5.75	814.700002	0.002	823.300001	0.002	2.5

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	814.700003	0.004	823.300002	0.002	2.5
-20	814.700003	0.003	823.300002	0.003	2.5
-10	814.700002	0.002	823.300004	0.004	2.5
0	814.700003	0.003	823.300003	0.003	2.5
10	814.700003	0.003	823.300004	0.005	2.5
20	814.699997	-0.004	823.299997	-0.004	2.5
30	814.699998	-0.002	823.299998	-0.003	2.5
40	814.699997	-0.003	823.299998	-0.003	2.5
50	814.699998	-0.003	823.299997	-0.003	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
4.25	815.500004	0.005	822.500001	0.002	2.5
5.00	815.500002	0.002	822.500000	0.003	2.5
5.75	815.500002	0.003	822.500000	0.005	2.5

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	815.500004	0.004	822.500002	0.002	2.5
-20	815.500003	0.003	822.500003	0.004	2.5
-10	815.500001	0.002	822.500004	0.004	2.5
0	815.500003	0.003	822.500004	0.005	2.5
10	815.500004	0.005	822.500003	0.003	2.5
20	815.499997	-0.004	822.499999	-0.001	2.5
30	815.499997	-0.004	822.499998	-0.002	2.5
40	815.499998	-0.003	822.499998	-0.002	2.5
50	815.499996	-0.005	822.499999	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
4.25	816.500001	0.001	821.500003	0.003	2.5
5.00	816.500004	0.004	821.500003	0.003	2.5
5.75	816.500004	0.005	821.500004	0.005	2.5

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-30	816.500004	0.004	821.500003	0.004	2.5
-20	816.500003	0.004	821.500004	0.004	2.5
-10	816.500002	0.002	821.500003	0.004	2.5
0	816.500003	0.003	821.500004	0.005	2.5
10	816.500003	0.004	821.500002	0.003	2.5
20	816.499996	-0.005	821.499997	-0.004	2.5
30	816.499997	-0.004	821.499997	-0.003	2.5
40	816.499999	-0.002	821.499997	-0.004	2.5
50	816.499997	-0.004	821.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
4.25	819.000003	0.003	2.5
5.00	819.000004	0.005	2.5
5.75	819.000002	0.002	2.5

Note: The applicant defined the normal working voltage of the adapter is from 4.25 Vdc to 5.75 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 26		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-30	819.000001	0.002	2.5
-20	819.000002	0.002	2.5
-10	819.000002	0.002	2.5
0	819.000003	0.004	2.5
10	819.000002	0.002	2.5
20	818.999997	-0.003	2.5
30	818.999998	-0.002	2.5
40	818.999999	-0.002	2.5
50	818.999997	-0.004	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

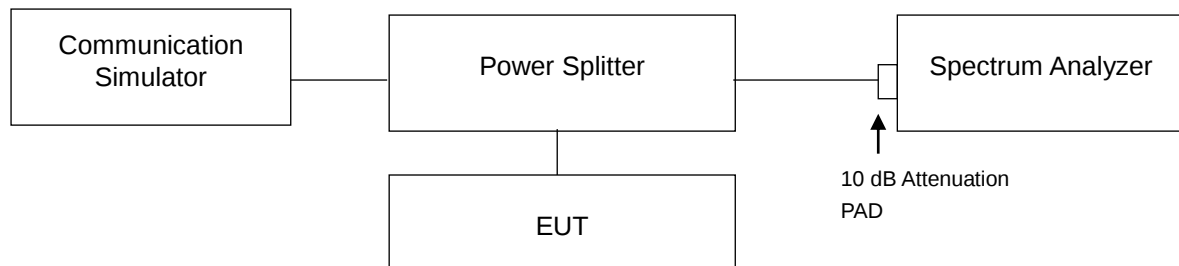


4.4.4 Test Results

LTE Band 26					
Channel Bandwidth: 1.4 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26697	814.7	1.0830	1.0809	1.270	1.273
26740	819.0	1.0850	1.0850	1.256	1.238
26783	823.3	1.0838	1.0857	1.262	1.257
Channel Bandwidth: 3 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26705	815.5	1.0776	1.0809	1.265	1.272
26740	819.0	1.0793	1.0763	1.278	1.254
26775	822.5	1.0765	1.0797	1.286	1.268

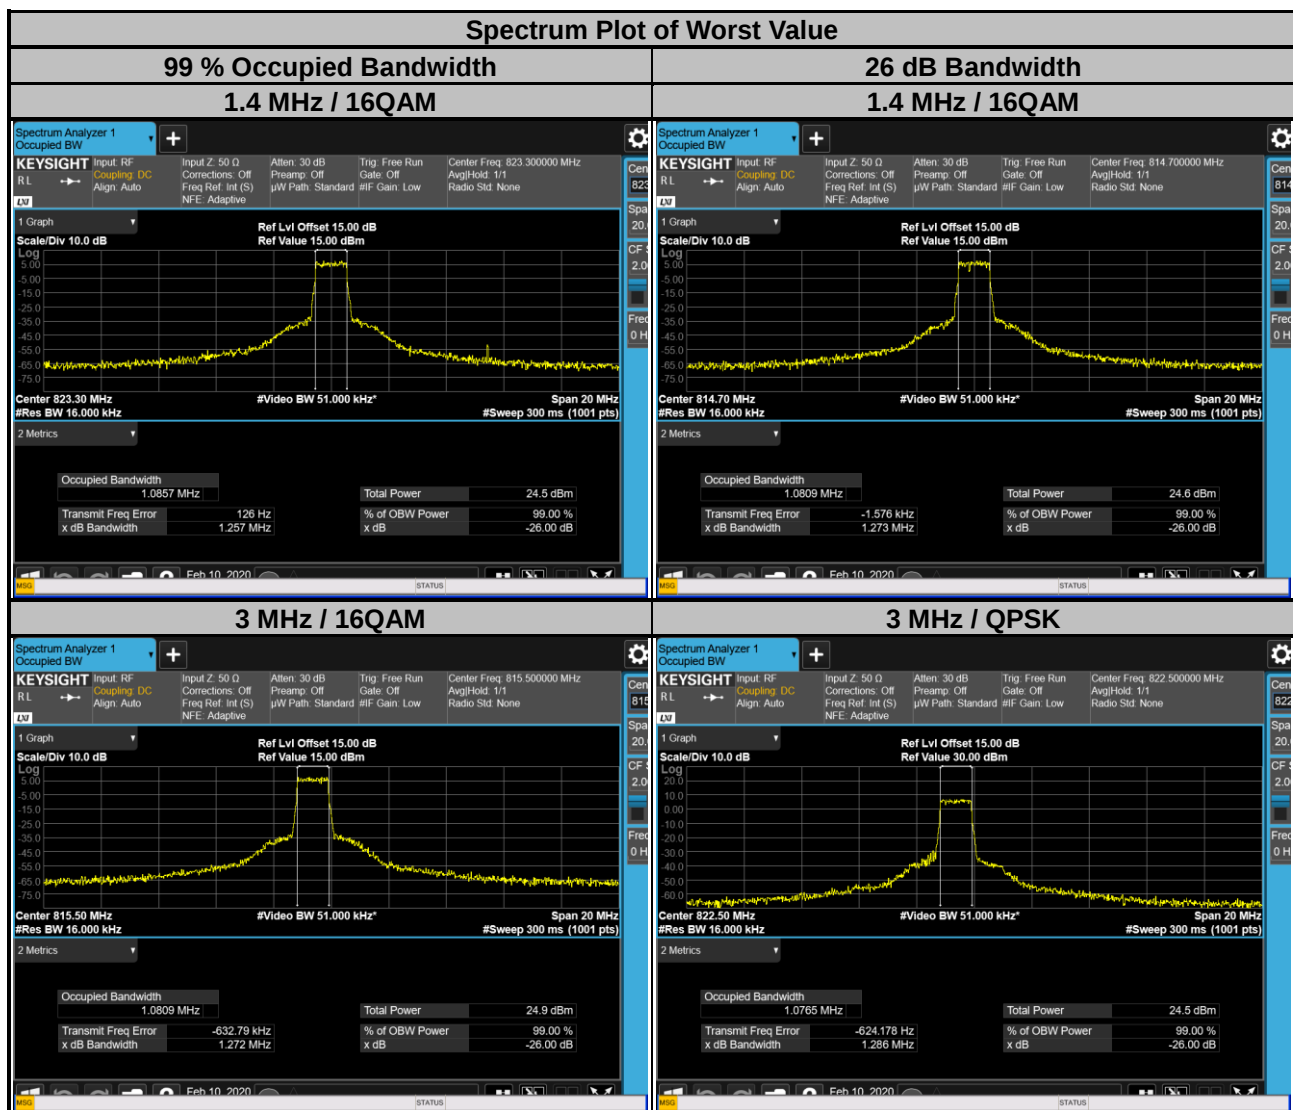

LTE Band 26					
Channel Bandwidth: 5 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26715	816.5	1.0778	1.0803	1.259	1.275
26740	819.0	1.0767	1.0826	1.262	1.279
26765	821.5	1.0837	1.0790	1.278	1.273
Channel Bandwidth: 10 MHz					
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		26 dB Bandwidth (MHz)	
		QPSK	16QAM	QPSK	16QAM
26740	819.0	1.0832	1.0845	1.258	1.281

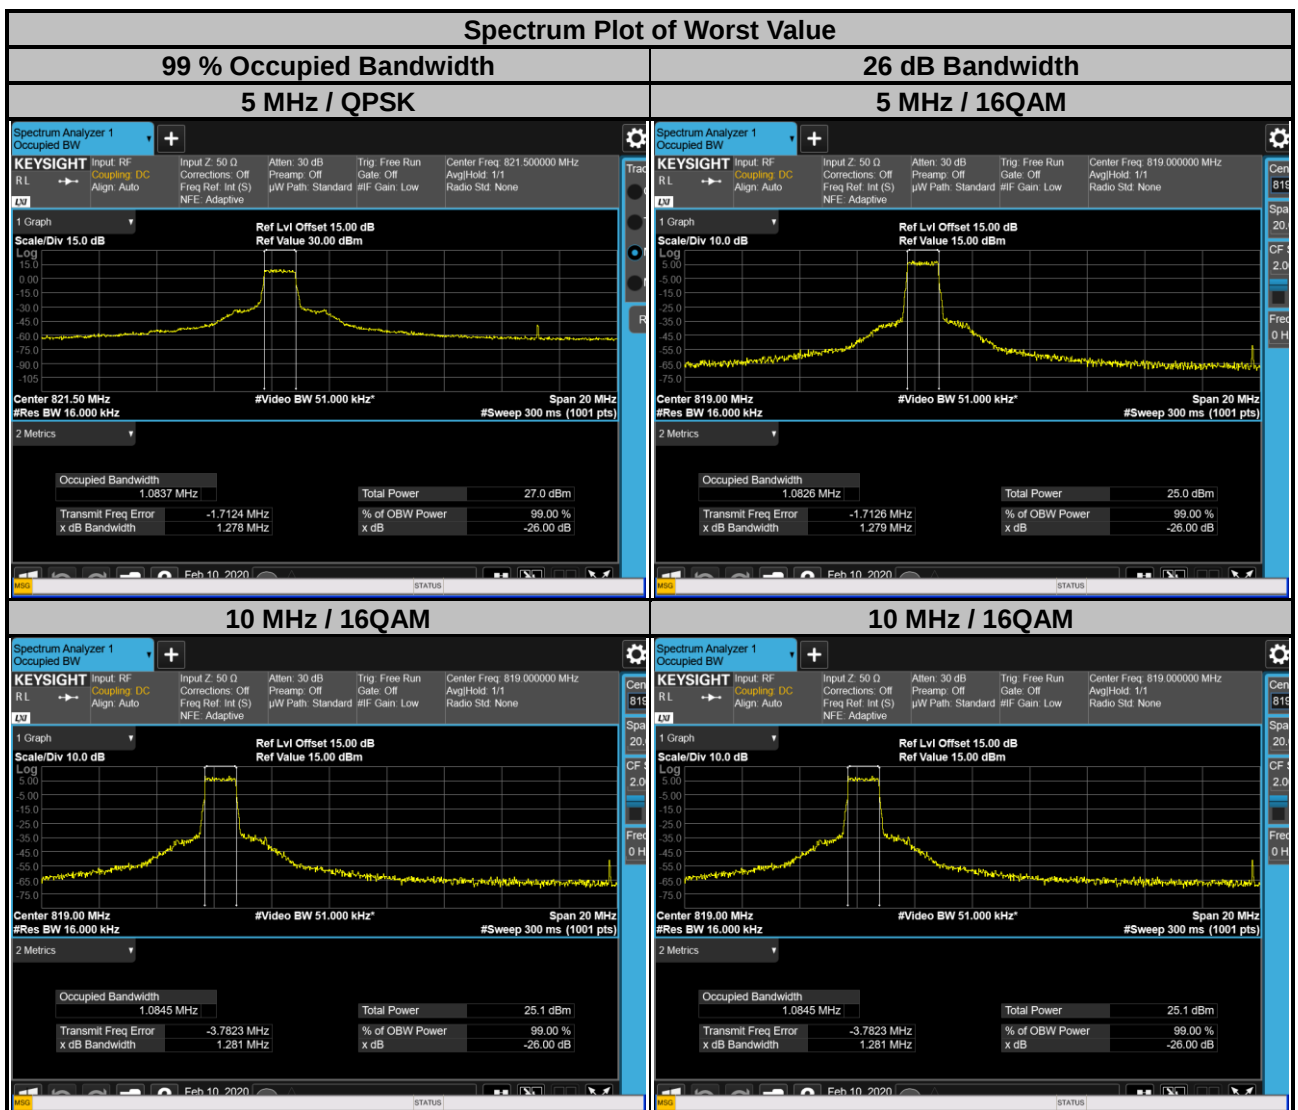

4.5 Emission Mask Measurement


4.5.1 Limits of Emission Mask Measurement

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

For §90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.


4.5.2 Test Setup

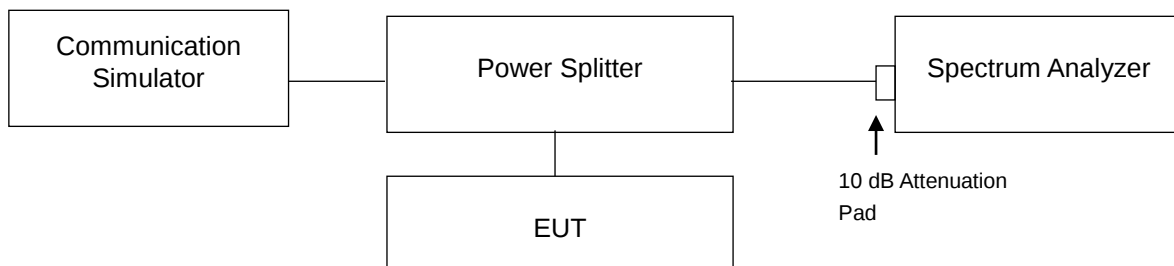



4.5.3 Test Procedures


- The measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Record the test plot.


4.5.4 Test Results

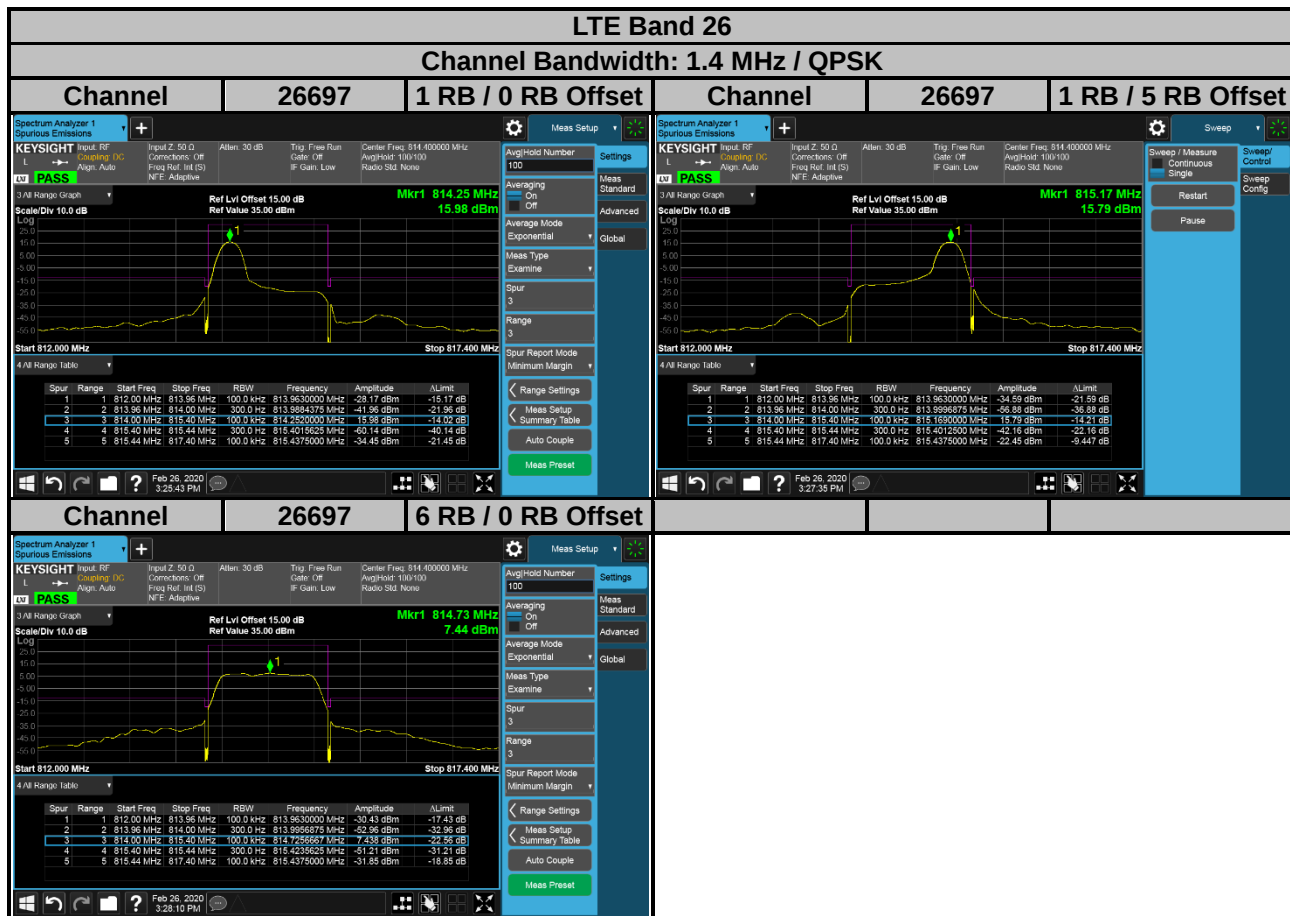


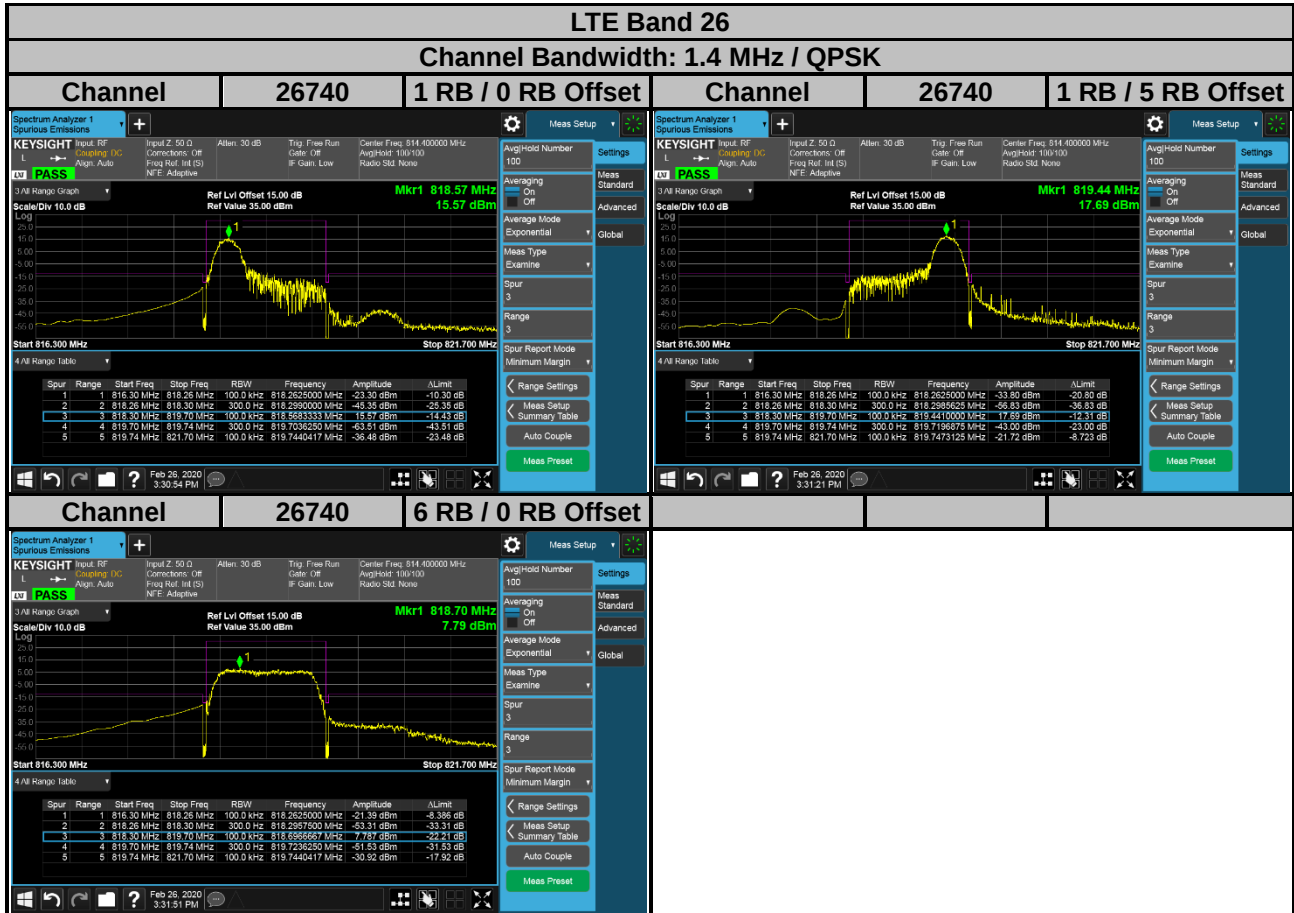


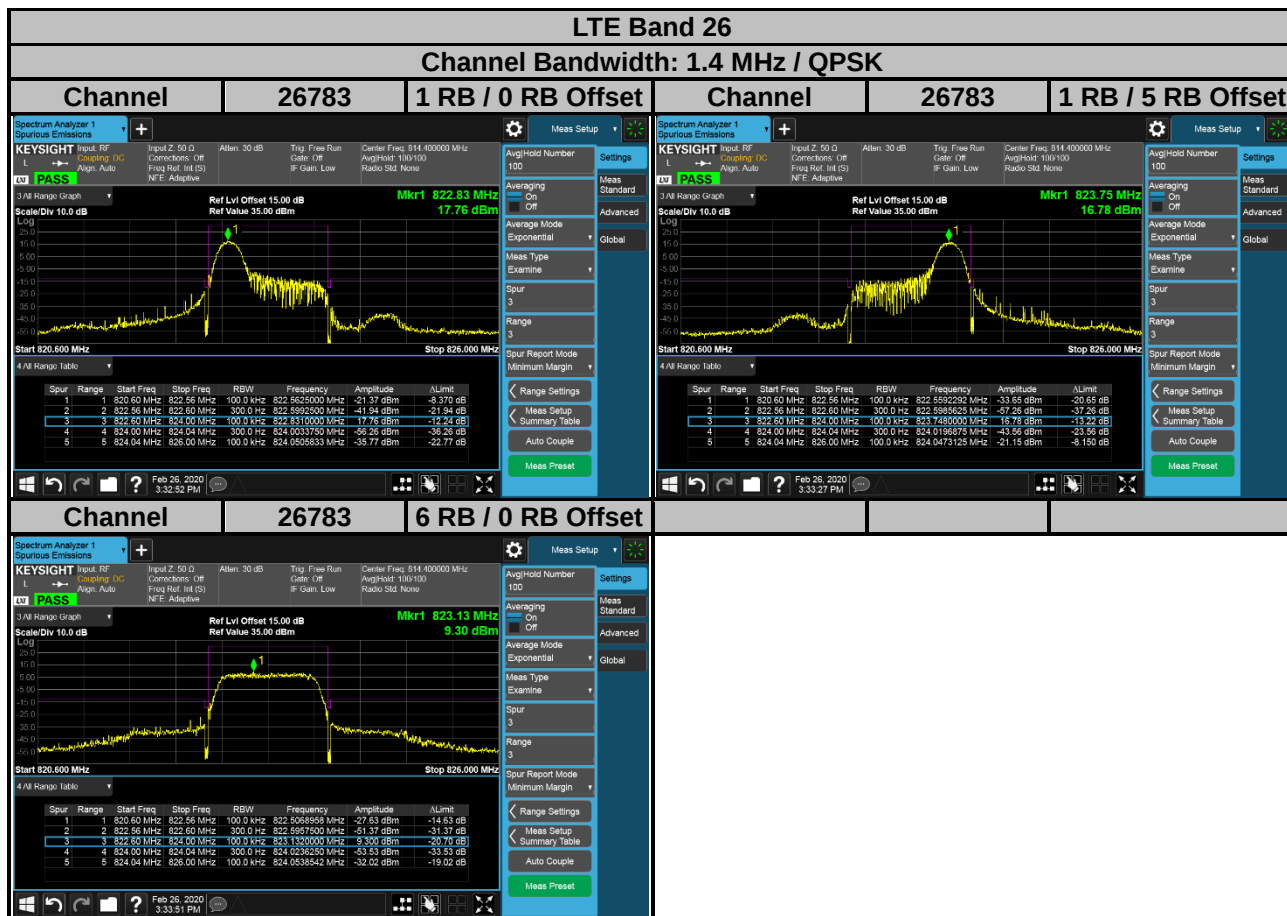


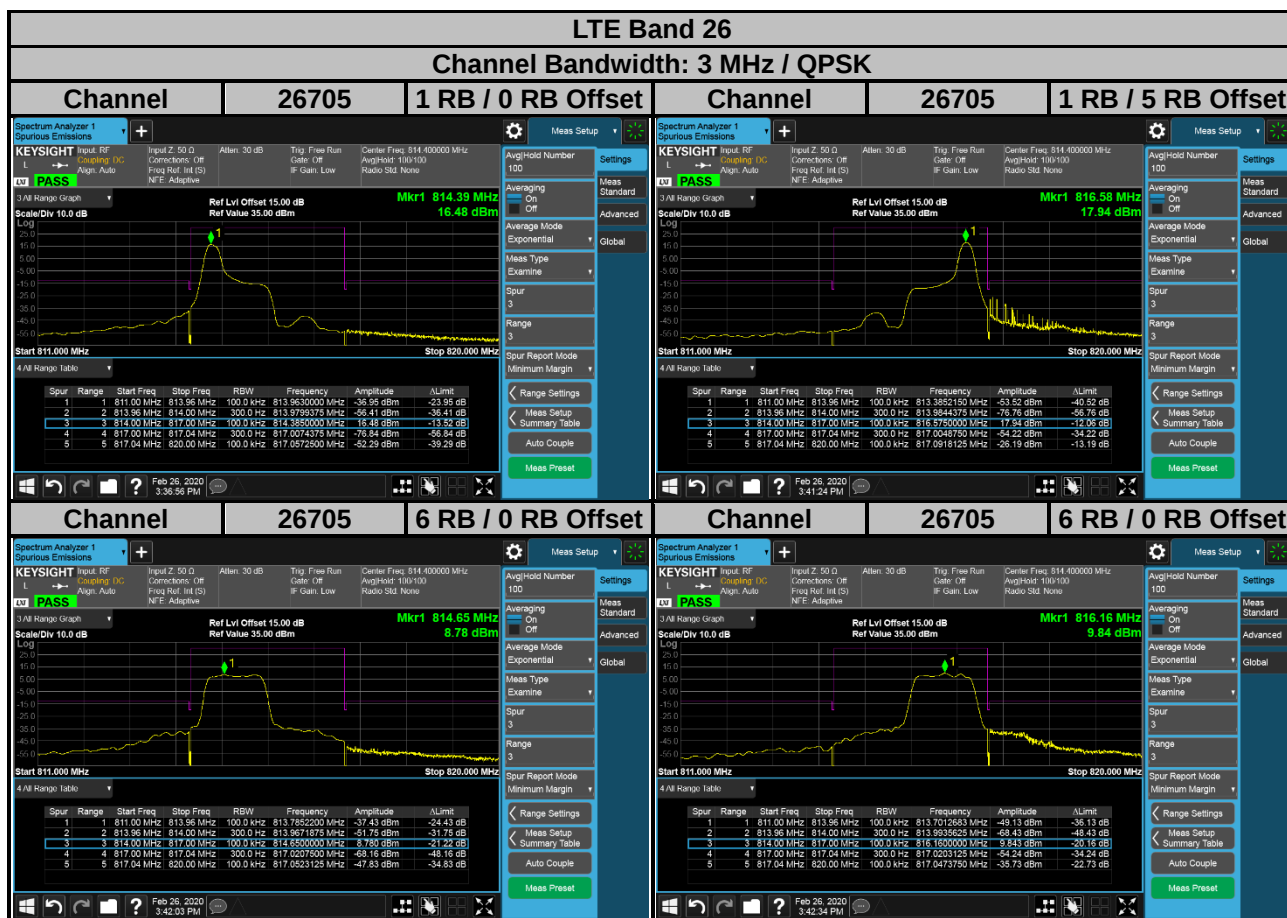


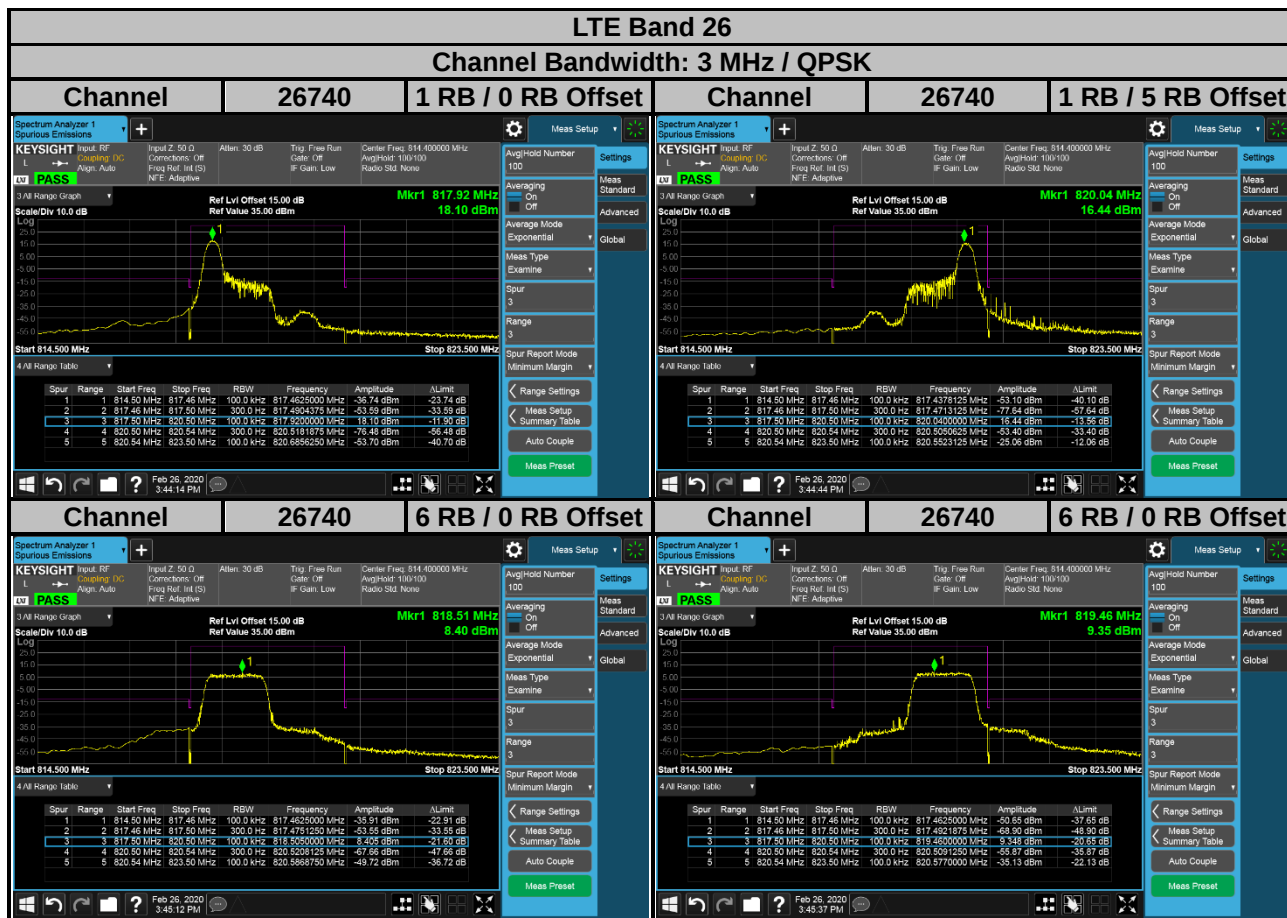


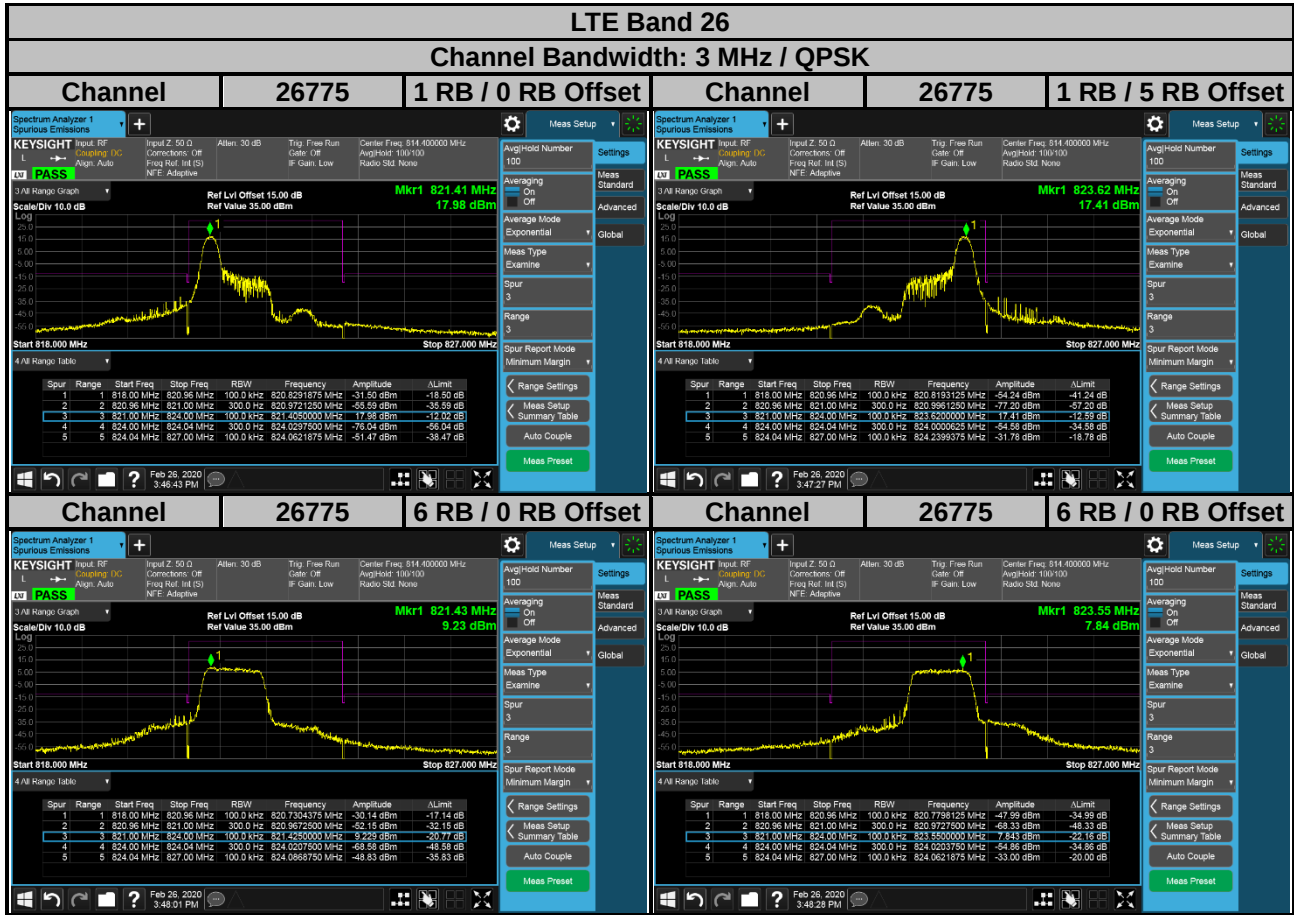

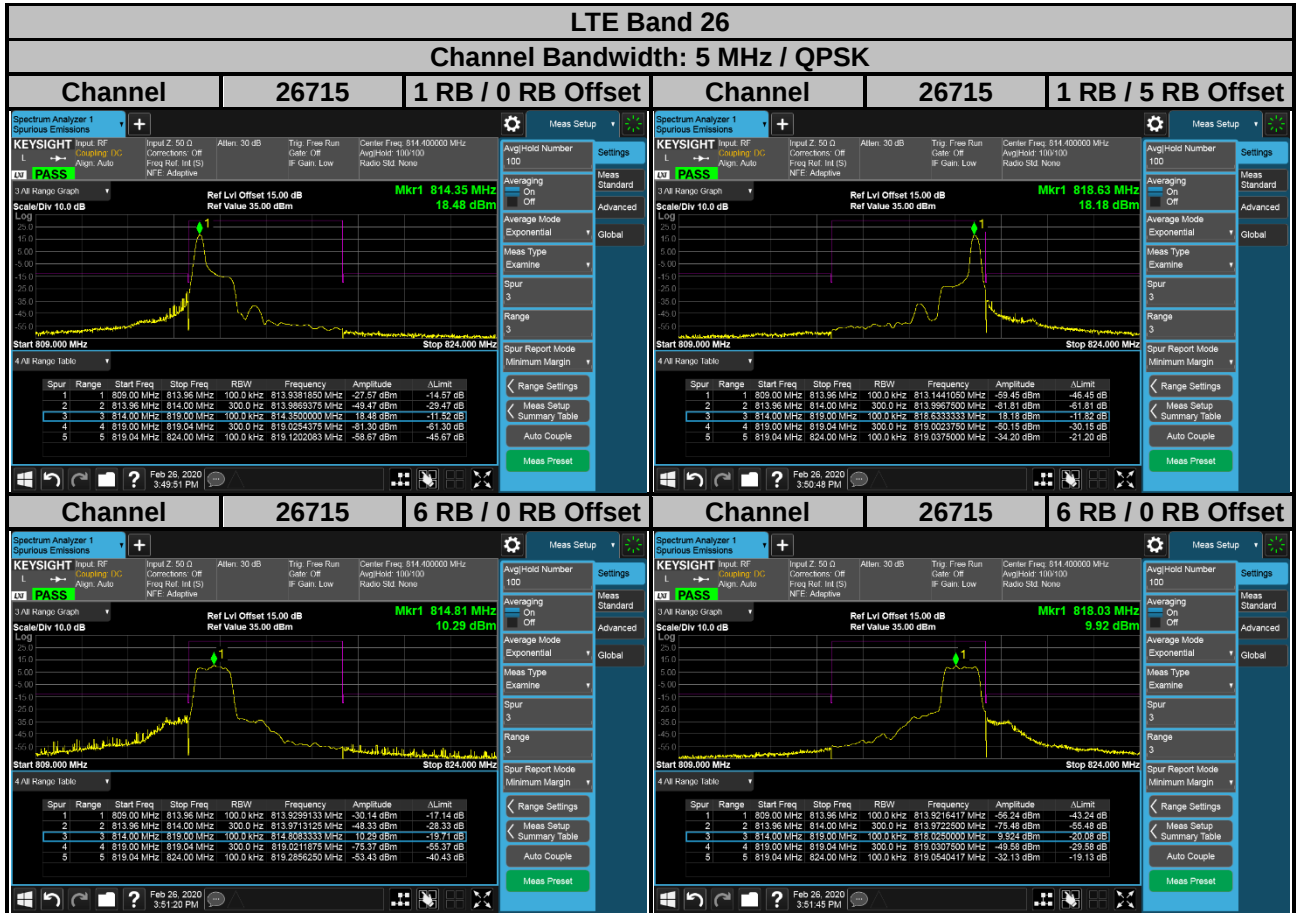

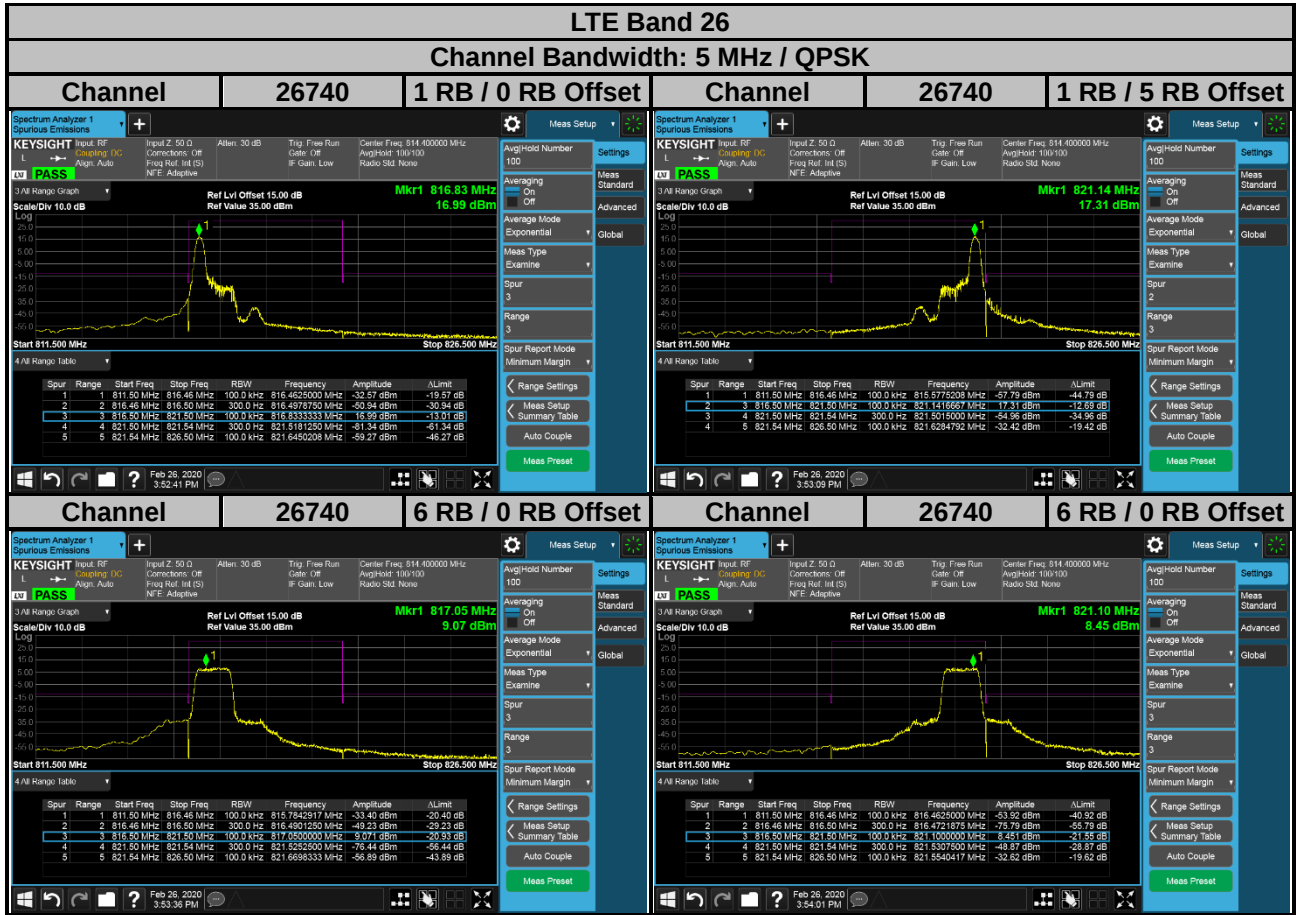

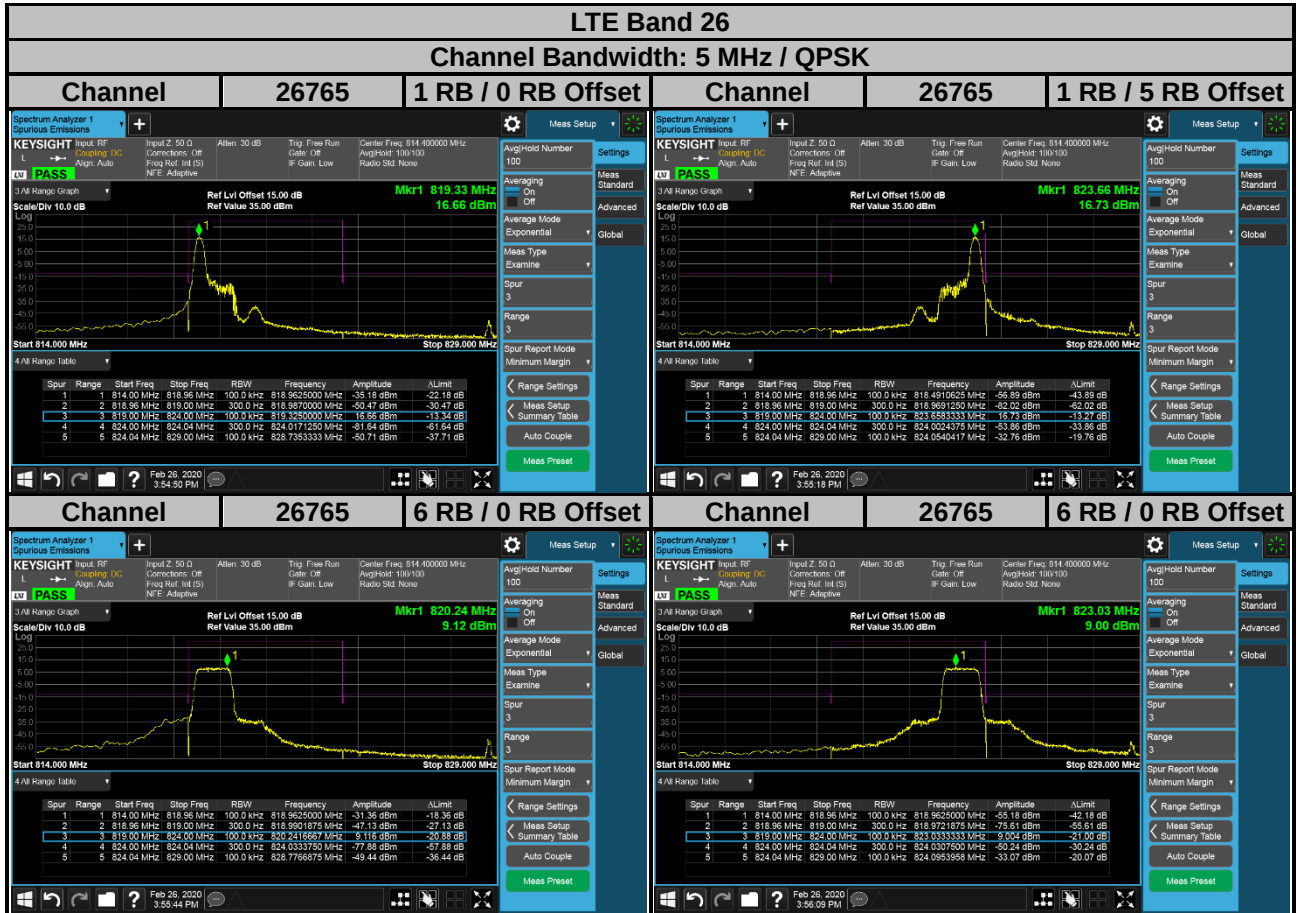

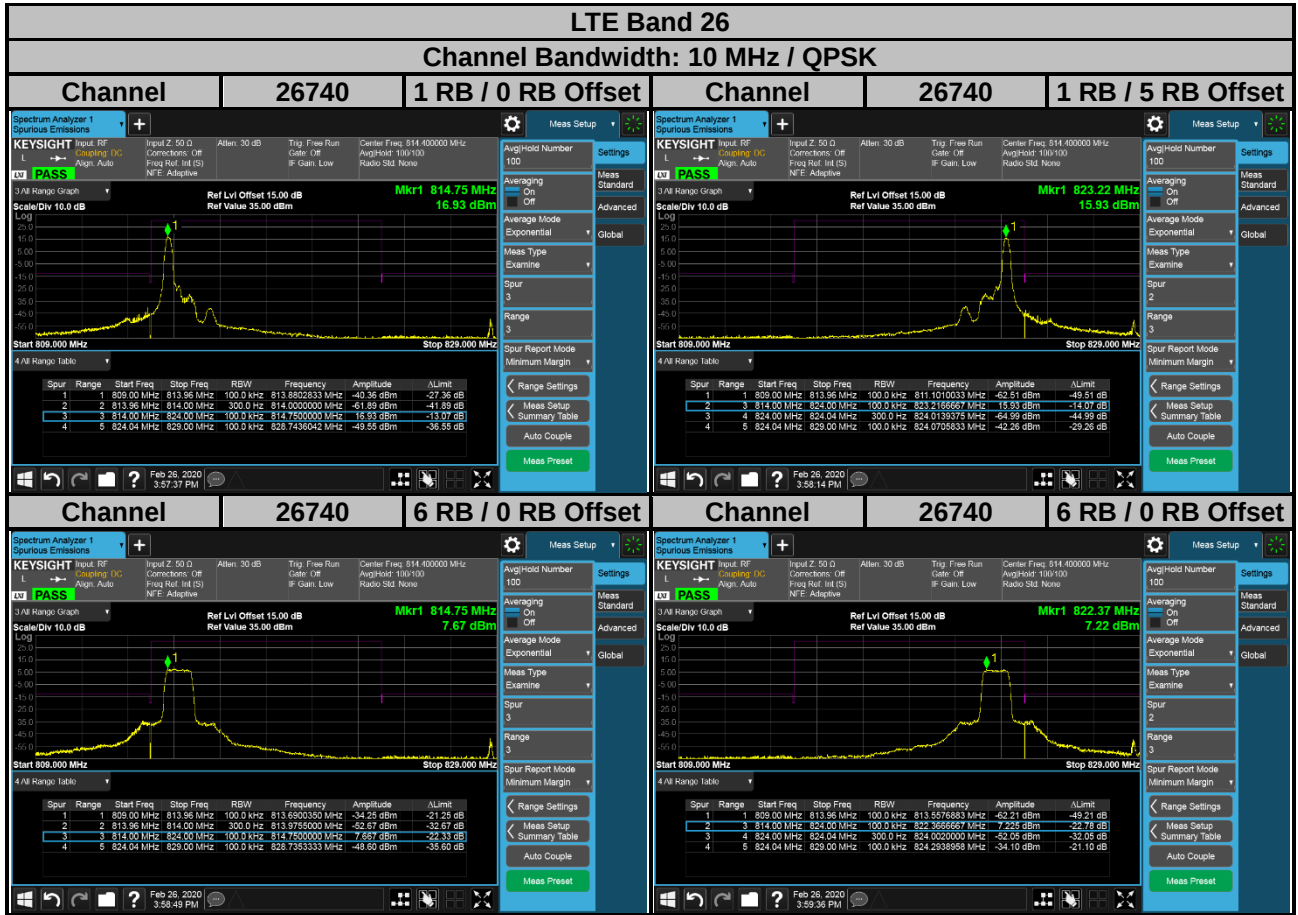


4.6 Conducted Spurious Emissions

4.6.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.


4.6.2 Test Setup

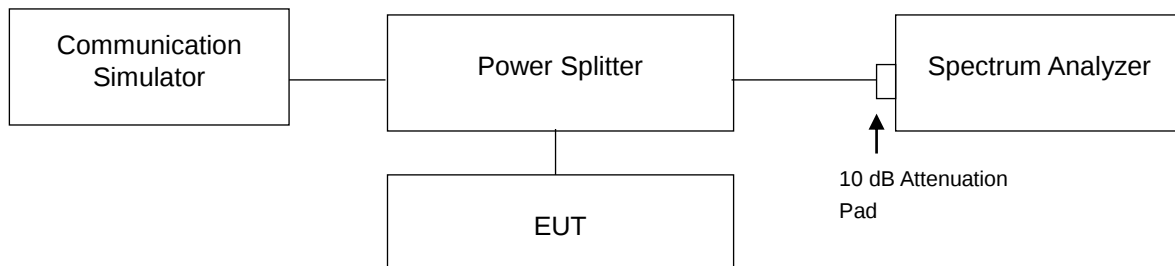

4.6.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 9 kHz to 1 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 100 kHz and VBW = 300 kHz are used for conducted emission measurement.
- Measuring frequency range is from 1 GHz to 9 GHz. 10 dB attenuation pad is connected with spectrum. RBW = 1 MHz and VBW = 3 MHz are used for conducted emission measurement.

4.6.4 Test Results

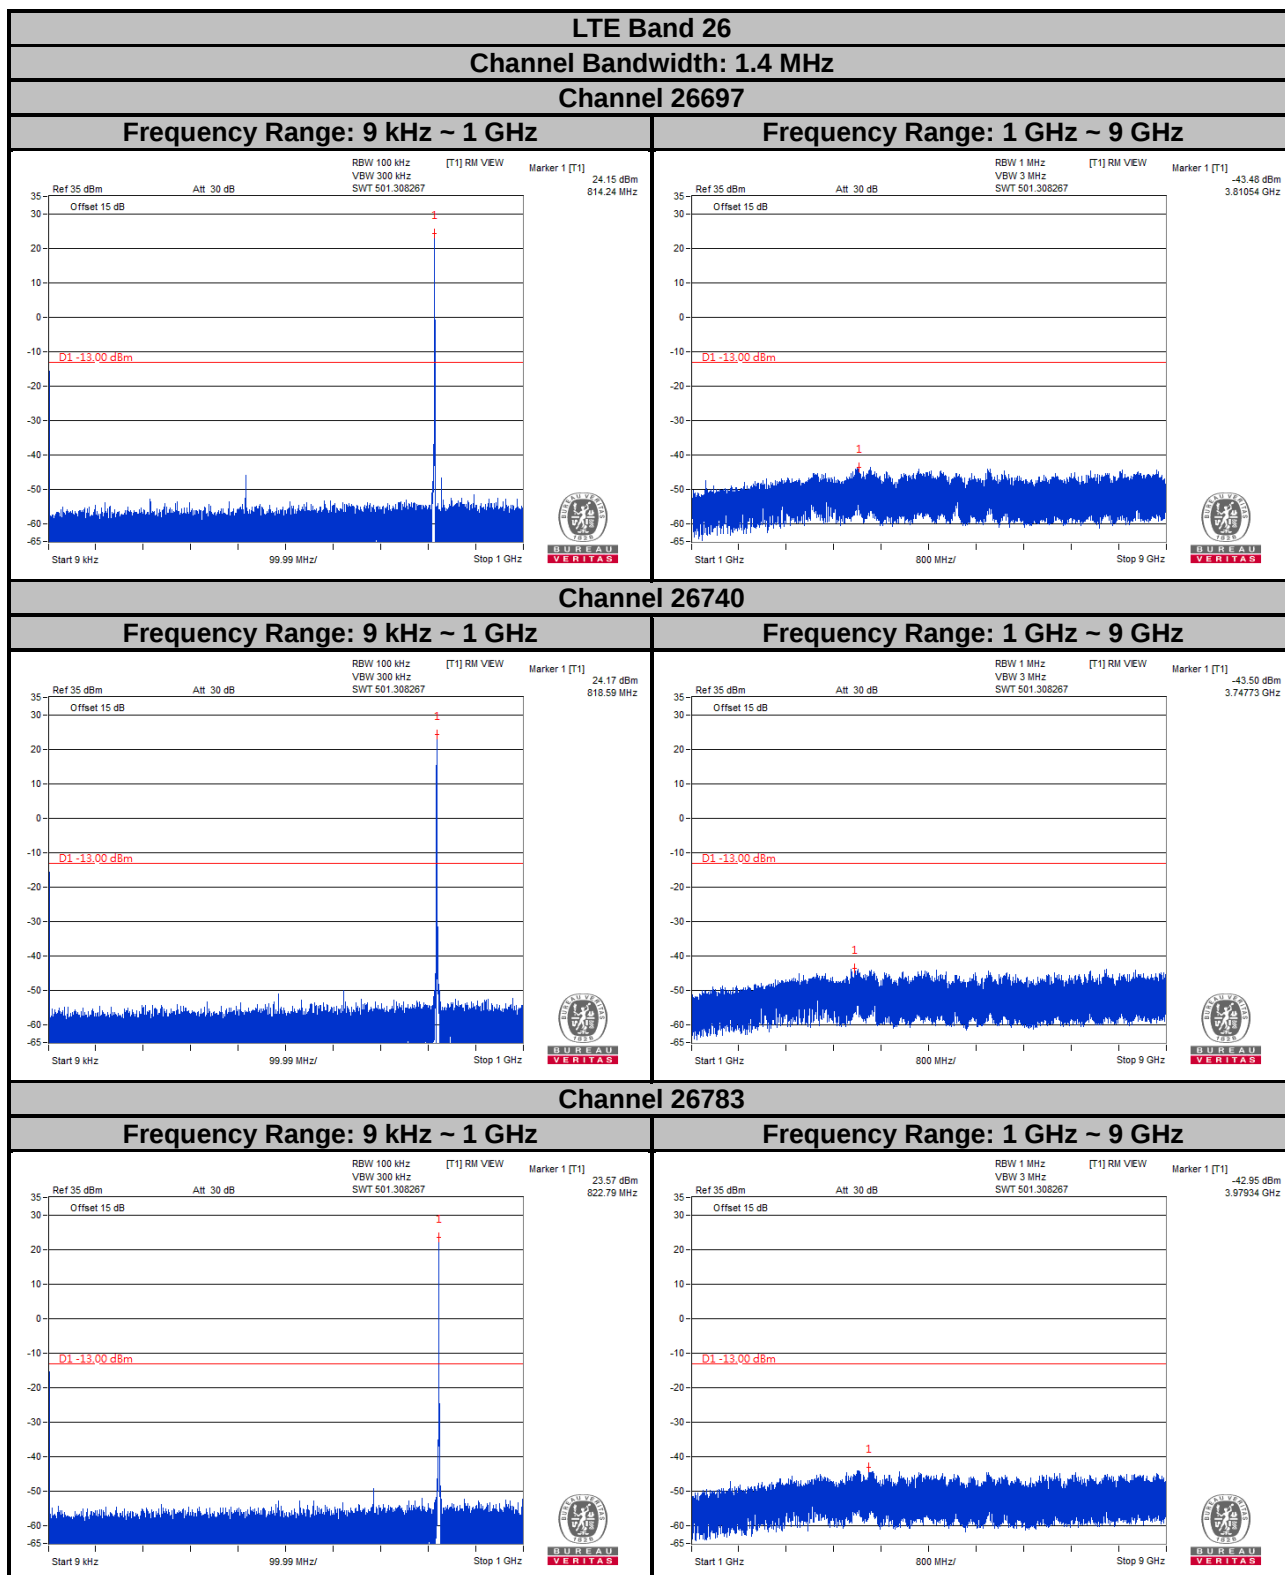


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 3 MHz

Channel 26705

Frequency Range: 9 kHz ~ 1 GHz

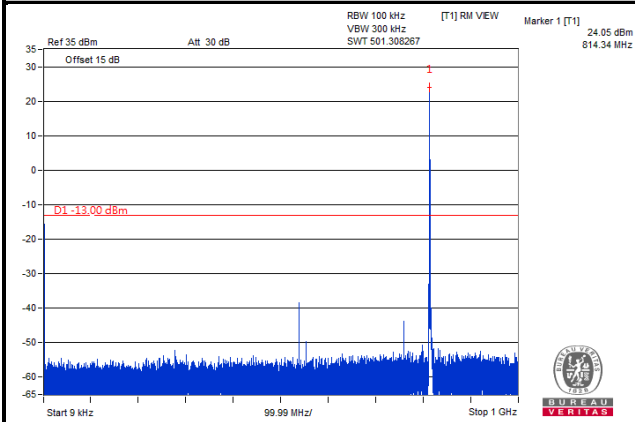


Frequency Range: 1 GHz ~ 9 GHz

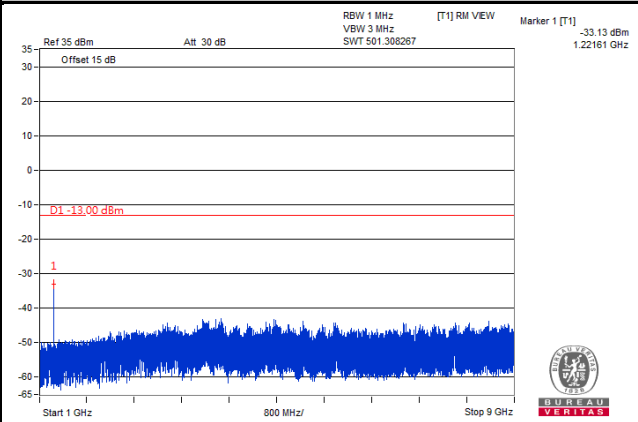


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

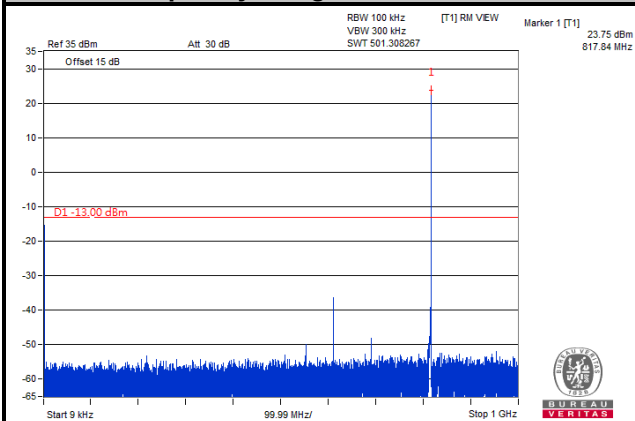


Frequency Range: 1 GHz ~ 9 GHz

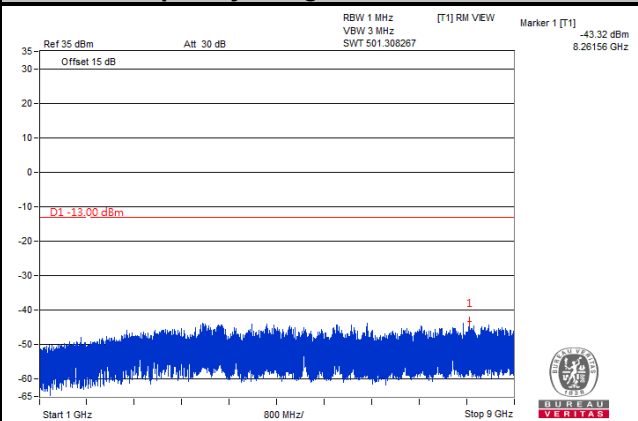


Channel 26775

Frequency Range: 9 kHz ~ 1 GHz

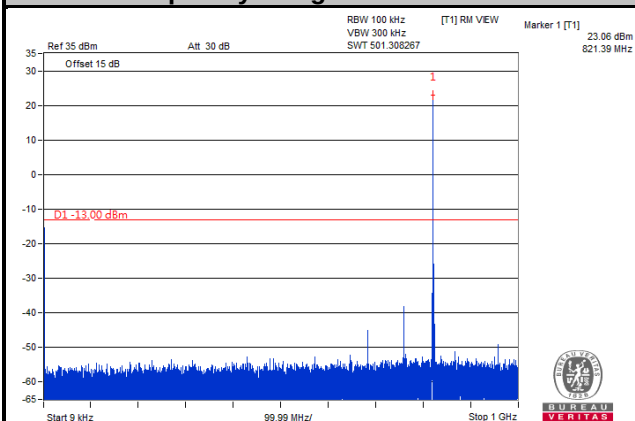

Frequency Range: 1 GHz ~ 9 GHz

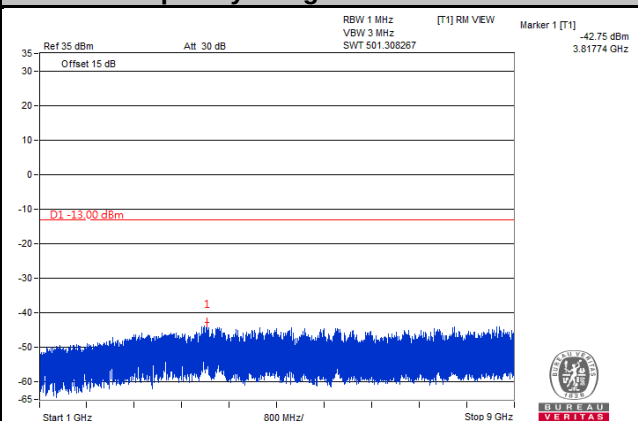


Note: The signal over the limit in 9 kHz is from spectrum analyzer.

LTE Band 26


Channel Bandwidth: 5 MHz

Channel 26715

Frequency Range: 9 kHz ~ 1 GHz

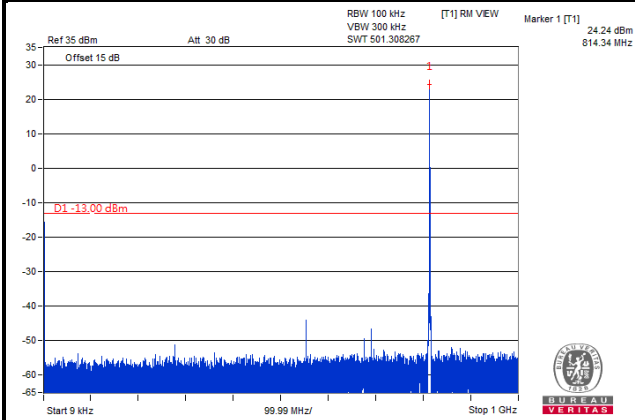


Frequency Range: 1 GHz ~ 9 GHz

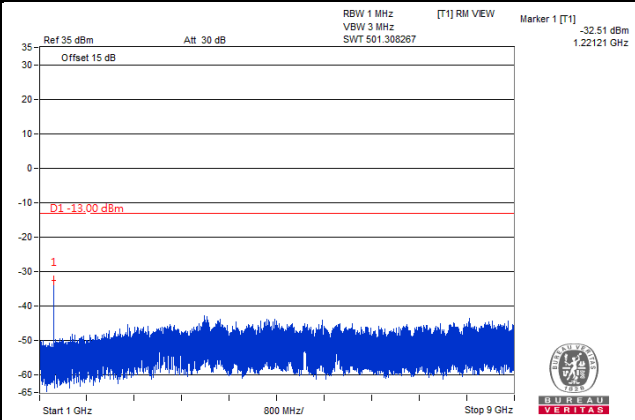


Channel 26740

Frequency Range: 9 kHz ~ 1 GHz

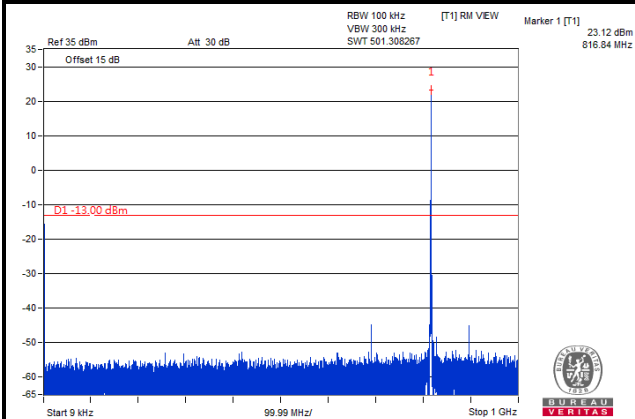


Frequency Range: 1 GHz ~ 9 GHz

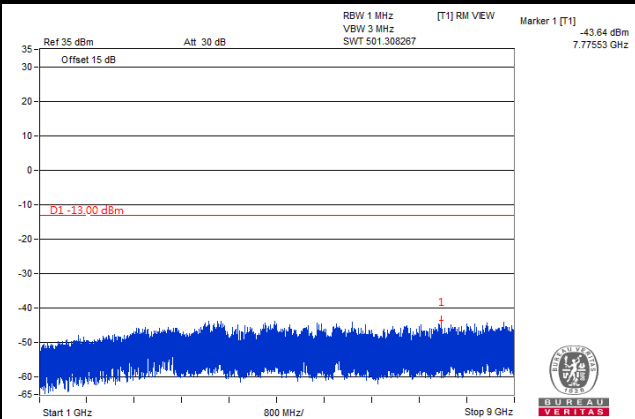


Channel 26765


Frequency Range: 9 kHz ~ 1 GHz

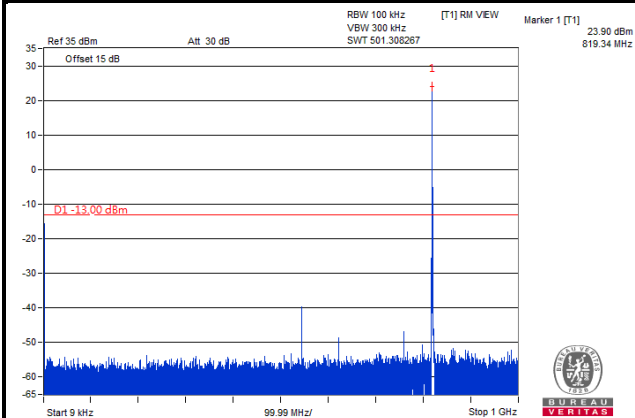

Frequency Range: 1 GHz ~ 9 GHz

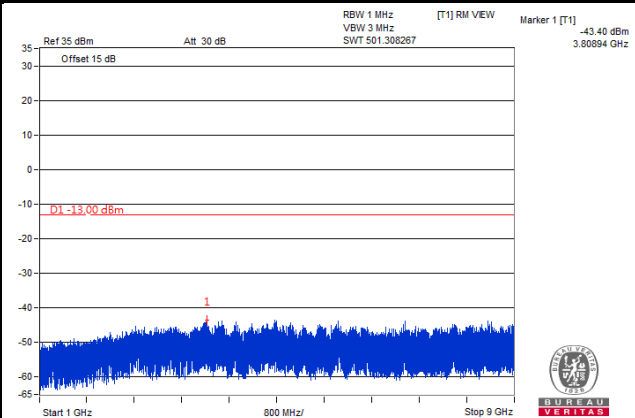

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

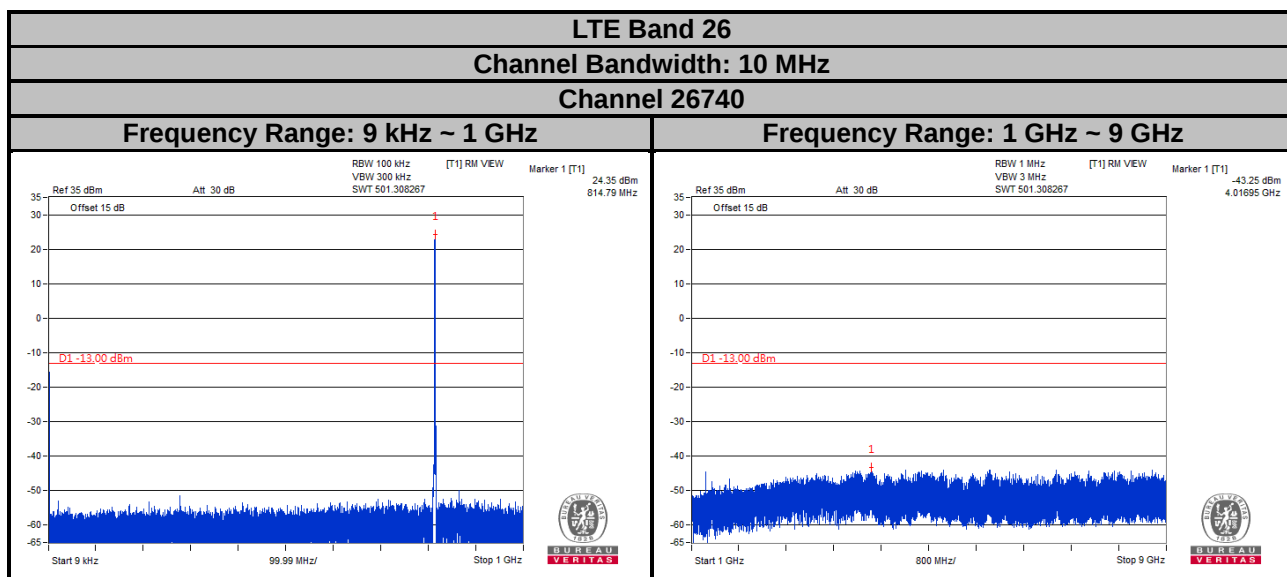

Note: The signal over the limit in 9 kHz is from spectrum analyzer.

4.7 Radiated Emission Measurement

4.7.1 Limits of Radiated Emission Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.

4.7.2 Test Procedure

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
- E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dB}.$


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 Deviation from Test Standard


No deviation.

4.7.4 Test Setup

<Radiated Emission below or equal 1 GHz>

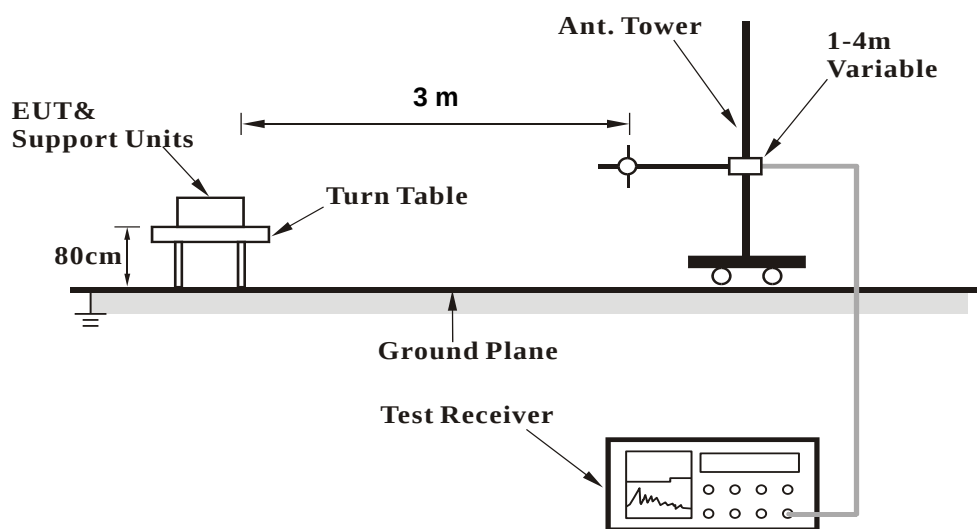

<Radiated Emission above 1 GHz>

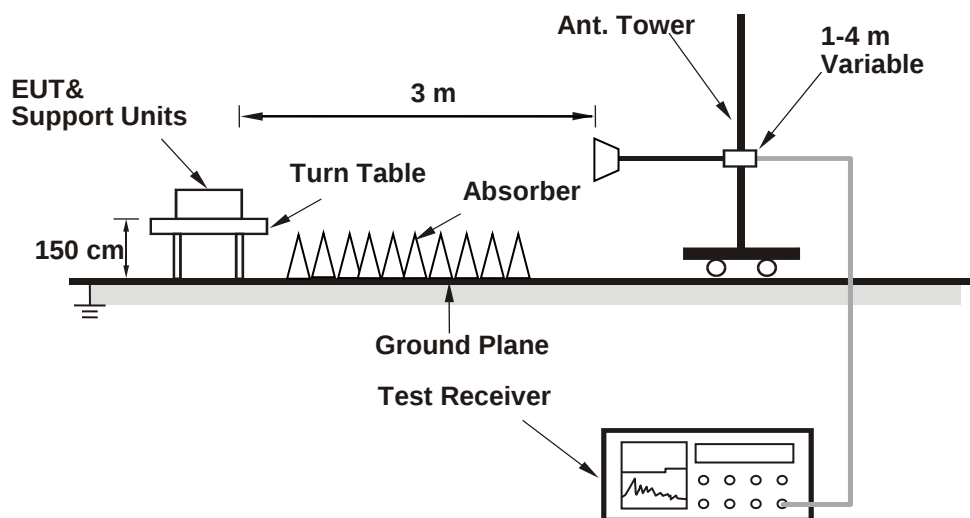

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.7.5 Test Results

LTE Band 26

Channel Bandwidth: 1.4 MHz / QPSK


Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

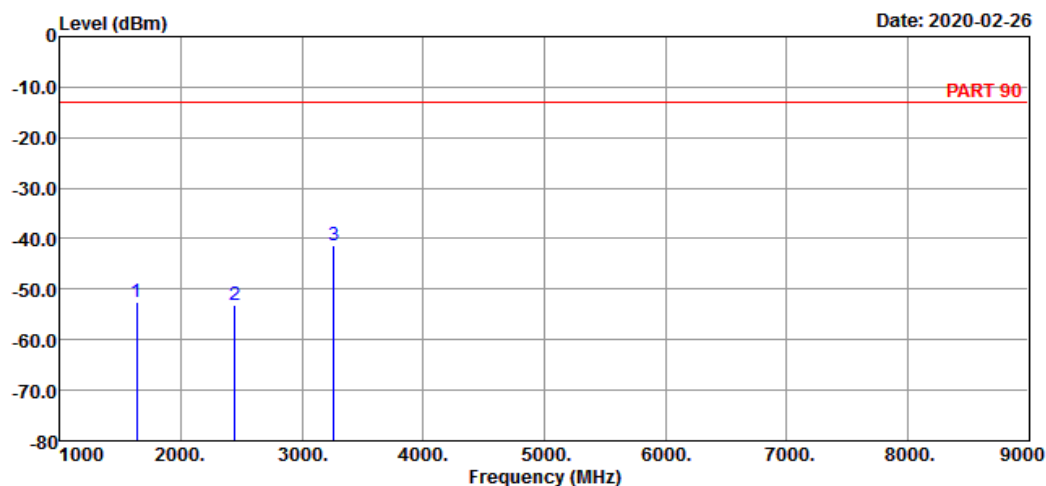

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1629.40	-52.69	-37.90	-13.00	-14.79	-39.69	Peak
2	2444.10	-53.24	-42.80	-13.00	-10.44	-40.24	Peak
3 pp	3258.80	-41.31	-31.98	-13.00	-9.33	-28.31	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

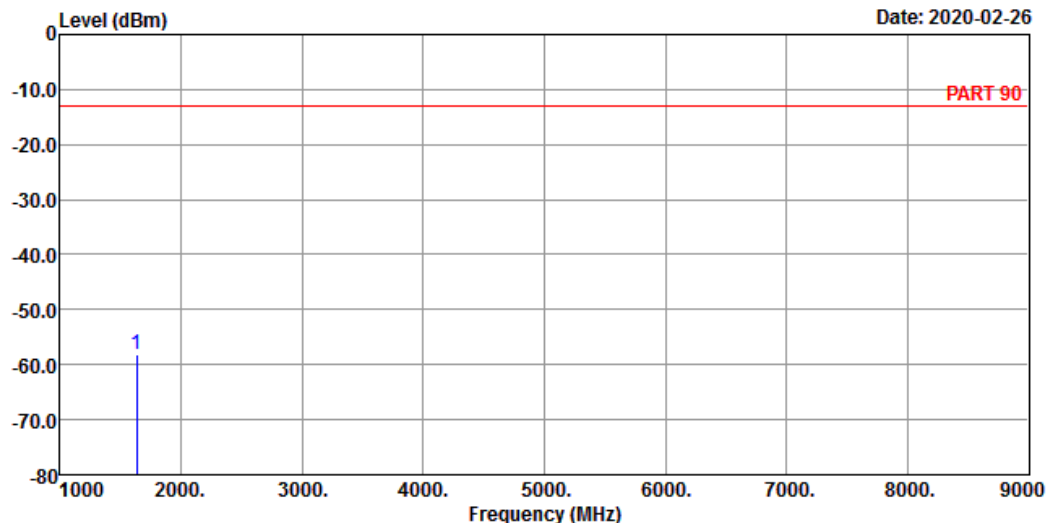

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_L-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1629.40 -58.19 -43.40 -13.00 -14.79 -45.19 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2020-02-26

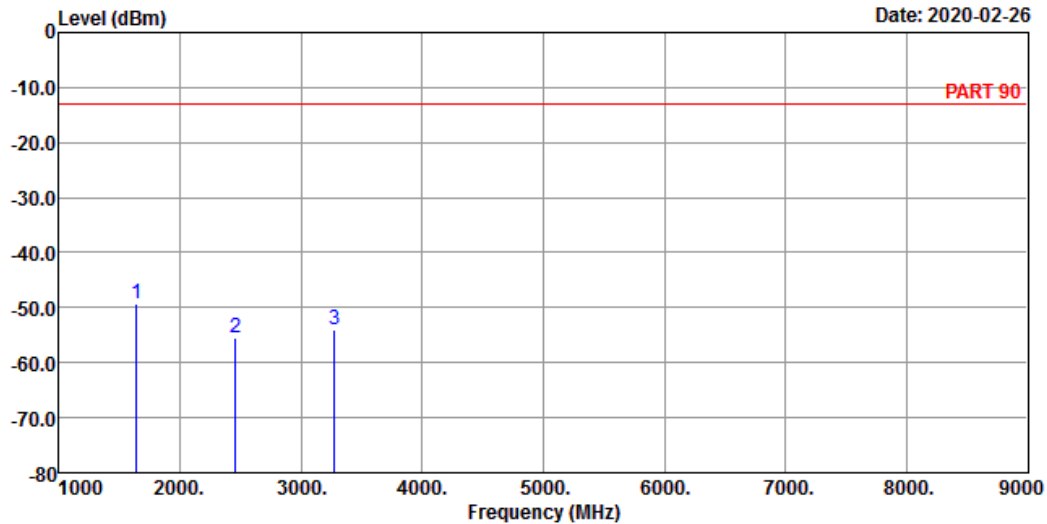

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read	Limit	Over	
	MHz	dBm	Level	Line	Factor	Limit Remark
	MHz	dBm	dBm	dBm	dB	dB
1 pp	1638.00	-49.35	-34.56	-13.00	-14.79	-36.35 Peak
2	2457.00	-55.39	-44.95	-13.00	-10.44	-42.39 Peak
3	3276.00	-54.12	-44.75	-13.00	-9.37	-41.12 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

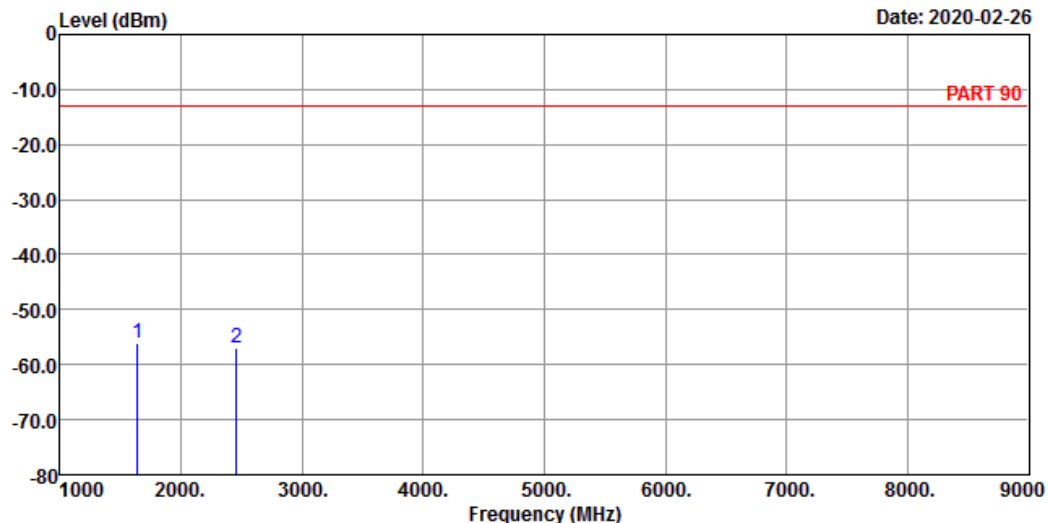

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1638.00	-56.20	-41.41	-13.00	-14.79	-43.20	Peak
2	2457.00	-56.89	-46.45	-13.00	-10.44	-43.89	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

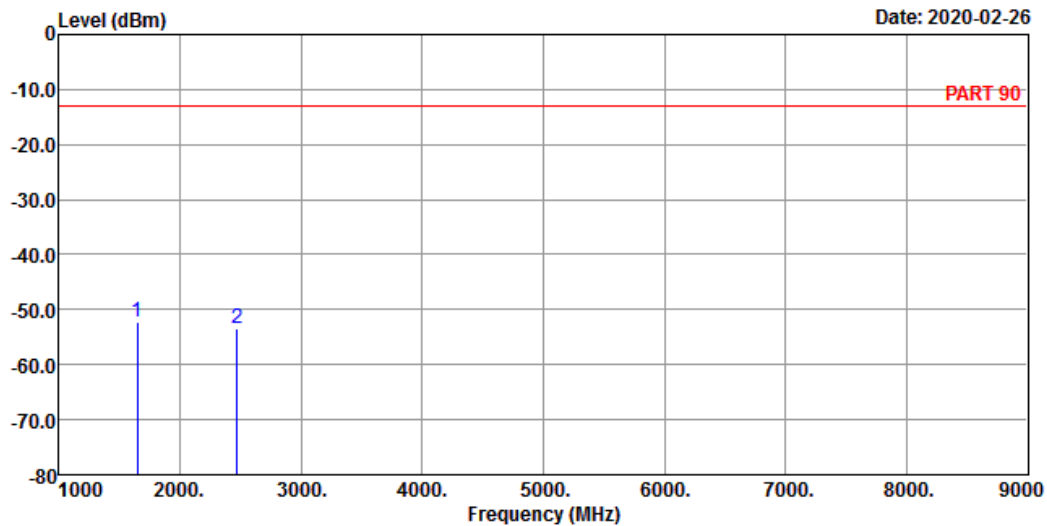

Site : 966 Chamber 5
 Condition: PART 90 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH
 Tested by: Getaz Yang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1646.60	-52.33	-37.60	-13.00	-14.73	-39.33	Peak
2	2469.90	-53.56	-43.12	-13.00	-10.44	-40.56	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

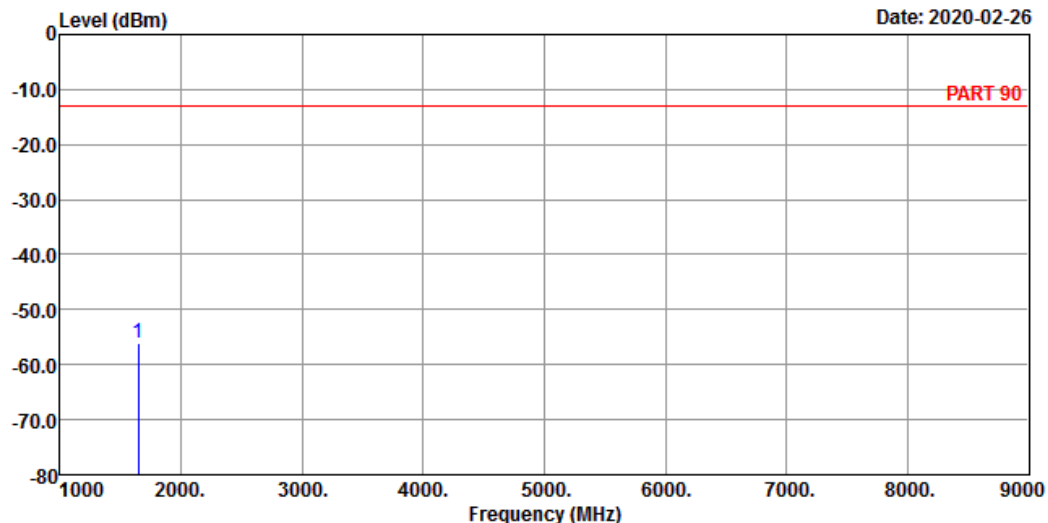

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_1.4M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1646.60 -56.22 -41.49 -13.00 -14.73 -43.22 Peak


Channel Bandwidth: 5 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

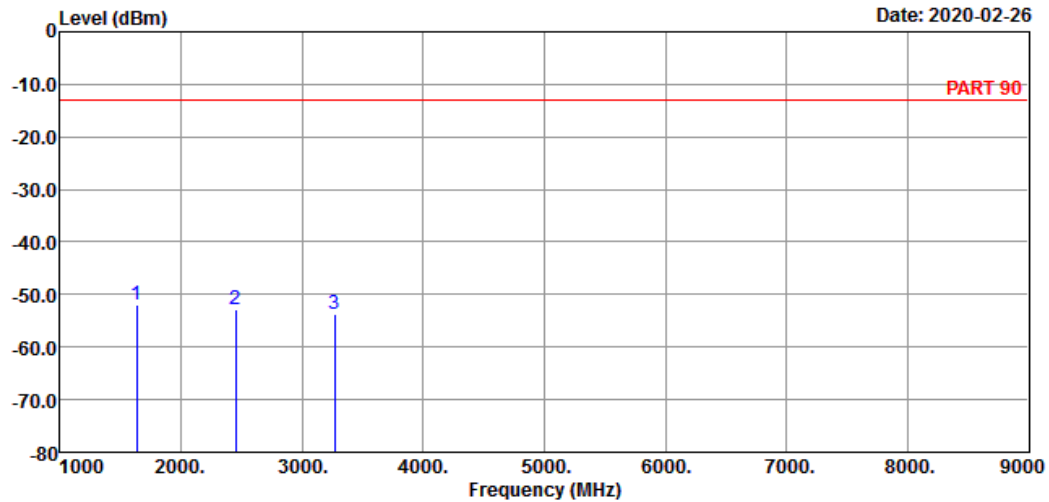

Site : 966 Chamber 5
Condition: PART 90 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	dB	Limit Remark
1 pp	1633.00	-51.92	-37.13	-13.00	-14.79	-38.92 Peak
2	2449.50	-52.97	-42.53	-13.00	-10.44	-39.97 Peak
3	3266.00	-53.79	-44.42	-13.00	-9.37	-40.79 Peak




Bureau Veritas Consumer Products Services Ltd.,Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

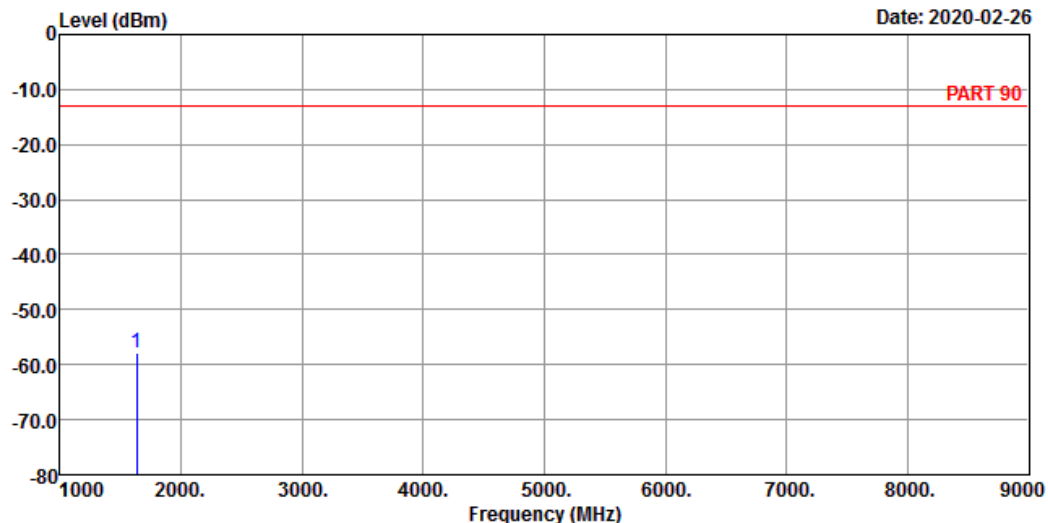

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_L-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1633.00 -57.97 -43.18 -13.00 -14.79 -44.97 Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 2020-02-26

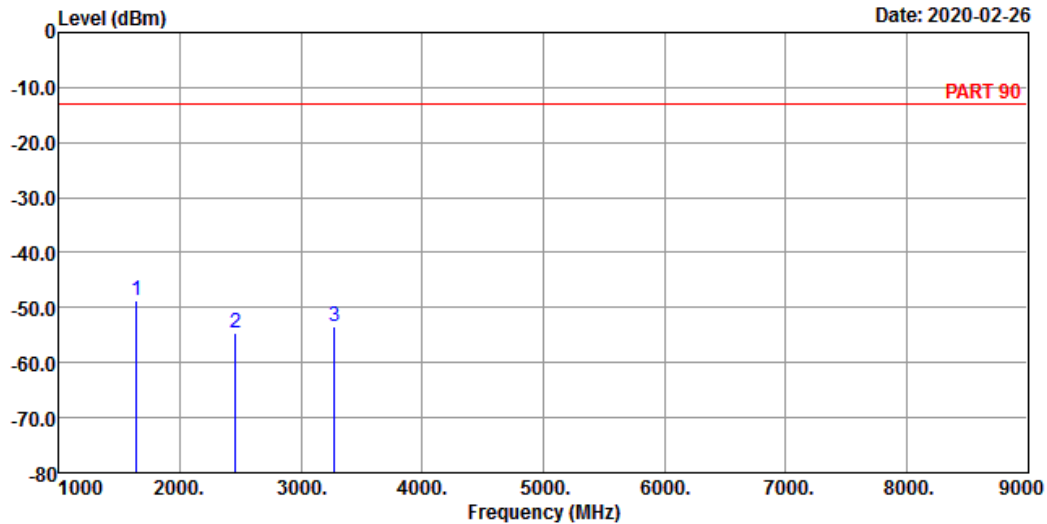

Site : 966 Chamber 5

Condition: PART 90 HORIZONTAL

Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH

Tested by: Getaz Yang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1638.00	-48.58	-33.79	-13.00	-14.79	-35.58	Peak
2	2457.00	-54.53	-44.09	-13.00	-10.44	-41.53	Peak
3	3276.00	-53.54	-44.17	-13.00	-9.37	-40.54	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

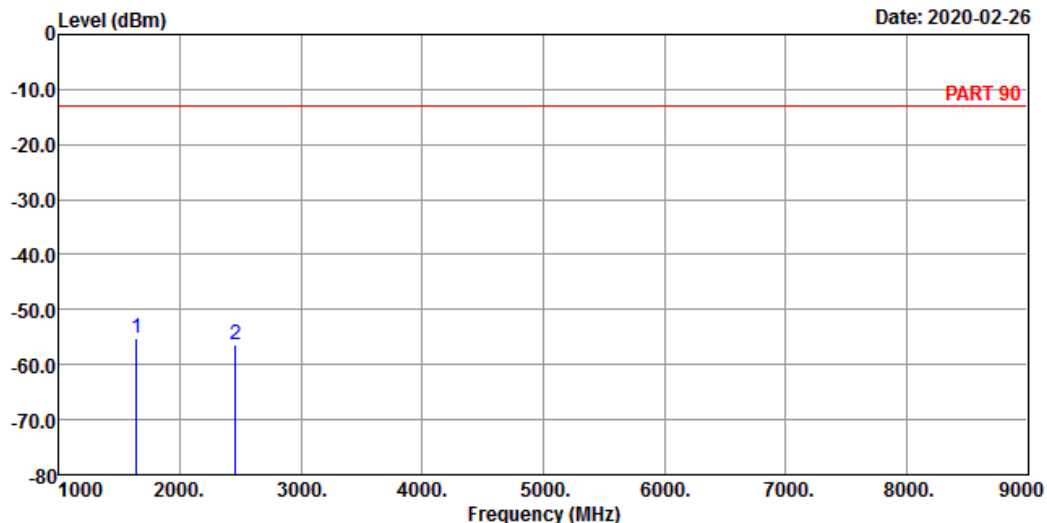

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1638.00	-55.25	-40.46	-13.00	-14.79	-42.25	Peak
2	2457.00	-56.43	-45.99	-13.00	-10.44	-43.43	Peak


High Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

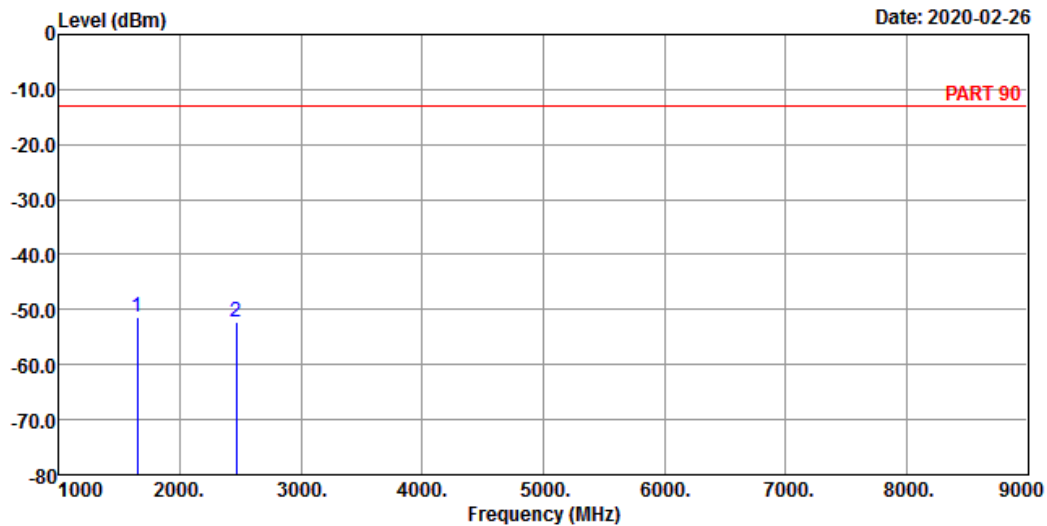

Site : 966 Chamber 5
 Condition: PART 90 HORIZONTAL
 Remak : Cat-M1 Band 26 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

			Read	Limit		Over	
	Freq	Level	Level	Line	Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1643.00	-51.51	-36.78	-13.00	-14.73	-38.51	Peak
2	2464.50	-52.32	-41.88	-13.00	-10.44	-39.32	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 2020-02-26

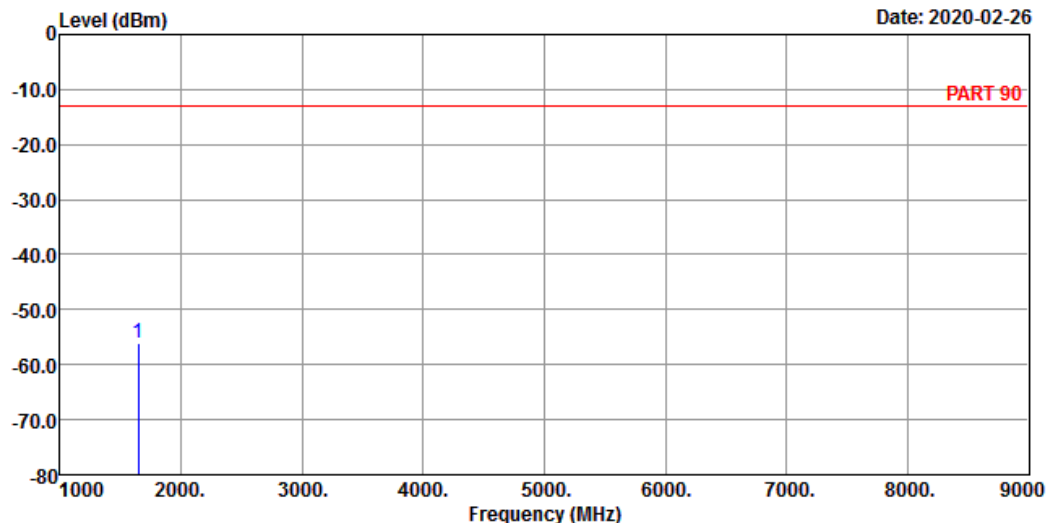

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_5M Link_H-CH

Tested by: Getaz Yang

		Read	Limit		Over	
Freq	Level	Level	Line	Factor	Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 1643.00 -55.94 -41.21 -13.00 -14.73 -42.94 Peak

Channel Bandwidth: 10 MHz / QPSK
Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2020-02-26

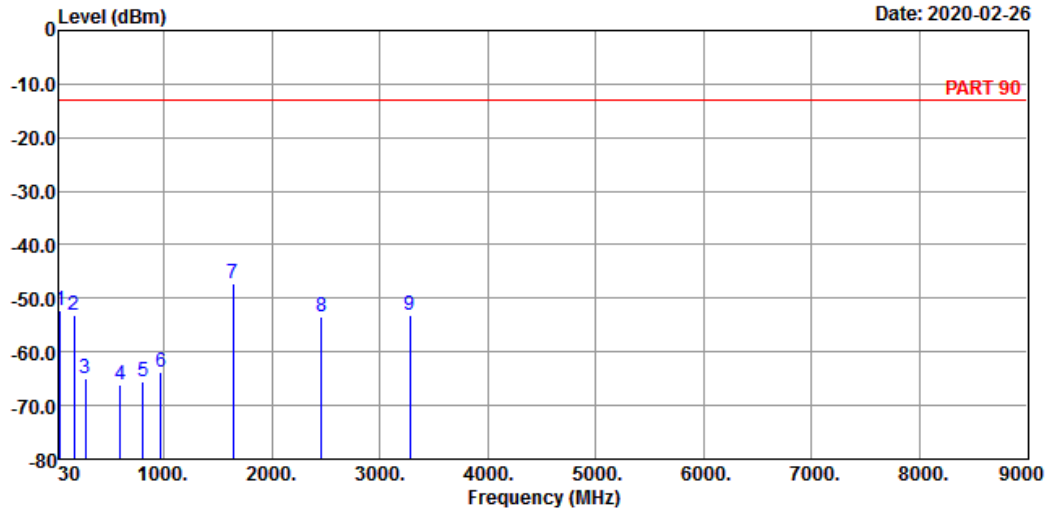

Site : 966 Chamber 5
Condition: PART 90 HORIZONTAL
Remak : Cat-M1 Band 26 QPSK_10M Link_M-CH
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	42.61	-52.36	-51.42	-13.00	-0.94	-39.36	Peak
2	165.80	-53.03	-47.78	-13.00	-5.25	-40.03	Peak
3	274.44	-64.90	-58.41	-13.00	-6.49	-51.90	Peak
4	596.48	-66.18	-65.27	-13.00	-0.91	-53.18	Peak
5	806.00	-65.65	-66.33	-13.00	0.68	-52.65	Peak
6	970.90	-63.64	-66.19	-13.00	2.55	-50.64	Peak
7 pp	1638.00	-47.29	-32.50	-13.00	-14.79	-34.29	Peak
8	2457.00	-53.55	-43.11	-13.00	-10.44	-40.55	Peak
9	3276.00	-53.00	-43.63	-13.00	-9.37	-40.00	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 2020-02-26

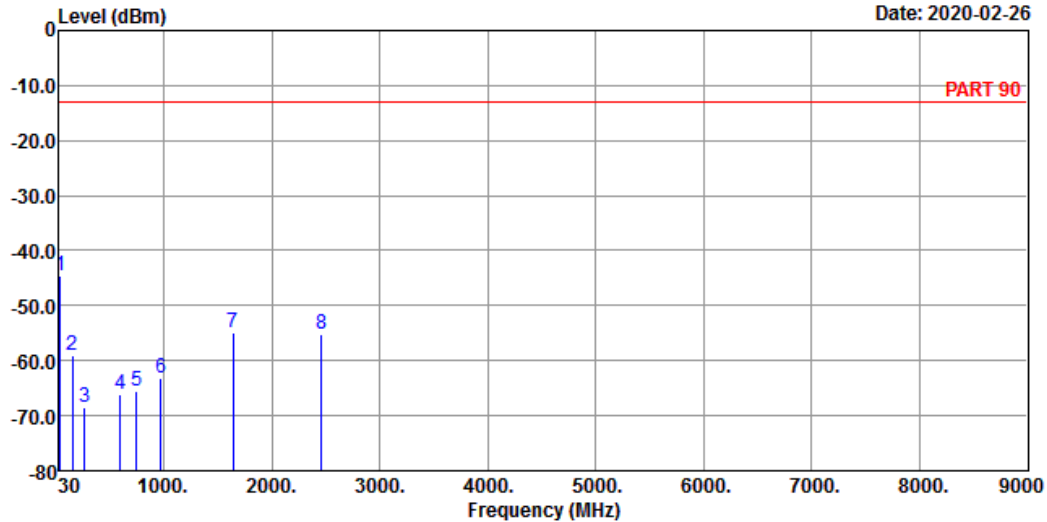

Site : 966 Chamber 5

Condition: PART 90 VERTICAL

Remak : Cat-M1 Band 26 QPSK_10M Link_M-CH

Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Over	
	MHz	dBm	dBm	dBm	dB	Limit Remark
1 pp	41.64	-44.61	-44.20	-13.00	-0.41	-31.61 Peak
2	152.22	-59.05	-52.02	-13.00	-7.03	-46.05 Peak
3	266.68	-68.61	-62.28	-13.00	-6.33	-55.61 Peak
4	599.39	-66.25	-65.46	-13.00	-0.79	-53.25 Peak
5	747.80	-65.40	-66.24	-13.00	0.84	-52.40 Peak
6	968.96	-63.26	-65.74	-13.00	2.48	-50.26 Peak
7	1638.00	-54.91	-40.12	-13.00	-14.79	-41.91 Peak
8	2457.00	-55.07	-44.63	-13.00	-10.44	-42.07 Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---