



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: MAXWEST COMMUNICATION LIMITED

Address: FLAT/RM 707 7/F, FORTRESS TOWER 250 KING'S ROAD,NORTH
POINT, HONG KONG

FCC ID: 2ASP8ASTROA64

Product Name: Phone

Standard(s): 47 CFR Part 15, Subpart E (15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by
China Certification ICT Co., Ltd (Dongguan)

Report Number: CR231169741-00D

Date Of Issue: 2023/12/8

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH.....	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER.....	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	21
3.5 MAXIMUM POWER SPECTRAL DENSITY	22
3.5.1 Applicable Standard.....	22
3.5.2 EUT Setup.....	22
3.5.3 Test Procedure	23
3.7 DUTY CYCLE	24
3.7.1 EUT Setup.....	24
3.7.2 Test Procedure	24
3.8 ANTENNA REQUIREMENT.....	25
3.8.1 Applicable Standard.....	25
3.8.2 Judgment.....	25

4. Test DATA AND RESULTS	26
4.1 AC LINE CONDUCTED EMISSIONS	26
4.2 RADIATION SPURIOUS EMISSIONS	29
4.3 EMISSION BANDWIDTH	70
4.4 MAXIMUM CONDUCTED OUTPUT POWER	84
4.5 MAXIMUM POWER SPECTRAL DENSITY	86
4.6 DUTY CYCLE	94
5. EUT PHOTOGRAPHS	96
6. TEST SETUP PHOTOGRAPHS	97

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR231169741-00D	Original Report	2023/12/8

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General:

EUT Name:	Phone
EUT Model:	ASTRO A64
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz (802.11n ht40/ac vht40) 5210MHz (802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz (802.11n ht40/ac vht40) 5775MHz (802.11ac vht80)
Maximum Average Output Power (Conducted):	12.06dBm (5150-5250 MHz) 11.77dBm (5725-5850 MHz)
Modulation Type:	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM
Rated Input Voltage:	DC 5V from adapter (for charging) or DC 3.8V from battery
Serial Number:	2E5M-1 (for RF Conducted Test) 2E5M-2 (for Emissions Test)
EUT Received Date:	2023/11/25
EUT Received Status:	Good
Note: These two adapters of product were evaluated in the CR231169741-00B report for the AC Line Conducted Emissions Test and Radiation Spurious Emissions Test. The report showed that product equipped with adapter 1 had worse emissions in AC Line Conducted Emissions Test and Radiation Spurious Emissions Test. Therefore, only the test results of product equipped with worst case adapter are reflected in this report.	

1.1.2 Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825
Per section 15.31(m), the below frequencies were performed the test as below:			
36	5180	149	5745
40	5200	157	5785
48	5240	165	5825

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795
Per section 15.31(m), the below frequencies were performed the test as below:			
38	5190	151	5755
46	5230	159	5795

For 802.11ac vht80:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775
Per section 15.31(m), the below frequencies were performed the test as below:			
42	5210	155	5775

1.1.3 Antenna Information Detail ▲ :

Antenna Type	Input Impedance (Ohm)	Frequency Range	Antenna Gain
FPC Antenna	50	2400~2500	0.88
		5180~5825	-0.57

The Method of §15.203 Compliance:

- ☒ Antenna was permanently attached to the unit.
☐ Antenna use a unique type of connector to attach to the EUT.
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter 1	MAXWEST	ASTRO A64	Input: 100-240V~50/60Hz 0.2A Output: 5.0V = 1.0A
Adapter 2	MAXWEST	HJ-0501000E1-US	Input: 100-240V~50/60Hz 0.2A Output: 5.0V = 1.0A 5.0W
USB-C Cable	/	/	Unshielded without ferrite, 1.0 Meter

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:			The system was configured for testing in Engineering Mode, which was provided by the manufacturer.	
Equipment Modifications:			No	
EUT Exercise Software:			Engineer Mode	
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
5150-5250 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5180	6Mbps	16
	Middle	5200	6Mbps	16
	Highest	5240	6Mbps	16
802.11n ht20	Lowest	5180	MCS0	16
	Middle	5200	MCS0	16
	Highest	5240	MCS0	16
802.11n ht40	Lowest	5190	MCS0	16
	Highest	5230	MCS0	16
802.11ac vht80	Middle	5210	MCS0	16
5725-5850 MHz Band:				
Test Modes	Test Channels	Test Frequency (MHz)	Data rate	Power Level Setting
802.11a	Lowest	5745	6Mbps	16
	Middle	5785	6Mbps	16
	Highest	5825	6Mbps	16
802.11n ht20	Lowest	5745	MCS0	16
	Middle	5785	MCS0	16
	Highest	5825	MCS0	16
802.11n ht40	Lowest	5755	MCS0	16
	Highest	5795	MCS0	16
802.11ac vht80	Middle	5775	MCS0	16
Note: The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.				

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
I PRO	Earphone	Phonenix 5.0s	EP221126001

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Earphone Cable	NO	NO	1.2	EUT	Earphone
USB-C Cable	NO	NO	1.0	Adapter	EUT

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

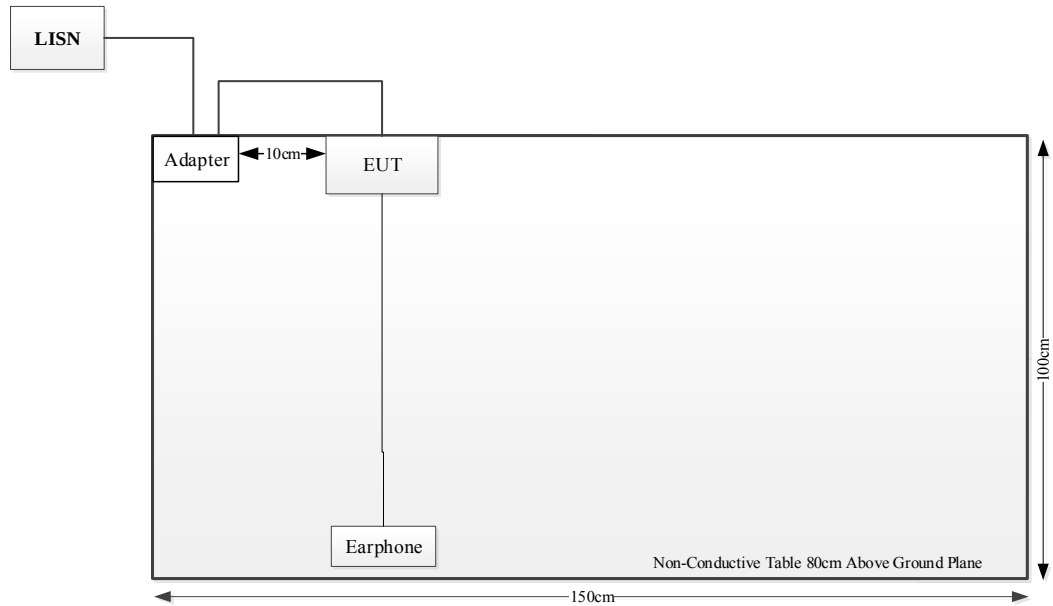

Radiation Spurious Emissions:

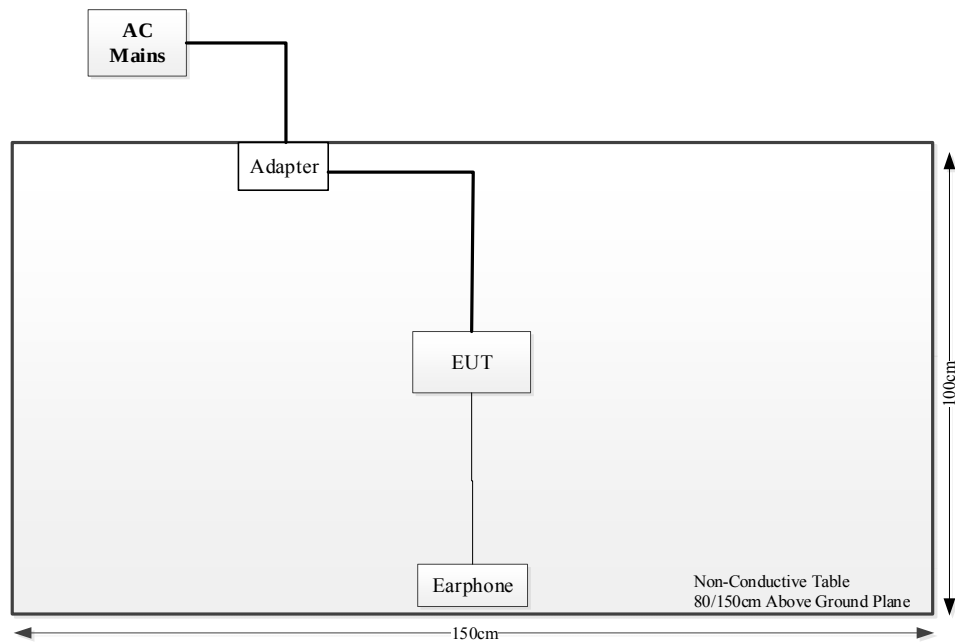

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 4.12dB, 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
FCC§15.207(a)	AC line conducted emissions	Compliant
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant
FCC§15.407 (c)	Automatically Discontinue Transmission	Compliant*
FCC§15.407(a) (e)	Emission Bandwidth	Compliant
FCC§15.407(a)	Maximum Conducted Output Power	Compliant
FCC§15.407 (a)	Power Spectral Density	Compliant
FCC§15.407 (g)	Frequency Stability	Compliant**
§15.203	Antenna Requirement	Compliant

Note:

Compliant*: During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

Compliant:** Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

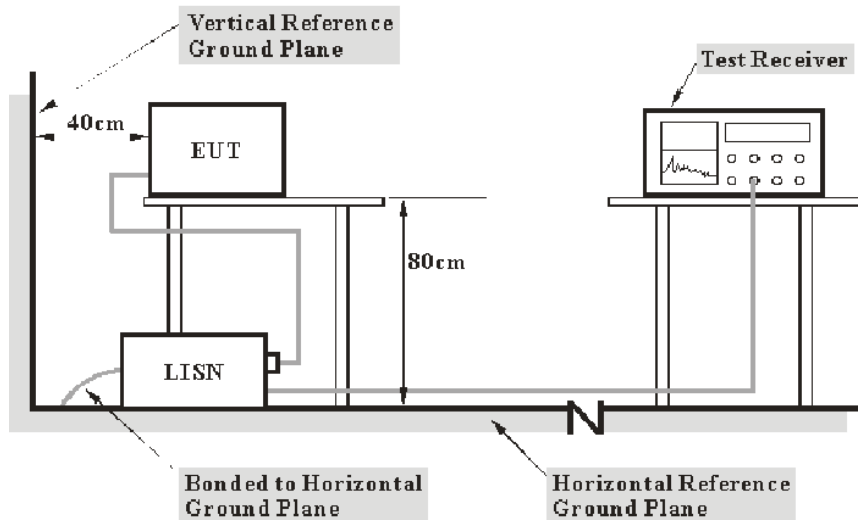

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of – 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of – 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of – 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of – 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.


(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.


(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup


9kHz~30MHz:

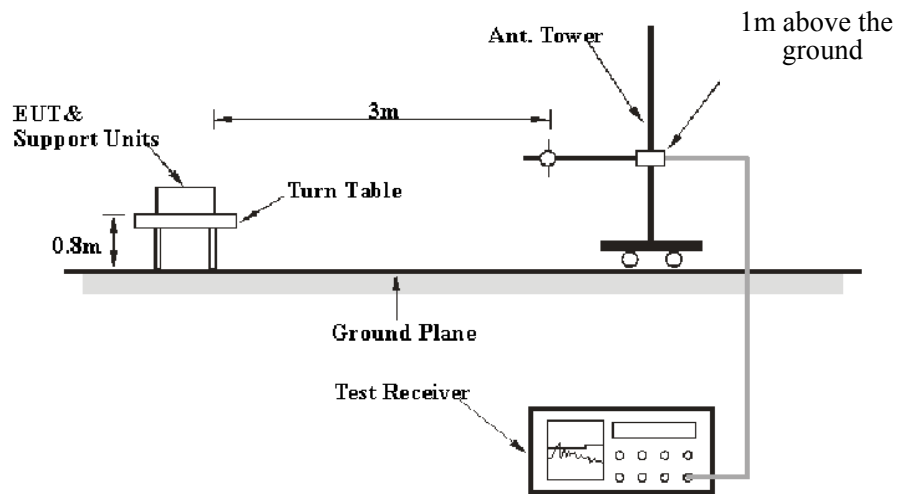

30MHz~1GHz:

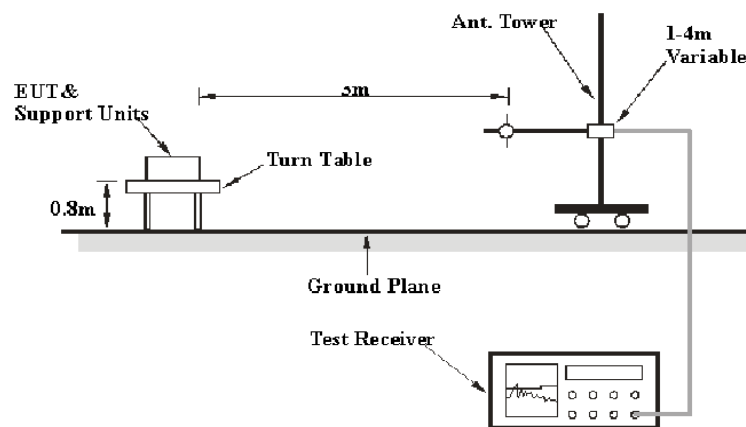

1-40 GHz:

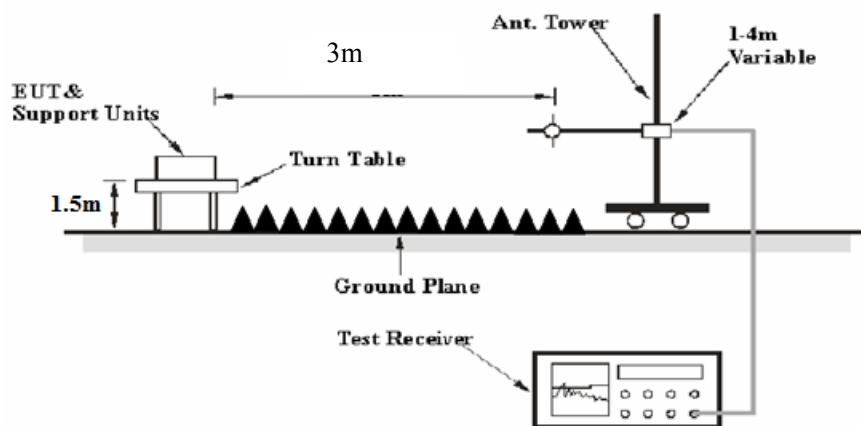

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/AV
30 MHz – 1000 MHz	100 kHz	300 kHz	---	PK
	---	---	120 kHz	QP

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP [dBm] + 95.2$, for $d = 3$ meters.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.407 (a), (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

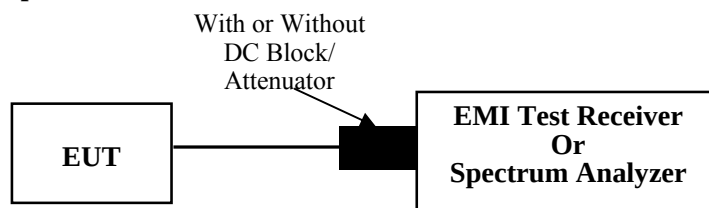

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- Set RBW = 100 kHz.
 - Set the video bandwidth (VBW) ≥ 3 RBW.
 - Detector = Peak.
 - Trace mode = max hold.
 - Sweep = auto couple.
 - Allow the trace to stabilize.
 - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

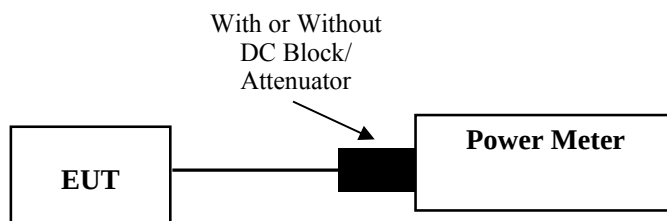

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

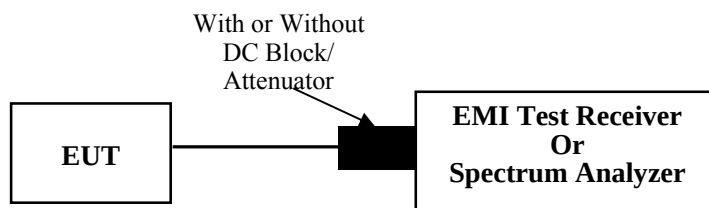

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.7 Duty Cycle

3.7.1 EUT Setup

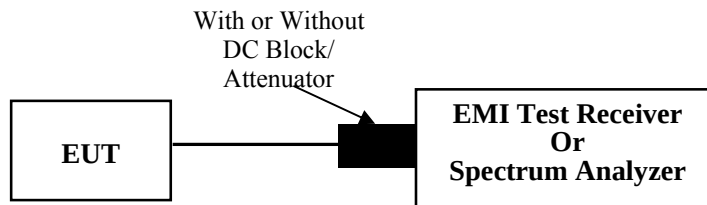

3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.8.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2E5M-2	Test Date:	2023/12/7
Test Site:	CE	Test Mode:	Transmitting (Tested at maximum output power mode: 802.11n ht40, 5190MHz)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9	Relative Humidity: (%)	42	ATM Pressure: (kPa)	101.5
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/3/31	2024/3/30
R&S	EMI Test Receiver	ESR3	102726	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/8/6	2024/8/5
Audix	Test Software	E3	190306 (V9)	N/A	N/A


** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:

(Adapter 1 Power Supply mode was the worst)


Please refer to the below table and plots.

Project No.: CR231169741-RF
 Tester: David Huang
 Port: Line
 Note: Transmitting(5G WIFI Adapter1)

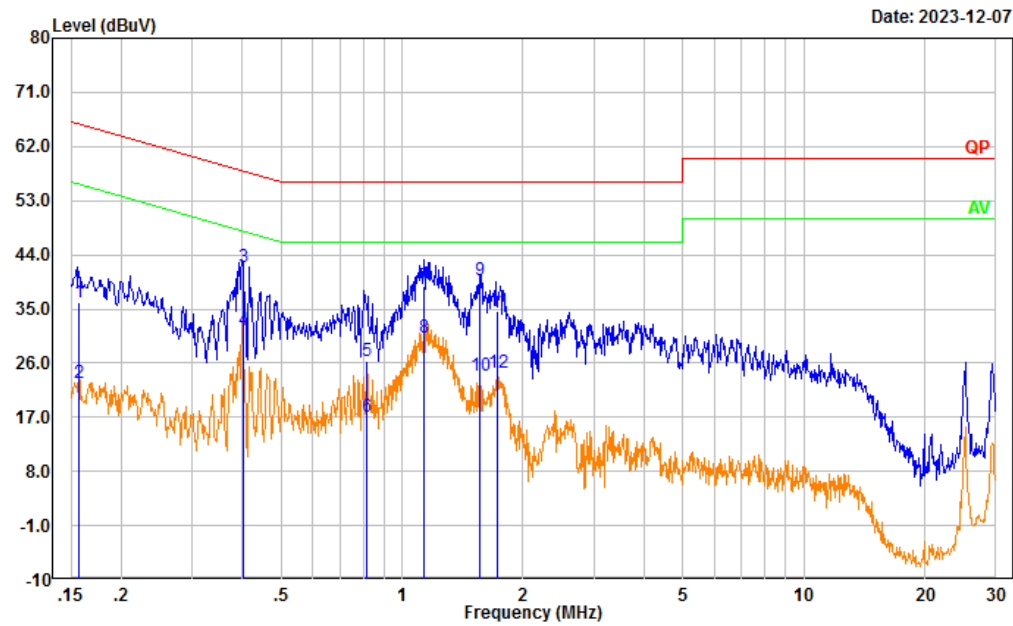

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.157	26.37	9.61	35.98	65.63	29.65	QP
2	0.157	13.05	9.61	22.66	55.63	32.97	Average
3	0.402	32.31	9.61	41.92	57.80	15.88	QP
4	0.402	21.93	9.61	31.54	47.80	16.26	Average
5	0.815	16.74	9.62	26.36	56.00	29.64	QP
6	0.815	7.53	9.62	17.15	46.00	28.85	Average
7	1.134	29.24	9.62	38.86	56.00	17.14	QP
8	1.134	20.65	9.62	30.27	46.00	15.73	Average
9	1.565	30.16	9.63	39.79	56.00	16.21	QP
10	1.565	14.17	9.63	23.80	46.00	22.20	Average
11	1.733	24.95	9.63	34.58	56.00	21.42	QP
12	1.733	14.88	9.63	24.51	46.00	21.49	Average

Project No.: CR231169741-RF
 Tester: David Huang
 Port: neutral
 Note: Transmitting(5G WIFI Adapter1)

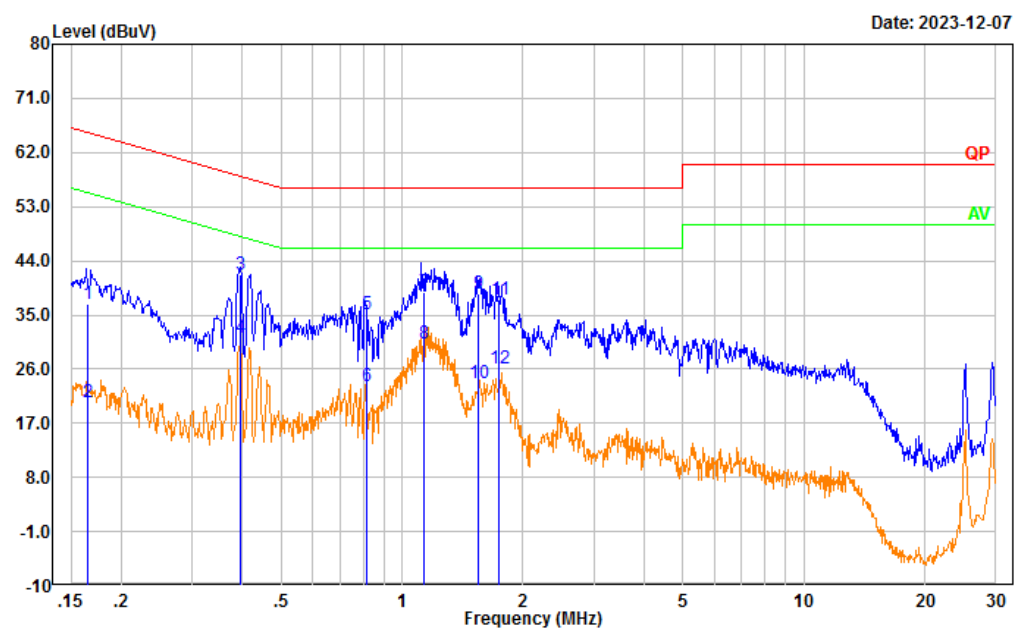

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.165	27.33	9.61	36.94	65.18	28.24	QP
2	0.165	10.77	9.61	20.38	55.18	34.80	Average
3	0.397	32.04	9.61	41.65	57.92	16.27	QP
4	0.397	21.57	9.61	31.18	47.92	16.74	Average
5	0.816	25.59	9.62	35.21	56.00	20.79	QP
6	0.816	13.64	9.62	23.26	46.00	22.74	Average
7	1.133	29.08	9.62	38.70	56.00	17.30	QP
8	1.133	20.72	9.62	30.34	46.00	15.66	Average
9	1.553	28.96	9.63	38.59	56.00	17.41	QP
10	1.553	13.91	9.63	23.54	46.00	22.46	Average
11	1.745	27.89	9.63	37.52	56.00	18.48	QP
12	1.745	16.38	9.63	26.01	46.00	19.99	Average

4.2 Radiation Spurious Emissions

Serial Number:	2E5M -2	Test Date:	2023/12/3~2023/12/5
Test Site:	966-2,966-1	Test Mode:	Transmitting
Tester:	Carl Xue, coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.1~25.6	Relative Humidity: (%)	41~53	ATM Pressure: (kPa)	101.4~101.6
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Spurious Emissions Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
BACL	Loop Antenna	1313-1P	3092721	2023/10/20	2026/10/19
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Radiation Spurious Emissions Above 1GHz					
AH	Double Ridge Guide Horn Antenna	SAS-571	1394	2023/2/22	2026/2/21
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2023/11/8	2024/11/7
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2023/9/15	2024/9/14
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021/2/5	2024/2/4
Audix	Test Software	E3	201021 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


After pre-scan in the X, Y and Z axes of orientation, the worst case is below:

1) 9kHz~30MHz

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz (Adapter 1 Power Supply mode was the worst)**Frequency Band 5150-5250 MHz:***(Tested at maximum output power mode: 802.11n ht40 mode)***802.11n ht40 _ Low Channel _ Horizontal**

Project No.: CR231169741-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5150-5250MHz 802.11n ht40 5190MHz Adapter1)

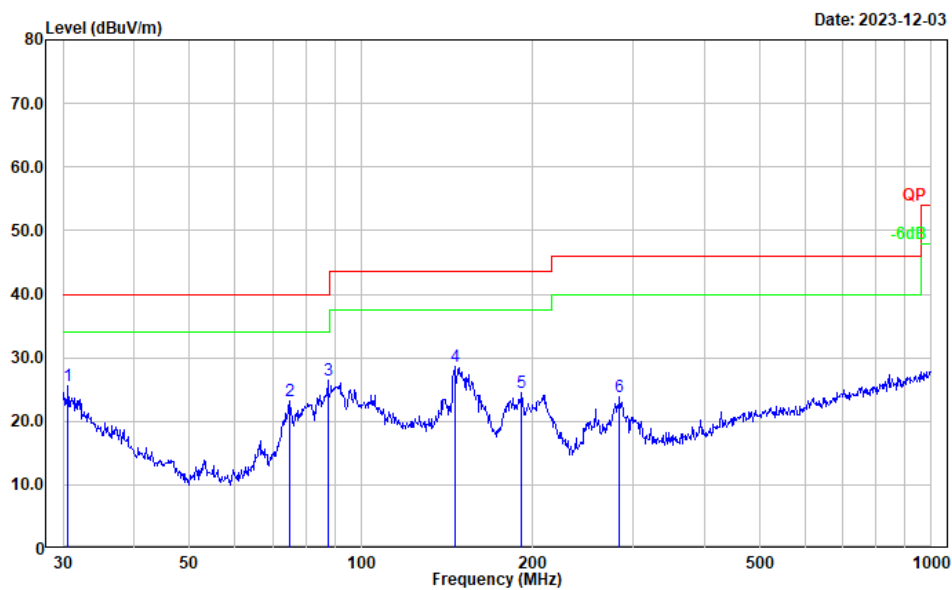

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	29.86	-4.28	25.58	40.00	14.42	Peak
2	74.919	40.20	-16.97	23.23	40.00	16.77	Peak
3	87.418	43.44	-17.07	26.37	40.00	13.63	Peak
4	145.861	40.43	-11.87	28.56	43.50	14.94	Peak
5	191.074	37.76	-13.30	24.46	43.50	19.04	Peak
6	283.979	35.19	-11.43	23.76	46.00	22.24	Peak


802.11n ht40 _ Low Channel _ Vertical

Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: vertical


Note: Transmitting(5150-5250MHz 802.11n ht40 5190MHz Adapter1)

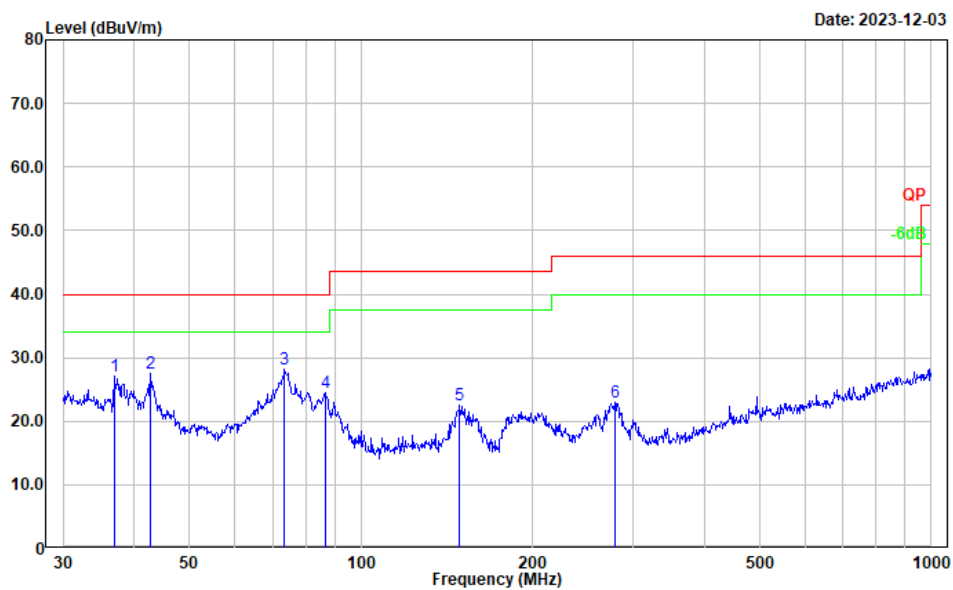

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	36.895	36.13	-9.06	27.07	40.00	12.93	Peak
2	42.600	40.47	-12.87	27.60	40.00	12.40	Peak
3	73.359	44.98	-16.86	28.12	40.00	11.88	Peak
4	86.503	41.68	-17.11	24.57	40.00	15.43	Peak
5	148.963	34.47	-11.90	22.57	43.50	20.93	Peak
6	279.044	34.71	-11.75	22.96	46.00	23.04	Peak

802.11n ht40 _ High Channel _ Horizontal

Project No.: CR231169741-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5150-5250MHz 802.11n ht40 5230MHz Adapter1)

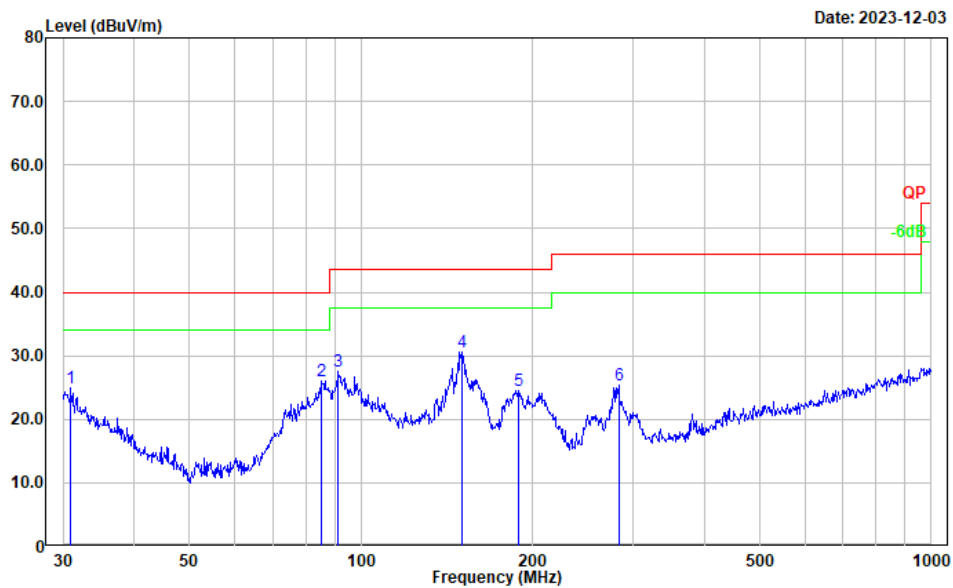

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	29.36	-4.53	24.83	40.00	15.17	Peak
2	84.999	43.21	-17.19	26.02	40.00	13.98	Peak
3	91.175	44.07	-16.64	27.43	43.50	16.07	Peak
4	150.011	42.52	-11.90	30.62	43.50	12.88	Peak
5	188.413	38.08	-13.49	24.59	43.50	18.91	Peak
6	282.985	36.84	-11.51	25.33	46.00	20.67	Peak

802.11n ht40 _ High Channel _ Vertical


Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: vertical

Note: Transmitting(5150-5250MHz 802.11n ht40 5230MHz Adapter1)

Date: 2023-12-03

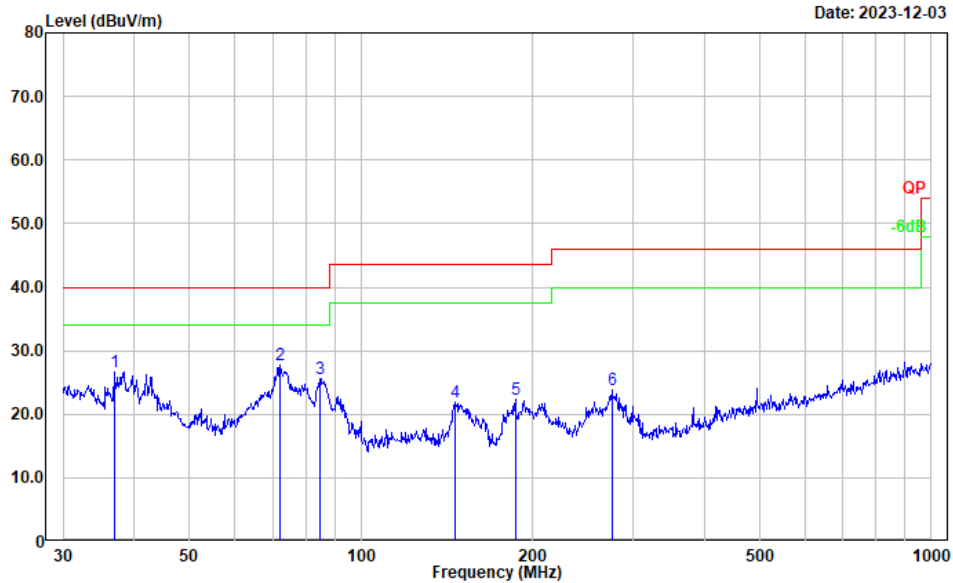

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	36.895	35.72	-9.06	26.66	40.00	13.34	Peak
2	72.084	44.42	-16.77	27.65	40.00	12.35	Peak
3	84.702	42.83	-17.20	25.63	40.00	14.37	Peak
4	145.861	33.76	-11.87	21.89	43.50	21.61	Peak
5	186.441	35.80	-13.53	22.27	43.50	21.23	Peak
6	275.157	35.72	-11.94	23.78	46.00	22.22	Peak


Frequency Band 5725-5850 MHz:**(Tested at maximum output power mode: 802.11a mode)****802.11a _ Low Channel _ Horizontal**

Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: horizontal


Note: Transmitting(5725-5850MHz 802.11a Low Channel Adapter1)

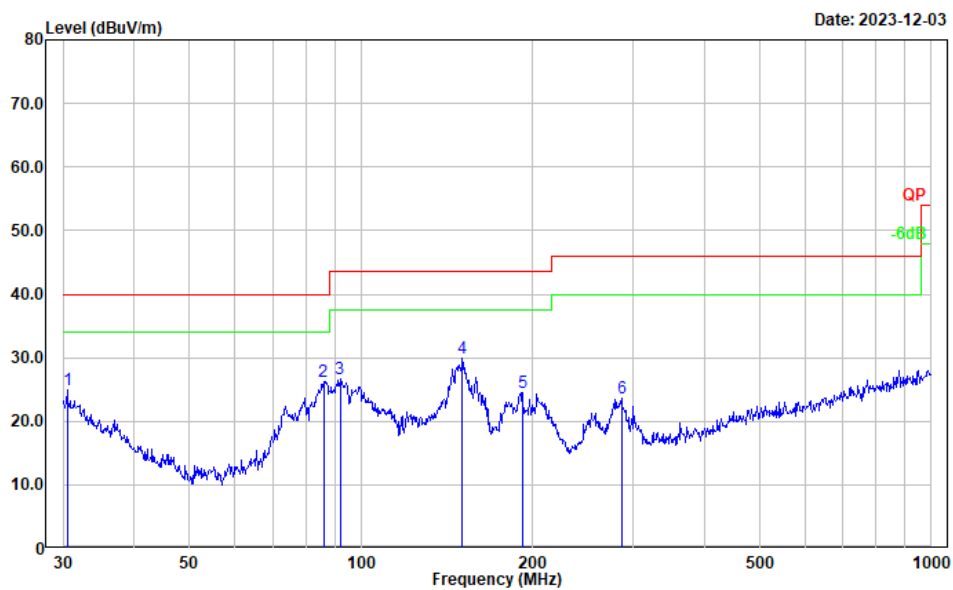

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	29.06	-4.20	24.86	40.00	15.14	Peak
2	85.898	43.33	-17.15	26.18	40.00	13.82	Peak
3	91.816	43.14	-16.50	26.64	43.50	16.86	Peak
4	150.538	41.80	-11.93	29.87	43.50	13.63	Peak
5	191.745	37.81	-13.21	24.60	43.50	18.90	Peak
6	285.978	34.87	-11.31	23.56	46.00	22.44	Peak

802.11a _ Low Channel _ Vertical

Project No.: CR231169741-RF
Tester: Carl Xue
Polarization: vertical
Note: Transmitting(5725-5850MHz 802.11a Low Channel Adapter1)

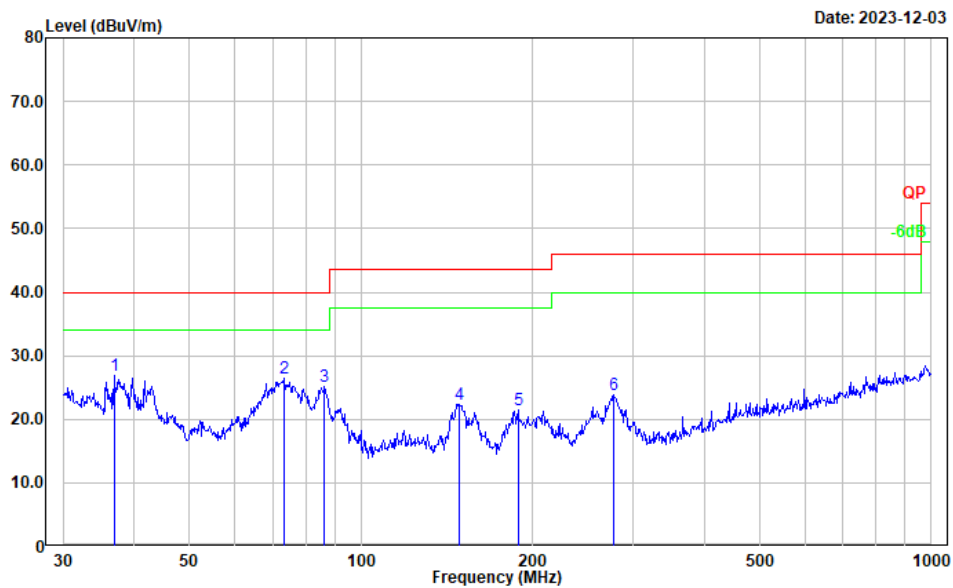

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	36.895	35.90	-9.06	26.84	40.00	13.16	Peak
2	73.103	43.30	-16.82	26.48	40.00	13.52	Peak
3	86.200	42.19	-17.13	25.06	40.00	14.94	Peak
4	148.441	34.33	-11.90	22.43	43.50	21.07	Peak
5	188.413	34.90	-13.49	21.41	43.50	22.09	Peak
6	277.094	35.62	-11.85	23.77	46.00	22.23	Peak


802.11a _ Middle Channel _ Horizontal

Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: horizontal

Note: Transmitting(5725-5850MHz 802.11a Middle Channel Adapter1)

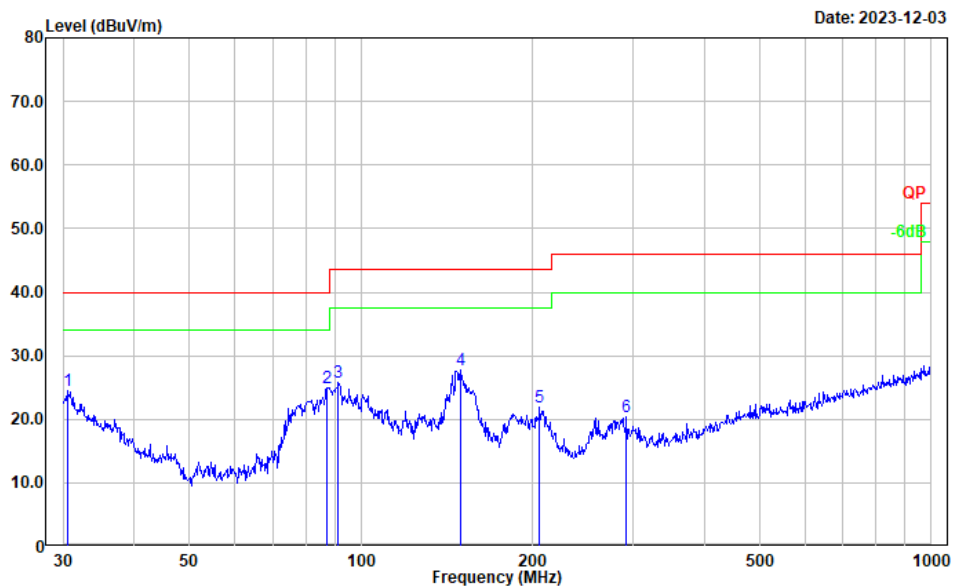

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	28.62	-4.20	24.42	40.00	15.58	Peak
2	87.112	42.06	-17.08	24.98	40.00	15.02	Peak
3	91.175	42.42	-16.64	25.78	43.50	17.72	Peak
4	149.486	39.57	-11.90	27.67	43.50	15.83	Peak
5	205.675	34.37	-12.38	21.99	43.50	21.51	Peak
6	292.058	31.30	-10.95	20.35	46.00	25.65	Peak

802.11a _ Middle Channel _ Vertical


Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: vertical

Note: Transmitting(5725-5850MHz 802.11a Middle Channel Adapter1)


Date: 2023-12-03

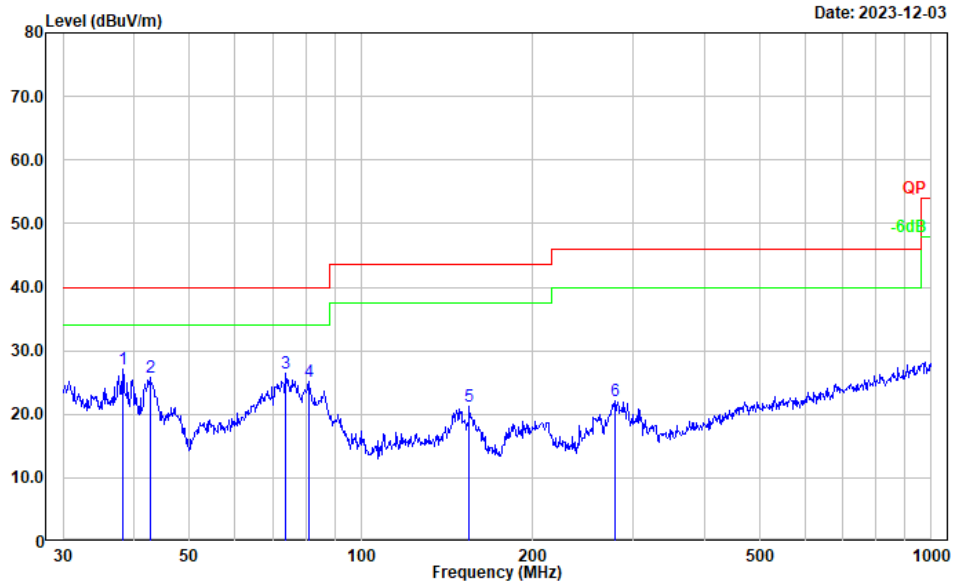

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.212	37.22	-10.02	27.20	40.00	12.80	Peak
2	42.600	38.63	-12.87	25.76	40.00	14.24	Peak
3	73.876	43.38	-16.94	26.44	40.00	13.56	Peak
4	80.927	42.49	-17.38	25.11	40.00	14.89	Peak
5	154.821	33.27	-11.95	21.32	43.50	22.18	Peak
6	279.044	33.92	-11.75	22.17	46.00	23.83	Peak

802.11a _ High Channel _ Horizontal

Project No.: CR231169741-RF
Tester: Carl Xue
Polarization: horizontal
Note: Transmitting(5725-5850MHz 802.11a High Channel Adapter1)

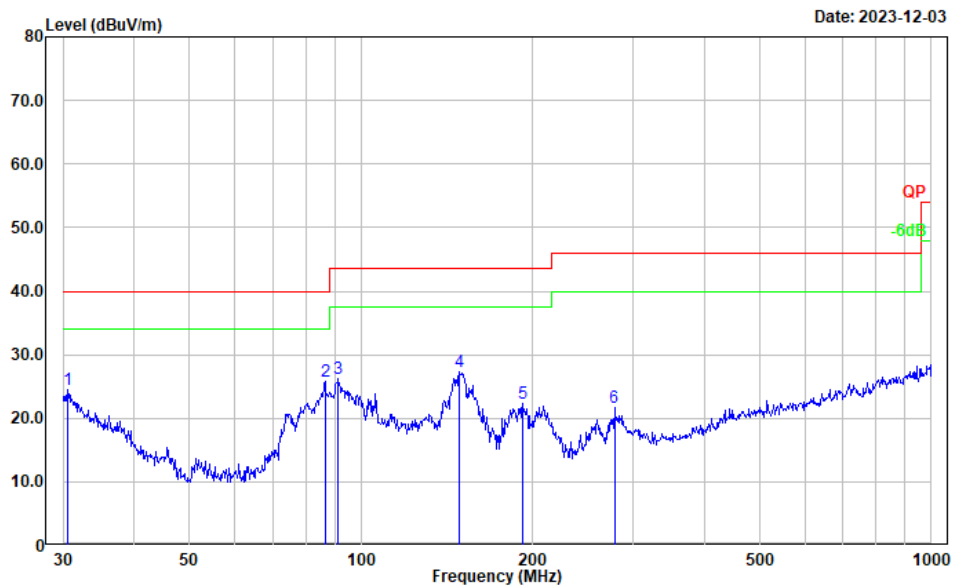

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.531	28.59	-4.20	24.39	40.00	15.61	Peak
2	86.503	43.00	-17.11	25.89	40.00	14.11	Peak
3	91.175	42.77	-16.64	26.13	43.50	17.37	Peak
4	148.963	39.22	-11.90	27.32	43.50	16.18	Peak
5	191.745	35.62	-13.21	22.41	43.50	21.09	Peak
6	278.067	33.38	-11.80	21.58	46.00	24.42	Peak

802.11a _ High Channel _ Vertical


Project No.: CR231169741-RF

Tester: Carl Xue

Polarization: vertical

Note: Transmitting(5725-5850MHz 802.11a High Channel Adapter1)

Date: 2023-12-03

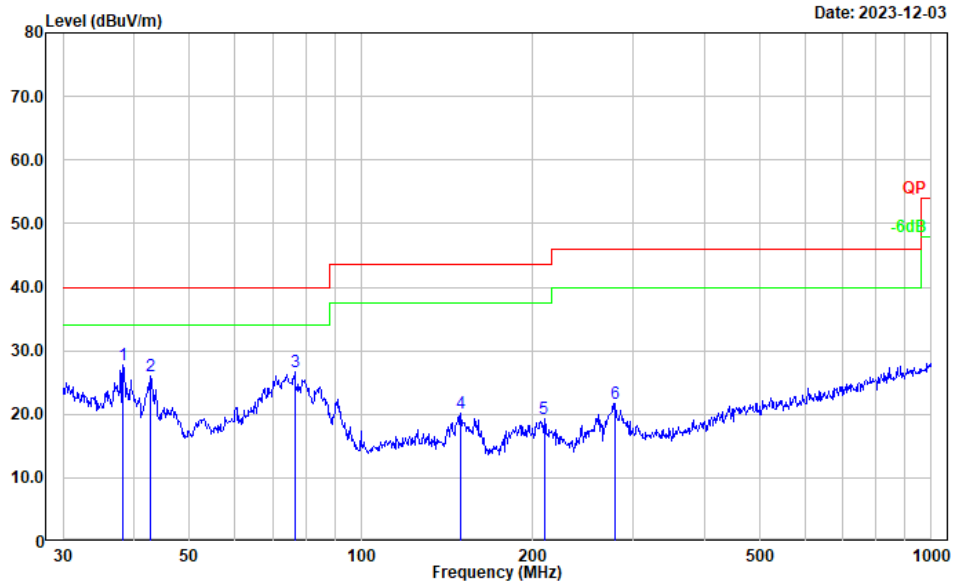

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	38.212	37.70	-10.02	27.68	40.00	12.32	Peak
2	42.600	38.93	-12.87	26.06	40.00	13.94	Peak
3	76.512	43.74	-17.13	26.61	40.00	13.39	Peak
4	149.486	32.11	-11.90	20.21	43.50	23.29	Peak
5	209.313	31.88	-12.48	19.40	43.50	24.10	Peak
6	279.044	33.37	-11.75	21.62	46.00	24.38	Peak

2) 1GHz-40GHz:**5150-5250MHz****802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5180	MHz		
5150.000	29.54	PK	H	11.67	41.21	74.00	32.79
5150.000	16.58	AV	H	11.67	28.25	54.00	25.75
5150.000	29.73	PK	V	11.67	41.40	74.00	32.60
5150.000	16.80	AV	V	11.67	28.47	54.00	25.53
10360.000	32.07	PK	H	20.47	52.54	68.20	15.66
10360.000	32.13	PK	V	20.47	52.60	68.20	15.60
15540.000	33.74	PK	H	24.62	58.36	74.00	15.64
15540.000	20.63	AV	H	24.62	45.25	54.00	8.75
15540.000	33.67	PK	V	24.62	58.29	74.00	15.71
15540.000	20.59	AV	V	24.62	45.21	54.00	8.79
Middle Channel:				5200	MHz		
10400.000	32.11	PK	H	20.54	52.65	68.20	15.55
10400.000	32.09	PK	V	20.54	52.63	68.20	15.57
15600.000	35.01	PK	H	24.71	59.72	74.00	14.28
15600.000	21.89	AV	H	24.71	46.60	54.00	7.40
15600.000	35.23	PK	V	24.71	59.94	74.00	14.06
15600.000	22.02	AV	V	24.71	46.73	54.00	7.27
High Channel:				5240	MHz		
5350.000	29.67	PK	H	11.94	41.61	74.00	32.39
5350.000	16.38	AV	H	11.94	28.32	54.00	25.68
5350.000	29.46	PK	V	11.94	41.40	74.00	32.60
5350.000	16.65	AV	V	11.94	28.59	54.00	25.41
10480.000	32.15	PK	H	20.42	52.57	68.20	15.63
10480.000	32.26	PK	V	20.42	52.68	68.20	15.52
15720.000	36.64	PK	H	24.82	61.46	74.00	12.54
15720.000	23.58	AV	H	24.82	48.40	54.00	5.60
15720.000	36.75	PK	V	24.82	61.57	74.00	12.43
15720.000	23.69	AV	V	24.82	48.51	54.00	5.49

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5180 MHz							
5150.000	27.18	PK	H	11.67	38.85	74.00	35.15
5150.000	16.89	AV	H	11.67	28.56	54.00	25.44
5150.000	27.43	PK	V	11.67	39.10	74.00	34.90
5150.000	16.95	AV	V	11.67	28.62	54.00	25.38
10360.000	31.86	PK	H	20.47	52.33	68.20	15.87
10360.000	31.95	PK	V	20.47	52.42	68.20	15.78
15540.000	33.64	PK	H	24.62	58.26	74.00	15.74
15540.000	20.23	AV	H	24.62	44.85	54.00	9.15
15540.000	33.58	PK	V	24.62	58.20	74.00	15.80
15540.000	20.41	AV	V	24.62	45.03	54.00	8.97
Middle Channel: 5200 MHz							
10400.000	31.97	PK	H	20.54	52.51	68.20	15.69
10400.000	31.88	PK	V	20.54	52.42	68.20	15.78
15600.000	35.24	PK	H	24.71	59.95	74.00	14.05
15600.000	23.27	AV	H	24.71	47.98	54.00	6.02
15600.000	35.64	PK	V	24.71	60.35	74.00	13.65
15600.000	22.57	AV	V	24.71	47.28	54.00	6.72
High Channel: 5240 MHz							
5350.000	26.97	PK	H	11.94	38.91	74.00	35.09
5350.000	16.52	AV	H	11.94	28.46	54.00	25.54
5350.000	27.05	PK	V	11.94	38.99	74.00	35.01
5350.000	16.73	AV	V	11.94	28.67	54.00	25.33
10480.000	32.02	PK	H	20.42	52.44	68.20	15.76
10480.000	32.11	PK	V	20.42	52.53	68.20	15.67
15720.000	35.67	PK	H	24.82	60.49	74.00	13.51
15720.000	22.58	AV	H	24.82	47.40	54.00	6.60
15720.000	35.67	PK	V	24.82	60.49	74.00	13.51
15720.000	22.78	AV	V	24.82	47.60	54.00	6.40

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel: 5190 MHz							
5150.000	30.76	PK	H	11.67	42.43	74.00	31.57
5150.000	16.82	AV	H	11.67	28.49	54.00	25.51
5150.000	30.99	PK	V	11.67	42.66	74.00	31.34
5150.000	16.98	AV	V	11.67	28.65	54.00	25.35
10380.000	32.08	PK	H	20.51	52.59	68.20	15.61
10380.000	32.15	PK	V	20.51	52.66	68.20	15.54
15570.000	33.45	PK	H	24.67	58.12	74.00	15.88
15570.000	20.53	AV	H	24.67	45.20	54.00	8.80
15570.000	33.78	PK	V	24.67	58.45	74.00	15.55
15570.000	20.61	AV	V	24.67	45.28	54.00	8.72
High Channel: 5230 MHz							
5350.000	29.64	PK	H	11.94	41.58	74.00	32.42
5350.000	16.54	AV	H	11.94	28.48	54.00	25.52
5350.000	29.84	PK	V	11.94	41.78	74.00	32.22
5350.000	16.75	AV	V	11.94	28.69	54.00	25.31
10460.000	32.08	PK	H	20.45	52.53	68.20	15.67
10460.000	32.16	PK	V	20.45	52.61	68.20	15.59
15690.000	36.87	PK	H	24.77	61.64	74.00	12.36
15690.000	23.54	AV	H	24.77	48.31	54.00	5.69
15690.000	37.01	PK	V	24.77	61.78	74.00	12.22
15690.000	23.74	AV	V	24.77	48.51	54.00	5.49

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5210	MHz		
5150.000	32.86	PK	H	11.67	44.53	74.00	29.47
5150.000	17.83	AV	H	11.67	29.50	54.00	24.50
5150.000	32.94	PK	V	11.67	44.61	74.00	29.39
5150.000	17.83	AV	V	11.67	29.50	54.00	24.50
5350.000	29.67	PK	H	11.94	41.61	74.00	32.39
5350.000	16.25	AV	H	11.94	28.19	54.00	25.81
5350.000	29.54	PK	V	11.94	41.48	74.00	32.52
5350.000	16.46	AV	V	11.94	28.40	54.00	25.60
10420.000	31.76	PK	H	20.51	52.27	68.20	15.93
10420.000	31.92	PK	V	20.51	52.43	68.20	15.77
15630.000	36.67	PK	H	24.73	61.40	74.00	12.60
15630.000	23.58	AV	H	24.73	48.31	54.00	5.69
15630.000	36.91	PK	V	24.73	61.64	74.00	12.36
15630.000	23.76	AV	V	24.73	48.49	54.00	5.51

5725-5850MHz**802.11a Mode:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	32.73	PK	H	21.49	54.22	74.00	19.78
11490.000	19.56	AV	H	21.49	41.05	54.00	12.95
11490.000	32.84	PK	V	21.49	54.33	74.00	19.67
11490.000	19.65	AV	V	21.49	41.14	54.00	12.86
17235.000	32.63	PK	H	28.71	61.34	68.20	6.86
17235.000	32.76	PK	V	28.71	61.47	68.20	6.73
Middle Channel:				5785	MHz		
11570.000	32.61	PK	H	21.71	54.32	74.00	19.68
11570.000	19.53	AV	H	21.71	41.24	54.00	12.76
11570.000	32.83	PK	V	21.71	54.54	74.00	19.46
11570.000	19.46	AV	V	21.71	41.17	54.00	12.83
17355.000	31.53	PK	H	29.35	60.88	68.20	7.32
17355.000	31.76	PK	V	29.35	61.11	68.20	7.09
High Channel:				5825	MHz		
11650.000	32.53	PK	H	22.04	54.57	74.00	19.43
11650.000	19.57	AV	H	22.04	41.61	54.00	12.39
11650.000	32.67	PK	V	22.04	54.71	74.00	19.29
11650.000	19.49	AV	V	22.04	41.53	54.00	12.47
17475.000	32.36	PK	H	29.89	62.25	68.20	5.95
17475.000	32.78	PK	V	29.89	62.67	68.20	5.53

802.11n ht20 Mode:


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5745	MHz		
11490.000	32.91	PK	H	21.49	54.40	74.00	19.60
11490.000	19.57	AV	H	21.49	41.06	54.00	12.94
11490.000	33.02	PK	V	21.49	54.51	74.00	19.49
11490.000	19.87	AV	V	21.49	41.36	54.00	12.64
17235.000	32.36	PK	H	28.71	61.07	68.20	7.13
17235.000	32.39	PK	V	28.71	61.10	68.20	7.10
Middle Channel:				5785	MHz		
11570.000	32.81	PK	H	21.71	54.52	74.00	19.48
11570.000	19.60	AV	H	21.71	41.31	54.00	12.69
11570.000	32.93	PK	V	21.71	54.64	74.00	19.36
11570.000	19.87	AV	V	21.71	41.58	54.00	12.42
17355.000	32.64	PK	H	29.35	61.99	68.20	6.21
17355.000	32.73	PK	V	29.35	62.08	68.20	6.12
High Channel:				5825	MHz		
11650.000	31.86	PK	H	22.04	53.90	74.00	20.10
11650.000	20.03	AV	H	22.04	42.07	54.00	11.93
11650.000	31.87	PK	V	22.04	53.91	74.00	20.09
11650.000	20.10	AV	V	22.04	42.14	54.00	11.86
17475.000	33.19	PK	H	29.89	63.08	68.20	5.12
17475.000	33.42	PK	V	29.89	63.31	68.20	4.89

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Low Channel:				5755	MHz		
11510.000	32.39	PK	H	21.48	53.87	74.00	20.13
11510.000	19.53	AV	H	21.48	41.01	54.00	12.99
11510.000	32.61	PK	V	21.48	54.09	74.00	19.91
11510.000	19.50	AV	V	21.48	40.98	54.00	13.02
17265.000	33.15	PK	H	28.79	61.94	68.20	6.26
17265.000	33.09	PK	V	28.79	61.88	68.20	6.32
High Channel:				5795	MHz		
11590.000	32.41	PK	H	21.78	54.19	74.00	19.81
11590.000	19.38	AV	H	21.78	41.16	54.00	12.84
11590.000	32.56	PK	V	21.78	54.34	74.00	19.66
11590.000	19.61	AV	V	21.78	41.39	54.00	12.61
17385.000	32.69	PK	H	29.59	62.28	68.20	5.92
17385.000	32.73	PK	V	29.59	62.32	68.20	5.88

802.11ac vht80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector					
Middle Channel:				5775	MHz		
11550.000	32.23	PK	H	21.63	53.86	74.00	20.14
11550.000	19.51	AV	H	21.63	41.14	54.00	12.86
11550.000	32.67	PK	V	21.63	54.30	74.00	19.70
11550.000	19.69	AV	V	21.63	41.32	54.00	12.68
17325.000	32.64	PK	H	29.11	61.75	68.20	6.45
17325.000	32.73	PK	V	29.11	61.84	68.20	6.36

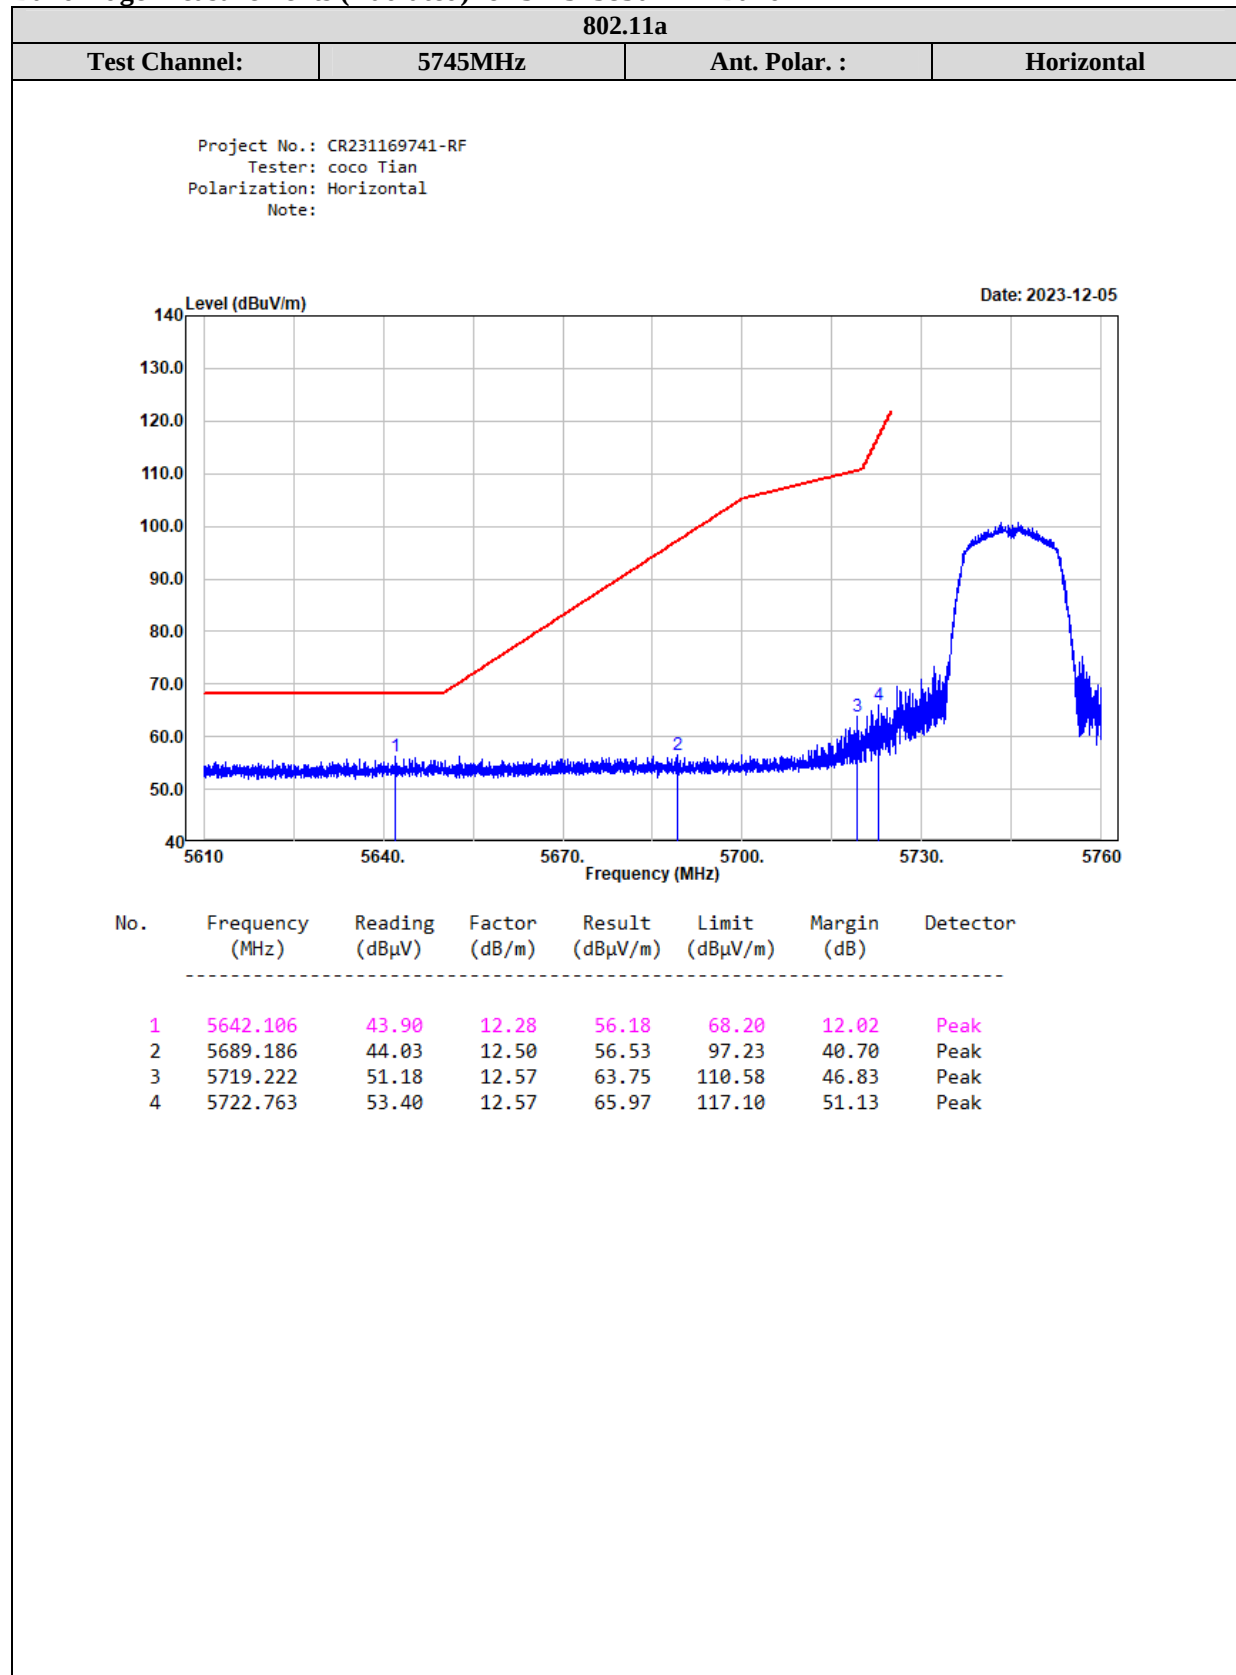Band Edge Measurements (Radiated) for 5725~5850MHz Band

802.11 a


Test Channel:

5745MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

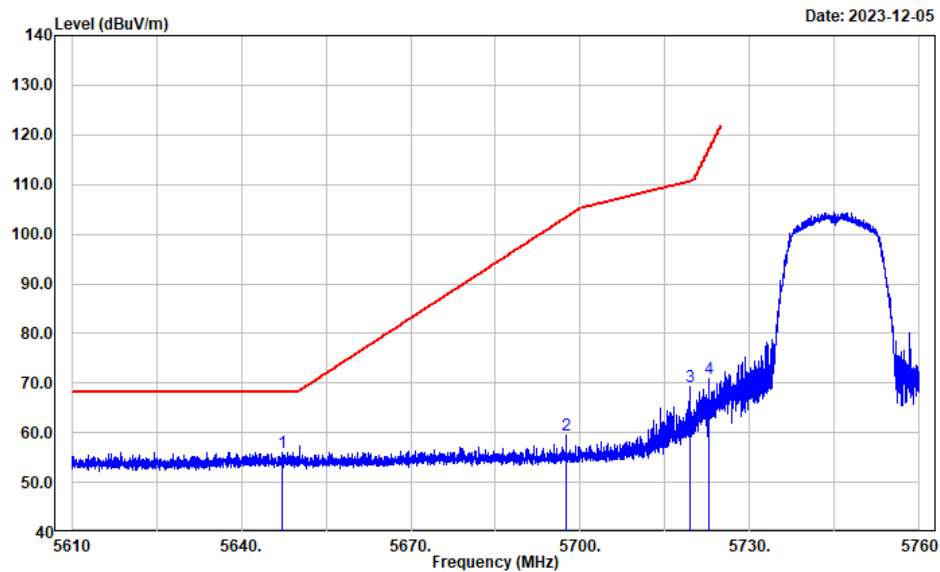

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5647.237	43.79	12.32	56.11	68.20	12.09	Peak
2	5697.527	46.85	12.54	59.39	103.38	43.99	Peak
3	5719.462	56.64	12.57	69.21	110.65	41.44	Peak
4	5722.823	58.40	12.57	70.97	117.24	46.27	Peak

802.11a

Test Channel:

5825MHz

Ant. Polar. :


Horizontal

Project No.: CR231169741-RF

Tester: coco Tian

Polarization: Horizontal

Note:

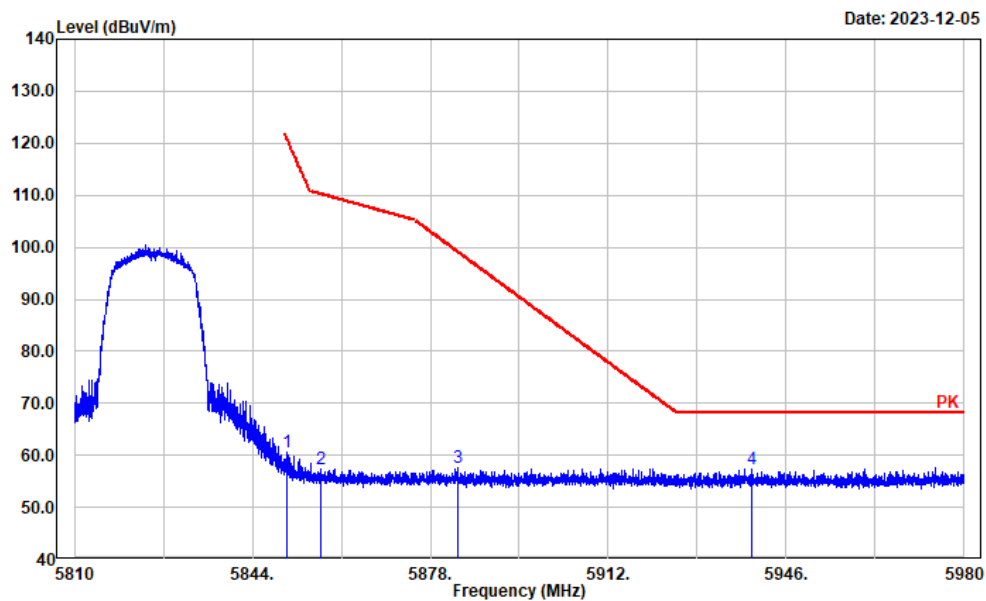

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5850.570	47.79	12.77	60.56	120.90	60.34	Peak
2	5857.202	44.60	12.81	57.41	110.18	52.77	Peak
3	5883.217	44.64	12.93	57.57	99.10	41.53	Peak
4	5939.532	44.28	13.03	57.31	68.20	10.89	Peak

802.11 a

Test Channel:


5825MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Vertical
Note:

Date: 2023-12-05

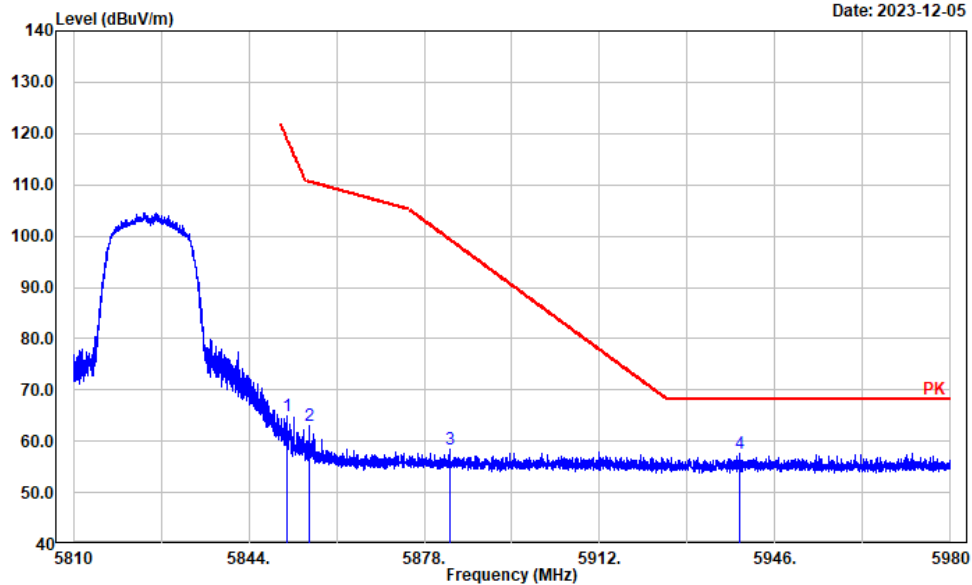

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.284	52.25	12.78	65.03	119.27	54.24	Peak
2	5855.705	50.14	12.80	62.94	110.60	47.66	Peak
3	5882.876	45.42	12.93	58.35	99.35	41.00	Peak
4	5939.192	44.61	13.03	57.64	68.20	10.56	Peak

802.11n ht20

Test Channel:


5745MHz

Ant. Polar. :

Horizontal

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-12-05

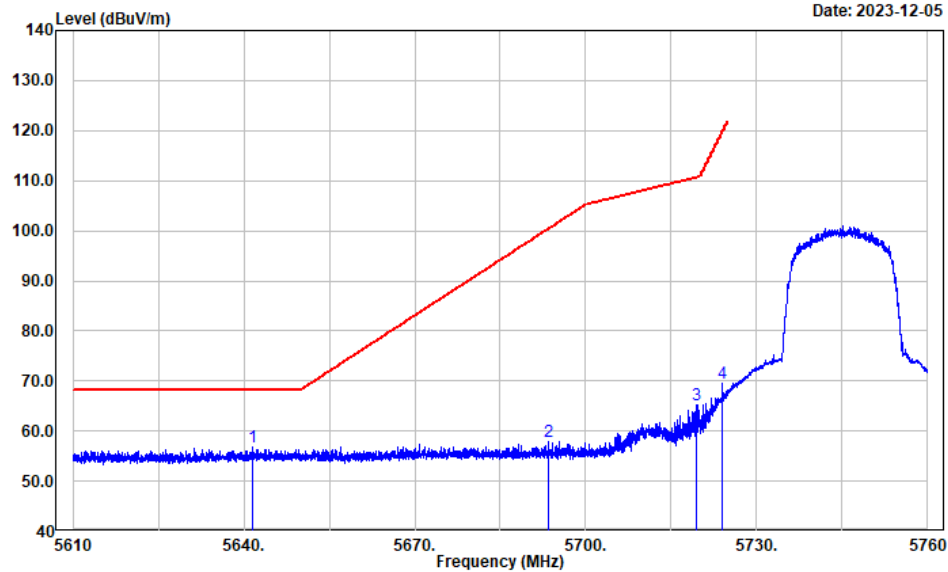

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5641.536	44.51	12.28	56.79	68.20	11.41	Peak
2	5693.477	45.32	12.52	57.84	100.39	42.55	Peak
3	5719.372	52.63	12.57	65.20	110.62	45.42	Peak
4	5724.053	57.06	12.57	69.63	120.04	50.41	Peak

802.11n ht20

Test Channel:


5745MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

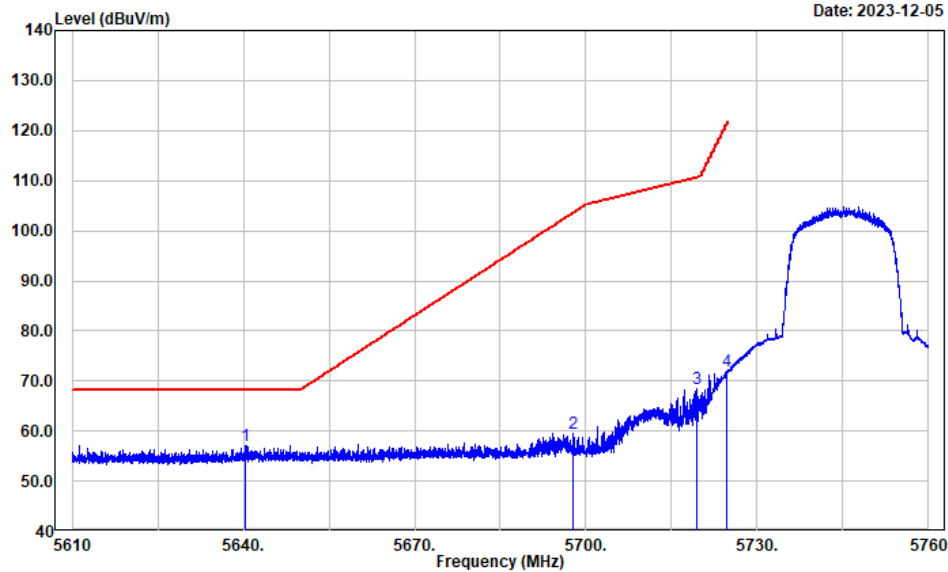

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5640.426	44.86	12.27	57.13	68.20	11.07	Peak
2	5697.678	47.11	12.54	59.65	103.49	43.84	Peak
3	5719.372	55.82	12.57	68.39	110.62	42.23	Peak
4	5724.773	59.31	12.57	71.88	121.68	49.80	Peak

802.11n ht20

Test Channel:

5825MHz

Ant. Polar. :


Horizontal

Project No.: CR231169741-RF

Tester: coco Tian

Polarization: Horizontal

Note:

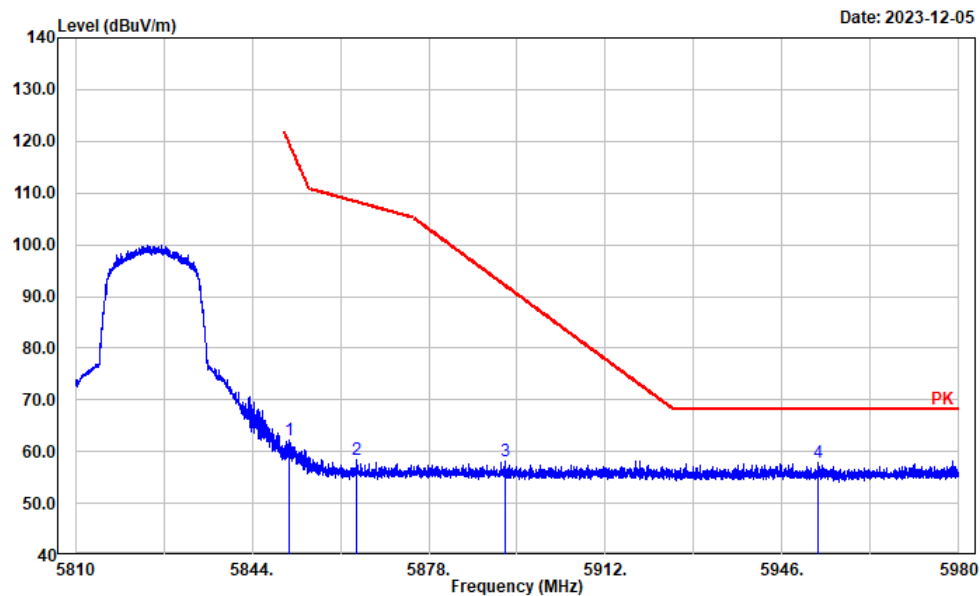

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5851.148	49.33	12.77	62.10	119.58	57.48	Peak
2	5864.207	45.72	12.84	58.56	108.22	49.66	Peak
3	5892.772	45.14	12.98	58.12	92.01	33.89	Peak
4	5953.033	44.90	13.05	57.95	68.20	10.25	Peak

802.11n ht20

Test Channel:


5825MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

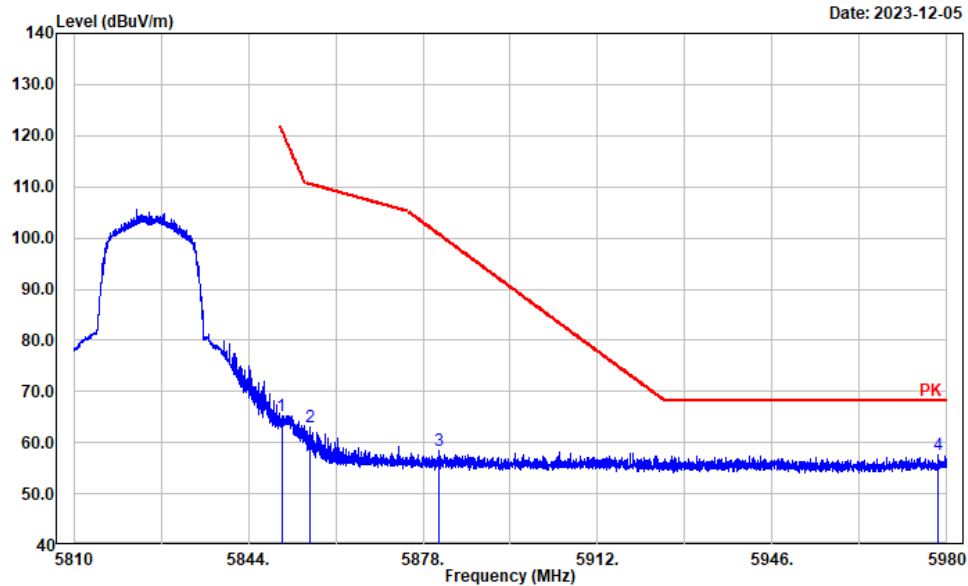

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.468	52.56	12.77	65.33	121.13	55.80	Peak
2	5856.011	50.18	12.80	62.98	110.52	47.54	Peak
3	5881.108	45.51	12.92	58.43	100.66	42.23	Peak
4	5978.198	44.50	13.16	57.66	68.20	10.54	Peak

802.11n ht40

Test Channel:

5755MHz

Ant. Polar. :


Horizontal

Project No.: CR231169741-RF

Tester: coco Tian

Polarization: Horizontal

Note:

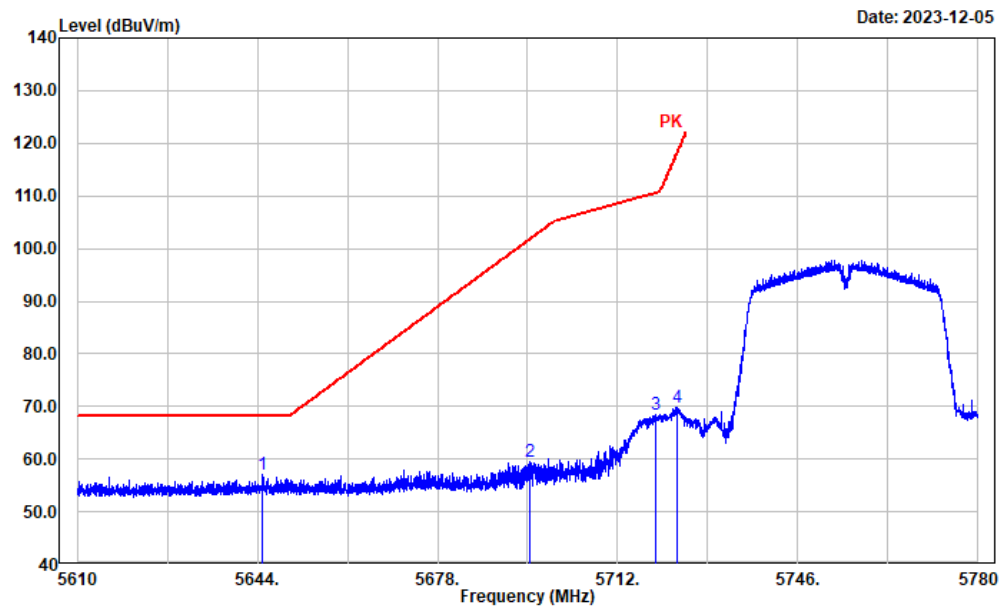

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5644.993	44.84	12.29	57.13	68.20	11.07	Peak
2	5695.425	46.95	12.53	59.48	101.83	42.35	Peak
3	5719.196	55.84	12.57	68.41	110.58	42.17	Peak
4	5723.175	57.30	12.57	69.87	118.04	48.17	Peak

802.11 n 40

Test Channel:


5755MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

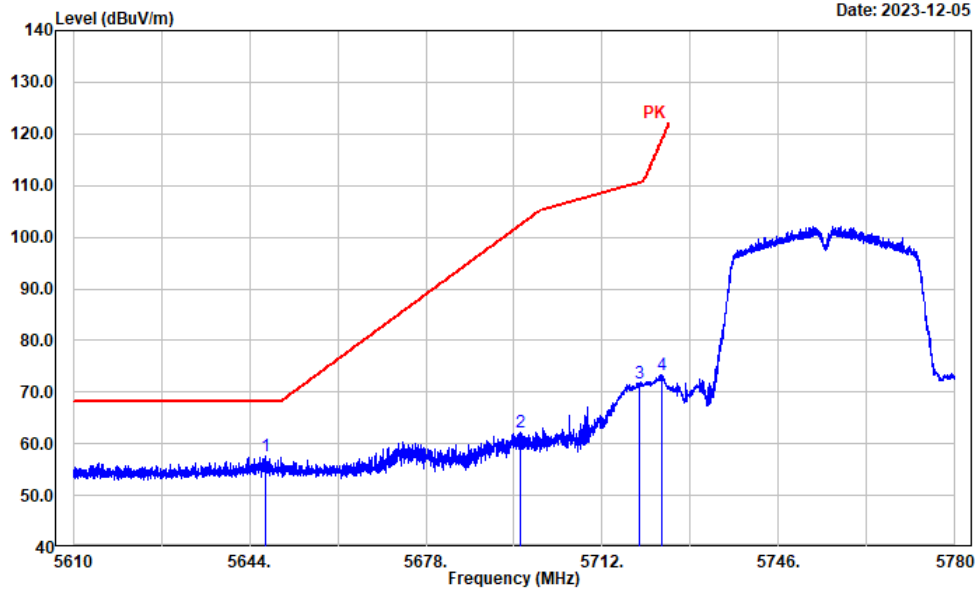

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5647.204	45.43	12.32	57.75	68.20	10.45	Peak
2	5696.343	49.82	12.53	62.35	102.51	40.16	Peak
3	5719.094	59.23	12.57	71.80	110.55	38.75	Peak
4	5723.583	60.84	12.57	73.41	118.97	45.56	Peak

802.11n ht40

Test Channel:


5795MHz

Ant. Polar. :

Horizontal

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-12-05

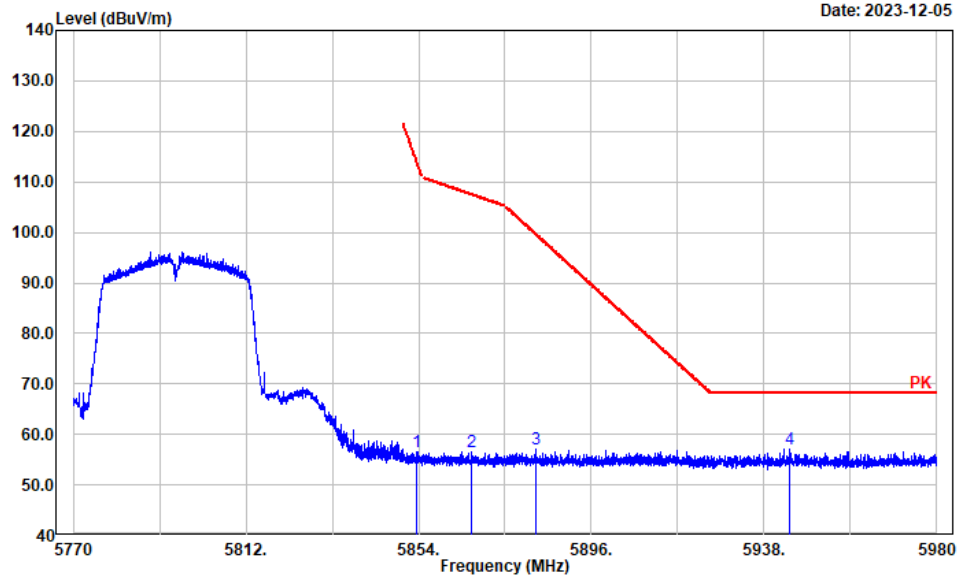

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5853.387	43.84	12.79	56.63	114.48	57.85	Peak
2	5866.914	43.66	12.86	56.52	107.46	50.94	Peak
3	5882.499	44.11	12.93	57.04	99.63	42.59	Peak
4	5944.209	43.97	13.03	57.00	68.20	11.20	Peak

802.11n ht40

Test Channel:


5795MHz

Ant. Polar. :

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

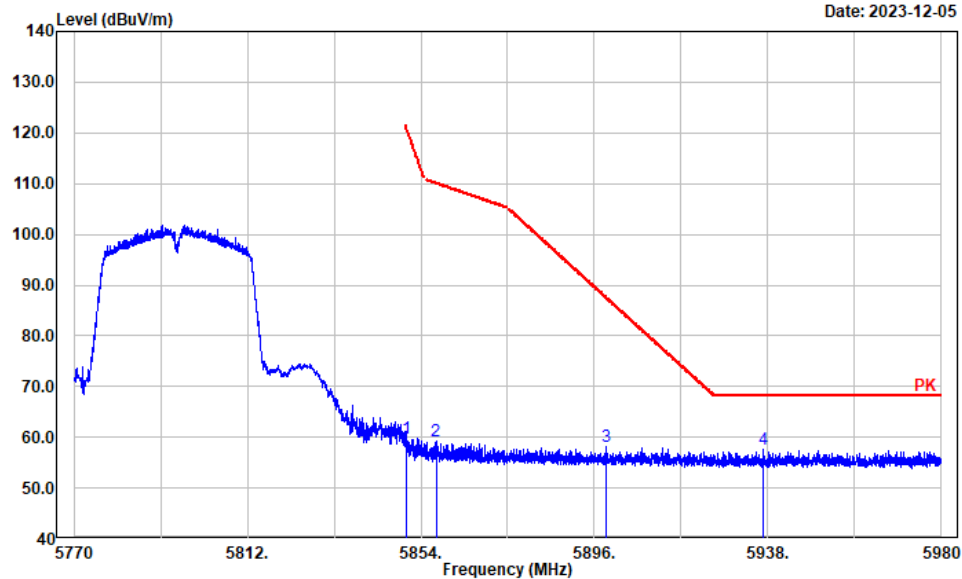

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5850.614	47.14	12.77	59.91	120.80	60.89	Peak
2	5857.671	46.46	12.81	59.27	110.05	50.78	Peak
3	5898.840	45.07	13.02	58.09	87.52	29.43	Peak
4	5936.773	44.58	13.03	57.61	68.20	10.59	Peak

802.11ac vht80

Test Channel:


5755MHz

Ant. Polar. :

Horizontal

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-12-05

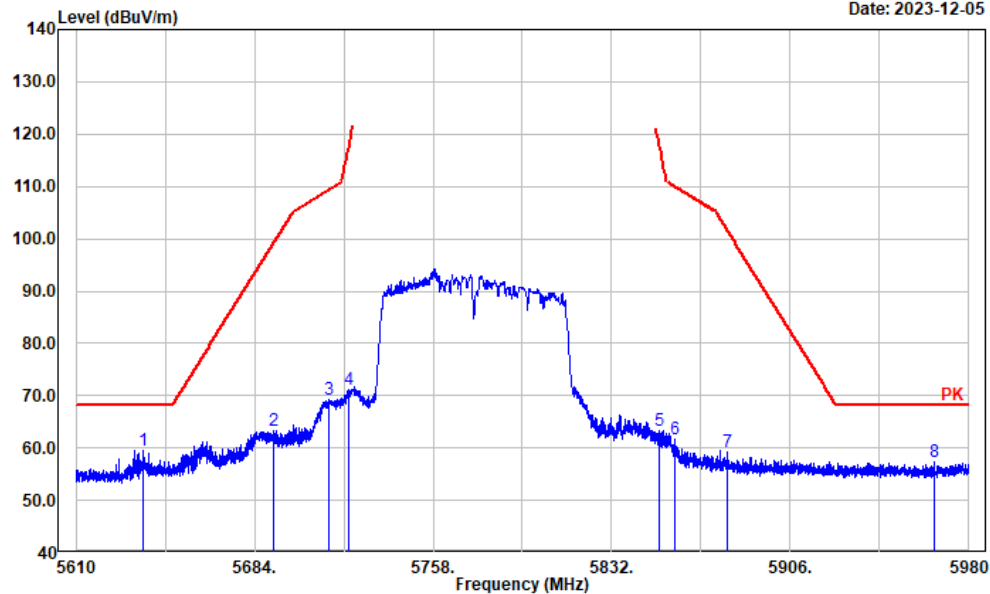

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5637.755	47.27	12.26	59.53	68.20	8.67	Peak
2	5691.786	50.76	12.52	63.28	99.14	35.86	Peak
3	5714.805	56.64	12.56	69.20	109.35	40.15	Peak
4	5723.168	58.53	12.57	71.10	118.03	46.93	Peak
5	5851.880	50.49	12.78	63.27	117.91	54.64	Peak
6	5858.098	48.96	12.81	61.77	109.93	48.16	Peak
7	5879.636	46.19	12.92	59.11	101.76	42.65	Peak
8	5965.493	44.33	13.09	57.42	68.20	10.78	Peak

802.11ac vht80

Test Channel:


5775MHz

Ant. Polar. :


Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

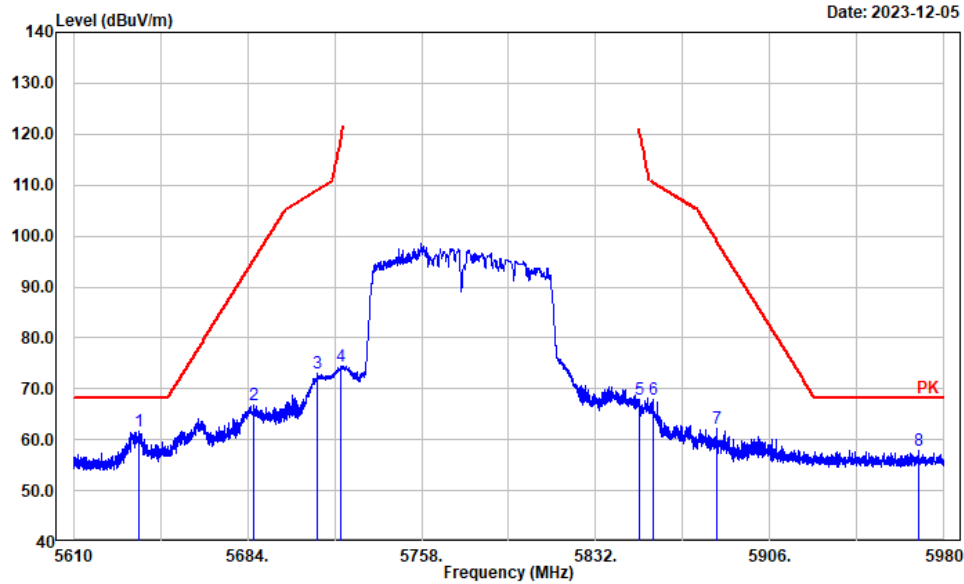


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	5638.125	49.34	12.26	61.60	68.20	6.60	Peak
2	5686.605	54.29	12.49	66.78	95.32	28.54	Peak
3	5713.547	60.45	12.56	73.01	109.00	35.99	Peak
4	5723.465	61.73	12.57	74.30	118.70	44.40	Peak
5	5850.474	55.12	12.77	67.89	121.12	53.23	Peak
6	5856.321	55.14	12.81	67.95	110.43	42.48	Peak
7	5883.188	49.29	12.93	62.22	99.12	36.90	Peak
8	5968.972	44.74	13.11	57.85	68.20	10.35	Peak

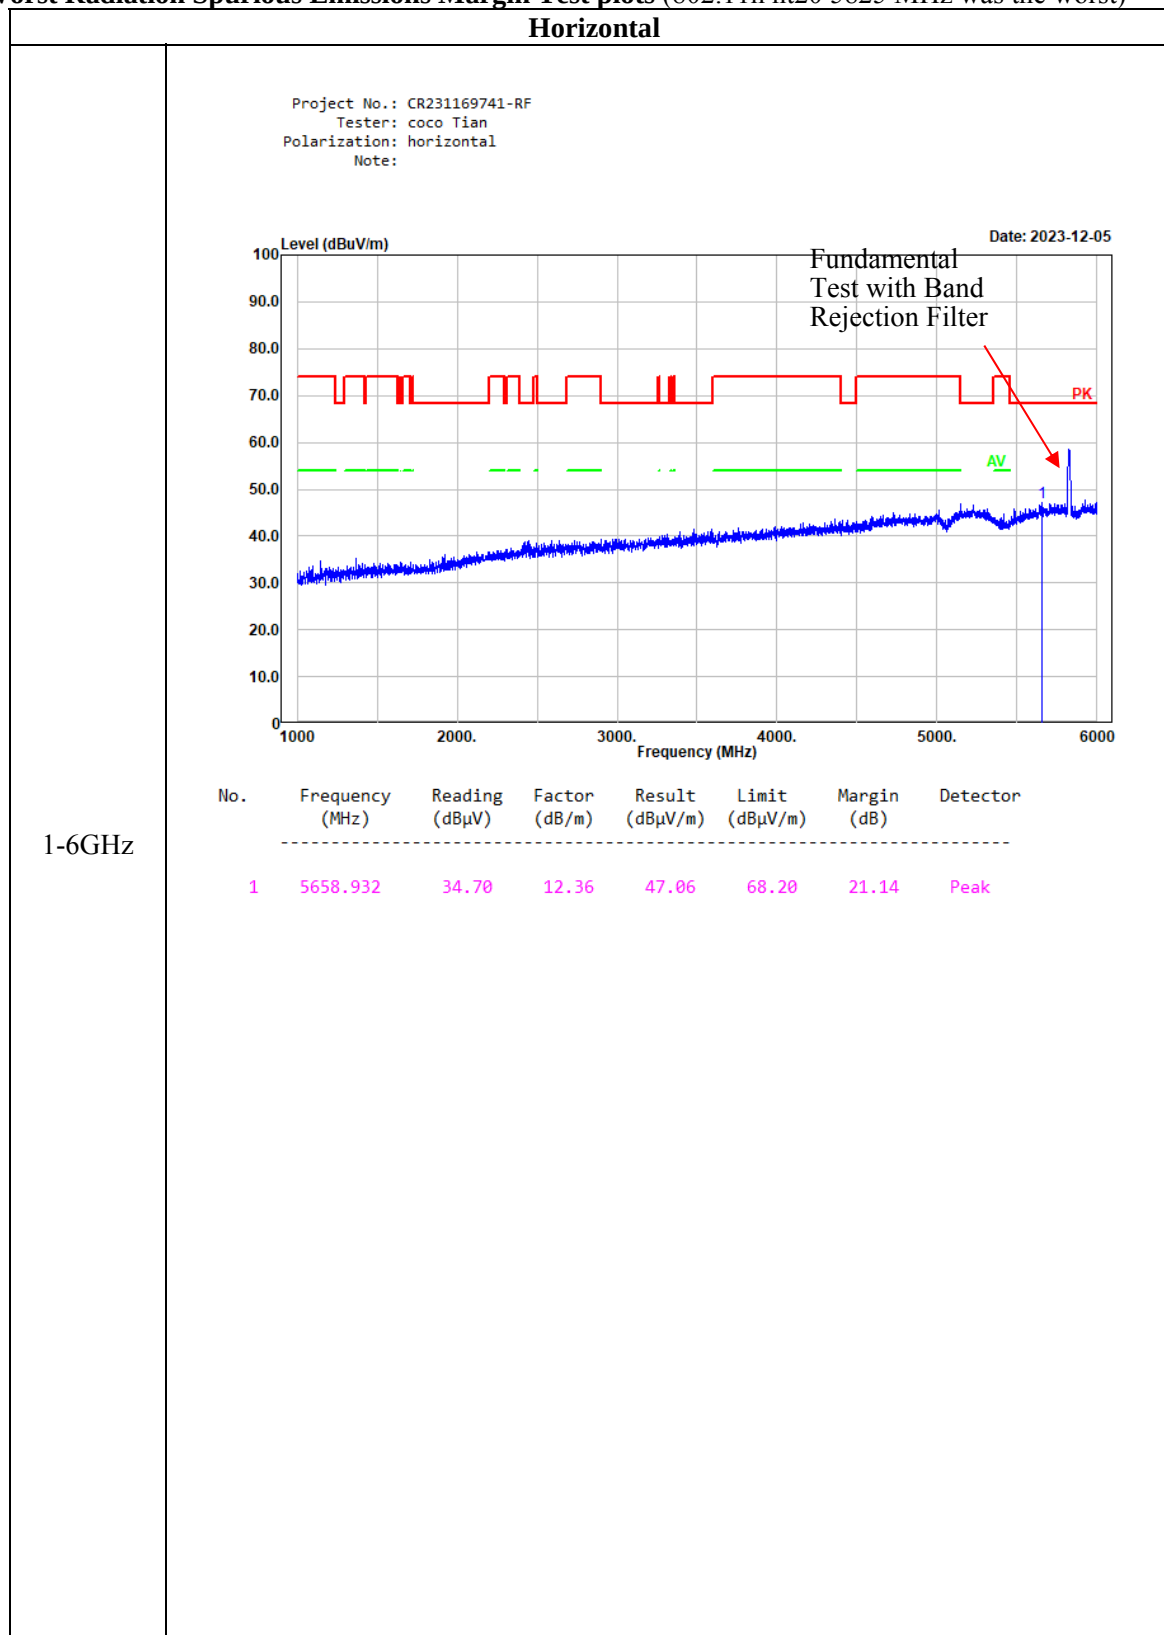Worst Radiation Spurious Emissions Margin Test plots (802.11n ht20 5825 MHz was the worst)

Horizontal

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: horizontal
Note:

Date: 2023-12-05

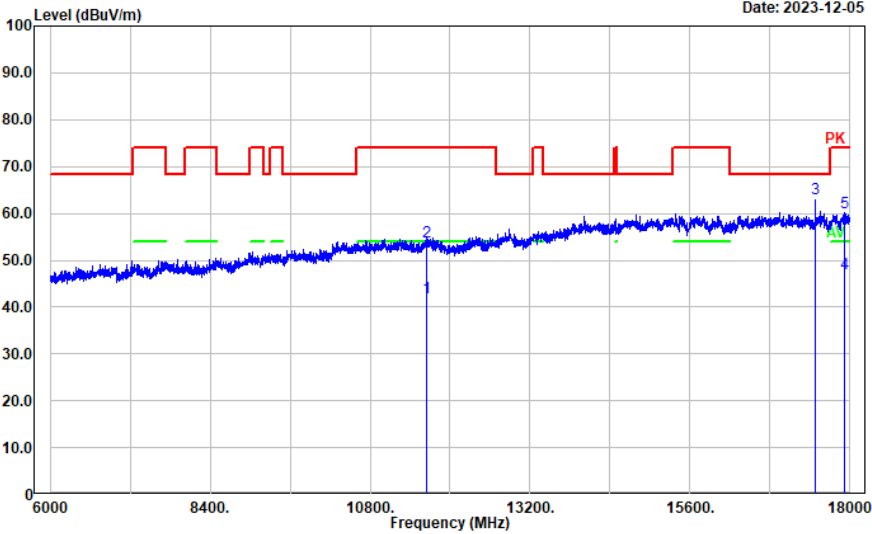


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	20.03	22.04	42.07	54.00	11.93	Average
2	11650.000	31.86	22.04	53.90	74.00	20.10	Peak
3	17475.000	33.19	29.89	63.08	68.20	5.12	Peak
4	17911.180	15.01	32.22	47.23	54.00	6.77	Average
5	17911.180	27.89	32.22	60.11	74.00	13.89	Peak

Horizontal

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-12-05

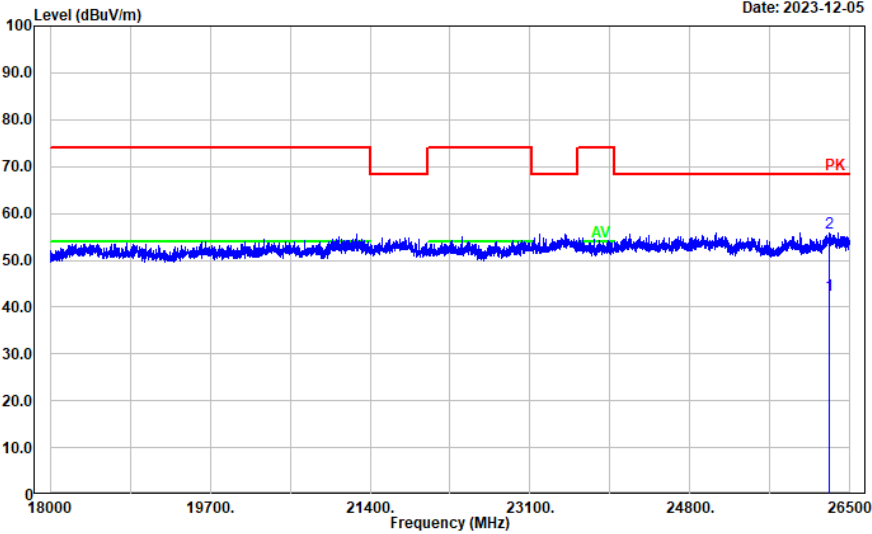


18-26.5GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	26280.660	35.57	6.98	42.55	-----	-----	Average
2	26280.660	48.95	6.98	55.93	68.20	12.27	Peak

Horizontal


Project No.: CR231169741-RF
Tester: coco Tian
Polarization: Horizontal
Note:

Date: 2023-12-05

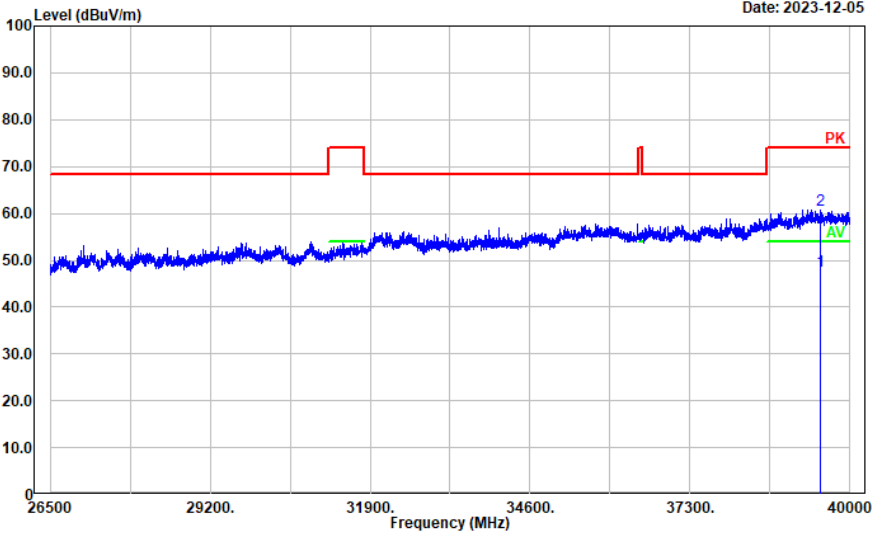


26.5-40GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39500.400	37.59	10.17	47.76	54.00	6.24	Average
2	39500.400	50.61	10.17	60.78	74.00	13.22	Peak

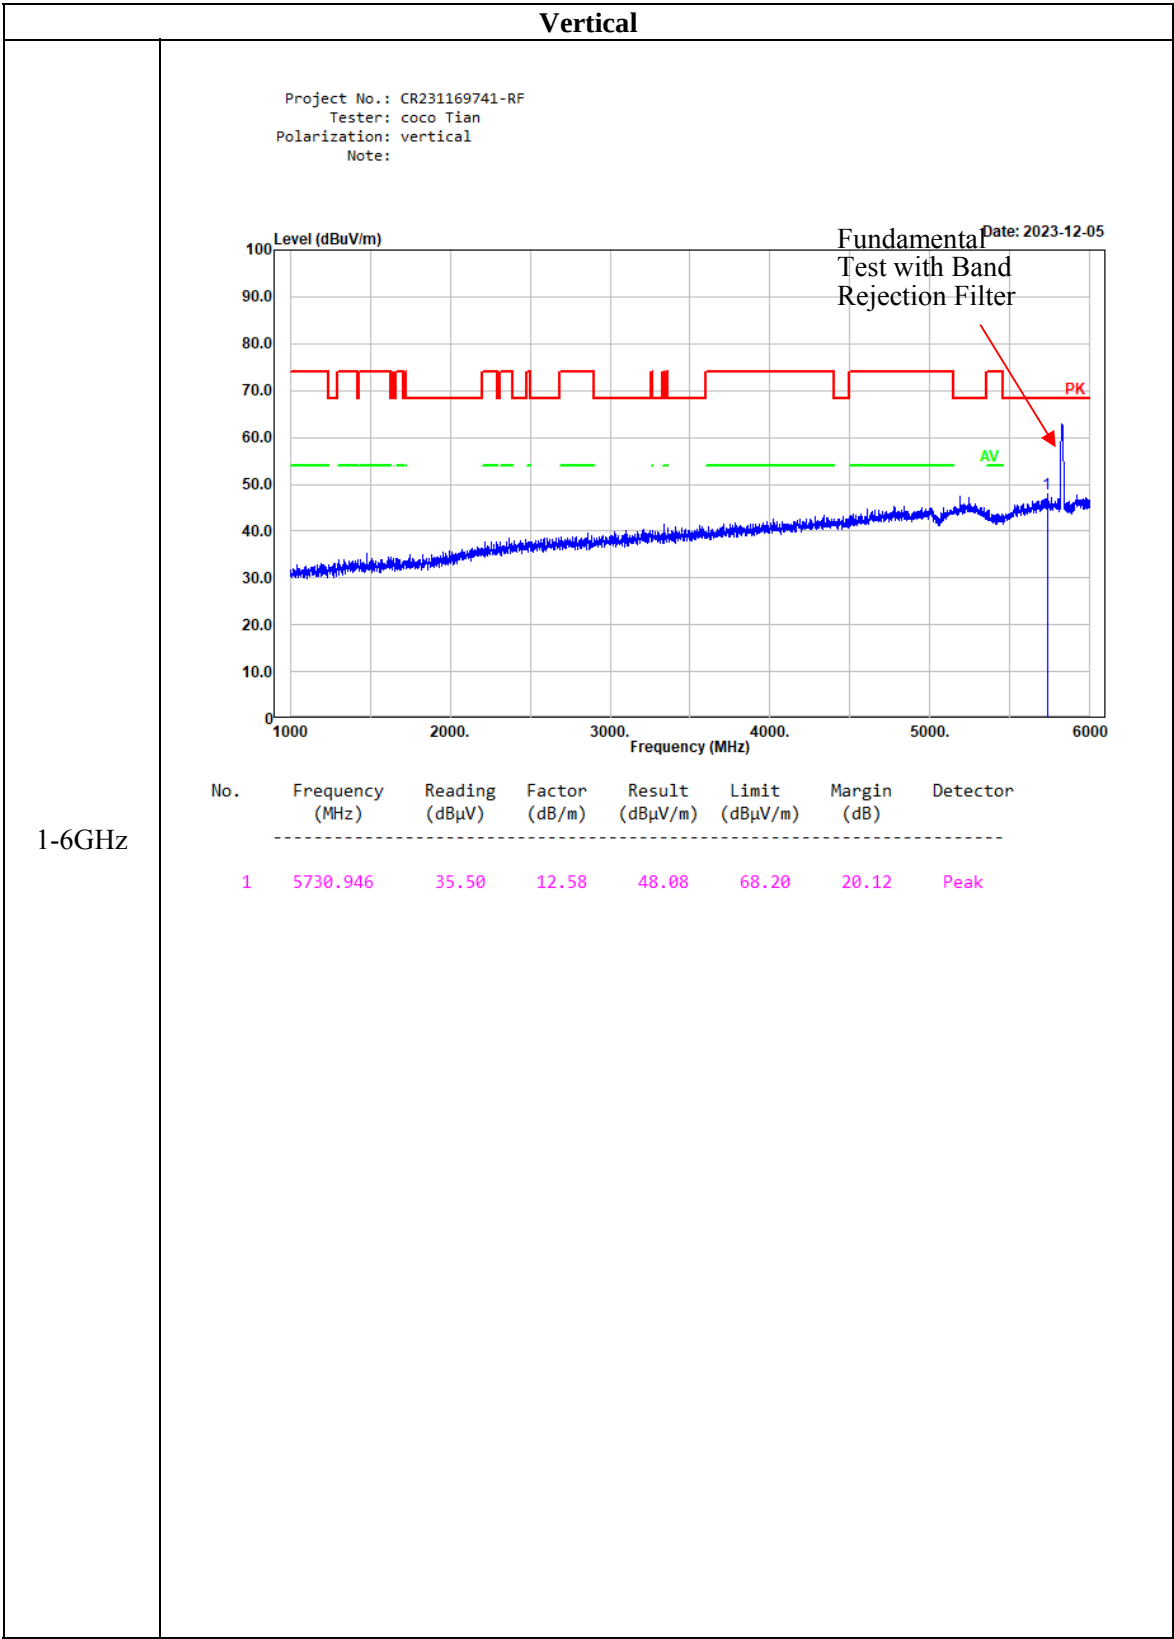

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

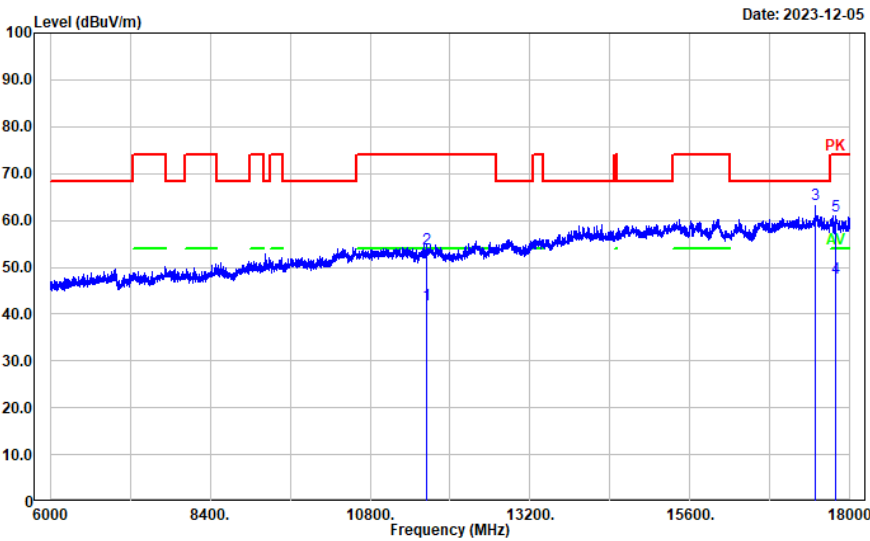


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	11650.000	20.10	22.04	42.14	54.00	11.86	Average
2	11650.000	31.87	22.04	53.91	74.00	20.09	Peak
3	17475.000	33.42	29.89	63.31	68.20	4.89	Peak
4	17781.560	16.07	31.55	47.62	54.00	6.38	Average
5	17781.560	29.40	31.55	60.95	74.00	13.05	Peak

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

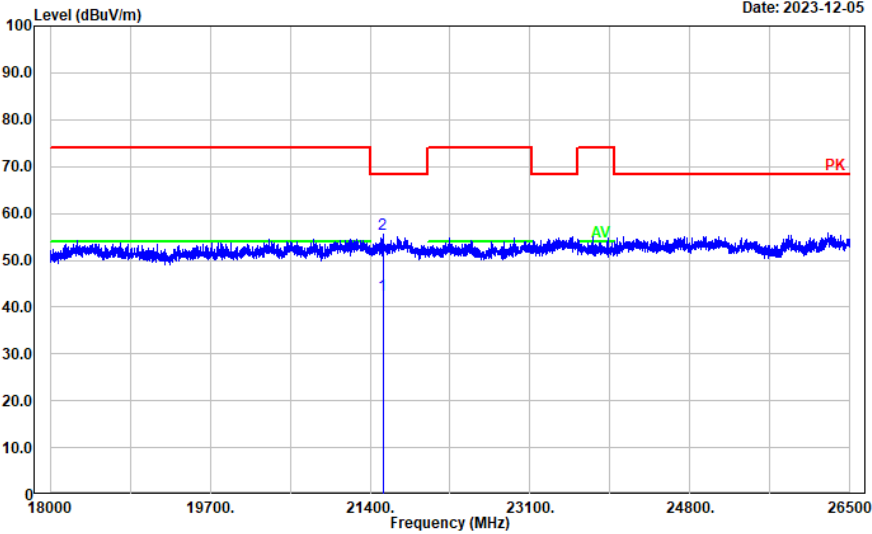


18-26.5GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	21535.010	38.05	4.48	42.53	-----	-----	Average
2	21535.010	50.98	4.48	55.46	68.20	12.74	Peak

Vertical

Project No.: CR231169741-RF
Tester: coco Tian
Polarization: vertical
Note:

Date: 2023-12-05

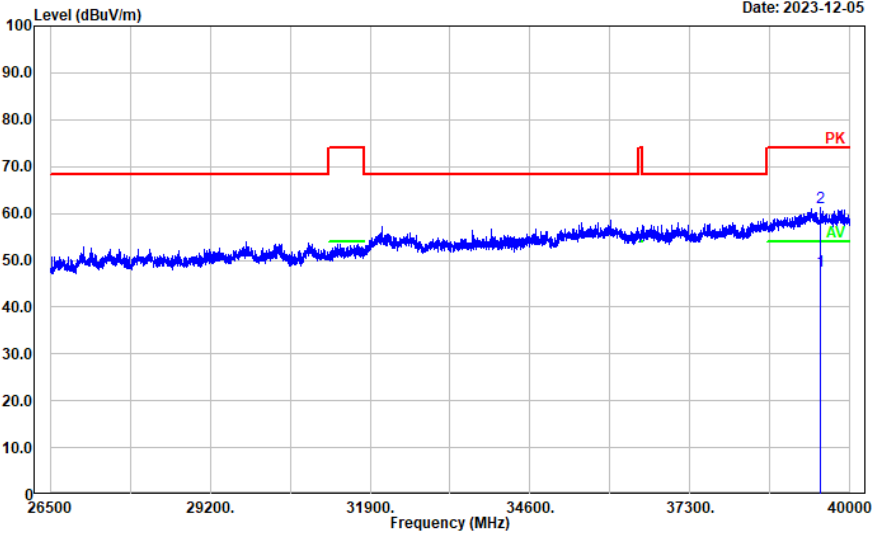

26.5-40GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	39495.000	37.51	10.17	47.68	54.00	6.32	Average
2	39495.000	51.03	10.17	61.20	74.00	12.80	Peak

4.3 Emission Bandwidth

Serial Number:	2E5M-1	Test Date:	2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**5150~5250MHz:**

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	20.32	16.80
	5200	20.40	16.88
	5240	20.32	16.80
802.11n ht20	5180	20.64	17.84
	5200	20.72	17.76
	5240	20.64	17.76
802.11n ht40	5190	40.64	36.32
	5230	40.32	36.16
802.11ac vht80	5210	81.60	75.52

Note:

The 99% Occupied Bandwidth have not fall into the band 5250-5350MHz, please refer to the test plots of 99% Occupied Bandwidth

5725~5850MHz:




Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.40	16.88
	5785	16.40	16.88
	5825	16.40	16.80
802.11n ht20	5745	17.44	17.84
	5785	17.68	17.84
	5825	17.52	17.76
802.11n ht40	5755	36.16	36.32
	5795	36.32	36.32
802.11ac vht80	5775	76.48	75.52

Note:




1. 6dB Emission Bandwidth Limit: ≥ 0.5 MHz
2. the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

5150-5250MHz:




26dB Emission Bandwidth

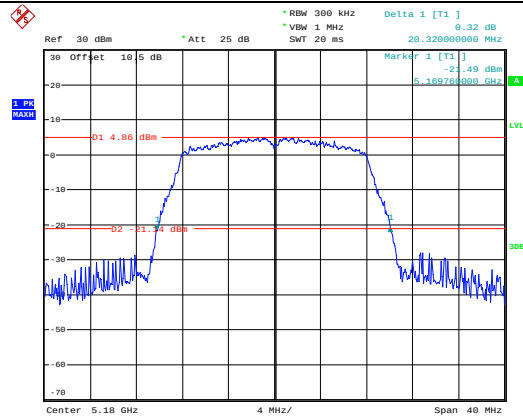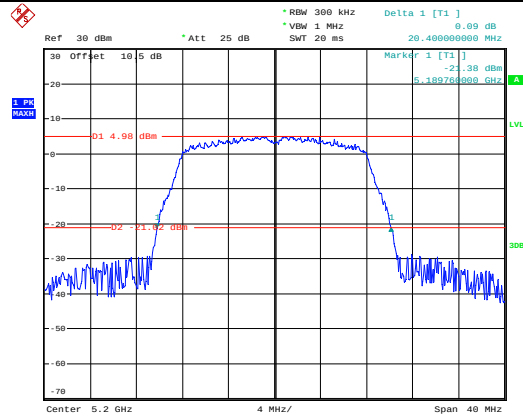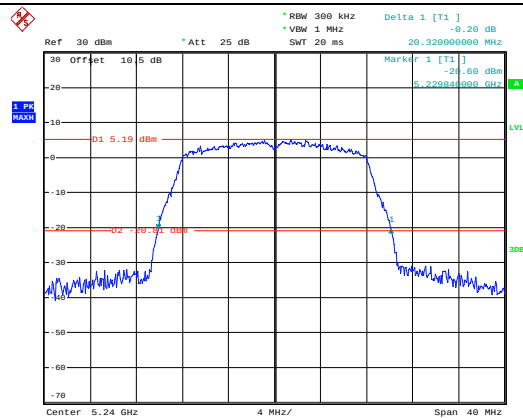802.11a
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:39:24802.11a
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:41:50802.11a
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:45:36




26dB Emission Bandwidth

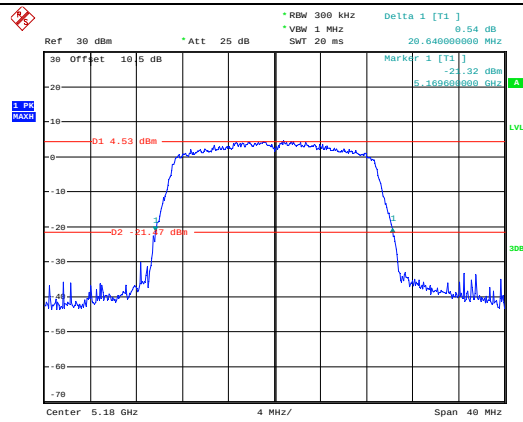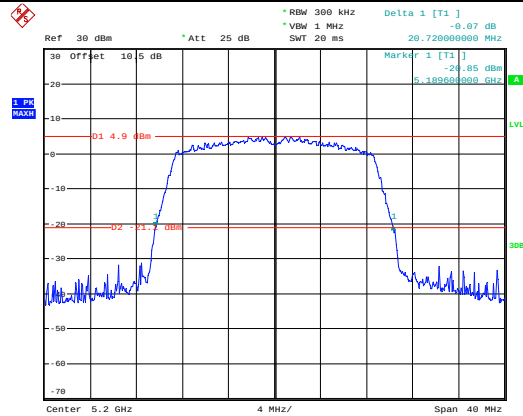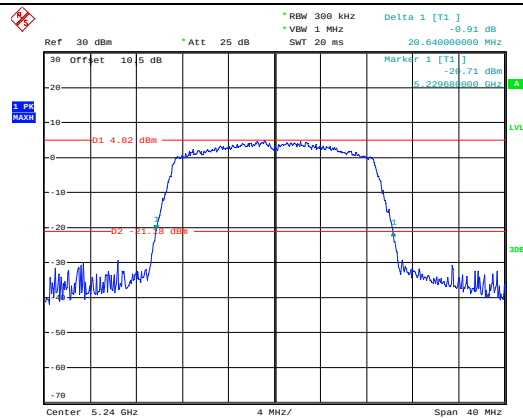802.11n ht20
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:48:28802.11n ht20
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:49:59802.11n ht20
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:51:30


99% Emission Bandwidth

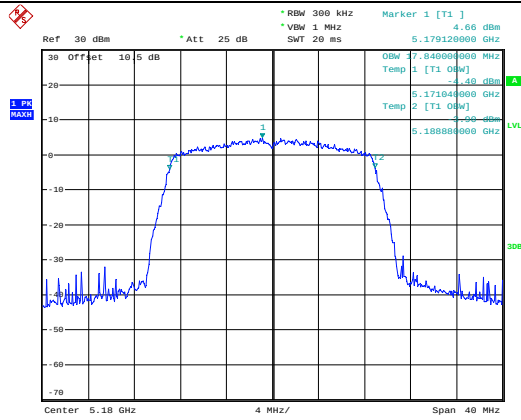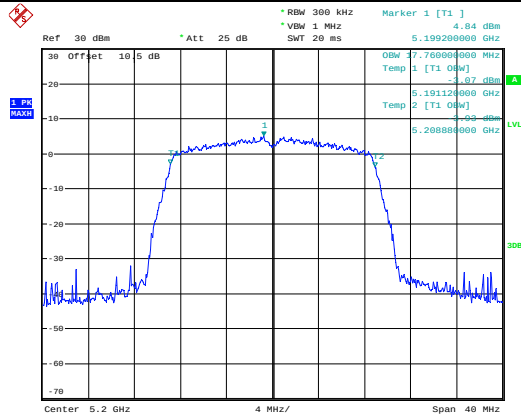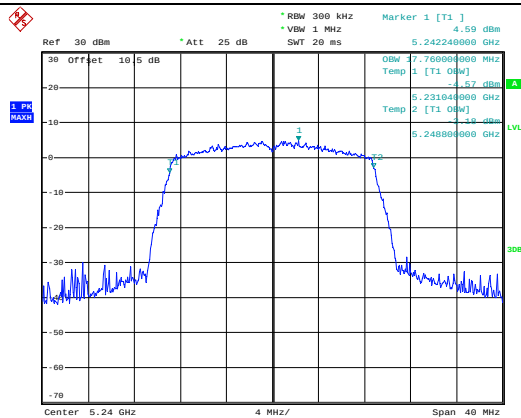802.11n ht20
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:48:45802.11n ht20
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:50:12802.11n ht20
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:51:47




99% Emission Bandwidth

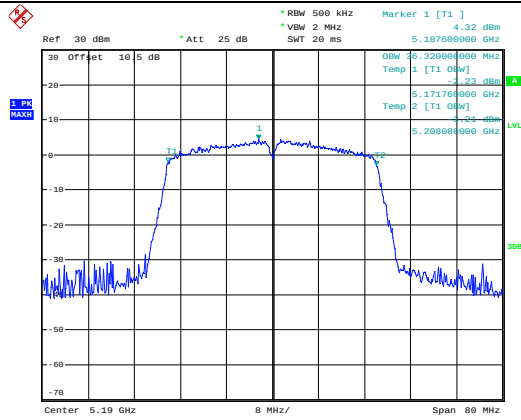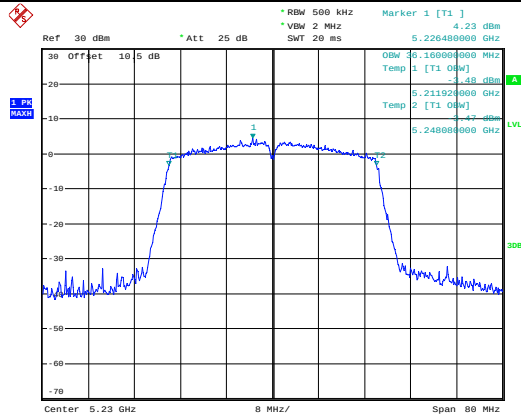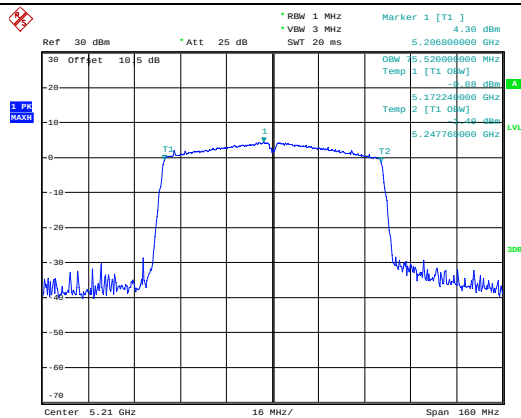802.11n ht40
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:53:52802.11n ht40
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:55:22802.11ac vht80
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:59:38




5725-5850MHz:

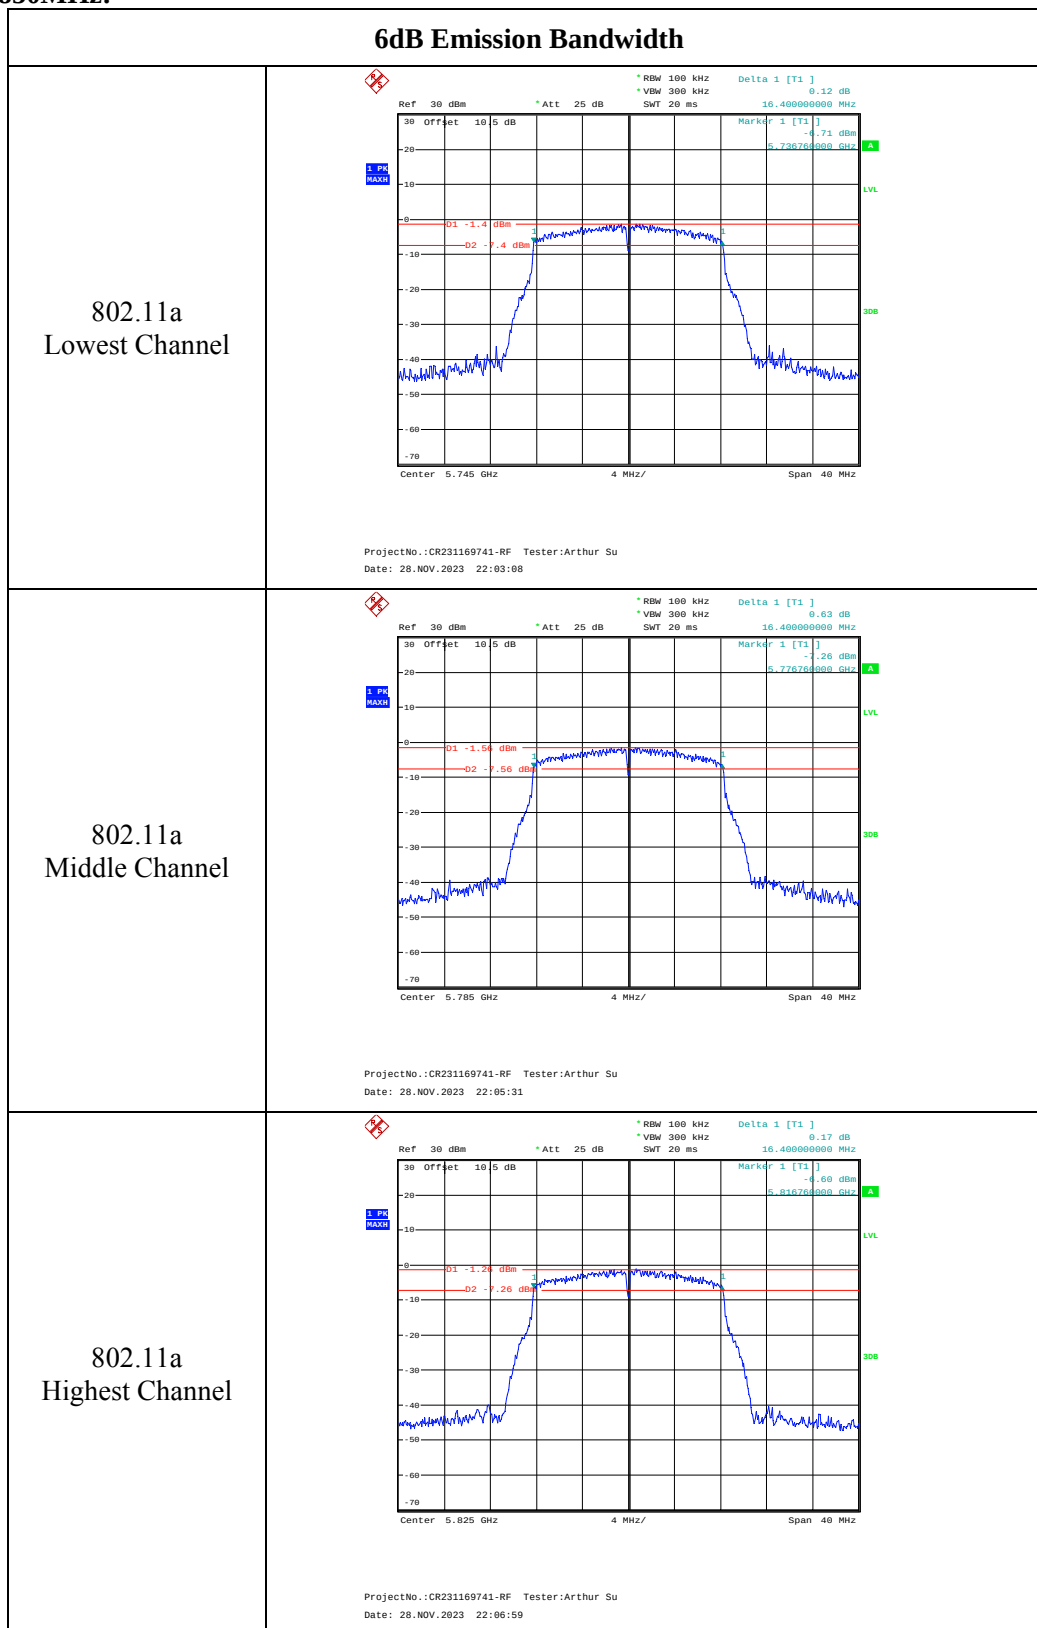




6dB Emission Bandwidth

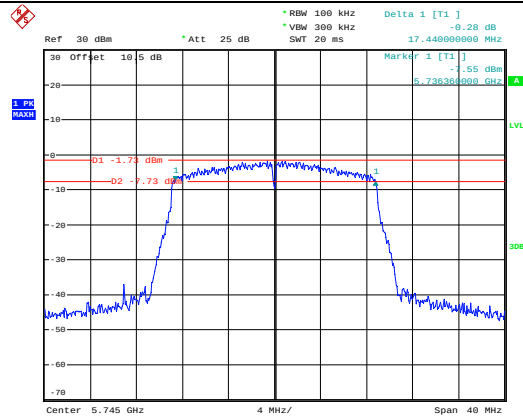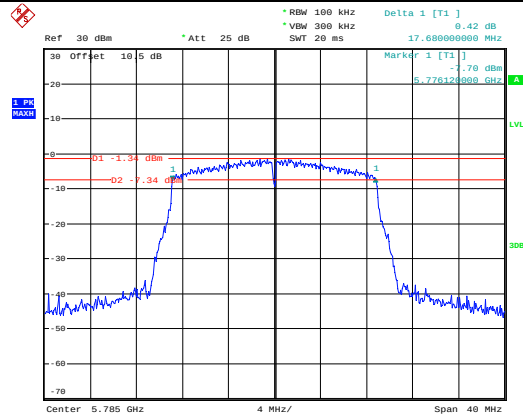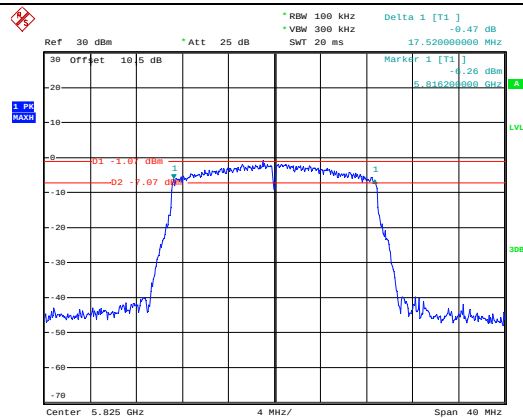802.11n ht20
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:10:47802.11n ht20
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:15:09802.11n ht20
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:16:36




6dB Emission Bandwidth

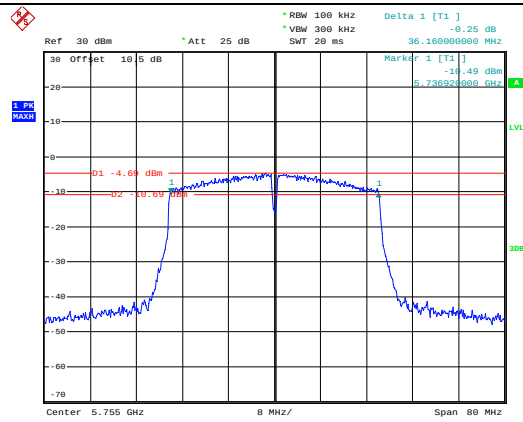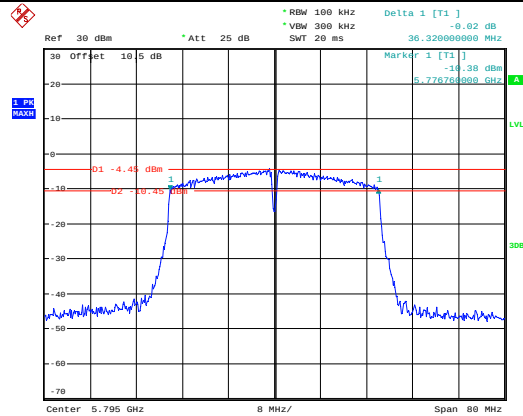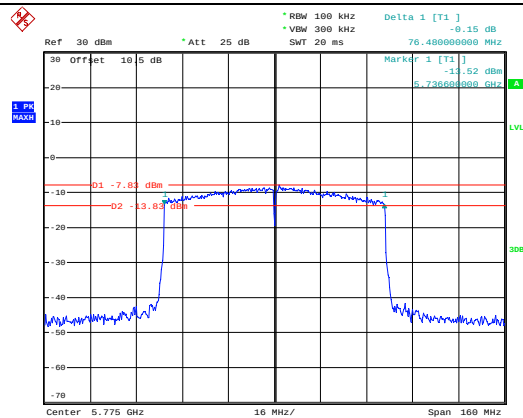802.11n ht40
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:18:20802.11n ht40
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:20:38802.11ac vht80
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:23:25

99% Emission Bandwidth

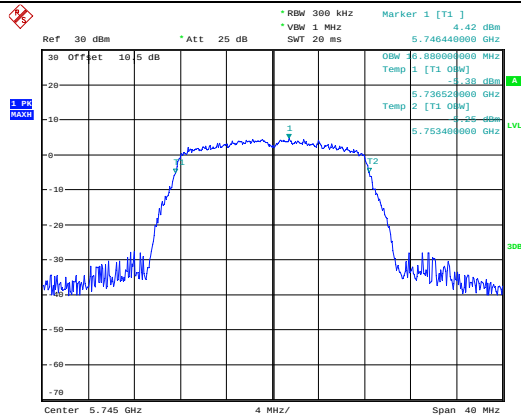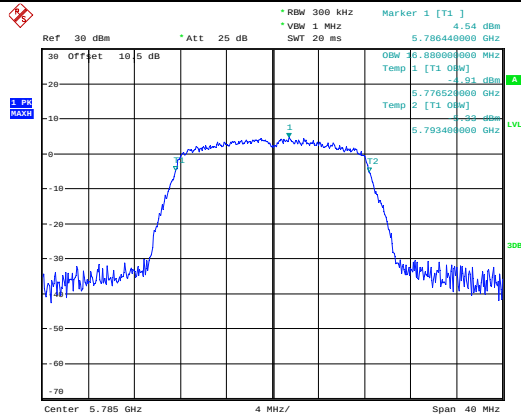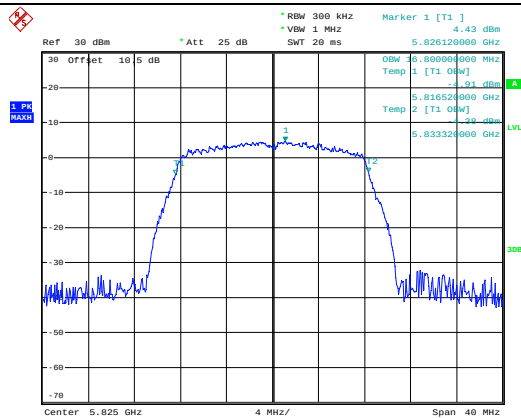802.11a
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:03:27802.11a
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:05:47802.11a
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:07:19

99% Emission Bandwidth

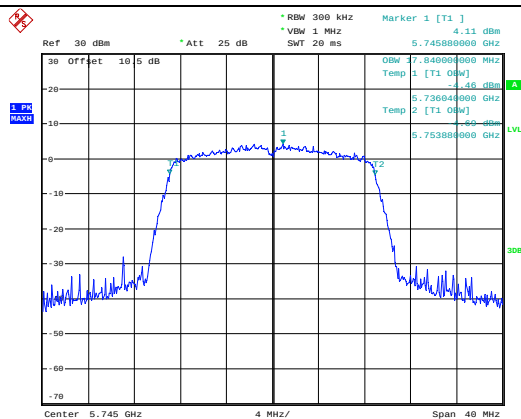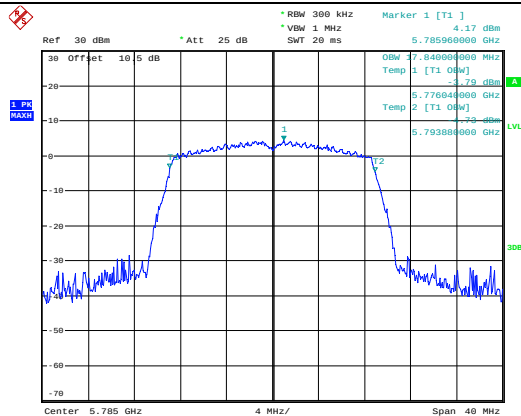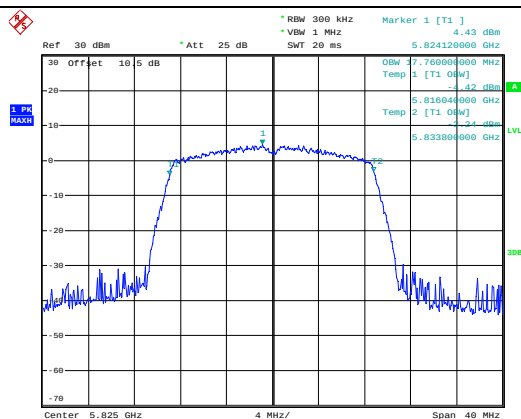802.11n ht20
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:11:01802.11n ht20
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:15:26802.11n ht20
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:16:55

4.4 Maximum Conducted Output Power

Serial Number:	2E5M-1	Test Date:	2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Anritsu	Power Meter	ML2495A	1106009	2023/8/4	2024/8/3
Anritsu	Pulse Power Sensor	MA2411A	10780	2023/8/4	2024/8/3

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5180	11.92	24
	5200	12.05	24
	5240	12.01	24
802.11n ht20	5180	11.81	24
	5200	11.96	24
	5240	11.91	24
802.11n ht40	5190	12.06	24
	5230	11.75	24
802.11ac vht80	5210	11.94	24
Note: The device is a client device.			

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	11.63	30
	5785	11.57	30
	5825	11.77	30
802.11n ht20	5745	11.29	30
	5785	11.51	30
	5825	11.57	30
802.11n ht40	5755	11.42	30
	5795	11.55	30
802.11ac vht80	5775	11.31	30

4.5 Maximum Power Spectral Density

Serial Number:	2E5M-1	Test Date:	2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Reading dBm/MHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/MHz)	
				Result	Limit
802.11a	5180	1.78	/	1.78	11
	5200	1.87	/	1.87	11
	5240	1.88	/	1.88	11
802.11n ht20	5180	1.42	/	1.42	11
	5200	1.56	/	1.56	11
	5240	1.56	/	1.56	11
802.11n ht40	5190	-1.22	/	-1.22	11
	5230	-1.53	/	-1.53	11
802.11ac vht80	5210	-4.59	/	-4.59	11

Note:

The device is a client device.

Method SA-1 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5725-5850 MHz:




Test Modes	Test Frequency (MHz)	Reading (dBm/500kHz)	Duty Cycle Factor (dB)	Maximum Power Spectral Density (dBm/500kHz)	
				Result	Limit
802.11a	5745	-1.43	/	-1.43	30
	5785	-1.49	/	-1.49	30
	5825	-1.26	/	-1.26	30
802.11n ht20	5745	-2.01	/	-2.01	30
	5785	-1.83	/	-1.83	30
	5825	-1.64	/	-1.64	30
802.11n ht40	5755	-4.86	/	-4.86	30
	5795	-4.71	/	-4.71	30
802.11ac vht80	5775	-8.24	/	-8.24	30

Note:

Method SA-1 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test


5150-5250MHz:

Maximum power spectral density

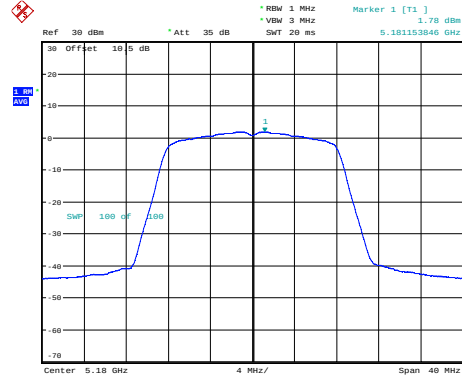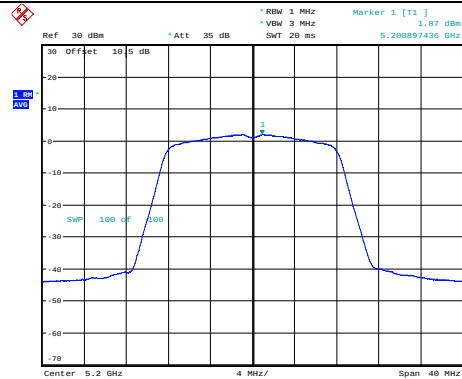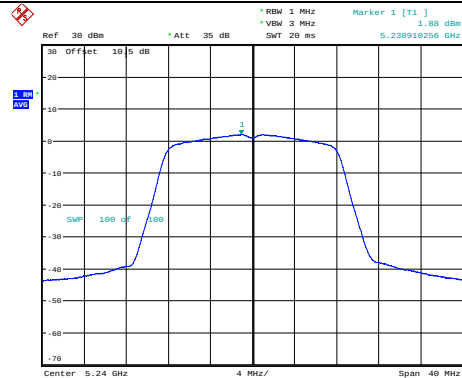802.11a
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:41:02802.11a
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:44:54802.11a
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:46:45


Maximum power spectral density

802.11n ht20
Lowest Channel

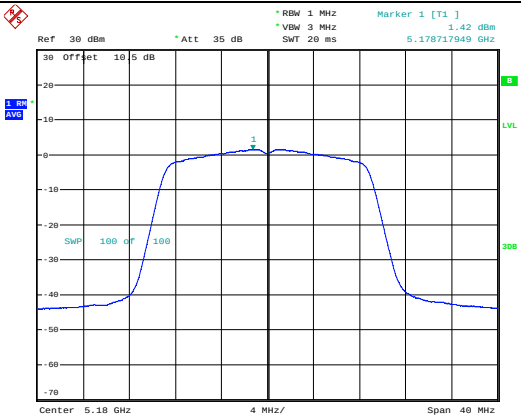


ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:49:28

802.11n ht20
Middle Channel

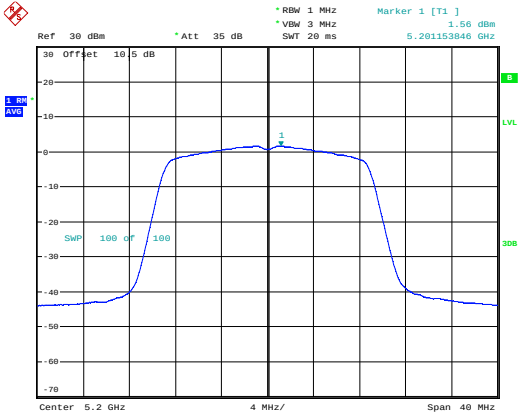




ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:50:54

802.11n ht20
Highest Channel

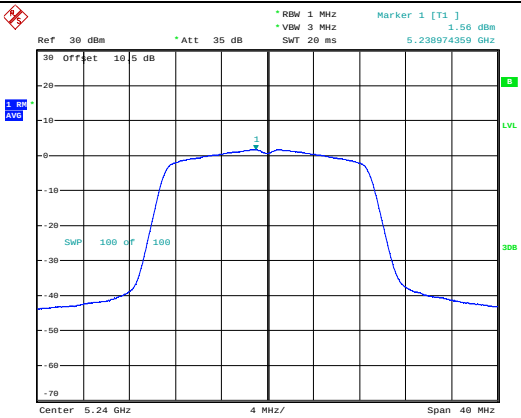




ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:52:27




Maximum power spectral density

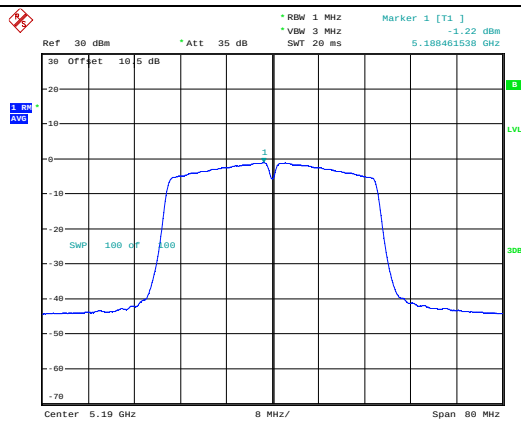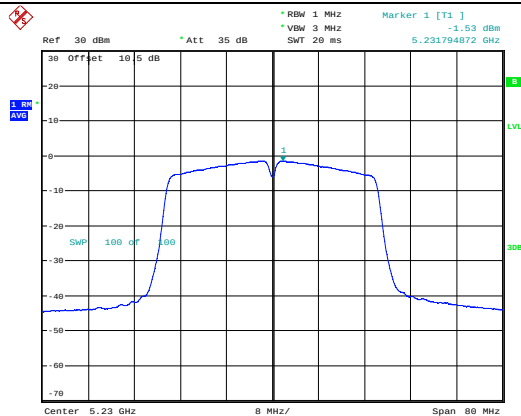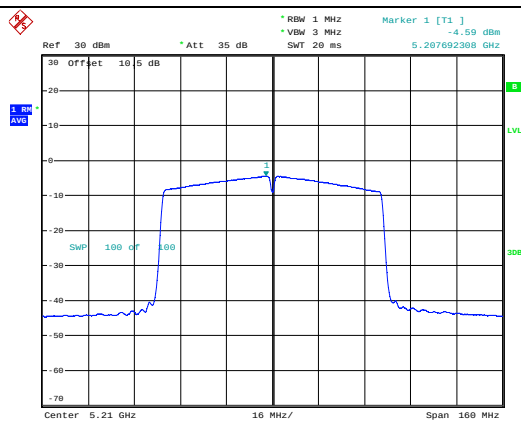802.11n ht40
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:54:37802.11n ht40
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 21:56:44802.11ac vht80
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:01:04




5725-5850MHz

Maximum power spectral density

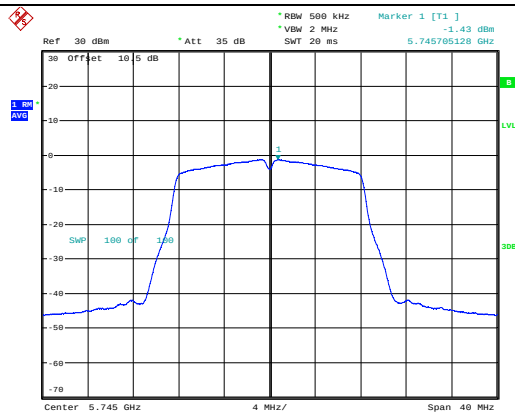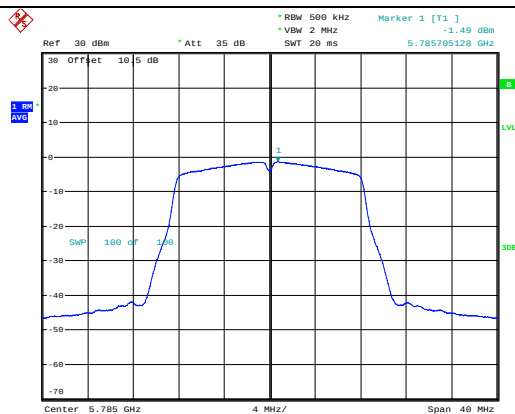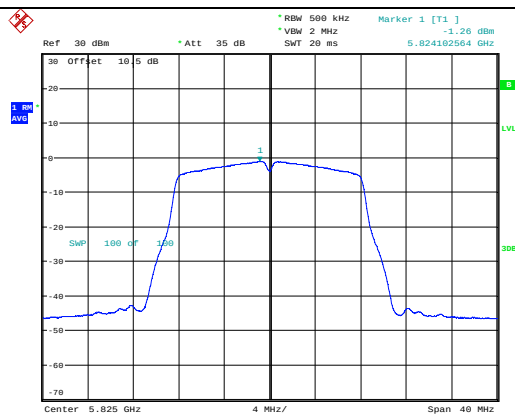802.11a
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:04:41802.11a
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:06:27802.11a
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:08:41

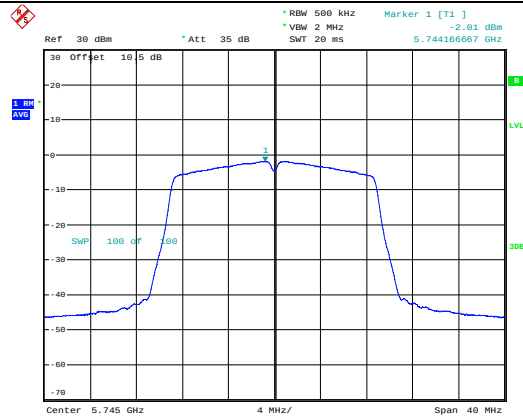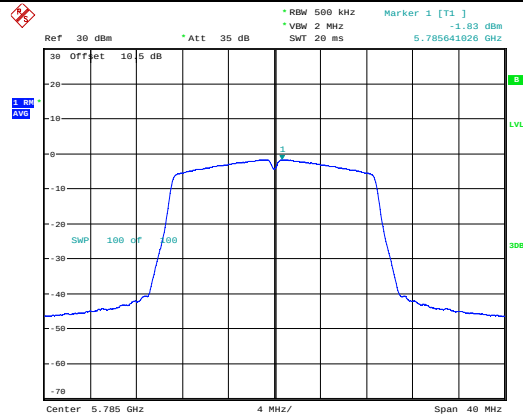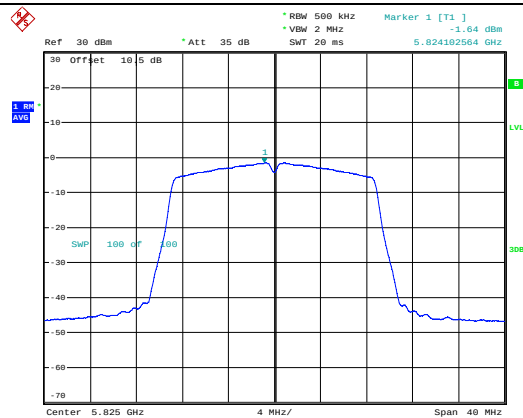Maximum power spectral density802.11n ht20
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:12:33802.11n ht20
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:16:08802.11n ht20
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:17:40

Maximum power spectral density

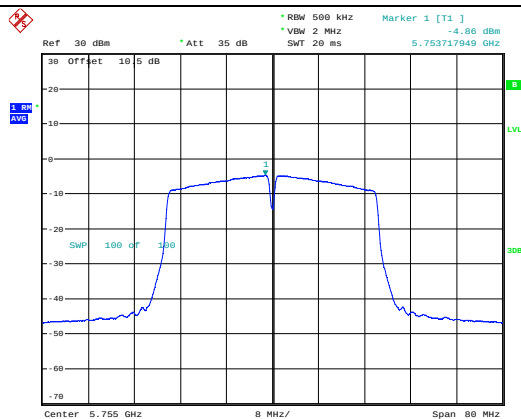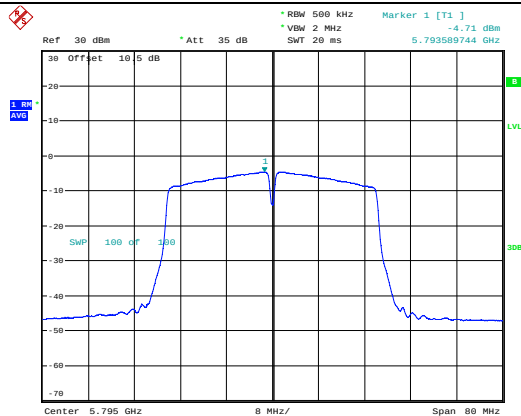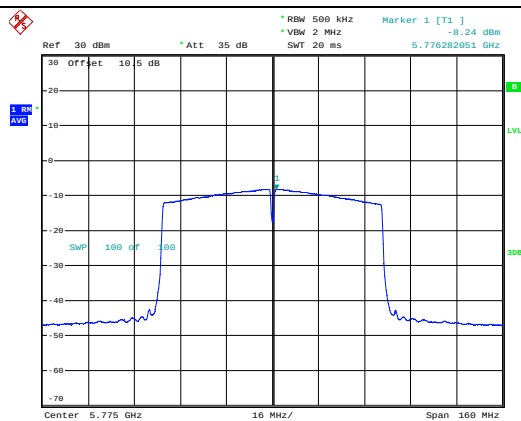802.11n ht40
Lowest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:20:08802.11n ht40
Highest ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:22:42802.11ac vht80
Middle ChannelProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:24:52

4.6 Duty Cycle

Serial Number:	2E5M-1	Test Date:	2023/11/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.3	Relative Humidity: (%)	53	ATM Pressure: (kPa)	101.3
----------------------	------	---------------------------	----	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Cycle Factor (dB)	VBW Setting (kHz)
802.11a	100	100	100.00	/	/	0.01
802.11n ht20	100	100	100.00	/	/	0.01
802.11n ht40	100	100	100.00	/	/	0.01
802.11ac vht80	100	100	100.00	/	/	0.01

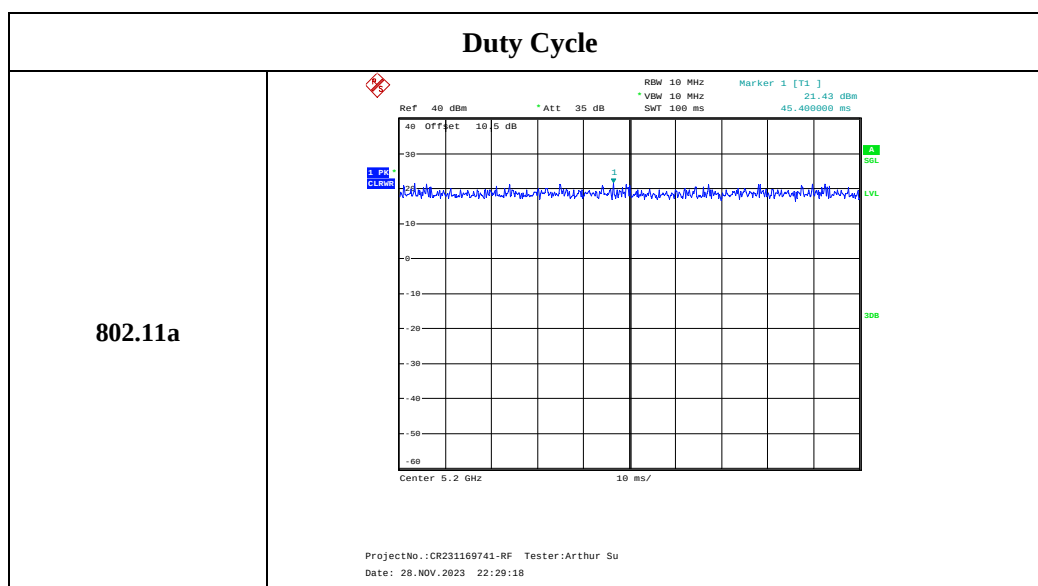


Duty Cycle

802.11n ht20

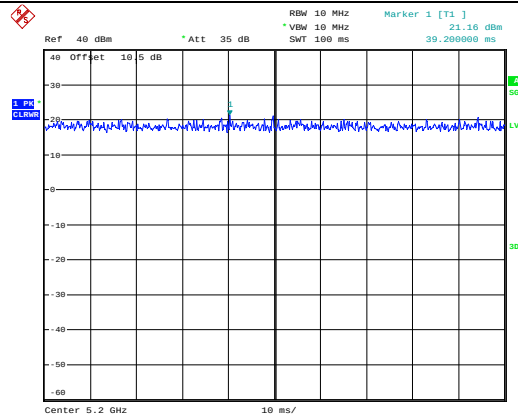


ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:28:46

802.11n ht40

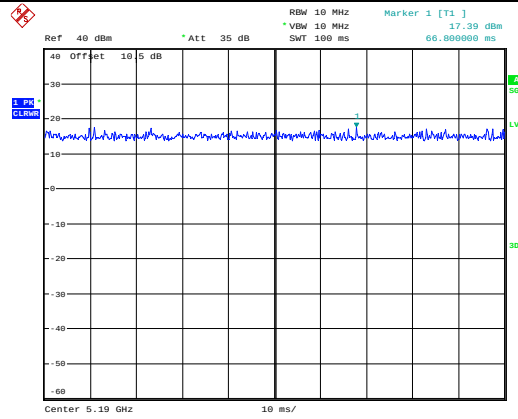

ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:28:02

802.11ac vht80

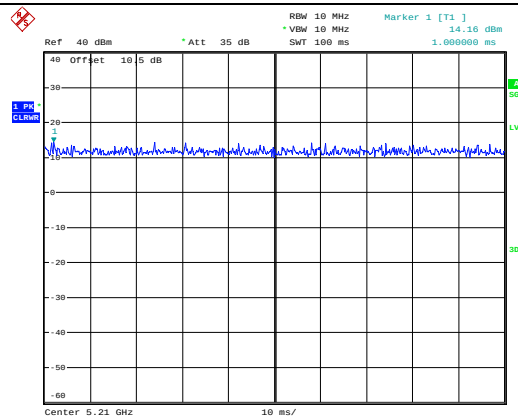

ProjectNo.:CR231169741-RF Tester:Arthur Su
Date: 28.NOV.2023 22:27:14

5. EUT PHOTOGRAPHS

Please refer to the attachment CR231169741-EXP EUT EXTERNAL PHOTOGRAPHS and
CR231169741-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR231169741-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====