

FCC Test Report

Report No.: RF160714C04

FCC ID: PY316200340

Test Model: C7800

Received Date: July 14, 2016

Test Date: Nov. 15 to 22, 2016

Issued Date: Dec. 13, 2016

Applicant: NETGEAR INC.

Address: 350 East Plumeria Drive, San Jose CA 96134, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin
Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Duty Cycle of Test Signal	14
3.4 Description of Support Units	15
3.4.1 Configuration of System under Test	16
3.5 General Description of Applied Standards	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedures	21
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup	22
4.1.6 EUT Operating Conditions	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	37
4.2.1 Limits of Conducted Emission Measurement	37
4.2.2 Test Instruments	37
4.2.3 Test Procedures	38
4.2.4 Deviation from Test Standard	38
4.2.5 Test Setup	38
4.2.6 EUT Operating Conditions	38
4.2.7 Test Results (Mode 1)	39
4.2.8 Test Results (Mode 2)	41
4.3 6dB Bandwidth Measurement	43
4.3.1 Limits of 6dB Bandwidth Measurement	43
4.3.2 Test Setup	43
4.3.3 Test Instruments	43
4.3.4 Test Procedure	43
4.3.5 Deviation from Test Standard	43
4.3.6 EUT Operating Conditions	43
4.3.7 Test Result	44
4.4 Conducted Output Power Measurement	46
4.4.1 Limits of Conducted Output Power Measurement	46
4.4.2 Test Setup	46
4.4.3 Test Instruments	46
4.4.4 Test Procedures	46
4.4.5 Deviation from Test Standard	46
4.4.6 EUT Operating Conditions	46
4.4.7 Test Results	47
4.5 Power Spectral Density Measurement	49
4.5.1 Limits of Power Spectral Density Measurement	49
4.5.2 Test Setup	49
4.5.3 Test Instruments	49
4.5.4 Test Procedure	49
4.5.5 Deviation from Test Standard	49

4.5.6 EUT Operating Condition	49
4.5.7 Test Results	50
4.6 Conducted Out of Band Emission Measurement	53
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	53
4.6.2 Test Setup.....	53
4.6.3 Test Instruments	53
4.6.4 Test Procedure	53
4.6.5 Deviation from Test Standard	53
4.6.6 EUT Operating Condition	53
4.6.7 Test Results	54
5 Pictures of Test Arrangements.....	71
Appendix – Information on the Testing Laboratories	72

Release Control Record

Issue No.	Description	Date Issued
RF160714C04	Original release.	Dec. 13, 2016

1 Certificate of Conformity

Product: AC3200 WiFi Cable Modem Router

Brand: NETGEAR

Test Model: C7800

Applicant: NETGEAR INC.

Test Date: Nov. 15 to 22, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Midoli Peng , **Date:** Dec. 13, 2016
Midoli Peng / Specialist

Approved by : May Chen , **Date:** Dec. 13, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -18.30dB at 11.98438MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 4824.00MHz, 4924.00MHz, 2390.00MHz & 2483.50MHz .
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex(MHF) not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.34 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.41 dB
	6GHz ~ 18GHz	3.49 dB
	18GHz ~ 40GHz	3.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	AC3200 WiFi Cable Modem Router
Brand	NETGEAR
Test Model	C7800
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 19V from power adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 mode in 2.4GHz band
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a / g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20: 11 802.11n (HT40), VHT40: 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 997.948mW Beamforming Mode(NSS1): 562.494 mW Beamforming Mode(NSS2): 997.948mW 5GHz: 5.18GHz ~ 5.24GHz: CDD Mode: 955.585mW Beamforming Mode(NSS1): 597.263mW Beamforming Mode(NSS2): 597.263mW 5.745GHz ~ 5.825GHz: CDD Mode: 981.188mW Beamforming Mode(NSS1): 754.849mW Beamforming Mode(NSS2): 981.188mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x1
Data Cable Supplied	RJ45 Cable(unshielded, 1.45m)

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT must be supplied with a power adapter and following different models could be chosen as following table:

No	Brand Name	Model No.	PN	Spec.
1	NETGEAR	AD2003F10	332-10631-01	Input: 100-120V~50/60Hz 1.5A Output: 19V / 3.16A Power cord (Unshielded, 1.8m)
2	NETGEAR	2ABS060K 1 NA	332-10788-01	Input: 100-120V~50/60Hz 1.7A Output: 19V / 3.16A Power cord (Unshielded, 1.8m)

Note: From the above adapters, the radiated emission worse case was found in Adapter 1. Therefore only the test data of the mode was recorded in this report.

3. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Transmitter Circuit	Antenna Gain(dBi)	Frequency range (GHz ~ GHz)	Antenna Type	Connector Type
1	Chain (0)	3.06	2.4~2.4835	Dipole	i-pex(MHF)
		2.68	5.15~5.25		
		2.55	5.725~5.85		
2	Chain (1)	3.06	2.4~2.4835	Dipole	i-pex(MHF)
		2.68	5.15~5.25		
		2.55	5.725~5.85		
3	Chain (2)	3.06	2.4~2.4835	Dipole	i-pex(MHF)
		2.68	5.15~5.25		
		2.55	5.725~5.85		
4	Chain (3)	3.06	2.4~2.4835	Dipole	i-pex(MHF)
		2.68	5.15~5.25		
		2.55	5.725~5.85		

4. The Directional gain table:

Frequency (MHz)	Max Gain (dBi)
2.4GHz band	8.49dBi (Nss=1) , 5.48dBi (Nss=2)
5GHz (UNII-1) band	8.15dBi (Nss=1), 5.14dBi (Nss=2)
5GHz (UNII-3) band	7.21dBi (Nss=1), 4.2dBi (Nss=2)

Note:

1. Non-TxBF mode & TxBF mode antenna gain refer to KDB 662911 F 2) f) (ii)

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

5. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	4TX	4RX
802.11g	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS16~23	4TX	4RX
	MCS 24~31	4TX	4RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	4TX	4RX
802.11n (HT20)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11n (HT40)	MCS 0~7	4TX	4RX
	MCS 8~15	4TX	4RX
	MCS16~23	4TX	4RX
	MCS 24~31	4TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=1	4TX	4RX
	MCS 0~8, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~8, Nss=4	4TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=1	4TX	4RX
	MCS 0~9, Nss=2	4TX	4RX
	MCS 0~9, Nss=3	4TX	4RX
	MCS 0~9, Nss=4	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	√	√	√	√	With adapter 1
2	-	-	√	-	With adapter 2

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **X-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	6	OFDM	BPSK	6.5

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	ofDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	ofDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	ofDM	BPSK	13.5
Beamforming Mode – NSS 1 (Output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	ofDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	ofDM	BPSK	13.5
Beamforming Mode – NSS 2 (Output power only)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	1 to 11	1, 6, 11	ofDM	BPSK	13.5
802.11n (HT40)	3 to 9	3, 6, 9	ofDM	BPSK	27

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	26deg. C, 72%RH	120Vac, 60Hz	Gary Cheng
RE $<$ 1G	23deg. C, 73%RH	120Vac, 60Hz	Jyunchun Lin
PLC	25deg. C, 68%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

802.11b: Duty cycle = $12.469/12.507 = 0.997$

802.11g: Duty cycle = $2.064/2.082 = 0.991$

802.11n (HT20): Duty cycle = $1.919/1.939 = 0.99$

802.11n (HT40): Duty cycle = $0.944/0.963 = 0.98$

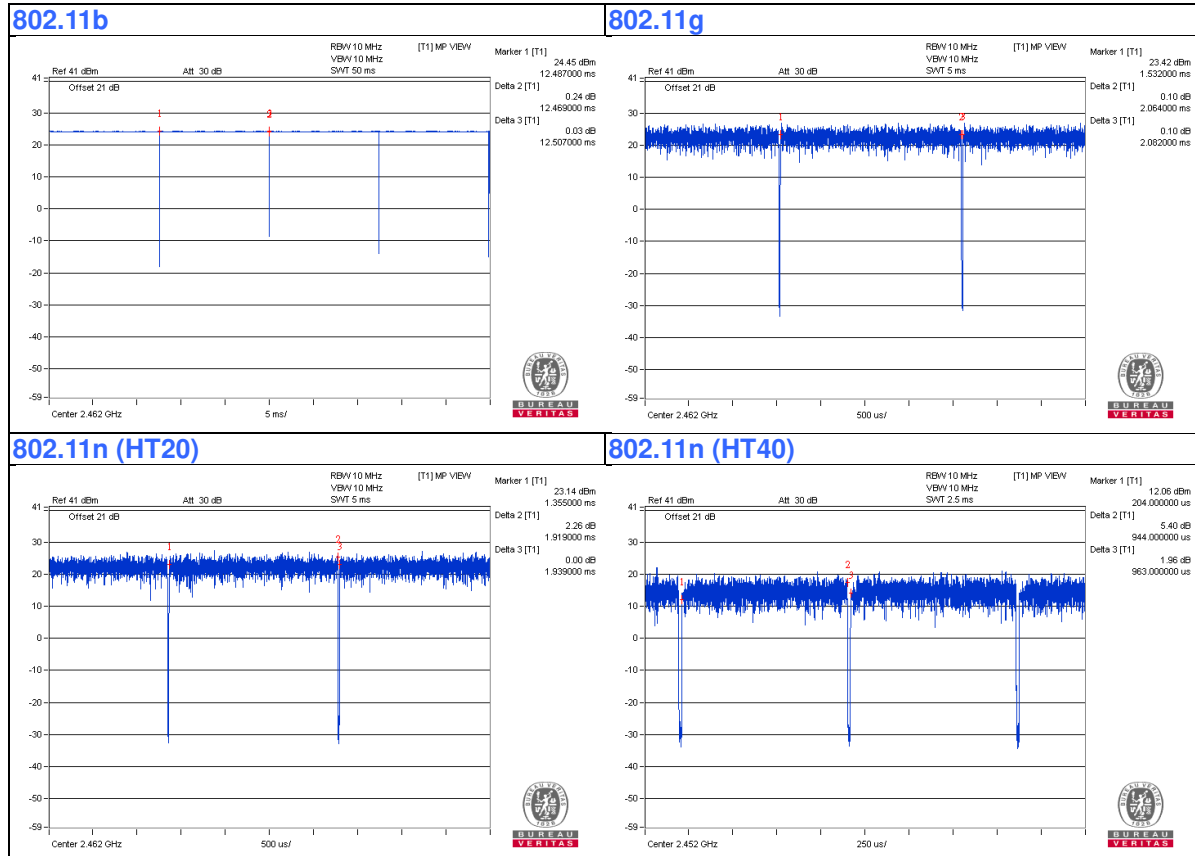

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
B.	Laptop	LENOVO	E440	PF071LWC	NA	Provided by Lab
C.	USB Disk3.0	Transcend	16GB	NA	NA	Provided by Lab
D.	USB Disk3.0	Transcend	16GB	NA	NA	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	Coaxial Cable	1	10	Yes	0	Provided by Lab

3.4.1 Configuration of System under Test

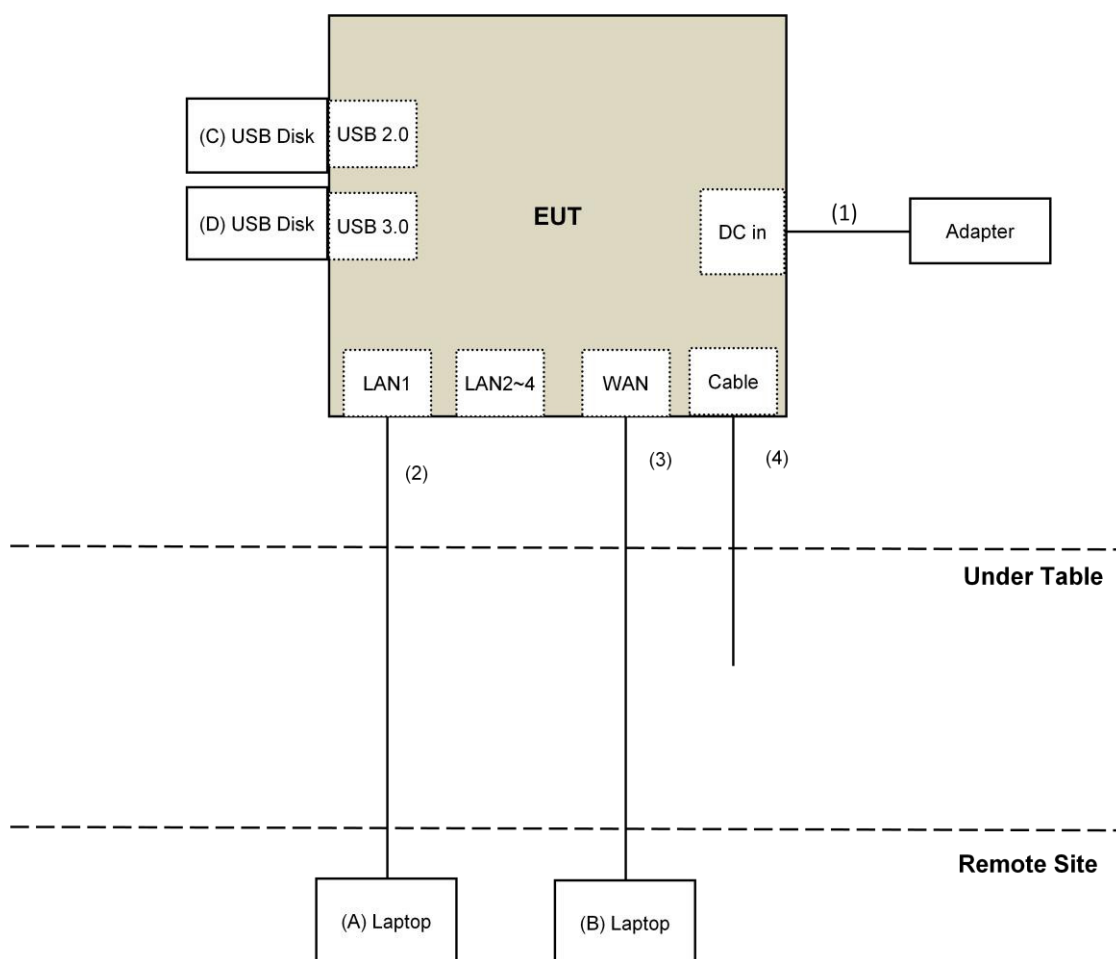

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)
KDB 558074 D01 DTS Meas Guidance v03r05
KDB 662911 D01 Multiple Transmitter Output v02r01
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 20, 2016	July 19, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-01	Nov. 10, 2016	Nov. 09, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-4-1 966-4-2 966-4-3	Apr. 02, 2016	Apr. 01, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Oct. 05, 2016	Oct. 04, 2017
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Jan. 19, 2016	Jan. 18, 2017
Pre-Amplifier Agilent	8449B	3008A01922	Sep. 18, 2016	Sep. 17, 2017
RF Cable	EMC104-SM- SM-2000 EMC104-SM- SM-5000 EMC104-SM- SM-5000	150318 150323 150324	Mar. 30, 2016	Mar. 29, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated _V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208410	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP02	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	0824006	May 26, 2016	May 25, 2017
Power sensor Anritsu	MA2411B	0738172	May 26, 2016	May 25, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Loop antenna was used for all emissions below 30 MHz.
4. The test was performed in 966 Chamber No. 4.
5. The FCC Site Registration No. is 292998
6. The CANADA Site Registration No. is 20331-2
7. Tested Date: Nov. 15 to 22, 2016

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

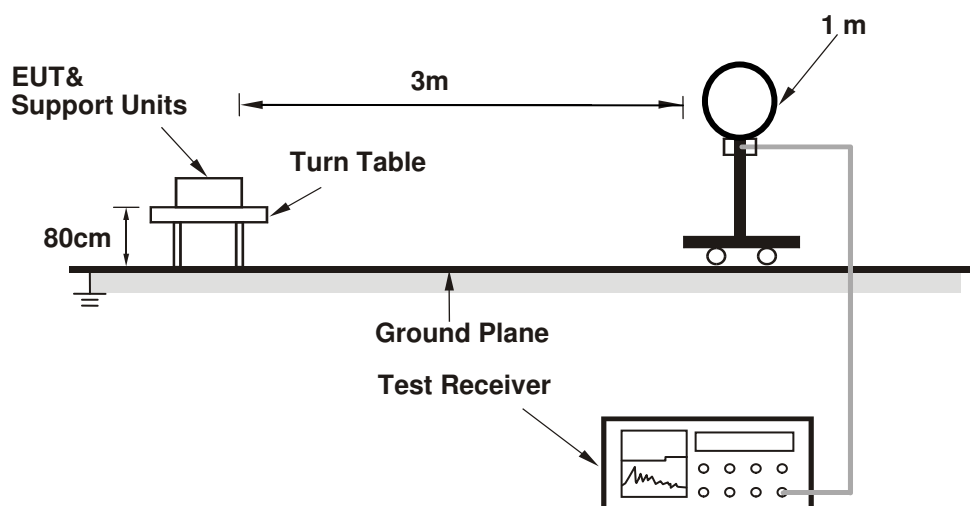

For Radiated emission 30MHz to 1GHz

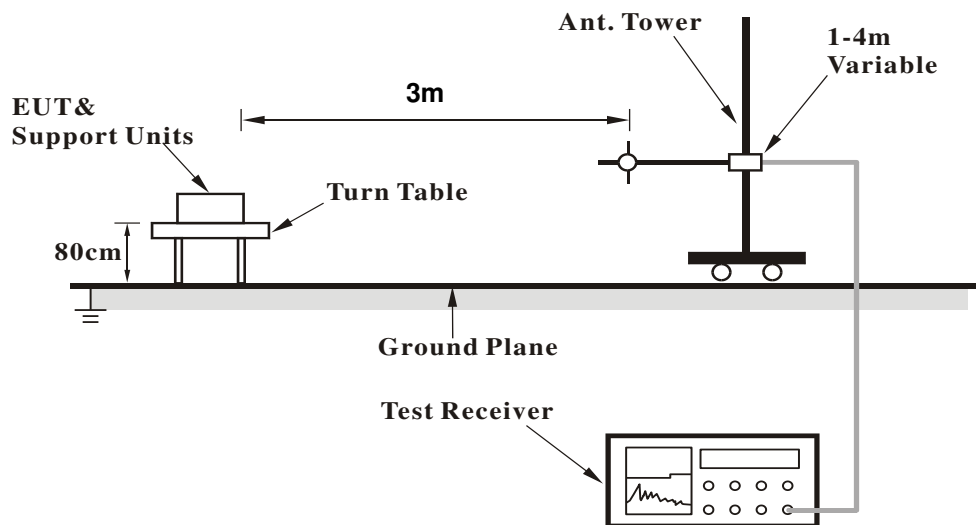

For Radiated emission above 1GHz

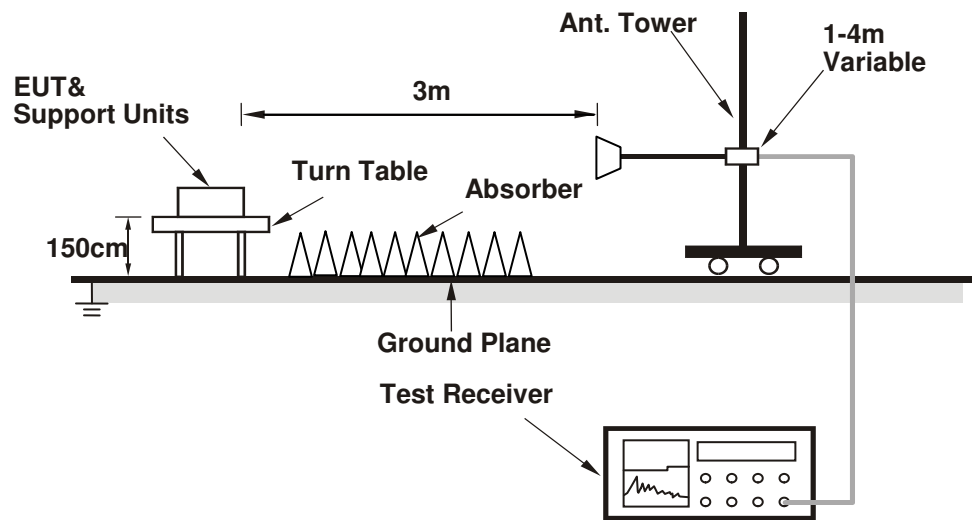

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (MTool.exe Ver.2.0.3.2) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.9 PK	74.0	-24.1	3.34 H	296	55.6	-5.7
2	2390.00	37.6 AV	54.0	-16.4	3.34 H	296	43.3	-5.7
3	*2412.00	92.6 PK			3.34 H	296	98.2	-5.6
4	*2412.00	89.8 AV			3.34 H	296	95.4	-5.6
5	4824.00	49.8 PK	74.0	-24.2	4.00 H	20	49.0	0.8
6	4824.00	45.3 AV	54.0	-8.7	4.00 H	20	44.5	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.3 PK	74.0	-22.7	1.50 V	8	57.0	-5.7
2	2390.00	38.3 AV	54.0	-15.7	1.50 V	8	44.0	-5.7
3	*2412.00	100.9 PK			1.50 V	8	106.5	-5.6
4	*2412.00	98.6 AV			1.50 V	8	104.2	-5.6
5	4824.00	55.3 PK	74.0	-18.7	2.21 V	124	54.5	0.8
6	4824.00	53.9 AV	54.0	-0.1	2.21 V	124	53.1	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	50.2 PK	74.0	-23.8	3.37 H	296	55.9	-5.7
2	2390.00	37.1 AV	54.0	-16.9	3.37 H	296	42.8	-5.7
3	*2437.00	93.4 PK			3.37 H	296	98.9	-5.5
4	*2437.00	90.6 AV			3.37 H	296	96.1	-5.5
5	2483.50	48.8 PK	74.0	-25.2	3.37 H	296	54.3	-5.5
6	2483.50	36.4 AV	54.0	-17.6	3.37 H	296	41.9	-5.5
7	4874.00	49.6 PK	74.0	-24.4	3.98 H	31	48.7	0.9
8	4874.00	46.8 AV	54.0	-7.2	3.98 H	31	45.9	0.9
9	7311.00	57.1 PK	74.0	-16.9	1.10 H	37	49.7	7.4
10	7311.00	43.5 AV	54.0	-10.5	1.10 H	37	36.1	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	51.2 PK	74.0	-22.8	1.45 V	8	56.9	-5.7
2	2390.00	38.1 AV	54.0	-15.9	1.45 V	8	43.8	-5.7
3	*2437.00	101.7 PK			1.45 V	8	107.2	-5.5
4	*2437.00	99.4 AV			1.45 V	8	104.9	-5.5
5	2483.50	50.0 PK	74.0	-24.0	1.45 V	8	55.5	-5.5
6	2483.50	37.2 AV	54.0	-16.8	1.45 V	8	42.7	-5.5
7	4874.00	55.1 PK	74.0	-18.9	2.19 V	118	54.2	0.9
8	4874.00	53.6 AV	54.0	-0.4	2.19 V	118	52.7	0.9
9	7311.00	53.9 PK	74.0	-20.1	2.21 V	50	46.5	7.4
10	7311.00	49.2 AV	54.0	-4.8	2.21 V	50	41.8	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	93.6 PK			3.40 H	306	99.0	-5.4
2	*2462.00	90.8 AV			3.40 H	306	96.2	-5.4
3	2483.50	49.4 PK	74.0	-24.6	2.40 H	306	54.9	-5.5
4	2483.50	36.7 AV	54.0	-17.3	2.40 H	306	42.2	-5.5
5	4924.00	48.3 PK	74.0	-25.7	3.86 H	29	47.2	1.1
6	4924.00	45.3 AV	54.0	-8.7	3.86 H	29	44.2	1.1
7	7386.00	52.2 PK	74.0	-21.8	1.10 H	40	44.6	7.6
8	7386.00	46.4 AV	54.0	-7.6	1.10 H	40	38.8	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	101.5 PK			1.48 V	0	106.9	-5.4
2	*2462.00	99.1 AV			1.48 V	0	104.5	-5.4
3	2483.50	50.1 PK	74.0	-23.9	1.48 V	0	55.6	-5.5
4	2483.50	37.1 AV	54.0	-16.9	1.48 V	0	42.6	-5.5
5	4924.00	55.9 PK	74.0	-18.1	2.23 V	117	54.8	1.1
6	4924.00	53.9 AV	54.0	-0.1	2.23 V	117	52.8	1.1
7	7386.00	53.1 PK	74.0	-20.9	2.22 V	53	45.5	7.6
8	7386.00	47.8 AV	54.0	-6.2	2.22 V	53	40.2	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.0 PK	74.0	-8.0	3.39 H	307	71.7	-5.7
2	2390.00	51.8 AV	54.0	-2.2	3.39 H	307	57.5	-5.7
3	*2412.00	106.3 PK			3.39 H	307	111.9	-5.6
4	*2412.00	96.1 AV			3.39 H	307	101.7	-5.6
5	4824.00	59.5 PK	74.0	-14.5	4.00 H	26	58.7	0.8
6	4824.00	46.8 AV	54.0	-7.2	4.00 H	26	46.0	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.1 PK	74.0	-5.9	2.21 V	187	73.8	-5.7
2	2390.00	53.9 AV	54.0	-0.1	2.21 V	187	59.6	-5.7
3	*2412.00	114.2 PK			2.21 V	187	119.8	-5.6
4	*2412.00	104.4 AV			2.21 V	187	110.0	-5.6
5	4824.00	59.1 PK	74.0	-14.9	2.22 V	133	58.3	0.8
6	4824.00	48.9 AV	54.0	-5.1	2.22 V	133	48.1	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	59.7 PK	74.0	-14.3	3.43 H	317	65.4	-5.7
2	2390.00	43.4 AV	54.0	-10.6	3.43 H	317	49.1	-5.7
3	*2437.00	109.0 PK			3.43 H	317	114.5	-5.5
4	*2437.00	98.8 AV			3.43 H	317	104.3	-5.5
5	2483.50	56.9 PK	74.0	-17.1	3.43 H	317	62.4	-5.5
6	2483.50	42.1 AV	54.0	-11.9	3.43 H	317	47.6	-5.5
7	4874.00	59.5 PK	74.0	-14.5	4.00 H	32	58.6	0.9
8	4874.00	46.6 AV	54.0	-7.4	4.00 H	32	45.7	0.9
9	7311.00	57.0 PK	74.0	-17.0	1.08 H	28	49.6	7.4
10	7311.00	43.3 AV	54.0	-10.7	1.08 H	28	35.9	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	2.42 V	185	67.5	-5.7
2	2390.00	45.5 AV	54.0	-8.5	2.42 V	185	51.2	-5.7
3	*2437.00	116.9 PK			2.42 V	185	122.4	-5.5
4	*2437.00	107.1 AV			2.42 V	185	112.6	-5.5
5	2483.50	59.0 PK	74.0	-15.0	2.42 V	185	64.5	-5.5
6	2483.50	44.2 AV	54.0	-9.8	2.42 V	185	49.7	-5.5
7	4874.00	63.1 PK	74.0	-10.9	2.22 V	122	62.2	0.9
8	4874.00	51.8 AV	54.0	-2.2	2.22 V	122	50.9	0.9
9	7311.00	51.3 PK	74.0	-22.7	2.20 V	34	43.9	7.4
10	7311.00	46.9 AV	54.0	-7.1	2.20 V	34	39.5	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.9 PK			3.39 H	308	112.3	-5.4
2	*2462.00	97.1 AV			3.39 H	308	102.5	-5.4
3	2483.50	67.8 PK	74.0	-6.2	3.39 H	308	73.3	-5.5
4	2483.50	50.5 AV	54.0	-3.5	3.39 H	308	56.0	-5.5
5	4924.00	59.5 PK	74.0	-14.5	4.00 H	46	58.4	1.1
6	4924.00	46.7 AV	54.0	-7.3	4.00 H	46	45.6	1.1
7	7386.00	57.2 PK	74.0	-16.8	1.04 H	12	49.6	7.6
8	7386.00	43.6 AV	54.0	-10.4	1.04 H	12	36.0	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.8 PK			2.54 V	181	120.2	-5.4
2	*2462.00	105.4 AV			2.54 V	181	110.8	-5.4
3	2483.50	71.4 PK	74.0	-2.6	2.54 V	181	76.9	-5.5
4	2483.50	53.9 AV	54.0	-0.1	2.54 V	181	59.4	-5.5
5	4924.00	60.1 PK	74.0	-13.9	2.28 V	110	59.0	1.1
6	4924.00	48.9 AV	54.0	-5.1	2.28 V	110	47.8	1.1
7	7386.00	51.2 PK	74.0	-22.8	2.26 V	47	43.6	7.6
8	7386.00	43.6 AV	54.0	-10.4	2.26 V	47	36.0	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	3.43 H	321	74.0	-5.7
2	2390.00	50.8 AV	54.0	-3.2	3.43 H	321	56.5	-5.7
3	*2412.00	103.3 PK			3.43 H	321	108.9	-5.6
4	*2412.00	92.8 AV			3.43 H	321	98.4	-5.6
5	4824.00	56.6 PK	74.0	-17.4	4.00 H	34	55.8	0.8
6	4824.00	43.7 AV	54.0	-10.3	4.00 H	34	42.9	0.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	2.07 V	351	77.4	-5.7
2	2390.00	53.9 AV	54.0	-0.1	2.07 V	351	59.6	-5.7
3	*2412.00	111.2 PK			2.07 V	351	116.8	-5.6
4	*2412.00	101.1 AV			2.07 V	351	106.7	-5.6
5	4824.00	58.1 PK	74.0	-15.9	2.21 V	111	57.3	0.8
6	4824.00	47.0 AV	54.0	-7.0	2.21 V	111	46.2	0.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.3 PK	74.0	-13.7	3.49 H	311	66.0	-5.7
2	2390.00	44.4 AV	54.0	-9.6	3.49 H	311	50.1	-5.7
3	*2437.00	106.2 PK			3.49 H	311	111.7	-5.5
4	*2437.00	95.4 AV			3.49 H	311	100.9	-5.5
5	2483.50	56.4 PK	74.0	-17.6	3.49 H	311	61.9	-5.5
6	2483.50	41.4 AV	54.0	-12.6	3.49 H	311	46.9	-5.5
7	4874.00	59.7 PK	74.0	-14.3	4.00 H	26	58.8	0.9
8	4874.00	46.8 AV	54.0	-7.2	4.00 H	26	45.9	0.9
9	7311.00	56.4 PK	74.0	-17.6	1.10 H	32	49.0	7.4
10	7311.00	42.9 AV	54.0	-11.1	1.10 H	32	35.5	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.4 PK	74.0	-11.6	2.04 V	351	68.1	-5.7
2	2390.00	46.5 AV	54.0	-7.5	2.04 V	351	52.2	-5.7
3	*2437.00	114.1 PK			2.04 V	351	119.6	-5.5
4	*2437.00	103.7 AV			2.04 V	351	109.2	-5.5
5	2483.50	58.5 PK	74.0	-15.5	2.04 V	351	64.0	-5.5
6	2483.50	44.5 AV	54.0	-9.5	2.04 V	351	50.0	-5.5
7	4874.00	62.4 PK	74.0	-11.6	2.22 V	111	61.5	0.9
8	4874.00	51.3 AV	54.0	-2.7	2.22 V	111	50.4	0.9
9	7311.00	56.3 PK	74.0	-17.7	2.19 V	38	48.9	7.4
10	7311.00	47.2 AV	54.0	-6.8	2.19 V	38	39.8	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.6 PK			3.53 H	299	109.0	-5.4
2	*2462.00	93.7 AV			3.53 H	299	99.1	-5.4
3	2483.50	70.4 PK	74.0	-3.6	3.53 H	299	75.9	-5.5
4	2483.50	49.3 AV	54.0	-4.7	3.53 H	299	54.8	-5.5
5	4924.00	56.4 PK	74.0	-17.6	4.00 H	23	55.3	1.1
6	4924.00	43.5 AV	54.0	-10.5	4.00 H	23	42.4	1.1
7	7386.00	53.1 PK	74.0	-20.9	1.11 H	36	45.5	7.6
8	7386.00	39.6 AV	54.0	-14.4	1.11 H	36	32.0	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.5 PK			2.17 V	350	116.9	-5.4
2	*2462.00	102.0 AV			2.17 V	350	107.4	-5.4
3	2483.50	73.5 PK	74.0	-0.5	2.17 V	350	79.0	-5.5
4	2483.50	52.7 AV	54.0	-1.3	2.17 V	350	58.2	-5.5
5	4924.00	58.9 PK	74.0	-15.1	2.25 V	104	57.8	1.1
6	4924.00	47.8 AV	54.0	-6.2	2.25 V	104	46.7	1.1
7	7386.00	52.9 PK	74.0	-21.1	2.19 V	40	45.3	7.6
8	7386.00	43.8 AV	54.0	-10.2	2.19 V	40	36.2	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.5 PK	74.0	-8.5	3.48 H	299	71.2	-5.7
2	2390.00	50.6 AV	54.0	-3.4	3.48 H	299	56.3	-5.7
3	*2422.00	97.6 PK			3.48 H	299	103.1	-5.5
4	*2422.00	82.8 AV			3.48 H	299	88.3	-5.5
5	4844.00	55.9 PK	74.0	-18.1	4.00 H	41	55.1	0.8
6	4844.00	42.9 AV	54.0	-11.1	4.00 H	41	42.1	0.8
7	7266.00	53.7 PK	74.0	-20.3	1.04 H	14	46.2	7.5
8	7266.00	40.2 AV	54.0	-13.8	1.04 H	14	32.7	7.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.85 V	352	74.3	-5.7
2	2390.00	53.9 AV	54.0	-0.1	1.85 V	352	59.6	-5.7
3	*2422.00	105.5 PK			1.85 V	352	111.0	-5.5
4	*2422.00	91.1 AV			1.85 V	352	96.6	-5.5
5	4844.00	59.0 PK	74.0	-15.0	2.21 V	104	58.2	0.8
6	4844.00	48.4 AV	54.0	-5.6	2.21 V	104	47.6	0.8
7	7266.00	51.8 PK	74.0	-22.2	2.14 V	39	44.3	7.5
8	7266.00	43.1 AV	54.0	-10.9	2.14 V	39	35.6	7.5

REMARKS:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	3.54 H	286	72.6	-5.7
2	2390.00	50.6 AV	54.0	-3.4	3.54 H	286	56.3	-5.7
3	*2437.00	101.1 PK			3.54 H	286	106.6	-5.5
4	*2437.00	89.4 AV			3.54 H	286	94.9	-5.5
5	2483.50	65.5 PK	74.0	-8.5	3.54 H	286	71.0	-5.5
6	2483.50	46.7 AV	54.0	-7.3	3.54 H	286	52.2	-5.5
7	4874.00	56.0 PK	74.0	-18.0	4.00 H	28	55.1	0.9
8	4874.00	43.2 AV	54.0	-10.8	4.00 H	28	42.3	0.9
9	7311.00	53.1 PK	74.0	-20.9	1.06 H	24	45.7	7.4
10	7311.00	39.8 AV	54.0	-14.2	1.06 H	24	32.4	7.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	2.67 V	232	75.9	-5.7
2	2390.00	53.9 AV	54.0	-0.1	2.67 V	232	59.6	-5.7
3	*2437.00	109.0 PK			2.67 V	232	114.5	-5.5
4	*2437.00	97.7 AV			2.67 V	232	103.2	-5.5
5	2483.50	68.1 PK	74.0	-5.9	2.67 V	232	73.6	-5.5
6	2483.50	49.3 AV	54.0	-4.7	2.67 V	232	54.8	-5.5
7	4874.00	59.1 PK	74.0	-14.9	2.24 V	107	58.2	0.9
8	4874.00	48.2 AV	54.0	-5.8	2.24 V	107	47.3	0.9
9	7311.00	52.4 PK	74.0	-21.6	2.18 V	25	45.0	7.4
10	7311.00	43.6 AV	54.0	-10.4	2.18 V	25	36.2	7.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.4 PK			3.55 H	292	103.9	-5.5
2	*2452.00	83.8 AV			3.55 H	292	89.3	-5.5
3	2483.50	68.7 PK	74.0	-5.3	3.55 H	292	74.2	-5.5
4	2483.50	49.9 AV	54.0	-4.1	3.55 H	292	55.4	-5.5
5	4904.00	55.7 PK	74.0	-18.3	4.00 H	26	54.7	1.0
6	4904.00	42.7 AV	54.0	-11.3	4.00 H	26	41.7	1.0
7	7356.00	52.4 PK	74.0	-21.6	1.01 H	28	44.8	7.6
8	7356.00	39.4 AV	54.0	-14.6	1.01 H	28	31.8	7.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	106.3 PK			2.01 V	349	111.8	-5.5
2	*2452.00	92.1 AV			2.01 V	349	97.6	-5.5
3	2483.50	71.8 PK	74.0	-2.2	2.01 V	349	77.3	-5.5
4	2483.50	53.2 AV	54.0	-0.8	2.01 V	349	58.7	-5.5
5	4904.00	59.3 PK	74.0	-14.7	2.24 V	112	58.3	1.0
6	4904.00	48.6 AV	54.0	-5.4	2.24 V	112	47.6	1.0
7	7356.00	53.0 PK	74.0	-21.0	2.17 V	23	45.4	7.6
8	7356.00	43.9 AV	54.0	-10.1	2.17 V	23	36.3	7.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data

802.11n (HT20)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.99	29.8 QP	40.0	-10.2	2.00 H	242	39.8	-10.0
2	47.95	29.2 QP	40.0	-10.8	3.00 H	265	37.9	-8.7
3	250.00	41.5 QP	46.0	-4.5	1.00 H	191	51.5	-10.0
4	375.00	38.2 QP	46.0	-7.8	1.00 H	327	44.2	-6.0
5	874.99	39.1 QP	46.0	-6.9	1.50 H	293	35.7	3.4
6	899.99	33.6 QP	46.0	-12.4	1.50 H	47	29.8	3.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	42.95	36.3 QP	40.0	-3.7	1.00 V	218	45.1	-8.8
2	93.78	31.6 QP	43.5	-11.9	1.50 V	316	45.7	-14.1
3	250.00	34.4 QP	46.0	-11.6	2.00 V	237	44.4	-10.0
4	375.00	33.8 QP	46.0	-12.2	1.50 V	194	39.8	-6.0
5	625.00	32.3 QP	46.0	-13.7	1.50 V	233	32.3	0.0
6	899.99	38.0 QP	46.0	-8.0	1.00 V	106	34.2	3.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COCCAB-001	Sep. 30, 2016	Sep. 29, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	June 20, 2016	June 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
3. Tested Date: Nov. 22, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

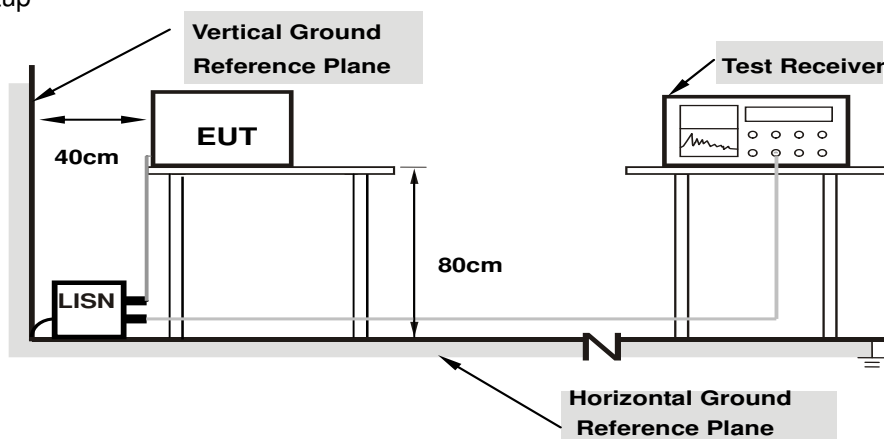

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	31.97	14.05	42.17	24.25	66.00	56.00	-23.83	-31.75
2	0.16562	10.20	34.18	17.89	44.38	28.09	65.18	55.18	-20.80	-27.09
3	0.47813	10.25	12.87	5.04	23.12	15.29	56.37	46.37	-33.25	-31.08
4	8.85156	10.65	26.02	20.68	36.67	31.33	60.00	50.00	-23.33	-18.67
5	11.98438	10.96	26.03	20.74	36.99	31.70	60.00	50.00	-23.01	-18.30
6	14.20703	11.21	25.24	19.81	36.45	31.02	60.00	50.00	-23.55	-18.98

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

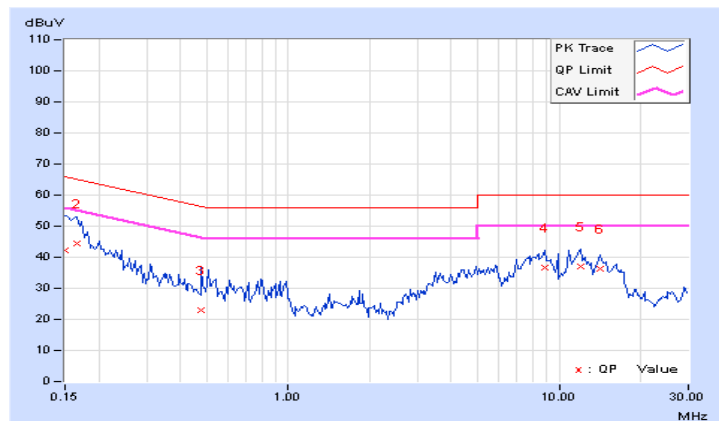


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	32.59	15.50	42.78	25.69	66.00	56.00	-23.22	-30.31
2	0.20078	10.17	29.32	17.32	39.49	27.49	63.58	53.58	-24.09	-26.09
3	8.75781	10.55	26.04	20.73	36.59	31.28	60.00	50.00	-23.41	-18.72
4	12.39844	10.85	24.84	19.40	35.69	30.25	60.00	50.00	-24.31	-19.75
5	14.36719	11.03	25.73	20.28	36.76	31.31	60.00	50.00	-23.24	-18.69
6	17.03516	11.21	20.86	15.17	32.07	26.38	60.00	50.00	-27.93	-23.62

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

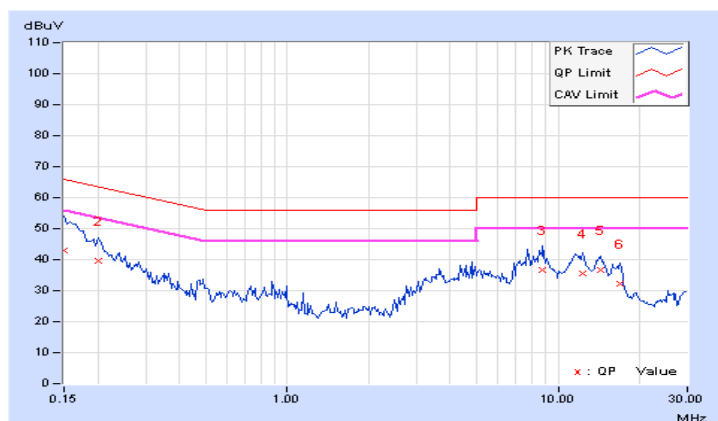


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.20	36.57	22.32	46.77	32.52	66.00	56.00	-19.23	-23.48
2	0.16953	10.20	33.60	18.54	43.80	28.74	64.98	54.98	-21.18	-26.24
3	0.18516	10.20	31.78	15.03	41.98	25.23	64.25	54.25	-22.27	-29.02
4	0.34141	10.23	21.43	13.29	31.66	23.52	59.17	49.17	-27.51	-25.65
5	11.27344	10.88	11.60	6.57	22.48	17.45	60.00	50.00	-37.52	-32.55
6	26.64453	11.80	9.53	5.29	21.33	17.09	60.00	50.00	-38.67	-32.91

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

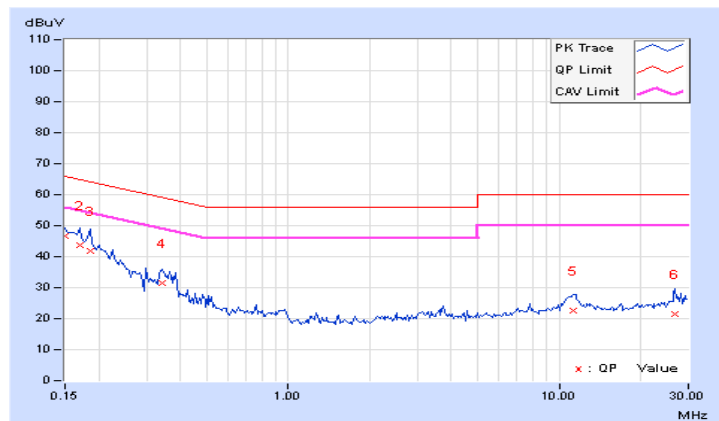


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBUV)		Emission Level (dBUV)		Limit (dBUV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	36.77	22.80	46.96	32.99	66.00	56.00	-19.04	-23.01
2	0.18516	10.18	31.76	15.55	41.94	25.73	64.25	54.25	-22.31	-28.52
3	0.20469	10.17	29.33	13.64	39.50	23.81	63.42	53.42	-23.92	-29.61
4	0.31797	10.21	18.44	4.43	28.65	14.64	59.76	49.76	-31.11	-35.12
5	0.47031	10.24	9.41	0.56	19.65	10.80	56.51	46.51	-36.86	-35.71
6	10.91016	10.71	11.08	3.89	21.79	14.60	60.00	50.00	-38.21	-35.40

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

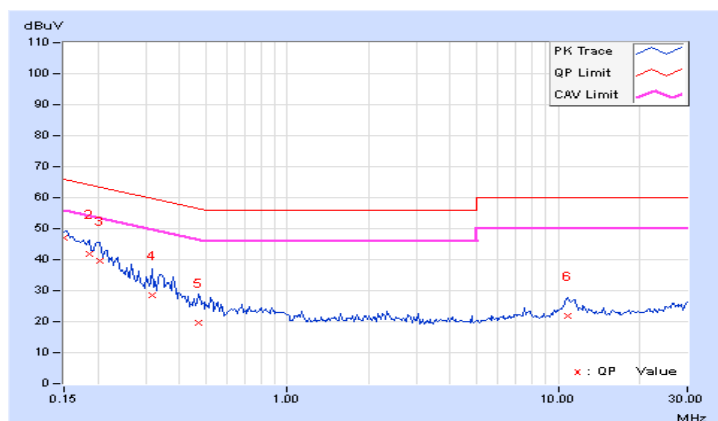


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	7.62	8.12	8.11	8.06	0.5	PASS
6	2437	8.06	8.09	8.09	8.07	0.5	PASS
11	2462	8.09	8.06	8.09	7.63	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.18	15.17	15.18	15.23	0.5	PASS
6	2437	15.20	15.21	15.18	15.17	0.5	PASS
11	2462	15.17	15.18	15.14	15.18	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
1	2412	15.18	15.18	15.16	15.73	0.5	PASS
6	2437	15.21	15.17	15.16	15.78	0.5	PASS
11	2462	15.19	15.75	15.17	15.42	0.5	PASS

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
3	2422	35.94	36.34	36.45	35.90	0.5	PASS
6	2437	36.45	36.45	36.43	36.46	0.5	PASS
9	2452	36.50	36.03	35.99	36.53	0.5	PASS

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH1

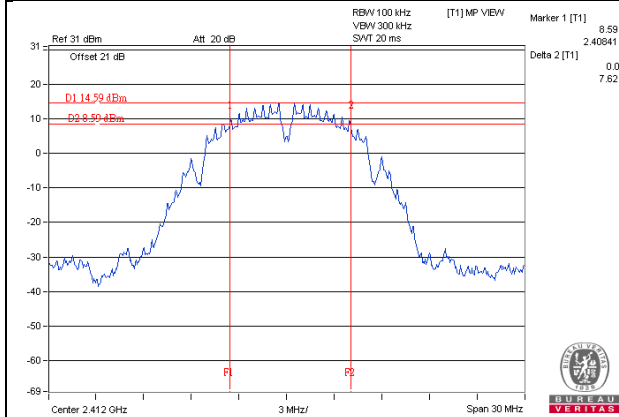


802.11g / Chain 2 : CH11

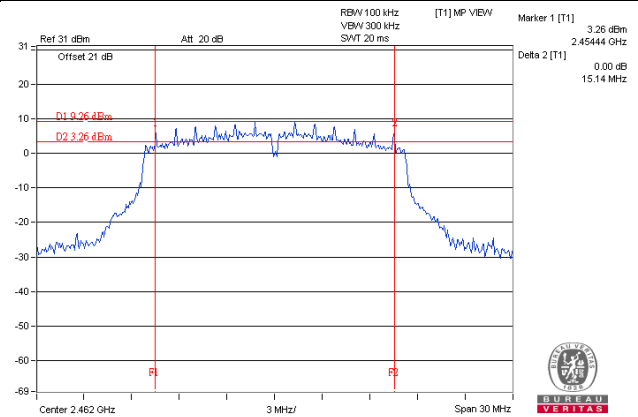

802.11n (HT20) / Chain 2 : CH1

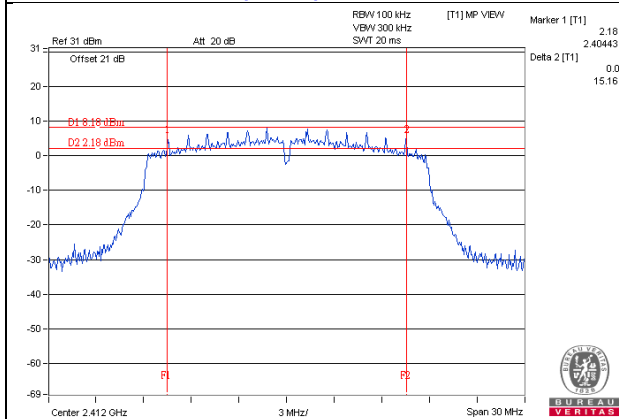

802.11n (HT40) / Chain 3 : CH3

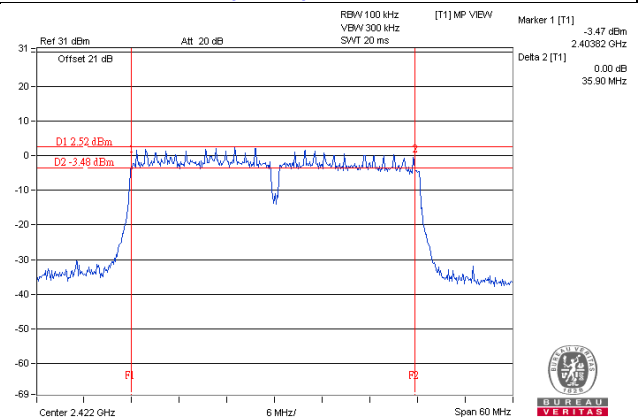

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

A average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

CDD Mode

802.11b

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	22.60	22.07	21.40	20.60	595.888	27.75	30.00	Pass
6	2437	23.64	22.75	22.10	21.64	727.633	28.62	30.00	Pass
11	2462	23.70	22.72	22.19	21.70	734.979	28.66	30.00	Pass

802.11g

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.49	20.18	19.98	20.15	419.231	26.22	30.00	Pass
6	2437	24.02	23.85	24.03	23.90	993.41	29.97	30.00	Pass
11	2462	20.99	20.31	20.99	20.60	473.42	26.75	30.00	Pass

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.09	19.94	19.90	19.52	387.982	25.89	30.00	Pass
6	2437	23.98	23.87	23.98	24.05	997.948	29.99	30.00	Pass
11	2462	20.87	20.17	20.76	20.24	450.978	26.54	30.00	Pass

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	17.61	17.21	17.31	17.45	219.696	23.42	30.00	Pass
6	2437	20.31	19.70	19.67	19.87	390.458	25.92	30.00	Pass
9	2452	19.60	19.16	19.28	19.17	340.942	25.33	30.00	Pass

Beamforming Mode-NSS1

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.09	19.94	19.90	19.52	387.982	25.89	27.51	Pass
6	2437	21.45	21.45	21.42	21.60	562.494	27.50	27.51	Pass
11	2462	20.87	20.17	20.76	20.24	450.978	26.54	27.51	Pass

Note: Directional gain = 8.49dBi > 6dBi, so the power limit shall be reduced to $30 - (8.49 - 6) = 27.51$ dBm.

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	17.61	17.21	17.31	17.45	219.696	23.42	27.51	Pass
6	2437	20.31	19.70	19.67	19.87	390.458	25.92	27.51	Pass
9	2452	19.60	19.16	19.28	19.17	340.942	25.33	27.51	Pass

Note: Directional gain = 8.49dBi > 6dBi, so the power limit shall be reduced to $30 - (8.49 - 6) = 27.51$ dBm.

Beamforming Mode-NSS2

802.11n (HT20)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
1	2412	20.09	19.94	19.90	19.52	387.982	25.89	30.00	Pass
6	2437	23.98	23.87	23.98	24.05	997.948	29.99	30.00	Pass
11	2462	20.87	20.17	20.76	20.24	450.978	26.54	30.00	Pass

Note: Directional gain = 5.48dBi < 6dBi, so the power limit shall be not reduced.

802.11n (HT40)

Chan.	Freq. (MHz)	Average Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
3	2422	17.61	17.21	17.31	17.45	219.696	23.42	30.00	Pass
6	2437	20.31	19.70	19.67	19.87	390.458	25.92	30.00	Pass
9	2452	19.60	19.16	19.28	19.17	340.942	25.33	30.00	Pass


Note: Directional gain = 5.48dBi < 6dBi, so the power limit shall be not reduced.

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-5.17	6.02	0.85	5.51	Pass
	6	2437	-4.96	6.02	1.06	5.51	Pass
	11	2462	-3.83	6.02	2.19	5.51	Pass
1	1	2412	-8.92	6.02	-2.90	5.51	Pass
	6	2437	-8.31	6.02	-2.29	5.51	Pass
	11	2462	-8.23	6.02	-2.21	5.51	Pass
2	1	2412	-9.61	6.02	-3.59	5.51	Pass
	6	2437	-9.28	6.02	-3.26	5.51	Pass
	11	2462	-8.93	6.02	-2.91	5.51	Pass
3	1	2412	-10.32	6.02	-4.30	5.51	Pass
	6	2437	-9.54	6.02	-3.52	5.51	Pass
	11	2462	-9.66	6.02	-3.64	5.51	Pass

NOTE: Directional gain = 8.49dBi > 6dBi , so the power density limit shall be reduced to $8-(8.49-6) = 5.51\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-7.27	6.02	-1.25	5.51	Pass
	6	2437	-6.82	6.02	-0.80	5.51	Pass
	11	2462	-6.28	6.02	-0.26	5.51	Pass
1	1	2412	-10.72	6.02	-4.70	5.51	Pass
	6	2437	-8.14	6.02	-2.12	5.51	Pass
	11	2462	-10.56	6.02	-4.54	5.51	Pass
2	1	2412	-12.06	6.02	-6.04	5.51	Pass
	6	2437	-7.01	6.02	-0.99	5.51	Pass
	11	2462	-11.10	6.02	-5.08	5.51	Pass
3	1	2412	-12.07	6.02	-6.05	5.51	Pass
	6	2437	-7.60	6.02	-1.58	5.51	Pass
	11	2462	-10.89	6.02	-4.87	5.51	Pass

NOTE: Directional gain = 8.49dBi > 6dBi , so the power density limit shall be reduced to $8-(8.49-6) = 5.51\text{dBm}$.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	1	2412	-7.10	6.02	-1.08	5.51	Pass
	6	2437	-7.29	6.02	-1.27	5.51	Pass
	11	2462	-8.87	6.02	-2.85	5.51	Pass
1	1	2412	-13.64	6.02	-7.62	5.51	Pass
	6	2437	-9.01	6.02	-2.99	5.51	Pass
	11	2462	-12.43	6.02	-6.41	5.51	Pass
2	1	2412	-13.77	6.02	-7.75	5.51	Pass
	6	2437	-9.78	6.02	-3.76	5.51	Pass
	11	2462	-13.29	6.02	-7.27	5.51	Pass
3	1	2412	-13.72	6.02	-7.70	5.51	Pass
	6	2437	-8.69	6.02	-2.67	5.51	Pass
	11	2462	-12.76	6.02	-6.74	5.51	Pass

Directional gain = 8.49dBi > 6dBi , so the power density limit shall be reduced to $8-(8.49-6) = 5.51$ dBm.


802.11n (HT40)

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=4) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
0	3	2422	-18.06	6.02	-12.04	5.51	Pass
	6	2437	-12.23	6.02	-6.21	5.51	Pass
	9	2452	-15.81	6.02	-9.79	5.51	Pass
1	3	2422	-18.42	6.02	-12.40	5.51	Pass
	6	2437	-15.63	6.02	-9.61	5.51	Pass
	9	2452	-16.21	6.02	-10.19	5.51	Pass
2	3	2422	-20.18	6.02	-14.16	5.51	Pass
	6	2437	-16.72	6.02	-10.70	5.51	Pass
	9	2452	-17.03	6.02	-11.01	5.51	Pass
3	3	2422	-19.66	6.02	-13.64	5.51	Pass
	6	2437	-16.94	6.02	-10.92	5.51	Pass
	9	2452	-17.70	6.02	-11.68	5.51	Pass


Directional gain = 8.49dBi > 6dBi , so the power density limit shall be reduced to $8-(8.49-6) = 5.51$ dBm.

Spectrum Plot of Worst Value


802.11b / Chain 0 : CH11

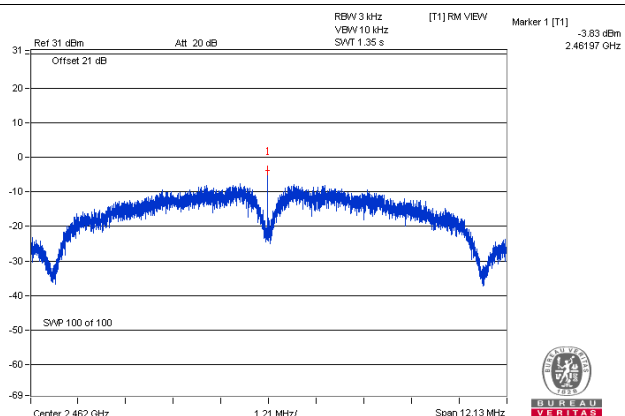


802.11g / Chain 0 : CH11

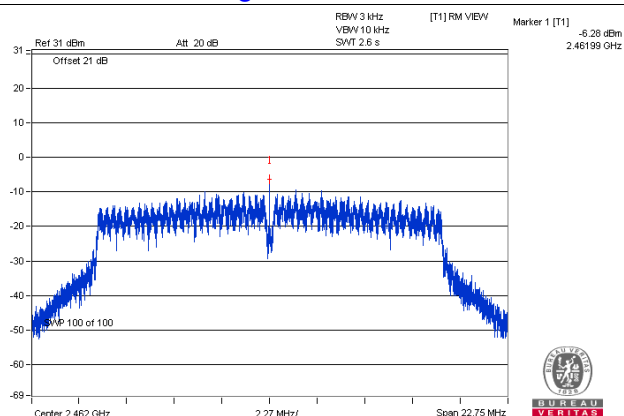

802.11n (HT20) / Chain 0 : CH1

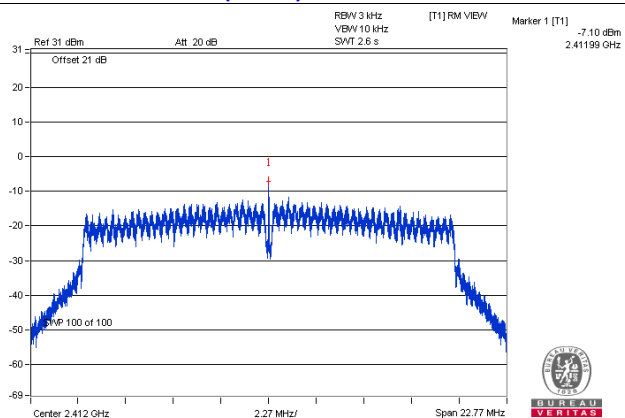

802.11n (HT40) / Chain 0 : CH6

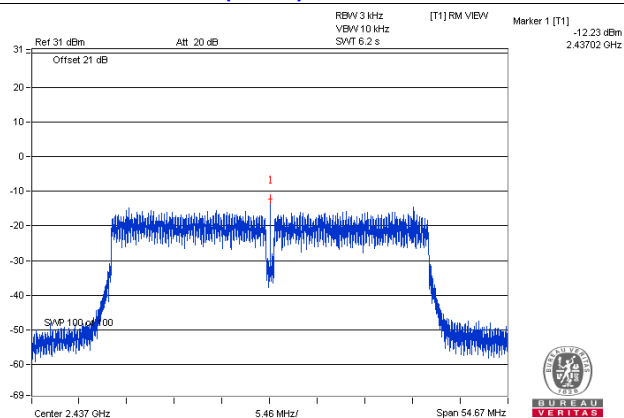


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

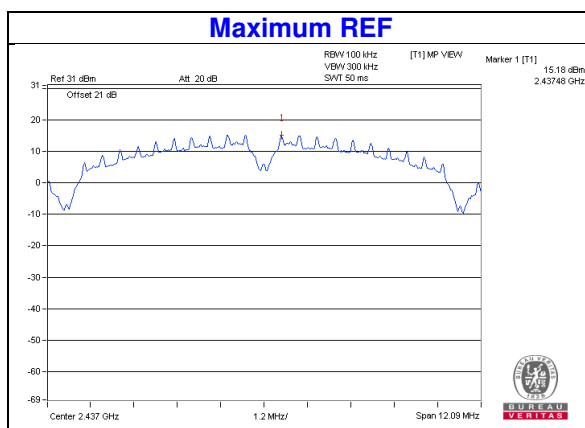


Chain 0

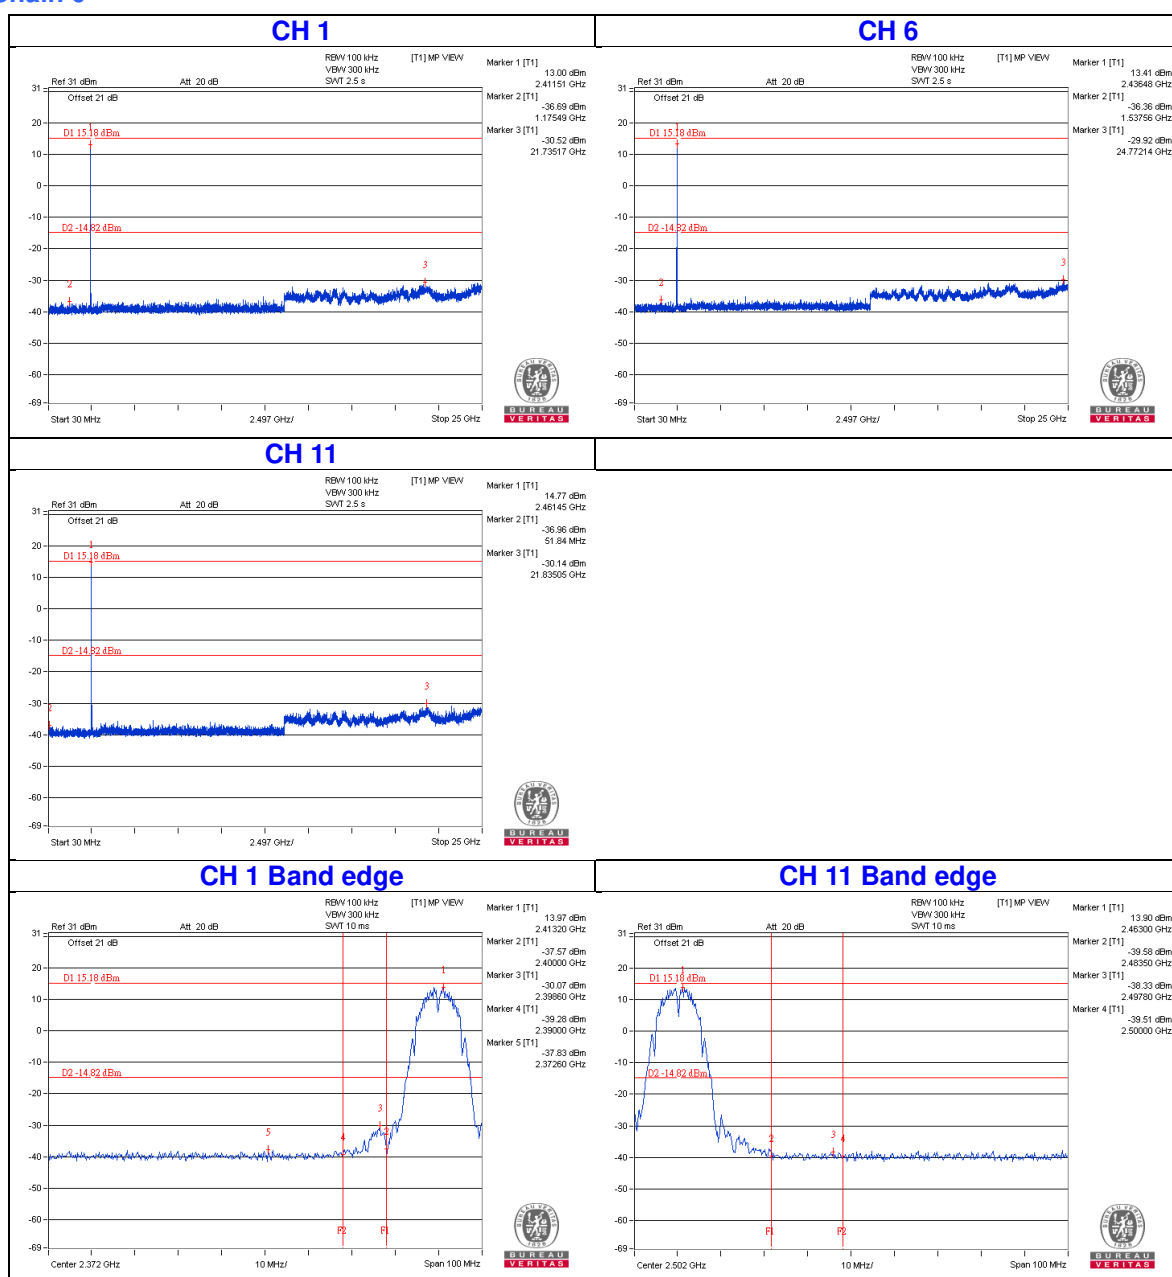


Chain 1

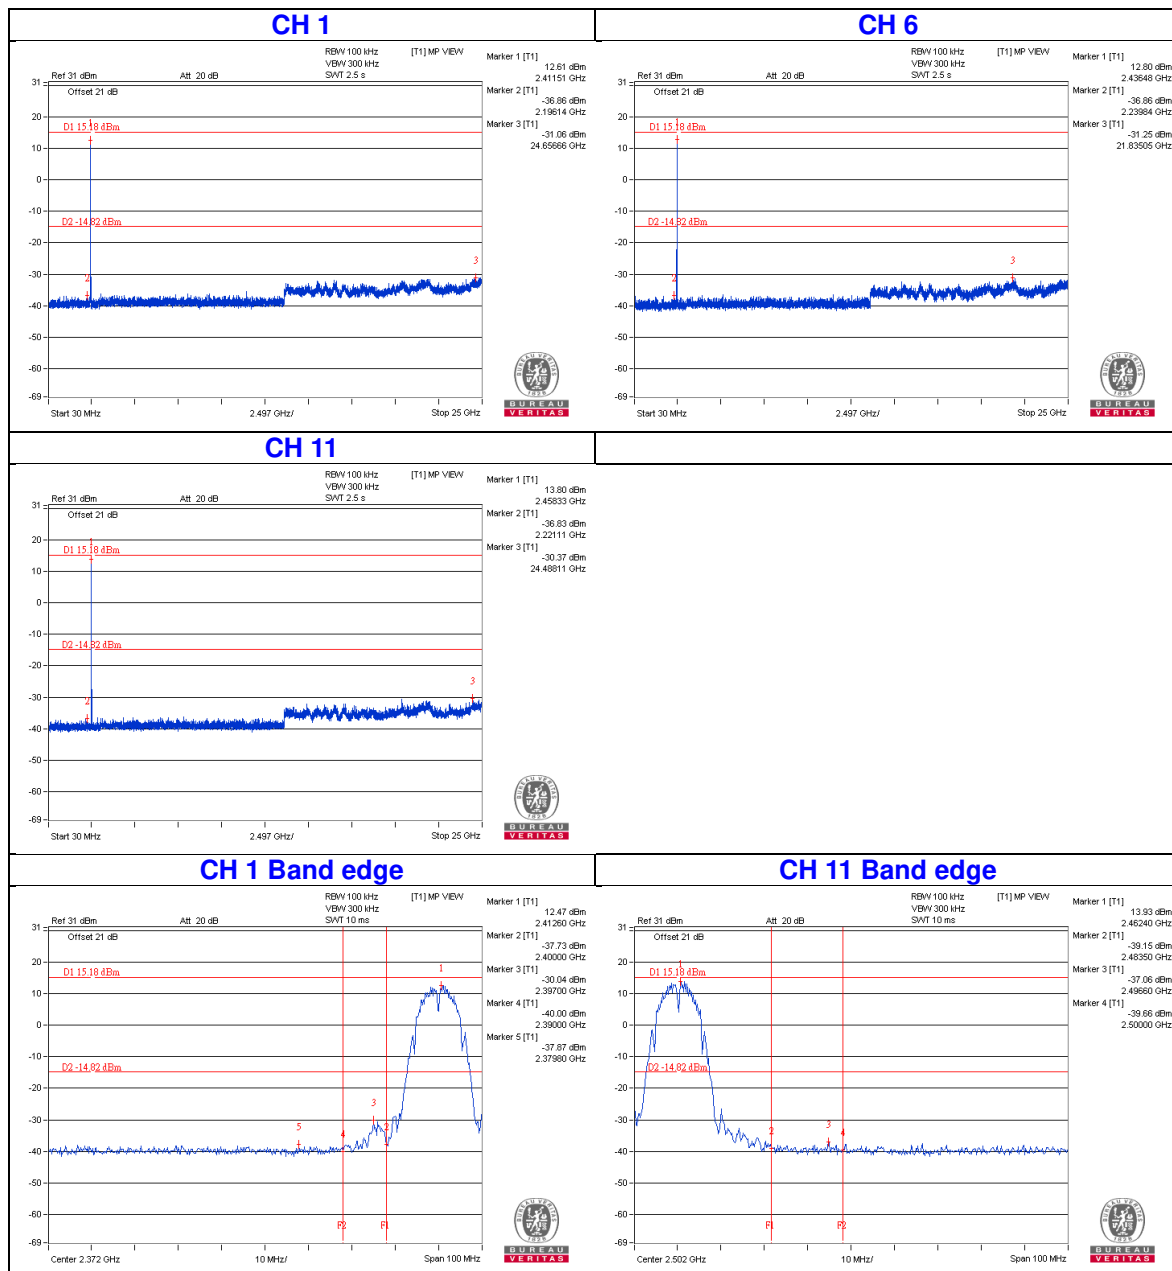


Chain 2

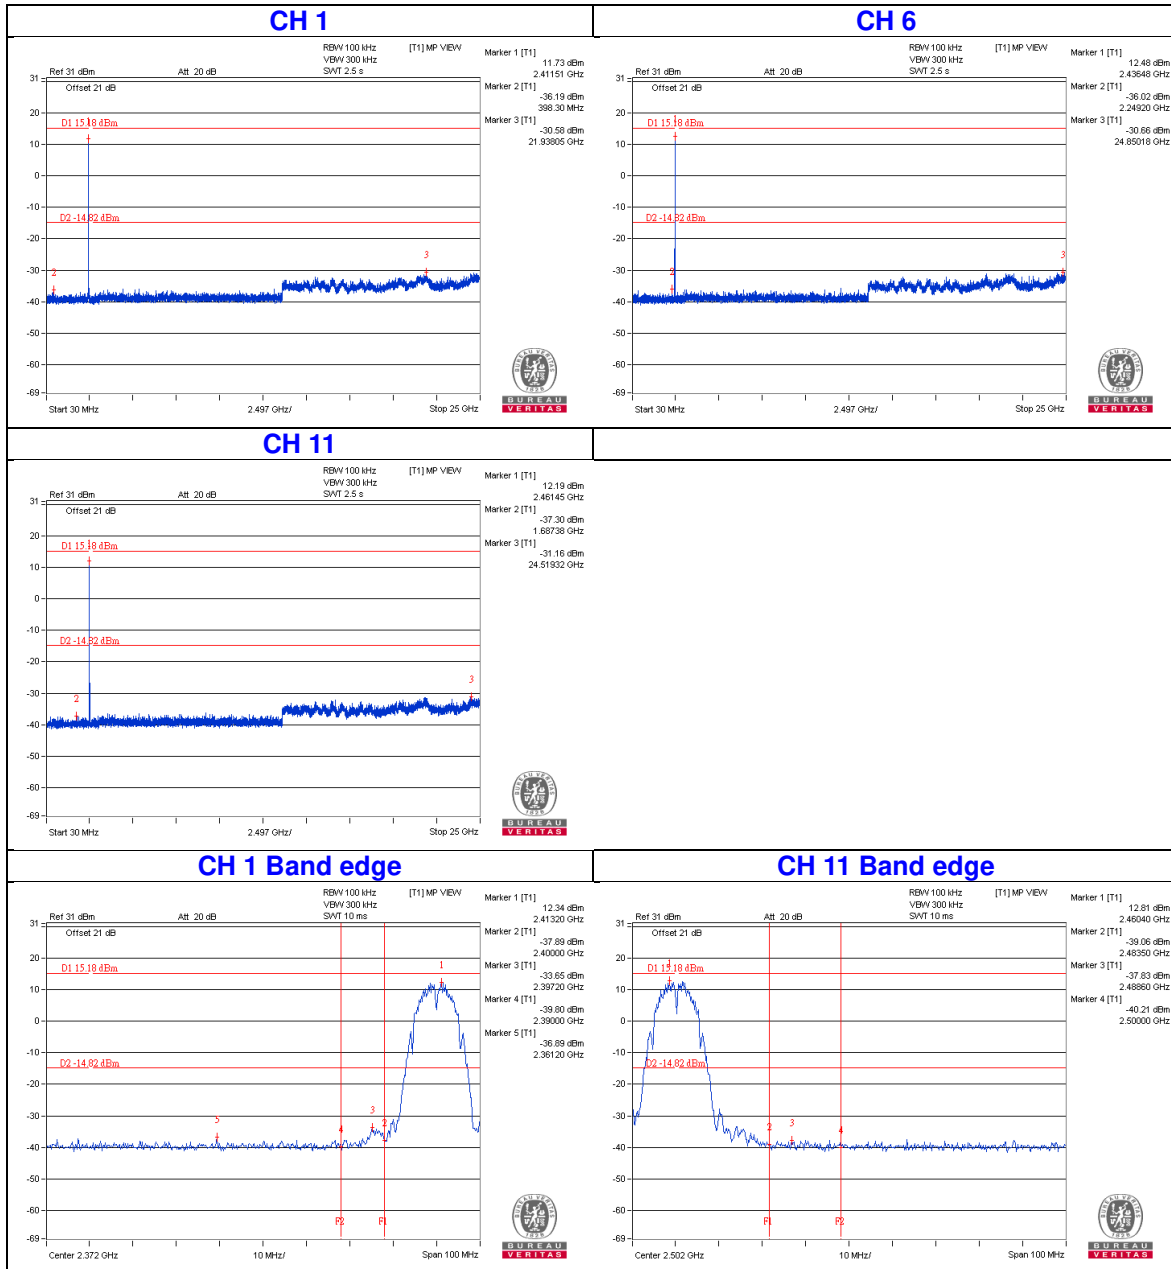


Chain 3

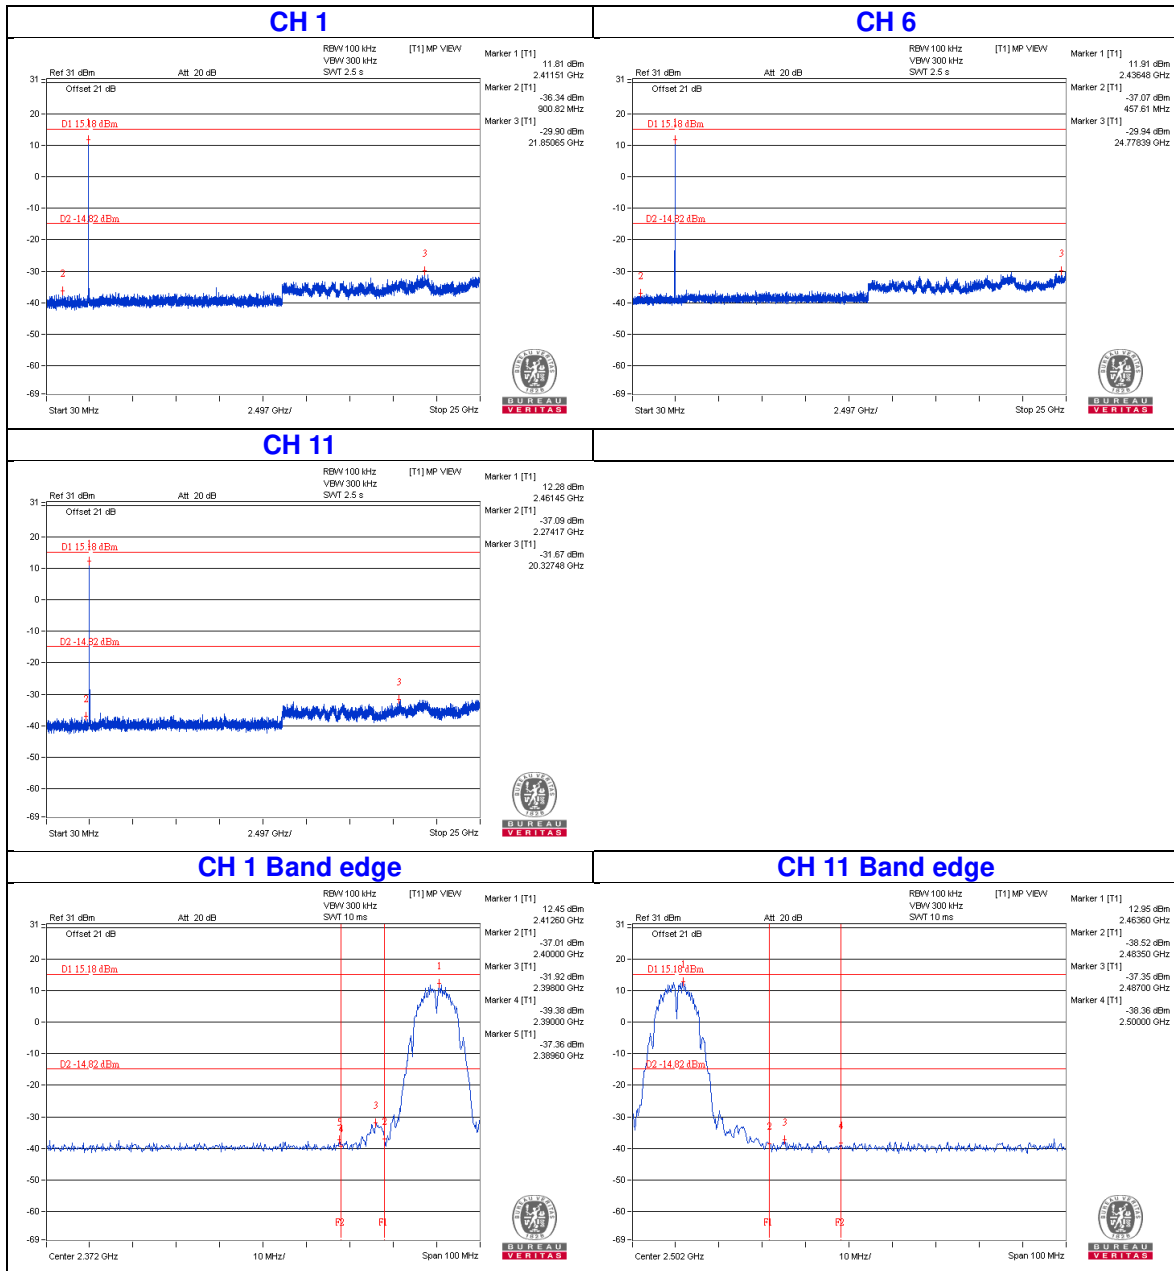


802.11g

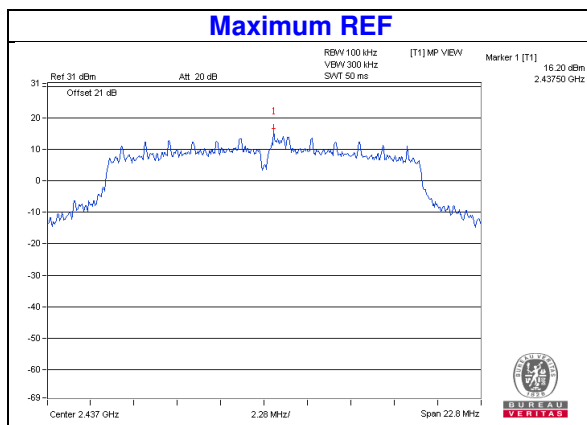


Chain 0

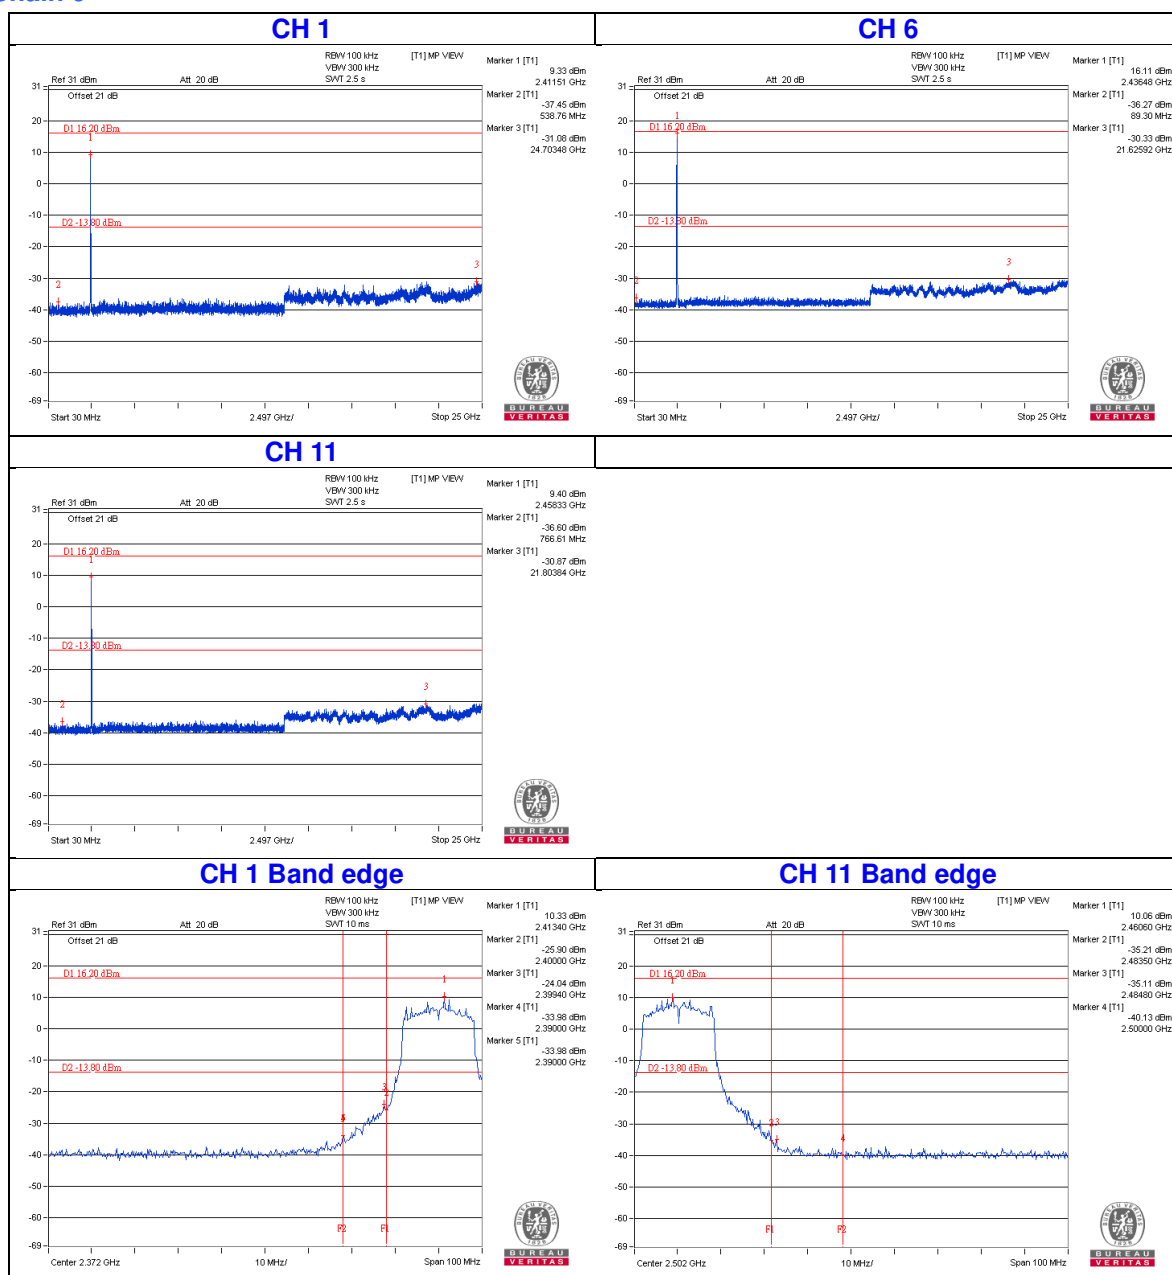


Chain 1

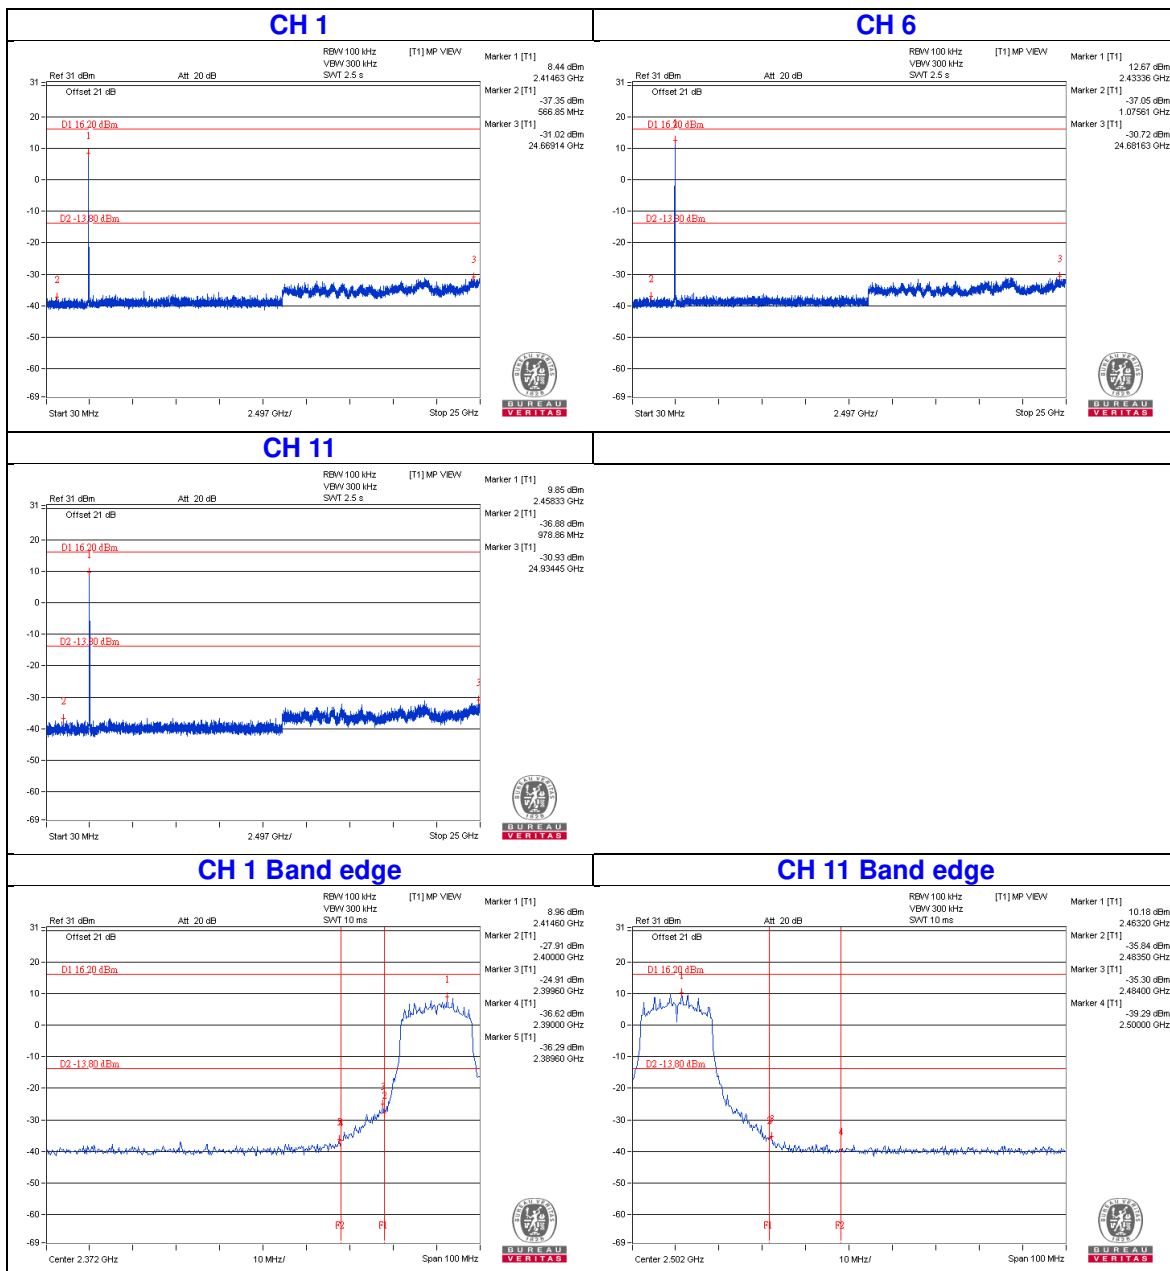


Chain 2

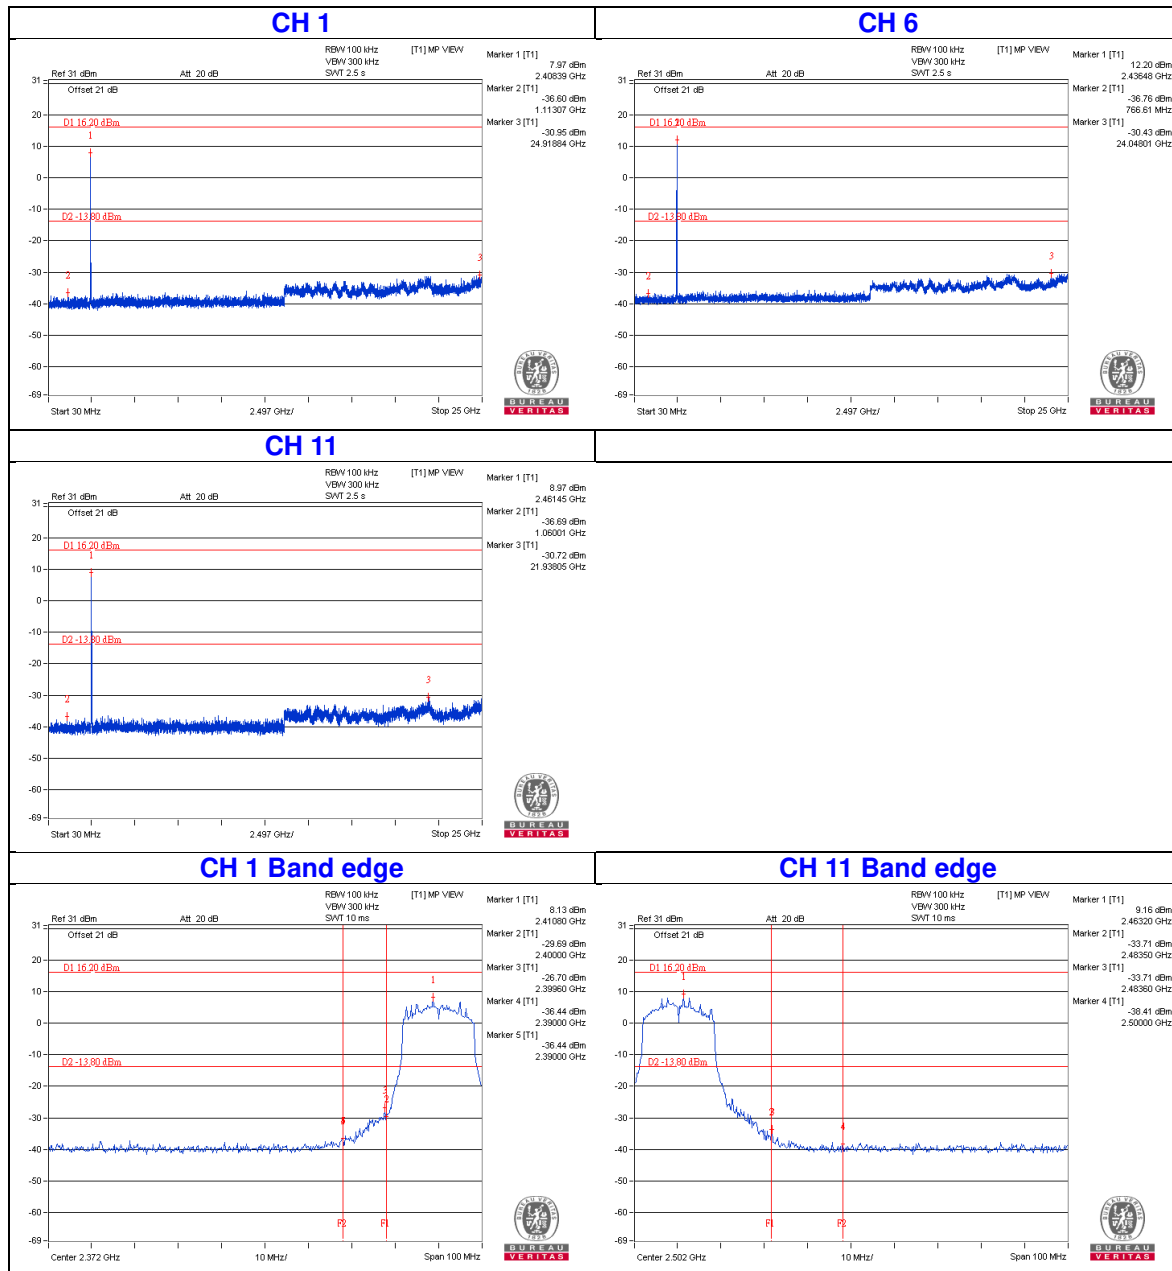


Chain 3

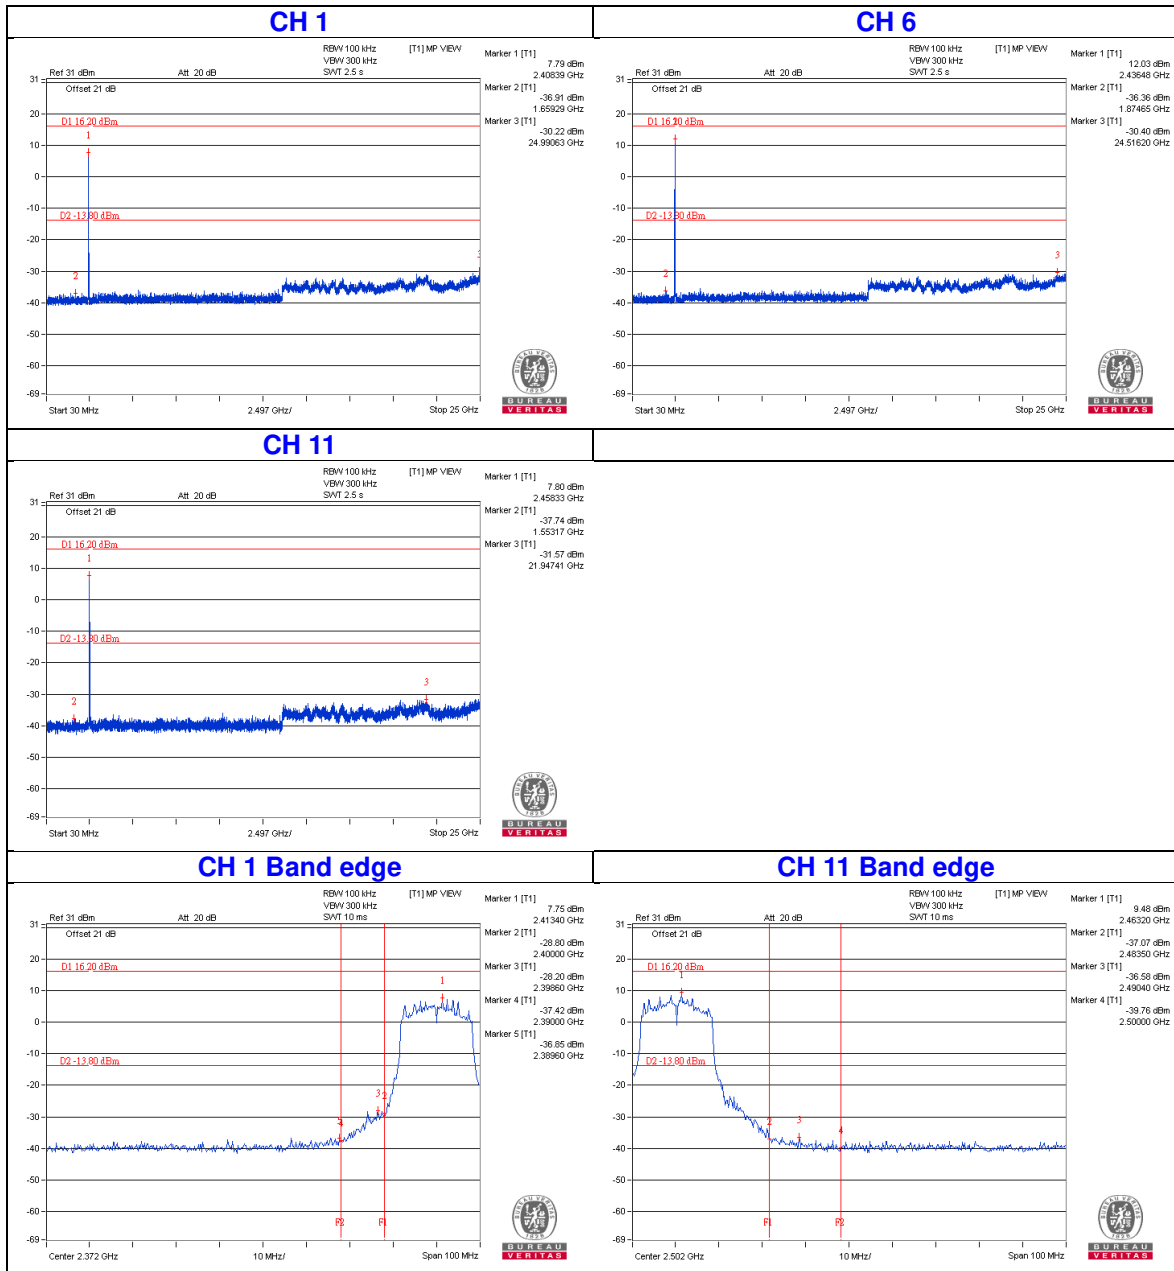


802.11n (HT20)

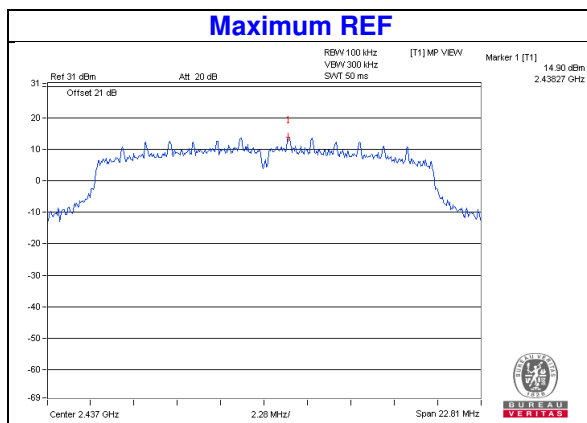


Chain 0

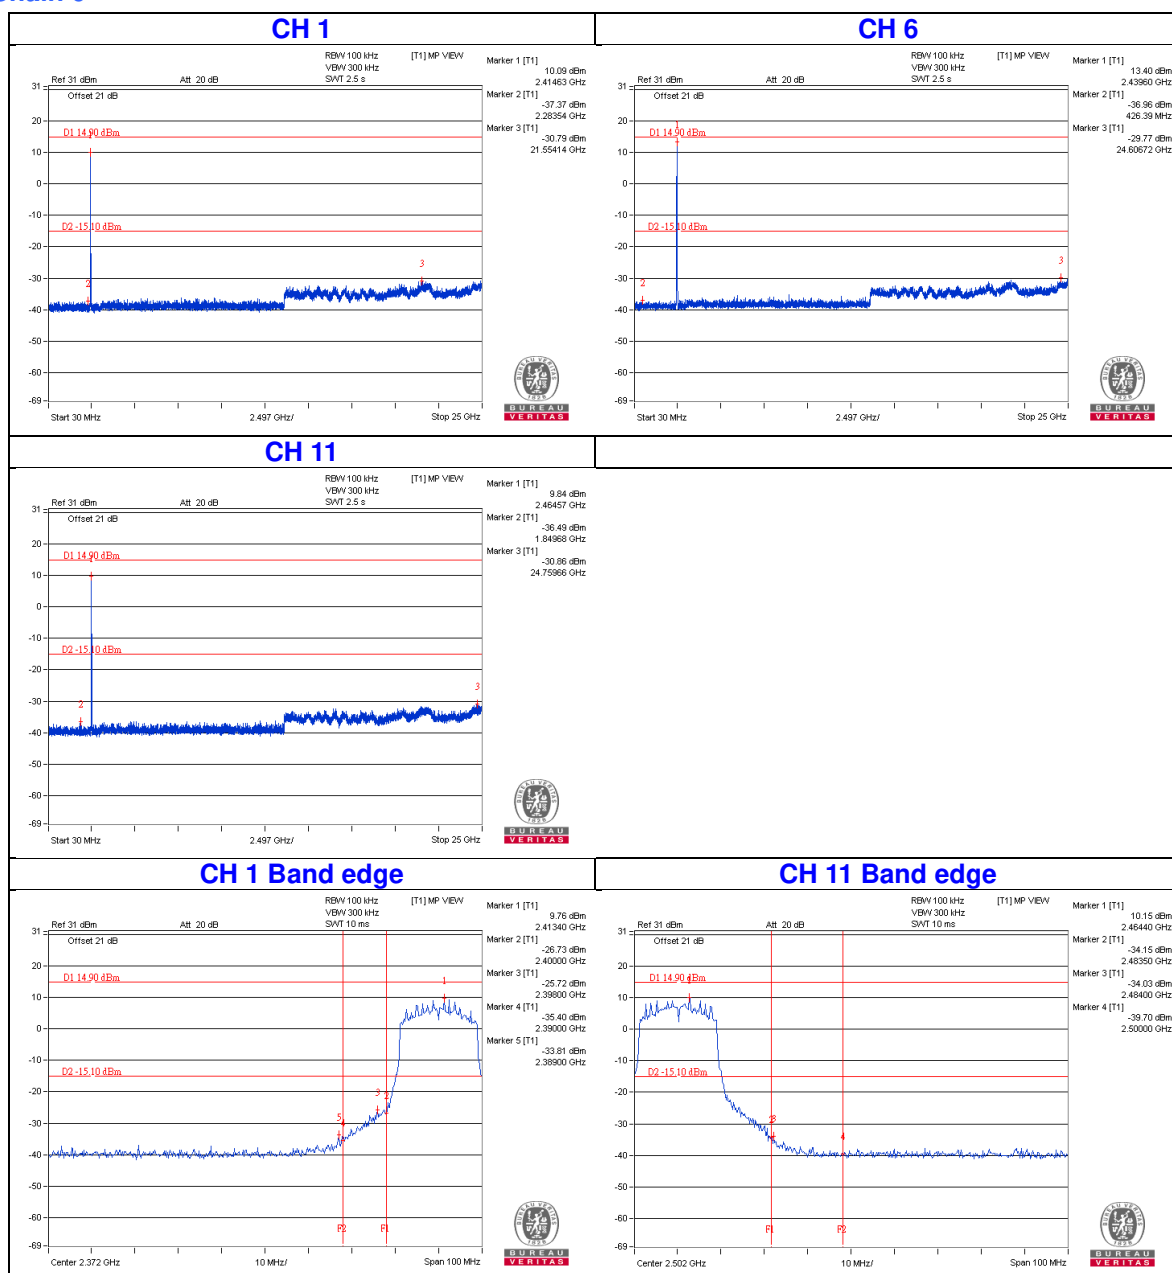


Chain 1

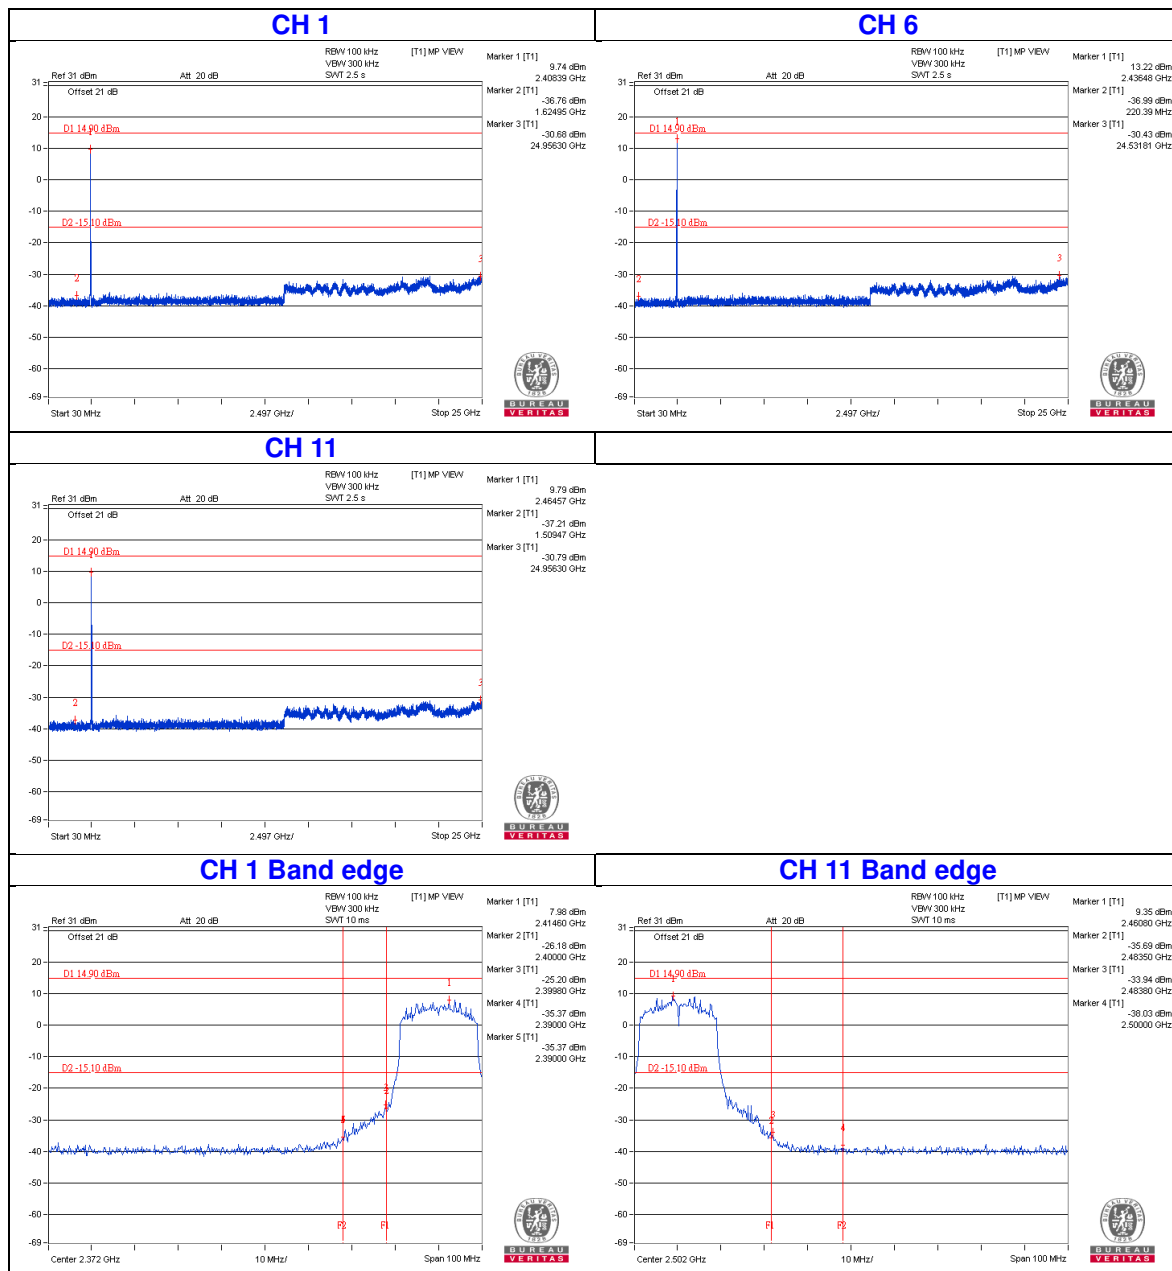


Chain 2

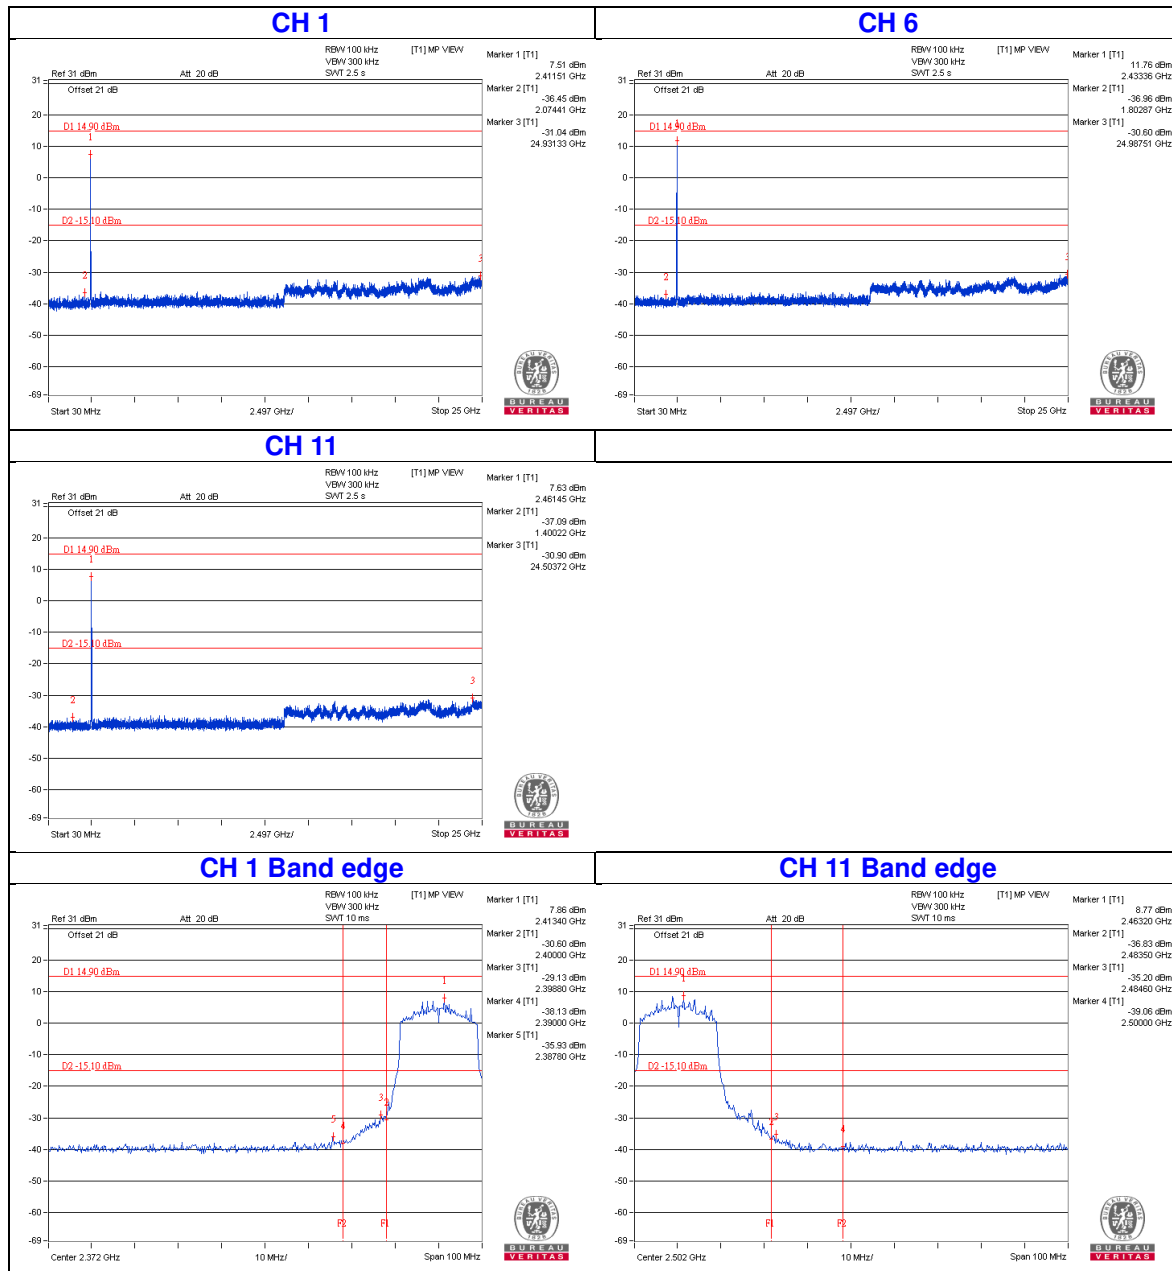


Chain 3

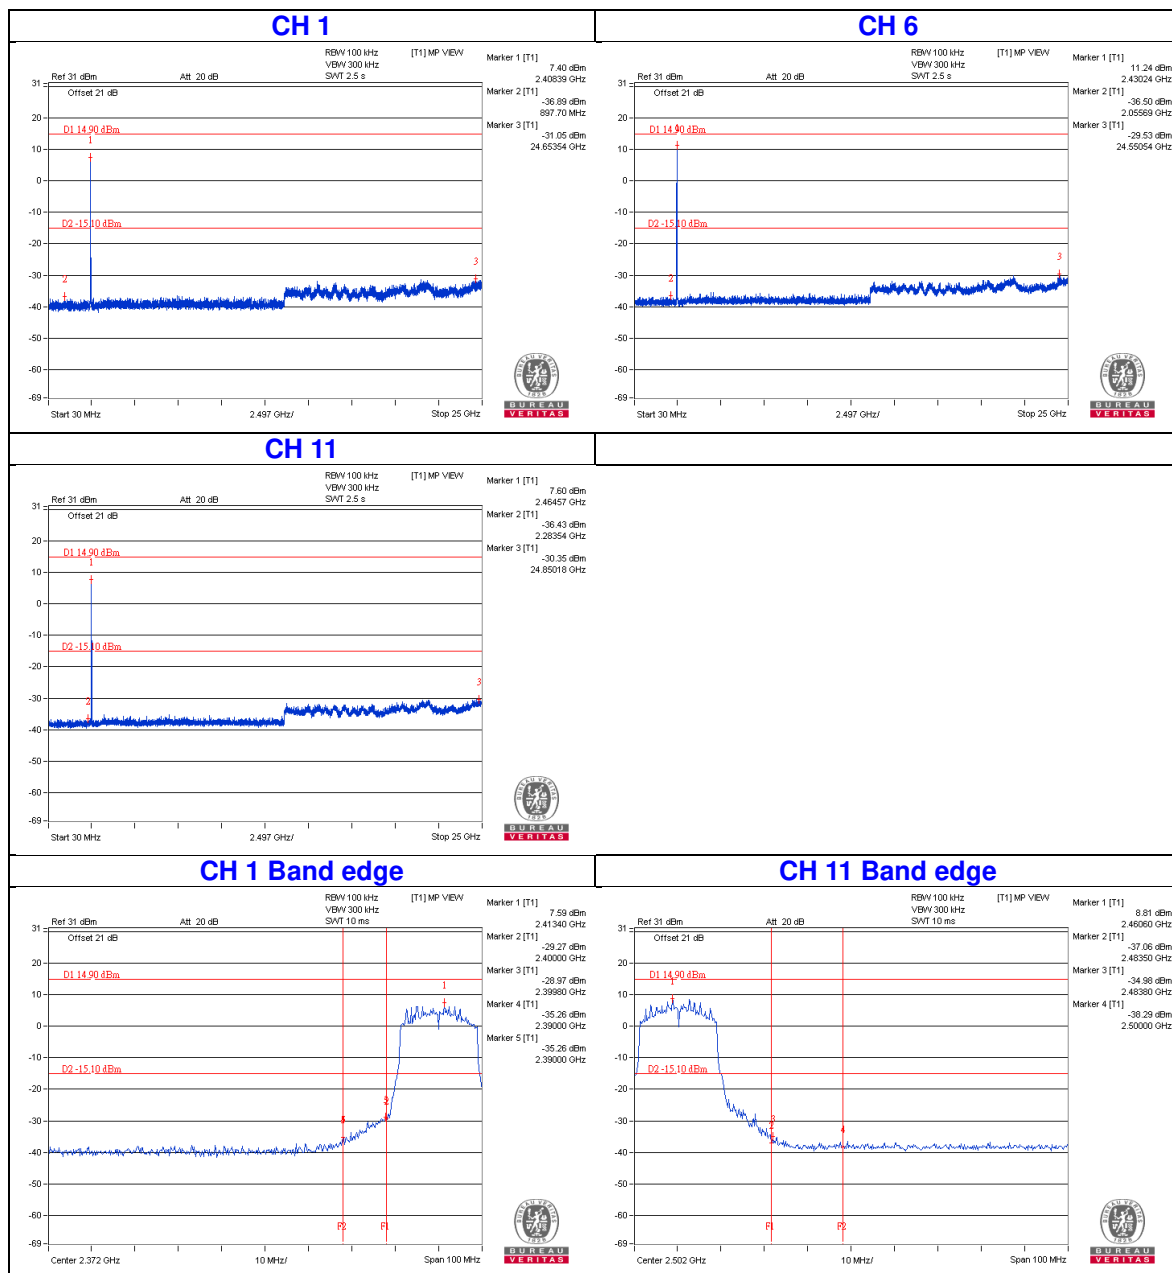


802.11n (HT40)

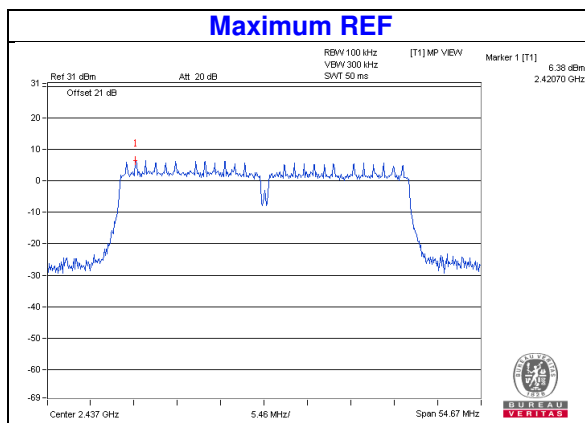


Chain 0

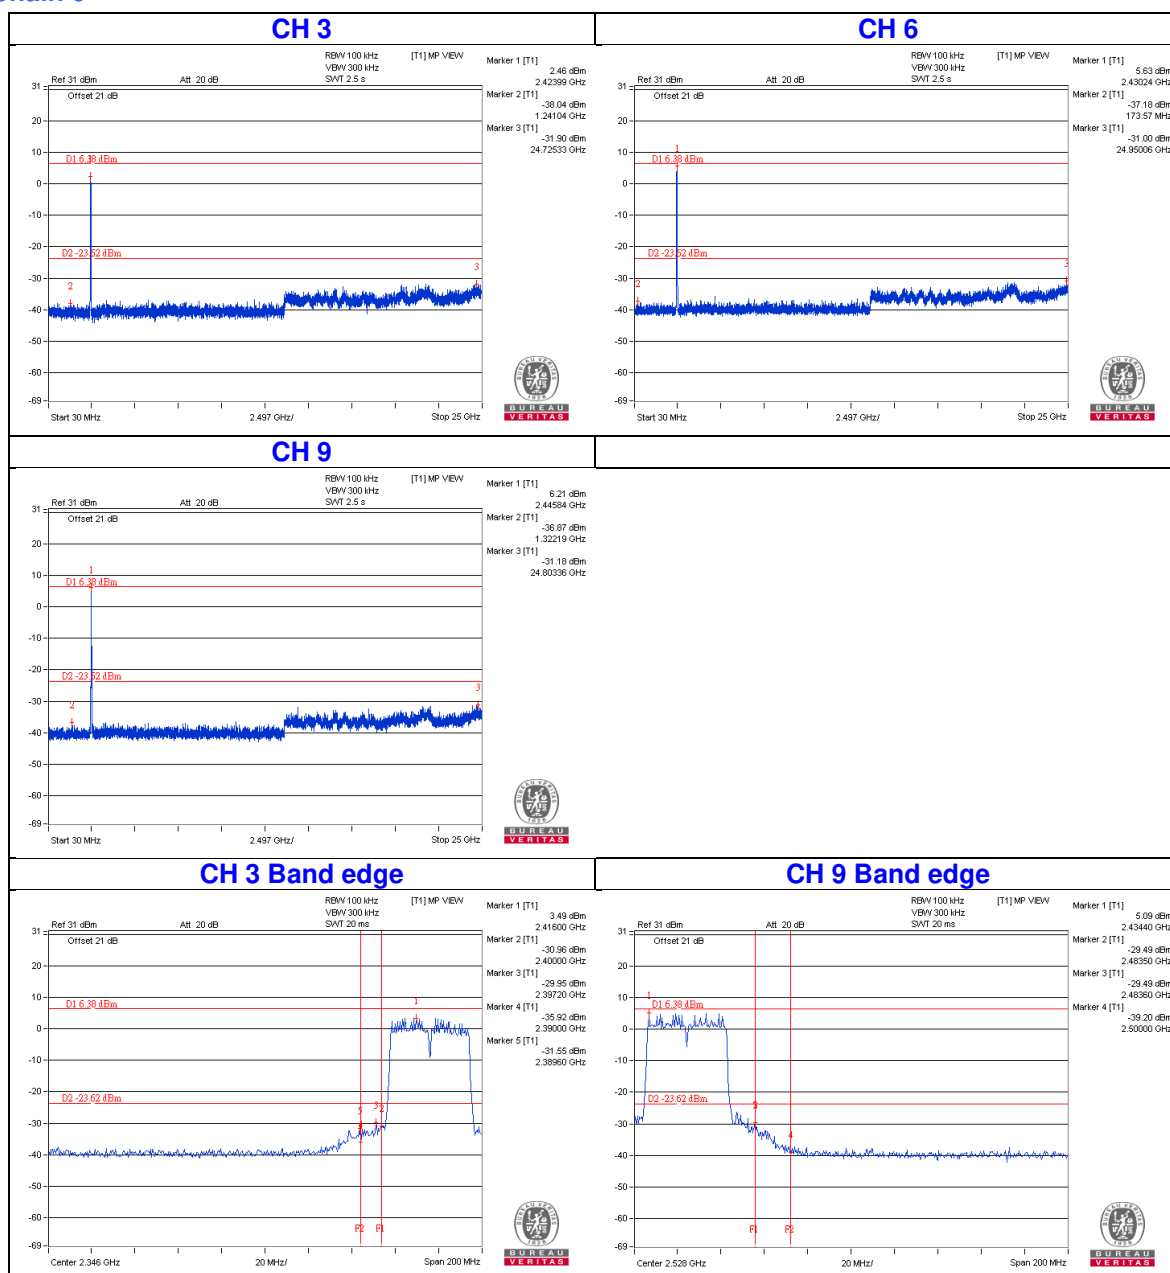


Chain 1

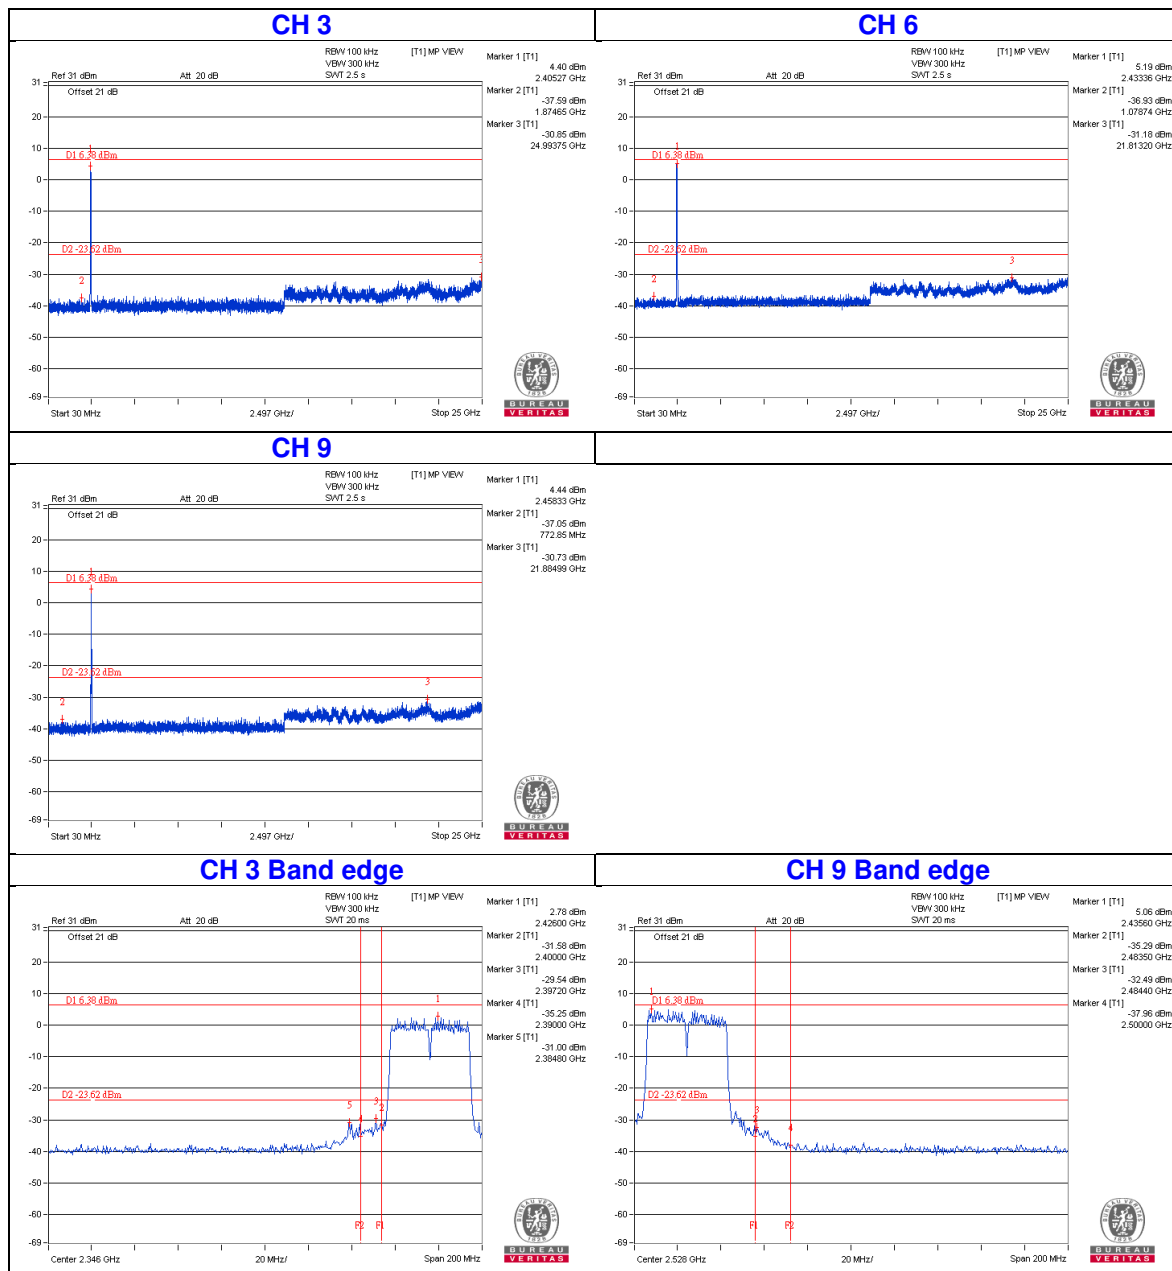

Chain 2

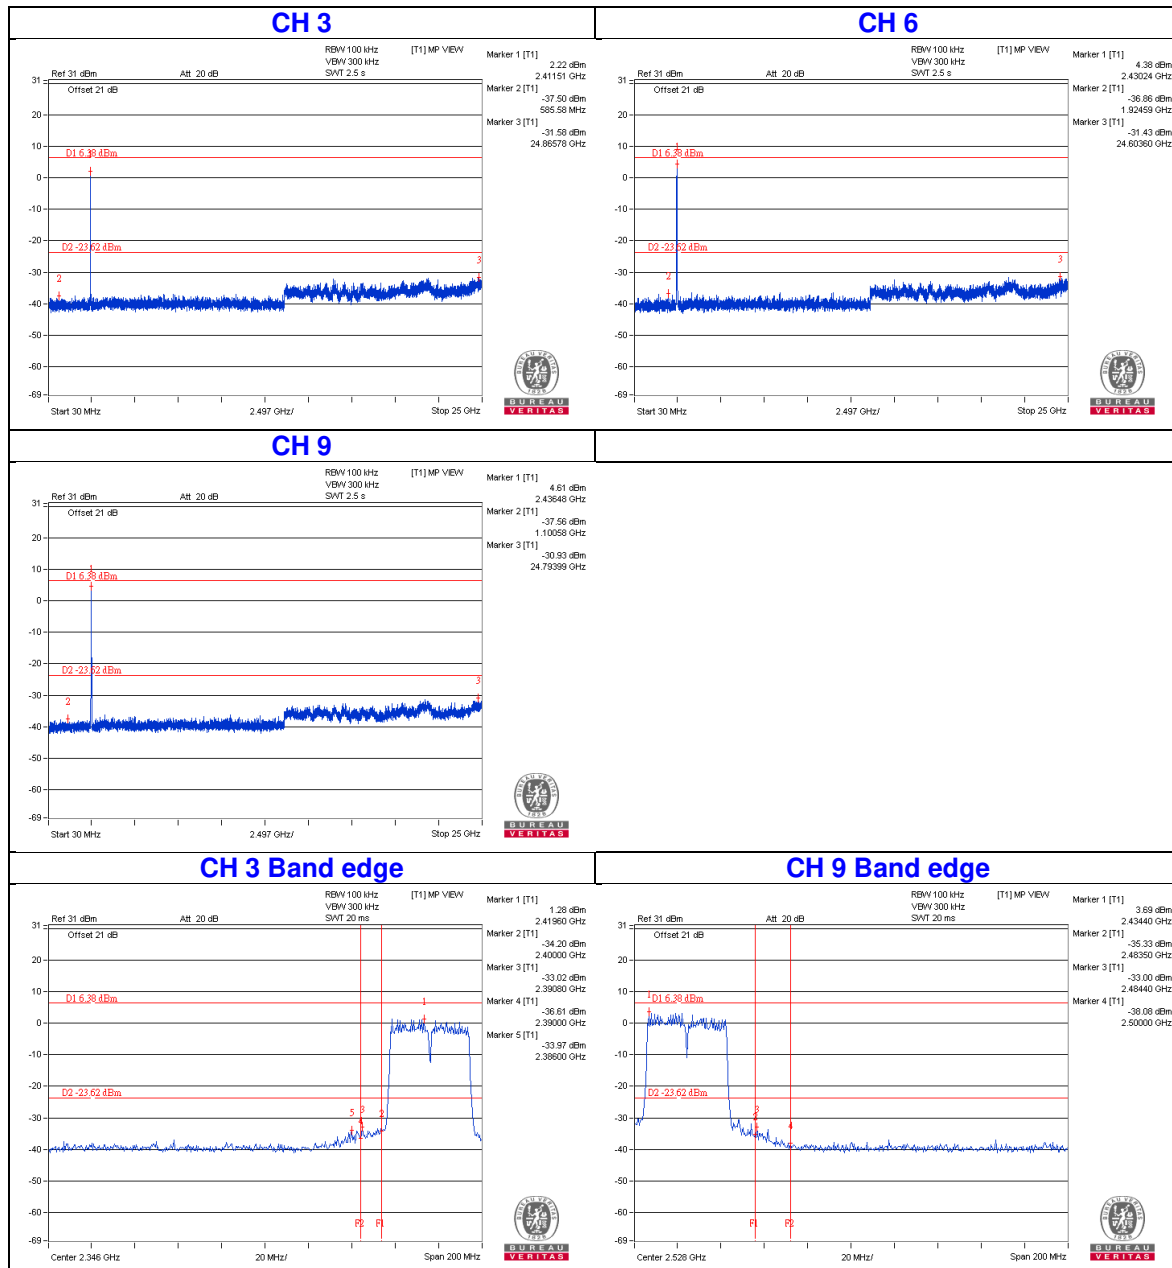

Chain 3

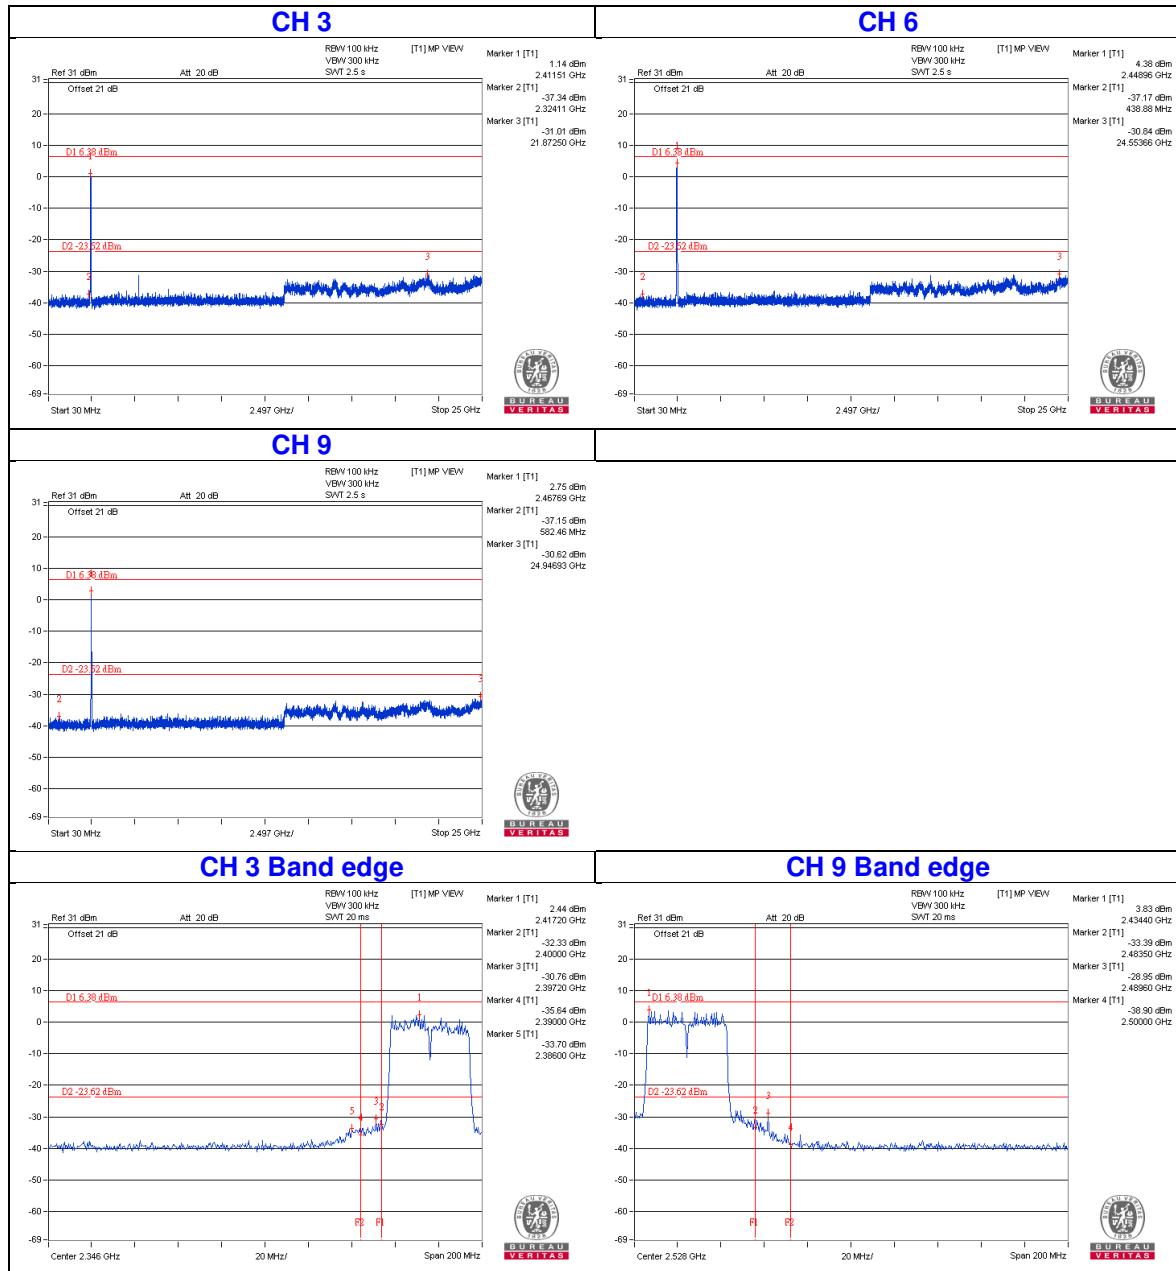

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---