

#### **PCTEST**

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



## **HEARING AID COMPATIBILITY**

**Applicant Name:** 

Samsung Electronics Co., Ltd. 129, Samsung-ro, Maetan dong, Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea Date of Testing: 10/4/2021 – 11/9/2021 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2109090103-22-R1.A3L Date of Issue: 11/12/2021

FCC ID: A3LSMS906U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset Model: SM-S906U Additional Model(s): SM-S906U1

**Test Device Serial No.:** Pre-Production Sample [S/N: 1234M]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

Note: This revised Test Report (S/N: 1M2109090103-22-R1.A3L) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 1 of 109
1M2109090103-22-R1 A3I	10/4/2021 - 11/10/2021	Portable Handset		Page 1 of 108

# TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	18
6.	VONR TEST SYSTEM SETUP AND DUT CONFIGURATION	22
7.	VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION	26
8.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	31
9.	FCC 3G MEASUREMENTS	35
10.	T-COIL TEST SUMMARY	36
11.	MEASUREMENT UNCERTAINTY	57
12.	EQUIPMENT LIST	58
13.	TEST DATA	59
14.	CALIBRATION CERTIFICATES	96
15.	CONCLUSION	103
16.	REFERENCES	104
17.	TEST SETUP PHOTOGRAPHS	106

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 2 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 2 of 108

#### 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

#### **Compatibility Tests Involved:**

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

<sup>&</sup>lt;sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 3 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 3 01 106

© 2021 PCTEST

### 2. DUT DESCRIPTION



FCC ID: A3LSMS906U

Applicant: Samsung Electronics Co., Ltd.

129, Samsung-ro, Maetan dong,

Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea

Model: SM-S906U
Additional Model(s): SM-S906U1
Serial Number: 1234M

HW Version: REV1.0

SW Version: S906USQU0AUIC
Antenna: Internal Antenna
DUT Type: Portable Handset

#### I. LTE Band Selection

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range. However, overlapped LTE bands which are anchor bands for dual connectivity (EN-DC) scenarios between LTE and NR were evaluated as independent LTE bands.

#### II. NR Band Selection

This device supports NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an NR band falls completely within an NR band with a larger transmission frequency range, both NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both NR bands share the same transmission path and signal characteristics, hearing-aid compatibility compliance was only assessed for the band with the larger transmission frequency range.

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 4 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 4 of 100

1M2109090103-22-R1.A3L | 10/4/2021 – 11/10/2021 | Portable Handset | © 2021 PCTEST | REV 3.5.N

# Table 2-1 A3LSMS906U HAC Air Interfaces

				SWISSUBU HAC AIR IIILERIA			
Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated	
GSM	850 1900	VO	Yes	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	EFR	
	GPRS/EDGE	VD	Yes	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS	
	850						
	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	NB AMR, WB AMR	
UMTS	1900						
	HSPA	VD	Yes	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS	
	680 (B71)		Yes <sup>3</sup>				
	700 (B12)						
	780 (B13)						
	790 (B14)						
	850 (B5)						
LTE (FDD)	850 (B26) 1700 (B4)	VD	Ves	Yes: NR, WIFI or BT	VoLTE <sup>1</sup> , Google Duo <sup>2</sup>	Volte: NB AMR, WB AMR, EVS Google Duo: OPUS	
	1700 (B4) 1700 (B66)		res	Yes	Google Duo. Of GS		
	1900 (B2)						
	1900 (B25)						
	2300 (B30)						
	2500 (B7)						
	2600 (B41)						
LTE (TDD)	2600 (B38)	VD	Yes	Yes: NR, WIFI or BT	VoLTE¹, Google Duo²	Volte: NB AMR, WB AMR, EVS Google Duo: OPUS	
	3600 (B48)					Google Duo. Or 03	
	680 (n71)		Yes <sup>3</sup>				
	700 (n12)						
	850 (n5)						
NR (FDD)	1700 (n66)	VD		Yes: LTE, WIFI or BT	VoNR², Google Duo²	Vonr: NB AMR, WB AMR, EVS	
(1.55)	1900 (n2)		Yes	Yes	vollet, doogle bad	Google	Google Duo: OPUS
	1900 (n25)						
	2300 (n30)						
	2500 (n7)						
	2600 (n41)						
	2600 (n38) 3500 (n77, DoD)		Yes		VoNR², Google Duo²		
NR (TDD)	3700 (n77)	VD		Yes: LTE, WIFI or BT		Vonr: NB AMR, WB AMR, EVS	
Wit (100)	24500 (n258)			163. E12, WIIT 61 B1		Google Duo: OPUS	
	28000 (n261)		No <sup>4</sup>		Google Duo²		
	39000 (n260)						
	2450						
	5200 (U-NII 1)						
	5300 (U-NII 2A)		Yes				
	5500 (U-NII 2C)		163				
WIFI	5800 (U-NII 3)	VD		Yes: GSM, UMTS, LTE, or NR	VoWIFI², Google Duo²	VoWIFI: NB AMR, WB AMR, EVS	
	5900 (U-NII 4)			,,,,,,	,	Google Duo: OPUS	
	6175 (U-NII 5)						
	6475 (U-NII 6)		No <sup>5</sup>				
	6700 (U-NII 7)						
BT	7000 (U-NII 8) 2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A	N/A	
Type Transport VO = Voice Only DT = Digital Dat		Voice Services	Notes: 1. Reference le 2. Reference le 3. LTE B71 and existing HAC p 5. n260, n261a	evel in accordance with 7.4.2.1 of ANSI C63.19-20 evel is -20dBm0 in accordance with FCC KDB 2850 I NR n71, while outside the scope of ANSI C63.19 roccedures with currently available test equipme and n258 are currently outside the scope of ANSI lands 5 through 8 were not evaluated due to equ	11 and July 2012 C63 VoLTE Interpret: 176 D02 and FCC HAC regulations, were addit nt. C63.19 and FCC HAC regulations ther	ation.  ionally tested according to the refore they were not evaluated.	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 5 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 5 of 106

# 3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

#### I. MAGNETIC COUPLING

### **Axial and Radial Field Intensity**

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be  $\geq$  -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

#### Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

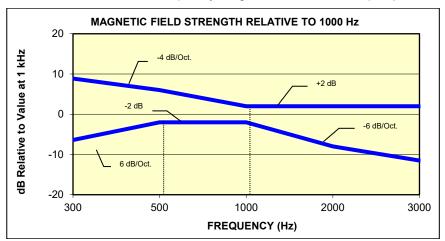


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

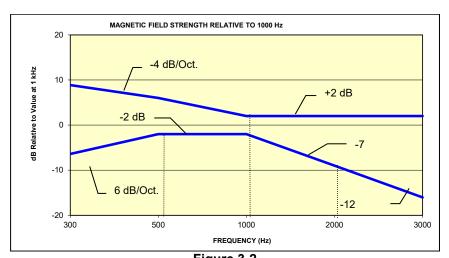


Figure 3-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: A3LSMS906U	hod to be put at the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 6 01 106

### **Signal Quality**

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters		
Calegory	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]		
T1	0 to 10 dB		
T2	10 to 20 dB		
Т3	20 to 30 dB		
T4	> 30 dB		
Table 3-1 Magnetic Coupling Parameters			

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 7 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage / 01 100

# METHOD OF MEASUREMENT

#### **Test Setup** I.

The equipment was connected as shown in an RF-shielded chamber:

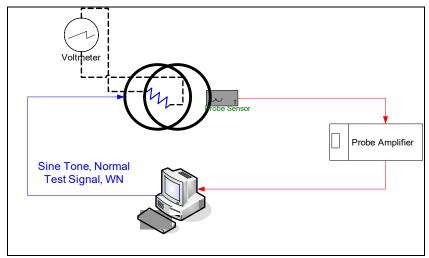


Figure 4-1 Validation Setup with Helmholtz Coil

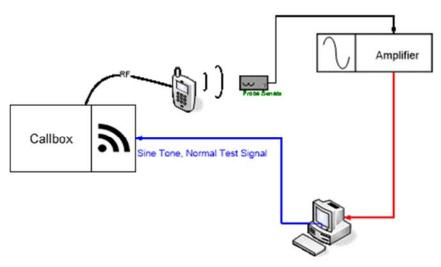


Figure 4-2 **T-Coil Test Setup** 

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 9 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 8 of 108

© 2021 PCTEST **REV 3.5.M** 

### II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec

Line Voltage: 115 VAC

Line Frequency: 60 Hz

Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

# III. 3GPP2 Normal Test Signal (Speech)

Manufacturer: 3GPP2 (TIA 1042 §3.3.1)

Modified-IRS weighted, multi-talker speech signal, 4 Male and 4

Stimulus Type: Female speakers (alternating)

Single Sample Duration: 51.62 seconds

Activity Level: 77.4%





Figure 4-4
Temporal Characteristic of Normal Test Signal

FCC ID: A3LSMS906U	PCTEST Thought to be port of the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 9 or 106



ABM2 Measurement Block Diagram:



Figure 4-5 Magnetic Measurement Processing Steps

#### IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
  - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
  - "A-weighting" and Half-Band Integration was applied to the measurements.
  - Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
  - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
  - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H<sub>c</sub> = magnetic field strength in amperes per meter N = number of turns per coil

For Helmholtz Coil SN: SBI 1052, N=20; r=0.13m; R=10.193Ω and using V=29mV:

$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316 \, A/m \approx -10 \, dB (A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Pages 54 to 56).

FCC ID: A3LSMS906U	PCTEST  Ploat to be part of the remove	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 10 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 10 of 108

c. Frequency Response Validation The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the Normal signal as shown below:



Figure 4-6 Frequency Response Validation

#### **ABM2 Measurement Validation**

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz - 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

> Table 4-1 **ABM2 Frequency Response Validation**

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: A3LSMS906U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 11 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 11 of 108




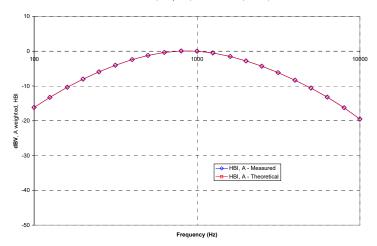


Figure 4-7
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-8). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)
-60	-60.36	-60.2	0.16
-50	-50.19	-50.13	0.06
-40	-40.14	-40.03	0.11
-30	-30.13	-30.01	0.12
-20	-20.12	-20	0.12
-10	-10.14	-10	0.14

FCC ID: A3LSMS906U	PCTEST: Hood to be part of & secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 10 of 100
1M2109090103-22-R1.A3L	10/4/2021 — 11/10/2021	Portable Handset		Page 12 of 108

© 2021 PCTEST REV 3.5.M





Figure 4-9 **ABM2 Power Sum Validation** 

- 3. Measurement Test Setup
  - a. Fine scan above the WD (TEM)
    - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-11, the grid is not to scale but merely a graphical representation of the coordinate system in use):

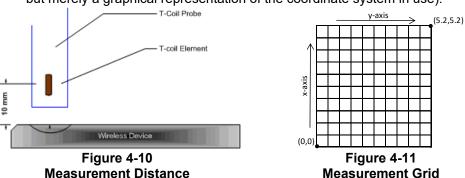

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-13 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
  - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN <sup>TM</sup>	TDMA (22 and 11 Hz)	-18

FCC ID: A3LSMS906U	PCTEST host to be port of & second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 13 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 13 01 106

- ii. See Section 5 and 7 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE) and Voice Over WIFI (VoWIFI) testing.
- iii. See Section 6 for more information regarding CMW500 and CMX500 audio level settings for Voice Over NR (VoNR).
- iv. See Section 8 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.
- c. Real-Time Analyzer (RTA)
  - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
  - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 9 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5 and 8. NR configuration can be found in Section 6 and 8. WIFI configuration information can be found in Section 7 and 8.)
  - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
  - a. Narrow-band Magnetic Intensity
    - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
  - b. Frequency Response
    - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
    - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-6. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
    - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
  - c. Signal Quality Index
    - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
    - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
    - This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: A3LSMS906U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 14 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 14 of 108

### V. Test Setup




Figure 4-12
Audio Magnetic Field Test Setup

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

### VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

### VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 15 01 100

© 2021 PCTEST REV 3.5.M

### VIII. Wireless Device Channels and Frequencies

#### 1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band. Only middle channels were evaluated for data modes.

Table 4-3
Center Channels and Frequencies

Test frequencies & associated channels				
Channel	Frequency (MHz)			
Cellular 850				
190 (GSM)	836.60			
4183 (UMTS)	836.60			
AWS 1750				
1412 (UMTS)	1730.40			
PCS 1900				
661 (GSM)	1880			
9400 (UMTS)	1880			

#### 2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels were additionally tested for LTE TDD. The middle channels and supported bandwidths from the worst-case bands according to Tables 8-6 and 8-7 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 10-4 to 10-17 as well as 10-35 and 10-36 for LTE bandwidths and channels.

### 3. 5G (NR) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. Low-mid and mid-high channels were additionally tested for NR TDD. The middle channels and supported bandwidths from the worst-case bands according to Tables 8-10 and 8-11 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 10-18 to 10-27 as well as 10-37 and 10-38 for NR bandwidths and channels.

#### 4. WIFI

The middle channel for each IEEE 802.11 standard was tested for each probe orientation. The 2.4GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels. The 5GHz IEEE 802.11 standard from each probe orientation resulting in the worst-case SNNR was additionally tested on higher U-NII bands as well as applicable low and high channels. See Tables 10-28 to 10-32 as well as 10-39 to 10-43 for WIFI standards and channels.

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 16 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 16 of 108

### IX. Test Flow

The flow diagram below was followed (From C63.19):

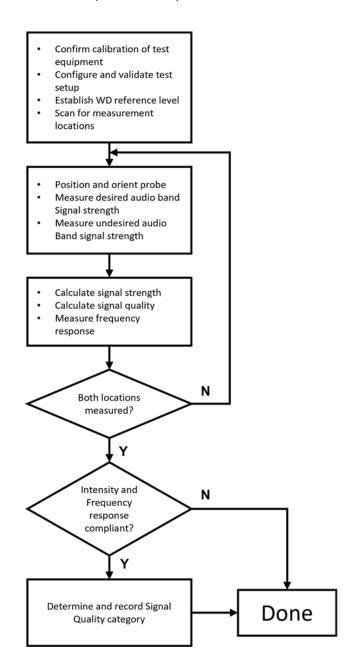


Figure 4-13 C63.19 T-Coil Signal Test Process

FCC ID: A3LSMS906U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		rage 17 01 100

© 2021 PCTEST REV 3.5.M 8/18/2020

### 5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

### I. Test System Setup for VoLTE over IMS T-coil Testing

### 1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

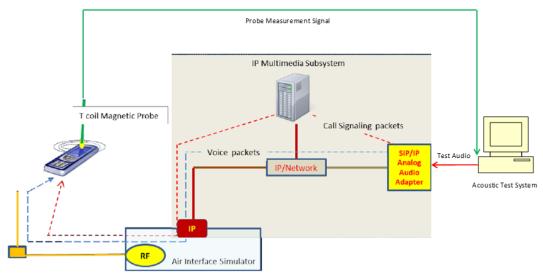


Figure 5-1
Test Setup for VoLTE over IMS T-Coil Measurements

#### 2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level\*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

\* http://c63.org/documents/misc/posting/new\_interpretations.htm

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 18 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 10 01 100

© 2021 PCTEST REV 3.5.M 8/18/2020

#### **DUT Configuration for VoLTE over IMS T-coil Testing** II.

### 1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 50%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 5-1 **VoLTE over IMS SNNR by Radio Configuration**

Band	Frequency	Channel	Bandwidth	Modulation	RB Size	RB Offset	ABM1	ABM2	SNNR
	[MHz]		[MHz]				[dB(A/m)]	[dB(A/m)]	[dB]
12	707.5	23095	10	QPSK	1	0	0.24	-50.19	50.43
12	707.5	23095	10	QPSK	1	25	0.72	-49.45	50.17
12	707.5	23095	10	QPSK	1	49	0.27	-50.39	50.66
12	707.5	23095	10	QPSK	25	0	0.07	-50.77	50.84
12	707.5	23095	10	QPSK	25	12	0.26	-50.83	51.09
12	707.5	23095	10	QPSK	25	25	0.17	-51.18	51.35
12	707.5	23095	10	QPSK	50	0	0.50	-50.66	51.16
12	707.5	23095	10	16QAM	1	0	0.21	-48.95	49.16
12	707.5	23095	10	16QAM	1	25	0.29	-48.73	49.02
12	707.5	23095	10	16QAM	1	49	0.62	-48.99	49.61
12	707.5	23095	10	16QAM	25	0	0.09	-50.54	50.63
12	707.5	23095	10	16QAM	25	12	0.09	-51.34	51.43
12	707.5	23095	10	16QAM	25	25	0.25	-51.13	51.38
12	707.5	23095	10	16QAM	50	0	0.25	-50.56	50.81
12	707.5	23095	10	64QAM	1	0	0.05	-49.30	49.35
12	707.5	23095	10	64QAM	1	25	0.27	-49.00	49.27
12	707.5	23095	10	64QAM	1	49	-0.10	-49.56	49.46
12	707.5	23095	10	64QAM	25	0	-0.05	-50.52	50.47
12	707.5	23095	10	64QAM	25	12	0.33	-50.60	50.93
12	707.5	23095	10	64QAM	25	25	0.52	-51.03	51.55
12	707.5	23095	10	64QAM	50	0	0.30	-50.95	51.25
12	707.5	23095	10	256QAM	1	0	0.73	-50.81	51.54
12	707.5	23095	10	256QAM	1	25	0.22	-50.23	50.45
12	707.5	23095	10	256QAM	1	49	0.23	-50.57	50.80
12	707.5	23095	10	256QAM	25	0	0.10	-51.46	51.56
12	707.5	23095	10	256QAM	25	12	0.26	-51.59	51.85
12	707.5	23095	10	256QAM	25	25	0.24	-50.25	50.49
12	707.5	23095	10	256QAM	50	0	-0.15	-50.88	50.73

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dago 10 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 19 of 108

#### 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 5-2 AMR Codec Investigation - VoLTE over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	0.82	-0.02	1.63	1.49		Band 12 10MHz	23095
ABM2 (dBA/m)	-49.27	-49.03	-49.03	-49.10	Axial		
Frequency Response	Pass	Pass	Pass	Pass	Axiai		
S+N/N (dB)	50.09	49.01	50.66	50.59			

Table 5-3 **EVS Codec Investigation - VoLTE over IMS** 

Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	3.30	2.57	1.62	1.11	2.04	1.81			
ABM2 (dBA/m)	-48.98	-49.66	-49.81	-48.98	-49.96	-49.54	Axial	Band 12 10MHz	00005
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Axiai		23095
S+N/N (dB)	52.28	52.23	51.43	50.09	52.00	51.35			

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"




Figure 5-2 **Audio Band Magnetic Curve Measurement Block Diagram** 

#### 3. LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length  $T_f = 307200 \cdot T_s =$ 10 ms, where T<sub>s</sub> is a number of time units equal to 1/(15000 x 2048) seconds. Additionally, each radio frame consists of 10 subframes, each of length 30720 · T<sub>s</sub> = 1 ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is 2192 · Ts which occurs in the normal cyclic prefix and special subframe configuration 4.

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 20 01 106

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Table 5-4
Uplink-Downlink Configurations for Type 2 Frame Structures

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number								Calculated Transmission		
configuration		0	1	2	3	4	5	6	7	8	9	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	61.4%
1	5 ms	D	S	U	U	D	D	S	U	U	D	41.4%
2	5 ms	D	S	U	D	D	D	S	U	D	D	21.4%
3	10 ms	D	S	U	U	U	D	D	D	D	D	30.7%
4	10 ms	D	S	U	U	D	D	D	D	D	D	20.7%
5	10 ms	D	S	U	D	D	D	D	D	D	D	10.7%
6	5 ms	D	S	U	U	U	D	S	U	U	D	51.4%

#### a. Power Class 3 Uplink-Downlink Configuration Investigation

Power Class 3 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 50%RB offset. For Power Class 3, all configurations (0-6) are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 3 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-5
Power Class 3 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	50	0	0.01	-39.79	39.80
2593.0	40620	20	16QAM	1	50	1	-0.16	-39.55	39.39
2593.0	40620	20	16QAM	1	50	2	-0.18	-37.98	37.80
2593.0	40620	20	16QAM	1	50	3	0.20	-42.33	42.53
2593.0	40620	20	16QAM	1	50	4	-0.25	-42.31	42.06
2593.0	40620	20	16QAM	1	50	5	-0.55	-41.85	41.30
2593.0	40620	20	16QAM	1	50	6	-0.47	-39.33	38.86

#### b. Power Class 2 Uplink-Downlink Configuration Investigation

Power Class 2 was evaluated with the following radio configuration: channel 40620, 20MHz BW, 16QAM, 1RB, 50%RB offset. For Power Class 2, configurations 1-5 are supported. The configuration which resulted in the worst SNNR was used for full testing. Uplink-Downlink configuration 2 was used as the worst-case configuration for Power Class 2 VoLTE over IMS T-Coil testing. See table below for the SNNR comparison between each Uplink-Downlink configuration:

Table 5-6
Power Class 2 VoLTE over IMS SNNR by UL-DL Configuration

Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	UL-DL Configuration	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
2593.0	40620	20	16QAM	1	50	1	-0.48	-36.76	36.28
2593.0	40620	20	16QAM	1	50	2	-0.39	-36.16	35.77
2593.0	40620	20	16QAM	1	50	3	-0.18	-39.33	39.15
2593.0	40620	20	16QAM	1	50	4	-0.40	-39.34	38.94
2593.0	40620	20	16QAM	1	50	5	-0.09	-38.86	38.77

Note: LTE TDD B41 Power Class 2 only supports UL-DL configurations 1-5, not 0 or 6.

#### c. Conclusion

Per the investigations above, UL-DL Configuration 2 was used to evaluate Power Class 3 VoLTE over IMS. UL-DL Configuration 2 was used to evaluate Power Class 2 VoLTE over IMS.

FCC ID: A3LSMS906U	hod to be put at the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 21 01 100

### 6. VONR TEST SYSTEM SETUP AND DUT CONFIGURATION

### I. Test System Setup for VoNR over IMS T-coil Testing

### 1. Equipment Setup

The general test setup used for VoNR over IMS is shown below. The callboxes used when performing VoNR over IMS T-coil measurements are CMW500 and CMX500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server. The CMX500 provided the baseband signal to perform NR signaling. An external USB audio interface is used to perform the A/D conversion and ensure proper speech input level to the DUT.

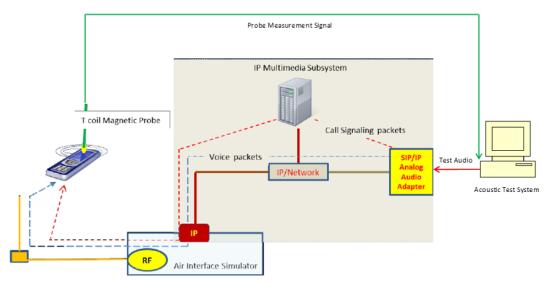


Figure 6-1
Test Setup for VoNR over IMS T-Coil Measurements

#### 2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoNR over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level<sup>2</sup>. The acoustic test system was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoNR over IMS connection.

0				
<sup>2</sup> FCC Office of Engineering and	Tachnology KDR	"285076 DO2 T Call	Tacting for CMDS ID VA	2 " Contombor 12 2017
	TECHNOLOGY RDD.	. 203070 DUZ 1-0011		3. SEDICITIDEI 13. ZU1 <i>1</i>

1 00 Office of Engineer	ing and recimology RDB, 20	3070 DOZ 1-OOII TC3IIII IOI OIVII OI	voo, ocpicilibei 10, 2	2017
FCC ID: A3LSMS906U	PCTEST . Road to be port of a remove	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 22 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 22 01 100

© 2021 PCTEST REV 3.5

#### **DUT Configuration for VoNR over IMS T-coil Testing** II.

### 1. Radio Configuration

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. The effects of waveform, modulation, and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. DFT-s-OFDM, 16QAM, 1RB, 50%RB offset was used for the testing as the worstcase configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 6-1 **VoNR over IMS SNNR by Radio Configuration (CP-OFDM)**

	voint ovoi illo ottitit by itaalo ooilligarati							<u> </u>		
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
n5	836.5	167300	20	CP-OFDM	QPSK	1	1	-3.76	-48.72	44.96
n5	836.5	167300	20	CP-OFDM	QPSK	1	53	-3.77	-48.54	44.77
n5	836.5	167300	20	CP-OFDM	QPSK	1	104	-3.78	-48.42	44.64
n5	836.5	167300	20	CP-OFDM	QPSK	53	0	-3.77	-49.50	45.73
n5	836.5	167300	20	CP-OFDM	QPSK	53	26	-3.79	-49.65	45.86
n5	836.5	167300	20	CP-OFDM	QPSK	53	53	-3.78	-49.38	45.60
n5	836.5	167300	20	CP-OFDM	QPSK	106	0	-3.78	-49.55	45.77
n5	836.5	167300	20	CP-OFDM	16QAM	1	1	-3.77	-48.47	44.70
n5	836.5	167300	20	CP-OFDM	16QAM	1	53	-3.77	-47.84	44.07
n5	836.5	167300	20	CP-OFDM	16QAM	1	104	-3.77	-47.56	43.79
n5	836.5	167300	20	CP-OFDM	16QAM	53	0	-3.78	-49.52	45.74
n5	836.5	167300	20	CP-OFDM	16QAM	53	26	-3.79	-49.61	45.82
n5	836.5	167300	20	CP-OFDM	16QAM	53	53	-3.78	-49.05	45.27
n5	836.5	167300	20	CP-OFDM	16QAM	106	0	-3.77	-49.75	45.98
n5	836.5	167300	20	CP-OFDM	64QAM	1	1	-3.79	-48.36	44.57
n5	836.5	167300	20	CP-OFDM	64QAM	1	53	-3.79	-48.47	44.68
n5	836.5	167300	20	CP-OFDM	64QAM	1	104	-3.79	-48.19	44.40
n5	836.5	167300	20	CP-OFDM	64QAM	53	0	-3.78	-49.16	45.38
n5	836.5	167300	20	CP-OFDM	64QAM	53	26	-3.77	-49.08	45.31
n5	836.5	167300	20	CP-OFDM	64QAM	53	53	-3.76	-48.96	45.20
n5	836.5	167300	20	CP-OFDM	64QAM	106	0	-3.77	-49.27	45.50
n5	836.5	167300	20	CP-OFDM	256QAM	1	1	-3.77	-48.50	44.73
n5	836.5	167300	20	CP-OFDM	256QAM	1	53	-3.79	-48.38	44.59
n5	836.5	167300	20	CP-OFDM	256QAM	1	104	-3.81	-48.55	44.74
n5	836.5	167300	20	CP-OFDM	256QAM	53	0	-3.78	-49.55	45.77
n5	836.5	167300	20	CP-OFDM	256QAM	53	26	-3.73	-48.91	45.18
n5	836.5	167300	20	CP-OFDM	256QAM	53	53	-3.77	-49.21	45.44
n5	836.5	167300	20	CP-OFDM	256QAM	106	0	-3.78	-48.35	44.57

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 22 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 23 of 108

Table 6-2 **VoNR over IMS SNNR by Radio Configuration (DFT-s-OFDM)** 

VOIN OVER INIS SININ BY RAULO CONTINUE AUTO (DFT-S-OFL								-3-01 DIVI)		
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	1	-3.74	-48.82	45.08
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	53	-3.79	-48.97	45.18
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	1	104	-3.77	-48.53	44.76
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	0	-3.80	-49.07	45.27
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	28	-3.80	-49.22	45.42
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	50	53	-3.79	-49.28	45.49
n5	836.5	167300	20	DFT-s-OFDM	π/2-BPSK	100	0	-3.80	-49.11	45.31
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	1	-3.75	-48.31	44.56
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	53	-3.79	-48.26	44.47
n5	836.5	167300	20	DFT-s-OFDM	QPSK	1	104	-3.81	-48.45	44.64
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	0	-3.79	-49.06	45.27
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	28	-3.80	-49.16	45.36
n5	836.5	167300	20	DFT-s-OFDM	QPSK	50	53	-3.78	-49.25	45.47
n5	836.5	167300	20	DFT-s-OFDM	QPSK	100	0	-3.81	-49.51	45.70
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	1	-3.82	-46.92	43.10
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	53	-3.79	-46.33	42.54
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	104	-3.81	-47.19	43.38
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	0	-3.81	-49.70	45.89
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	28	-3.81	-49.51	45.70
n5	836.5	167300	20	DFT-s-OFDM	16QAM	50	53	-3.79	-49.05	45.26
n5	836.5	167300	20	DFT-s-OFDM	16QAM	100	0	-3.79	-49.37	45.58
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	1	-3.79	-48.05	44.26
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	53	-3.77	-48.01	44.24
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	104	-3.76	-47.81	44.05
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	0	-3.82	-49.47	45.65
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	28	-3.79	-49.14	45.35
n5	836.5	167300	20	DFT-s-OFDM	64QAM	50	53	-3.78	-49.22	45.44
n5	836.5	167300	20	DFT-s-OFDM	64QAM	100	0	-3.82	-49.30	45.48
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	1	-3.82	-48.62	44.80
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	53	-3.79	-48.68	44.89
n5	836.5	167300	20	DFT-s-OFDM	256QAM	1	104	-3.81	-48.53	44.72
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	0	-3.77	-49.80	46.03
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	28	-3.78	-50.07	46.29
n5	836.5	167300	20	DFT-s-OFDM	256QAM	50	53	-3.80	-49.13	45.33
n5	836.5	167300	20	DFT-s-OFDM	256QAM	100	0	-3.76	-48.54	44.78

#### 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The EVS Primary NB 24.4kbps setting was used for the audio codec on the CMX500/CMW500 for VoNR over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 6-3 AMR Codec Investigation - VoNR over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	-3.17	-3.24	-2.52	-2.43		NR n5 20MHz	167300
ABM2 (dBA/m)	-51.14	-51.03	-50.15	-51.09	Axial		
Frequency Response	Pass	Pass	Pass	Pass	Axiai		
S+N/N (dB)	47.97	47.79	47.63	48.66			


- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"

FCC ID: A3LSMS906U	hout to be part of the common	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 24 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 24 01 100

Table 6-4 **EVS Codec Investigation - VoNR over IMS** 

= 10 00 die 0 militari gaden 10 militari militari											
Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel		
ABM1 (dBA/m)	-2.82	-3.48	-2.76	-2.97	-3.55	-2.96					
ABM2 (dBA/m)	-50.53	-50.49	-50.87	-50.29	-50.32	-51.17	Axial	NR n5 20MHz	167300		
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Axiai				
S+N/N (dB)	47.71	47.01	48.11	47.32	46.77	48.21					

- Mute on; Backlight off; Max Volume; Max Contrast TPC = "Max Power"



**Audio Band Magnetic Curve Measurement Block Diagram** 

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 25 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 25 01 106

### **VOWIFI TEST SYSTEM SETUP AND DUT CONFIGURATION**

#### I. Test System Setup for VoWIFI over IMS T-coil Testing

### 1. Equipment Setup

The general test setup used for VoWIFI over IMS, or CMRS WIFI Calling, is shown below. The callbox used when performing VoWIFI over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

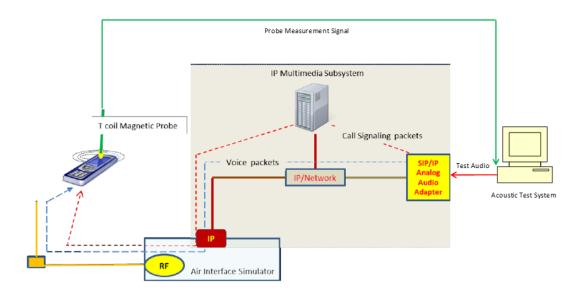


Figure 7-1 Test Setup for VoWIFI over IMS T-Coil Measurements

#### 2. Audio Level Settings

According to KDB 285076 D02 released by the FCC OET regarding the appropriate audio levels to be used for VoWIFI over IMS T-Coil testing, -20dBm0 shall be used for the normal speech input level<sup>3</sup>. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the VoWIFI over IMS connection.

<sup>3</sup> FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

1 00 Office of Engineer	1 00 Office of Engineering and Technology NDB, 2000/0 Boz 1-Ook Testing for Ownto it 100, 00ptember 10, 2017									
FCC ID: A3LSMS906U	PCTEST* Road to be part of ® removed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager						
Filename:	Test Dates:	DUT Type:		Page 26 of 108						
1M2109090103-22-R1.A3L 10/4/2021 – 11/10/2021		Portable Handset		Fage 20 01 100						

© 2021 PCTEST **REV 3.5.M** 

#### **DUT Configuration for VoWIFI over IMS T-coil Testing** II.

### 1. Radio Configuration

An investigation was performed on all applicable data rates and modulations to determine the radio configuration to be used for testing. See tables below for SNNR comparison between radio configurations in each IEEE 802.11 standard:

> Table 7-1 IEEE 802.11b SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11b	6	DSSS	1	4.74	-28.33	33.07
IEEE 802.11b	6	DSSS	2	4.48	-28.77	33.25
IEEE 802.11b	6	CCK	5.5	4.38	-28.68	33.06
IEEE 802.11b	6	CCK	11	4.12	-29.84	33.96

Table 7-2 IEEE 802.11g/a SNNR by Radio Configuration

Mode	Channel	Modulation	Data Rate [Mbps]	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11g	6	BPSK	6	4.45	-27.55	32.00
IEEE 802.11g	6	BPSK	9	4.35	-28.03	32.38
IEEE 802.11g	6	QPSK	12	4.07	-27.47	31.54
IEEE 802.11g	6	QPSK	18	4.45	-27.64	32.09
IEEE 802.11g	6	16QAM	24	4.15	-27.37	31.52
IEEE 802.11g	6	16QAM	36	4.39	-27.88	32.27
IEEE 802.11g	6	64QAM	48	4.27	-28.54	32.81
IEEE 802.11g	6	64QAM	54	3.99	-28.80	32.79

Table 7-3 IEEE 802.11n/ac 20MHz BW SNNR by Radio Configuration

					aale eeliiga		
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	20	40	BPSK	0	4.48	-25.39	29.87
IEEE 802.11n	20	40	QPSK	1	3.99	-26.41	30.40
IEEE 802.11n	20	40	QPSK	2	4.20	-26.54	30.74
IEEE 802.11n	20	40	16QAM	3	4.30	-28.59	32.89
IEEE 802.11n	20	40	16QAM	4	4.43	-26.93	31.36
IEEE 802.11n	20	40	64QAM	5	4.43	-27.94	32.37
IEEE 802.11n	20	40	64QAM	6	4.16	-27.61	31.77
IEEE 802.11n	20	40	64QAM	7	4.20	-27.95	32.15
IEEE 802.11ac	20	40	256QAM	8	4.49	-28.42	32.91

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 27 01 100

Table 7-4
IEEE 802.11ax SU 20MHz BW SNNR by Radio Configuration

	1666	DUZ. I TAX DO	ZOWINZ DVV	OITITIE DY I	ILLE 602.11 ax 30 20 Will BW Sivin by Radio Configuration											
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]									
IEEE 802.11ax SU	20	40	BPSK	0	4.47	-21.63	26.10									
IEEE 802.11ax SU	20	40	QPSK	1	4.50	-21.34	25.84									
IEEE 802.11ax SU	20	40	QPSK	2	4.49	-22.64	27.13									
IEEE 802.11ax SU	20	40	16QAM	3	4.71	-21.58	26.29									
IEEE 802.11ax SU	20	40	16QAM	4	4.43	-23.58	28.01									
IEEE 802.11ax SU	20	40	64QAM	5	4.47	-24.40	28.87									
IEEE 802.11ax SU	20	40	64QAM	6	4.10	-24.08	28.18									
IEEE 802.11ax SU	20	40	64QAM	7	4.39	-24.07	28.46									
IEEE 802.11ax SU	20	40	256QAM	8	4.40	-25.33	29.73									
IEEE 802.11ax SU	20	40	256QAM	9	4.14	-25.89	30.03									
IEEE 802.11ax SU	20	40	1024QAM	10	4.45	-26.62	31.07									
IEEE 802.11ax SU	20	40	1024QAM	11	4.33	-27.14	31.47									

Table 7-5
IEEE 802.11ax RU 20MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11ax RU	20	40	QPSK	1	0	4.23	-22.64	26.87
IEEE 802.11ax RU	20	40	QPSK	1	8	4.26	-23.03	27.29
IEEE 802.11ax RU	20	40	QPSK	1	37	4.38	-22.66	27.04
IEEE 802.11ax RU	20	40	QPSK	1	40	4.30	-23.05	27.35
IEEE 802.11ax RU	20	40	QPSK	1	53	4.36	-22.62	26.98
IEEE 802.11ax RU	20	40	QPSK	1	54	4.18	-22.86	27.04
IEEE 802.11ax RU	20	40	QPSK	1	61	4.35	-22.75	27.10

Table 7-6 IEEE 802.11n/ac 40MHz BW SNNR by Radio Configuration

Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
IEEE 802.11n	40	38	BPSK	0	4.35	-22.10	26.45
IEEE 802.11n	40	38	QPSK	1	4.14	-22.88	27.02
IEEE 802.11n	40	38	QPSK	2	4.42	-23.32	27.74
IEEE 802.11n	40	38	16QAM	3	4.70	-23.25	27.95
IEEE 802.11n	40	38	16QAM	4	4.12	-24.32	28.44
IEEE 802.11n	40	38	64QAM	5	4.14	-26.67	30.81
IEEE 802.11n	40	38	64QAM	6	4.49	-25.73	30.22
IEEE 802.11n	40	38	64QAM	7	4.47	-27.70	32.17
IEEE 802.11ac	40	38	256QAM	8	4.48	-25.99	30.47
IEEE 802.11ac	40	38	256QAM	9	4.39	-25.86	30.25

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 28 of 108

Table 7-7
IEEE 802.11ax SU 40MHz BW SNNR by Radio Configuration

		••		• · · · · · · · · · · · · · · · · · · ·	in by itaaio configuration				
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
IEEE 802.11ax SU	40	38	BPSK	0	4.39	-21.65	26.04		
IEEE 802.11ax SU	40	38	QPSK	1	4.34	-22.74	27.08		
IEEE 802.11ax SU	40	38	QPSK	2	4.34	-22.99	27.33		
IEEE 802.11ax SU	40	38	16QAM	3	4.48	-23.76	28.24		
IEEE 802.11ax SU	40	38	16QAM	4	4.04	-24.61	28.65		
IEEE 802.11ax SU	40	38	64QAM	5	4.47	-25.58	30.05		
IEEE 802.11ax SU	40	38	64QAM	6	4.01	-25.53	29.54		
IEEE 802.11ax SU	40	38	64QAM	7	4.41	-26.35	30.76		
IEEE 802.11ax SU	40	38	256QAM	8	3.99	-27.09	31.08		
IEEE 802.11ax SU	40	38	256QAM	9	4.39	-27.03	31.42		
IEEE 802.11ax SU	40	38	1024QAM	10	4.17	-28.03	32.20		
IEEE 802.11ax SU	40	38	1024QAM	11	4.01	-28.36	32.37		

Table 7-8
IEEE 802.11ax RU 40MHz BW SNNR by Radio Configuration

	incle out. I fax ito foiling by onitit by Radio Configuration									
Mode	Bandwidth [MHz]	Channel	Modulation	MCS Index	RU Index	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
IEEE 802.11ax RU	40	38	BPSK	0	0	4.40	-21.56	25.96		
IEEE 802.11ax RU	40	38	BPSK	0	17	4.29	-21.83	26.12		
IEEE 802.11ax RU	40	38	BPSK	0	37	4.15	-22.40	26.55		
IEEE 802.11ax RU	40	38	BPSK	0	44	4.42	-22.23	26.65		
IEEE 802.11ax RU	40	38	BPSK	0	53	4.05	-23.43	27.48		
IEEE 802.11ax RU	40	38	BPSK	0	56	4.07	-23.42	27.49		
IEEE 802.11ax RU	40	38	BPSK	0	61	4.43	-23.63	28.06		
IEEE 802.11ax RU	40	38	BPSK	0	62	4.44	-23.03	27.47		
IEEE 802.11ax RU	40	38	BPSK	0	65	3.90	-23.27	27.17		

### 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoWIFI over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

Table 7-9
AMR Codec Investigation – VoWIFI over IMS


Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band	Standard	Channel
ABM1 (dBA/m)	5.92	4.49	8.64	6.63			IEEE 802.11b	6
ABM2 (dBA/m)	-28.94	-29.34	-29.94	-29.78	Avial	2.4Ghz WIFI		
Frequency Response	Pass	Pass	Pass	Pass	Axial			
S+N/N (dB)	34.86	33.83	38.58	36.41				

FCC ID: A3LSMS906U	PCTEST*	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 29 01 100

**Table 7-10 EVS Codec Investigation – VoWIFI over IMS** 

	Evo ocaco investigation vovin rover into										
Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps	EVS Primary WB 5.9kbps	EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band	Standard	Channel	
ABM1 (dBA/m)	8.31	7.52	6.68	8.91	6.96	7.74			IEEE 802.11b	6	
ABM2 (dBA/m)	-28.50	-30.16	-29.59	-28.47	-29.63	-29.83	المشما	2.4Ghz WIFI			
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass	Axial 2.4Ghz	2.4GHZ WIFI			
S+N/N (dB)	36.81	37.68	36.27	37.38	36.59	37.57					

Mute on; Backlight off; Max Volume; Max Contrast



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMS906U	PCTEST To thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 30 01 100

### 8. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

### I. Test System Setup for OTT VoIP T-Coil Testing

#### 1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

#### 2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. A CMX500 was added to the setup for 5G NR signaling test cases. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

#### 3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation<sup>4</sup>. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

# II. DUT Configuration for OTT VoIP T-Coil Testing

#### 1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Table 8-1
Codec Investigation – OTT VoIP (EDGE)

Codec Setting:	75kbps	6kbps	Orientation	Channel	
ABM1 (dBA/m)	21.04	20.78			
ABM2 (dBA/m)	-28.13	-28.37	Axial	661	
Frequency Response	Pass	Pass	Axiai		
S+N/N (dB)	49.17	49.15			

<sup>4</sup> FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

1 00 Office of Engineer	1 00 office of Engineering and Technology (CBB, 2000) 0 Boz 1 office of engineering and Technology (CBB, 2000)									
FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager						
Filename: 1M2109090103-22-R1.A3L	Test Dates: 10/4/2021 – 11/10/2021	DUT Type: Portable Handset		Page 31 of 108						

Table 8-2
Codec Investigation – OTT VoIP (HSPA)

O G G G III (	conganc	,,, 0,,	1011 (110	17)		
Codec Setting:	75kbps 6kbps		6kbps Orientation			
ABM1 (dBA/m)	20.83	20.87				
ABM2 (dBA/m)	-42.55	-41.66	Axial	0.400		
Frequency Response	Pass	Pass	Axiai	9400		
S+N/N (dB)	63.38	62.53				

Table 8-3
Codec Investigation – OTT VoIP (LTE)

	<del>0000</del>	<u> </u>	<u>· \= · = /                                 </u>			
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel	
ABM1 (dBA/m)	20.74	20.41				
ABM2 (dBA/m)	-42.72	-42.63	A.:-I	Band 12	00005	
Frequency Response	Pass	Pass	Axial	10MHz	23095	
S+N/N (dB)	63.46	63.04				

Table 8-4
Codec Investigation – OTT VoIP (NR)

	.0000	• · · · · · · · · · · · · · · · · · · ·					
Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel		
ABM1 (dBA/m)	20.19	19.88					
ABM2 (dBA/m)	-41.21	-41.45	A.dal	NR n30 - Ant A	462000		
Frequency Response	Pass	Pass	Axial	10MHz	462000		
S+N/N (dB)	61.40	61.33					

Table 8-5
Codec Investigation – OTT VoIP (WIFI)

couce invocagation of the ten (trin)													
Codec Setting:	75kbps	6kbps	Orientation	Band	Standard	Channel							
ABM1 (dBA/m)	20.21	20.15											
ABM2 (dBA/m)	-25.74	-25.18	Axial	2.4Ghz WIFI	IEEE 802.11b	6							
Frequency Response	Pass	Pass	Axiai	2.4GHZ WIFI	IEEE 802.11b	0							
S+N/N (dB)	45.95	45.33											

- Mute on; Backlight off; Max Volume; Max Contrast
- · Radio Configurations can be found in Section 10.II.I




Figure 8-1
Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMS906U	PCTEST hourt to be port at @ received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 32 01 100

#### 2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 71 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

> Table 8-6 OTT VoIP (LTE FDD) SNNR by LTE Band

0											
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]		
71	680.5	133297	20	16QAM	1	50	20.55	-40.08	60.63		
12	707.5	23095	10	16QAM	1	25	20.59	-41.95	62.54		
13	782.0	23230	10	16QAM	1	25	20.67	-40.71	61.38		
14	793.0	23330	10	16QAM	1	25	20.57	-40.19	60.76		
26	831.5	26865	15	16QAM	1	36	20.50	-41.31	61.81		
5	836.5	20525	10	16QAM	1	25	20.49	-40.92	61.41		
66	1745.0	132322	20	16QAM	1	50	20.59	-40.58	61.17		
2	1880.0	18900	20	16QAM	1	50	20.58	-40.99	61.57		
25	1882.5	26365	20	16QAM	1	50	20.42	-40.95	61.37		
30	2310.0	27710	10	16QAM	1	25	20.53	-40.81	61.34		
7	2535.0	21100	20	16QAM	1	50	20.56	-40.74	61.30		

An investigation was performed to determine the worst-case LTE TDD band to be used for OTT VoIP testing. LTE TDD Band 41 (PC2) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE TDD bands:

> Table 8-7 OTT VoIP (LTE TDD) SNNR by LTE Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
41 (PC3)	2593.0	40620	20	16QAM	1	50	20.69	-36.88	57.57
41 (PC2)	2593.0	40620	20	16QAM	1	50	20.99	-34.90	55.89
48	3625.0	55990	20	16QAM	1	50	20.70	-39.42	60.12

#### 3. LTE FDD Uplink Carrier Aggregation for OTT VolP

LTE FDD ULCA was evaluated to ensure LTE FDD standalone was the worst-case scenario. The configurations in Table 8-8 were determined from Table 8-6 and satisfy the configuration requirements as defined in 3GPP 36.101.

> Table 8-8 LTE FDD SNNR for OTT VolP Uplink Carrier Aggregation

	PCC							SCC									
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_5B	LTE B5	10	20525	836.5	16QAM	1	0	LTE B5	5	20453	829.3	16QAM	1	24	20.22	-41.58	61.80
CA_66B	LTE B66	10	132322	1745.0	16QAM	1	0	LTE B66	10	132223	1735.1	16QAM	1	49	20.47	-41.30	61.77
CA_66C	LTE B66	20	132322	1745.0	16QAM	1	0	LTE B66	20	132124	1725.5	16QAM	1	99	20.43	-40.84	61.27

#### 4. LTE TDD Uplink Carrier Aggregation for OTT VolP

LTE TDD ULCA was evaluated to ensure LTE TDD standalone was the worst-case scenario. The configurations in Table 8-9 were determined from Table 8-7 and satisfy the configuration requirements as defined in 3GPP 36.101.

FCC ID: A3LSMS906U	hod to be put at the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 33 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 33 01 100

Table 8-9 LTE TDD SNNR for OTT VolP Uplink Carrier Aggregation

ZIZ IBB CHIRK TOT OTT VOIL OPINIK GUITTO													gauo	•			
				PCC							SCC						
Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
CA_41C (PC3)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	20.54	-38.25	58.79
CA_41C (PC2)	LTE B41	20	40620	2593.0	16QAM	1	0	LTE B41	20	40422	2573.2	16QAM	1	99	20.38	-36.23	56.61
CA_48C	LTE B48	20	55990	3625.0	16QAM	1	0	LTE B48	20	55792	3605.2	16QAM	1	99	20.38	-39.82	60.20

### 5. Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the worst-case NR FDD band to be used for OTT VoIP testing. NR FDD n25 (ANT I) was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR FDD bands:

**Table 8-10** OTT VoIP (NR FDD) SNNR by NR Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
n71	680.5	136100	20	DFT-s-OFDM	16QAM	1	53	19.88	-40.88	60.76
n12	707.5	141500	15	DFT-s-OFDM	16QAM	1	40	19.87	-40.81	60.68
n5	836.5	167300	20	DFT-s-OFDM	16QAM	1	53	20.06	-40.48	60.54
n66	1745.0	349000	40	DFT-s-OFDM	16QAM	1	108	19.83	-41.08	60.91
n66 (ANT I)	1745.0	349000	40	DFT-s-OFDM	16QAM	1	108	20.18	-39.75	59.93
n25	1882.5	376500	40	DFT-s-OFDM	16QAM	1	108	19.74	-40.90	60.64
n25 (ANT I)	1882.5	376500	40	DFT-s-OFDM	16QAM	1	108	20.17	-39.18	59.35
n30	2310.0	462000	10	DFT-s-OFDM	16QAM	1	26	20.08	-40.99	61.07
n30 (ANT I)	2310.0	462000	10	DFT-s-OFDM	16QAM	1	26	20.12	-40.76	60.88
n7	2535.0	507000	40	DFT-s-OFDM	16QAM	1	53	20.07	-40.82	60.89
n7 (ANT I)	2535.0	507000	40	DFT-s-OFDM	16QAM	1	53	20.17	-41.29	61.46

An investigation was performed to determine the worst-case NR TDD band to be used for OTT VoIP testing. NR TDD n41 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR TDD bands:

**Table 8-11** OTT VoIP (NR TDD) SNNR by NR Band

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
n41 (PC2)	2592.99	518598	100	DFT-s-OFDM	16QAM	1	53	19.91	-31.35	51.26
n77, DoD (PC2)	3500.01	633334	100	DFT-s-OFDM	16QAM	1	53	19.99	-38.89	58.88
n77 (PC2)	3840.00	656000	100	DFT-s-OFDM	16QAM	1	53	19.97	-39.22	59.19

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 34 01 100

## 9. FCC 3G MEASUREMENTS


# I. UMTS Test Configurations

WB AMR 6.60kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset.

Table 9-1 Codec Investigation - UMTS

Todos invoctigation our o							
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Channel	
ABM1 (dBA/m)	1.49	0.61	2.18	2.19			
ABM2 (dBA/m)	-50.86	-50.96	-50.04	-49.98	Axial	9400	
Frequency Response	Pass	Pass	Pass	Pass	Axiai		
S+N/N (dB)	52.35	51.57	52.22	52.17			

- · Mute on; Backlight off; Max Volume; Max Contrast
- · TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: A3LSMS906U	PCTEST: Houd to be post of @senses	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 35 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 33 01 106

**Table 10-1 Consolidated Tabled Results** 

		Freq. Response Margin		Magnetic Intensity Verdict		FCC SNNR Verdict		Margin from	C63.19-2011
		8.3.2		8.3.1		8	3.4	FCC Limit	Rating
C63.19	9 Section	Axial	Radial	Axial	Radial	Axial	Radial	(dB)	
	0.11								
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-5.44	Т3
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
EDGE (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-28.07	T4
(OTT VOIF)	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-18.70	T4
	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	Cellular	PASS	NA	PASS	PASS	PASS	PASS		
HSPA (OTT VoIP)	AWS	PASS	NA	PASS	PASS	PASS	PASS	-37.83	T4
,	PCS	PASS	NA	PASS	PASS	PASS	PASS		
	B71	PASS	NA	PASS	PASS	PASS	PASS		
	B12	PASS	NA	PASS	PASS	PASS	PASS		
	B13	PASS	NA	PASS	PASS	PASS	PASS		
	B14	PASS	NA	PASS	PASS	PASS	PASS		
	B26	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-14.92	T4
	B66	PASS	NA.	PASS	PASS	PASS	PASS	17.02	
	B00	PASS	NA NA	PASS	PASS	PASS	PASS		
	B25	PASS	NA	PASS	PASS	PASS	PASS		
	B30	PASS	NA	PASS	PASS	PASS	PASS		
	B7	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD (OTT VoIP)	B71	PASS	NA	PASS	PASS	PASS	PASS	-36.52	T4
	B41 (PC3)	PASS	NA	PASS	PASS	PASS	PASS		
LTE TDD	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-8.37	Т3
	B48	PASS	NA	PASS	PASS	PASS	PASS		
LTE TDD (OTT VoIP)	B41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS	-28.73	T4
	n71	PASS	NA	PASS	PASS	PASS	PASS	-10.46	Т4
	n12	PASS	NA	PASS	PASS	PASS	PASS		
	n5	PASS	NA	PASS	PASS	PASS	PASS		
NR FDD	n66	PASS	NA	PASS	PASS	PASS	PASS		
	n25	PASS	NA	PASS	PASS	PASS	PASS		
	n30	PASS	NA.	PASS	PASS	PASS	PASS		
	n7	PASS	NA.	PASS	PASS	PASS	PASS		
NR FDD (OTT VoIP)	n25	PASS	NA.	PASS	PASS	PASS	PASS	-32.46	T4
	n41 (PC2)	PASS	NA	PASS	PASS	PASS	PASS		
NR TDD		PASS	NA NA	PASS	PASS	PASS	PASS	-3.09	Т3
טטו אא	n77, DoD (PC2)	PASS	NA NA	PASS	PASS	PASS	PASS	-3.03	13
NR TDD (OTT VoIP)	n41 (PC2)	PASS	NA NA	PASS	PASS	PASS	PASS	-28.40	T4
, , ,	IEEE 802 44b	DACC	NA	DAGG	DAGG	DAGG	DACC		
	IEEE 802.11b	PASS	NA NA	PASS	PASS	PASS	PASS		
	IEEE 802.11g		NA					0.00	
WLAN	IEEE 802.11n	PASS	NA	PASS	PASS	PASS	PASS	-3.29	Т3
	IEEE 802.11ax SU	PASS	NA	PASS	PASS	PASS	PASS		
			NA	PASS	PASS	PASS	PASS		
	IEEE 802.11ax RU	PASS							
	IEEE 802.11b	PASS	NA	PASS	PASS	PASS	PASS		
			NA NA	PASS PASS	PASS	PASS	PASS		
WLAN (OTT VoIP)	IEEE 802.11b			PASS PASS PASS	PASS PASS PASS	PASS PASS PASS	PASS PASS PASS	-15.35	Т4
WLAN (OTT VoIP)	IEEE 802.11b	PASS PASS	NA	PASS	PASS	PASS	PASS	-15.35	Т4
	IEEE 802.11b IEEE 802.11g IEEE 802.11n	PASS PASS PASS	NA NA	PASS PASS	PASS PASS	PASS PASS	PASS PASS	-15.35	T4
	IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ax SU	PASS PASS PASS PASS	NA NA NA	PASS PASS PASS	PASS PASS PASS	PASS PASS PASS	PASS PASS PASS	-15.35	T4
	IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ax SU IEEE 802.11ax RU	PASS PASS PASS PASS PASS PASS	NA NA NA NA	PASS PASS PASS PASS	PASS PASS PASS PASS	PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS	-15.35	T4
(OTT VoIP)	IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11a SU IEEE 802.11ax RU IEEE 802.11a	PASS PASS PASS PASS PASS	NA NA NA	PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS	PASS PASS PASS PASS	PASS PASS PASS PASS		
	IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ax SU IEEE 802.11ax RU IEEE 802.11at IEEE 802.11a	PASS PASS PASS PASS PASS PASS PASS PASS	NA	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	-15.35 -5.26	T4
(OTT VoIP)	IEEE 802.11b IEEE 802.11g IEEE 802.11n IEEE 802.11ax SU IEEE 802.11ax RU IEEE 802.11a IEEE 802.11a IEEE 802.11ac IEEE 802.11ac	PASS PASS PASS PASS PASS PASS PASS PASS	NA	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS		
(OTT VoIP)	EEE 802.11a  EEE 802.11a  EEE 802.11a SU  EEE 802.11a RU  EEE 802.11a EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a	PASS PASS PASS PASS PASS PASS PASS PASS	NA	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS		
(OTT VoIP)	EEE 802.11a	PASS PASS PASS PASS PASS PASS PASS PASS	NA N	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS		
(OTT VoIP)	EEE 802.11b  EEE 802.11g  EEE 802.11n  EEE 802.11a SU  EEE 802.11a RU  EEE 802.11a RU  EEE 802.11a SU  EEE 802.11a SU	PASS PASS PASS PASS PASS PASS PASS PASS	NA N	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	-5.26	Т3
(OTT VoIP)	EEE 802.11b  EEE 802.11g  EEE 802.11s  EEE 802.11a SU  EEE 802.11a RU  EEE 802.11a EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a  EEE 802.11a	PASS PASS PASS PASS PASS PASS PASS PASS	NA N	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS		
(OTT VoIP)  U-NII	EEE 802.11b  EEE 802.11g  EEE 802.11n  EEE 802.11a SU  EEE 802.11a RU  EEE 802.11a RU  EEE 802.11a SU  EEE 802.11a SU	PASS PASS PASS PASS PASS PASS PASS PASS	NA N	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	PASS PASS PASS PASS PASS PASS PASS PASS	-5.26	Т3

FCC ID: A3LSMS906U	PCTEST Thought to be port of the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 36 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 30 01 100

## I. Raw Handset Data

Table 10-2
Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		128	2.36	-26.23		2.00	28.59	20.00	-8.59	Т3	
	Axial	190	2.36	-26.79	-61.36	2.00	29.15	20.00	-9.15	Т3	1.4, 0.8
GSM850		251	2.40	-27.00		2.00	29.40	20.00	-9.40	Т3	
GSIVIOSU		128	-6.75	-34.81			28.06	20.00	-8.06	Т3	
	Radial	190	-7.12	-35.64	-62.49	N/A	28.52	20.00	-8.52	Т3	1.2, 2.2
		251	-6.72	-35.11			28.39	20.00	-8.39	Т3	
		512	2.27	-23.79		2.00	26.06	20.00	-6.06	Т3	
	Axial	661	2.42	-23.65	-61.36	2.00	26.07	20.00	-6.07	Т3	1.4, 0.8
GSM1900		810	2.30	-23.14		2.00	25.44	20.00	-5.44	Т3	
G3W 1900		512	-6.85	-38.43			31.58	20.00	-11.58	T4	
	Radial	661	-6.91	-38.29		N/A	31.38	20.00	-11.38	T4	1.2, 2.2
	radial	810	-7.00	-38.70			31.70	20.00	-11.70	T4	

# Table 10-3 Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		4132	0.01	-51.96		2.00	51.97	20.00	-31.97	T4	
	Axial	4183	0.19	-51.25	-61.36	2.00	51.44	20.00	-31.44	T4	1.4, 0.8
UMTS V		4233	0.19	-52.23		2.00	52.42	20.00	-32.42	T4	
OW TO V		4132	-9.08	-47.94			38.86	20.00	-18.86	T4	
	Radial	4183	-8.78	-47.73	-62.49	N/A	38.95	20.00	-18.95	T4	1.2, 2.2
		4233	-9.13	-47.83			38.70	20.00	-18.70	T4	
		1312	0.20	-51.99		2.00	52.19	20.00	-32.19	T4	
	Axial	1412	0.17	-52.05	-61.36	2.00	52.22	20.00	-32.22	T4	1.4, 0.8
UMTS IV		1513	0.00	-52.08		2.00	52.08	20.00	-32.08	T4	
OWITSTV		1312	-9.31	-48.08			38.77	20.00	-18.77	T4	
	Radial	1412	-8.99	-47.97	-62.49	N/A	38.98	20.00	-18.98	T4	1.2, 2.2
		1513	-9.06	-47.87			38.81	20.00	-18.81	T4	
		9262	0.11	-51.69		2.00	51.80	20.00	-31.80	T4	
	Axial	9400	0.33	-52.13	-61.36	2.00	52.46	20.00	-32.46	T4	1.4, 0.8
UMTS II		9538	-0.16	-52.24		2.00	52.08	20.00	-32.08	T4	
UWISII		9262	-9.01	-47.81			38.80	20.00	-18.80	T4	
	Radial	9400	-8.67	-48.16		N/A	39.49	20.00	-19.49	T4	1.2, 2.2
		9538	-9.12	-48.06			38.94	20.00	-18.94	T4	

# Table 10-4 Raw Data Results for LTE B71

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	133297	0.14	-48.81		2.00	48.95	20.00	-28.95	T4	
	Axial	15MHz	133297	0.17	-48.49	-61.36	2.00	48.66	20.00	-28.66	T4	1.4, 0.8
	Axiai	10MHz	133297	0.16	-48.40		2.00	48.56	20.00	-28.56	T4 T4	1.4, 0.6
LTE Band 71		5MHz	133297	0.06	-48.18		2.00	48.24	20.00	-28.24		
LIE Ballu / I		20MHz	133297	-9.13	-46.55	-62.49	-62.49 N/A	37.42	20.00	-17.42	T4	
	Radial —	15MHz	133297	-8.77	-46.54			37.77	20.00	-17.77	T4	1.2, 2.2
		10MHz	133297	-9.22	-46.85		IVA	37.63	20.00	-17.63	T4	1.2, 2.2
		5MHz	133297	-9.14	-46.50			37.36	20.00	-17.36	T4	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 37 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 37 01 106

## Table 10-5 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		10MHz	23095	-0.16	-48.67		2.00	48.51	20.00	-28.51	T4		
	Axial	5MHz	23095	-0.10	-48.78	-61.36	2.00	48.68	20.00	-28.68	T4	1.4, 0.8	
	Axiai	3MHz	23095	-0.20	-48.62	-01.30	2.00	48.42	20.00	-28.42	T4	1.4, 0.6	
LTE Band 12		1.4MHz	23095	-0.18	-48.83		2.00	48.65	20.00	-28.65	T4		
LIE Band 12		10MHz	23095	-9.15	-46.75	-62.49		37.60	20.00	-17.60	T4		
	Radial	5MHz	23095	-9.06	-46.67		-62 49 N/A	NI/A	37.61	20.00	-17.61	T4	1.2, 2.2
		3MHz	23095	-9.32	-46.68			INA	37.36	20.00	-17.36	T4	1.2, 2.2
		1.4MHz	23095	-9.21	-46.79			37.58	20.00	-17.58	T4		

# Table 10-6 Raw Data Results for LTE B13

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
ſ		Axial	10MHz	23230	-0.30	-46.13	-61.36	2.00	45.83	20.00	-25.83	T4	1.4, 0.8	
	TE D 1 40		5MHz	23230	-0.12	-46.07	-01.30	2.00	45.95	20.00	-25.95	T4	1.4, 0.6	
	LTE Band 13		10MHz	23230	-9.50	-46.10	60.40	NVA	36.60	20.00	-16.60	T4	1.2. 2.2	
		Radial	5MHz	23230	-9.27	-46.13	-62.49	-62.49 N	2.49 N/A	36.86	20.00	-16.86	T4	1.2, 2.2

# Table 10-7 Raw Data Results for LTE B14

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial - Radial -	Δvial	10MHz	23330	-0.01	-45.94	-61.36	2.00	45.93	20.00	-25.93	T4 14 0 9	1.4, 0.8
١.		5MHz	23330	-0.09	-46.30	-61.36	2.00	46.21	20.00	-26.21	T4	1.4, 0.6	
ľ		Padial	10MHz	23330	-9.07	-45.68	62.40	NI/A	36.61	20.00	-16.61	T4	1.2. 2.2
		Radial —	5MHz	23330	-9.38	-46.40	-62.49	-62.49 N/A	IN/A	37.02	20.00	-17.02	T4

## Table 10-8 Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		15MHz	26865	0.30	-48.85		2.00	49.15	20.00	-29.15	T4		
		10MHz	26865	-0.21	-48.86		2.00	48.65	20.00	-28.65	T4		
	Axial	5MHz	26865	-0.25	-49.08	-61.36	2.00	48.83	20.00	-28.83	T4	1.4, 0.8	
		3MHz	26865	-0.23	-49.13		2.00	48.90	20.00	-28.90	T4		
I TE Band 26		1.4MHz	26865	0.01	-48.68		2.00	48.69	20.00	-28.69	T4		
LIE Ballu 20	E Band 26	15MHz	26865	-9.19	-46.95	-62.49		37.76	20.00	-17.76	T4		
		10MHz	26865	-9.31	-46.95		-62.49		37.64	20.00	-17.64	T4	
	Radial	5MHz	26865	-9.22	-47.07			N/A	37.85	20.00	-17.85	T4	1.2, 2.2
		3MHz	26865	-9.23	-46.88				37.65	20.00	-17.65	T4	
		1.4MHz	26865	-9.20	-46.75			37.55	20.00	-17.55	T4		

# Table 10-9 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		10MHz	20525	-0.12	-48.16		2.00	48.04	20.00	-28.04	T4		
	Axial	5MHz	20525	-0.10	-48.30	-61.36	2.00	48.20	20.00	-28.20	T4	1.4, 0.8	
	Axiai	3MHz	20525	-0.04	-48.45		2.00	48.41	20.00	-28.41	T4	1.4, 0.6	
LTE Band 5		1.4MHz	20525	0.15	-48.74		2.00	48.89	20.00	-28.89	T4		
LIE Ballu 5		10MHz	20525	-8.97	-47.28	-62.49		38.31	20.00	-18.31	T4		
	Radial	5MHz	20525	-9.42	-46.93		NI/A	37.51	20.00	-17.51	T4	1.2, 2.2	
	Naulai	3MHz	20525	-9.31	-46.80		-62.49 N/A	INA	37.49	20.00	-17.49	T4	1.2, 2.2
		1.4MHz	20525	-9.30	-46.70			37.40	20.00	-17.40	T4		

FCC ID: A3LSMS906U	Proof to be post of Sentences	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 20 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 38 of 108

## **Table 10-10 Raw Data Results for LTE B66**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	132322	-0.05	-48.44		2.00	48.39	20.00	-28.39	T4		
		15MHz	132322	-0.10	-48.65		2.00	48.55	20.00	-28.55	T4		
	Axial	10MHz	132322	0.03	-48.45	-61.36	2.00	48.48	20.00	-28.48	T4	1.4, 0.8	
	Axiai	5MHz	132322	-0.18	-48.84	-01.30	2.00	48.66	20.00	-28.66	T4	1.4, 0.6	
		3MHz	132322	-0.24	-48.86		2.00	48.62	20.00	-28.62	T4		
LTE Band 66		1.4MHz	132322	0.22	-48.92		2.00	49.14	20.00	-29.14	T4		
LIE Ballu 66		20MHz	132322	-9.31	-45.85			36.54	20.00	-16.54	T4		
		15MHz	132322	-9.41	-45.92			36.51	20.00	-16.51	T4		
	Radial	10MHz	132322	-9.20	-45.94	-62.49 N/A	NI/A	36.74	20.00	-16.74	T4	1.2, 2.2	
	Naulai	5MHz	132322	-9.25	-45.83		IWA	36.58	20.00	-16.58	T4	1.2, 2.2	
		3MHz	132322	-9.11	-45.89				36.78	20.00	-16.78	T4	
		1.4MHz	132322	-9.45	-45.85			36.40	20.00	-16.40	T4		

## **Table 10-11 Raw Data Results for LTE B25**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	26365	0.11	-48.27		2.00	48.38	20.00	-28.38	T4		
		15MHz	26365	-0.23	-48.60		2.00	48.37	20.00	-28.37	T4		
	Axial	10MHz	26365	-0.08	-48.82	-61.36	2.00	48.74	20.00	-28.74	T4	1.4, 0.8	
	Axiai	5MHz	26365	-0.27	-48.83	-61.36	2.00	48.56	20.00	-28.56	T4	1.4, 0.6	
		3MHz	26365	-0.26	-48.45		2.00	48.19	20.00	-28.19	T4		
LTE Band 25		1.4MHz	26365	0.01	-49.12		2.00	49.13	20.00	-29.13	T4		
LIE Ballu 25		20MHz	26365	-8.77	-44.90			36.13	20.00	-16.13	T4		
		15MHz	26365	-9.23	-45.02			35.79	20.00	-15.79	T4		
	Radial	10MHz	26365	-8.93	-45.02	-62.49 N/A	NVA	36.09	20.00	-16.09	T4	1.2, 2.2	
	Radiai	5MHz	26365	-9.30	-44.94		-62 49 N/A	IWA	35.64	20.00	-15.64	T4	1.2, 2.2
		3MHz	26365	-9.08	-45.58			36.50	20.00	-16.50	T4		
		1.4MHz	26365	-8.91	-45.32			36.41	20.00	-16.41	T4		

## **Table 10-12** Raw Data Results for LTE B2

					- 414	Courto IC	<u> </u>					
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	18900	-0.06	-47.98		2.00	47.92	20.00	-27.92	T4	
		15MHz	18900	-0.17	-48.84		2.00	48.67	20.00	-28.67	T4	
	Axial	10MHz	18900	0.02	-48.96	-61.36	2.00	48.98	20.00	-28.98	T4	1.4, 0.8
	Axiai	5MHz	18900	-0.15	-48.30	-01.36	2.00	48.15	20.00	-28.15	T4	1.4, 0.6
		3MHz	18900	0.22	-48.30	_	2.00	48.52	20.00	-28.52	T4	
		1.4MHz	18900	-0.08	-49.33		2.00	49.25	20.00	-29.25	T4	
LTE Band 2		20MHz	18900	-9.43	-44.71			35.28	20.00	-15.28	T4	
LIE Banu 2		15MHz	18900	-8.80	-44.66			35.86	20.00	-15.86	T4	
		10MHz	18900	-9.29	-44.78			35.49	20.00	-15.49	T4	
	Radial	5MHz	19175	-9.50	-44.97	60.40	N/A	35.47	20.00	-15.47	T4	1.2, 2.2
	Radiai	5MHz	18900	-9.54	-44.46	-62.49	IN/A	34.92	20.00	-14.92	T4	1.2, 2.2
		5MHz	18625	-9.20	-45.29			36.09	20.00	-16.09	T4	
		3MHz	18900	-9.36	-44.91			35.55	20.00	-15.55	T4	
		1.4MHz	18900	-9.19	-45.06			35.87	20.00	-15.87	T4	

## **Table 10-13 Raw Data Results for LTE B30**

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Asial	10MHz	27710	-0.14	-47.73	-61.36	2.00	47.59	20.00	-27.59	T4	1.4, 0.8
LTE Band 20	Axial -	5MHz	27710	-0.33	-47.78	-61.36	2.00	47.45	20.00	-27.45	T4	1.4, 0.6
LIE Band 30	LTE Band 30 Radial	10MHz	27710	-9.39	-45.07	62.40	NI/Λ	35.68	20.00	-15.68	T4	1.2. 2.2
	Radiai	5MHz	27710	-9.58	-45.64	-62.49	l9 N/A	36.06	20.00	-16.06	T4	1.2, 2.2

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 39 of 108

## **Table 10-14 Raw Data Results for LTE B7**

							,,	-				
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	21100	0.13	-48.23		2.00	48.36	20.00	-28.36	T4	
	Axial -	15MHz	21100	-0.07	-48.04	61.36 -	2.00	47.97	20.00	-27.97	T4	1.4, 0.8
		10MHz	21100	-0.31	-48.12		2.00	47.81	20.00	-27.81	T4	1.4, 0.6
LTE Band 7		5MHz	21100	-0.29	-48.46		2.00	48.17	20.00	-28.17	T4	
LIE Ballu /		20MHz	21100	-9.08	-45.47	-62.49		36.39	20.00	-16.39	T4	
	Radial	15MHz	21100	-9.65	-45.80		-62.49 N/A	36.15	20.00	-16.15	T4	1.2. 2.2
	Naulai	10MHz	21100	-9.68	-45.72			INA	36.04	20.00	-16.04	T4
		5MHz	21100	-9.49	-45.56			36.07	20.00	-16.07	T4	

## **Table 10-15** Raw Data Results for LTE B41 Power Class 3

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	-0.10	-38.77		2.00	38.67	20.00	-18.67	T4	
	Axial	15MHz	40620	-0.26	-39.35	-61.36	2.00	39.09	20.00	-19.09	T4 1.4, 0	1.4, 0.8
	Axiai	10MHz	40620	-0.27	-39.33		2.00	39.06	20.00	-19.06		1.4, 0.6
LTE Band 41		5MHz	40620	-0.35	-39.00		2.00	38.65	20.00	-18.65		
(PC3)		20MHz	40620	-9.35	-40.14	-62.49	-62.49 N/A	30.79	20.00	-10.79	T4	
	Radial	15MHz	40620	-9.33	-41.02			31.69	20.00	-11.69	T4	1.2. 2.2
	Naulai	10MHz	40620	-9.42	-41.15		IVA	31.73	20.00	-11.73	T4	1.2, 2.2
		5MHz	40620	-9.60	-41.43			31.83	20.00	-11.83	T4	

## **Table 10-16**

			Raw	Data Re	souns n	DLLIFR	41 POWE	ei Ciass	_			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	41490	-0.43	-33.50		2.00	33.07	20.00	-13.07	T4	
		20MHz	41055	-0.09	-37.33		2.00	37.24	20.00	-17.24	T4	
		20MHz	40620	-0.24	-36.15		2.00	35.91	20.00	-15.91	T4	
	Axial	20MHz	40185	-0.08	-36.06	-61.36	2.00	35.98	20.00	-15.98	T4	1.4, 0.8
	Axidi	20MHz	39750	-0.31	-35.54	-01.30	2.00	35.23	20.00	-15.23	T4	1.4, 0.6
		15MHz	40620	-0.23	-36.45		2.00	36.22	20.00	-16.22	T4	
		10MHz	40620	-0.26	-36.46		2.00	36.20	20.00	-16.20	T4	
LTE Band 41		5MHz	40620	-0.52	-36.48		2.00	35.96	20.00	-15.96	T4	
(PC2)		20MHz	41490	-9.06	-37.43			28.37	20.00	-8.37	Т3	
		20MHz	41055	-9.08	-40.09			31.01	20.00	-11.01	T4	
		20MHz	40620	-9.21	-37.94			28.73	20.00	-8.73	Т3	
	Radial	20MHz	40185	-8.92	-38.50	62.40	N/A	29.58	20.00	-9.58	Т3	1.2, 2.2
	Radiai	20MHz	39750	-9.05	-38.17	-62.49	IV/A	29.12	20.00	-9.12	Т3	1.2, 2.2
		15MHz	40620	-9.21	-38.75			29.54	20.00	-9.54	Т3	
		10MHz	40620	-8.93	-38.77			29.84	20.00	-9.84	Т3	
		5MHz	40620	-9.34	-39.05			29.71	20.00	-9.71	Т3	

## **Table 10-17** Raw Data Results for LTE B48

					Data it	ssuits io						
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	55990	-0.28	-40.00		2.00	39.72	20.00	-19.72	T4	
	Axial	15MHz	55990	0.14	-42.18	-61.36	2.00	42.32	20.00	-22.32	T4	1.4, 0.8
	Axiai	10MHz	55990	-0.40	-42.10	-01.30	2.00	41.70	20.00	-21.70	T4	1.4, 0.6
LTE Band 40		5MHz	55990	-0.35	-42.26		2.00	41.91	20.00	-21.91	T4	
LIE Ballu 40	LTE Band 48	20MHz	55990	-9.65	-44.89			35.24	20.00	-15.24	T4	
	Radial	15MHz	55990	-9.41	-44.99		) N/A	35.58	20.00	-15.58	T4	1.2, 2.2
	Natial	10MHz	55990	-8.85	-44.84		IWA	35.99	20.00	-15.99	T4	1.2, 2.2
		5MHz	55990	-9.59	-44.93		35.34	20.00	-15.34	T4		

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 40 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 40 01 106

## **Table 10-18** Raw Data Results for NR n71

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	136100	-3.91	-47.70		2.00	43.79	20.00	-23.79	T4	
	Axial	15MHz	136100	-2.94	-45.60	-59.13	2.00	42.66	20.00	-22.66	T4	1.4, 0.8
		10MHz	136100	-4.03	-46.73		2.00	42.70	20.00	-22.70	T4	1.4, 0.6
ND =74		5MHz	136100	-3.60	-46.16		2.00	42.56	20.00	-22.56	T4	
NR II/ I	NR n71	20MHz	136100	-13.49	-48.51	-60.06		35.02	20.00	-15.02	T4	
	Radial	15MHz	136100	-13.55	-48.25		N/A	34.70	20.00	-14.70	T4	1.2. 2.2
	Naulai	10MHz	136100	-13.59	-48.79		INA	35.20	20.00	-15.20	T4	1.2, 2.2
		5MHz	136100	-13.55	-48.85			35.30	20.00	-15.30	T4	

## **Table 10-19** Raw Data Results for NR n12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		15MHz	141500	-3.69	-47.74		2.00	44.05	20.00	-24.05	T4	
	Axial	10MHz	141500	-3.17	-46.68	-59.13	2.00	43.51	20.00	-23.51	T4	1.4, 0.8
NR n12		5MHz	141500	-3.85	-47.19		2.00	43.34	20.00	-23.34	T4	
NK IIIZ		15MHz	141500	-13.50	-48.30			34.80	20.00	-14.80	T4	
	Radial	10MHz	141500	-13.46	-48.53	-60.06	N/A	35.07	20.00	-15.07	T4	1.2, 2.2
		5MHz	141500	-13.42	-48.26			34.84	20.00	-14.84	T4	

## **Table 10-20** Raw Data Results for NR n5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates	
		20MHz	167800	-3.35	-45.39		2.00	42.04	20.00	-22.04	T4		
		20MHz	167300	-3.90	-45.11		2.00	41.21	20.00	-21.21	T4		
	Axial	20MHz	166800	-3.53	-45.43	-59.13	2.00	41.90	20.00	-21.90	T4	1.4, 0.8	
		15MHz	167300	-3.69	-47.27	-39.13	2.00	43.58	20.00	-23.58	T4	1.4, 0.0	
NR n5		10MHz	167300	-3.75	-46.92	7	2.00	43.17	20.00	-23.17	T4		
NK IIS		5MHz	167300	-3.75	-48.75		2.00	45.00	20.00	-25.00	T4		
		20MHz	167300	-13.40	-48.25	-60.06			34.85	20.00	-14.85	T4	
	Radial	15MHz	167300	-13.48	-48.31		N/A	34.83	20.00	-14.83	T4	1.2, 2.2	
	raulai	10MHz	167300	-13.43	-48.61		06 N/A	35.18	20.00	-15.18	T4	1.2, 2.2	
		5MHz	167300	-13.37	-48.61			35.24	20.00	-15.24	T4		

## **Table 10-21** Raw Data Results for NR n66

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	349000	-3.22	-47.11		2.00	43.89	20.00	-23.89	T4	
		30MHz	349000	-3.55	-48.45		2.00	44.90	20.00	-24.90	T4	
	Axial	20MHz	349000	-3.41	-48.47	-59.13	2.00	45.06	20.00	-25.06	T4	1.4, 0.8
	Axiai	15MHz	349000	-3.44	-48.49	-59.15	2.00	45.05	20.00	-25.05	T4	1.4, 0.6
		10MHz	349000	-3.21	-48.87		2.00	45.66	20.00	-25.66	T4	
ND CC		5MHz	349000	-3.50	-49.26		2.00	45.76	20.00	-25.76	T4	
NK 1100	NR n66	40MHz	349000	-13.41	-47.64			34.23	20.00	-14.23	T4	
		30MHz	349000	-13.44	-48.26		20 200	34.82	20.00	-14.82	T4	
	D#i-I	20MHz	349000	-13.49	-47.04	-60.06 9		33.55	20.00	-13.55	T4	40.00
	Radial	15MHz	349000	-13.52	-47.83		-60.06 N/A	34.31	20.00	-14.31	T4	1.2, 2.2
		10MHz	349000	-13.58	-47.39			33.81	20.00	-13.81	T4	
		5MHz	349000	-13.49	-47.54			34.05	20.00	-14.05	T4	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 41 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 41 01 100

## **Table 10-22** Raw Data Results for NR n25

					- 414	Courto IC	· · · · · · · · · · · · · · · · · · ·					
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	376500	-3.19	-45.37		2.00	42.18	20.00	-22.18	T4	
		30MHz	376500	-3.39	-44.90		2.00	41.51	20.00	-21.51	T4	
		25MHz	376500	-3.14	-46.04		2.00	42.90	20.00	-22.90	T4	
	Axial	20MHz	376500	-3.15	-46.72	-59.13	2.00	43.57	20.00	-23.57	T4	1.4, 0.8
		15MHz	376500	-3.45	-47.74		2.00	44.29	20.00	-24.29	T4	
		10MHz	376500	-3.42	-47.99		2.00	44.57	20.00	-24.57	T4	
NR n25		5MHz	376500	-3.46	-48.69		2.00	45.23	20.00	-25.23	T4	
NK 1125		40MHz	376500	-13.50	-46.88			33.38	20.00	-13.38	T4	
		30MHz	376500	-13.45	-47.82			34.37	20.00	-14.37	T4	
		25MHz	376500	-13.40	-47.67			34.27	20.00	-14.27	T4	
	Radial	20MHz	376500	-13.44	-46.71	-60.06	N/A	33.27	20.00	-13.27	T4	1.2, 2.2
	- Nadiai	15MHz	376500	-13.39	-47.79			34.40	20.00	-14.40	T4	
		10MHz	376500	-13.45	-47.05		5	33.60	20.00	-13.60	T4	
		5MHz	376500	-13.43	-46.54			33.11	20.00	-13.11	T4	

## **Table 10-23** Raw Data Results for NR n30

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Avial	10MHz	462000	-3.50	-48.46	-58.02	2.00	44.96	20.00	-24.96	T4	1.4, 0.8
ND =20	Axial	5MHz	462000	-3.53	-46.02		2.00	42.49	20.00	-22.49	T4	1.4, 0.6
NK 1130	Radial -	10MHz	462000	-13.45	-47.95	-60.06	N/A	34.50	20.00	-14.50	T4	1.2. 2.2
		5MHz	462000	-13.45	-48.15		N/A	34.70	20.00	-14.70	T4	1.2, 2.2

## **Table 10-24** Raw Data Results for NR n7

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	507000	-3.59	-46.32		2.00	42.73	20.00	-22.73	T4	
		30MHz	507000	-3.58	-44.91	] [	1.92	41.33	20.00	-21.33	T4	
		25MHz	507000	-3.37	-48.59	1 [	1.95	45.22	20.00	-25.22	T4	
	Axial	20MHz	507000	-3.64	-48.34	-58.02	1.96	44.70	20.00	-24.70	T4	1.4, 0.8
		15MHz	507000	-3.48	-48.59	] [	1.95	45.11	20.00	-25.11	T4	
		10MHz	507000	-3.81	-48.87		1.98	45.06	20.00	-25.06	T4	
		5MHz	507000	-3.39	-50.13	1 [	2.00	46.74	20.00	-26.74	T4	
NR n7		40MHz	510000	-13.19	-44.41			31.22	20.00	-11.22	T4	
NK II/		40MHz	507000	-13.42	-43.88			30.46	20.00	-10.46	T4	
		40MHz	504000	-13.34	-44.59			31.25	20.00	-11.25	T4	
		30MHz	507000	-13.27	-44.71			31.44	20.00	-11.44	T4	
	Radial	25MHz	507000	-13.30	-45.18	-60.06	N/A	31.88	20.00	-11.88	T4	1.2, 2.2
		20MHz	507000	-13.48	-47.63			34.15	20.00	-14.15	T4	
		15MHz	507000	-13.47	-47.03			33.56	20.00	-13.56	T4	
		10MHz	507000	-13.47	-47.75			34.28	20.00	-14.28	T4	
		5MHz	507000	-13.47	-47.79			34.32	20.00	-14.32	T4	

FCC ID: A3LSMS906U	PCTEST To thought to be port of the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 42 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 42 01 106

**Table 10-25** Raw Data Results for NR n41 Power Class 2

			itan	Data N	coulto i	OF INE II	FIIOWE	i Ciass 2	_			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		100MHz	518598	-3.06	-31.77		2.00	28.71	20.00	-8.71	Т3	
		90MHz	518598	-3.89	-31.80		2.00	27.91	20.00	-7.91	Т3	
		80MHz	518598	-3.33	-32.05		2.00	28.72	20.00	-8.72	Т3	
		70MHz	518598	-3.63	-33.95		2.00	30.32	20.00	-10.32	T4	
		60MHz	518598	-3.17	-31.45		2.00	28.28	20.00	-8.28	Т3	
		50MHz	518598	-3.41	-31.23		2.00	27.82	20.00	-7.82	Т3	
	Axial	40MHz	518598	-3.18	-33.40	-58.02	2.00	30.22	20.00	-10.22	T4	1.4, 0.8
		30MHz	518598	-3.61	-30.56		2.00	26.95	20.00	-6.95	Т3	
		20MHz	535998	-3.63	-29.80		1.98	26.17	20.00	-6.17	Т3	
		20MHz	527298	-3.23	-32.18		1.97	28.95	20.00	-8.95	Т3	
		20MHz	518598	-3.38	-30.24		2.00	26.86	20.00	-6.86	Т3	
		20MHz	509898	-3.23	-31.16		1.92	27.93	20.00	-7.93	Т3	
NR n41		20MHz	501204	-3.29	-31.61		1.97	28.32	20.00	-8.32	Т3	
(PC2)		100MHz	518598	-11.06	-36.21			25.15	20.00	-5.15	Т3	
		90MHz	518598	-11.03	-35.34			24.31	20.00	-4.31	Т3	
		80MHz	518598	-11.04	-35.54			24.50	20.00	-4.50	Т3	
		70MHz	518598	-11.19	-36.69			25.50	20.00	-5.50	Т3	
		60MHz	518598	-11.09	-36.05			24.96	20.00	-4.96	Т3	
		50MHz	518598	-11.07	-35.33			24.26	20.00	-4.26	Т3	
	Radial	40MHz	518598	-11.17	-38.53	-60.06	N/A	27.36	20.00	-7.36	Т3	1.2, 1.8
		30MHz	518598	-11.17	-38.15			26.98	20.00	-6.98	T3	
		20MHz	535998	-10.87	-38.44			27.57	20.00	-7.57	Т3	
		20MHz	527298	-11.24	-38.35			27.11	20.00	-7.11	Т3	
		20MHz	518598	-11.13	-34.22			23.09	20.00	-3.09	Т3	
		20MHz	509898	-11.25	-37.92			26.67	20.00	-6.67	Т3	
		20MHz	501204	-11.28	-40.18			28.90	20.00	-8.90	Т3	

**Table 10-26** Raw Data Results for NR n77, DoD Power Class 2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates					
		100MHz	633334	-3.15	-42.69		2.00	39.54	20.00	-19.54	T4						
		90MHz	633334	-3.48	-42.58		2.00	39.10	20.00	-19.10	T4						
		80MHz	633334	-3.44	-42.77		2.00	39.33	20.00	-19.33	T4						
		70MHz	633334	-3.55	-42.72		2.00	39.17	20.00	-19.17	T4						
		60MHz	633334	-3.24	-42.62		2.00	39.38	20.00	-19.38	T4						
	Axial	50MHz	633334	-3.49	-41.73	-58.02	2.00	38.24	20.00	-18.24	T4	1.4, 0.8					
		40MHz	633334	-3.51	-42.03		2.00	38.52	20.00	-18.52	T4						
		30MHz	633334	-3.60	-43.07		2.00	39.47	20.00	-19.47	T4						
		20MHz	633334	-3.53	-41.78		2.00	38.25	20.00	-18.25	T4						
		15MHz	633334	-3.53	-43.02		1.86	39.49	20.00	-19.49	T4						
NR n77,		10MHz	633334	-3.51	-40.51		1.82	37.00	20.00	-17.00	T4						
DOD		100MHz	633334	-11.16	-40.41			29.25	20.00	-9.25	Т3						
		90MHz	633334	-11.33	-39.85			28.52	20.00	-8.52	Т3						
		80MHz	633334	-11.14	-40.46			29.32	20.00	-9.32	Т3						
		70MHz	633334	-11.15	-40.39			29.24	20.00	-9.24	Т3						
		60MHz	633334	-11.16	-41.64			30.48	20.00	-10.48	T4						
	Radial	50MHz	633334	-11.09	-42.12	-60.06	N/A	31.03	20.00	-11.03	T4	1.2, 1.8					
		40MHz	633334	-11.10	-42.37			31.27	20.00	-11.27	T4						
		30MHz	633334	-11.17	-42.20			1	7			31.03	20.00	-11.03	T4		
		20MHz	633334	-11.15	-43.04			31.89	20.00	-11.89	T4						
		15MHz	633334	-11.00	-43.41								32.41	20.00	-12.41	T4	
		10MHz	633334	-11.26	-43.87			32.61	20.00	-12.61	T4						

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dago 42 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 43 of 108

Table 10-27
Raw Data Results for NR n77 Power Class 2

				Dutuit	oouito i	OI INIX III	7 . 0110	. <u> </u>	-			
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		100MHz	656000	-3.38	-43.09		2.00	39.71	20.00	-19.71	T4	
		90MHz	656000	-3.32	-40.17		2.00	36.85	20.00	-16.85	T4	
		80MHz	656000	-3.80	-43.40		2.00	39.60	20.00	-19.60	T4	
		70MHz	656000	-3.42	-42.19		2.00	38.77	20.00	-18.77	T4	
		60MHz	656000	-3.46	-42.01		2.00	38.55	20.00	-18.55	T4	
	Axial	50MHz	656000	-3.39	-44.11	-58.02	2.00	40.72	20.00	-20.72	T4	1.4, 0.8
		40MHz	656000	-3.37	-39.69		2.00	36.32	20.00	-16.32	T4	
		30MHz	656000	-3.61	-43.69		2.00	40.08	20.00	-20.08	T4	
		20MHz	656000	-3.49	-44.27		2.00	40.78	20.00	-20.78	T4	
		15MHz	656000	-3.38	-43.07		2.00	39.69	20.00	-19.69	T4	
NR n77		10MHz	656000	-3.58	-42.36		1.88	38.78	20.00	-18.78	T4	
(PC2)		100MHz	656000	-11.15	-43.07			31.92	20.00	-11.92	T4	
		90MHz	656000	-11.18	-43.09			31.91	20.00	-11.91	T4	
		80MHz	656000	-11.28	-42.67			31.39	20.00	-11.39	T4	
		70MHz	656000	-11.20	-42.35			31.15	20.00	-11.15	T4	
		60MHz	656000	-11.17	-41.91			30.74	20.00	-10.74	T4	
	Radial	50MHz	656000	-11.30	-41.85	-60.06	N/A	30.55	20.00	-10.55	T4	1.2, 1.8
		40MHz	656000	-11.25	-42.31			31.06	20.00	-11.06	T4	
		30MHz	656000	-11.14	-42.59			31.45	20.00	-11.45	T4	
		20MHz	656000	-11.20	-43.44			32.24	20.00	-12.24	T4	
		15MHz	656000	-11.20	-43.62			32.42	20.00	-12.42	T4	
		10MHz	656000	-11.22	-43.32			32.10	20.00	-12.10	T4	

Table 10-28
Raw Data Results for 2.4GHz WIFI

			K	aw Dala	Results	101 2.4GF	12 VVIFI				
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE	Axial	6	4.11	-28.89	-61.36	2.00	33.00	20.00	-13.00	T4	1.4, 0.8
802.11b	Radial	6	-3.19	-37.02	-64.26	N/A	33.83	20.00	-13.83	T4	1.6, 2.2
IEEE	Axial	6	4.07	-26.83	-61.36	2.00	30.90	20.00	-10.90	T4	1.4, 0.8
802.11g	Radial	6	-2.91	-30.94	-64.26	N/A	28.03	20.00	-8.03	Т3	1.6, 2.2
IEEE	Axial	6	4.62	-23.04	-61.36	2.00	27.66	20.00	-7.66	Т3	1.4, 0.8
802.11n	Radial	6	-2.99	-31.51	-64.26	N/A	28.52	20.00	-8.52	Т3	1.6, 2.2
•											
IEEE	Axial	6	4.49	-24.25	-61.36	2.00	28.74	20.00	-8.74	Т3	1.4, 0.8
802.11ax SU	Radial	6	-2.67	-27.31	-64.26	N/A	24.64	20.00	-4.64	Т3	1.6, 2.2
		1	4.05	-21.07		2.00	25.12	20.00	-5.12	Т3	
	Axial	6	4.39	-23.07	-61.36	2.00	27.46	20.00	-7.46	Т3	1.4, 0.8
IEEE		11	3.85	-24.73		2.00	28.58	20.00	-8.58	Т3	
802.11ax RU		1	-2.88	-26.17		•	23.29	20.00	-3.29	T3	
	Radial	6	-3.17	-27.58	-64.26	N/A	24.41	20.00	-4.41	Т3	1.6, 2.2
		11	-2.83	-26.26			23.43	20.00	-3.43	Т3	

# Table 10-29 Raw Data Results for 5GHz WIFI IEEE 802.11a

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	20MHz	1	40	4.05	-22.43	-61.36	2.00	26.48	20.00	-6.48	T3	1.4, 0.8
EEE 802.11a													
	Radial	20MHz	1	40	-3.24	-36.64	-60.61	N/A	33.40	20.00	-13.40	T4	1.6, 2.2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 44 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 44 01 100

## **Table 10-30** Raw Data Results for 5GHz WIFI IEEE 802.11n

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	4.18	-22.85	-61.36	2.00	27.03	20.00	-7.03	T3	1.4. 0.8
	Axiai	20MHz	1	40	3.97	-24.76	-01.30	2.00	28.73	20.00	-8.73	Т3	1.4, 0.6
IEEE 802.11n													
002.1111	Radial	40MHz	1	38	-3.63	-37.27	-60.61	N/A	33.64	20.00	-13.64	T4	1.6. 2.2
	Radiai	20MHz	1	40	-3.32	-37.39	-00.01	IN/A	34.07	20.00	-14.07	T4	1.0, 2.2

## **Table 10-31** Raw Data Results for 5GHz WIFI IEEE 802.11ac

								· · · - · · · ·						
	Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
ſ		Axial	40MHz	1	38	4.35	-22.90	-61.36	2.00	27.25	20.00	-7.25	T3	1.4, 0.8
	IEEE	Axiai	20MHz	1	40	3.98	-22.83	-01.30	2.00	26.81	20.00	-6.81	T3	1.4, 0.6
	802.11ac													
	002.71ac	Radial	40MHz	1	38	-3.76	-33.89	-60.61	N/A	30.13	20.00	-10.13	T4	1.6. 2.2
		Naulai	20MHz	1	40	-3.69	-36.40	-00.01	IN/A	32.71	20.00	-12.71	T4	1.0, 2.2

## **Table 10-32** Raw Data Results for 5GHz WIFI IEEE 802.11ax

				all Bata		.0 .0. 0	GHZ WIF	`	<u> </u>	^			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	3.79	-23.62	-60.02	2.00	27.41	20.00	-7.41	T3	1.4, 0.8
IEEE	Axiai	20MHz	1	40	4.42	-22.19	-60.02	2.00	26.61	20.00	-6.61	Т3	1.4, 0.6
802.11ax SU													
002.11ux 00	Radial	40MHz	1	38	-3.71	-30.34	-60.61	N/A	26.63	20.00	-6.63	T3	1.6, 2.2
	Radiai	20MHz	1	40	-3.75	-30.43	-00.01	IN/A	26.68	20.00	-6.68	Т3	1.0, 2.2
-													
		40MHz	1	38	4.63	-20.78		2.00	25.41	20.00	-5.41	Т3	
		20MHz	1	36	3.74	-23.54		1.47	27.28	20.00	-7.28	Т3	
		20MHz	1	40	3.88	-21.38		2.00	25.26	20.00	-5.26	Т3	
		20MHz	1	48	4.51	-24.33		2.00	28.84	20.00	-8.84	T3	
		40MHz	2A	54	3.94	-21.76		2.00	25.70	20.00	-5.70	Т3	
	Axial	20MHz	2A	56	3.88	-22.91	-60.02	2.00	26.79	20.00	-6.79	T3	1.4, 0.8
	Axiai	40MHz	2C	118	3.99	-22.77	-00.02	2.00	26.76	20.00	-6.76	Т3	1.4, 0.0
		20MHz	2C	120	4.03	-23.69		2.00	27.72	20.00	-7.72	T3	
		40MHz	3	151	3.99	-21.53		2.00	25.52	20.00	-5.52	Т3	
		20MHz	3	157	4.18	-21.62		2.00	25.80	20.00	-5.80	Т3	
		40MHz	4	175	4.14	-22.23		2.00	26.37	20.00	-6.37	Т3	
IEEE		20MHz	4	177	3.96	-22.61		2.00	26.57	20.00	-6.57	T3	
802.11ax RU													
002ax 110		40MHz	1	38	-3.43	-30.13			26.70	20.00	-6.70	Т3	
		20MHz	1	40	-3.24	-29.86			26.62	20.00	-6.62	Т3	
		40MHz	2A	54	-3.68	-31.53			27.85	20.00	-7.85	Т3	
		20MHz	2A	52	-3.53	-30.26			26.73	20.00	-6.73	T3	
		20MHz	2A	56	-3.28	-29.60			26.32	20.00	-6.32	Т3	
	Radial	20MHz	2A	64	-3.43	-30.31	-60.61	N/A	26.88	20.00	-6.88	T3	1.6, 2.2
	Naulai	40MHz	2C	118	-3.40	-29.92	-00.01	INA	26.52	20.00	-6.52	Т3	1.0, 2.2
		20MHz	2C	120	-3.65	-30.72			27.07	20.00	-7.07	Т3	
		40MHz	3	151	-3.68	-30.77			27.09	20.00	-7.09	T3	
		20MHz	3	157	-3.59	-30.25			26.66	20.00	-6.66	T3	
		40MHz	4	175	-3.64	-31.05			27.41	20.00	-7.41	T3	
		20MHz	4	177	-3.51	-30.62			27.11	20.00	-7.11	T3	

## **Table 10-33** Raw Data Results for EDGE (OTT VoIP)

_					Data III			<del> </del>				
	Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	EDGE850	Axial	190	20.82	-29.76	-61.36	2.00	50.58	20.00	-30.58	T4	1.4, 0.8
	LDGL030	Radial	190	11.77	-36.98	-62.49	N/A	48.75	20.00	-28.75	T4	1.2, 2.2
	EDGE1900	Axial	661	20.46	-27.61	-61.36	2.00	48.07	20.00	-28.07	T4	1.4, 0.8
	EDGE 1900	Radial	661	11.83	-43.66	-62.49	N/A	55.49	20.00	-35.49	T4	1.2, 2.2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 45 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 45 of 108

## **Table 10-34** Raw Data Results for HSPA (OTT VoIP)

			- 1011		<del>ocaito ioi</del>		<del> </del>				
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	20.18	-41.55	-61.36	1.87	61.73	20.00	-41.73	T4	1.4, 0.8
nora v	Radial	4183	11.88	-45.95	-62.49	N/A	57.83	20.00	-37.83	T4	1.2, 2.2
HSPA IV	Axial	1412	20.23	-42.47	-61.36	1.96	62.70	20.00	-42.70	T4	1.4, 0.8
HOPAIV	Radial	1412	11.82	-46.05	-62.49	N/A	57.87	20.00	-37.87	T4	1.2, 2.2
HSPA II	Axial	9400	20.71	-41.44	-61.36	2.00	62.15	20.00	-42.15	T4	1.4, 0.8
HOPAII	Radial	9400	11.80	-46.53	-62.49	N/A	58.33	20.00	-38.33	T4	1.2, 2.2

## **Table 10-35** Raw Data Results for LTE FDD B71 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	133297	20.58	-40.25		2.00	60.83	20.00	-40.83	T4	
		15MHz	133297	20.15	-40.37		1.95	60.52	20.00	-40.52	T4	
	Axial	10MHz	133297	20.15	-40.30	-61.36	1.99	60.45	20.00	-40.45	T4	1.4, 0.8
	Axiai	5MHz	133447	20.25	-40.34	-61.36	1.86	60.59	20.00	-40.59	T4	1.4, 0.6
		5MHz	133297	20.13	-39.29		2.00	59.42	20.00	-39.42	T4	
LTE Band 71		5MHz	133147	20.23	-40.20		1.98	60.43	20.00	-40.43	T4	
LIE Ballu / I		20MHz	133297	12.27	-44.90			57.17	20.00	-37.17	T4	
		15MHz	133297	11.94	-44.76			56.70	20.00	-36.70	T4	
	Radial	10MHz	133297	11.91	-45.20	-62.49	N/A	57.11	20.00	-37.11	T4	1.2, 2.2
	Raulai	5MHz	133447	11.92	-44.60	-62.49	IN/A	56.52	20.00	-36.52	T4	1.2, 2.2
		5MHz	133297	11.97	-44.72			56.69	20.00	-36.69	T4	
		5MHz	133147	11.95	-44.60			56.55	20.00	-36.55	T4	

## **Table 10-36** Raw Data Results for LTE TDD B41 (PC2) (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	40620	20.64	-34.57		1.95	55.21	20.00	-35.21	T4	
		15MHz	41490	20.17	-33.67		1.80	53.84	20.00	-33.84	T4	
		15MHz	41055	20.41	-35.62		1.98	56.03	20.00	-36.03	T4	
	Axial	15MHz	40620	20.22	-34.57	-61.36	2.00	54.79	20.00	-34.79	T4	1.4, 0.8
	Axiai	15MHz	40185	20.29	-35.05	-01.30	2.00	55.34	20.00	-35.34	T4	1.4, 0.6
		15MHz	39750	20.34	-35.13		1.98	55.47	20.00	-35.47	T4	
		10MHz	40620	20.31	-34.61		2.00	54.92	20.00	-34.92	T4	
LTE Band 41		5MHz	40620	20.31	-34.75		1.84	55.06	20.00	-35.06	T4	
(PC2)		20MHz	41490	11.94	-36.79			48.73	20.00	-28.73	T4	
		20MHz	41055	11.97	-39.41			51.38	20.00	-31.38	T4	
		20MHz	40620	11.97	-37.81			49.78	20.00	-29.78	T4	
	Radial	20MHz	40185	11.90	-38.33	-62.49	N/A	50.23	20.00	-30.23	T4	1.2, 2.2
	Naulai	20MHz	39750	11.93	-37.83	-02.49	IVA	49.76	20.00	-29.76	T4	1.2, 2.2
		15MHz	40620	11.78	-38.25			50.03	20.00	-30.03	T4	
		10MHz	40620	12.00	-38.63			50.63	20.00	-30.63	T4	
		5MHz	40620	12.01	-38.58			50.59	20.00	-30.59	T4	

FCC ID: A3LSMS906U	PCTEST* Froud to be post of @ secured	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 46 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 46 of 108
© 2021 PCTEST				REV 3.5.M

## **Table 10-37** Raw Data Results for NR FDD n25 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		40MHz	376500	20.08	-38.78		2.00	58.86	20.00	-38.86	T4	
		30MHz	380000	19.72	-39.59		2.00	59.31	20.00	-39.31	T4	
		30MHz	376500	19.88	-38.39		2.00	58.27	20.00	-38.27	T4	
		30MHz	373000	19.84	-40.52		1.86	60.36	20.00	-40.36	T4	
	Axial	25MHz	376500	19.85	-39.57	-58.02	2.00	59.42	20.00	-39.42	T4	1.4, 0.8
		20MHz	376500	19.94	-40.43		1.98	60.37	20.00	-40.37	T4	
		15MHz	376500	20.01	-39.97		2.00	59.98	20.00	-39.98	T4	
		10MHz	376500	19.93	-39.79		2.00	59.72	20.00	-39.72	T4	
NR n25		5MHz	376500	19.92	-40.03	] [	1.81	59.95	20.00	-39.95	T4	
NK 1125		40MHz	379000	11.79	-40.67			52.46	20.00	-32.46	T4	
		40MHz	376500	11.86	-42.06			53.92	20.00	-33.92	T4	
		40MHz	374000	12.05	-41.82			53.87	20.00	-33.87	T4	
		30MHz	376500	11.81	-42.45			54.26	20.00	-34.26	T4	
	Radial	25MHz	376500	11.77	-43.62	-60.06	N/A	55.39	20.00	-35.39	T4	1.2, 2.2
		20MHz	376500	11.84	-42.67			54.51	20.00	-34.51	T4	
		15MHz	376500	11.71	-43.74			55.45	20.00	-35.45	T4	
		10MHz	376500	11.87	-44.12			55.99	20.00	-35.99	T4	
		5MHz	376500	11.84	-44.34			56.18	20.00	-36.18	T4	

## **Table 10-38** Raw Data Results for NR TDD n41, Power Class 2 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		100MHz	518598	20.02	-31.08		1.71	51.10	20.00	-31.10	T4	
		90MHz	518598	19.95	-30.66	] [	2.00	50.61	20.00	-30.61	T4	
		80MHz	518598	19.91	-30.44		2.00	50.35	20.00	-30.35	T4	
		70MHz	518598	19.82	-31.63		1.91	51.45	20.00	-31.45	T4	
		60MHz	518598	20.19	-31.41		1.87	51.60	20.00	-31.60	T4	
		50MHz	518598	19.83	-31.46		1.93	51.29	20.00	-31.29	T4	
	Axial	40MHz	518598	19.80	-30.28	-58.02	1.88	50.08	20.00	-30.08	T4	1.4, 0.8
		30MHz	518598	19.88	-30.17		2.00	50.05	20.00	-30.05	T4	
		20MHz	535998	19.85	-29.30		1.97	49.15	20.00	-29.15	T4	
		20MHz	527298	19.70	-31.72		2.00	51.42	20.00	-31.42	T4	
		20MHz	518598	19.91	-29.77		2.00	49.68	20.00	-29.68	T4	
		20MHz	509898	19.82	-31.26		1.96	51.08	20.00	-31.08	T4	
NR n41		20MHz	501204	19.89	-31.67		1.83	51.56	20.00	-31.56	T4	
(PC2)		100MHz	518598	13.49	-37.08			50.57	20.00	-30.57	T4	
		90MHz	518598	13.36	-37.02			50.38	20.00	-30.38	T4	
		80MHz	518598	13.26	-37.15			50.41	20.00	-30.41	T4	
		70MHz	518598	12.49	-40.45			52.94	20.00	-32.94	T4	
		60MHz	518598	13.31	-36.73			50.04	20.00	-30.04	T4	
		50MHz	518598	13.31	-36.59			49.90	20.00	-29.90	T4	
	Radial	40MHz	518598	13.34	-36.39	-60.06	N/A	49.73	20.00	-29.73	T4	1.2, 1.8
		30MHz	518598	13.33	-36.15			49.48	20.00	-29.48	T4	
		20MHz	535998	13.42	-35.39			48.81	20.00	-28.81	T4	
		20MHz	527298	13.34	-37.65			50.99	20.00	-30.99	T4	
		20MHz	518598	13.30	-35.10			48.40	20.00	-28.40	T4	
		20MHz	509898	13.38	-37.02			50.40	20.00	-30.40	T4	
		20MHz	501204	13.33	-37.09			50.42	20.00	-30.42	T4	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 47 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 47 01 100

## Table 10-39 Raw Data Results for 2.4GHz WIFI (OTT VoIP)

	Raw Data Results for 2.4GHz WIFT (OTT VOIP)										
Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE	Axial	6	20.67	-25.08	-62.41	1.92	45.75	20.00	-25.75	T4	1.4, 0.8
802.11b	Radial	6	11.15	-34.70	-63.02	N/A	45.85	20.00	-25.85	T4	1.2, 2.2
IEEE	Axial	6	20.84	-25.88	-62.41	1.78	46.72	20.00	-26.72	T4	1.4, 0.8
802.11g	Radial	6	11.16	-32.06	-63.02	N/A	43.22	20.00	-23.22	T4	1.2, 2.2
IEEE	Axial	6	20.67	-25.88	-62.41	1.84	46.55	20.00	-26.55	T4	1.4, 0.8
802.11n	Radial	6	11.17	-31.61	-63.02	N/A	42.78	20.00	-22.78	T4	1.2, 2.2
IEEE	Axial	6	20.45	-22.66	-62.41	1.93	43.11	20.00	-23.11	T4	1.4, 0.8
802.11ax SU	Radial	6	11.05	-24.34	-63.02	N/A	35.39	20.00	-15.39	T4	1.2, 2.2
		1	20.67	-20.98		2.00	41.65	20.00	-21.65	T4	
	Axial	6	20.70	-21.77	-62.41	1.92	42.47	20.00	-22.47	T4	1.4, 0.8
IEEE		11	20.75	-23.12		2.00	43.87	20.00	-23.87	T4	
802.11ax RU		1	11.10	-24.80			35.90	20.00	-15.90	T4	
	Radial	6	11.15	-24.20	-63.02	N/A	35.35	20.00	-15.35	T4	1.2, 2.2
		11	11.11	-26.02			37.13	20.00	-17.13	T4	

## Table 10-40

Raw Data Results for 5GHz WIFI IEEE 802.11a (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
IEEE	Axial	20MHz	1	40	20.70	-25.37	-60.02	2.00	46.07	20.00	-26.07	T4	1.4, 0.8
802.11a													
002.11a	Radial	20MHz	1	40	11.27	-28.65	-60.61	N/A	39.92	20.00	-19.92	T4	1.2, 2.2

## Table 10-41 Raw Data Results for 5GHz WIFI IEEE 802.11n (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
	Axial	40MHz	1	38	21.01	-25.21	-60.02	2.00	46.22	20.00	-26.22	T4	1.4, 0.8
IEEE		20MHz	1	40	20.62	-24.05	-00.02	1.91	44.67	20.00	-24.67	T4	1.4, 0.0
802.11n													
002.1111	Dedial	40MHz	1	38	11.27	-27.40	60.64	NVA	38.67	20.00	-18.67	T4	1.2. 2.2
Radial	Radiai	20MHz	1	40	11.29	-29.55	-60.61 N/A	40.84	20.00	-20.84	T4	1.2, 2.2	

## Table 10-42 Raw Data Results for 5GHz WIFI IEEE 802.11ac (OTT VoIP)

Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	20.73	-23.23	-60.02	1.76	43.96	20.00	-23.96	T4	1.4, 0.8
IEEE	20MHz	1	40	20.56	-21.26	-00.02	2.00	41.82	20.00	-21.82	T4	1.4, 0.0	
802.11ac													
002.1100	Dadial	40MHz	1	38	11.13	-29.56	60.61	NUA	40.69	20.00	-20.69	T4	1.2. 2.2
	Radial	20MHz	1	40	11.33	-28.42	-60.61	-60.61 N/A	39.75	20.00	-19.75	T4	1.2, 2.2

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 48 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 46 01 106

**Table 10-43** Raw Data Results for 5GHz WIFI IEEE 802.11ax (OTT VoIP)

						· · · · ·	A11 1 1FFF		<u> </u>	••••			
Mode	Orientation	Bandwidth	U-NII	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	40MHz	1	38	20.75	-22.69	-60.02	2.00	43.44	20.00	-23.44	T4	1.4, 0.8
IEEE	Axiai	20MHz	1	40	20.64	-19.70	-00.02	1.93	40.34	20.00	-20.34	T4	1.4, 0.6
802.11ax SU													
002.11ux 00	Radial	40MHz	1	38	11.32	-27.60	-60.61	N/A	38.92	20.00	-18.92	T4	1.2, 2.2
	Naulai	20MHz	1	40	11.14	-27.15	-00.01	IVA	38.29	20.00	-18.29	T4	1.2, 2.2
		40MHz	1	38	20.29	-21.94		2.00	42.23	20.00	-22.23	T4	
		20MHz	1	40	20.68	-19.08		2.00	39.76	20.00	-19.76	T4	
		40MHz	2A	54	20.68	-22.41		2.00	43.09	20.00	-23.09	T4	
		20MHz	2A	56	20.70	-19.53		1.80	40.23	20.00	-20.23	T4	
		40MHz	2C	102	20.57	-20.66		2.00	41.23	20.00	-21.23	T4	
	Axial	40MHz	2C	118	20.63	-19.03	-60.02	2.00	39.66	20.00	-19.66	T4	1.4, 0.8
	Axiai	40MHz	2C	142	20.59	-21.13	21.13	2.00	41.72	20.00	-21.72	T4	1.4, 0.0
		20MHz	2C	120	20.63	-21.75		2.00	42.38	20.00	-22.38	T4	
		40MHz	3	151	20.49	-20.28	3	2.00	40.77	20.00	-20.77	T4	
		20MHz	3	157	20.69	-22.93		1.72	43.62	20.00	-23.62	T4	
		40MHz	4	175	20.72	-20.68		1.91	41.40	20.00	-21.40	T4	
IEEE		20MHz	4	177	20.67	-22.81		2.00	43.48	20.00	-23.48	T4	
802.11ax RU													
002.11ux 100		40MHz	1	38	11.21	-27.69			38.90	20.00	-18.90	T4	
		20MHz	1	36	11.27	-26.99			38.26	20.00	-18.26	T4	
		20MHz	1	40	11.30	-26.21			37.51	20.00	-17.51	T4	
		20MHz	1	48	11.29	-26.56			37.85	20.00	-17.85	T4	
		40MHz	2A	54	11.29	-27.12			38.41	20.00	-18.41	T4	
	Radial	20MHz	2A	56	11.31	-26.90	-60.61	N/A	38.21	20.00	-18.21	T4	1.2, 2.2
	Naulai	40MHz	2C	118	11.36	-28.39	-00.01	IWA	39.75	20.00	-19.75	T4	1.2, 2.2
		20MHz	2C	120	11.33	-27.78			39.11	20.00	-19.11	T4	
		40MHz	3	151	11.31	-27.62			38.93	20.00	-18.93	T4	
		20MHz	3	157	11.17	-27.39			38.56	20.00	-18.56	T4	
		40MHz	4	175	11.23	-27.37			38.60	20.00	-18.60	T4	
		20MHz	4	177	10.87	-27.32			38.19	20.00	-18.19	T4	

#### II. **Test Notes**

## A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone->Settings->Other Call Settings->Hearing aid compatibility) was set to ON for Frequency Response compliance
- 4. Speech Signal: Mute on; Backlight off; Max Volume; Max Contrast
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
- 6. Licensed data modes and Bluetooth were disabled while testing WIFI modes.
- 7. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

## B. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

#### C. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: WB AMR 6.60kbps (UMTS);

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 49 01 100

#### D. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 50%RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 13 at 10MHz is the worst-case for the Axial probe orientation however, since LTE Band 13 at 10MHz does not support 3 nonoverlapping channels, only the mid channel was evaluated. LTE Band 2 at 5MHz is the worst-case for the Radial probe orientation.

#### E. LTE TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 50%RB offset
- 3. Power Class 3 Uplink-Downlink configuration: 2
- 4. Power Class 2 Uplink-Downlink configuration: 2
- 5. Vocoder Configuration: WB AMR 6.60kbps
- 6. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 20MHz is the worst-case for the Axial and Radial probe orientation.

#### F. NR FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 50%RB offset
- 3. Vocoder Configuration: EVS Primary NB 24.4kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n5 at 20MHz is the worst-case for the Axial probe orientation. NR n7 at 40MHz is the worst-case for the Radial probe orientation.

#### G. NR TDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 50%RB offset
- 3. Vocoder Configuration: EVS Primary NB 24.4kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. NR n41 (Power Class 2) at 20MHz is the worst-case for the Axial and Radial probe orientation.

### H. WIFI

- 1. Radio Configuration
  - a. IEEE 802.11b: CCK, 5.5Mbps
  - b. IEEE 802.11g/a: 16QAM, 24Mbps
  - c. IEEE 802.11n/ac 20MHz: BPSK, MCS 0
  - d. IEEE 802.11ax SU 20MHz; QPSK, MCS 1
  - e. IEEE 802.11n/ac 40MHz; BPSK, MCS 0
  - f. IEEE 802.11ax SU 40MHz: BPSK, MCS 0
- 2. RU Index
  - a. IEEE 802.11ax RU 20MHz; RU Index 0
  - b. IEEE 802.11ax RU 40MHz: RU Index 0
- 3. Vocoder Configuration: WB AMR 6.60kbps

FCC ID: A3LSMS906U	hout to be part of the common	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 50 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		rage 50 of 106

- 4. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11ax RU is the worst-case for the Axial and Radial probe orientation.
- 5. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11ax RU at 20MHz (U-NII 1) is the worst-case for the Axial probe orientation. IEEE 802.11ax RU at 20MHz (U-NII 2A) is the worst-case for the Radial probe orientation.

#### OTT VolP


- 1. Vocoder Configuration: 6kbps
- 2. EDGE Configuration
  - a. MCS Index: 7
  - b. Number of TX slots: 2
- 3. HSPA Configuration:
  - a. Release: 6
  - b. 3GPP 34.121 Subtest 1
- 4. LTE FDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: 16QAM, 1RB, 50%RB offset
  - c. LTE Band 71 was the worst-case band from Table 8-6 and was used to test both Axial and Radial probe orientations.
  - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band at 71 at 5MHz is the worst-case for the Axial and Radial probe orientation.
- 5. LTE TDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: 16QAM, 1RB, 50%RB offset
  - c. Power Class 2 Uplink-Downlink configuration: 2
  - d. LTE Band 41 (PC2) was the worst-case band from Table 8-7 and was used to test both Axial and Radial probe orientations.
  - e. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low, low-mid, high-mid, and high channels for those combinations. LTE Band 41 (Power Class 2) at 15MHz is the worst-case for the Axial probe orientation. LTE Band 41 (Power Class 2) at 20MHz is the worst-case for the Radial probe orientation.
- 6. NR FDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 50%RB offset
  - c. NR n25 (Ant I) was the worst-case band from Table 8-10 and was used to test both Axial and Radial probe orientations.
  - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n25 (Ant I) at 30MHz is the worst-case for the Axial probe orientation. NR n25 (Ant I) at 40MHz is the worst-case for the Radial probe orientation.
- 7. NR TDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: DFT-s-OFDM, 16QAM, 1RB, 50%RB offset
  - c. NR n41 (PC2) was the worst-case band from Table 8-11 and was used to test both Axial and Radial probe orientations.
  - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. NR n41 (PC2) at 20MHz is the worst-case for the Axial and Radial probe orientation.

FCC ID: A3LSMS906U	PCTEST hours to be port of the recent	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 51 01 106


### 8. WIFI Configuration:

- a. Radio Configuration
  - i. IEEE 802.11b: CCK, 5.5Mbps
  - ii. IEEE 802.11g/a: 16QAM, 24Mbps
  - iii. IEEE 802.11n/ac 20MHz: BPSK. MCS 0
  - iv. IEEE 802.11ax SU 20MHz; QPSK, MCS 1
  - v. IEEE 802.11n/ac 40MHz: BPSK, MCS 0
  - vi. IEEE 802.11ax SU 40MHz: BPSK, MCS 0
- b. RU Index
  - i. IEEE 802.11ax RU 20MHz: RU Index 0
  - ii. IEEE 802.11ax RU 40MHz; RU Index 0
- c. The worst-case standard for 2.4GHz WIFI in each probe orientation is additionally tested on the low and high channels. IEEE 802.11RU is the worst-case for the Axial and Radial probe orientation.
- d. The worst-case standard for 5GHz WIFI in each probe orientation is additionally tested on higher U-NII bands as well as applicable low and high channels. IEEE 802.11ax RU at 40MHz (U-NII 2C) is the worst-case for the Axial probe orientation. IEEE 802.11ax RU at 20MHz (U-NII 1) is the worst-case for the Radial probe orientation.

#### 1 kHz Vocoder Application Check III.



This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for VoWIFI over IMS, VoNR over IMS, and OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 32 01 100

## IV. T-Coil Validation Test Results

Table 10-44
Helmholtz Coil Verification Table of Results – 10/04/21

	modicin rubic of it	esuits 10/04/21	
ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.924	PASS
Environmental Noise	< -58 dBA/m	-61.36	PASS
Frequency Response, from limits	> 0 dB	0.50	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.140	PASS
Environmental Noise	< -58 dBA/m	-62.49	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

Table 10-45
Helmholtz Coil Verification Table of Results – 10/11/21

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.904	PASS
Environmental Noise	< -58 dBA/m	-62.41	PASS
Frequency Response, from limits	> 0 dB	0.60	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.145	PASS
Environmental Noise	< -58 dBA/m	-63.02	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 52 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 53 of 108

Table 10-46
Helmholtz Coil Verification Table of Results – 10/18/21

Tremmone don vermoution ruble of Results – 10/10/21						
ltem	Target	Result	Verdict			
Axial						
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.951	PASS			
Environmental Noise	< -58 dBA/m	-62.79	PASS			
Frequency Response, from limits	> 0 dB	0.60	PASS			
Radial						
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.281	PASS			
Environmental Noise	< -58 dBA/m	-64.26	PASS			
Frequency Response, from limits	> 0 dB	0.70	PASS			

Table 10-47
Helmholtz Coil Verification Table of Results – 10/25/21

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.045	PASS
Environmental Noise	< -58 dBA/m	-60.02	PASS
Frequency Response, from limits	> 0 dB	0.50	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.180	PASS
Environmental Noise	< -58 dBA/m	-60.61	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMS906U	PCTEST*	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 54 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		raye 34 01 106

Table 10-48
Helmholtz Coil Verification Table of Results – 11/1/21

Heilinoitz Con Vernication Table of Results = 11/1/21						
ltem	Target	Result	Verdict			
Axial						
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.025	PASS			
Environmental Noise	< -58 dBA/m	-59.13	PASS			
Frequency Response, from limits	> 0 dB	0.60	PASS			
Radial						
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.244	PASS			
Environmental Noise	< -58 dBA/m	-59.41	PASS			
Frequency Response, from limits	> 0 dB	0.70	PASS			

Table 10-49
Helmholtz Coil Verification Table of Results – 11/8/21

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.049	PASS
Environmental Noise	< -58 dBA/m	-58.02	PASS
Frequency Response, from limits	> 0 dB	0.60	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.206	PASS
Environmental Noise	< -58 dBA/m	-60.06	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg FF of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 55 of 108

#### **ABM1 Magnetic Field Distribution Scan Overlays** V.

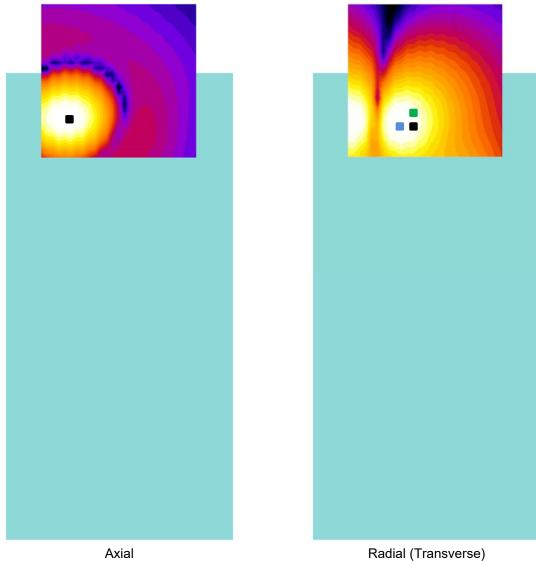


Figure 10-1 T-Coil Scan Overlay Magnetic Field Distributions

### Notes:

- 1. Final measurement locations are indicated by a black cursor on the contour plots. The blue cursor indicates the final measurement location for NR TDD modes. The green cursor indicates the final measurement location for VoWIFI modes.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: A3LSMS906U	PCTEST hourt to be port of @ received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 56 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 30 01 106

© 2021 PCTEST **REV 3.5.M** 

#### **MEASUREMENT UNCERTAINTY** 11.

**Table 11-1 Uncertainty Estimation Table** 

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
			•				
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level						35.3%	1.31

#### Notes:

- Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMS906U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga F7 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 57 of 108

#### **EQUIPMENT LIST** 12.

## **Table 12-1 Equipment List**

Equipment List							
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number	
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	9/29/2020	Biennial	9/29/2022	2655082910	
Listen	SoundConnect	Microphone Power Supply	9/24/2020	Biennial	9/24/2022	0899-PS150	
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/29/2020	Biennial	9/29/2022	23792992	
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	2/10/2021	Annual	2/10/2022	161662	
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	3/22/2021	Annual	3/22/2022	162125	
Rohde & Schwarz	CMW500	Radio Communication Tester	9/30/2021	Annual	9/30/2022	140144	
Rohde & Schwarz	CMW500	Radio Communication Tester	7/19/2021	Annual	7/19/2022	128635	
Rohde & Schwarz	CMX500	5G Radio Communication Tester	N/A	N/A	N/A	100298	
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	21053	
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1123	
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1129	
TEM		HAC Positioner	N/A	N/A	N/A	N/A	
TEM		HAC System Controller with Software	N/A	N/A	N/A	N/A	
TEM	Helmholtz Coil	Helmholtz Coil	9/23/2020	Biennial	9/23/2022	SBI 1052	
YellowTec	YT4211	USB Audio Interface	N/A	N/A	N/A	20000365	
Control Company	4040	Therm./ Clock/ Humidity Monitor	3/12/2021	Biennial	3/12/2023	210202053	
Netgear	XS708E	Ethernet Switch	N/A	N/A	N/A	4FU3875C001A8	

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 50 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 58 of 108

#### 13. TEST DATA

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 50 of 109
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 59 of 108



Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

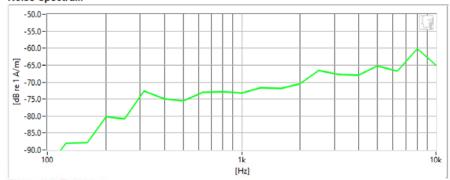

#### Frequency Response

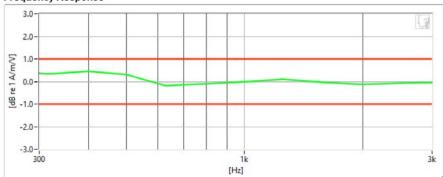

#### Results

Verification 1kHz Intensity	-9,924 dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-61.36 dB	•	Maximum	-58.0	
Frequency Response Margin	500m dB	~	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 60 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 60 of 108



## \_\_\_\_\_,

DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

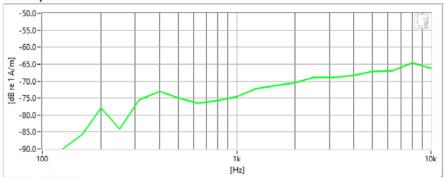

#### Frequency Response

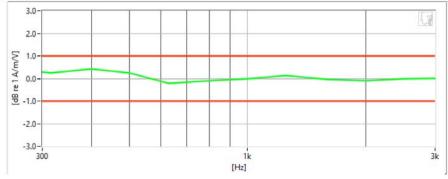

#### Results

Verification 1kHz Intensity	-9.904 dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-62,41 dB	•	Maximum	-58.0	
Frequency Response Margin	600m dB	•	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 61 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 61 of 108



Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

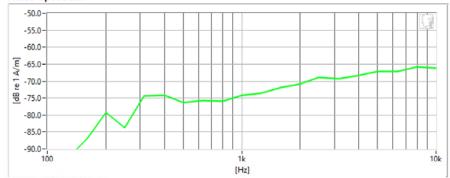

#### Frequency Response

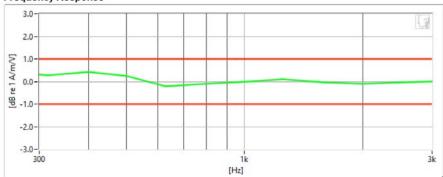

#### Results

Verification 1kHz Intensity	-9.951 dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-62.79 dB	~	Maximum	-58.0	
Frequency Response Margin	600m dB	~	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 62 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 02 01 100



## DUT 1111 0 11 0N1 0D1 4050

DUT: HH Coil – SN: SBI 1052 Type: HH Coil

Serial: SBI 1052


#### Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

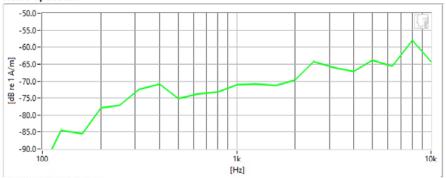

#### Frequency Response

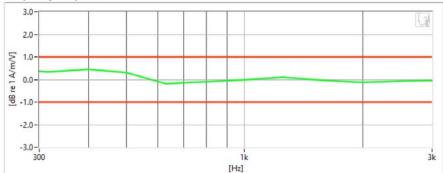

#### Results

Verification 1kHz Intensity	-10.045	dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-60.02	dB	•	Maximum	-58.0
Frequency Response Margin	500m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 63 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 03 01 106



Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

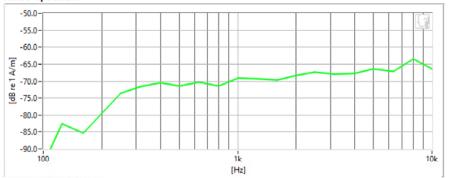

#### Frequency Response

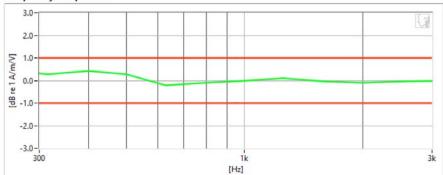

#### Results

Verification 1kHz Intensity	-10.025 dB	iB 🕜	Max/Min	-9.5/-10.5
Verification ABM2	-59.13 dB	IB 🕜	Maximum	-58.0
Frequency Response Margin	600m dB	IB 🕜	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 64 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 04 01 100



Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

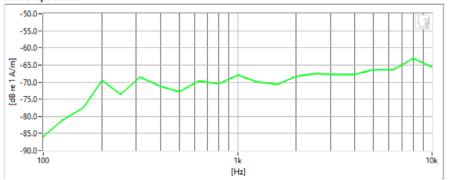

## Frequency Response

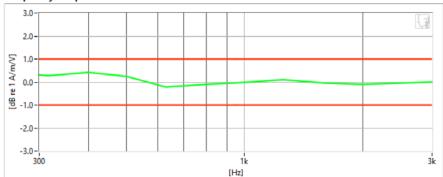

#### Results

Verification 1kHz Intensity	-10.049 dB	<b>✓</b>	Max/Min	-9.5/-10.5
Verification ABM2	-58.02 dB	•	Maximum	-58.0
Frequency Response Margin	600m dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 65 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 03 01 106




Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

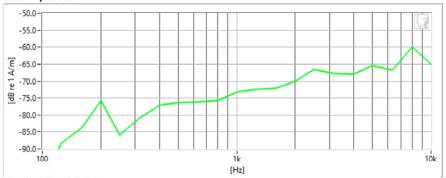

#### Frequency Response

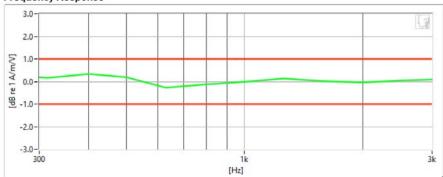

#### Results

Verification 1kHz Intensity	-10.14 dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-62.49 dB	•	Maximum	-58.0	
Frequency Response Margin	700m dB	~	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 66 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 66 of 108




Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

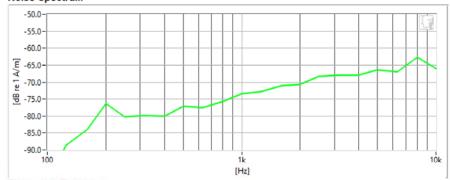

#### Frequency Response

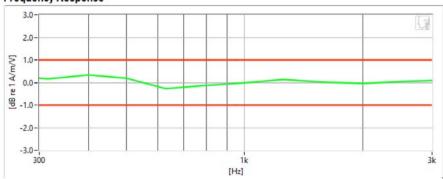

#### Results

Verification 1kHz Intensity	-10.145	dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-63.02	dB	•	Maximum	-58.0	
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 67 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 67 of 108




Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

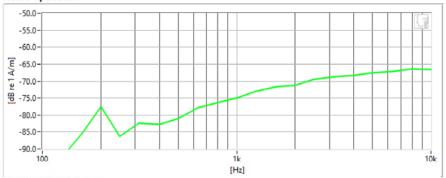

#### Frequency Response

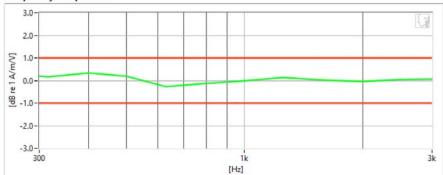

#### Results

Verification 1kHz Intensity	-10.281	dB	•	Max/Min	-9.5/-10.5
Verification ABM2	-64.26	dB	•	Maximum	-58.0
Frequency Response Margin	700m	dB	•	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 69 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 68 of 108



Type: HH Coil Serial: SBI 1052


#### Measurement Standard: ANSI C63.19-2011

#### Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

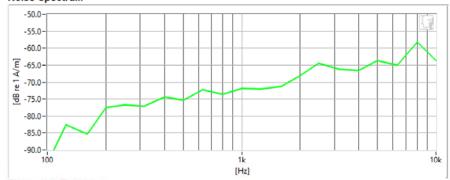

#### Frequency Response

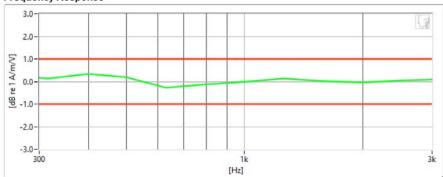

#### Results

Verification 1kHz Intensity	-10.18 dB	•	Max/Min	-9.5/-10.5	
Verification ABM2	-60.61 dB	~	Maximum	-58.0	
Frequency Response Margin	700m dB	~	Tolerance curves	Aligned Data	

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 69 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		rage 09 01 100




Type: HH Coil Serial: SBI 1052

#### Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

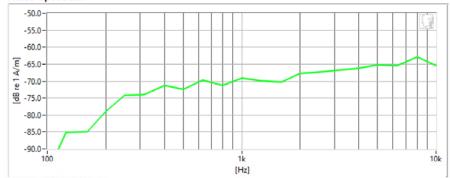

#### Frequency Response

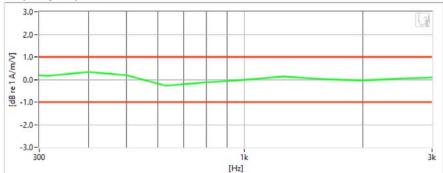

#### Results

Verification 1kHz Intensity	-10.244 dE	В	Max/Min	-9.5/-10.5
Verification ABM2	-59.41 dE	В	Maximum	-58.0
Frequency Response Margin	700m dE	В	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 70 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 70 of 108




Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


#### Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

#### Noise Spectrum

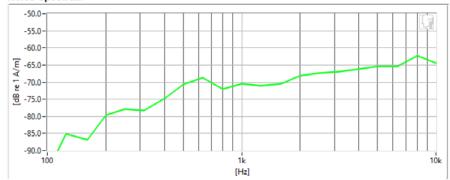

## Frequency Response

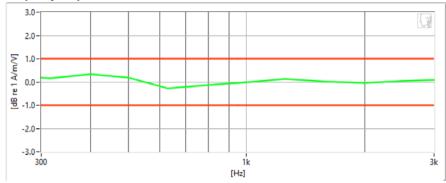

#### Results

Verification 1kHz Intensity	-10.206 dB	$\checkmark$	Max/Min	-9.5/-10.5
Verification ABM2	-60.06 dB	<b>✓</b>	Maximum	-58.0
Frequency Response Margin	700m dB	$\checkmark$	Tolerance curves	Aligned Data

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 71 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		



## DUT: A3LSMS906U


Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

## **Test Configuration:**

- Mode: GSM850 Channel: 128
- Speech Signal: 3GPP2 Normal Test Signal

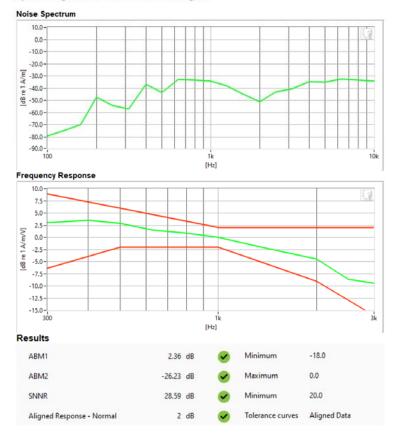

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 72 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		




Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

- Mode: GSM1900 Channel: 810
- Speech Signal: 3GPP2 Normal Test Signal

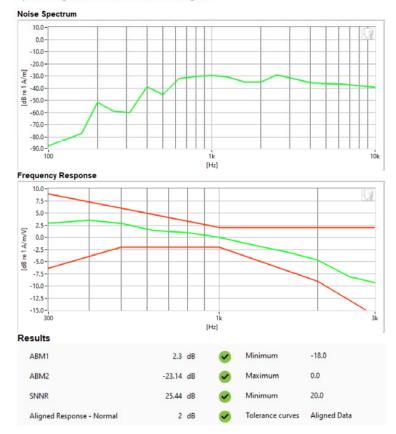

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	Approved by Quality Manage	
Filename:	Test Dates:	DUT Type:		Dogo 72 of 109
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 73 of 108




Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

- Mode: UMTS V Channel: 4183
- Speech Signal: 3GPP2 Normal Test Signal

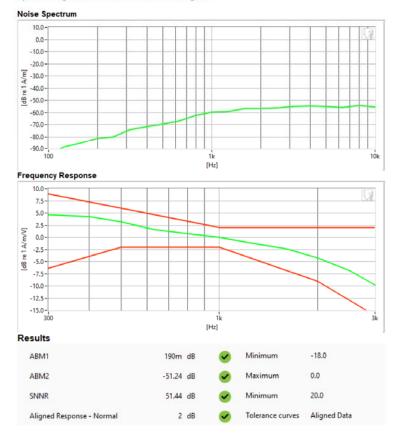

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 74 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 74 01 100	



Type: Portable Handset Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: UMTS IV Channel: 1513

Speech Signal: 3GPP2 Normal Test Signal

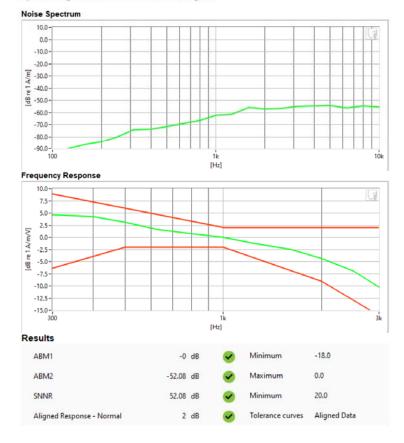

FCC ID: A3LSMS906U	PCTEST host to be port of & second	PCTEST: Hoot table pot of & second  HAC (T-COIL) TEST REPORT		Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 75 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 75 01 106	




Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

- Mode: UMTS II Channel: 9262
- Speech Signal: 3GPP2 Normal Test Signal

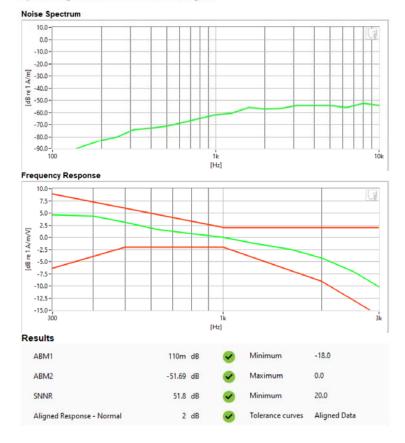

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 76 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 70 01 100	



Type: Portable Handset Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: LTE FDD Band 13 Bandwidth: 10MHz Channel: 23230

Speech Signal: 3GPP2 Normal Test Signal

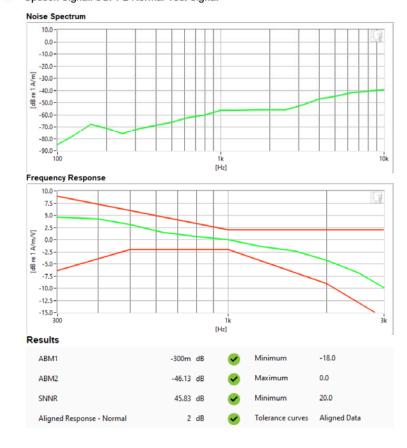

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 77 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage // 01 106



Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: LTE TDD Band 41 (PC2)

Bandwidth: 20MHz Channel: 41490

Speech Signal: 3GPP2 Normal Test Signal

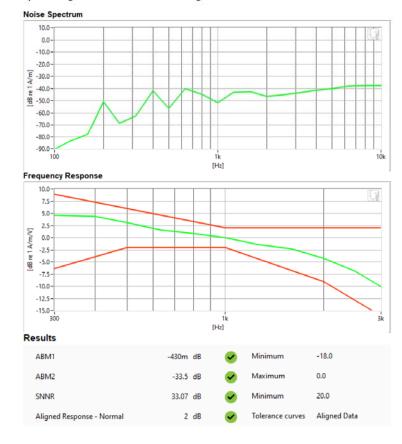

FCC ID: A3LSMS906U	PCTEST To thought to be port of the second	HAC (T-COIL) TEST REPORT		Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 78 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 76 01 106	



Measurement Standard: ANSI C63.19-2011


### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: NR FDD n5 Bandwidth: 20MHz Channel: 167300

Speech Signal: 3GPP2 Normal Test Signal

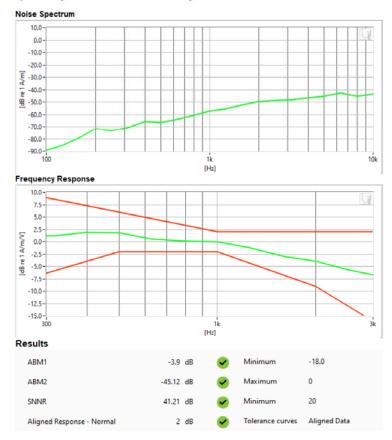

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 79 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 19 01 100	



Serial: 1234M

Measurement Standard: ANSI C63.19-2011


### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: NR TDD n41
Bandwidth: 20MHz
Channel: 535998

Speech Signal: 3GPP2 Normal Test Signal

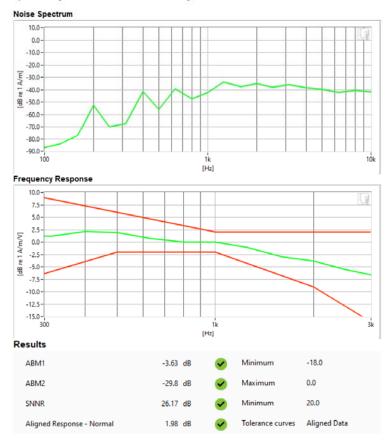

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 90 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 80 of 108



Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020


### **Test Configuration:**

Mode: 2.4GHz WLAN

Standard: IEEE 802.11ax (RU)

Channel: 1

Speech Signal: 3GPP2 Normal Test Signal

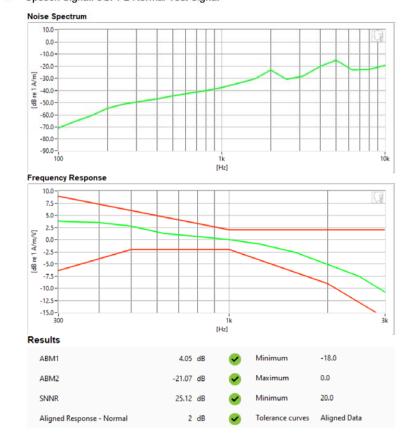

FCC ID: A3LSMS906U	PCTEST To Hourt to the port of the second	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 81 of 108	
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage of 01 100	



Serial: 1234M

Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**


Mode: 5GHz WLAN

• Standard: IEEE 802.11ax (RU)

Bandwidth: 20MHz

Channel: 40

Speech Signal: 3GPP2 Normal Test Signal

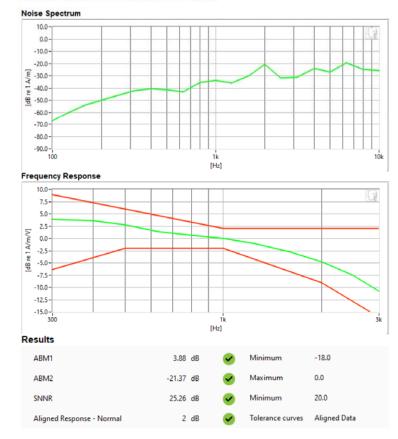

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 82 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 62 01 106



Serial: 1234M

Measurement Standard: ANSI C63.19-2011

### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

### **Test Configuration:**


VolP Application: Google Duo

Mode: 5GHz WLAN

Standard: IEEE 802.11ax (RU)

Bandwidth: 40MHz Channel: 118

Speech Signal: 3GPP2 Normal Test Signal

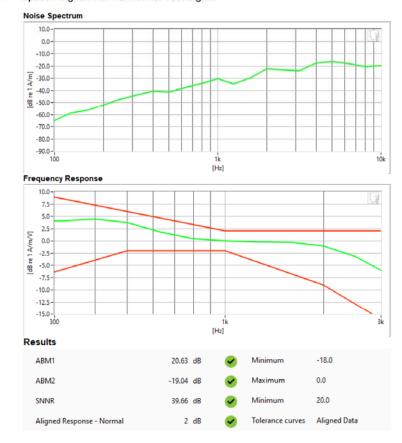

FCC ID: A3LSMS906U	PCTEST hours to be port of the second	HAC (T-COIL) TEST REPORT	Approved by Quality Manag	
Filename:	Test Dates:	DUT Type:		Dogo 92 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 83 of 108




Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: GSM850 Channel: 128

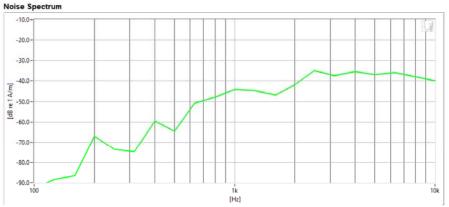

### Results

ABM1	-6.75	dB	$\checkmark$	Minimum	-18.0
ABM2	-34.81	dB	$\checkmark$	Maximum	0.0
SNNR	28.06	dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 84 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 64 01 106



Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: GSM1900 Channel: 661

### Noise Spectrum

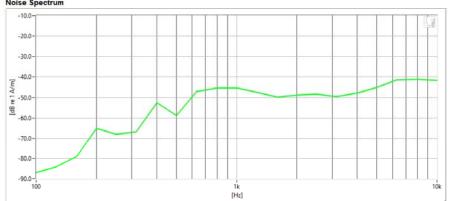

### Results

ABM1	-6.91 dB	$\checkmark$	Minimum	-18.0
ABM2	-38.28 dB	$\checkmark$	Maximum	0.0
SNNR	31.38 dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	C (T-COIL) TEST REPORT	
Filename:	Test Dates:	DUT Type:		Page 85 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 65 01 106



Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: UMTS V Channel: 4233

### Noise Spectrum

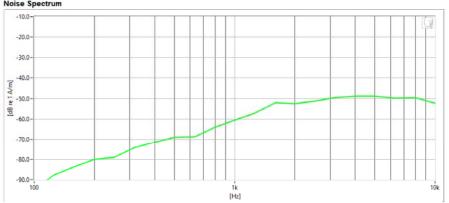

### Results

ABM1	-9.13	dB	$\checkmark$	Minimum	-18.0
ABM2	-47.83	dB	<b>✓</b>	Maximum	0.0
SNNR	38.7	dB	•	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 86 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage of of 106

**REV 3.5.M** 



### DUT: A3LSMS906U Type: Portable Handset

Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: UMTS IV Channel: 1312

### Noise Spectrum

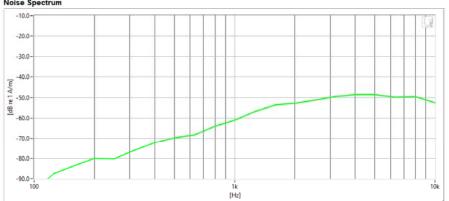

### Results

ABM1	-9.31	dB	$\checkmark$	Minimum	-18.0
ABM2	-48.08	dB	•	Maximum	0.0
SNNR	38.77	dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 87 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage of 01 100



Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: UMTS II Channel: 9262

### Noise Spectrum

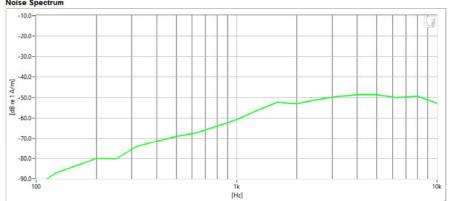

### Results

ABM1	-9.01	dB	$\checkmark$	Minimum	-18.0
ABM2	-47.81	dB	$\checkmark$	Maximum	0.0
SNNR	38.8	dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST To thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 88 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage oo oi 100



Type: Portable Handset Serial: 1234M


Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: LTE FDD Band 2 Bandwidth: 5MHz Channel: 18900

### Noise Spectrum

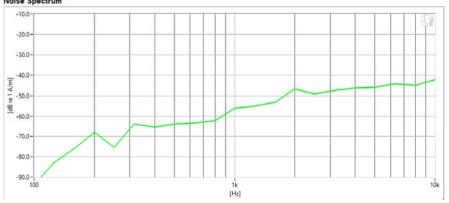

### Results

ABM1	-9.54 dB	$\checkmark$	Minimum	-18.0
ABM2	-44.46 dB	$\checkmark$	Maximum	0.0
SNNR	34.92 dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	HAC (T-COIL) TEST REPORT	
Filename:	Test Dates:	DUT Type:		Page 89 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 69 01 106



Measurement Standard: ANSI C63.19-2011

### Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: LTE TDD Band 41 (PC2)

Bandwidth: 20MHzChannel: 41490

### **Noise Spectrum**

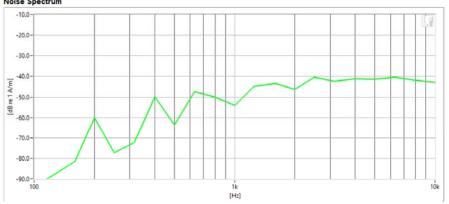

### Results

ABM1	-9.06 dB	•	Minimum	-18.0
ABM2	-37.44 dB	•	Maximum	0.0
SNNR	28.37 dB	•	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 00 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 90 of 108



Measurement Standard: ANSI C63.19-2011


### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: NR FDD n7 Bandwidth: 40MHz Channel: 507000

### Noise Spectrum

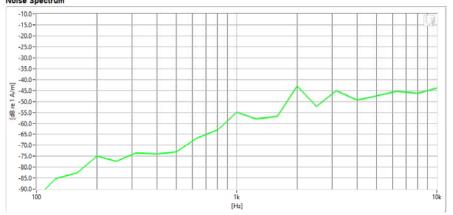

### Results

ABM1	-13.42 dB	$\checkmark$	Minimum	-18.0
ABM2	-43.87 dB	$\checkmark$	Maximum	0.0
SNNR	30.46 dB	$\checkmark$	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST To thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 91 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 91 01 100



Measurement Standard: ANSI C63.19-2011


### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

 Mode: NR TDD n41 (PC2) Bandwidth: 20MHz Channel: 518598

### **Noise Spectrum**

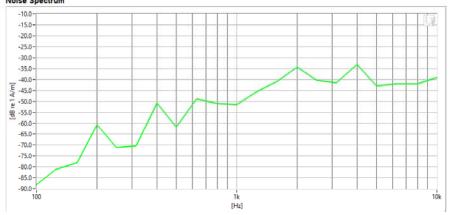

### Results

ABM1	-11.13 dB	Minimum	-18.0
ABM2	-34.22 dB	✓ Maximum	0.0
SNNR	23.09 dB	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST To thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 92 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 92 01 100



Type: Portable Handset Serial: 1234M

Measurement Standard: ANSI C63.19-2011

### Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

Mode: 2.4GHz WLAN

Standard: IEEE 802.11ax (RU)

Channel: 1

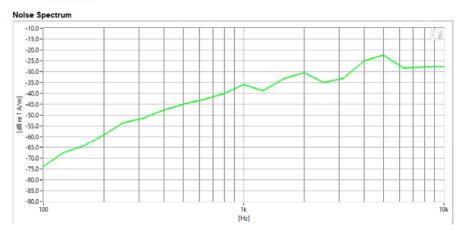

### Results

ABM1	-2.88 dB	Minimum	-18.0	
ABM2	-26.16 dB	Maximum	0.0	
SNNR	23.29 dB	Minimum	20.0	

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 02 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 93 of 108



Serial: 1234M

Measurement Standard: ANSI C63.19-2011

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020


### **Test Configuration:**

Mode: 5GHz WLAN

Standard: IEEE 802.11ax (RU)

Bandwidth: 20MHz Channel: 56

### Noise Spectrum

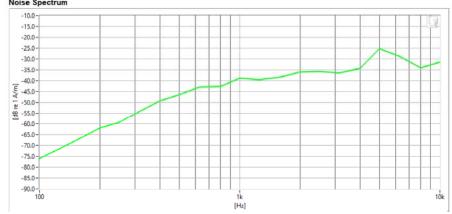

### Results

ABM1	-3.28 dB	$\checkmark$	Minimum	-18.0
ABM2	-29.6 dB	<b>✓</b>	Maximum	0.0
SNNR	26.32 dB	<b>✓</b>	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 94 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Fage 94 01 106



rpe: Portable Handse Serial: 1234M

### Measurement Standard: ANSI C63.19-2011

### Equipment:


Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

### **Test Configuration:**

VoIP Application: Google Duo
 Mode: 2.4GHz WLAN

Standard: IEEE 802.11ax (RU)

Channel: 6

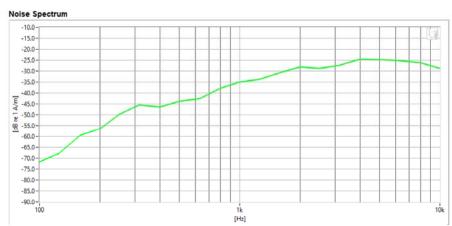

### Results

ABM1	11.15 dB	V	Minimum	-18.0
ABM2	-24.2 dB	V	Maximum	0.0
SNNR	35.35 dB	•	Minimum	20.0

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 95 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 95 01 106

# 14. CALIBRATION CERTIFICATES

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 96 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Fage 90 01 100

1M2109090103-22-R1.A3L 10/4/2021 – 11/10/2021 Portable Handset Page 96 of 108
© 2021 PCTEST REV 3.5.M

### West Caldwell Calibration Laboratories Inc.

# **Certificate of Conformance**

for

### AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

AXIAL T COIL PROBE

Serial No:

TEM-1123

Calibration Recall No:

31288

Submitted By:

Customer:

ANDREW HARWELL

Company:

PCTEST ENGINEERING LAB

Address:

6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

10/13/2020

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statement of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit. L is manufacturer specifications and U95 is confidence level of 95% at k=2. This

acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance, 2.Manufacturer's tolerance is too small compared to calibration and measurment capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation limitations. The decision rule has been communicated and approved by customer during contract

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001;2015, and ISO 17025

Certificate Page 1 of 1

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

23-Sep-20

James Zhu/

Certificate No: QA Doc. #1051 Rev. 3.0 5/29/20 31288 - 2

Quality Manager ISO/IEC 17025:2017

We at Oalden II

West Caldwell Calibration

ACCREDITED

uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

 FCC ID: A3LSMS906U
 PCTEST
 HAC (T-COIL) TEST REPORT
 Approved by: Quality Manager

 Filename:
 Test Dates:
 DUT Type:
 Page 97 of 108

 1M2109090103-22-R1.A3L
 10/4/2021 – 11/10/2021
 Portable Handset

© 2021 PCTEST

REV 3.5.M

### HCATEMC TEM-1123\_Sep-23-2020



1575 State Route 96, Victor NY 14564



# REPORT OF CALIBRATION

or

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe


Serial No.: TEM-1123 I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmholi	z Coil			
Helmholtz Coil;			Before & after data same:	<b>X</b>	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.04	A/m/V	Ambient Humidity:	42.1	% RH
Helmholtz Coil magnetic field;	5.71	A/m	Ambient Pressure:	99.094	kPa
			Calibration Date:	23-Sep-2020	
Probe Sensitivity at	1000	Hz.	Calibration Due:		
was	-60.24	dBV/A/m	Report Number:	31288	-2
	0.972	mV/A/m	Control Number:	31288	
Probe resistance	898	Ohms			

The above listed instrument meets or exceeds the tested manufacturer's specifications
This Calibration is traceable through NIST test numbers: 684.07/O-0000001126-20

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

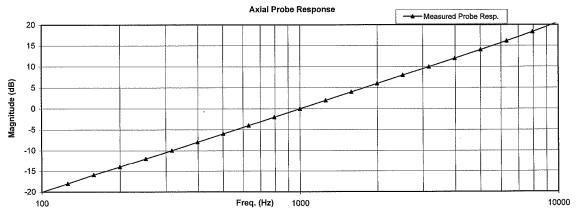

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015 ISO 17025

Cal. Date: 23-Sep-2020

Measurements performed by:

y: ...... James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

### Page 1 of 2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 09 of 109
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 98 of 108

### HCATEMC\_TEM-1123\_Sep-23-2020

### West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

**TEM Consulting LP Axial T Coil Probe** Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Test Function		Tolera	nce	Measured values			
······				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.24			
			dB				
2.0	Probe Level Linearity		6	6.03			
		Ref. (0 dB)	0	0.00			
			-6	-6.03			
			-12	-12.05			
			Hz				
3.0	Probe Frequency Response		100	-20.0			
			126	-18.0			
			158	-15.9			
			200	-14.0			
	•		251	-12.0			
			316	-10.0			
			398	-8.0			
			501	-6.0			
			631	-4.0			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	2.0			
			1585	4.0			
			1995	6.0			
			2512	8.0			
			3162	10.0			
			3981	12.0			
			5012	14.0			
			6310	16.1			
			7943	18.3			
			10000	20.7			

Instruments u	ised for calibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	,610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021


Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700 This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc. Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

### Page 2 of 2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 99 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 99 01 100



# **Certificate of Conformance**

### RADIAL T COIL PROBE

Submitted By:

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No:

TEM-1129

Calibration Recall No:

31288

Customer:

ANDREW HARWELL

Company: Address:

PCTEST ENGINEERING LAB

6660-B DOBBIN ROAD

**COLUMBIA** 

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

(X) Within

tolerance of the indicated specification. See attached Report of Calibration. The information supplied relates to the calibrated item listed above and statment of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance,

2. Manufacturer's tolerance is too small compared to calibration and measurment capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation limitations. The decision rule has been communicated and approved by customer during contract

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

23-Sep-20

James Zhu

Certificate No:

31288 - 1

OA Doc. #1051 Rev. 3.0 5/29/20

Certificate Page 1 of 1

Quality Manager ISO/IEC 17025:2017

West Caldwell Calibration

ACCREDITED Calibration Lab, Cert. # 1533.01

uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

FCC ID: A3LSMS906U HAC (T-COIL) TEST REPORT

Approved by: SAMSUNG Quality Manager

Filename: 1M2109090103-22-R1.A3L Test Dates: 10/4/2021 - 11/10/2021 **DUT Type:** Portable Handset

Page 100 of 108

© 2021 PCTEST



ACCREDITED
Calibration Lab. Cert. # 1533.01

ISO/IEC 17025; 2017

1575 State Route 96, Victor NY 14564

# REPORT OF CALIBRATION

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe


Serial No.: TEM-1129

I. D. No.: XXXX

Probe Sensitivity measured wit	h Helmholi	tz Coil			
Helmholtz Coil;			Before & after data same:	X	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	20.7	°C
Helmholtz Coil Constant;	7.04	A/m/V	Ambient Humidity:	42.1	% RH
Helmholtz Coil magnetic field;	5.70	A/m	Ambient Pressure:	99.094	kPa
			Calibration Date:	23-Sep-2020	
Probe Sensitivity at	1000	Hz.	Re-calibration Due:		
was	-60.37	dBV/A/m	Report Number:	31288	-1
	0.959	mV/A/m	Control Number:	31288	
Probe resistance	897	Ohms			
above listed instrument meets or exceeds	the tested	manufacturer's spe	cifications.		
Calibration is traceable through NIST test numbers	s:	684.07/O-000000	1126-20		

Graph represents Probes Frequency Response.

Calibrated on WCCL system type 9700

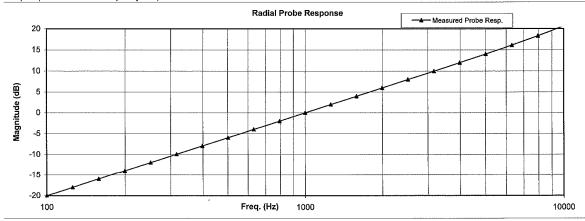

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure : Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17/9/25

Cal. Date: 23-Sep-2020

Measurements performed by: .....

James Zhu
Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

### Page 1 of 2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 101 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		rage 101 01 106

### HCRTEMC\_TEM-1129\_Sep-23-2020

### West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Function	Tolera	nce	Measured values		
					Remarks
Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
	=1/4	dB			
Probe Level Linearity		6	6.04		
	Ref. (0 dB)	0	0.00		
	• •	-6	-6.03		
		-12	-12.05		
		Hz			
Probe Frequency Response			-20.0		
			1		
•					
			1		
		398			
		501			]
					1
	Ref. (0 dB)				
			1 1		
					1
			12.0		
			14.0		
			16.1		
		7943	18.3		
		10000	20.7		
		Probe Sensitivity at 1000 Hz.  Probe Level Linearity  Ref. (0 dB)	Probe Sensitivity at 1000 Hz. dBV/A/m  Probe Level Linearity  Ref. (0 dB)  Ref. (0 dB)  O  Hz  Probe Frequency Response  100  126  158  200  251  316  398  501  631  794  Ref. (0 dB)  1000  1259  1585  1995  2512  3162  3981  5012  6310  7943	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37    Probe Level Linearity	Probe Sensitivity at 1000 Hz. dBV/A/m -60.37    Probe Level Linearity   6

Instrumen	ts used for calibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	.610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

### Page 2 of 2

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 102 of 108
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		raye 102 01 106

### 15. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: A3LSMS906U	PCTEST	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 102 of 100
1M2109090103-22-R1.A3L	10/4/2021 - 11/10/2021	Portable Handset		Page 103 of 108

### 16. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.

FCC ID: A3LSMS906U	PCTEST:	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 104 of 100
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		Page 104 of 108

- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- 20. Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMS906U	PCTEST Thought to be port of the received	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 105 of 108
1M2109090103-22-R1.A3L	10/4/2021 – 11/10/2021	Portable Handset		