



# EMC TEST REPORT

**Report No.:** 20240617G10817X-W1

**Product Name:** RICO2 THERMAL IMAGING SCOPE

**FCC ID:** 2AY3N-4C-00

**Main Model No. :** RH50R

**Series Model No. :** RL42R

**Applicant:** InfiRay Technologies Co., Ltd.

Room 301, Building C3, Hefei Innovation Industrial Park, NO.800

**Address:** Wangjiang West Road, Hefei National High-tech Industry Development  
District, Anhui, P.R.China

**Received Date:** 2024.06.19

**Dates of Testing:** 2024.06.21-2024.06.26

**Issued by:** CCIC Southern Testing Co., Ltd.

Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan

**Lab Location:** District, Shenzhen, Guangdong, China.

**Tel:** 86-755-26627338 **E-Mail:** manager@ccic-set.com

This test report consists of **16** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name** ..... RICO2 THERMAL IMAGING SCOPE

**Model No.** ..... RH50R

**Applicant**..... InfiRay Technologies Co., Ltd.

**Applicant Address**..... Room 301, Building C3, Hefei Innovation Industrial Park, NO.800  
Wangjiang West Road, Hefei National High-tech Industry  
Development District, Anhui, P.R.China

**Manufacturer**..... InfiRay Technologies Co., Ltd.

**Manufacturer Address**..... Room 301, Building C3, Hefei Innovation Industrial Park, NO.800  
Wangjiang West Road, Hefei National High-tech Industry  
Development District, Anhui, P.R.China

**Test Standards** ..... 47 CFR Part 15 Subpart B

**Test Result** ..... PASS

**Tested by** ..... Sun Jiaohui  
Sun Jiaohui, Test Engineer 2024.08.12

**Reviewed by** ..... Chris You  
Chris You, Senior Engineer 2024.08.12

**Approved by** ..... Wang Shijie  
Wang Shijie, Manager 2024.08.12



## TABLE OF CONTENTS

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>4</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>5</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>6</b>
1.3.1	Facilities .....	6
1.3.2	Test Environment Conditions .....	6
1.3.3	Measurement Uncertainty .....	6
<b>2.</b>	<b>TEST CONDITIONS SETTING .....</b>	<b>7</b>
<b>2.1</b>	<b>Test Peripherals .....</b>	<b>7</b>
<b>2.2</b>	<b>Test Mode .....</b>	<b>7</b>
<b>2.3</b>	<b>Test Setup and Equipments List .....</b>	<b>8</b>
2.3.1	Radiated Emission .....	8
<b>3.</b>	<b>47 CFR PART 15B REQUIREMENTS .....</b>	<b>10</b>
<b>3.1</b>	<b>Radiated Emission .....</b>	<b>10</b>
3.1.1	Requirement .....	10
3.1.2	Test Description .....	11
3.1.3	Test Result .....	11
	<b>APPENDIX II: PHOTOGRAPHS OF EMC TEST CONFIGURATION .....</b>	<b>16</b>

Change History		
Issue	Date	Reason for change
1.0	2024.08.12	First edition



## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Name .....	RICO2 THERMAL IMAGING SCOPE
Hardware Version.....	V1.1
Software Version .....	V1.1.11
Power supply:	Battery Model No.: IBP-5 Capacity: 3.6V/4.4Ah MAX Charge Voltage: 4.2V Manufacturer: Jinqu New Energy (ZheJiang) Co., Ltd.  4.2V DC

*Note1:* The EUT is a RICO2 THERMAL IMAGING SCOPE;

*Note2:* The RL42R have the same technical construction including circuit diagram, PCB Layout, components and component layout, all electrical construction and mechanical construction, with RH50R the difference lies only in lens focal length and thermal imaging module of the different models.

*Note3:* For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	N.A
2	15.109	Radiated Emission	PASS

### NOTE:

- (1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.
- (2) AC conduction is not applicable because the product is 4.2V DC power supply.



## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **FCC-Registration No.: CN1283**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until Jun 30, 2025.

#### **ISED Registration: 11185A-1**

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Jun 30, 2025.

#### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.2 dB (k=2)
Uncertainty of Radiated Emission: (30MHz~1GHz)	Uc = 5.8 dB (k=2)
Uncertainty of Radiated Emission: (1~6GHz)	Uc = 5.1 dB (k=2)
Uncertainty of Radiated Emission: (6~18GHz)	Uc = 5.5 dB (k=2)



## 2. TEST CONDITIONS SETTING

### 2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

#### Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
/	/	/	/	/

#### Support Cable:

Description	Shield Type	Ferrite Core	Length
DC Power Cable	Un- shielding	/	1.0m

### 2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1: 2.4G WIFI + Battery;

Setup2: Idle + Battery;


Note1: All models are tested and the worst results are provided in the report.

## 2.3 Test Setup and Equipments List


### 2.3.1 Radiated Emission

#### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz

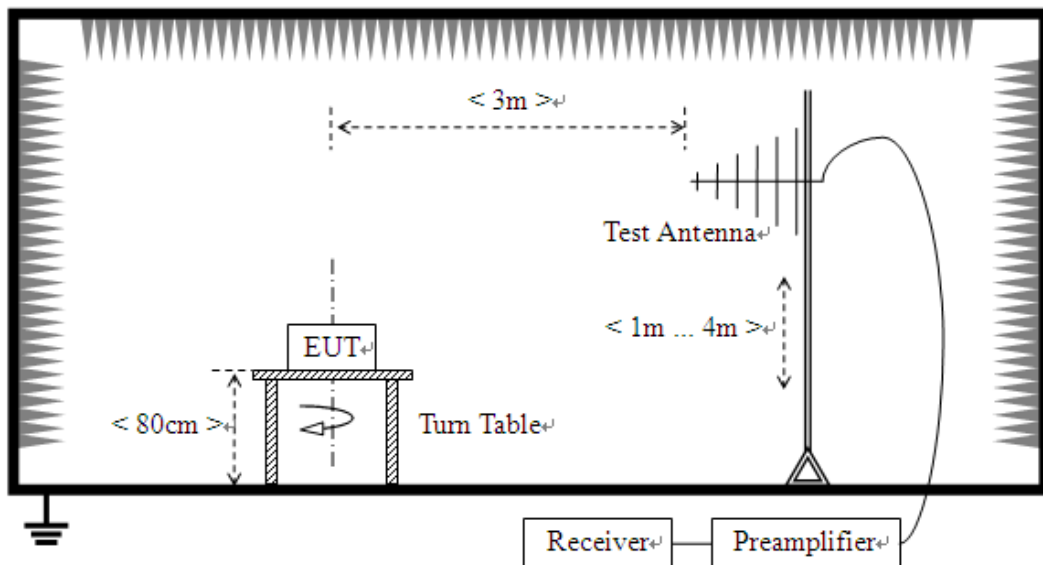

- 2) For radiated emissions above 1GHz

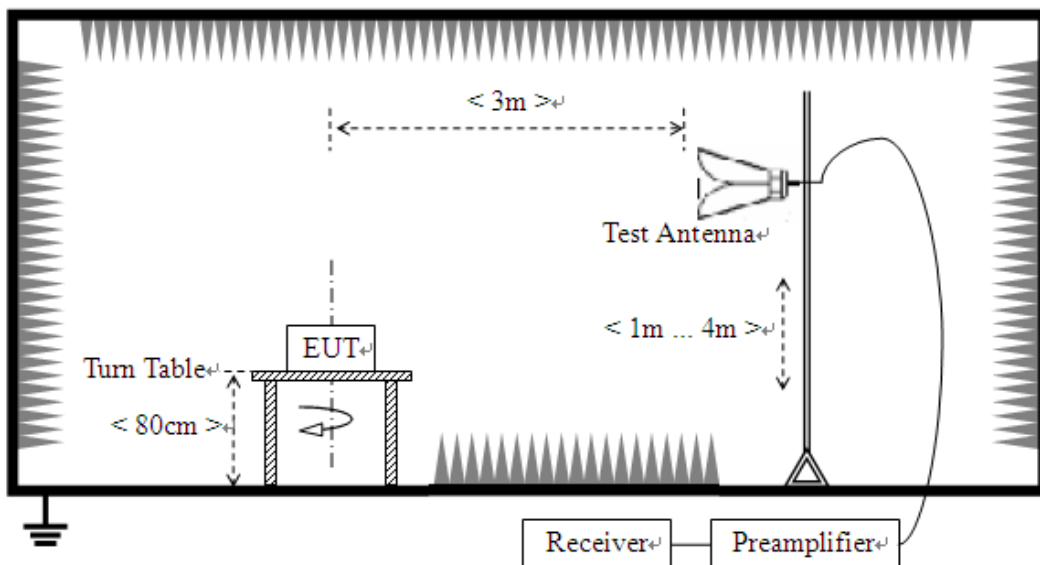



**B. Test Procedure**

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2024.02.29	2025.02.28
Broadband Ant.	ETC	MCTD2786	A240204135	2024.01.19	2025.01.18
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2024.02.28	2027.02.27
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2024.05.24	2025.05.23
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2023.08.02	2026.08.01
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2022.04.12	2025.04.11

### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Radiated Emission

##### 3.1.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\mu\text{V/m}$ )	( $\text{dB}\mu\text{V/m}$ )
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) QP ( $\text{dB}\mu\text{V/m}$ )	Class B(3m) QP ( $\text{dB}\mu\text{V/m}$ )
30 - 88	50.0	40.0
88 - 216	54.0	43.5
216 - 230	56.9	46.0
230 - 960	57.0	47.0
960-1000	60.0	54.0
Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	Class A(3m) ( $\text{dB}\mu\text{V/m}$ )	Class B(3m) ( $\text{dB}\mu\text{V/m}$ )
Above 1G	60(AV) /80(PK)	54(AV) /74(PK)

- For frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G: QP detector RBW 120 kHz, VBW 300 kHz.



For Above 1G: PK detector RBW 1MHz, VBW 3MHz for PK value; AV detector RBW 1MHz, VBW 10Hz for AV value.

**Note:**

- 1) The tighter limit shall apply at the boundary between two frequency ranges.
- 2) Limitation expressed in dBuV/m is calculated by  $20\log$  Emission Level (uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\text{uV/m} * (10)^2 = 100 * 30\text{uV/m}.$$

### 3.1.2 Test Description

See section 2.3.2 of this report.

### 3.1.3 Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note:

1. All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.


### A. Radiation disturbances, antenna polarization: Vertical, Setup1

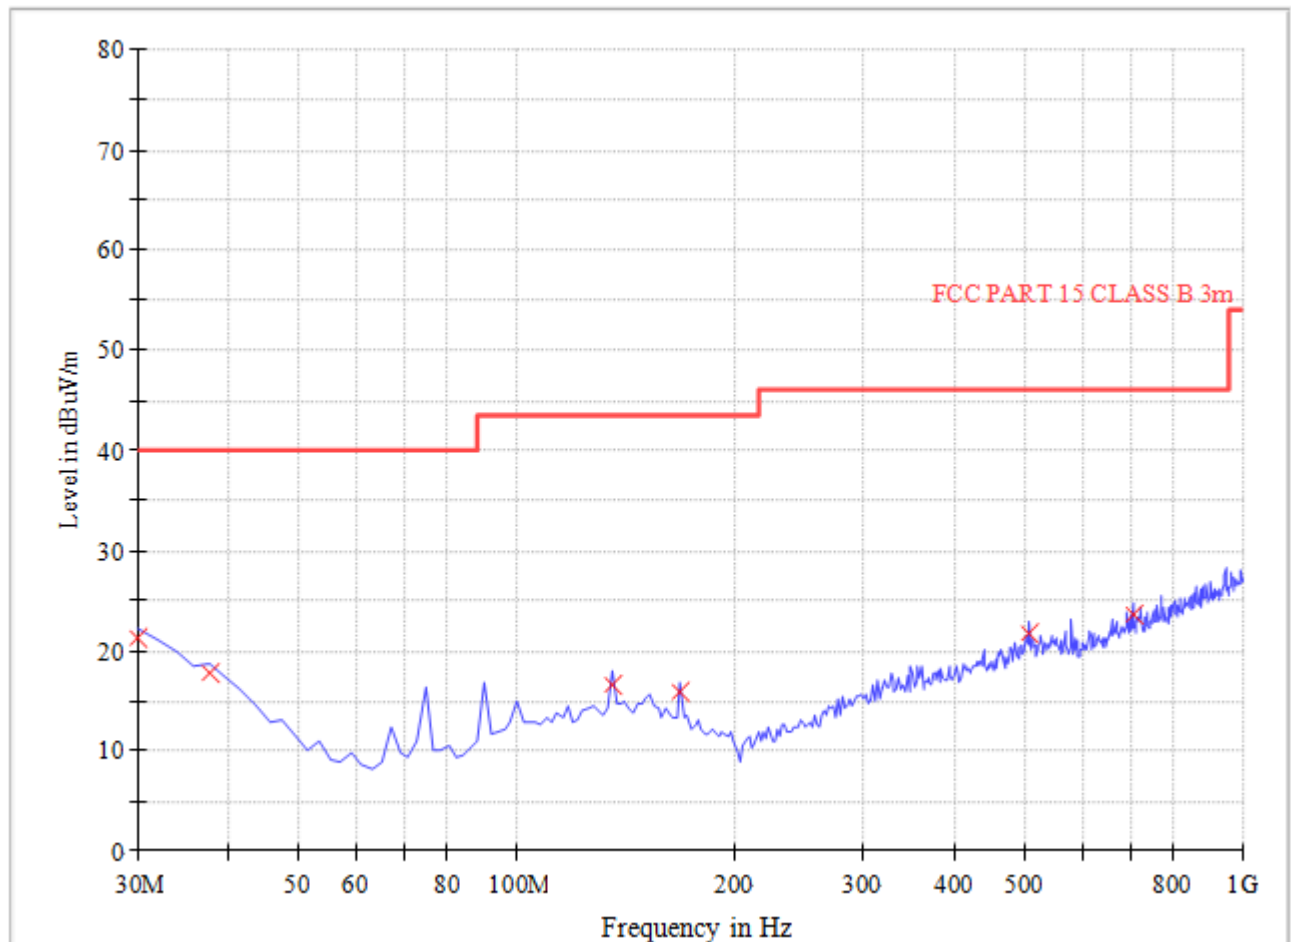

(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB )	Verdict
30.00	21.31	120.000	106	40.0	18.69	Vertical	0.5	18.8	Pass
37.76	17.89	120.000	103	40.0	22.11	Vertical	0.5	14.2	Pass
134.96	16.69	120.000	105	43.5	26.81	Vertical	1.0	11.6	Pass
168.00	15.91	120.000	101	43.5	27.59	Vertical	1.2	10.8	Pass
508.20	21.68	120.000	107	46.0	24.32	Vertical	1.5	18.1	Pass
704.52	23.60	120.000	106	46.0	22.40	Vertical	1.8	20.1	Pass


## B. Radiation disturbances, antenna polarization: Horizontal, Setup1

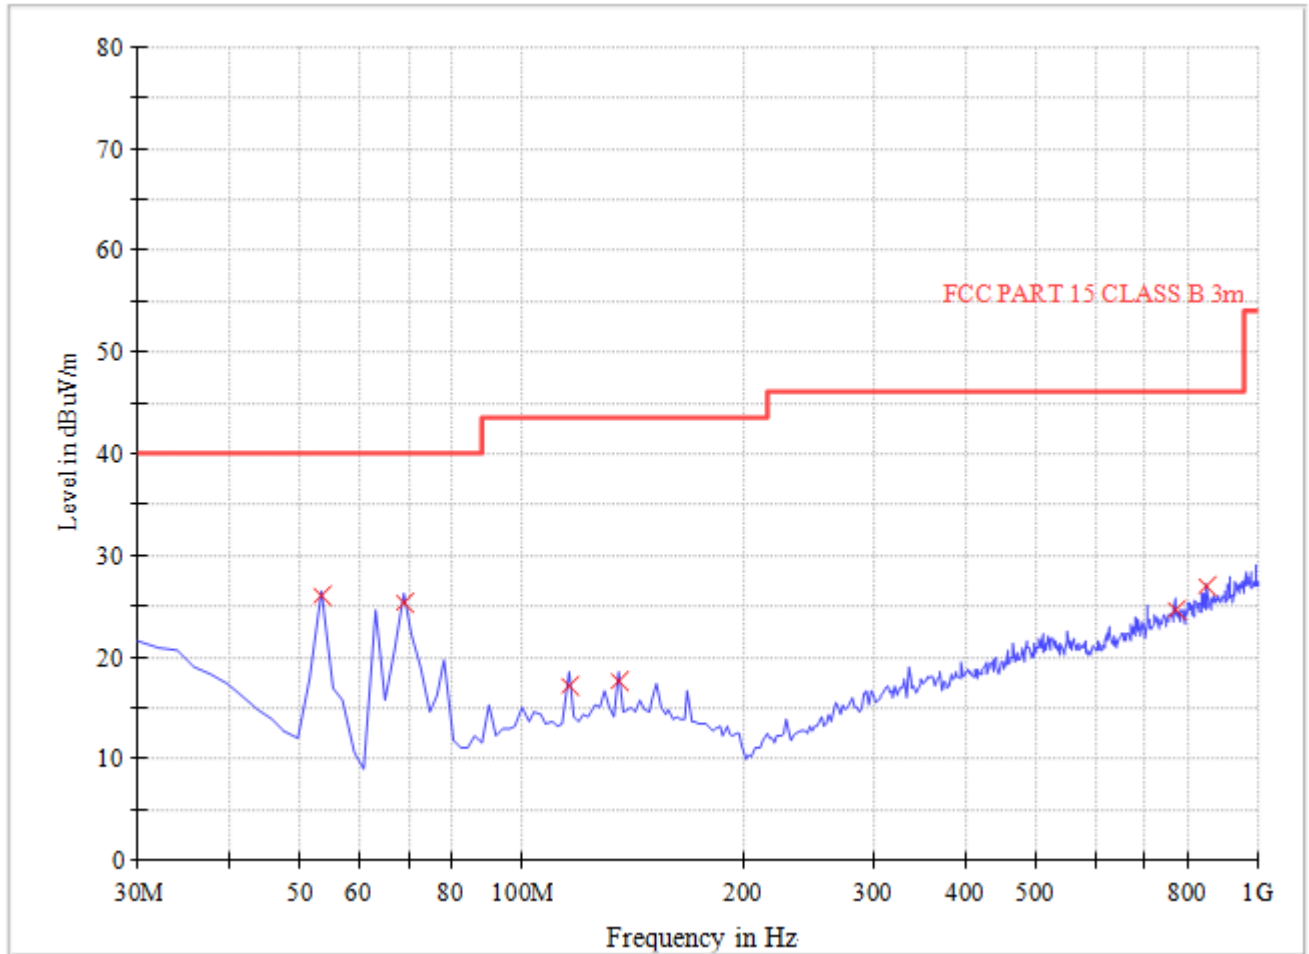

(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
53.32	25.86	120.000	105	40.00	14.14	Horizontal	0.6	7.5	Pass
68.88	25.36	120.000	102	40.00	14.64	Horizontal	0.8	5.9	Pass
115.52	17.01	120.000	106	43.50	26.49	Horizontal	1.0	11.0	Pass
134.96	17.63	120.000	101	43.50	25.87	Horizontal	1.0	11.6	Pass
770.64	24.63	120.000	104	46.00	21.37	Horizontal	1.9	20.6	Pass
852.28	26.81	120.000	103	46.00	19.19	Horizontal	2.0	21.9	Pass


### A. Radiation disturbances, antenna polarization: Horizontal, Setup1

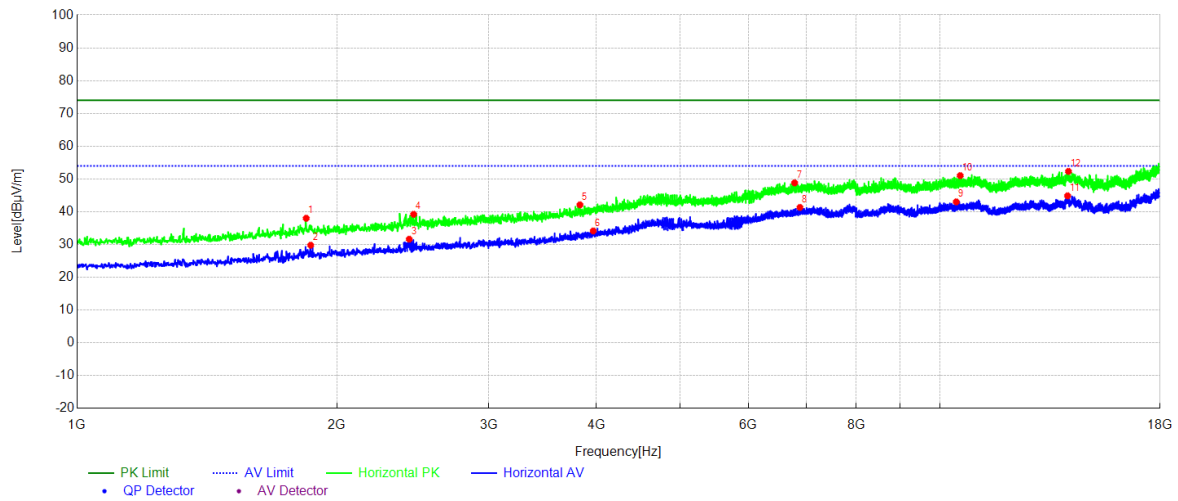

(Plot M: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin[dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1843.28	38.02	-12.54	74.00	35.98	PK	106	45	Horizontal
2	1865.39	29.80	-12.45	54.00	24.20	AV	108	313	Horizontal
3	2426.44	31.63	-10.55	54.00	22.37	AV	102	265	Horizontal
4	2455.35	39.22	-10.43	74.00	34.78	PK	105	291	Horizontal
5	3827.38	42.11	-5.83	74.00	31.89	PK	104	66	Horizontal
6	3965.10	34.15	-5.04	54.00	19.85	AV	109	177	Horizontal
7	6787.38	48.81	2.93	74.00	25.19	PK	103	54	Horizontal
8	6884.29	41.32	3.15	54.00	12.68	AV	107	76	Horizontal
9	10447.84	43.02	5.92	54.00	10.98	AV	102	182	Horizontal
10	10558.36	51.02	6.30	74.00	22.98	PK	105	75	Horizontal
11	14062.41	44.86	9.35	54.00	9.14	AV	106	181	Horizontal
12	14096.41	52.31	9.31	74.00	21.69	PK	101	169	Horizontal

## B. Radiation disturbances, antenna polarization: Vertical, Setup1

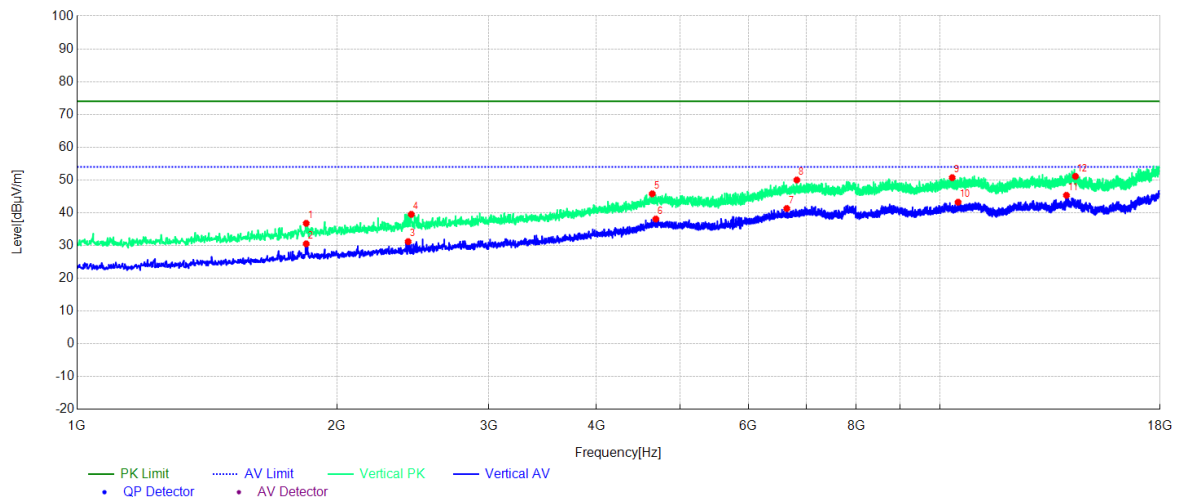

(Plot N: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB μV/m]	Trace	Height [cm]	Angle [°]	Polarity
1	1843.28	36.78	-12.54	74.00	37.22	PK	108	305	Vertical
2	1843.28	30.52	-12.54	54.00	23.48	AV	102	291	Vertical
3	2419.64	31.20	-10.57	54.00	22.80	AV	104	106	Vertical
4	2440.04	39.52	-10.49	74.00	34.48	PK	106	98	Vertical
5	4641.76	45.77	-1.34	74.00	28.23	PK	108	54	Vertical
6	4685.97	38.09	-1.15	54.00	15.91	AV	103	322	Vertical
7	6646.26	41.30	2.67	54.00	12.70	AV	107	66	Vertical
8	6826.48	50.00	3.04	74.00	24.00	PK	101	33	Vertical
9	10335.63	50.71	5.71	74.00	23.29	PK	105	122	Vertical
10	10498.85	43.22	6.14	54.00	10.78	AV	101	57	Vertical
11	14019.90	45.32	9.42	54.00	8.68	AV	102	118	Vertical
12	14359.94	51.11	9.46	74.00	22.89	PK	109	85	Vertical




## Appendix II: Photographs of EMC Test Configuration

### 1. Radiated Emission Measurement below 1GHz



### 2. Radiated Emission Measurement above 1GHz

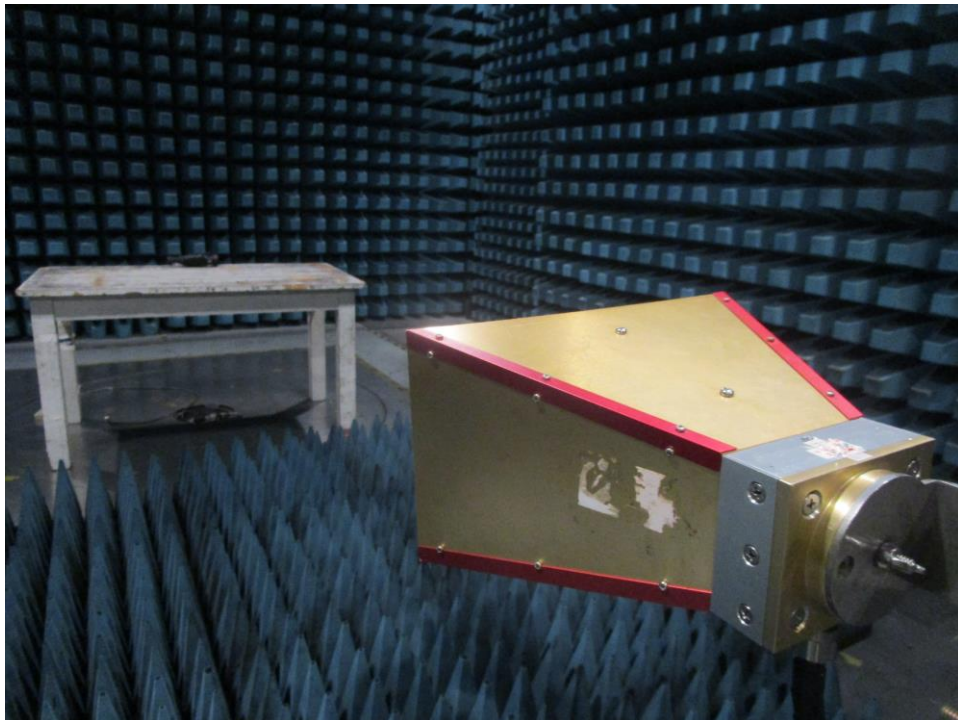

-----End of Report-----