



# EMC TEST REPORT

Product Name: Mobile phone

Model Name: P41

Issued For : PCD, LLC

1500 Tradeport Drive, Suite A, Orlando, United States 32824

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,  
No.177 Renmin West Road, Jinsha Community, Kengzi  
Street, Pingshan New District, Shenzhen, China

Report Number: LGT22J010EM01

Sample Received Date: Oct. 11, 2022

Date of Tested: Oct. 11, 2022 – Oct. 20, 2022

Date of Issue: Oct. 20, 2022

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## TEST REPORT CERTIFICATION

**Applicant** PCD, LLC  
**Address** 1500 Tradeport Drive, Suite A, Orlando, United States  
32824  
**Manufacturer** PCD, LLC  
**Address** 1500 Tradeport Drive, Suite A, Orlando, United States  
32824  
**Product Name** Mobile phone  
**Trade Mark** N/A  
**Model Name** P41  
**Sample Status:** Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	PASS

Prepared by:

*Terry Zhao*

Terry Zhao  
Engineer

Approved by:

*Vita Li*

Vita Li  
Technical Director





## Table of Contents

<b>1. TEST SUMMARY</b>	<b>5</b>
1.1 TEST LABORATORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	8
2.3 DESCRIPTION OF THE SUPPORT UNITS	8
2.5 MEASUREMENT INSTRUMENTS LIST	9
<b>3. EMC EMISSION TEST</b>	<b>10</b>
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.2 RADIATED EMISSION MEASUREMENT	14
<b>APPENDIX 1 - TEST SETUP</b>	<b>22</b>



### **Revision History**

Rev.	Issue Date	Revisions
00	Oct. 20, 2022	Initial Issue



## 1. TEST SUMMARY

EMC Emission				
Standard	Test Item	Limit	Judgement	Remark
FCC 47 CFR Part 15 Subpart B ANSI C63.4-2014	Conducted Emissions	Class B	PASS	
	Radiated Emissions Below 1GHz	Class B	PASS	
	Radiated Emissions Above 1GHz	Class B	PASS	Note 2

Note:

- 1 "N/A" denotes test is not applicable in this Test Report
- 2 If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.



## 1.1 TEST LABORATORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

## 1.2 MEASUREMENT UNCERTAINTY

Test Item	Measurement Frequency Range MHz	Uncertainty dB
Conducted Emissions at AC mains power port	0.009 ~ 30	2.80
Radiated Emissions	0.009 ~ 30	2.16
Radiated Emissions	30 ~ 1000	4.40
Radiated Emissions	1000 ~ 18000	5.49
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.		



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Mobile phone
Model Name	P41
Series Model	N/A
Model Difference	N/A
Rating	AC 120V/60Hz
Adapter	Input: 100-240V, 50-60Hz, 0.2A Ouptut: 5V, 0.5A
Battery	Capacity: 1400mAh Rated Voltage: 3.8 V
Hardware Version Number	MM3971_MB_V1.0
Software Version Number	PCD_P41_CLARO_PR_V1.0

*Note: For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.*



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operating mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Mode	Description
Mode 1	Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link
Mode 2	Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+WCDMA Link
Mode 3	Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+LTE Link
Mode 4	USB Data Transmission+SD+SIM+BT+Wi-Fi

Note: Pre-test all modes, only the data of worst-case mode 1 was recorded in this report.

## 2.3 DESCRIPTION OF THE SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
Power Adapter	N/A	N/A	N/A	N/A
Power cord	N/A	N/A	N/A	1m

### Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Earphone	N/A	39630078	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.





## 2.5 MEASUREMENT INSTRUMENTS LIST

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
LISN	COM-POWER	LI-115	02032	2022.04.13	2023.04.12
LISN	SCHWARZBECK	NNLK 8121	00847	2022.08.19	2023.08.18
CE Cable	N.A	C01	N.A	2022.05.05	2023.05.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.08.19	2023.08.18
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				
Radiated Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2022.04.12	2023.04.11
Active loop Antenna	R&S	HFH2-Z2	POS871398181	2022.06.02	2024.06.01
Spectrum Analyzer	Kesight	N9010B	MY60242508	2022.04.29	2023.04.28
Bilog Antenna	SCHAFFNER	CBL6112B	2705	2022.06.05	2024.06.04
Horn Antenna	SCHWARZBECK	3115	10SL0060	2022.06.02	2024.06.01
Pre-amplifier(0.1M-3GHz)	HP	8447D	2727A05655	2022.04.11	2023.04.10
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2022.04.13	2023.04.12
RE Cable (9K-1G)	N.A	R01	N.A	2022.05.05	2023.05.04
RE Cable (1-26G)	N.A	R02	N.A	2022.05.05	2023.05.04
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS

FREQUENCY (MHz)	Conducted Emission Limits (dBuV)			
	Class A		Class B	
	Quasi-peak	Average	Quasi-peak	Average
0.15 ~ 0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.5 ~ 5	73.00	60.00	56.00	46.00
5 ~ 30	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor  
Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor  
Margin Level = Measurement Value - Limit Value


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

##### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item - EUT Test Photos.


### 3.1.3 TEST SETUP

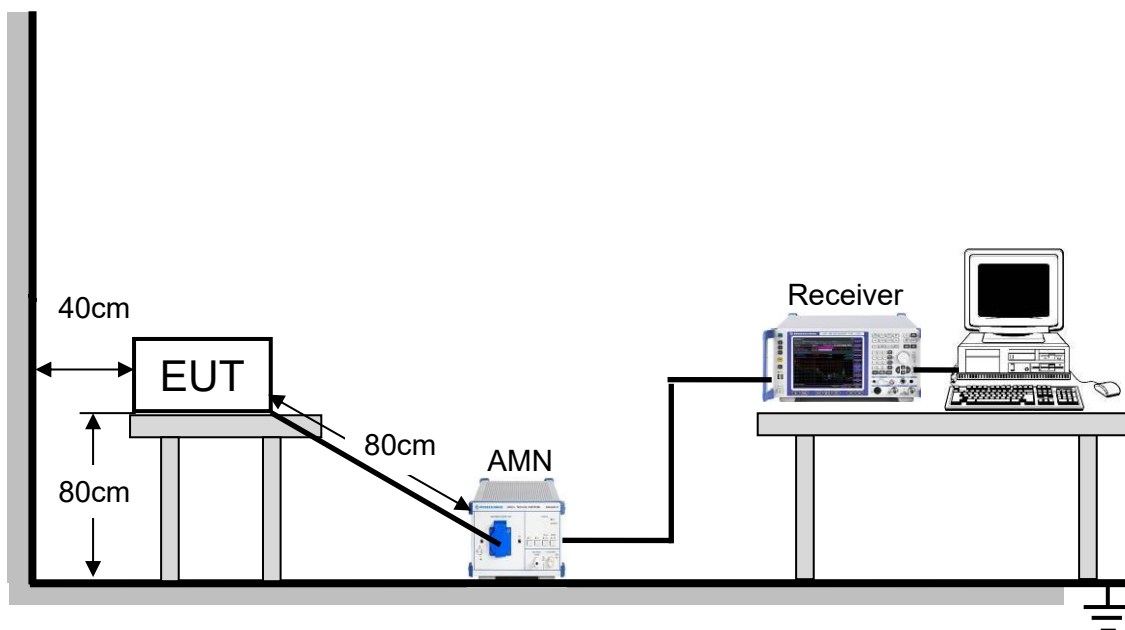



### 3.1.4 TEST RESULTS


Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Temperature: 25.9℃
M/N: P41	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2022-10-18
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

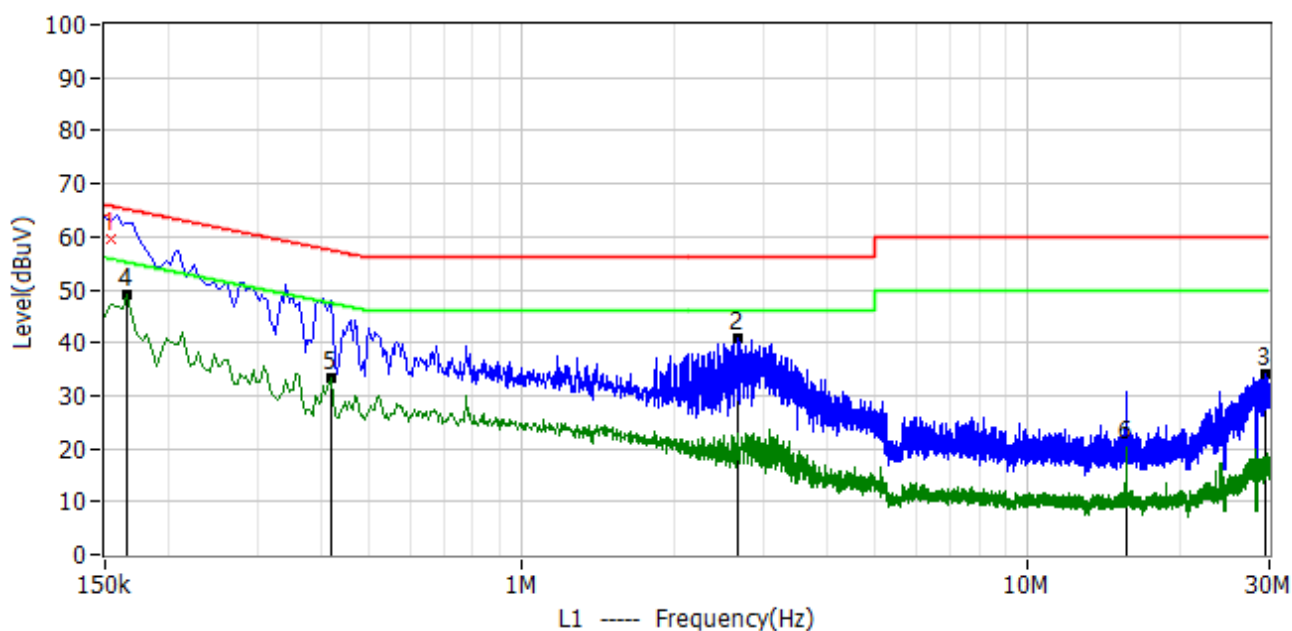

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	49.23	10.50	59.73	65.78	-6.05	QP	L1
2*	2.670MHz	29.92	10.76	40.68	56.00	-15.32	PK	L1
3*	29.482MHz	22.91	11.22	34.13	60.00	-25.87	PK	L1
4*	166.000kHz	38.66	10.50	49.16	55.16	-5.99	AV	L1
5*	418.000kHz	22.72	10.50	33.22	47.49	-14.27	AV	L1
6*	15.614MHz	9.08	11.05	20.13	50.00	-29.87	AV	L1



Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Temperature: 25.9℃
M/N: P41	Humidity: 45%RH
Test Voltage: AC 120V/60Hz	Test Data: 2022-10-18
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

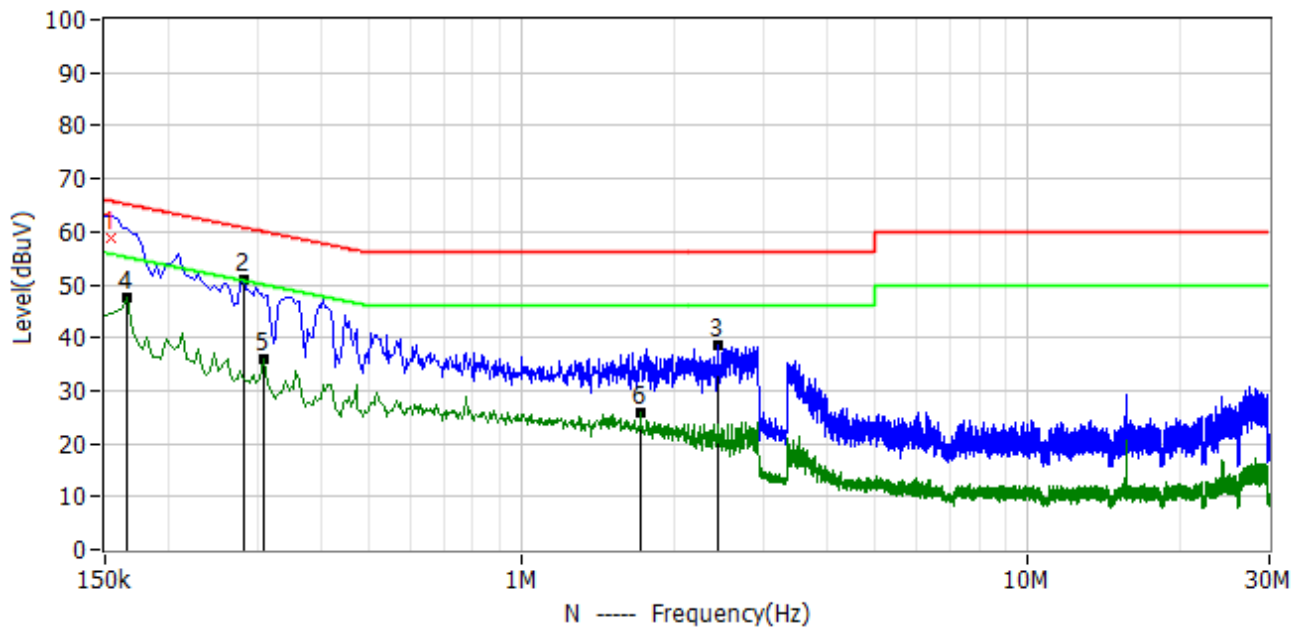

No.	Frequency	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1	154.000kHz	48.40	10.50	58.90	65.78	-6.88	QP	N
2*	282.000kHz	40.58	10.50	51.08	60.76	-9.67	PK	N
3*	2.450MHz	27.65	10.76	38.41	56.00	-17.59	PK	N
4*	166.000kHz	37.21	10.50	47.71	55.16	-7.44	AV	N
5*	310.000kHz	25.51	10.50	36.01	49.97	-13.96	AV	N
6*	1.718MHz	15.12	10.68	25.80	46.00	-20.20	AV	N



## 3.2 RADIATED EMISSION MEASUREMENT

### 3.2.1 LIMITS

#### Below 1 GHz

Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3m)	Field strength (dBuV/m) (at 3m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

#### Above 1 GHz

Frequency (MHz)	Class A		Class B	
	Field strength (dBuV/m) (at 3m)		Field strength (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

#### Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Note:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) The test result calculated as following:  
Measurement Value = Reading Level + Correct Factor,  
Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use),  
Margin Level = Measurement Value - Limit Value.


### 3.2.2 TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. EUT as the center to the edge of the auxiliary device, the distance from the maximum edge to the center of the antenna is 3 meter.
- c. The height of antenna is varied from 1 meter to 4 meter above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meter and the rotatable table was turned from 0 degrees to 360 degree to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.


f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.2.3 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

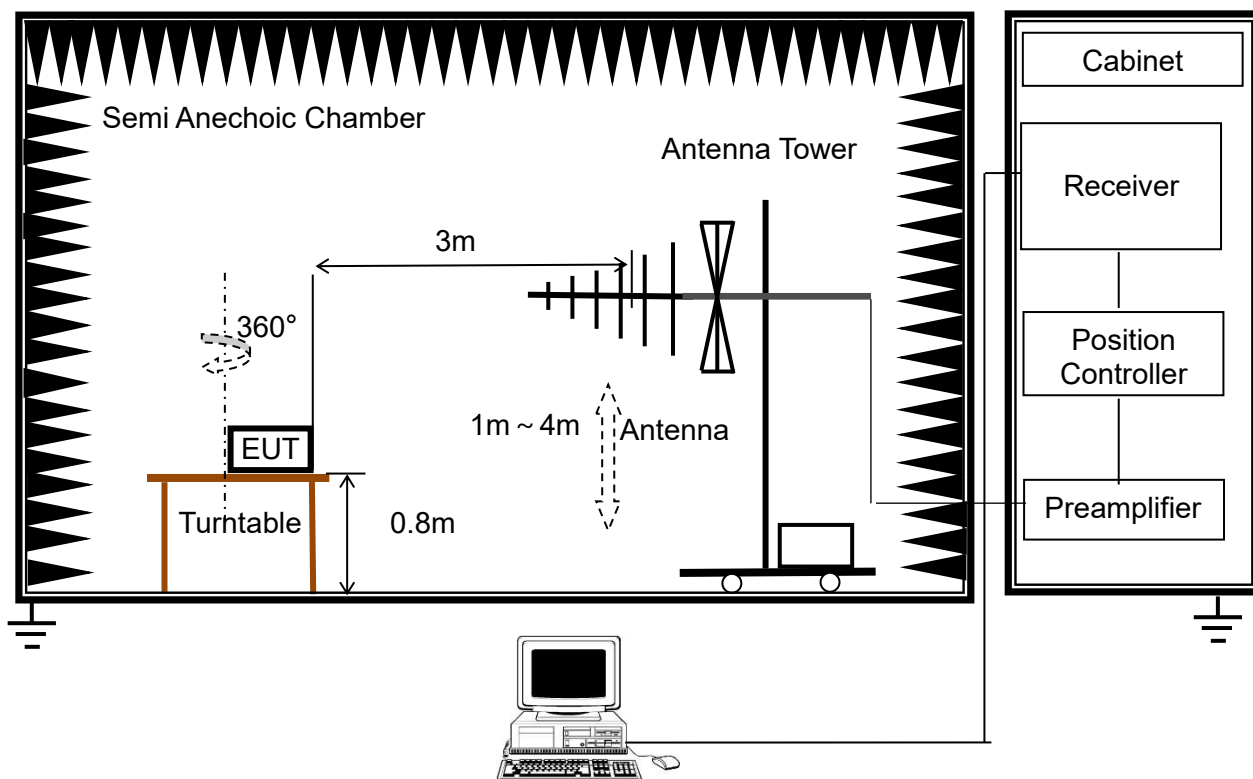


(B) Radiated Emission Test Set-Up Frequency Above 1GHz

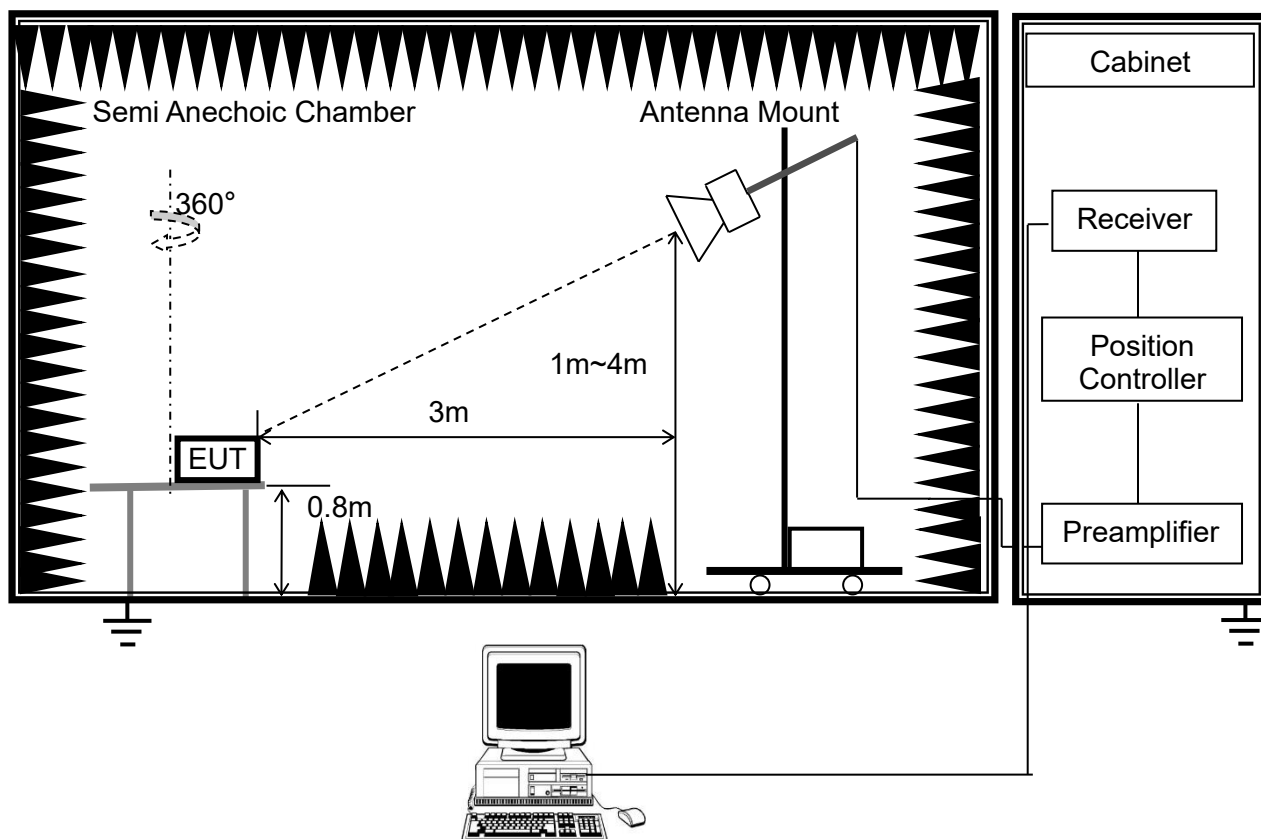



### 3.2.4 TEST RESULTS - BELOW 1GHZ

Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 38%RH
Temperature: 27.2°C	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

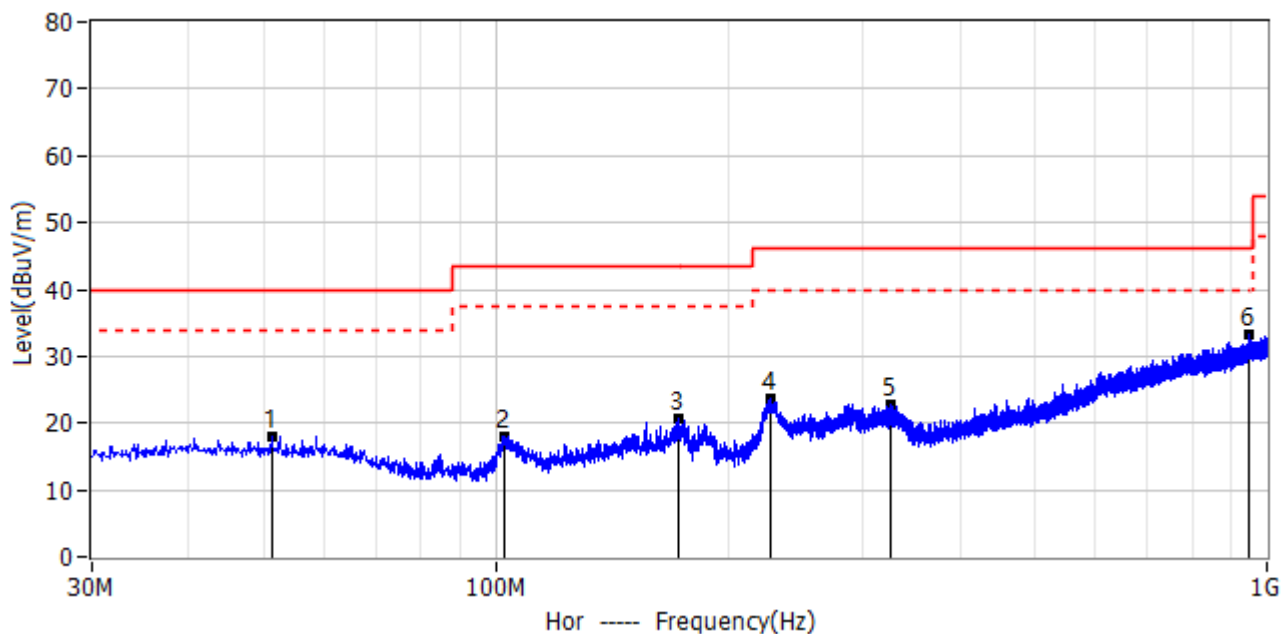


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	51.340MHz	4.39	13.68	18.07	40.00	-21.93	PK	Hor
2*	102.508MHz	7.54	10.46	18.00	43.50	-25.50	PK	Hor
3*	173.075MHz	7.33	13.49	20.82	43.50	-22.68	PK	Hor
4*	226.668MHz	12.58	11.03	23.61	46.00	-22.39	PK	Hor
5*	324.516MHz	7.45	15.20	22.65	46.00	-23.35	PK	Hor
6*	947.378MHz	5.43	27.68	33.11	46.00	-12.89	PK	Hor






Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 38%RH
Temperature: 27.2°C	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

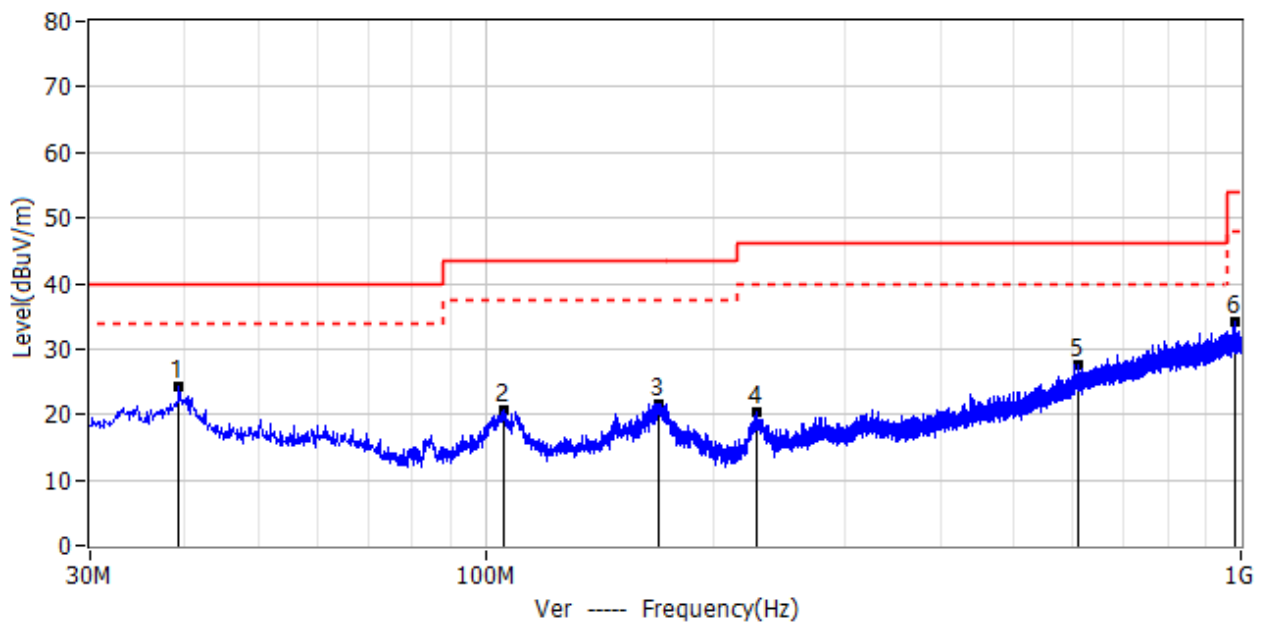

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	39.336MHz	10.49	13.83	24.32	40.00	-15.68	PK	Ver
2*	106.024MHz	10.00	10.79	20.79	43.50	-22.71	PK	Ver
3*	169.923MHz	7.78	13.94	21.72	43.50	-21.78	PK	Ver
4*	228.486MHz	9.25	11.11	20.36	46.00	-25.64	PK	Ver
5*	609.211MHz	5.27	22.35	27.62	46.00	-18.38	PK	Ver
6*	980.843MHz	6.22	27.85	34.07	54.00	-19.93	PK	Ver




Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 38%RH
Temperature: 27.2°C	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: USB Data Transmission+SD+SIM+BT+Wi-Fi	
Note:	

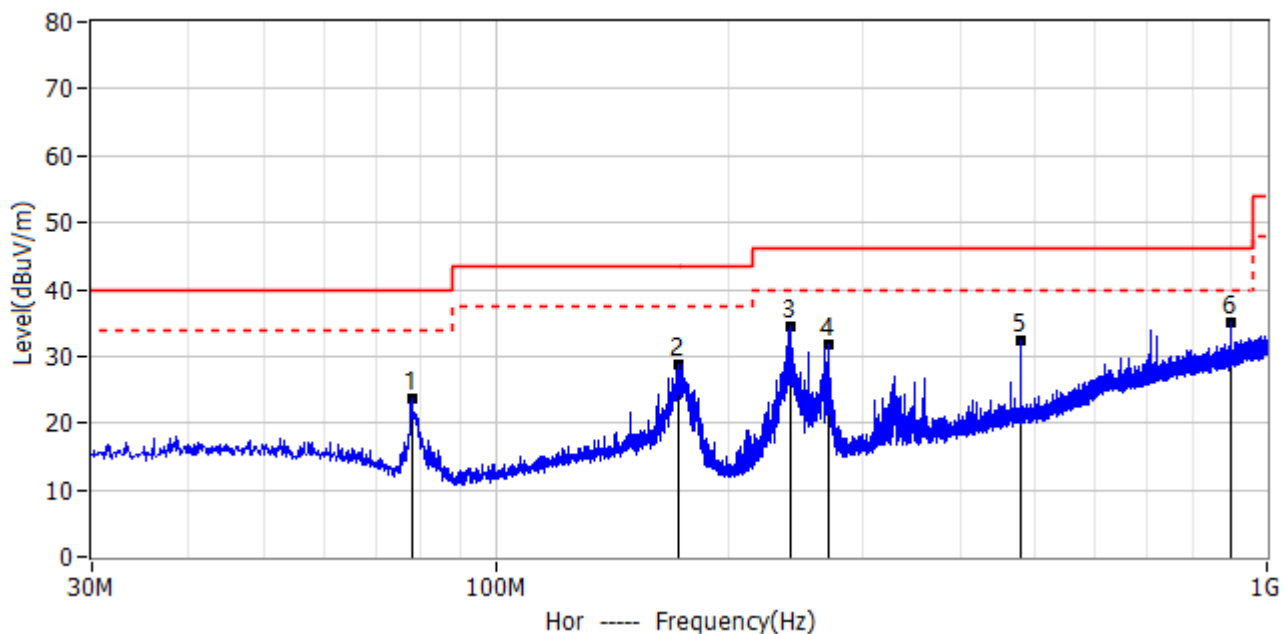

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	78.015MHz	13.87	9.93	23.80	40.00	-16.20	PK	Hor
2*	173.196MHz	15.26	13.48	28.74	43.50	-14.76	PK	Hor
3*	241.824MHz	22.07	12.30	34.37	46.00	-11.63	PK	Hor
4*	270.681MHz	18.47	13.43	31.90	46.00	-14.10	PK	Hor
5*	479.959MHz	13.45	18.96	32.41	46.00	-13.59	PK	Hor
6*	899.605MHz	8.39	26.58	34.97	46.00	-11.03	PK	Hor




Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 38%RH
Temperature: 27.2°C	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: USB Data Transmission+SD+SIM+BT+Wi-Fi	
Note:	

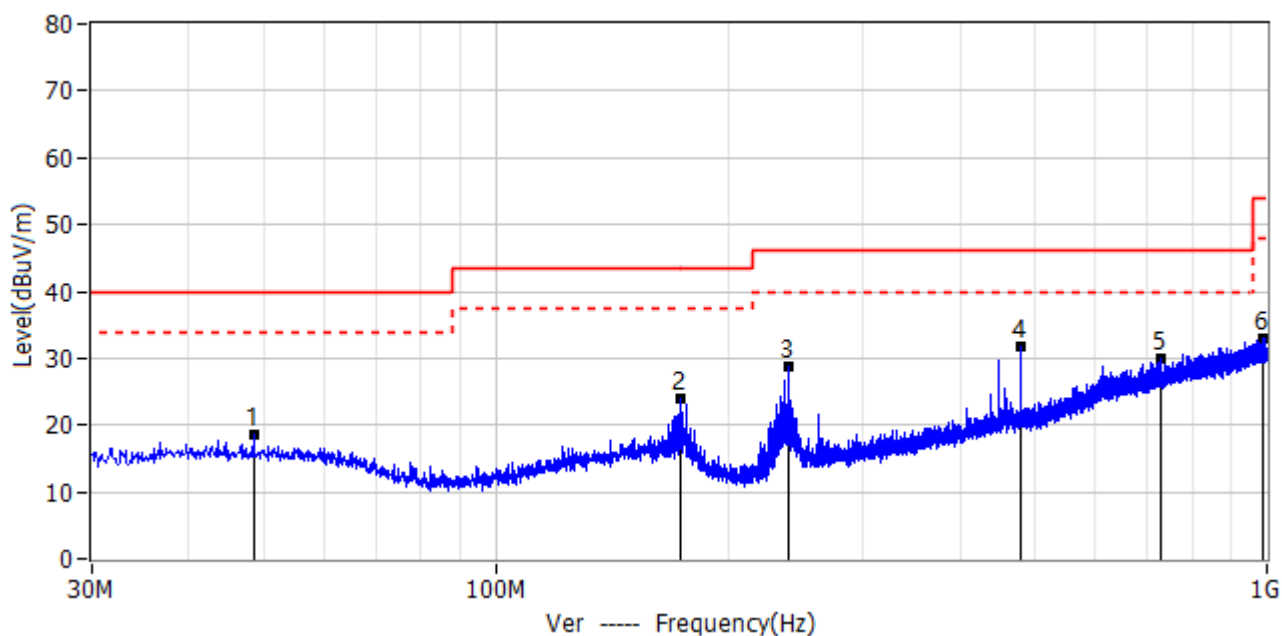

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	48.551MHz	4.86	13.77	18.63	40.00	-21.37	PK	Ver
2*	174.045MHz	10.59	13.35	23.94	43.50	-19.56	PK	Ver
3*	239.763MHz	16.57	12.22	28.79	46.00	-17.21	PK	Ver
4*	479.959MHz	12.73	18.96	31.69	46.00	-14.31	PK	Ver
5*	730.340MHz	5.66	24.36	30.02	46.00	-15.98	PK	Ver
6*	985.814MHz	5.20	27.86	33.06	54.00	-20.94	PK	Ver




Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 42%RH
Temperature: 24°C	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

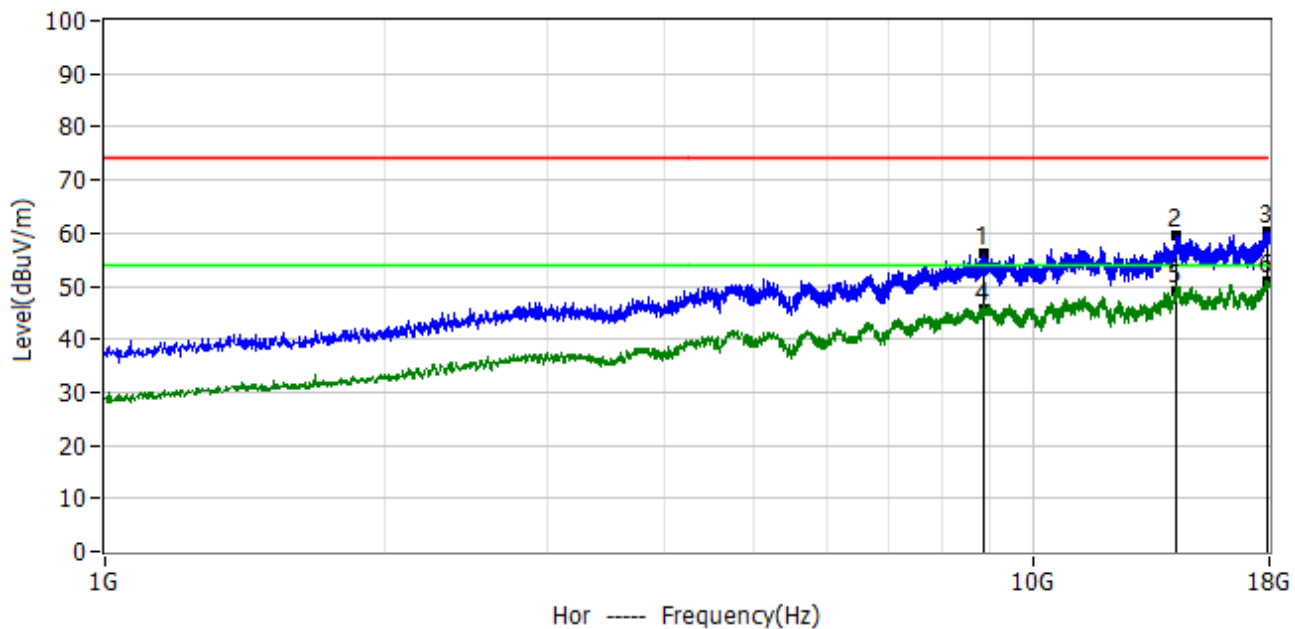

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	8.869GHz	57.69	-1.54	56.15	74.00	-17.85	PK	Hor
2*	14.294GHz	53.51	5.90	59.41	74.00	-14.59	PK	Hor
3*	17.885GHz	51.72	8.44	60.16	74.00	-13.84	PK	Hor
4*	8.869GHz	47.24	-1.54	45.70	54.00	-8.30	AV	Hor
5*	14.294GHz	43.00	5.90	48.90	54.00	-5.10	AV	Hor
6*	17.885GHz	42.36	8.44	50.80	54.00	-3.20	AV	Hor



Project: LGT22J010	Test Engineer: Dylan.shi
EUT: Mobile phone	Humidity: 42%RH
Temperature: 24℃	Test Voltage: AC 120V/60Hz
M/N: P41	Test Data: 2022-10-16
Test Mode: Charging+SIM+BT+Wi-Fi+Earphone+FM+Camera Recording+GSM Link	
Note:	

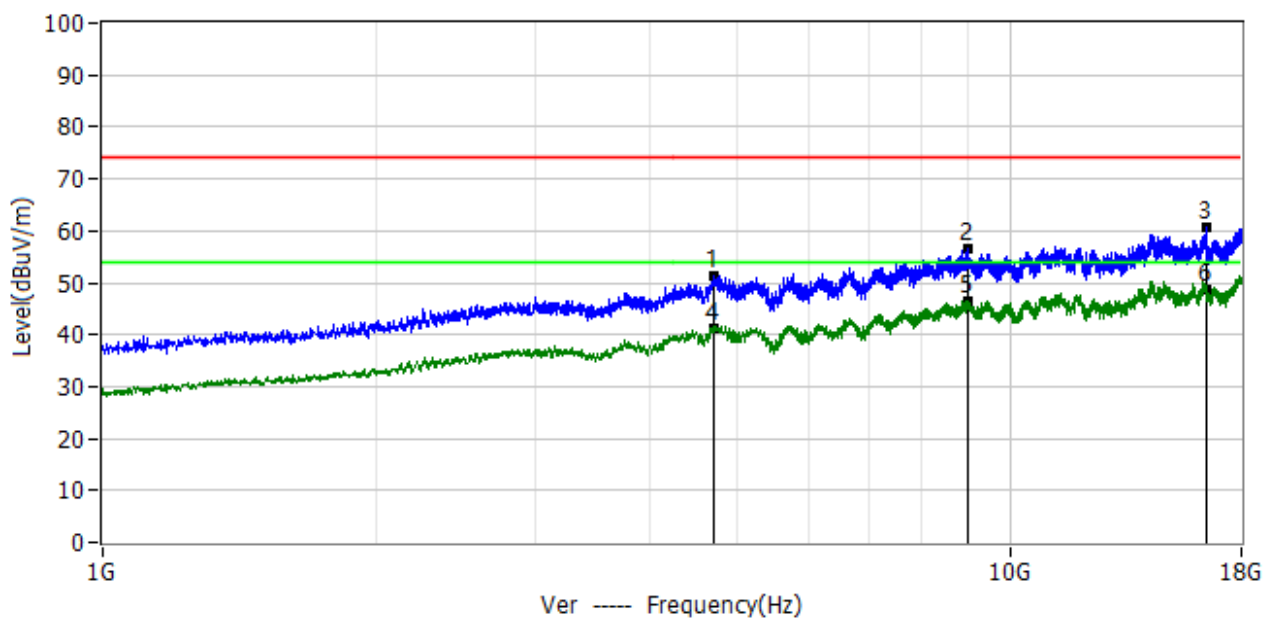


No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	4.727GHz	57.17	-5.93	51.24	74.00	-22.76	PK	Ver
2*	8.992GHz	57.59	-1.19	56.40	74.00	-17.60	PK	Ver
3*	16.472GHz	53.49	7.00	60.49	74.00	-13.51	PK	Ver
4*	4.727GHz	47.13	-5.93	41.20	54.00	-12.80	AV	Ver
5*	8.992GHz	47.49	-1.19	46.30	54.00	-7.70	AV	Ver
6*	16.472GHz	41.80	7.00	48.80	54.00	-5.20	AV	Ver

## APPENDIX 1 - TEST SETUP


### Conducted Emission Test Setup Photo



### Radiated Emission Test Setup Photo - Below 1GHz

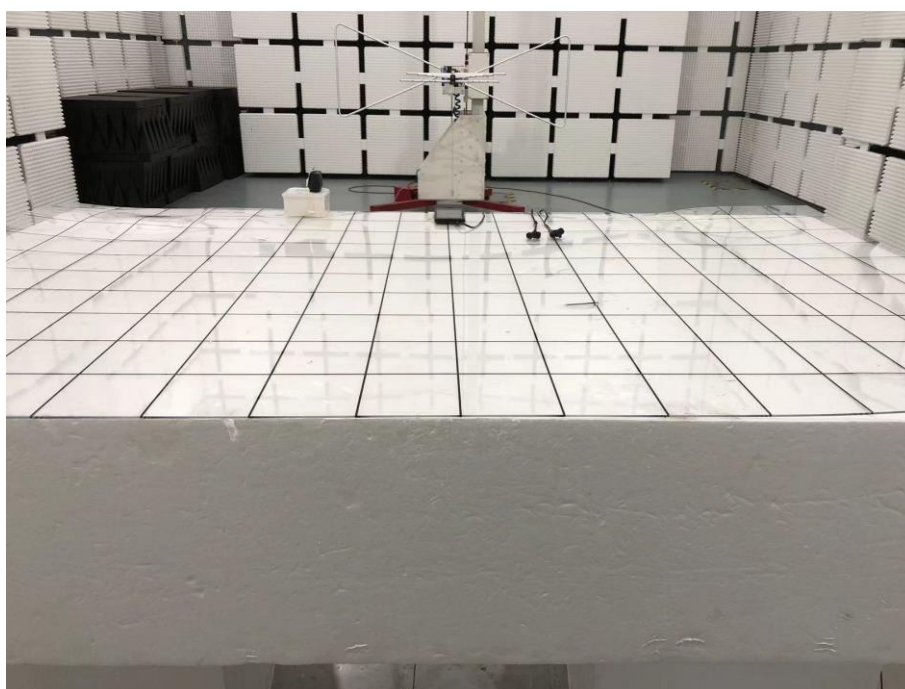

**Radiated Emission Test Setup Photo - Above 1GHz**

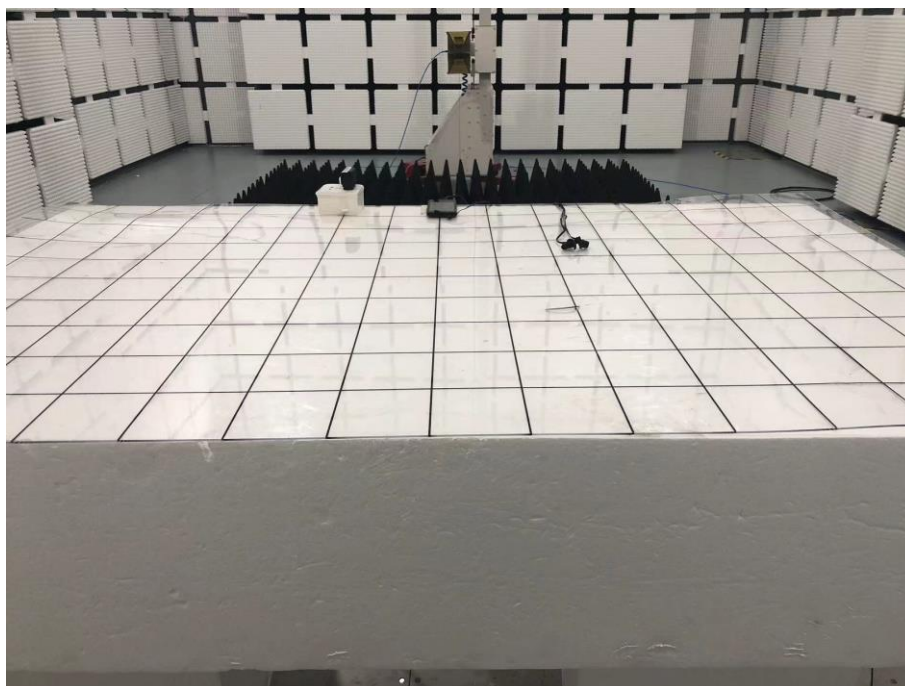


**Conducted Emission Test Setup Photo**






**Radiated Emission Test Setup Photo - Below 1GHz**

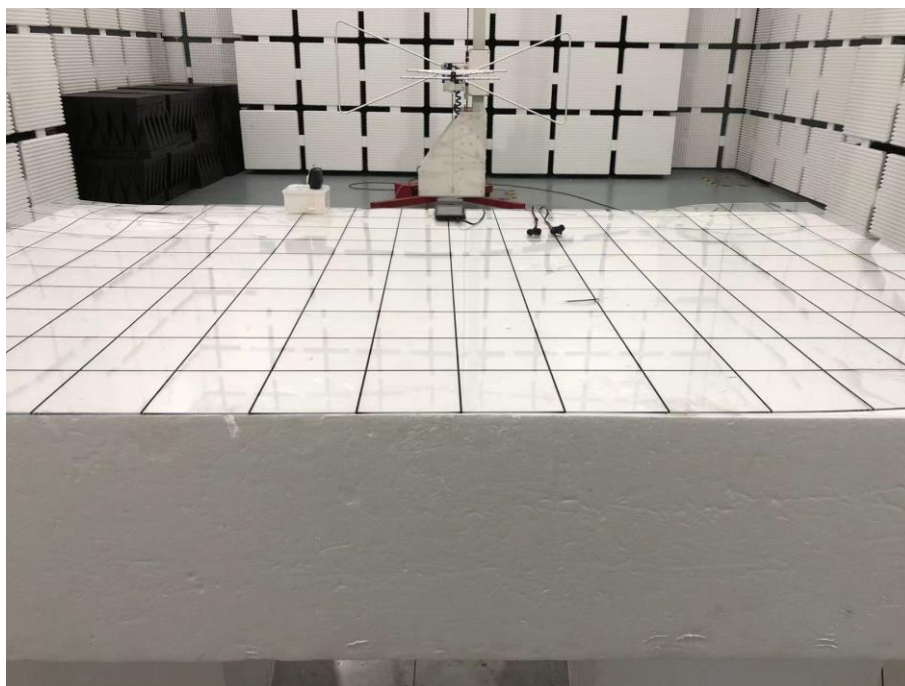

**Radiated Emission Test Setup Photo - Above 1GHz**

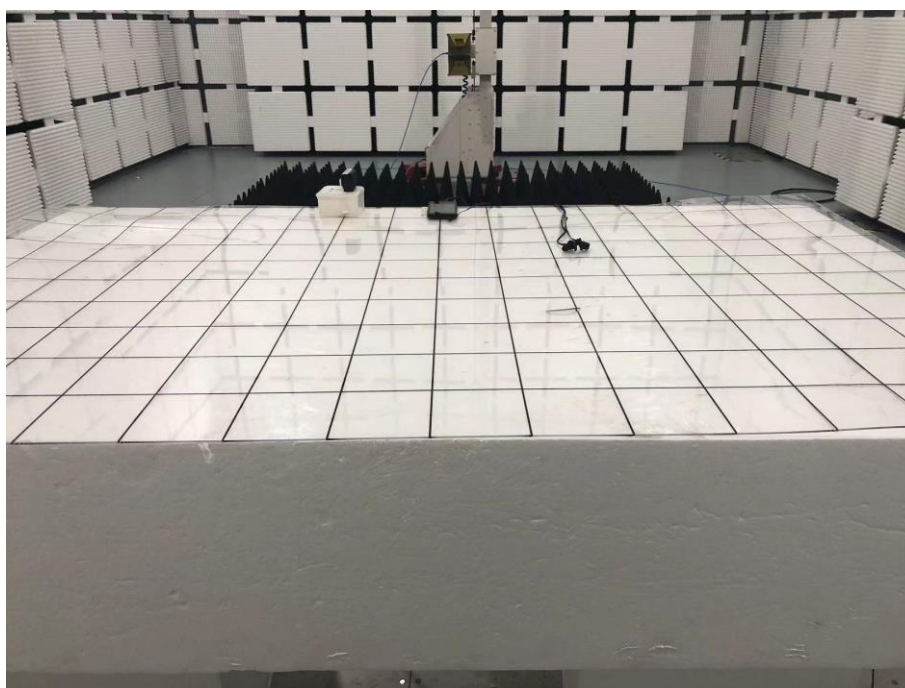







**Conducted Emission Test Setup Photo**



**Radiated Emission Test Setup Photo - Below 1GHz**

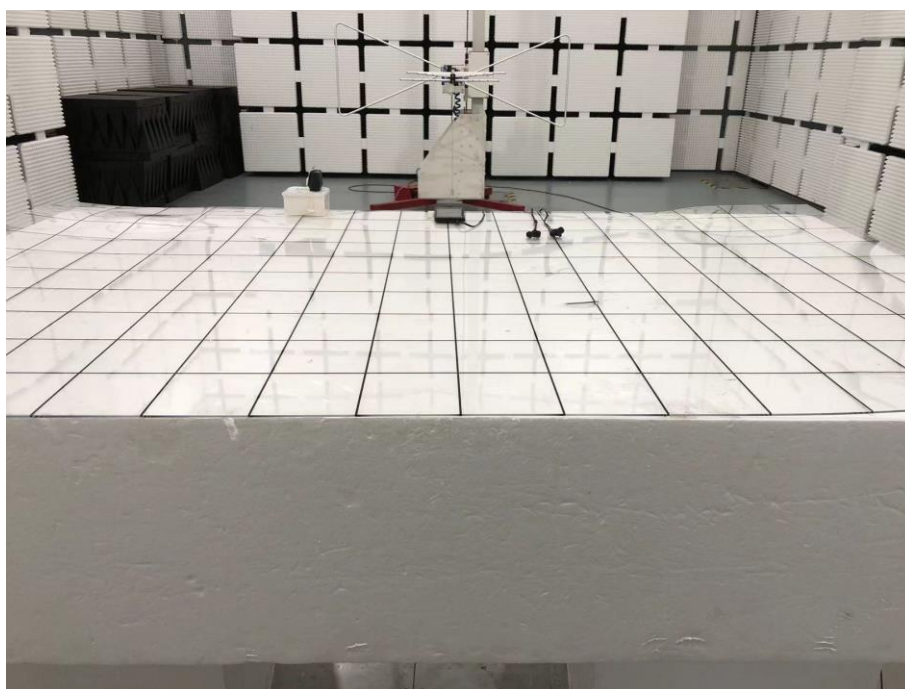

### **Radiated Emission Test Setup Photo - Above 1GHz**

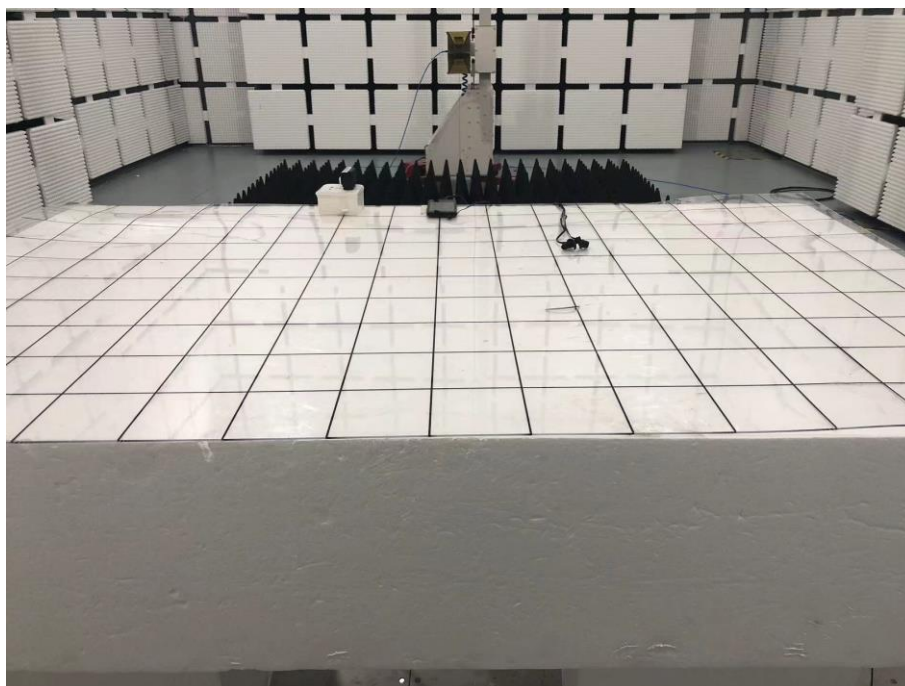

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*