



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640

Fax: +86-755-26648637

Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V05

Report Template Revision Date: 2021-11-06

# Test Report

**Report No. :** CQASZ20240801757E-06  
**Applicant:** Icarsoft Technology Inc.  
**Address of Applicant:** 1629 K St. Suite 300 N.W.Washington D.C., 20006 United States.  
**Equipment Under Test (EUT):**  
**Product:** Car Diagnostic Tool  
**Model No.:** CR Eagle  
**Test Model No.:** CR Eagle  
**Brand Name:** **iCarsoft**  
**FCC ID:** 2AWD8-CREAGLE  
**Standards:** 47 CFR Part 15, Subpart E  
KDB 789033 D02 General UNII Test Procedures New Rules v02  
KDB 558074 D01 Meas Guidance v05  
**Date of Receipt:** 2024-08-19  
**Date of Test:** 2024-08-19 to 2024-10-17  
**Date of Issue:** 2024-10-17  
**Test Result :** **PASS\***

\*In the configuration tested, the EUT complied with the standards specified above

**Tested By:**

Lewis Zhou

( Lewis Zhou )

**Reviewed By:**

Timo Lei

( Timo Lei )

**Approved By:**

Alex

( Alex Wang )



## 2 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20240801757E-06	Rev.01	Initial report	2024-10-17

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
Non-Occupancy Period	47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iv)	FCC Order, ET Docket No.03-122 (FCC 06-96)	N/A <sup>1)</sup>
DFS Detection Threshold	47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC Order, ET Docket No.03-122 (FCC 06-96)	N/A <sup>1)</sup>
Channel Availability Check Time	47 CFR Part 15 Subpart E Section 15.407 (h)(2)(ii)	FCC Order, ET Docket No.03-122 (FCC 06-96)	N/A <sup>1)</sup>
Uniform Spreading	47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC Order, ET Docket No.03-122 (FCC 06-96)	N/A <sup>1)</sup>
U-NII Detection Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC Order, ET Docket No.03-122 (FCC 06-96)	N/A <sup>1)</sup>
Channel Closing Transmission Time	47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iii)	FCC Order, ET Docket No.03-122 (FCC 06-96)	PASS
Channel Move Time	47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iii)	FCC Order, ET Docket No.03-122 (FCC 06-96)	PASS

**Remark:**

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application.

N/A<sup>1)</sup>: The operation mode of tested sample only is client without radar detection, therefore it is not required.

Model No.: Skylight 2, D104S

Only the model Skylight 2 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, Only the models are different.


## 4 Content

.....	1
2 VERSION .....	2
3 TEST SUMMARY .....	3
4 CONTENT .....	4
5 TEST REQUIREMENT .....	5
5.1 TEST SETUP .....	5
5.1.1 For Conducted test setup .....	5
5.1.2 Slave and Client device(EUT) block diagram of Test setup .....	5
5.1.3 Mast device(EUT) block diagram of Test setup .....	5
5.2 TEST ENVIRONMENT .....	6
5.3 TEST CONDITION .....	6
5.3.1 Radar test waveforms .....	6
5.3.2 Technical requirement .....	8
6 GENERAL INFORMATION .....	9
6.1 CLIENT INFORMATION .....	9
6.2 GENERAL DESCRIPTION OF EUT .....	9
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD .....	9
6.4 DESCRIPTION OF SUPPORT UNITS .....	12
6.5 EST LOCATION .....	12
6.6 TEST FACILITY .....	12
6.7 DEVIATION FROM STANDARDS .....	12
6.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	12
6.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	12
6.10 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2) .....	12
7 EQUIPMENT LIST .....	14
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION .....	15
Appendix A)Radar Test Waveform Calibration .....	16
Appendix B)Channel Loading .....	18
Appendix C)Channel Closing Transmission and Channel Move Time .....	19


## 5 Test Requirement

### 5.1 Test setup


#### 5.1.1 For Conducted test setup

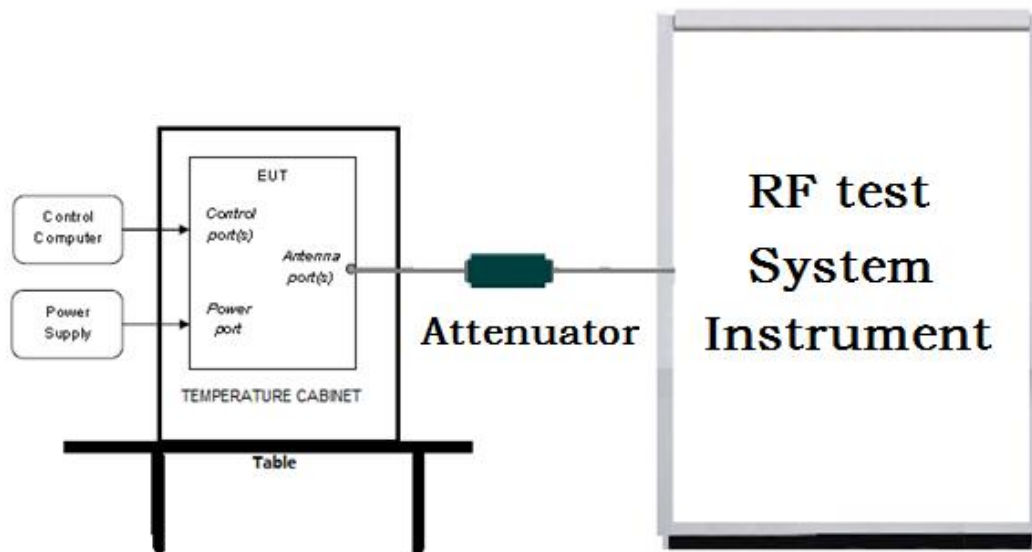

#### 5.1.2 Slave and Client device(EUT) block diagram of Test setup

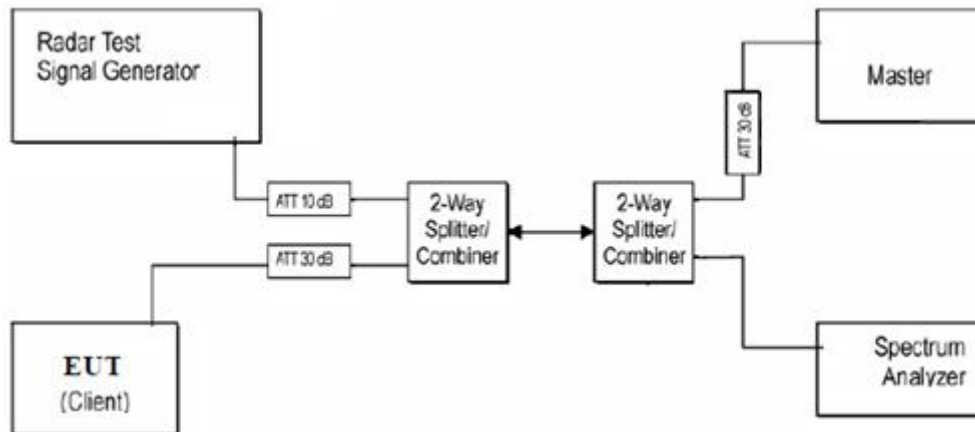

#### 5.1.3 Mast device(EUT) block diagram of Test setup

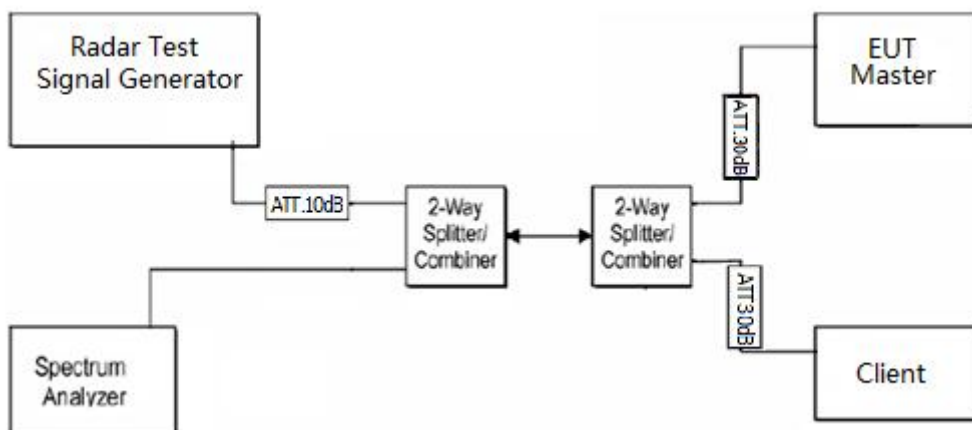

## 5.2 Test Environment

Operating Environment:	
Temperature:	20 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar

## 5.3 Test Condition

### 5.3.1 Radar test waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### a) Short Pulse Radar Test Waveforms

Radar Type	Pulse width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate(Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. For Short Pulse Radar Type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4.

#### b) Long Pulse Radar Test Waveform

Radar Type	Pulse width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Burst	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

#### Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen randomly.

- 1) The total test waveform length is 12 seconds.
- 2) Eight (8) Bursts are randomly generated for the Burst\_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

The diagram illustrates a "Long Pulse Radar Test Signal Waveform" over a "12 Second Transmission" period. The waveform consists of a series of rectangular pulses (bursts) separated by intervals. The first burst is labeled "Burst 1", followed by a "Burst Interval" (indicated by a vertical line). This pattern repeats with "Burst 2", "Burst 3", and "Burst 4". An ellipsis (...) indicates that there are more bursts between "Burst 4" and "Burst N". The transmission starts at "Start" and ends at "12 Sec".

Radar Type	Pulse width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (m sec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

The diagram illustrates the measurement setup for the radar signal generator. It consists of the following components and connections:

- 50 Ohm Load**: Connected to the input of the first **Att. 30dB** attenuator.
- Att. 30dB**: A 30 dB attenuator connected in series with the 50 Ohm load.
- Splitter/Combiner**: A power splitter/combiner that splits the signal from the attenuator into two paths:
  - One path leads to the **Spectrum Analyzer**.
  - The other path leads to the input of the second **Splitter/Combiner**.
- Splitter/Combiner**: A second power splitter/combiner that splits the signal into two paths:
  - One path leads to the input of the third **Att. 30dB** attenuator.
  - The other path leads to the input of the **Att. 10dB** attenuator.
- Att. 30dB**: A 30 dB attenuator connected in series with the second splitter/combiner.
- 50 Ohm Load**: Connected to the output of the third attenuator.
- Att. 10dB**: A 10 dB attenuator connected in series with the second splitter/combiner.
- Radar Signal Generator**: Connected to the output of the 10 dB attenuator.



### 5.3.2 Technical requirement

#### a) Applicability of DFS Requirements

##### Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operation Mode		
	Master	Client without Radar Detection	Client with Radar Detection
Non-Occupancy Period	Yes	Not require	Yes
DFS Detection Threshold	Yes	Not require	Yes
Channel Availability Check Time	Yes	Not require	Not require
Uniform Spreading	Yes	Not require	Not require
U-NII Detection Bandwidth	Yes	Not require	Yes

##### Applicability of DFS requirements during normal operation

Requirement	Operation Mode		
	Master	Client without Radar Detection	Client with Radar Detection
DFS Detection Threshold	Yes	Not require	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not require	Yes

#### b) DFS Detection Thresholds and Response Requirement

##### DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value(See Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

##### DFS Response Requirement Values

Parameter	Value
Non- occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60milliseconds over remaining 10 second period. See Notes 1 and 2
U-NII Detection Bandwidth	Minimum 80% of the UNII99% transmission power bandwidth See Note 3

**Note 1:** The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short Pulse Radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated.
- For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform.

**Note 2:** The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Note 3:** During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.



## 6 General Information

### 6.1 Client Information

Applicant:	Icarsoft Technology Inc.
Address of Applicant:	1629 K St. Suite 300 N.W.Washington D.C., 20006 United States.
Manufacturer:	Icarsoft Technology Inc.
Address of Manufacturer:	1629 K St. Suite 300 N.W.Washington D.C., 20006 United States.
Factory:	Dongguan Yongdong Electronic Technology Co., Ltd
Address of Factory:	No. 10,4th Street, Zhangyang Fuzhu Industrial Zone,Zhangmutou town, Dongguan City

### 6.2 General Description of EUT

Product Name:	Car Diagnostic Tool
Model No.(EUT):	CR Eagle
Test Model No.:	CR Eagle
Trade Mark:	<b>iCarsoft</b>
Location for use:	indoor
EUT Supports Radios application:	5GHz: Wi-Fi: U-NII-1: 5.15-5.25GHz; U-NII-2A: 5.25-5.35GHz U-NII-3: 5.725-5.850GHz
Power Supply:	Li-ion battery: DC 3.8V 10000mAh, Charge by DC 5V for adapter
Firmware version:	iMsDiag DiagLib APP:V10.14 iMSDiag System APP:V10.19 System Version:V1.26
Hardware version:	F219 U1.1
TPC	<input type="checkbox"/> Supported. <input checked="" type="checkbox"/> Not supported.
Router FCC ID:	2AFIW-MT3000

### 6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250 MHz IEEE802.11n/ac(40M): 5150MHz ~5250 MHz IEEE802.11ac(80M): 5150MHz ~5250 MHz IEEE 802.11a/n/ac(20M): 5250MHz ~5350 MHz IEEE802.11n/ac(40M): 5250MHz ~5350 MHz IEEE802.11ac(80M): 5250MHz ~5350 MHz IEEE 802.11a/n/ac(20M): 5725MHz ~5850 MHz IEEE802.11n/ac(40M): 5725MHz ~5850 MHz IEEE802.11ac(80M): 5725MHz ~5850 MHz
Channel Numbers:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5250MHz ~5350 MHz/ 4 channel IEEE802.11n/ac(40M): 5250MHz ~5350 MHz/ 2 channel IEEE802.11ac(80M): 5250MHz ~5350 MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Operation Mode:	Slaver device without radar detection function
Type of Modulation:	OFDM
Sample Type:	Portable production
Test Power Grade:	Class 2
Test Software of EUT:	RF Test

Antenna Type:	FPC antenna
Antenna Gain:	4.02dBi@5GHz: Wi-Fi: U-NII-1, 3.26dBi@5GHz: Wi-Fi: U-NII-2A, 3.08dBi@5GHz: Wi-Fi: U-NII-3
Test Voltage:	AC 120V, 60Hz

Operation Frequency each of channel

For 802.11a/n/ac( 20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac( 20M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
52	5260MHz	56	5280MHz
60	5300MHz	64	5320MHz
For 802.11a/n/ac( 20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
54	5270MHz	62	5310MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5250MHz ~5350 MHz band			
Channel	Frequency	Channel	Frequency
58	5290MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

## 6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacturer	model	serial number	Supplied by	Certification
AE1	Phone	Apple	A1367	TTF20120027	CTI	FCC
AE2	Router	HuaWei	WS550	K8E8W15314002784	CTI	FCC

## 6.5 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 6.6 Test Facility

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 6.7 Deviation from Standards

None.

## 6.8 Abnormalities from Standard Conditions

None.

## 6.9 Other Information Requested by the Customer

None.

## 6.10 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$3 \times 10^{-8}$
2	RF power, conducted	0.86dB
3	Radiated Spurious emission test	5.12dB (Below 1GHz)
		4.6dB (Above 1GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.8°C
6	Humidity test	2.0%

7	DC power voltages	0.5%
---	-------------------	------

## 7 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Spectrum analyzer	R&S	FSU26	CQA-038	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Spectrum analyzer	R&S	FSV40	CQA-075	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	4012339	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Preamplifier	EMCI	EMC184055SE	CQA-089	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Antenna Connector	CQA	RFC-01	CQA-080	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Power Sensor	KEYSIGHT	U2021XA	CQA-30	2023/09/08 2024/09/02	2024/09/07 2025/09/01
N1918A Power Analysis Manager Power Panel	Agilent	N1918A	CQA-074	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2023/09/08 2024/09/02	2024/09/07 2025/09/01
EMI Test Receiver	R&S	ESR7	CQA-005	2023/09/08 2024/09/02	2024/09/07 2025/09/01
LISN	R&S	ENV216	CQA-003	2023/09/08 2024/09/02	2024/09/07 2025/09/01
Coaxial cable	CQA	N/A	CQA-C009	2023/09/08 2024/09/02	2024/09/07 2025/09/01
high-low temperature chamber	Auchno	OJN-9606	CQA-S003	2023/09/08 2024/09/02	2024/09/07 2025/09/01
DC power	KEYSIGHT	E3631A	CQA-028	2023/09/08 2024/09/02	2024/09/07 2025/09/01

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15E (2015)	Subpart C-Intentional Radiators
2	FCC Order, ET Docket No.03-122 (FCC 06-96)	Compliance Measurement Procedures for Unlicensed-National Information Infrastructure Devices Operating in the 5.25-5.35 GHz and 5.47-5.725 GHz Bands Incorporating Dynamic Frequency Selection

### Test Results List:

FCC Part15E	Test method	Test item	Operation Mode verdict	Note
			Client without Radar Detection	
47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iv)	FCC 06-96	Non-Occupancy Period	Not require	N/A
47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC 06-96	DFS Detection Threshold	Not require	N/A
47 CFR Part 15 Subpart E Section 15.407 (h)(2)(ii)	FCC 06-96	Channel Availability Check Time	Not require	N/A
47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC 06-96	U-NII Detection Bandwidth	Not require	N/A
47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iii)	FCC 06-96	Channel Closing Transmission Time	PASS	Appendix C
47 CFR Part 15 Subpart E Section 15.407 (h)(2)(iii)	FCC 06-96	Channel Move Time	PASS	Appendix C
47 CFR Part 15 Subpart E Section 15.407 (h)(2)	FCC 06-96	Uniform Spreading	Not require	N/A




## Appendix A)Radar Test Waveform Calibration


### 8.1 DFS Threshold Level:

<b>DFS Threshold Level</b>	
DFS Threshold level: -62 dBm	<input checked="" type="checkbox"/> at the antenna connector
	<input type="checkbox"/> in front of the antenna
The Interference <b>Radar Detection Threshold Level</b> is -62dBm. That had been taken into account the output power range and antenna gain.	

### 8.2 Test Set up: Setup for Client with injection at the Master

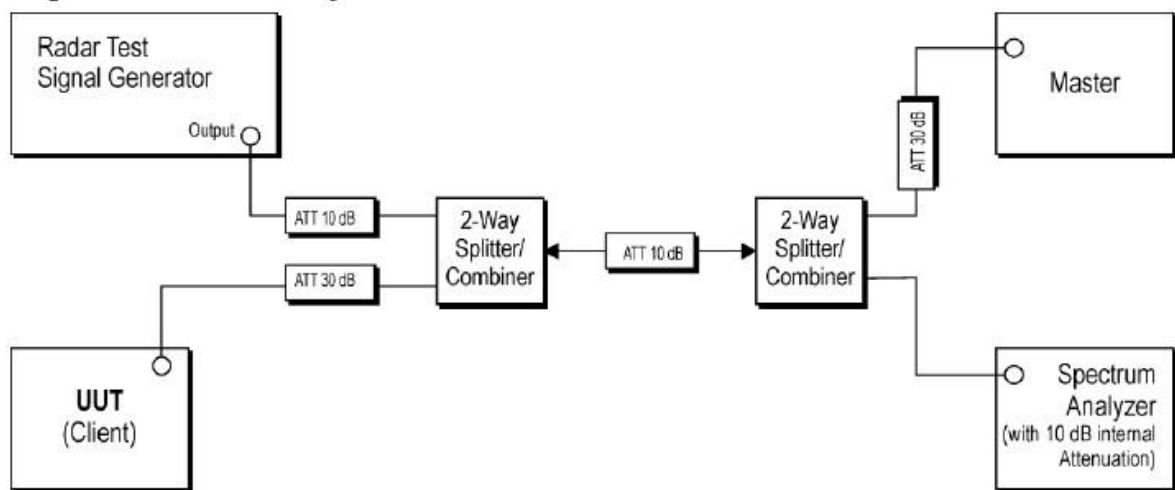


### 8.3 Test Result

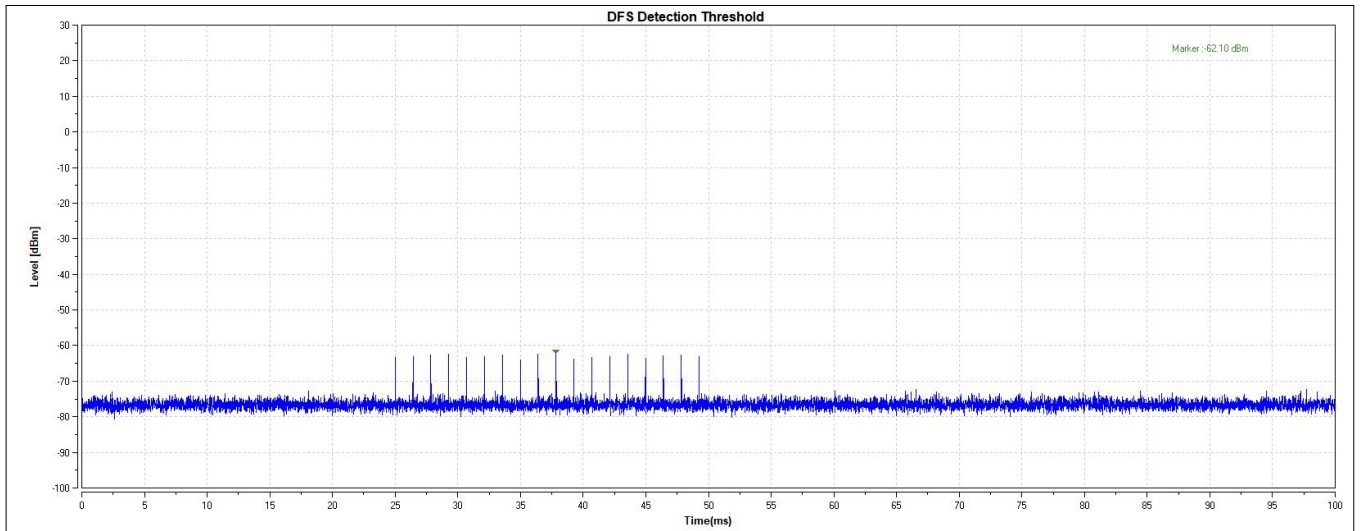

**Appendix B)Channel Loading**  
**9.1 Test Result**

Modulation Mode	Frequency[MHz]	Result	Limit [%]	Verdict
VHT80	5290	58.65	17	PASS

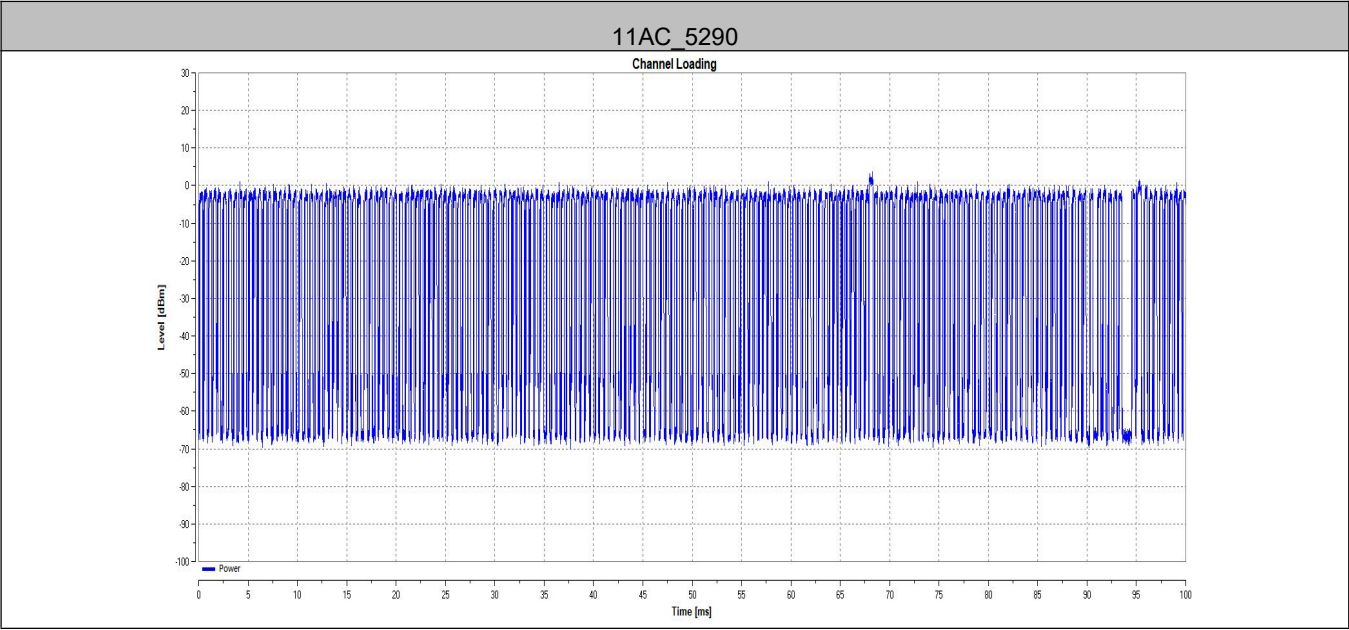


## Appendix C)Channel Closing Transmission and Channel Move Time

### 10.1 Monitoring of operating channel Limit

Monitoring of operating channel Limit	
Channel Move Time	10 sec
Channel Closing Transmission Time	260 ms

### 10.2 Test Result of Channel Closing Transmission and Channel Move Time

Modulation Mode	Freq. (MHz)	Radar Type	Channel Closing Transmission Time		Channel Move Time	
			Test	Limit	Test	Limit
VHT80	5290	Radar Type 0	20ms	260ms	0.6013s	10s

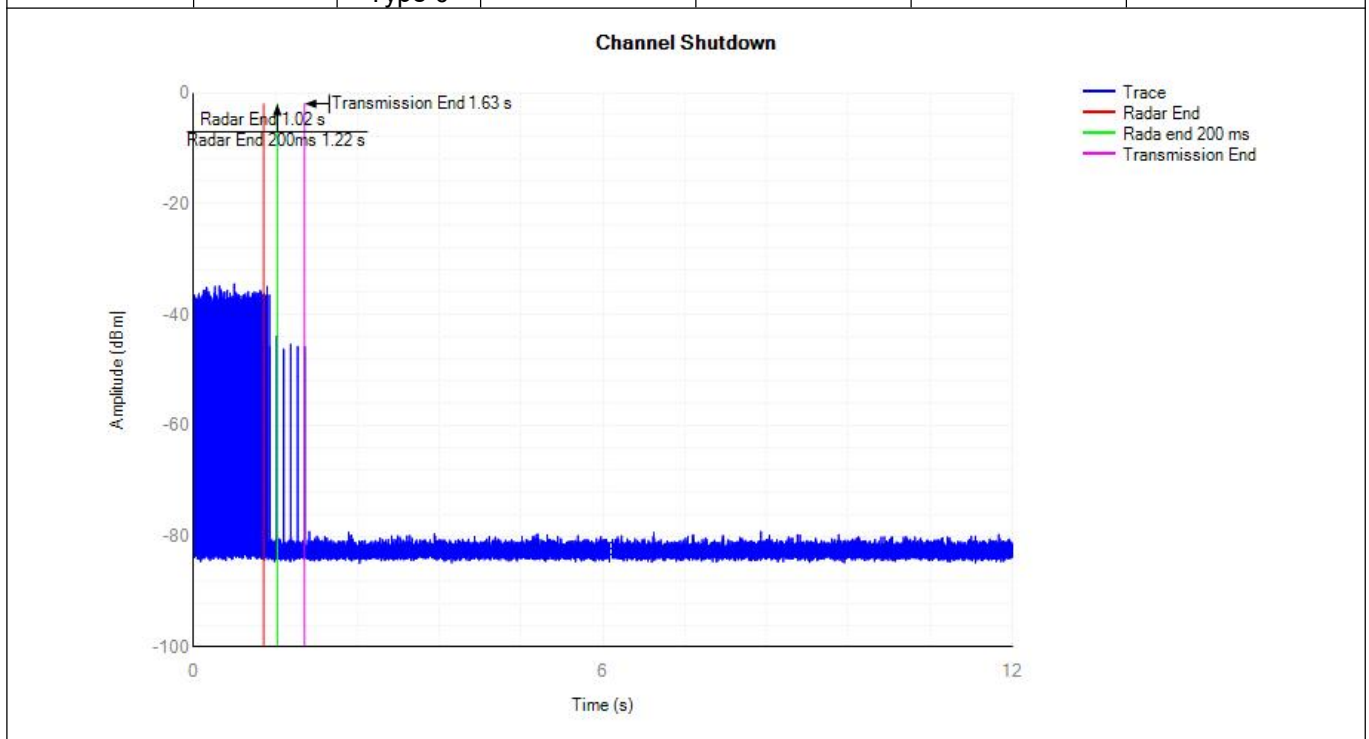

### **PHOTOGRAPHS OF EUT Constructional Details**

Refer to Report No.CQASZ20240801757E-01 for EUT external and internal photos.

\*\*\* END OF REPORT \*\*\*