

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
Brand name	WLAN(1T1R) AC and BT 4.2 Combo Dongle
Product name	CC&C
Model No.	CL-8821CU-V2
Test Result	Pass
Statements of Conformity	Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.


The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Approved by:

Tested by:



Kevin Tsai
Deputy Manager



Dally Hong
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T190315W01-RP3

Page: 2 / 86

Rev.: 01

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	July 18, 2019	Initial Issue	ALL	May Lin
01	July 24, 2019	See the following Note Rev. (01)	P.9, P.65	May Lin

Rev (01):

- 1. Revised the support and EUT accessories equipment and test result.*
- 2. Revised the instrument calibration.*



Report No.: T190315W01-RP3

Page: 3 / 86

Rev.: 01

Table of contents

1.	GENERAL INFORMATION.....	4
1.1	EUT INFORMATION.....	4
1.2	EUT CHANNEL INFORMATION.....	5
1.3	ANTENNA INFORMATION.....	5
1.4	MEASUREMENT UNCERTAINTY	6
1.5	FACILITIES AND TEST LOCATION.....	7
1.6	INSTRUMENT CALIBRATION	8
1.7	SUPPORT AND EUT ACCESSORIES EQUIPMENT	9
1.8	TEST METHODOLOGY AND APPLIED STANDARDS.....	9
2.	TEST SUMMERY.....	10
3.	DESCRIPTION OF TEST MODES.....	11
3.1	THE WORST MODE OF OPERATING CONDITION	11
3.2	THE WORST MODE OF MEASUREMENT.....	12
4.	EUT DUTY CYCLE	13
5.	TEST RESULT.....	14
5.1	AC POWER LINE CONDUCTED EMISSION.....	14
5.2	6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)	17
5.3	OUTPUT POWER MEASUREMENT	27
5.4	POWER SPECTRAL DENSITY	30
5.5	CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	36
5.6	RADIATION BANDEDGE AND SPURIOUS EMISSION.....	49
	APPENDIX-A TEST PHOTO.....	A-1
	APPENDIX 1 - PHOTOGRAPHS OF EUT	



Report No.: T190315W01-RP3

Page: 4 / 86

Rev.: 01

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	CC&C Technologies, Inc. 8F, No. 150, Jian Yi Road, Zhonghe District, New Taipei City, Taiwan 235		
Manufacturer	Kunshan CC&C Technologies, Co., Ltd No.9 building,3rd Main Street, Kunshan Free Trade Zone, Jiangsu Province, P.R.China		
Equipment	WLAN(1T1R) AC and BT 4.2 Combo Dongle		
Model Name	CL-8821CU-V2		
Model Discrepancy	N/A		
Trade Name	CC&C		
Received Date	March 15, 2019		
Date of Test	May 11 ~ July 15, 2019		
Output Power(W)	Mode	Output Power (W)	
	IEEE 802.11b Mode	0.3899	
	IEEE 802.11g Mode	0.3936	
	IEEE 802.11n HT20 Mode	0.4217	
	IEEE 802.11n HT40 Mode	0.3963	
Power Supply	Power from host device.		

1.2 EUT CHANNEL INFORMATION

Frequency Range	802.11b/g/n HT20: 2412MHz ~ 2462MHz 802.11n HT40: 2422MHz ~ 2452MHz
Modulation Type	1. IEEE 802.11b Mode: DSSS(DBPSK/DQPSK/CCK) 2. IEEE 802.11g Mode: OFDM (BPSK/QPSK/16QAM/64QAM) 3. IEEE 802.11n HT20 Mode : OFDM (BPSK/QPSK/16QAM/64QAM) 4. IEEE 802.11n HT40 Mode : OFDM (BPSK/QPSK/16QAM/64QAM)
Number of channels	1. IEEE 802.11b Mode: 11 Channels 2. IEEE 802.11g Mode: 11 Channels 3. IEEE 802.11n HT20 Mode : 11 Channels 4. IEEE 802.11n HT40 Mode : 7 Channels

Remark:

Refer as ANSI C63.10: 2013 clause 5.6.1 Table 4 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☒ PIFA ☐ PCB ☐ Dipole ☐ Coils
Antenna Gain	Gain: 4.15 dBi
Antenna Connector	N/A



Report No.: T190315W01-RP3

Page: 6 / 86

Rev.: 01

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.



Report No.: T190315W01-RP3

Page: 7 / 86

Rev.: 01

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Dally Hong	-
Radiation	Dally Hong	-
RF Conducted	Dally Hong	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/28/2019	06/27/2020
Power Meter	Anritsu	ML2495A	1149001	02/12/2019	02/11/2020
Power Seneor	Anritsu	MA2491A	030982	02/12/2019	02/11/2020
Signal Analyzer	R&S	FSV 40	101073	09/27/2018	09/26/2019
Software	N/A				
3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/29/2019	05/28/2020
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				
AC line Conduction Test Room					
Equipment	Manufacturer	Model	S/N	Cal Date	Cal Due
CABLE	EMCI	CFD300-NL	CERF	06/27/2019	06/26/2020
EMI Test Receiver	R&S	ESCI	100064	07/24/2018	07/23/2019
LISN	SCHWARZBECK	NSLK 8127	8127-541	01/31/2019	01/30/2020
LISN	SCHAFFNER	NNB 41	03/10013	02/13/2019	02/12/2020
Software	EZ-EMC(CCS-3A1-CE)				

Remark: Each piece of equipment is scheduled for calibration once a year.



Report No.: T190315W01-RP3

Page: 9 / 86

Rev.: 01

For Below 1GHz test data in section 5.6:

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/26/2019	02/25/2020
Bilog Antenna	Sunol Sciences	JB3	A030105	07/13/2018	07/12/2019
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	02/26/2019	02/25/2020
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/26/2019	02/25/2020
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/30/2019	01/29/2020
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/20/2018	08/19/2019
Loop Ant	COM-POWER	AL-130	121051	03/22/2019	03/21/2020
Pre-Amplifier	EMEC	EM330	060609	02/26/2019	02/25/2020
Pre-Amplifier	HP	8449B	3008A00965	02/26/2019	02/25/2020
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	05/30/2018	05/29/2019
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	NB(G)	Lenovo	IBM 1951	N/A	CJ6UPA3489WL

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01.



Report No.: T190315W01-RP3

Page: 10 / 86

Rev.: 01

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.3	Antenna Requirement	Pass
15.207(a)	5.1	AC Conducted Emission	Pass
15.247(a)(2)	5.2	6 dB Bandwidth	Pass
2.1049	5.2	Occupied Bandwidth (99%)	Pass
15.247(b)(3)	5.3	Output Power Measurement	Pass
15.247(e)	5.4	Power Spectral Density	Pass
15.247(d)	5.5	Conducted Band Edge	Pass
15.247(d)	5.5	Conducted Spurious Emission	Pass
15.247(d)	5.6	Radiation Band Edge	Pass
15.247(d)	5.6	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	IEEE 802.11b Mode: 1Mbps IEEE 802.11g Mode: 6Mbps IEEE 802.11n HT20 Mode: MCS0 IEEE 802.11n HT40 Mode: MCS0
Test Channel Frequencies	IEEE 802.11b Mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11g Mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11n HT20 Mode : 1. Lowest Channel : 2412MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2462MHz IEEE 802.11n HT40 Mode : 1. Lowest Channel : 2422MHz 2. Middle Channel : 2437MHz 3. Highest Channel : 2452MHz
Operation Transmitter	IEEE 802.11b Mode :1T1R IEEE 802.11g Mode : 1T1R IEEE 802.11n HT20 Mode : 1T1R IEEE 802.11n HT40 Mode : 1T1R

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Power supply Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Power supply Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☒ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☐ Horizontal ☒ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1:EUT power by host system.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(X-Plane and Vertical) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

4. EUT DUTY CYCLE

Duty Cycle			
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)
802.11b	1.0000	1.0000	100.00%
802.11g	1.0000	1.0000	100.00%
802.11n HT20	1.0000	1.0000	100.00%
802.11n HT40	1.0000	1.0000	100.00%

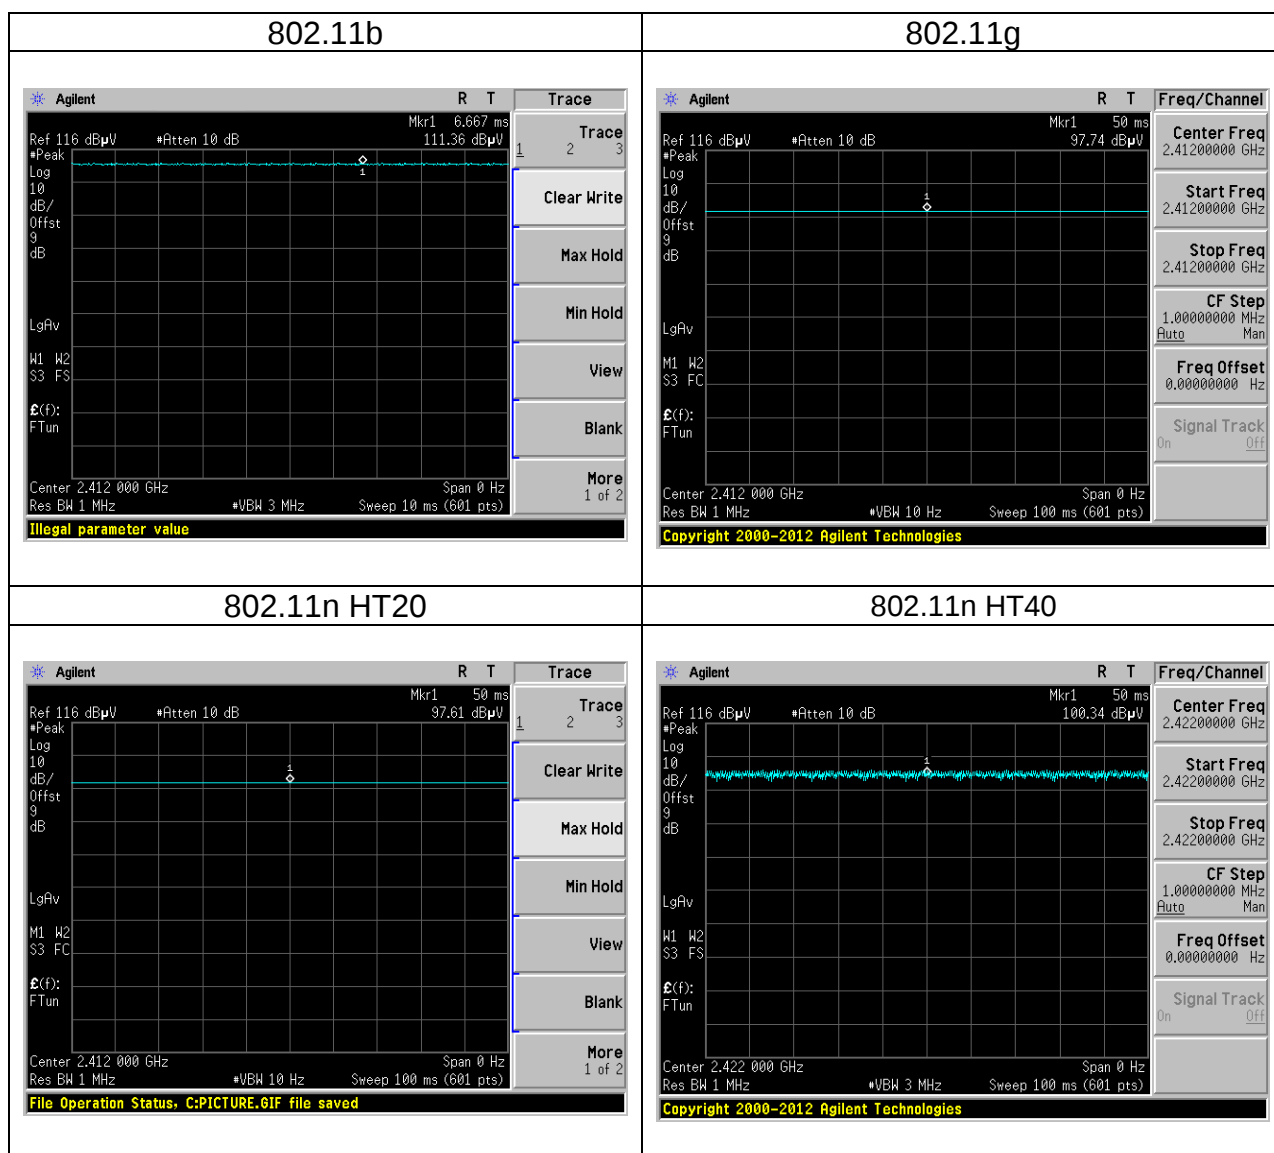

5. TEST RESULT

5.1 AC POWER LINE CONDUCTED EMISSION

5.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

5.1.2 Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

5.1.3 Test Setup

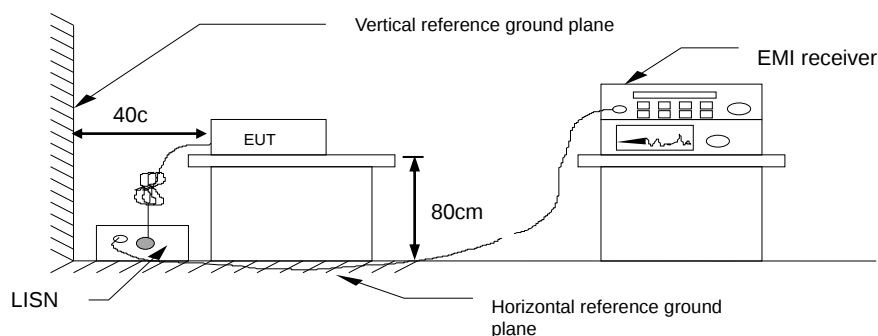


5.1.4 Test Result

Pass.


Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C) / 50%RH
Phase:	Line	Test Date	July 09, 2019
		Test Engineer	Dally Hong

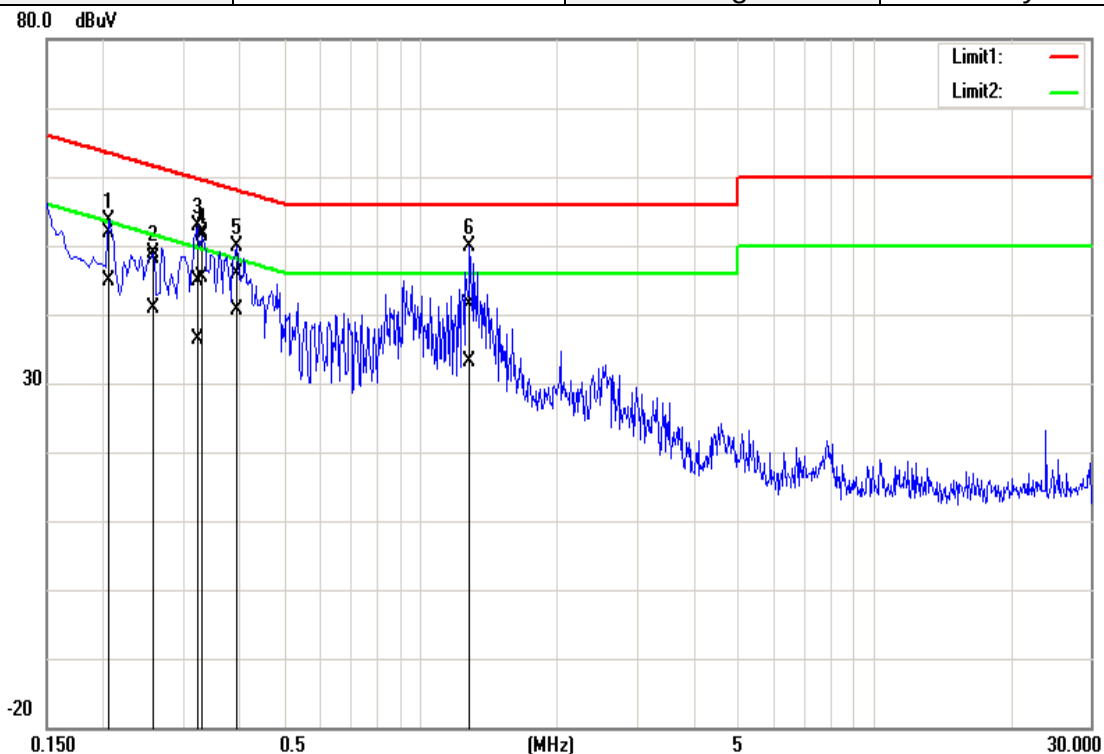

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.2060	41.63	34.74	10.13	51.76	44.87	63.36	53.37	-11.60	-8.50	Pass
0.2580	37.93	30.75	10.13	48.06	40.88	61.49	51.50	-13.43	-10.62	Pass
0.3220	34.79	26.18	10.14	44.93	36.32	59.65	49.66	-14.72	-13.34	Pass
0.3300	41.85	35.23	10.14	51.99	45.37	59.45	49.45	-7.46	-4.08	Pass
0.3940	35.84	30.47	10.14	45.98	40.61	57.98	47.98	-12.00	-7.37	Pass
1.2860	31.23	23.05	10.17	41.40	33.22	56.00	46.00	-14.60	-12.78	Pass

Test Mode:	Mode 1	Temp/Hum	24(°C) / 50%RH
Phase:	Neutral	Test Date	July 09, 2019
		Test Engineer	Dally Hong

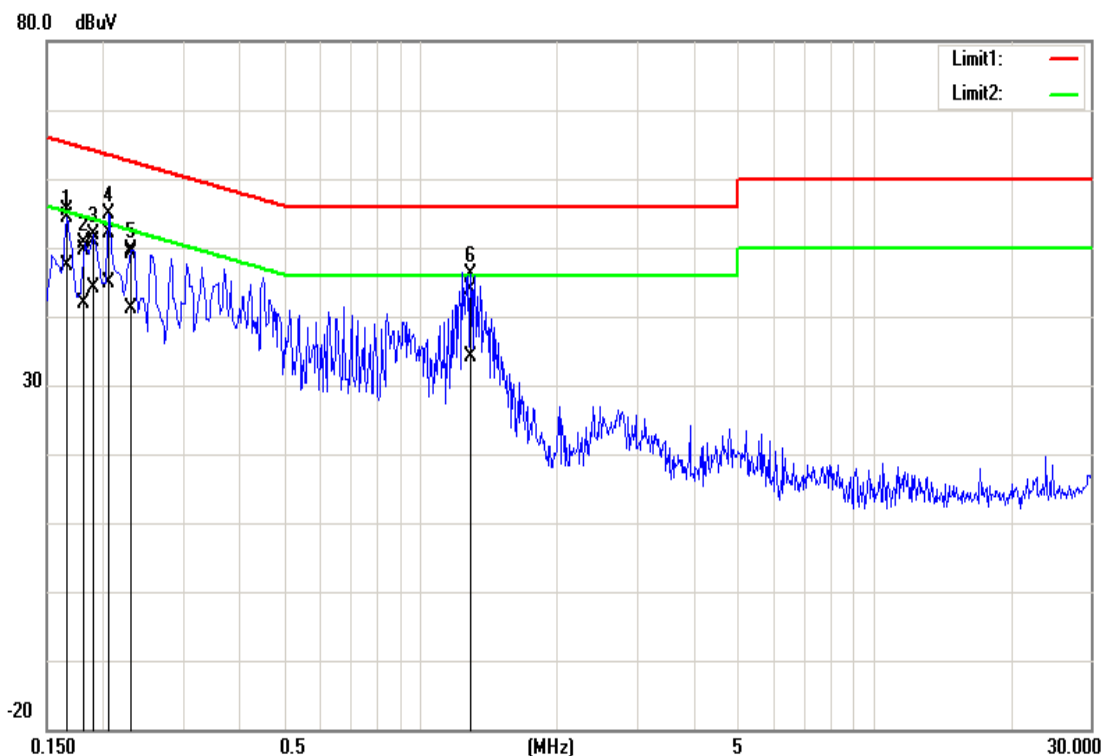

Frequency (MHz)	Quasi Peak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	Quasi Peak result (dBuV)	Average result (dBuV)	Quasi Peak limit (dBuV)	Average limit (dBuV)	Quasi Peak margin (dB)	Average margin (dB)	Remark
0.1660	45.39	37.30	10.02	55.41	47.32	65.15	55.16	-9.74	-7.84	Pass
0.1820	39.57	31.74	10.02	49.59	41.76	64.39	54.39	-14.80	-12.63	Pass
0.1900	40.95	34.10	10.02	50.97	44.12	64.03	54.04	-13.06	-9.92	Pass
0.2060	42.00	34.80	10.02	52.02	44.82	63.36	53.37	-11.34	-8.55	Pass
0.2300	39.18	31.18	10.02	49.20	41.20	62.45	52.45	-13.25	-11.25	Pass
1.2860	33.85	23.99	10.04	43.89	34.03	56.00	46.00	-12.11	-11.97	Pass

5.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH(99%)

5.2.1 Test Limit

According to §15.247(a)(2),

6 dB Bandwidth :

Limit	Shall be at least 500kHz
-------	--------------------------


Occupied Bandwidth(99%) : For reporting purposes only.

5.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI C63.10: 2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100KHz , VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

5.2.3 Test Setup



5.2.4 Test Result

Test mode: IEEE 802.11b Mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW(99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	15.5426	10.1304	≥500
Mid	2437	15.4124	10.087	
High	2462	15.3690	10.1304	

Test mode: IEEE 802.11g Mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW(99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	16.8017	16.5652	≥500
Mid	2437	16.8017	16.5652	
High	2462	16.8885	16.5652	

Test mode: IEEE 802.11n HT20 Mode / 2412-2462 MHz				
Channel	Frequency (MHz)	OBW(99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2412	18.0173	17.6957	≥500
Mid	2437	17.9739	17.7391	
High	2462	17.9305	17.7391	


Test mode: IEEE 802.11n HT40 Mode / 2422-2452 MHz				
Channel	Frequency (MHz)	OBW(99%) (MHz)	6dB BW (MHz)	6dB limit (kHz)
Low	2422	37.2793	36.522	≥500
Mid	2437	37.1635	36.522	
High	2452	37.2793	36.406	



Report No.: T190315W01-RP3

Test Data

6dB BANDWIDTH

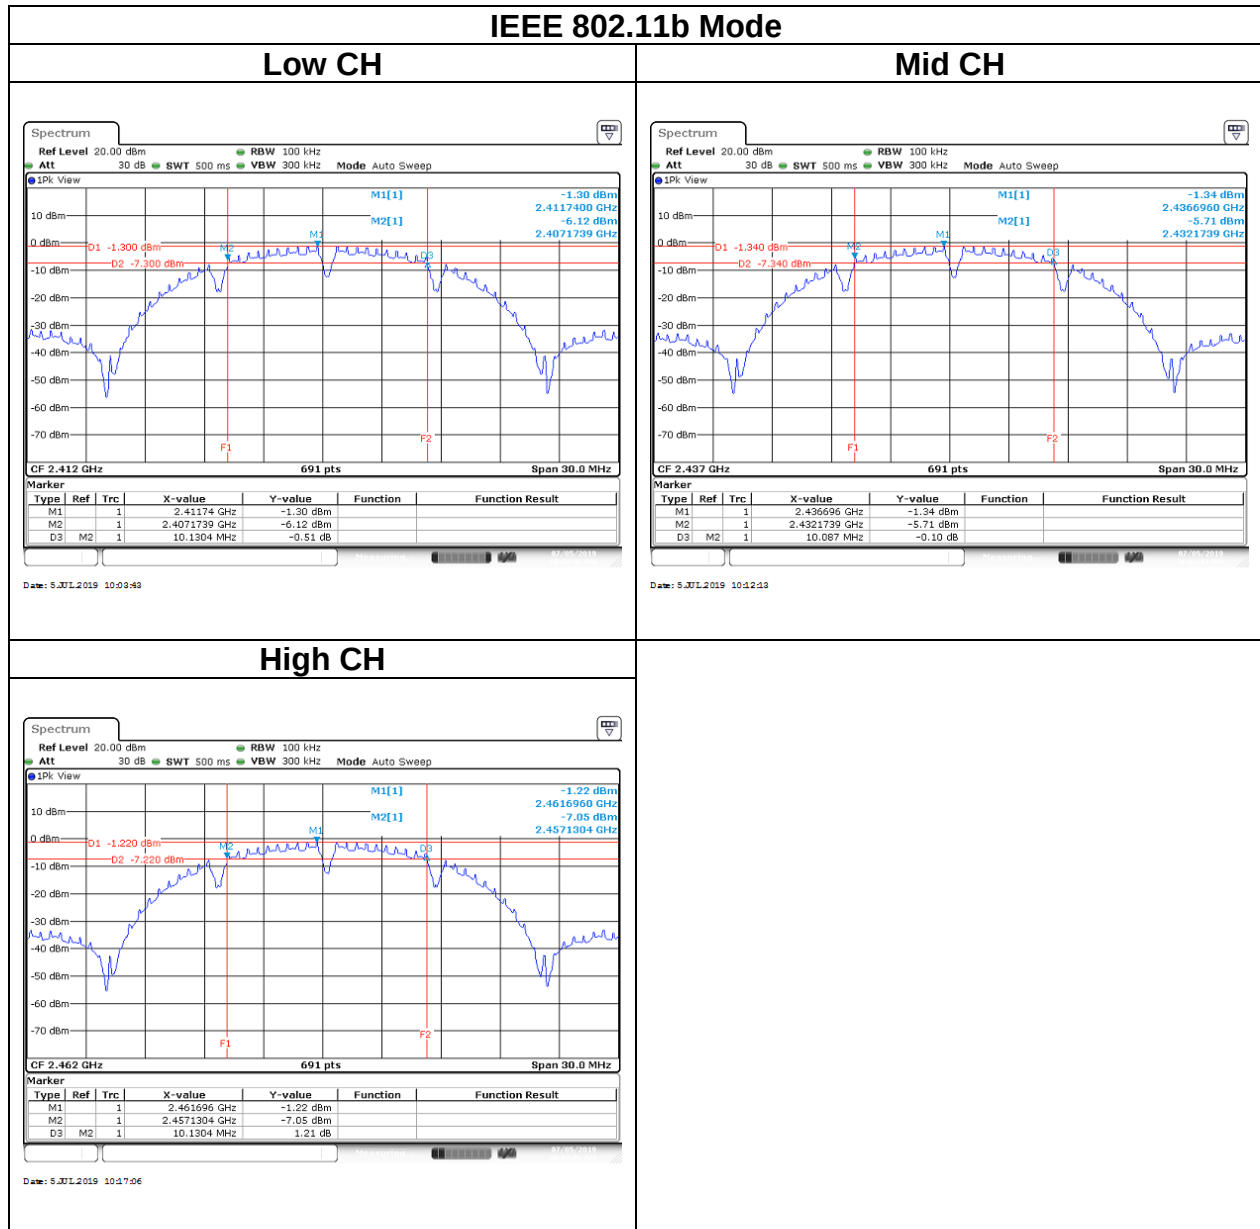




Report No.: T190315W01-RP3

Page: 20 / 86


Rev.: 01

IEEE 802.11g Mode


Low CH

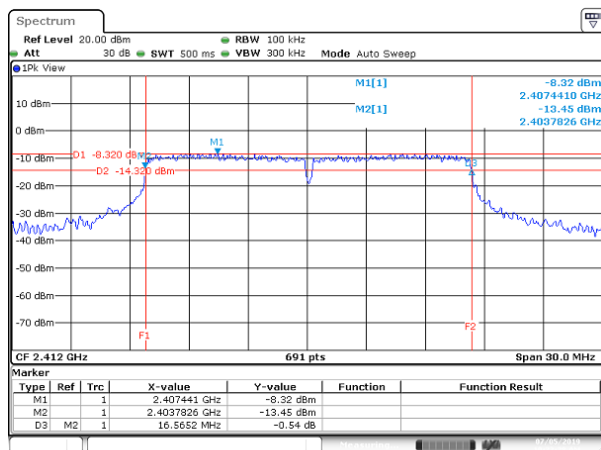

Mid CH

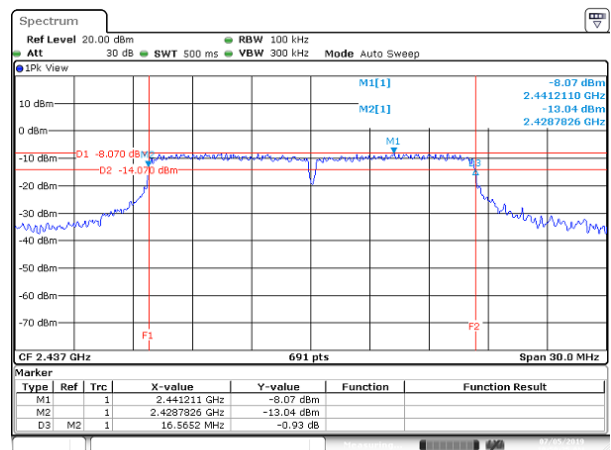


High CH

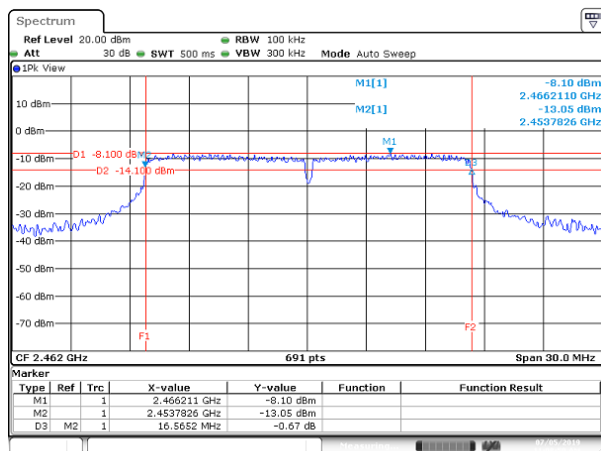


IEEE 802.11n HT20 Mode

Low CH

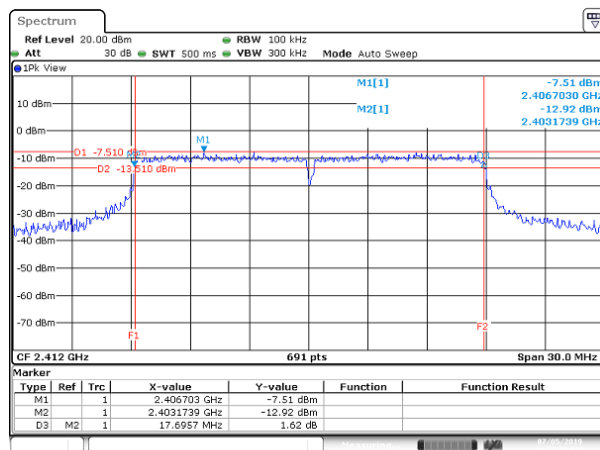


Date: 5 JUL 2019 11:22:20

Mid CH

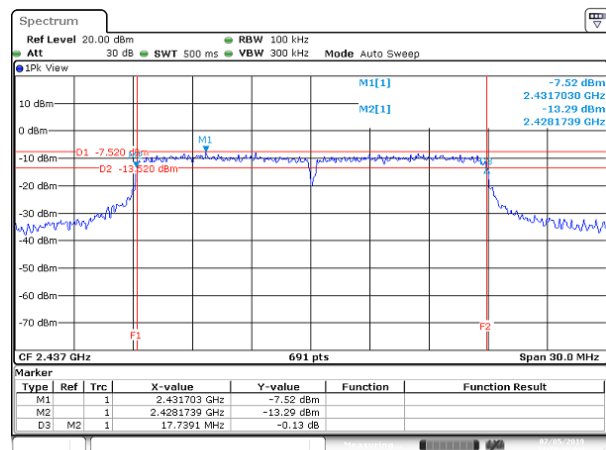


Date: 5 JUL 2019 11:29:10

High CH

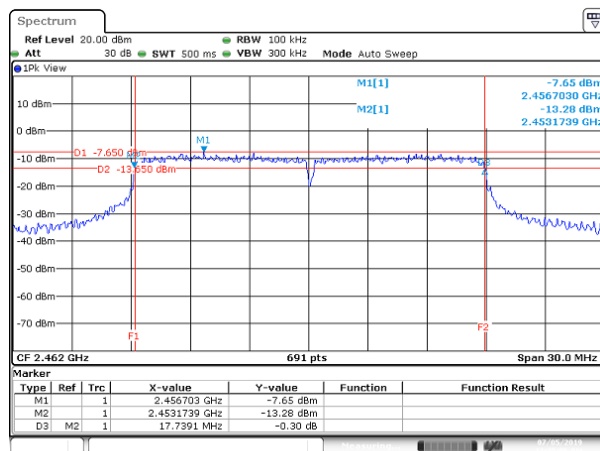


Date: 5 JUL 2019 11:35:06

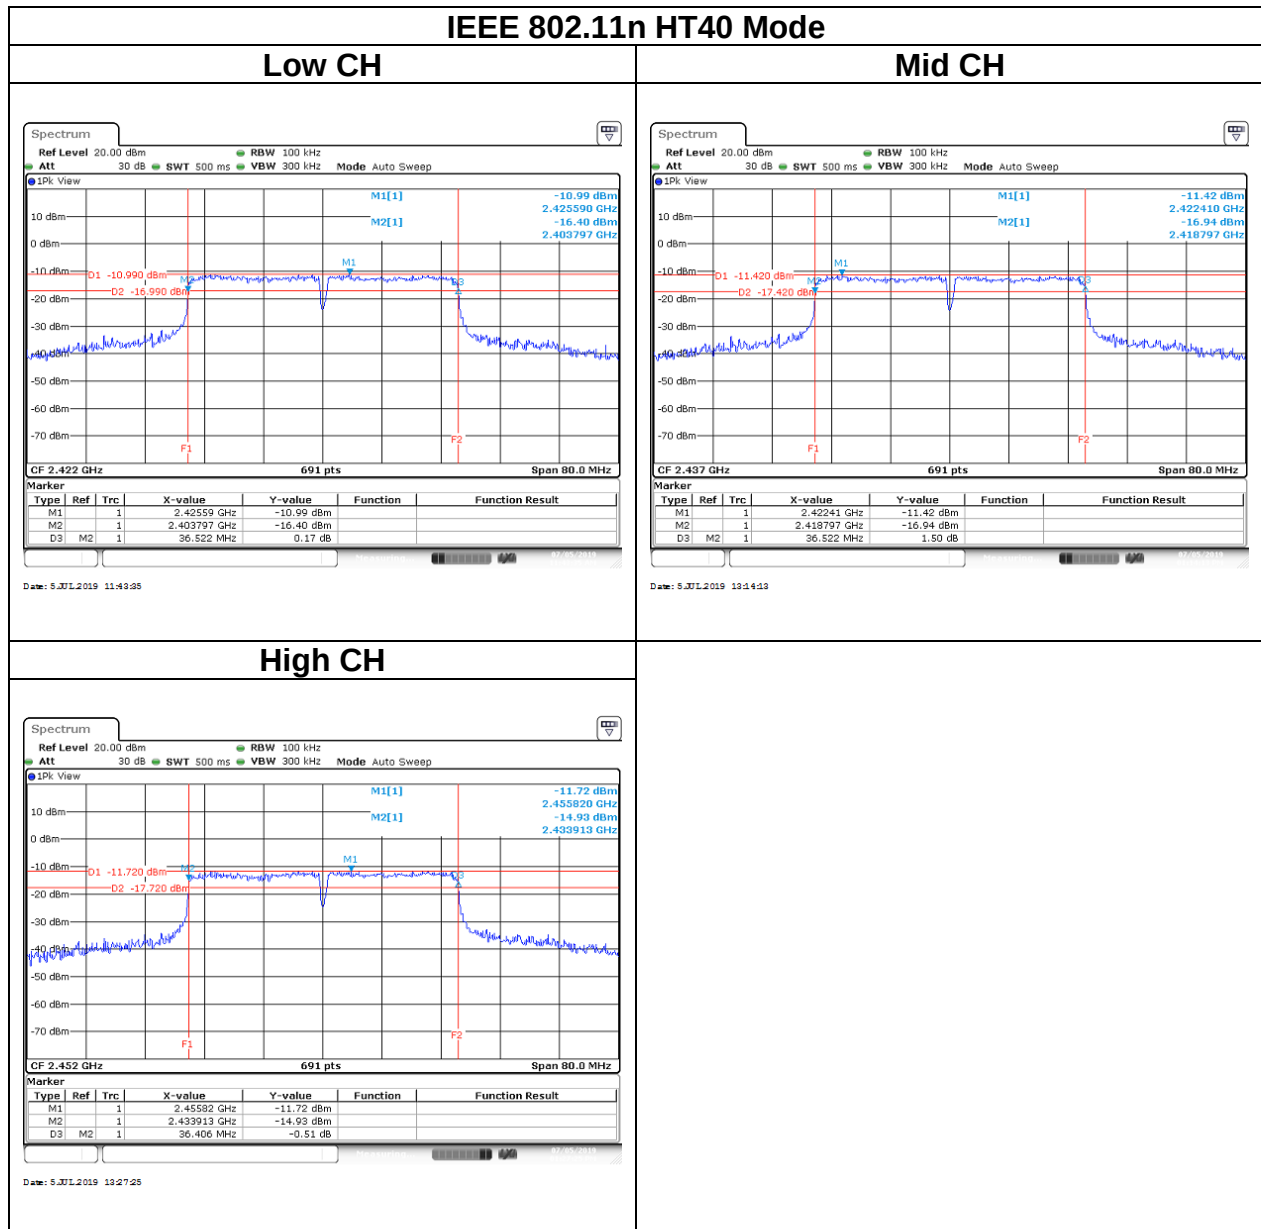

Report No.: T190315W01-RP3

Test Data

BANDWIDTH (99%)

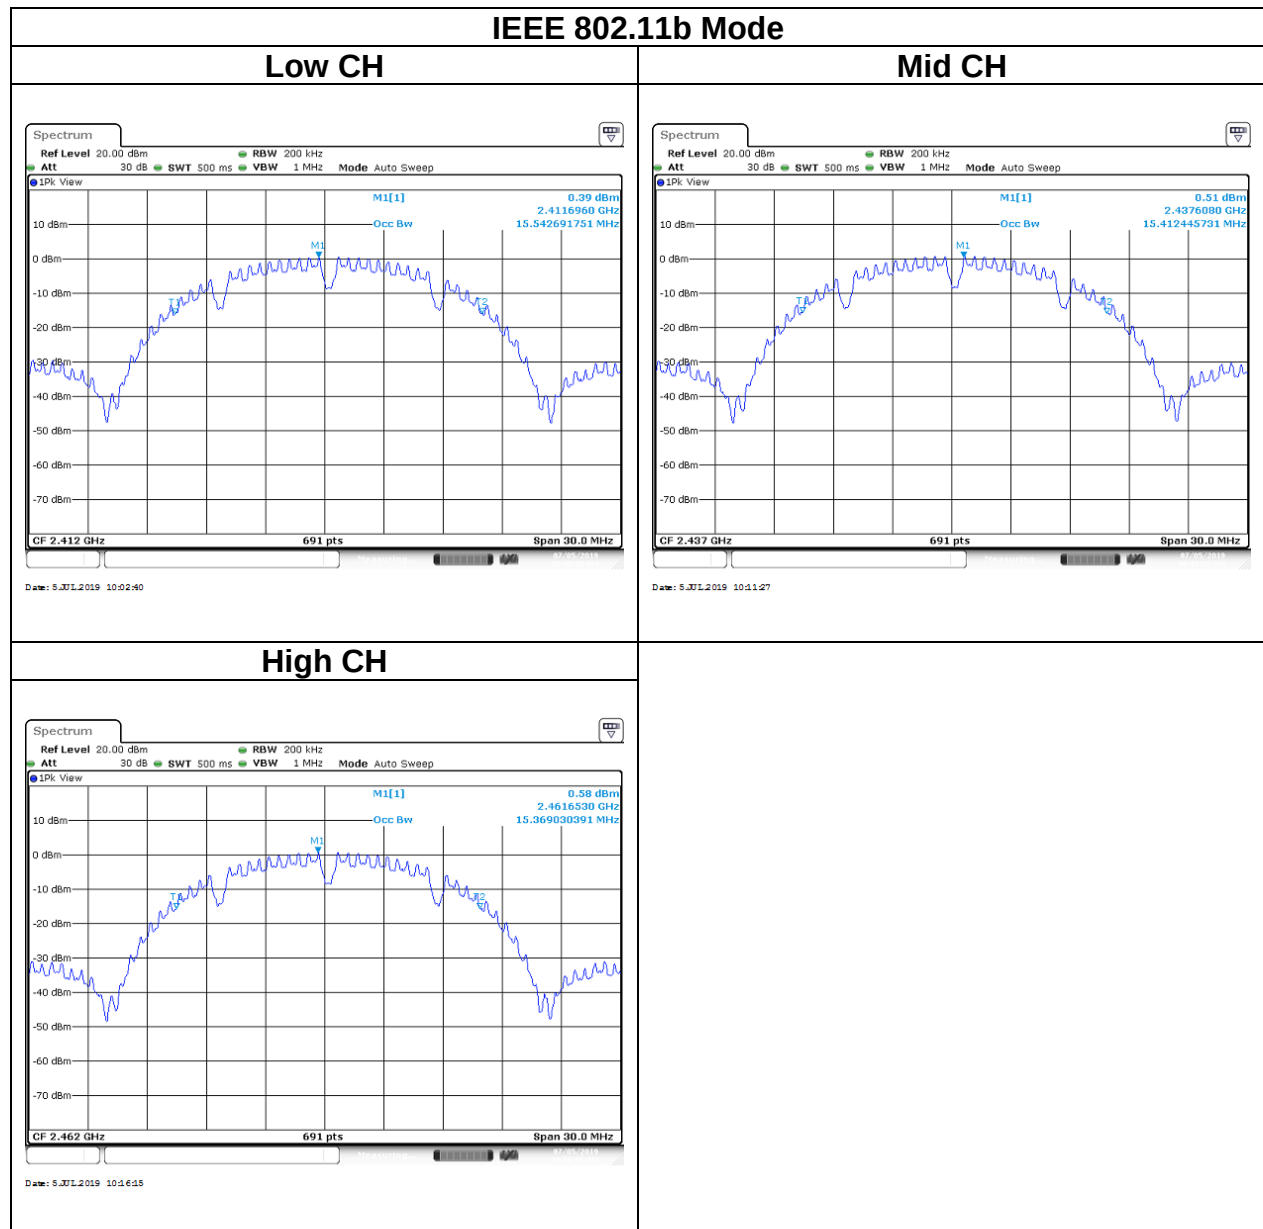





Report No.: T190315W01-RP3

Page: 25 / 86

Rev.: 01

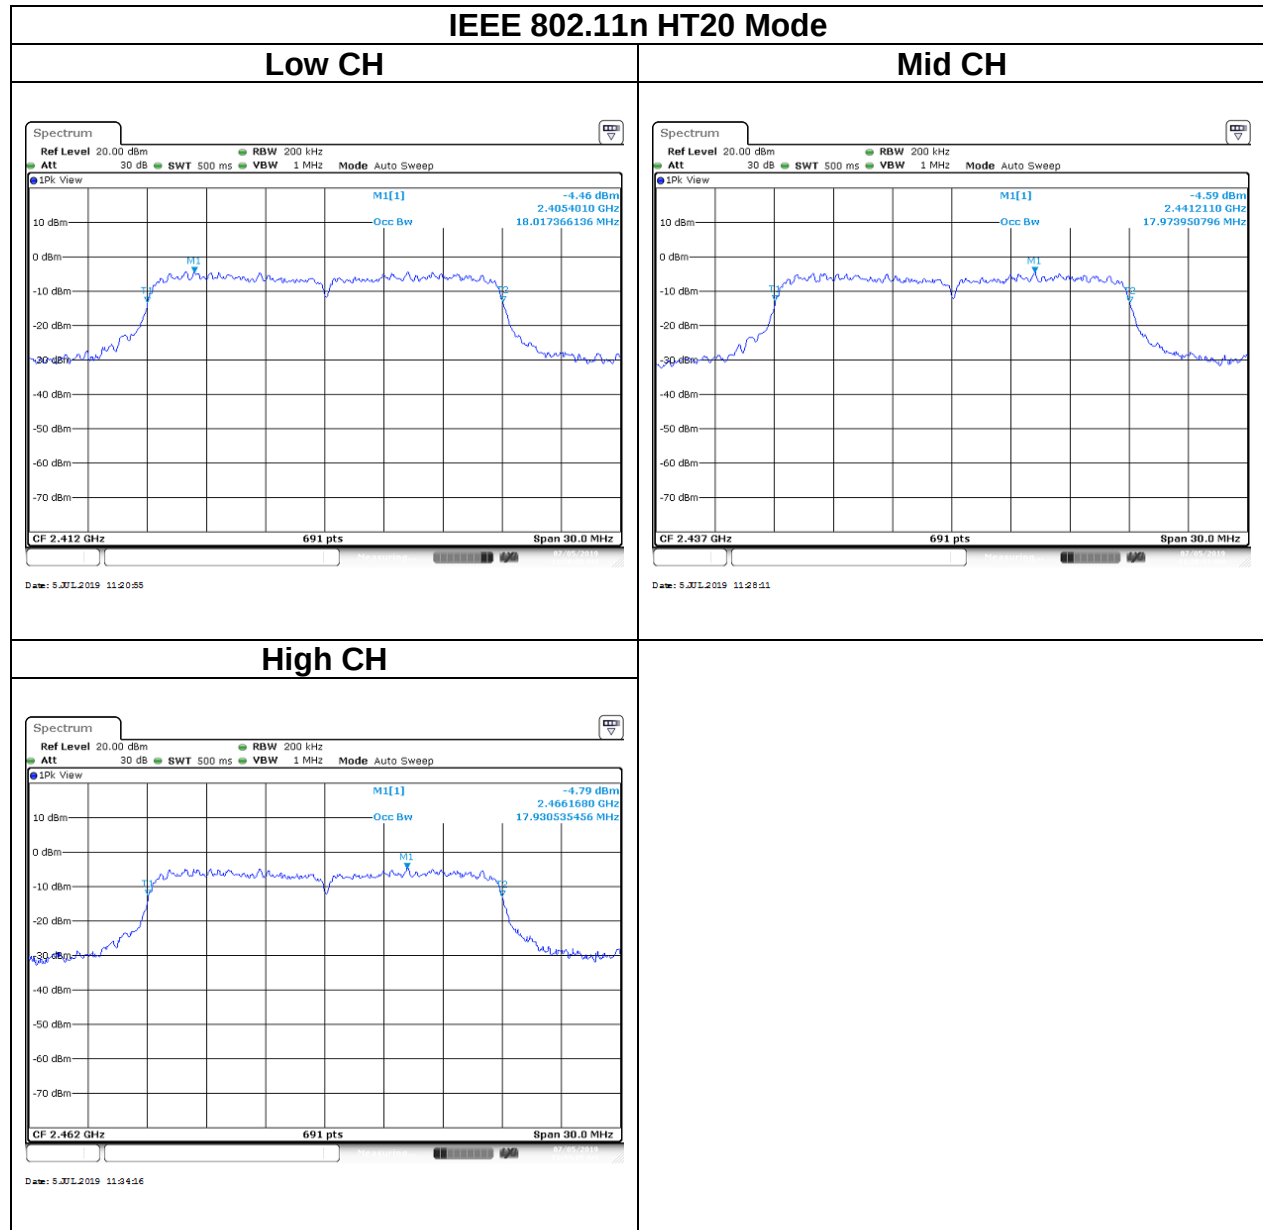

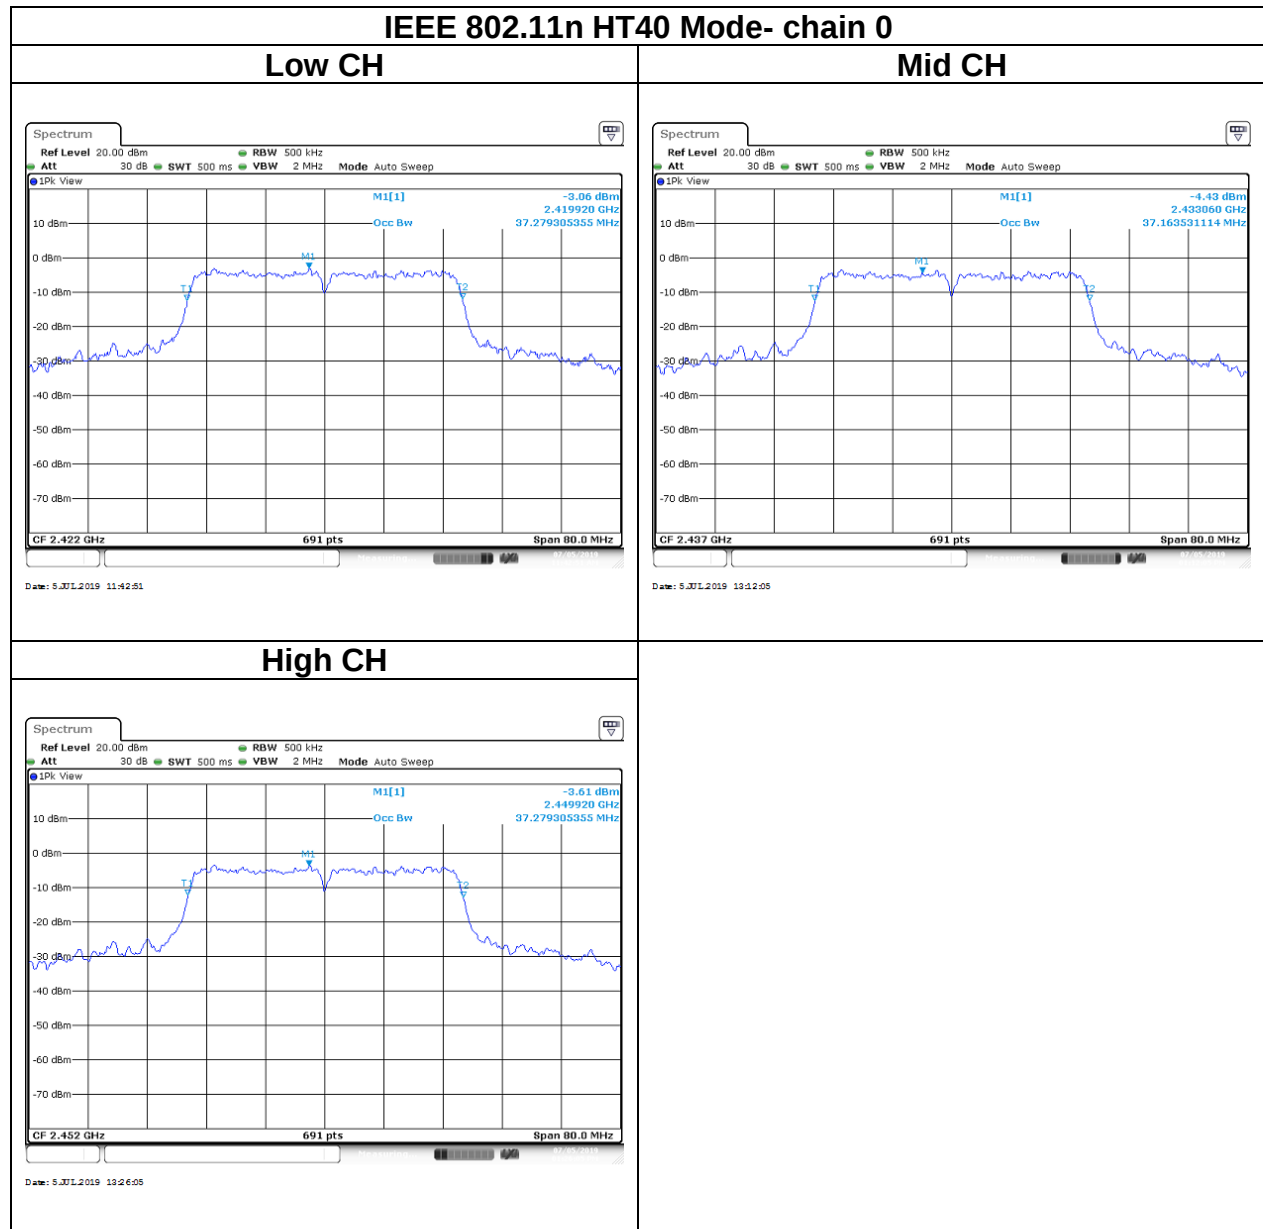

5.3 OUTPUT POWER MEASUREMENT

5.3.1 Test Limit

According to §15.247(b)(3),

Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi. If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Limit	☒ Antenna not exceed 6 dBi : 30dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 30 – (DG – 6)] ☐ Point-to-point operation :
-------	---


Average output power : For reporting purposes only.

5.3.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

5.3.3 Test Setup





Report No.: T190315W01-RP3

Page: 28 / 86

Rev.: 01

5.3.4 Test Result

Peak output power :

Wifi 2.4G						
Config	CH	Freq. (MHz)	power set	PK Power (dBm)	PK Total Power (W)	Limit (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	63	24.50	0.2818	30
	Mid	2437	63	24.44	0.2780	
	High	2462	63	25.91	0.3899	
IEEE 802.11g Data rate: 6Mbps	Low	2412	63	25.95	0.3936	
	Mid	2437	63	25.76	0.3767	
	High	2462	63	25.87	0.3864	
IEEE 802.11n 20MHz Data rate: MCS0	Low	2412	63	25.91	0.3899	
	Mid	2437	63	25.64	0.3664	
	High	2462	63	26.25	0.4217	
IEEE 802.11n 40MHz Data rate: MCS0	Low	2422	63	25.80	0.3802	
	Mid	2437	63	25.52	0.3565	
	High	2452	63	25.98	0.3963	



Report No.: T190315W01-RP3

Average output power :

Wifi 2.4G				
Config	CH	Freq. (MHz)	Power Setting	AV Power (dBm)
IEEE 802.11b Data rate: 1Mbps	Low	2412	63	22.75
	Mid	2437	63	22.58
	High	2462	63	24.22
IEEE 802.11g Data rate: 6Mbps	Low	2412	63	20.67
	Mid	2437	63	20.25
	High	2462	63	20.04
IEEE 802.11n 20MHz Data rate: MCS0	Low	2412	63	20.80
	Mid	2437	63	20.20
	High	2462	63	20.95
IEEE 802.11n 40MHz Data rate: MCS0	Low	2422	63	20.74
	Mid	2437	63	20.18
	High	2452	63	20.65

5.4 POWER SPECTRAL DENSITY

5.4.1 Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Limit	☒ Antenna not exceed 6 dBi : 8dBm ☐ Antenna with DG greater than 6 dBi : [Limit = 8 – (DG – 6)] ☐ Point-to-point operation :
-------	---

5.4.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss was compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

5.4.3 Test Setup



5.4.4 Test Result

Test mode: IEEE 802.11b Mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-9.92	8
Mid	2437	-10.14	
High	2462	-10	


Test mode: IEEE 802.11g Mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-11.01	8
Mid	2437	-11.15	
High	2462	-10.78	

Test mode: IEEE 802.11n HT20 Mode / 2412-2462 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2412	-10.06	8
Mid	2437	-10.99	
High	2462	-10.03	

Test mode: IEEE 802.11n HT40 Mode / 2422-2452 MHz			
Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)
Low	2422	-10.86	8
Mid	2437	-11.61	
High	2452	-11.59	



Report No.: T190315W01-RP3

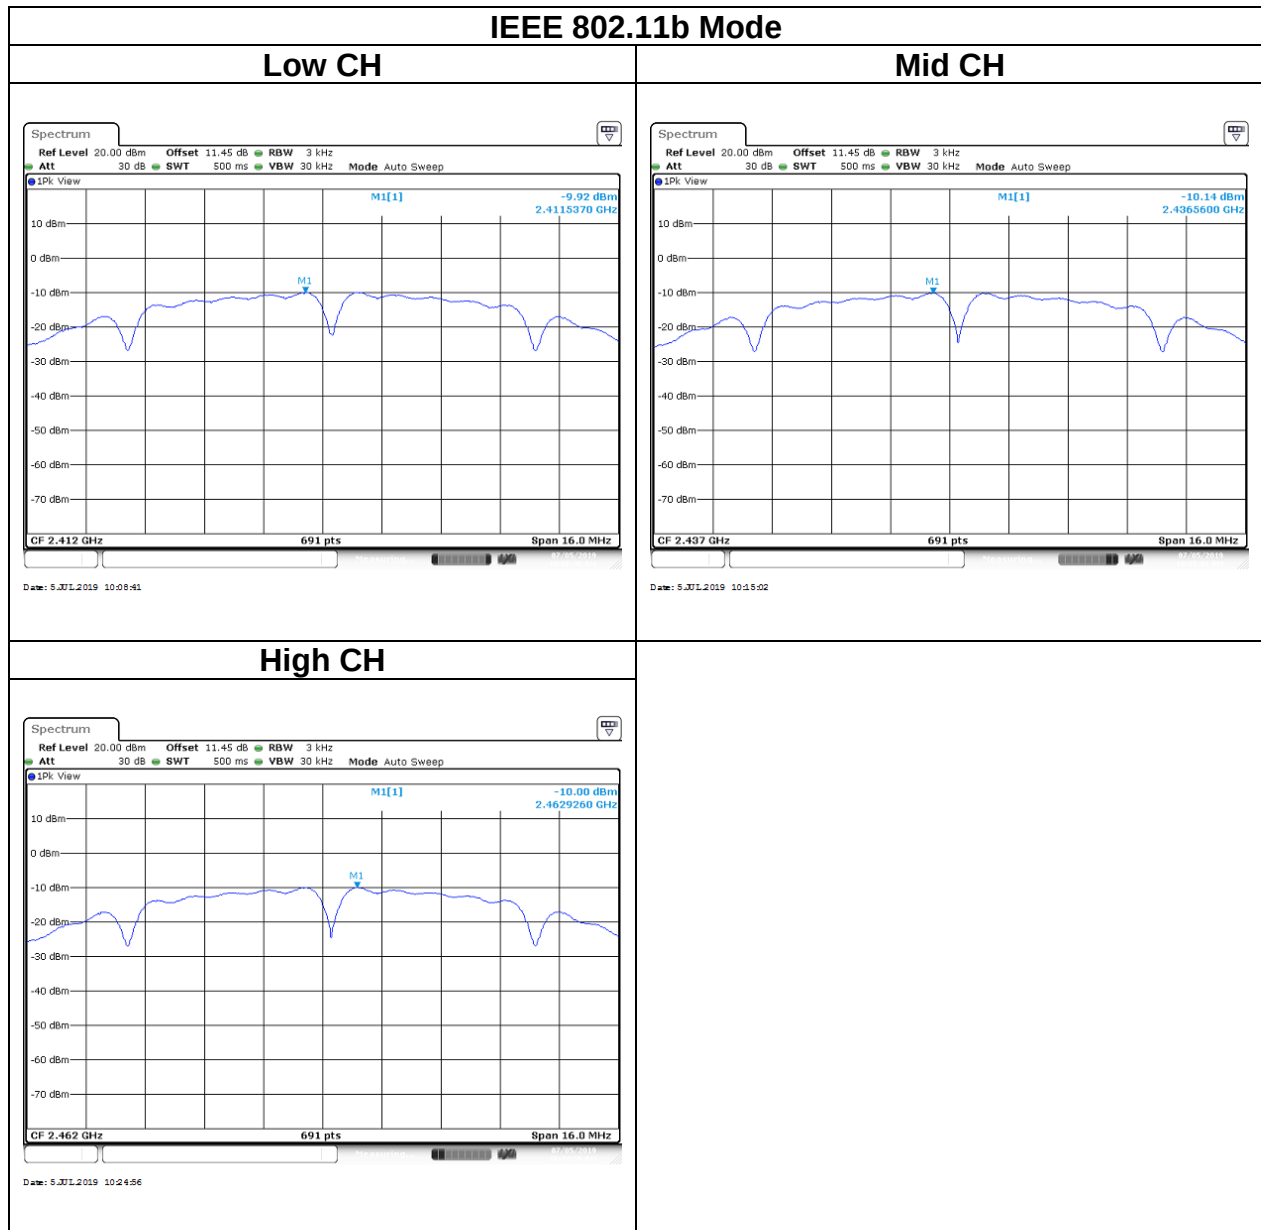
Test Data



Report No.: T190315W01-RP3

Page: 33 / 86

Rev.: 01

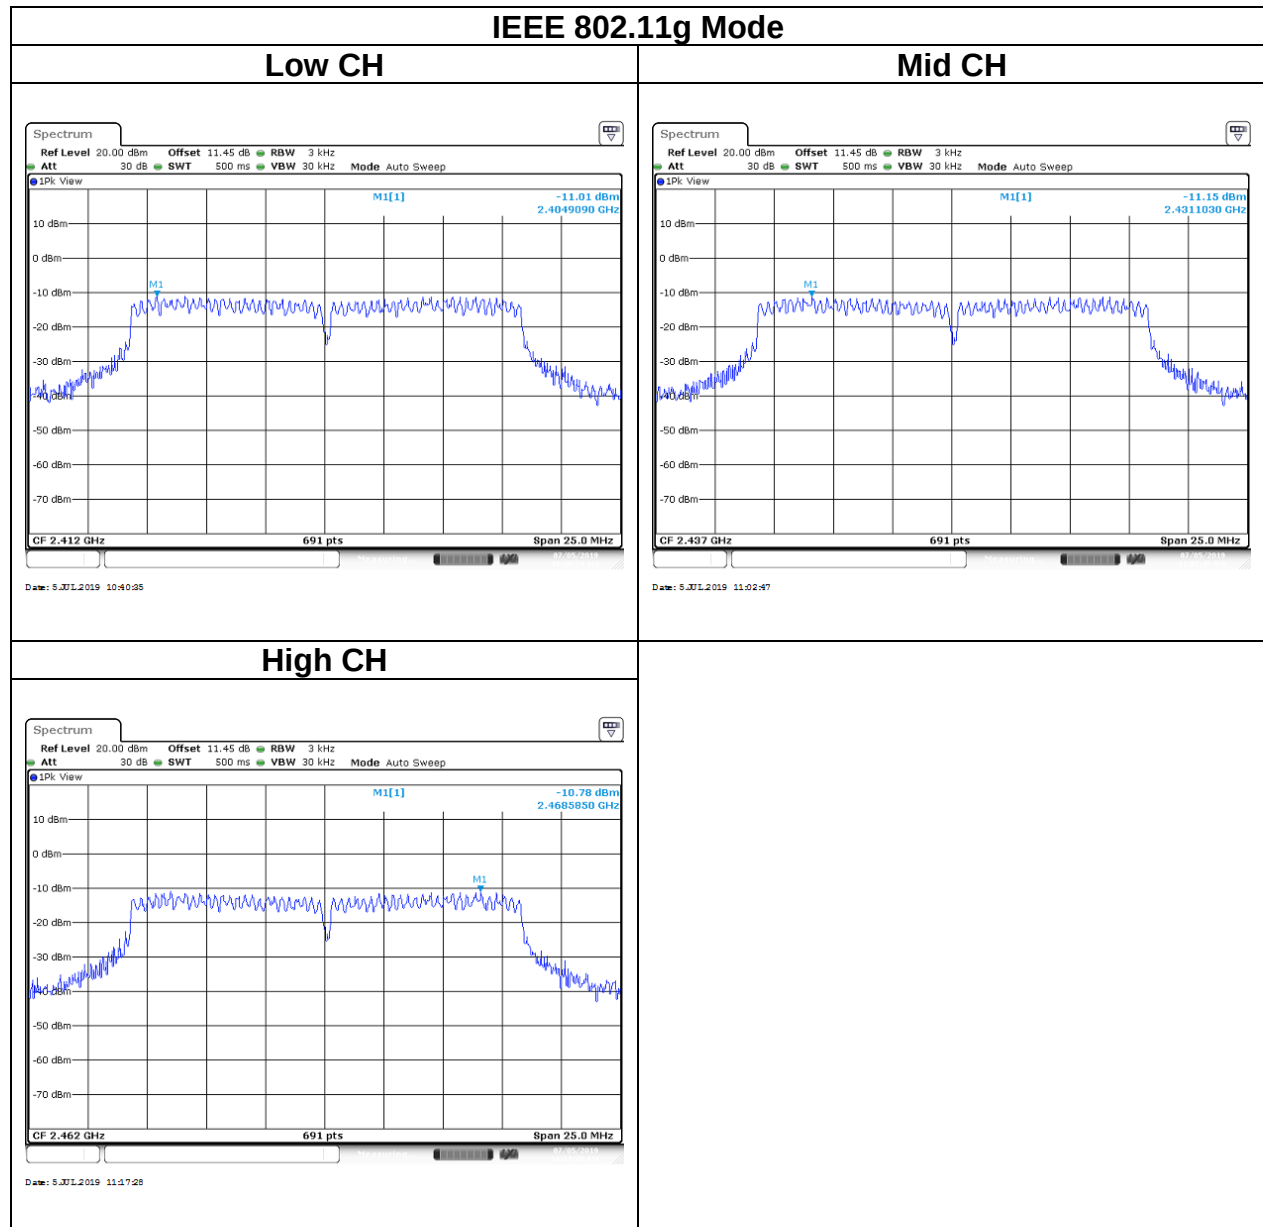




Report No.: T190315W01-RP3

Page: 34 / 86

Rev.: 01

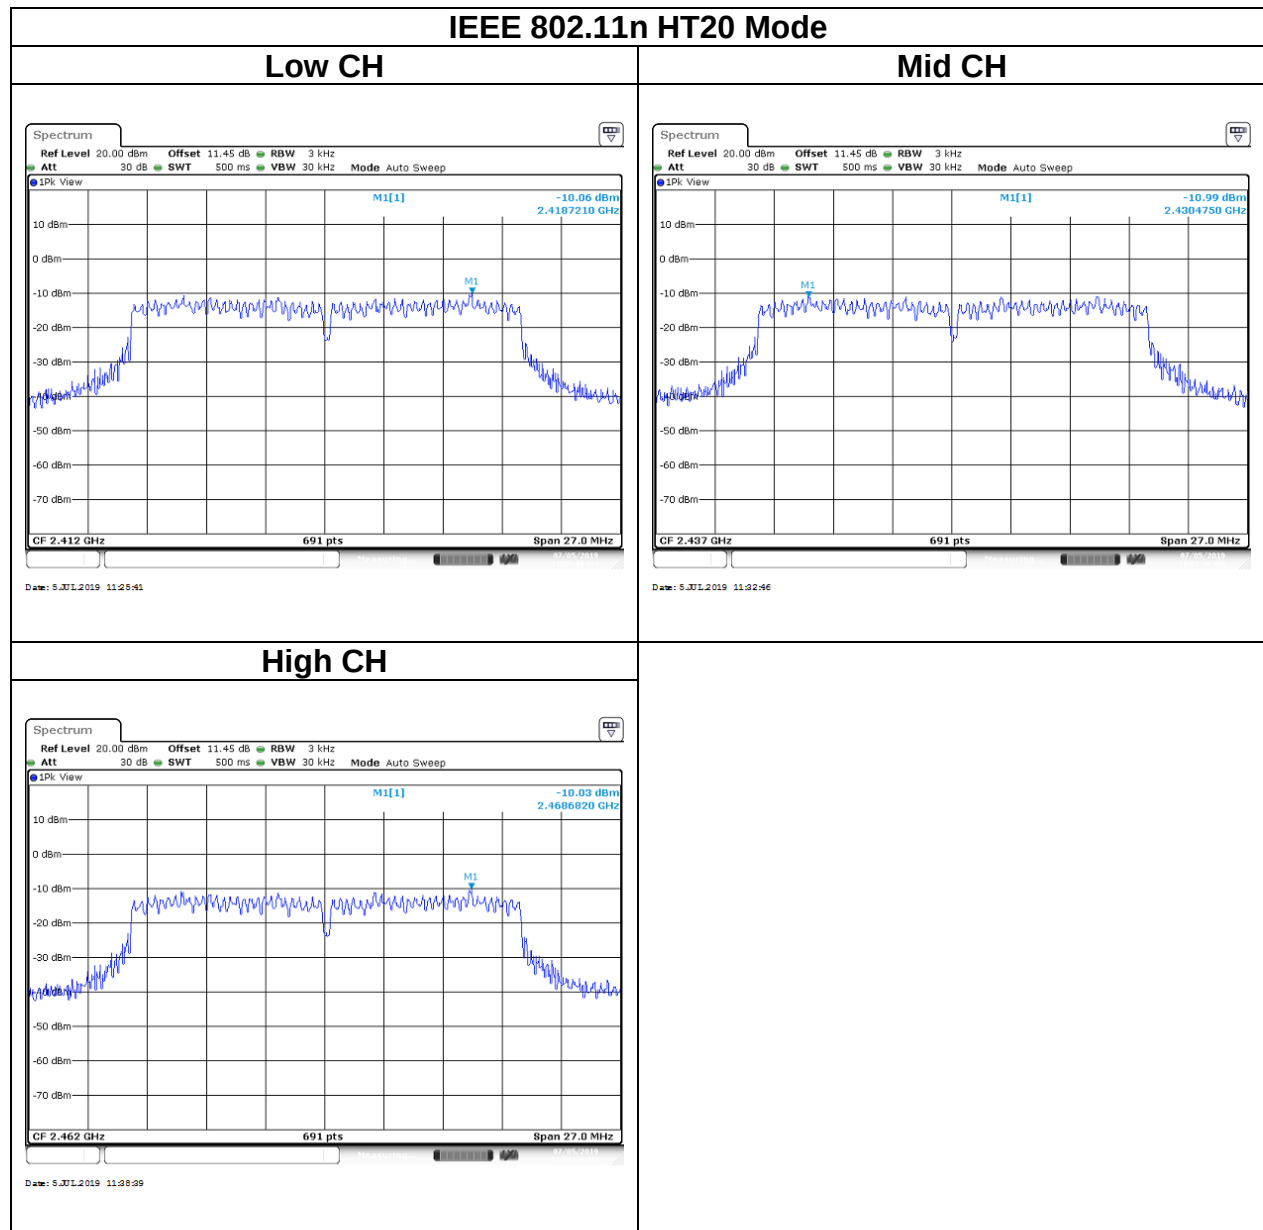




Report No.: T190315W01-RP3

Page: 35 / 86

Rev.: 01

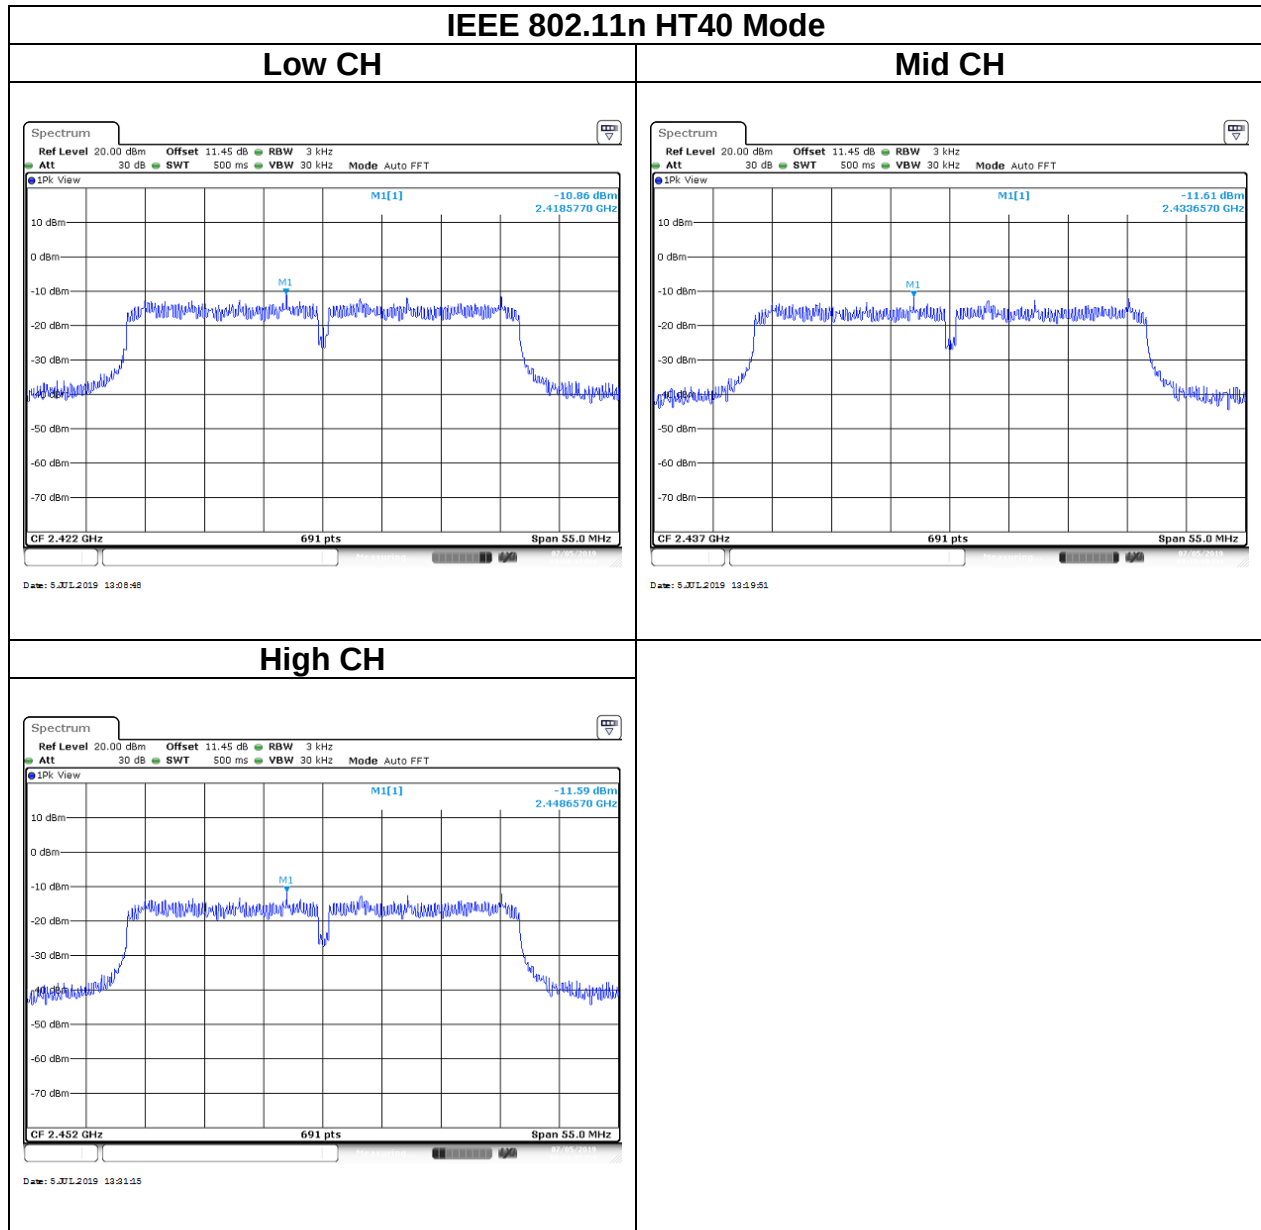

5.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

5.5.1 Test Limit

According to §15.247(d),

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

5.5.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


5.5.3 Test Setup



Report No.: T190315W01-RP3

5.5.4 Test Result

Test Data

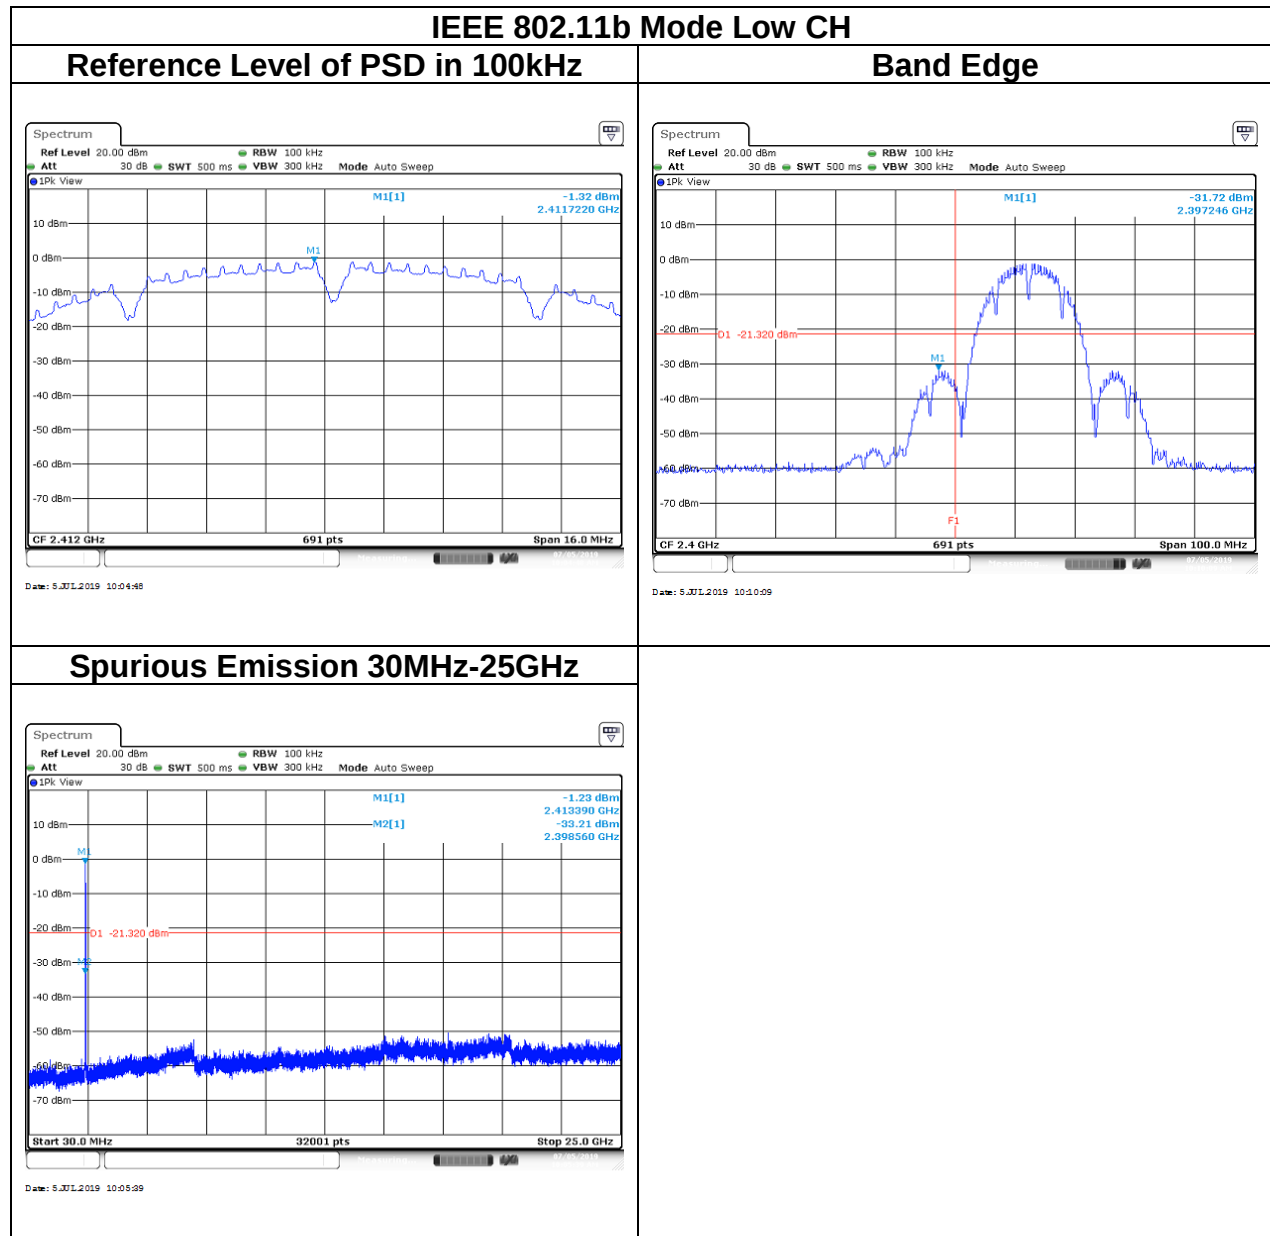






Report No.: T190315W01-RP3

Page: 38 / 86

Rev.: 01

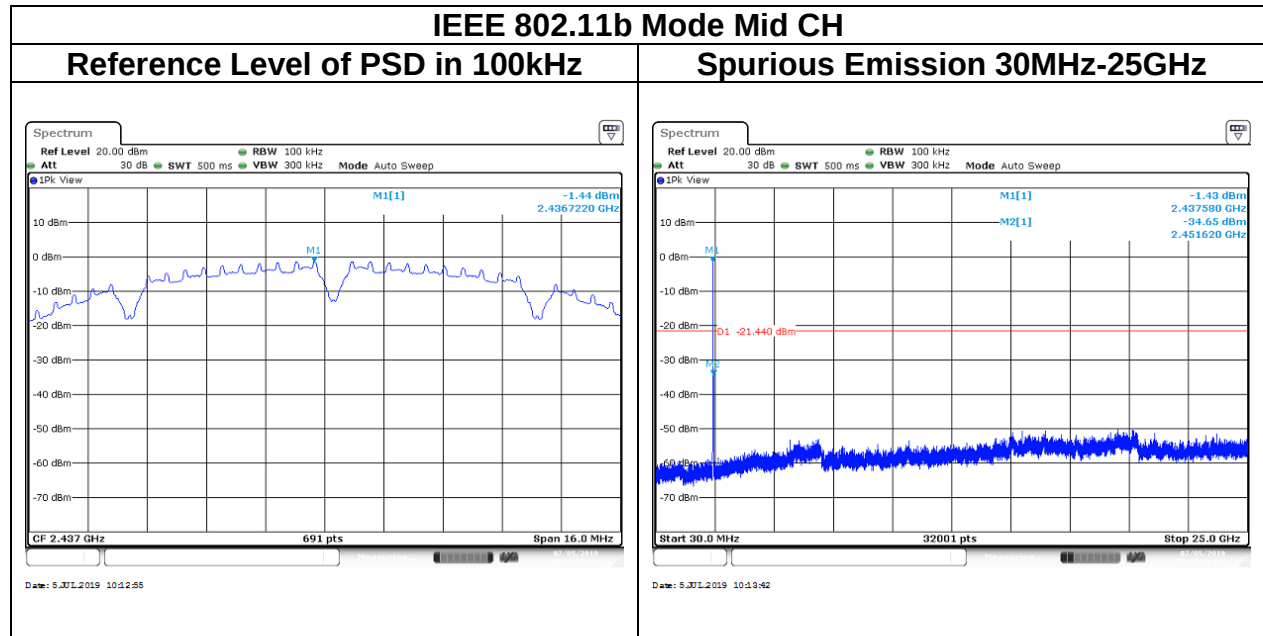

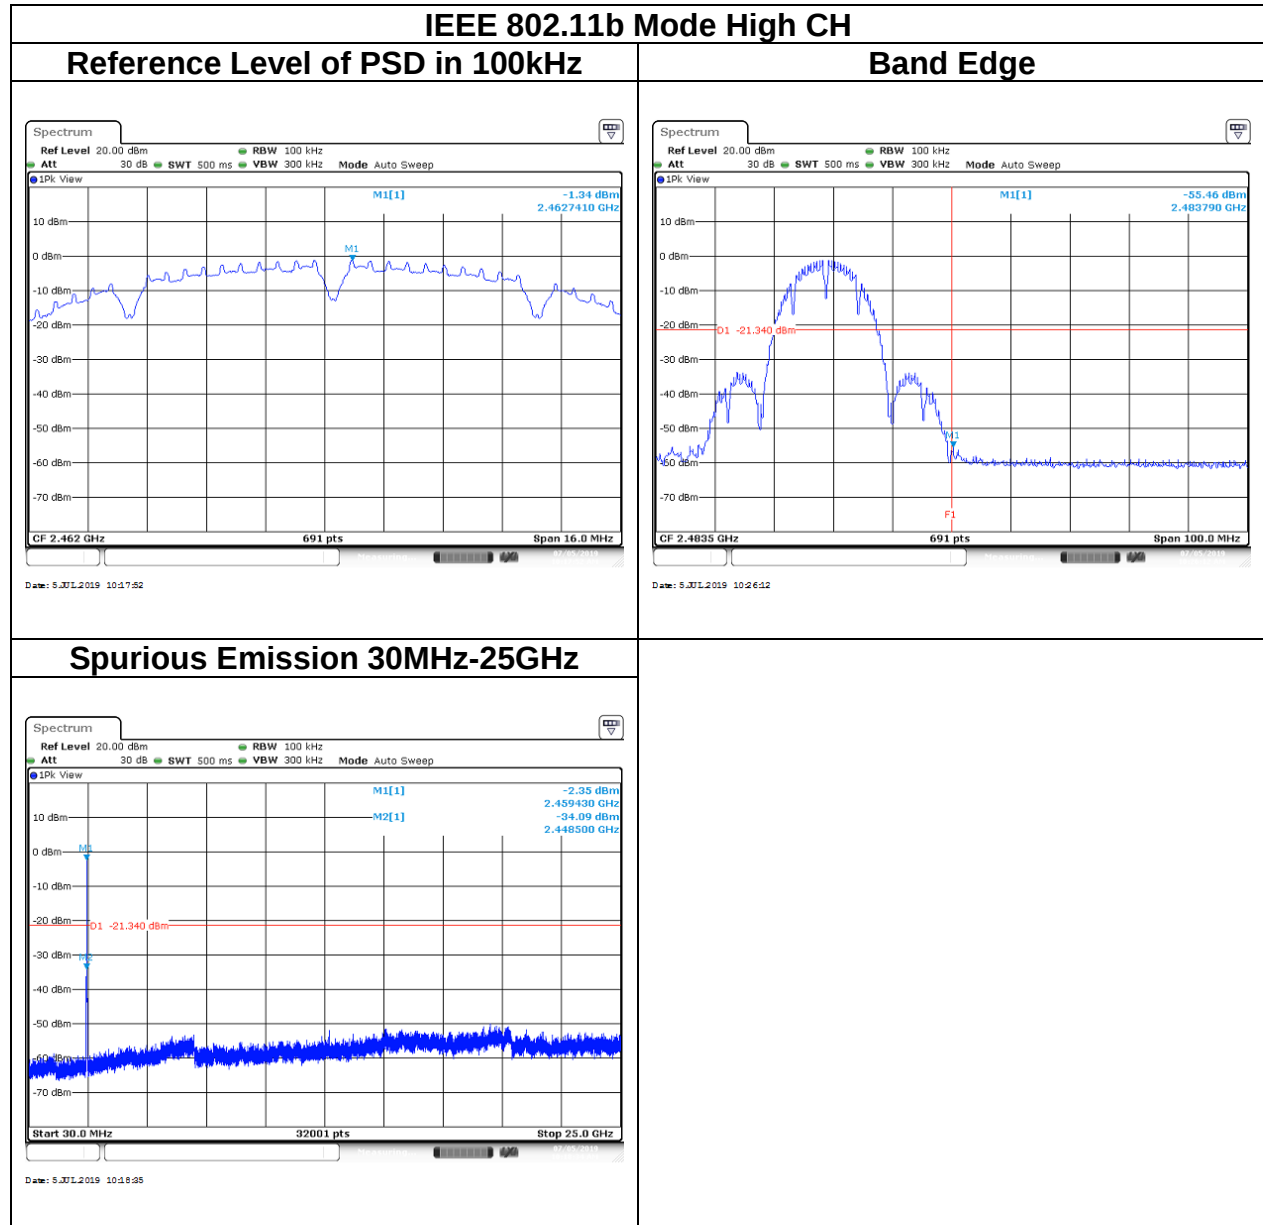

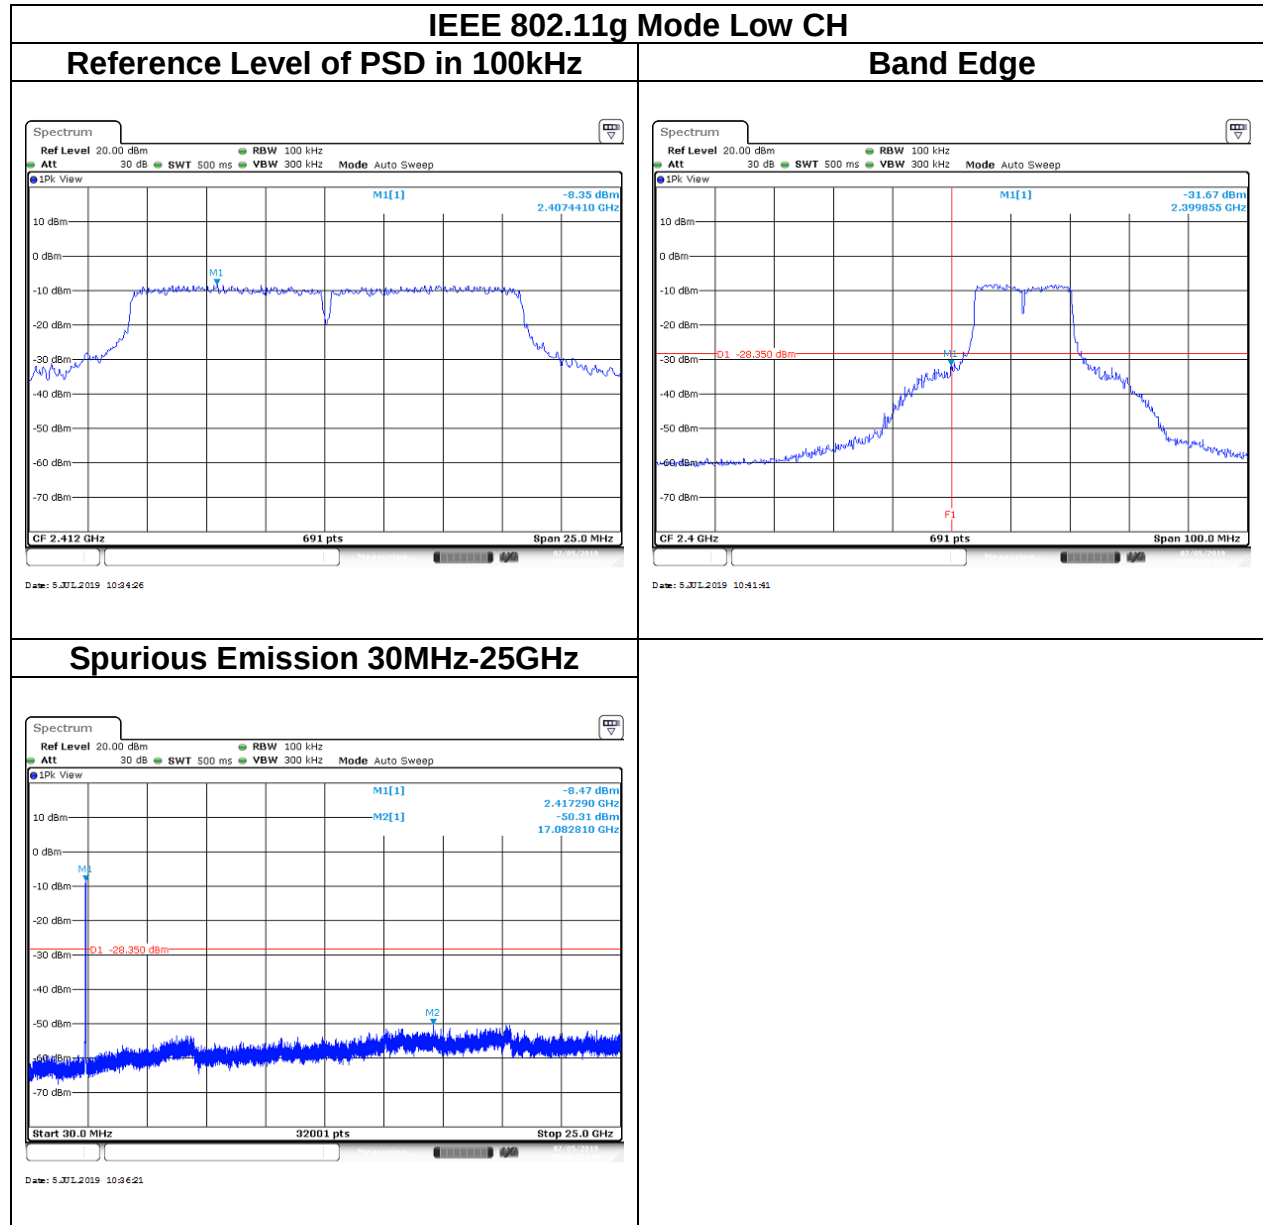






Report No.: T190315W01-RP3


Page: 41 / 86


Rev.: 01

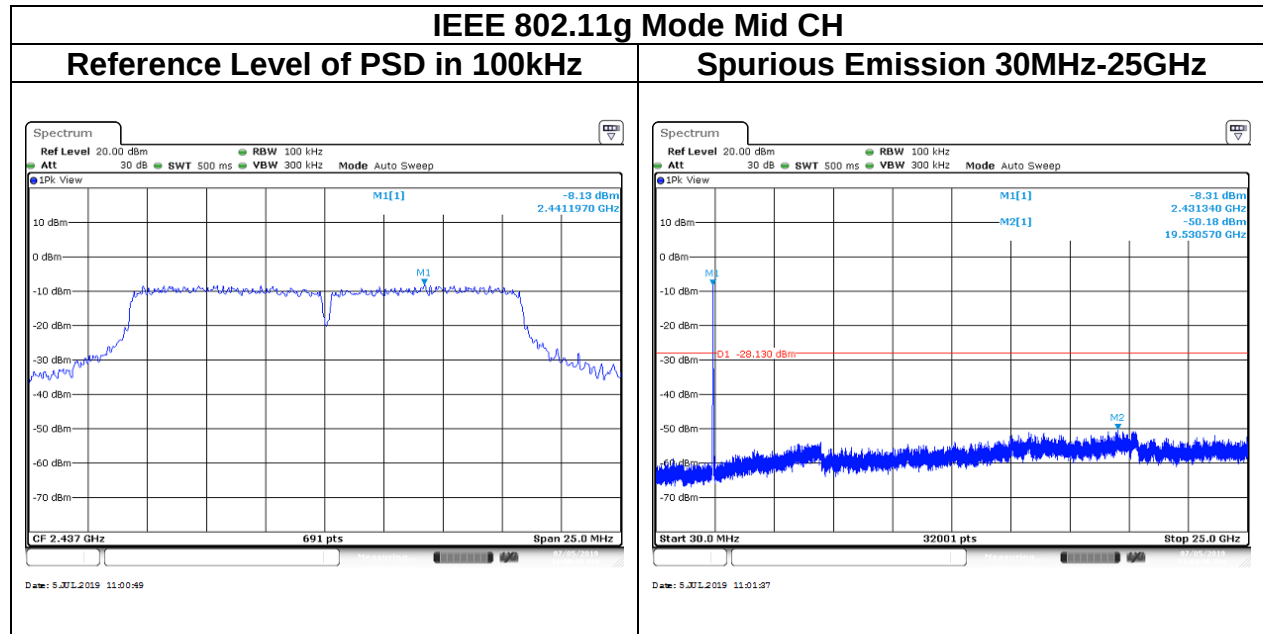


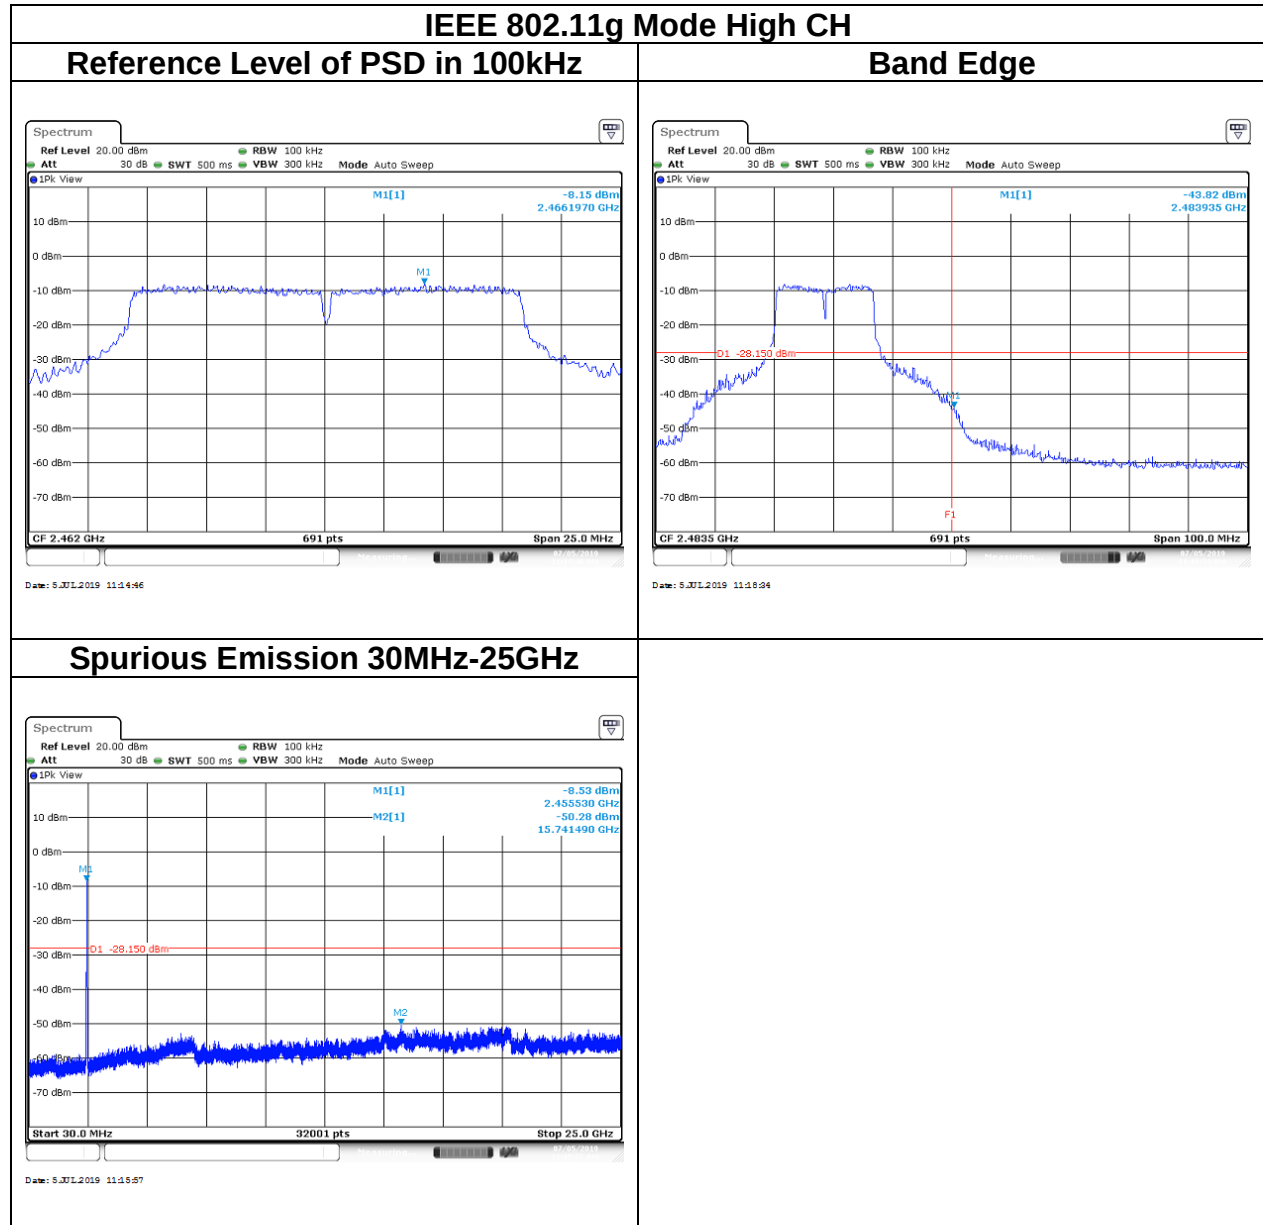


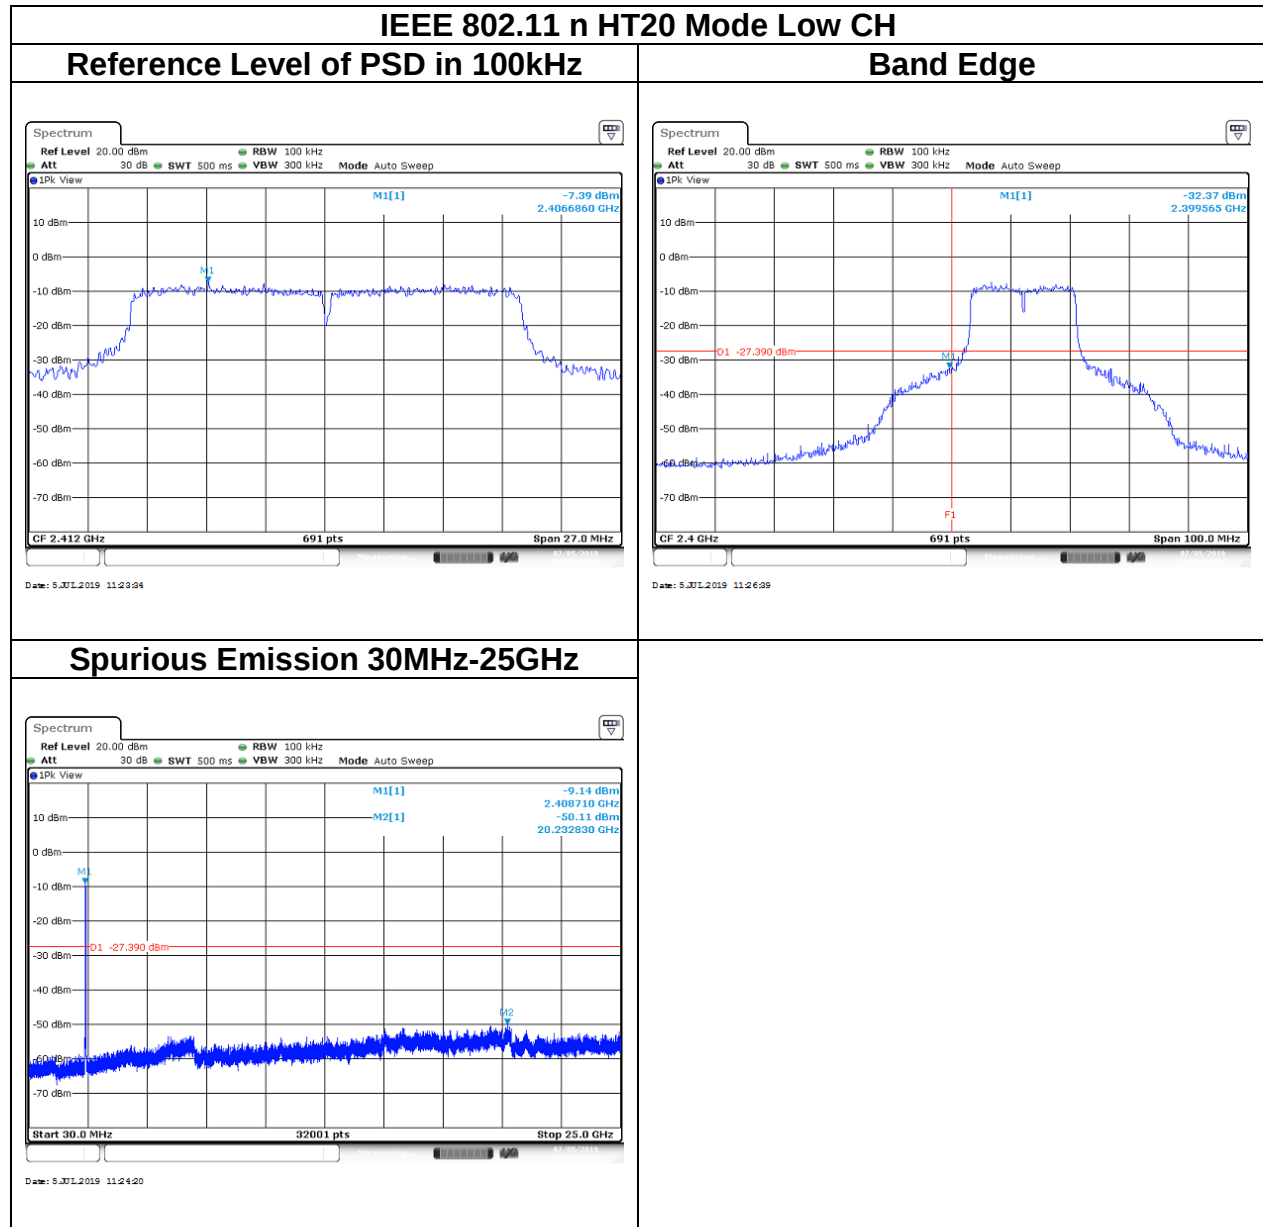


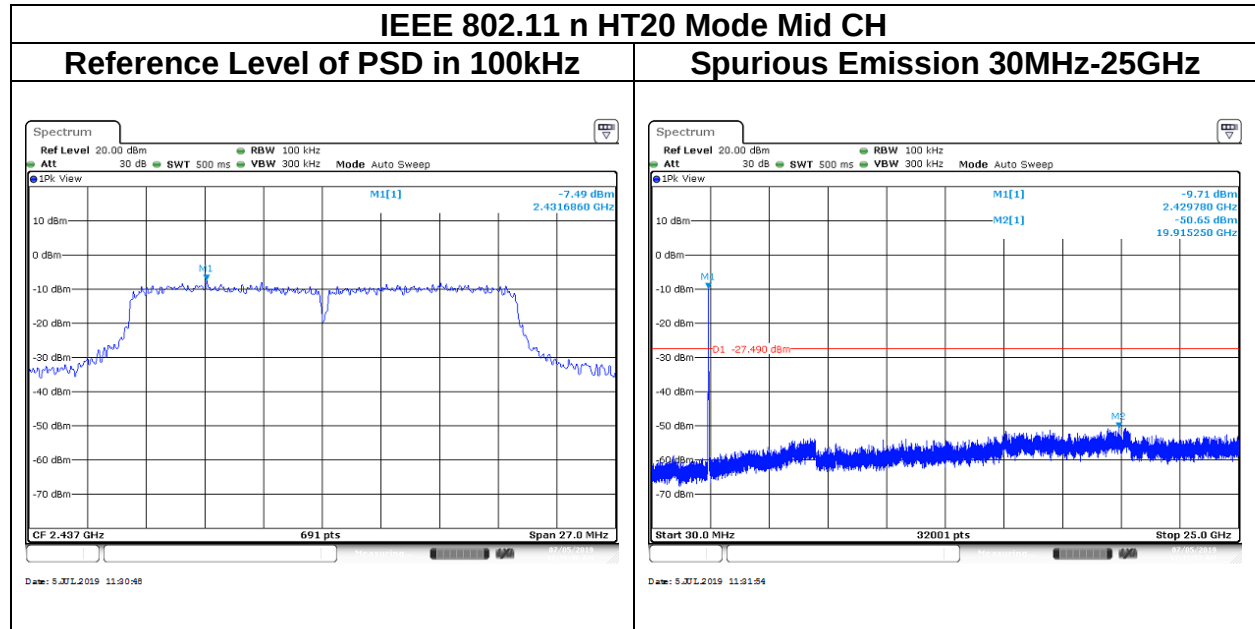

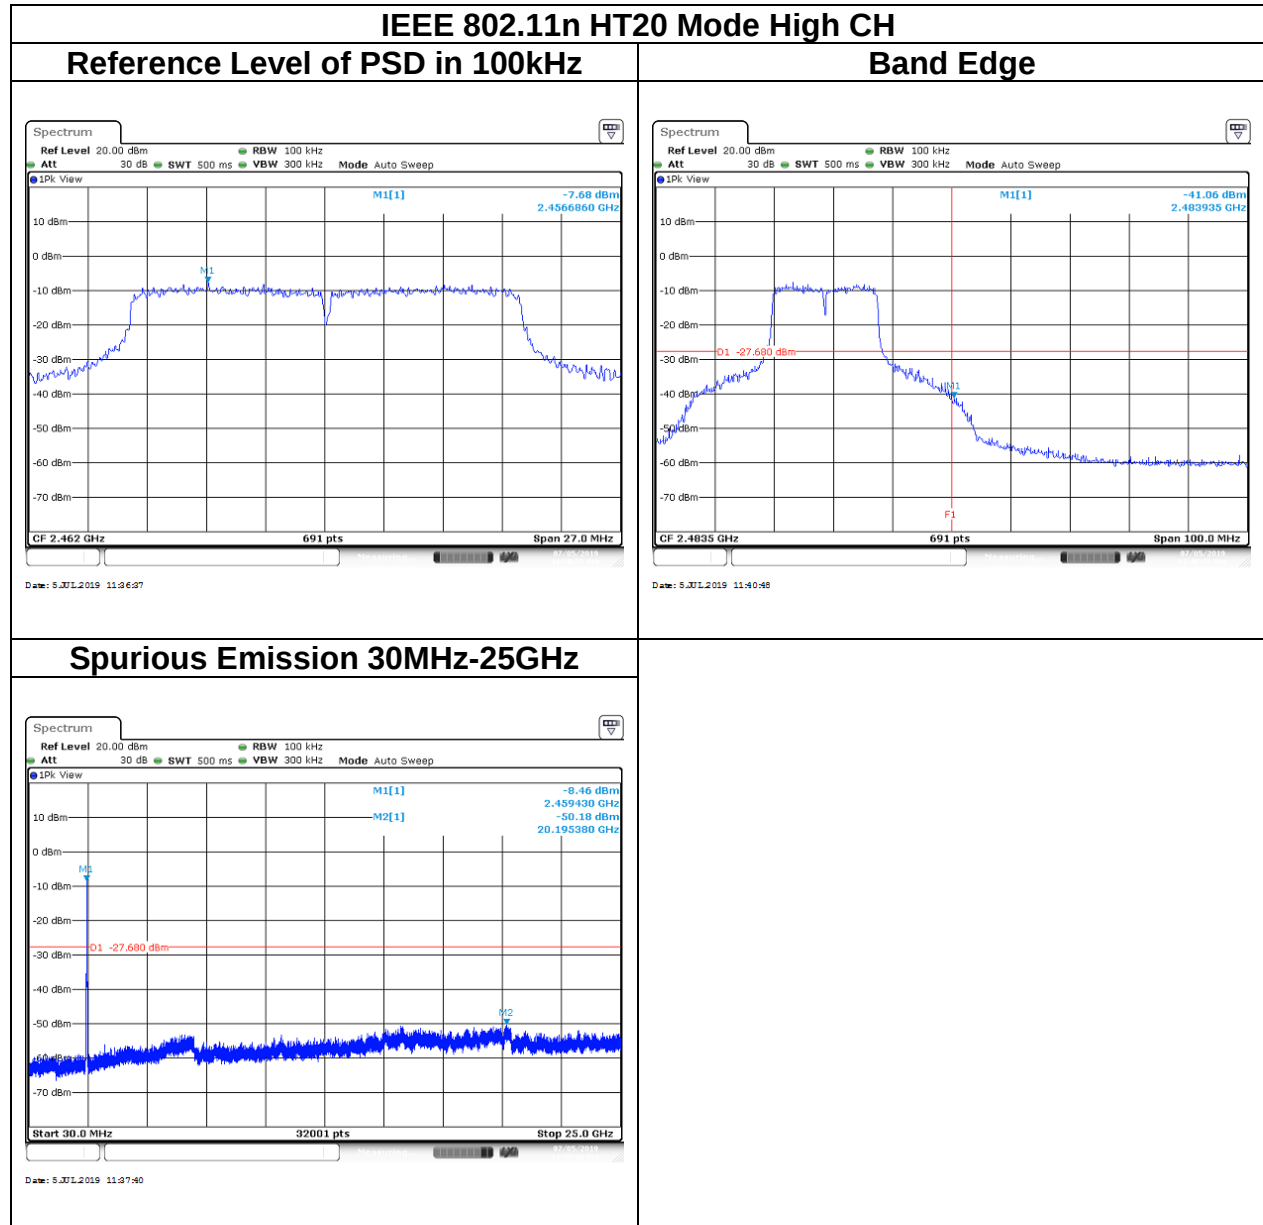

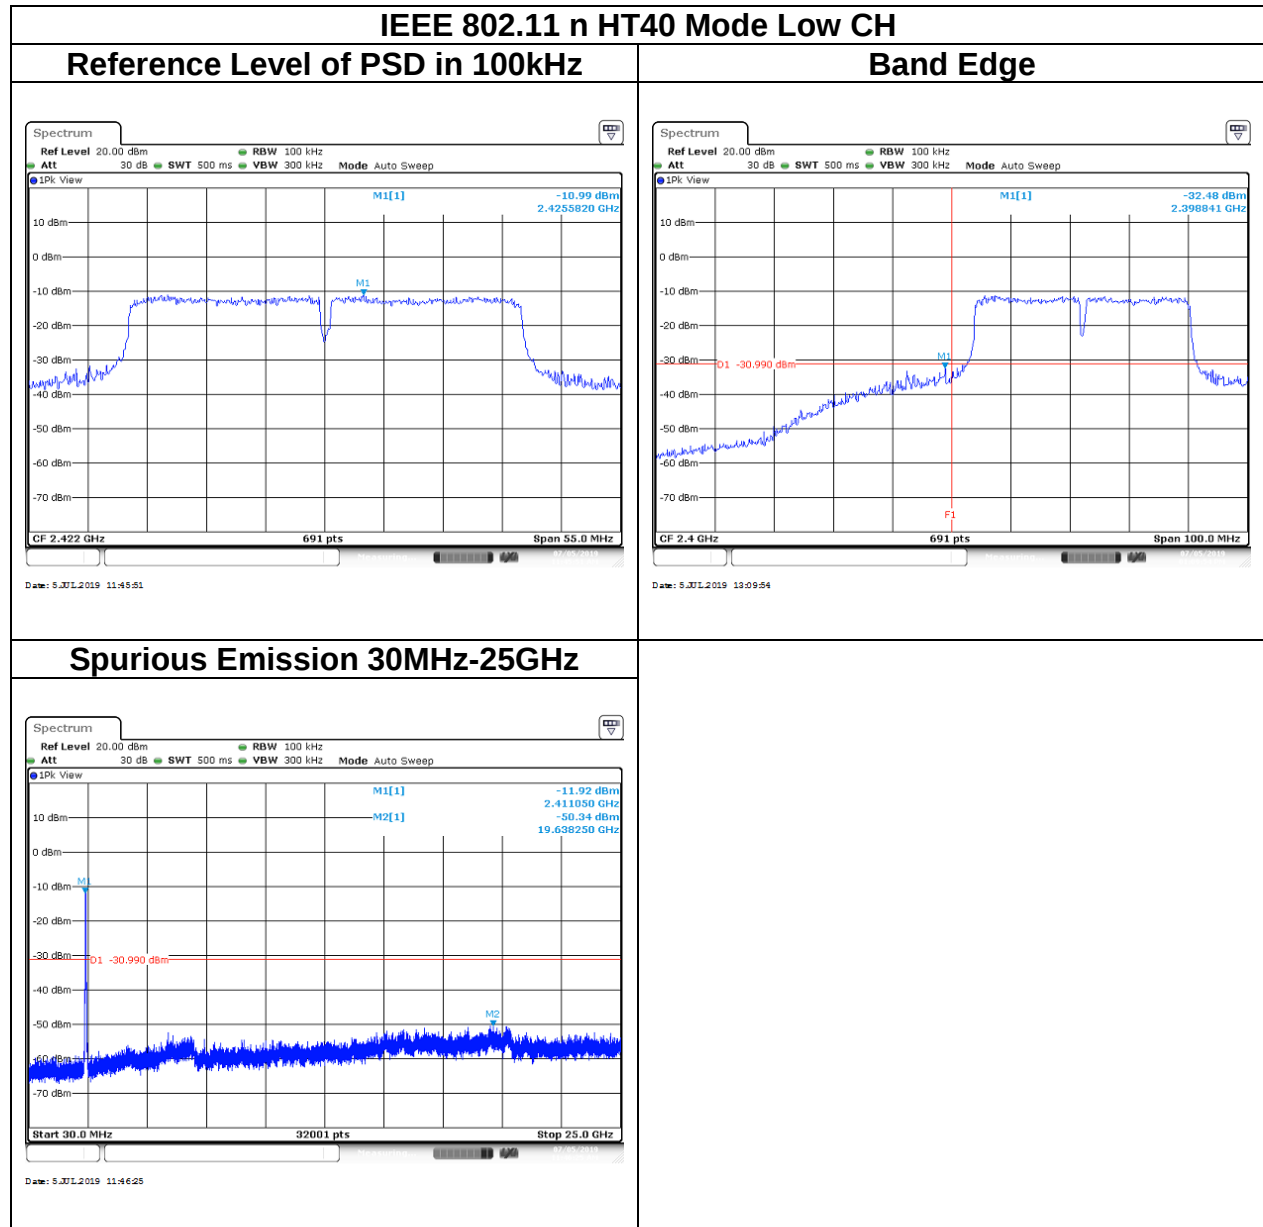

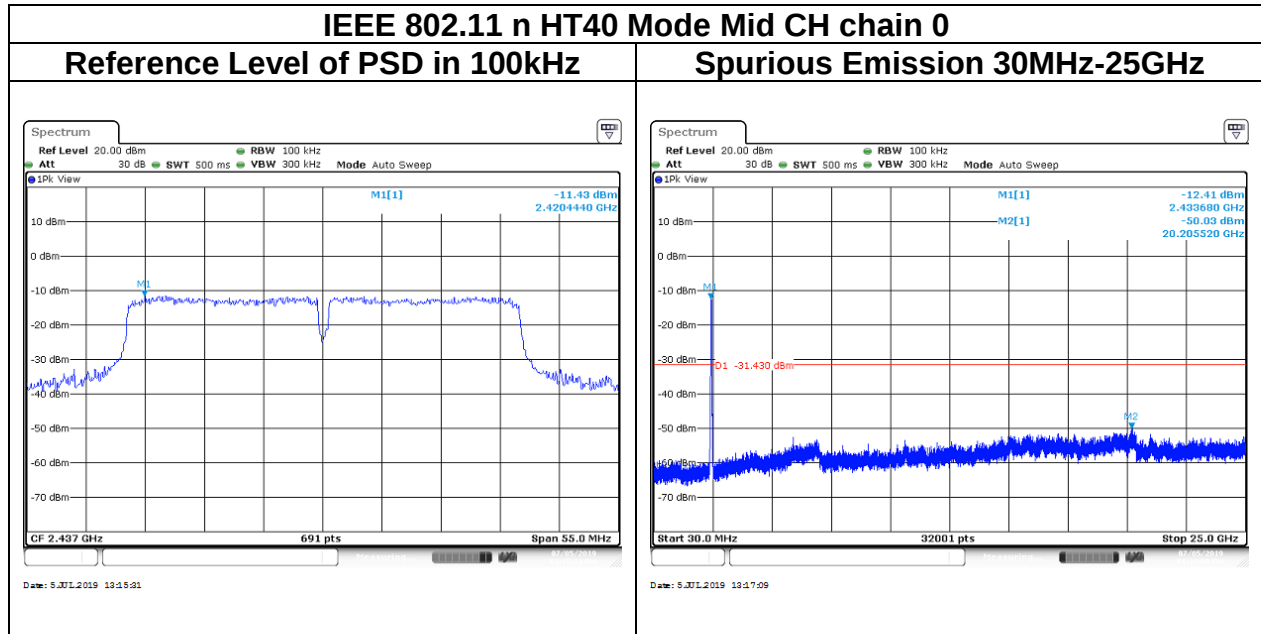

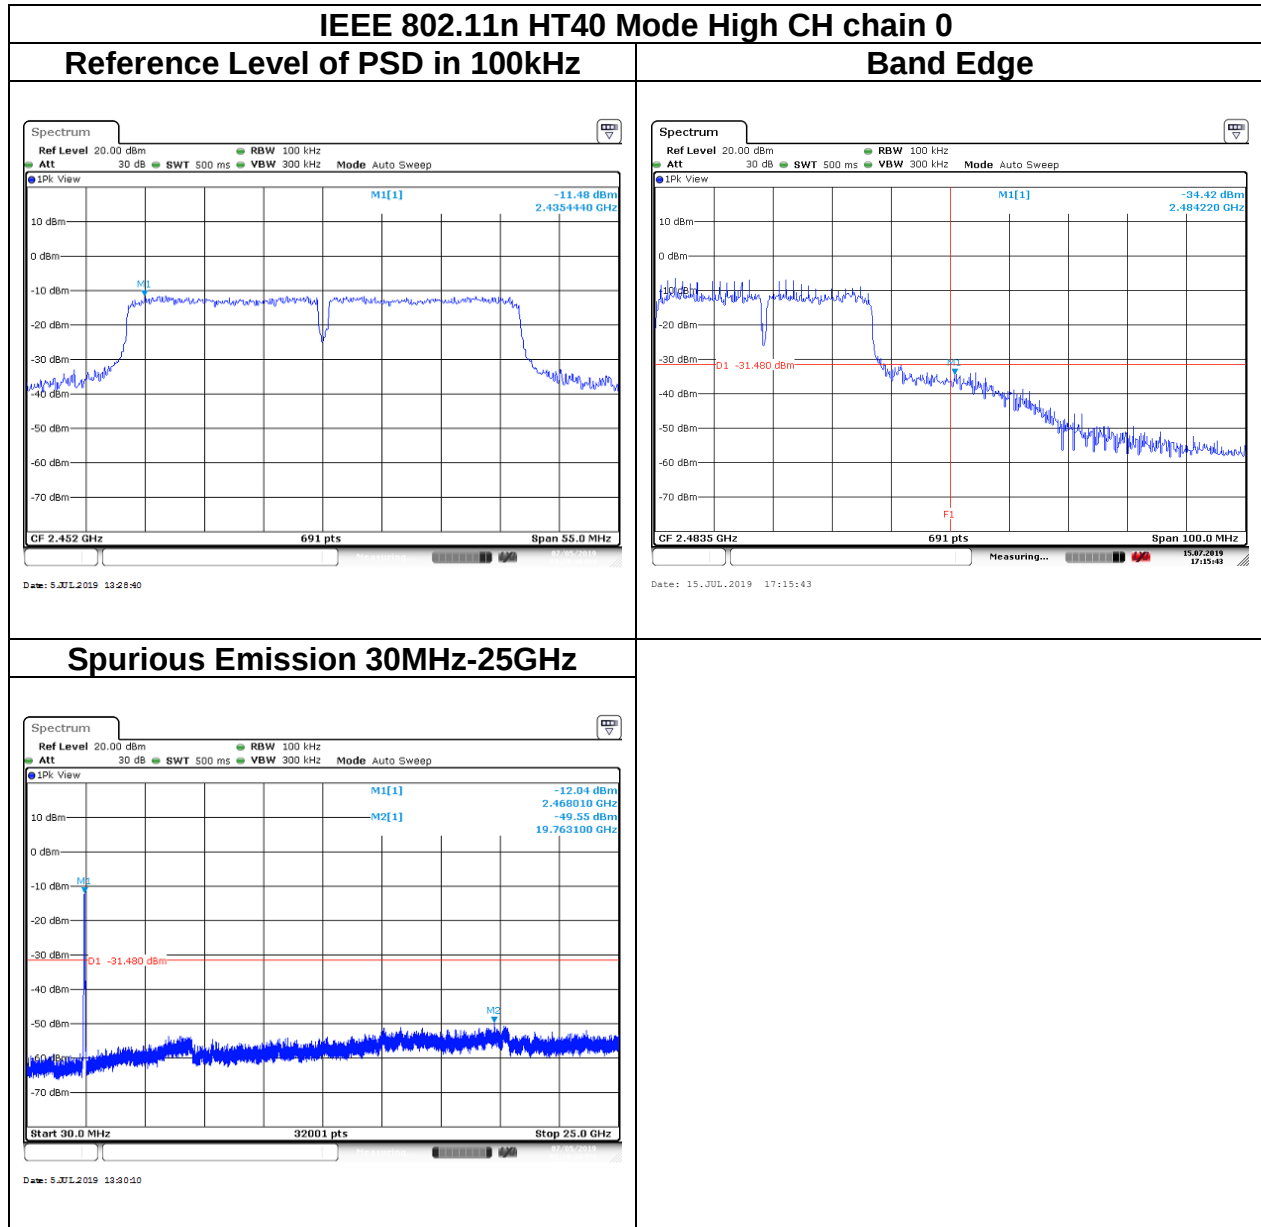

5.6 RADIATION BANDEDGE AND SPURIOUS EMISSION

5.6.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency	Field Strength (microvolts/m)	Measurement Distance (metres)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Report No.: T190315W01-RP3

5.6.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10: 2013, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Note: No emission found between lowest internal used/generated frequency to 30MHz (9KHz~30MHz)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.


4. The SA setting following :

- (1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
- (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - *If Duty Cycle $\geq$ 98%, VBW=10Hz.
 - *If Duty Cycle < 98%, VBW=1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW Setting
802.11b	100%	1.0000	-	10
802.11g	100%	1.0000	-	10
802.11n HT20	100%	1.0000	-	10
802.11n HT40	100%	1.0000	-	10

5.6.3 Test Setup


9kHz ~ 30MHz

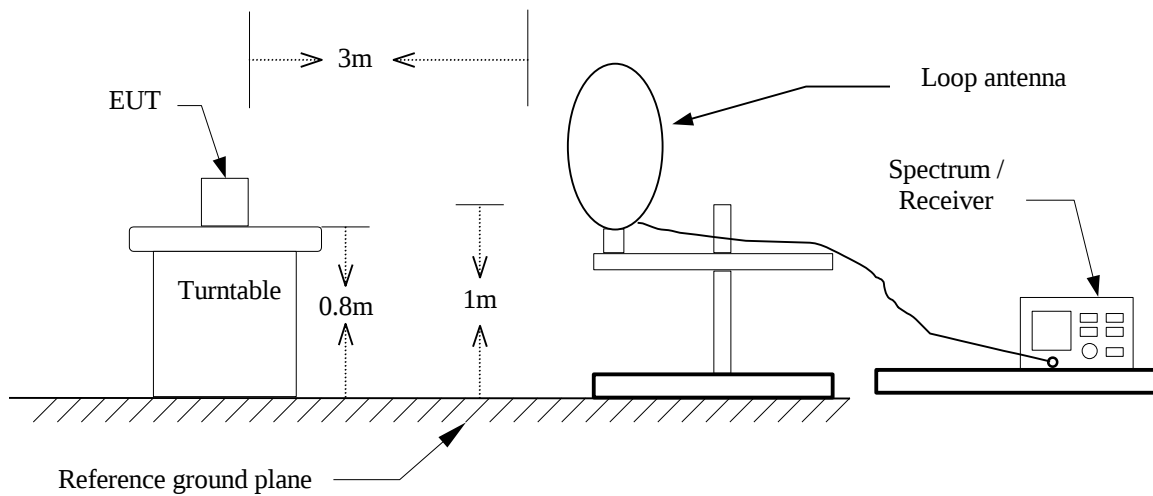

30MHz ~ 1GHz

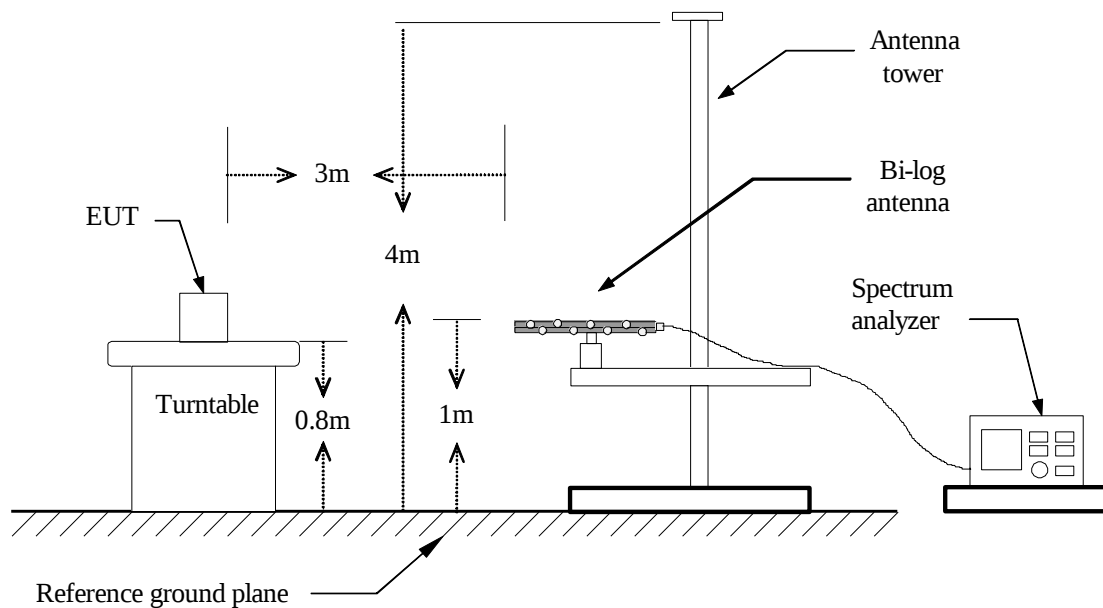


Above 1 GHz

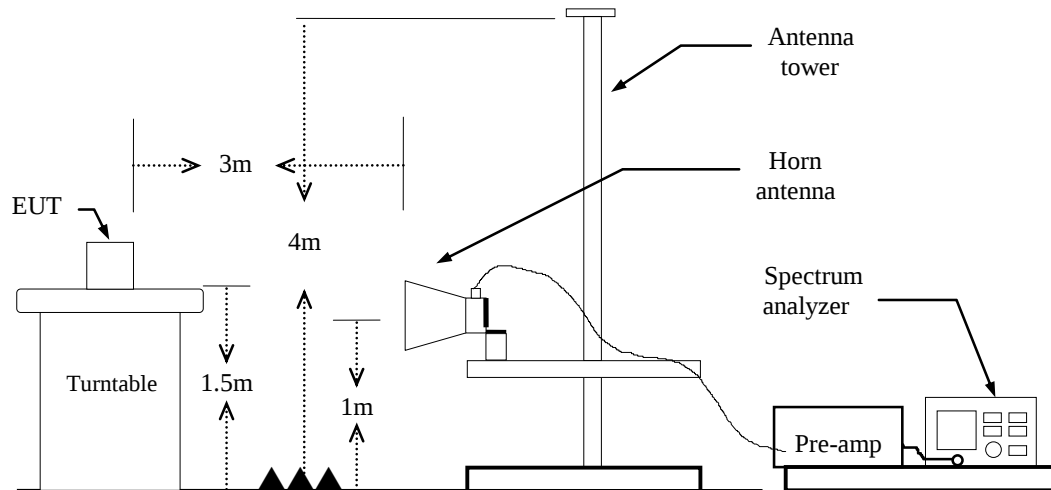

5.6.4 Test Result


Band Edge Test Data

Test Mode	IEEE 802.11b Low CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

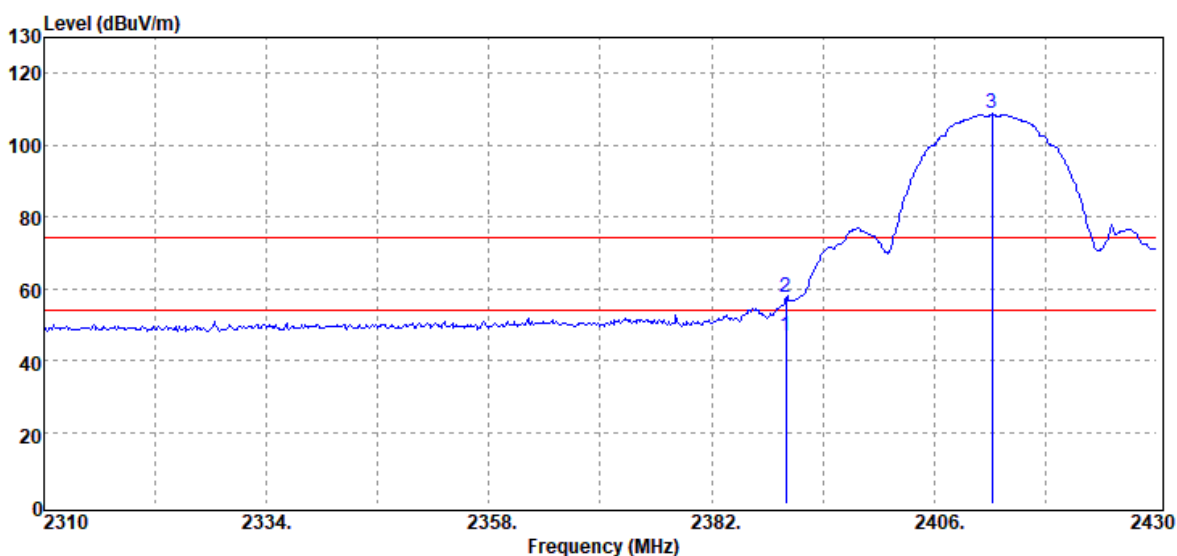


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.00	50.22	-3.38	46.84	54.00	-7.16	Average
2390.00	60.84	-3.38	57.46	74.00	-16.54	Peak
2412.24	112.10	-3.35	108.75	-	-	Peak

Test Mode	IEEE 802.11b High CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

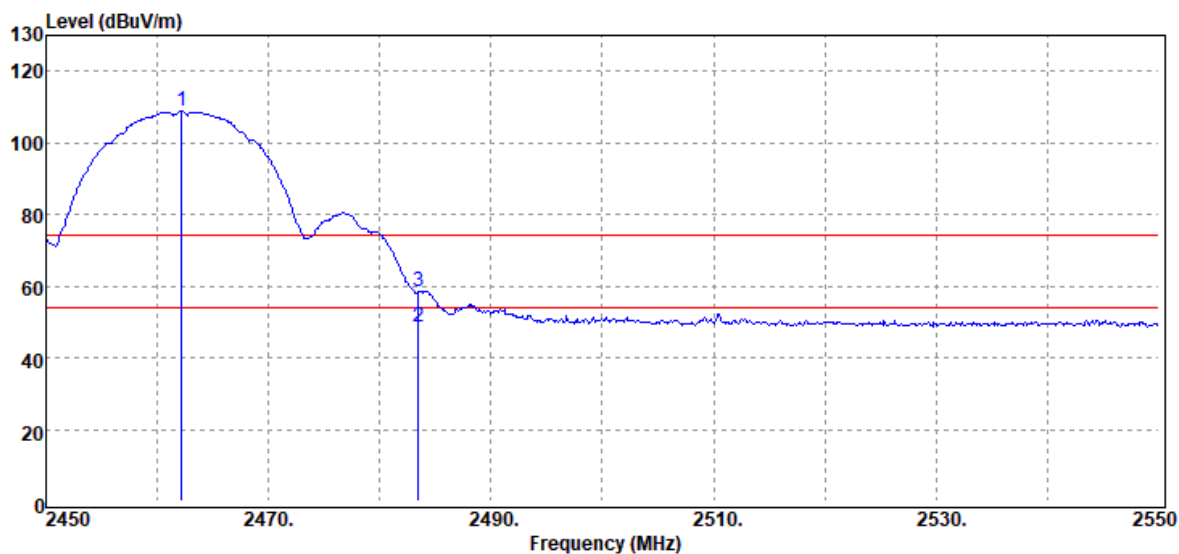


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2462.20	111.86	-3.03	108.83	-	-	Peak
2483.50	51.31	-2.83	48.48	54.00	-5.52	Average
2483.50	61.45	-2.83	58.62	74.00	-15.38	Peak

Test Mode	IEEE 802.11g Low CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

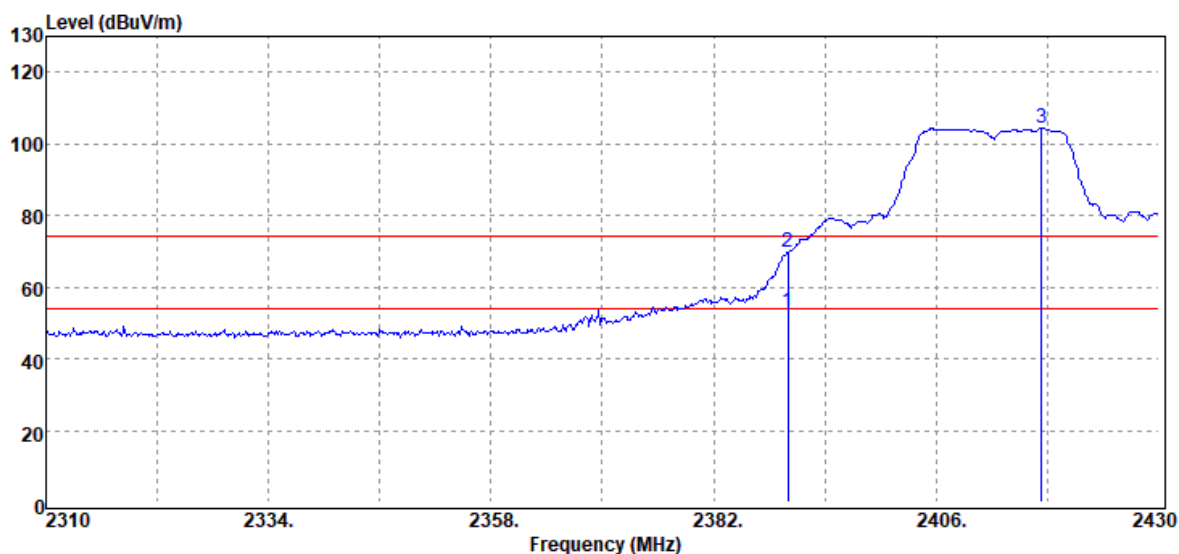


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.00	56.24	-3.38	52.86	54.00	-1.14	Average
2390.00	73.22	-3.38	69.84	74.00	-4.16	Peak
2417.40	107.56	-3.33	104.23	-	-	Peak

Test Mode	IEEE 802.11g High CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

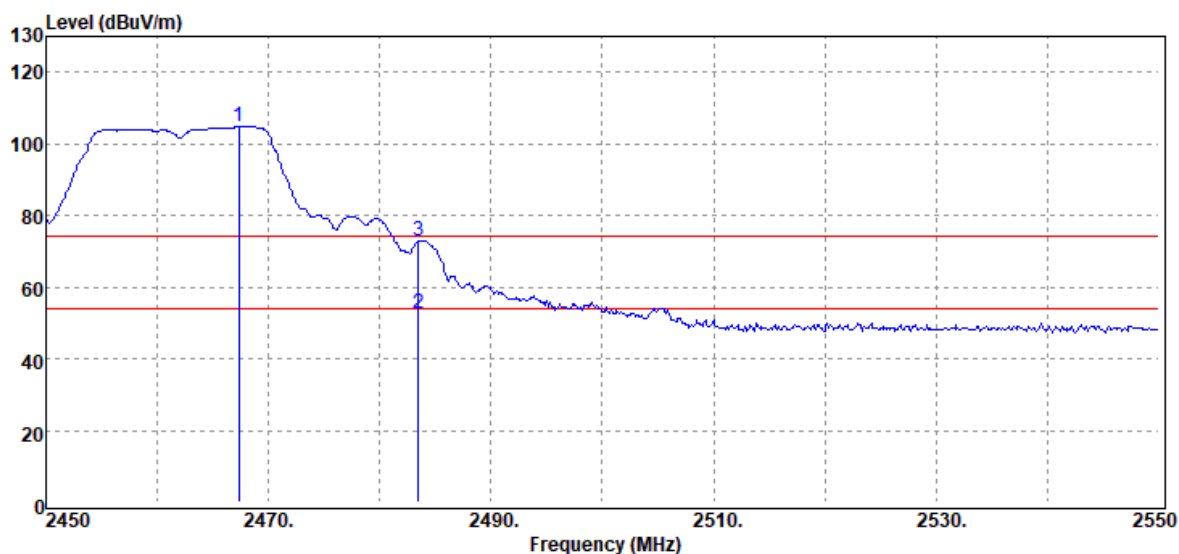


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2467.30	107.98	-2.98	105.00	-	-	Peak
2483.50	55.65	-2.83	52.82	54.00	-1.18	Average
2483.50	75.84	-2.83	73.01	74.00	-0.99	Peak

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

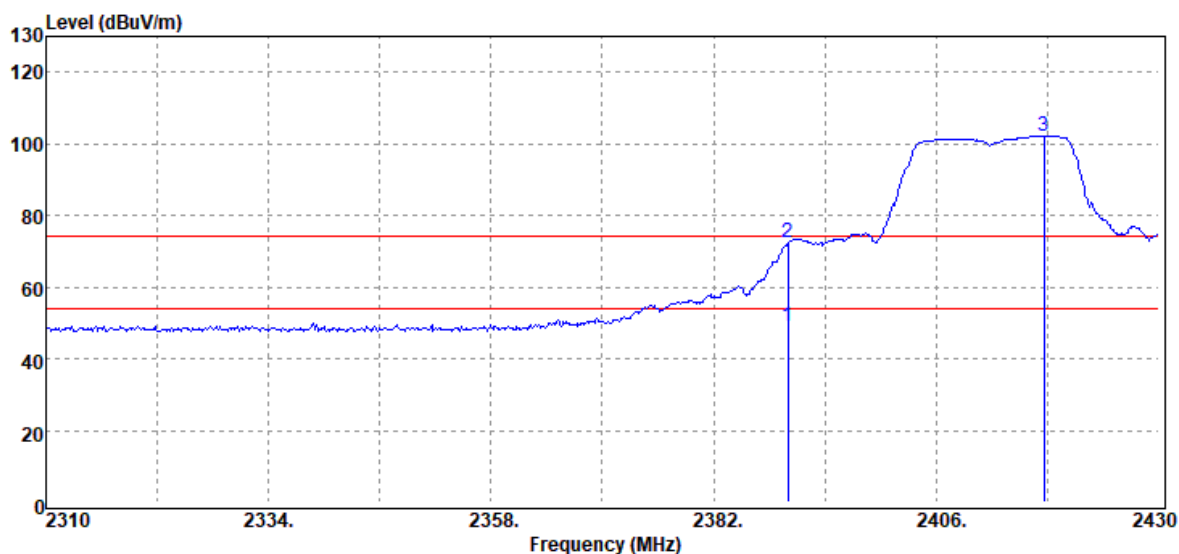


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.00	52.25	-3.38	48.87	54.00	-5.13	Average
2390.00	76.00	-3.38	72.62	74.00	-1.38	Peak
2417.64	105.53	-3.32	102.21	-	-	Peak

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

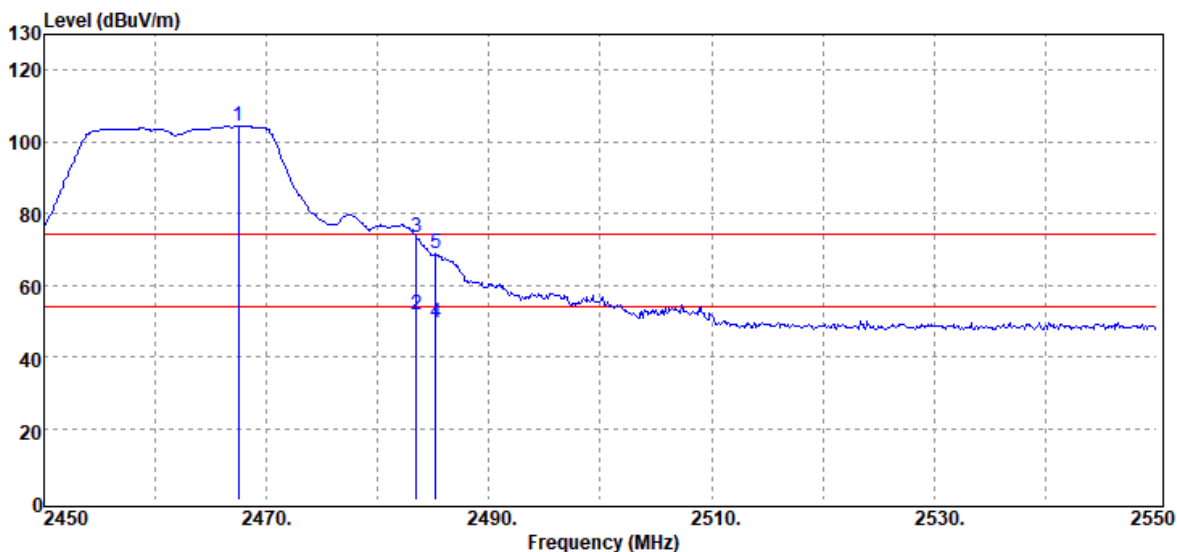


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2467.50	107.35	-2.98	104.37	-	-	Peak
2483.50	54.45	-2.83	51.62	54.00	-2.38	Average
2483.50	76.20	-2.83	73.37	74.00	-0.63	Peak
2485.20	52.28	-2.82	49.46	54.00	-4.54	Average
2485.20	71.50	-2.82	68.68	74.00	-5.32	Peak

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

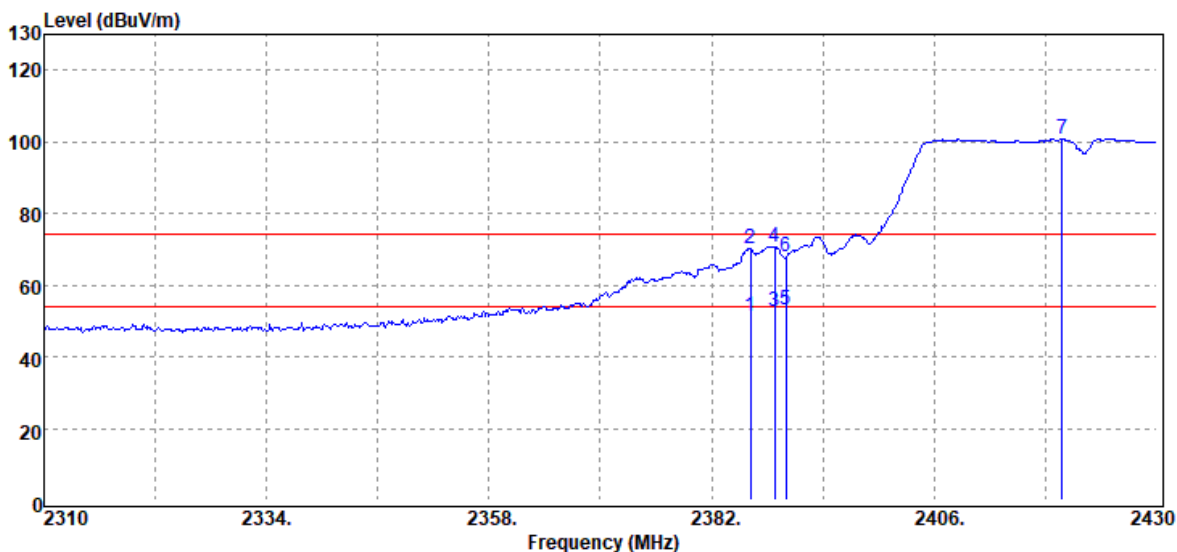

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2386.20	54.65	-3.38	51.27	54.00	-2.73	Average
2386.20	73.48	-3.38	70.10	74.00	-3.90	Peak
2388.84	55.90	-3.39	52.51	54.00	-1.49	Average
2388.84	74.10	-3.39	70.71	74.00	-3.29	Peak
2390.00	56.25	-3.38	52.87	54.00	-1.13	Average
2390.00	71.16	-3.38	67.78	74.00	-6.22	Peak
2419.80	104.14	-3.32	100.82	-	-	Peak

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	Band Edge	Test Date	July 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong

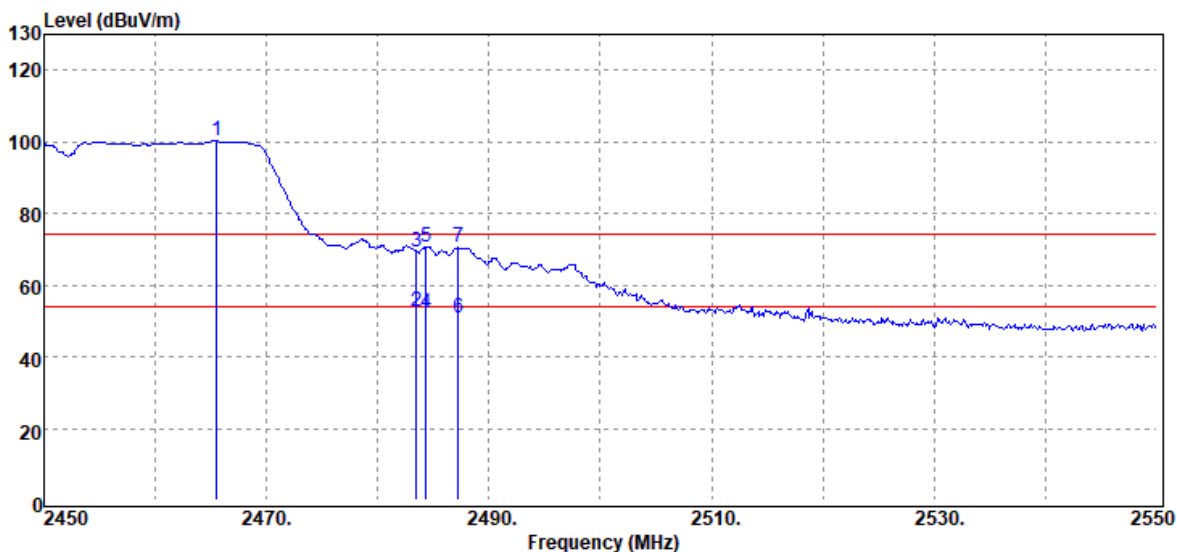


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2465.50	103.23	-3.00	100.23	-	-	Peak
2483.50	55.41	-2.83	52.58	54.00	-1.42	Average
2483.50	72.17	-2.83	69.34	74.00	-4.66	Peak
2484.30	55.01	-2.82	52.19	54.00	-1.81	Average
2484.30	73.55	-2.82	70.73	74.00	-3.27	Peak
2487.20	53.58	-2.80	50.78	54.00	-3.22	Average
2487.20	73.30	-2.80	70.50	74.00	-3.50	Peak

Report No.: T190315W01-RP3

Below 1G Test Data


Test Mode	Mode 1	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	30MHz-1GHz	Test Date	May 11, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak	Test Voltage	

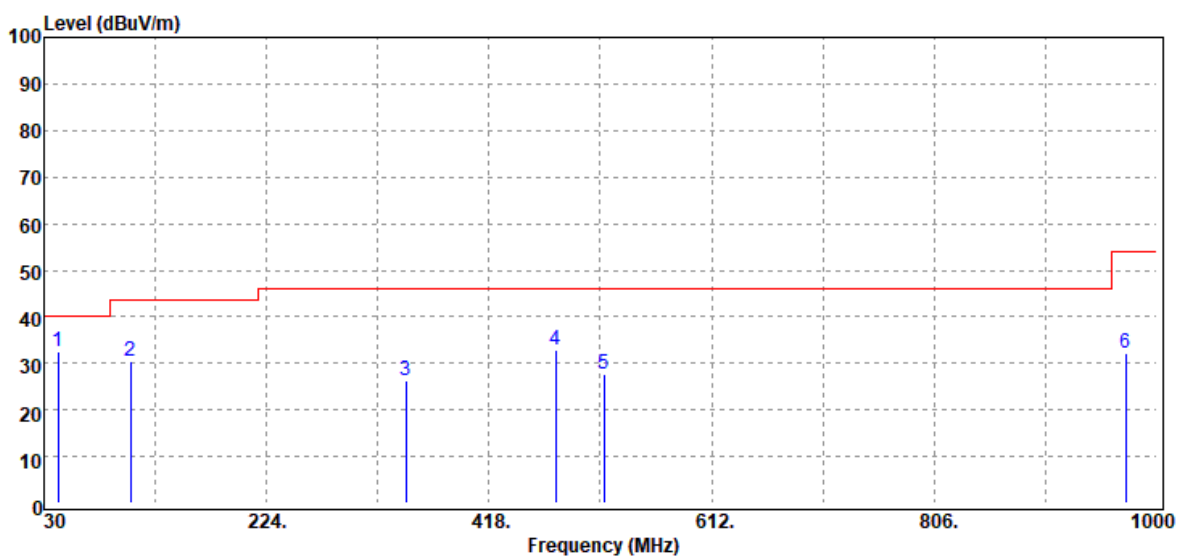

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
42.61	43.67	-11.25	32.42	40.00	-7.58	Peak
105.66	41.37	-11.02	30.35	43.50	-13.15	Peak
345.25	33.28	-7.12	26.16	46.00	-19.84	Peak
476.20	35.99	-3.14	32.85	46.00	-13.15	Peak
517.91	30.43	-2.68	27.75	46.00	-18.25	Peak
972.84	26.51	5.56	32.07	54.00	-21.93	Peak

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Test Mode	Mode 1	Temp/Hum	27.5(°C)/ 51.8%RH
Test Item	30MHz-1GHz	Test Date	May 11, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak	Test Voltage	

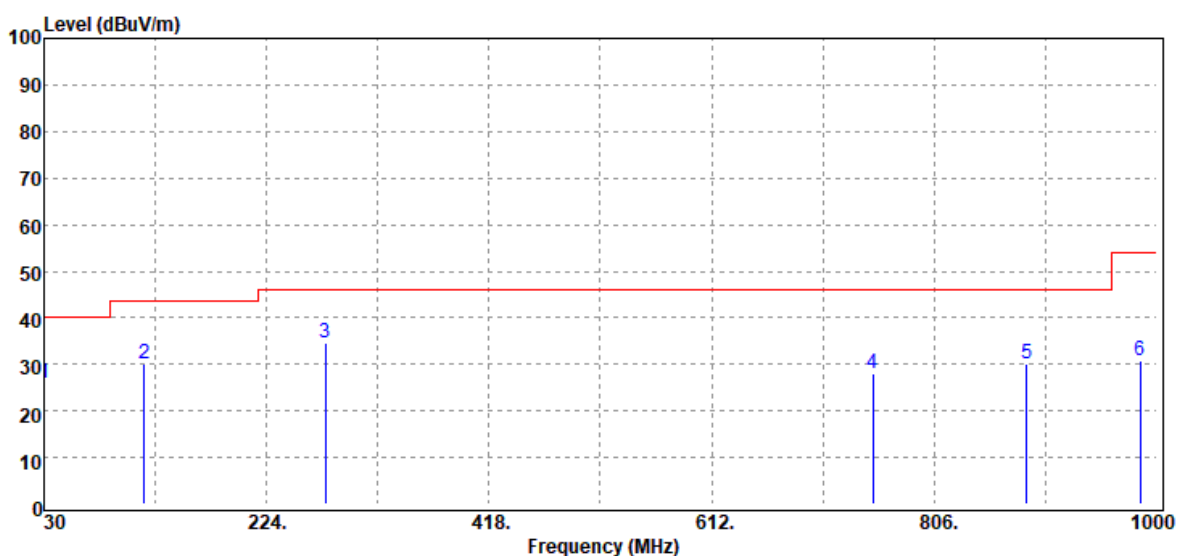

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.00	27.30	-1.51	25.79	40.00	-14.21	Peak
117.30	39.08	-9.02	30.06	43.50	-13.44	Peak
275.41	42.97	-8.42	34.55	46.00	-11.45	Peak
752.65	25.84	2.17	28.01	46.00	-17.99	Peak
886.51	26.24	3.81	30.05	46.00	-15.95	Peak
985.45	25.51	5.38	30.89	54.00	-23.11	Peak


Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)



Report No.: T190315W01-RP3

Above 1G Test Data

Test Mode	IEEE 802.11b Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

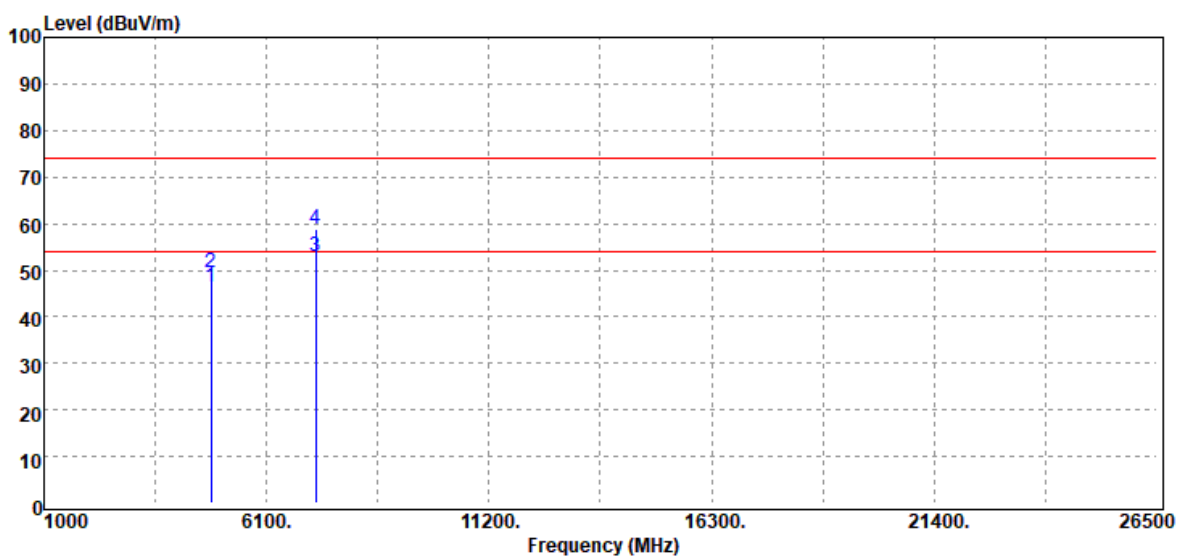


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	43.58	2.84	46.42	54.00	-7.58	Average
4824.00	46.54	2.84	49.38	74.00	-24.62	Peak
7236.00	42.63	10.44	53.07	54.00	-0.93	Average
7236.00	48.33	10.44	58.77	74.00	-15.23	Peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

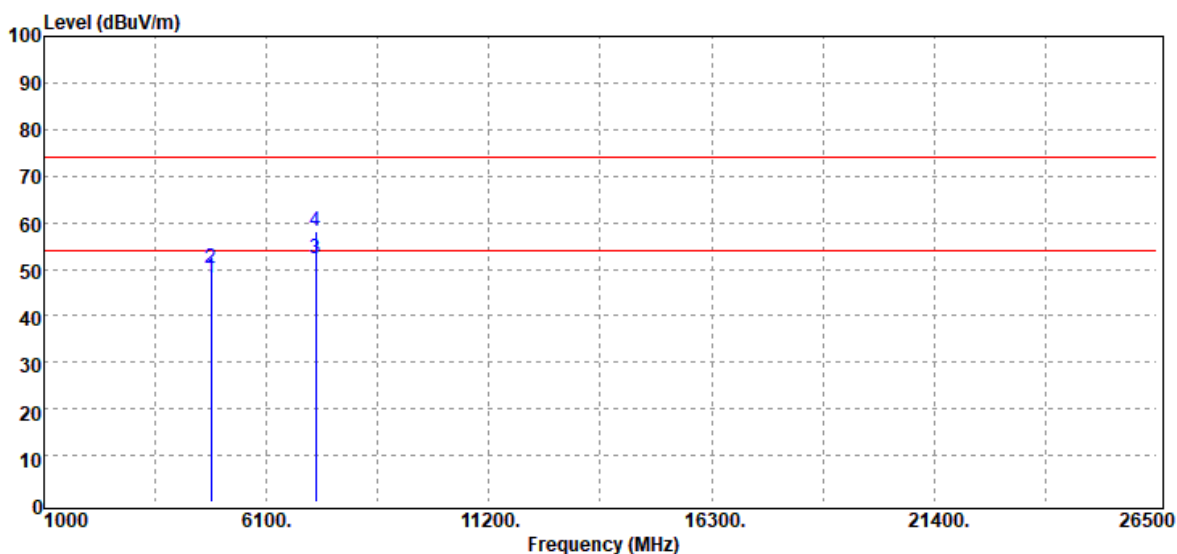


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	45.29	2.84	48.13	54.00	-5.87	Average
4824.00	47.49	2.84	50.33	74.00	-23.67	Peak
7236.00	41.69	10.44	52.13	54.00	-1.87	Average
7236.00	47.54	10.44	57.98	74.00	-16.02	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

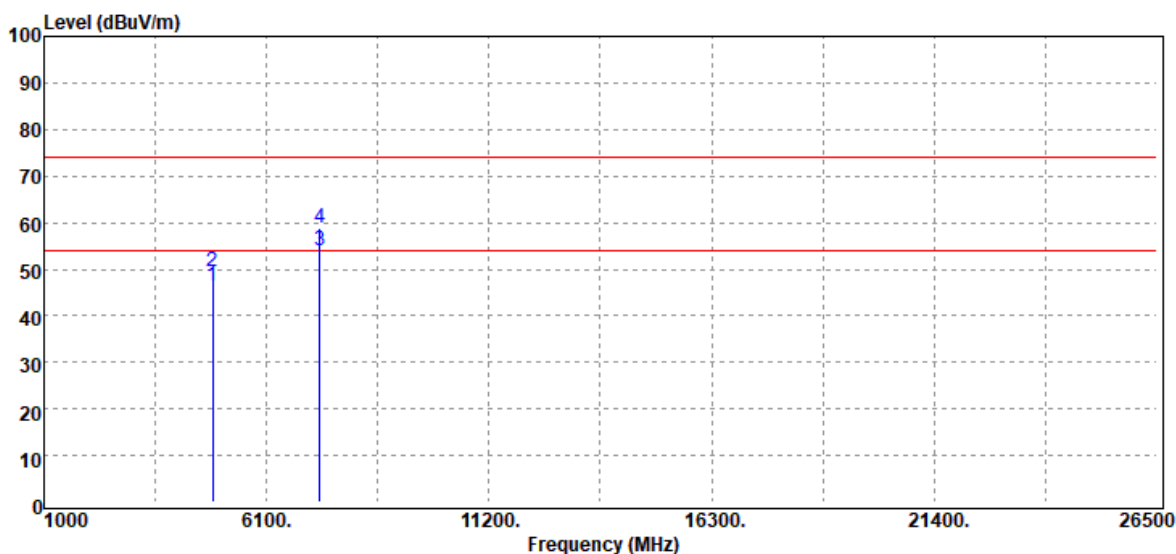


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	43.32	2.98	46.30	54.00	-7.70	Average
4874.00	46.38	2.98	49.36	74.00	-24.64	Peak
7311.00	42.55	10.60	53.15	54.00	-0.85	Average
7311.00	48.12	10.60	58.72	74.00	-15.28	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

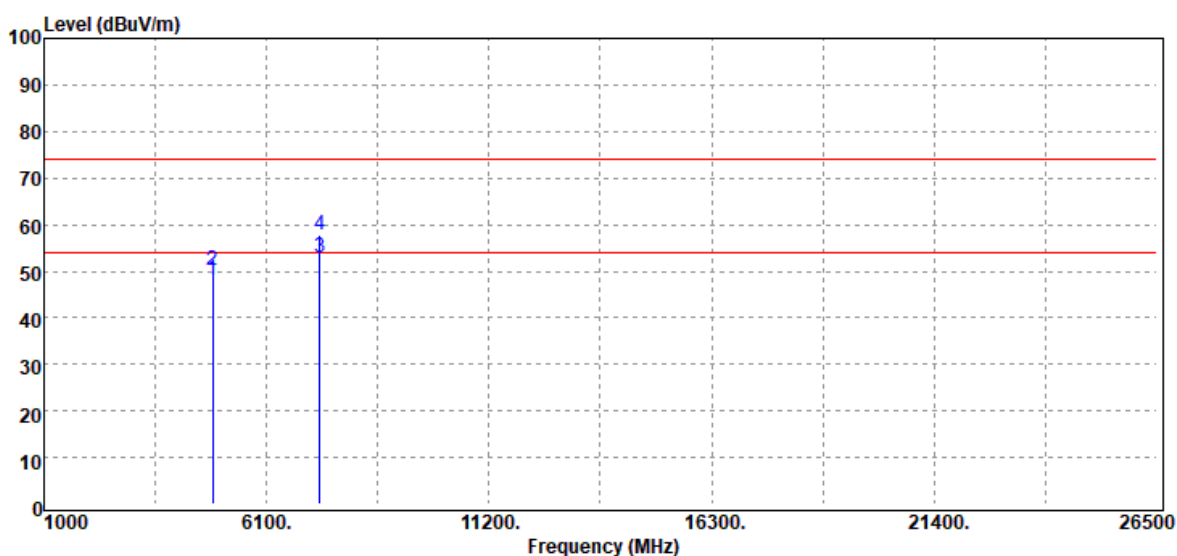


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	45.06	2.98	48.04	54.00	-5.96	Average
4874.00	47.22	2.98	50.20	74.00	-23.80	Peak
7311.00	42.36	10.60	52.96	54.00	-1.04	Average
7311.00	47.25	10.60	57.85	74.00	-16.15	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

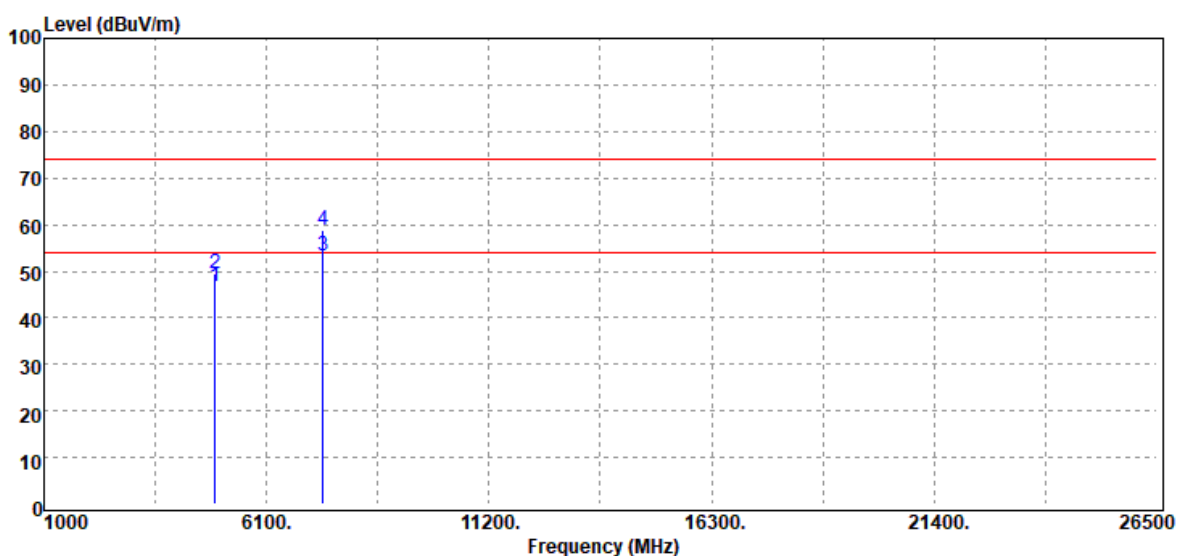


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	43.12	3.46	46.58	54.00	-7.42	Average
4924.00	46.03	3.46	49.49	74.00	-24.51	Peak
7386.00	42.38	10.85	53.23	54.00	-0.77	Average
7386.00	47.87	10.85	58.72	74.00	-15.28	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11b High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

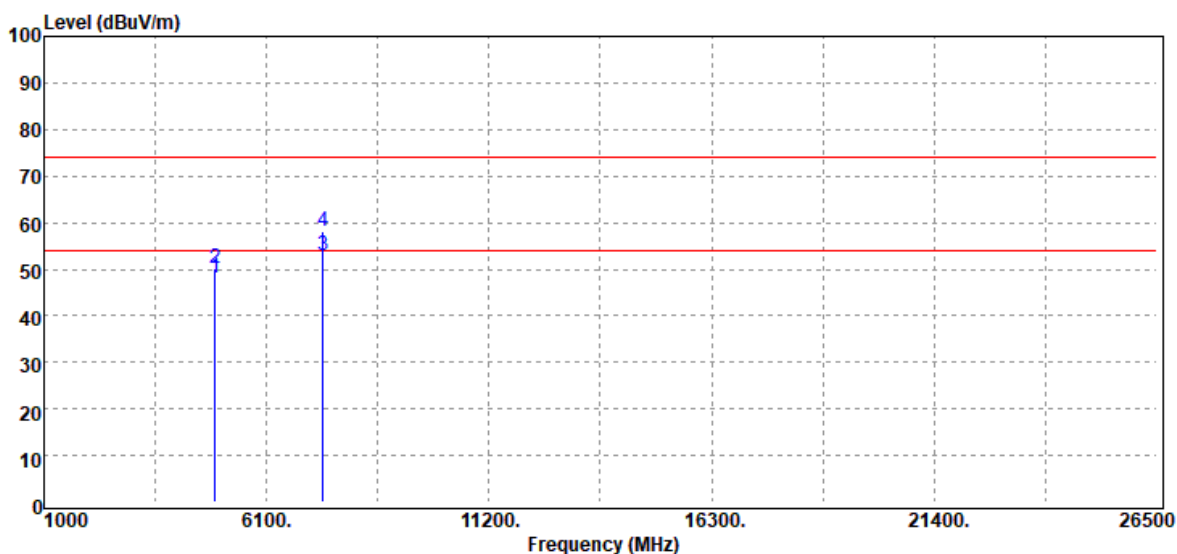


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	44.73	3.46	48.19	54.00	-5.81	Average
4924.00	46.82	3.46	50.28	74.00	-23.72	Peak
7386.00	42.06	10.85	52.91	54.00	-1.09	Average
7386.00	47.21	10.85	58.06	74.00	-15.94	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

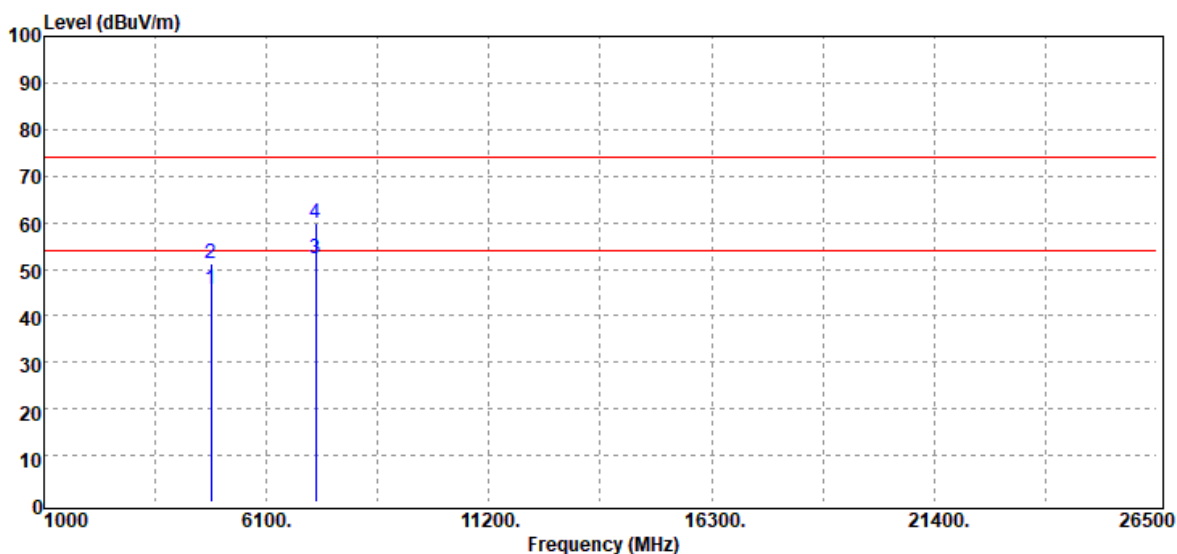


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	42.72	2.84	45.56	54.00	-8.44	Average
4824.00	48.32	2.84	51.16	74.00	-22.84	Peak
7236.00	41.89	10.44	52.33	54.00	-1.67	Average
7236.00	49.57	10.44	60.01	74.00	-13.99	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

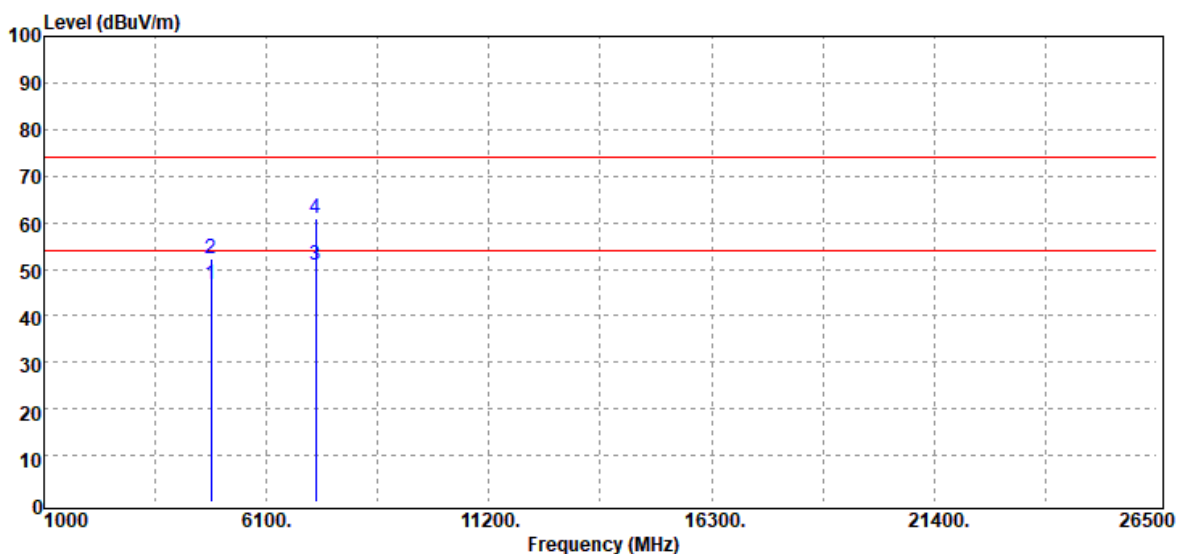


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	44.02	2.84	46.86	54.00	-7.14	Average
4824.00	49.24	2.84	52.08	74.00	-21.92	Peak
7236.00	40.51	10.44	50.95	54.00	-3.05	Average
7236.00	50.38	10.44	60.82	74.00	-13.18	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

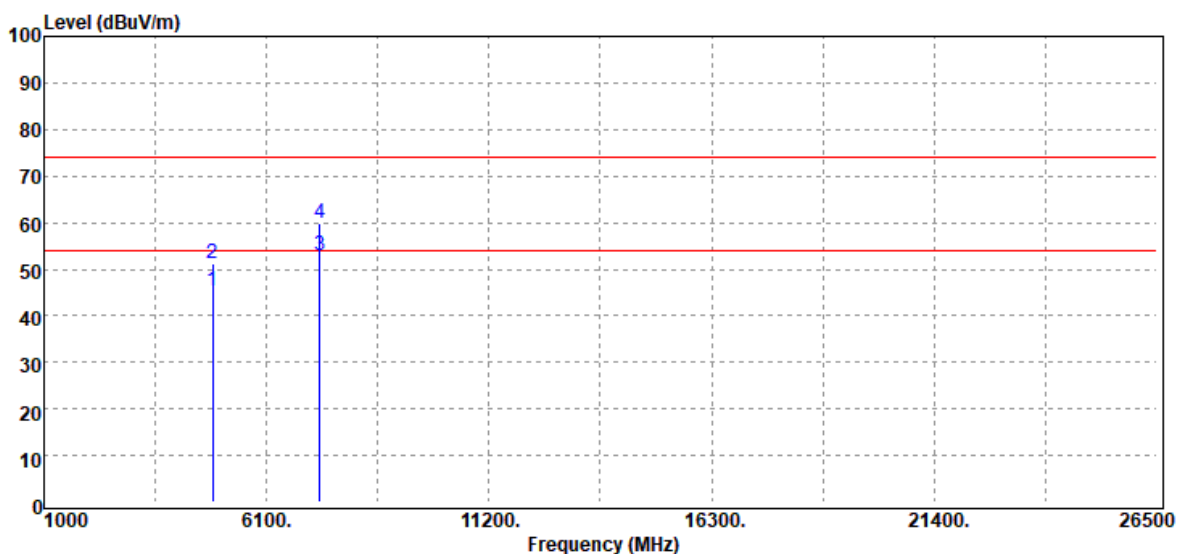


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	42.27	2.98	45.25	54.00	-8.75	Average
4874.00	48.14	2.98	51.12	74.00	-22.88	Peak
7311.00	42.38	10.60	52.98	54.00	-1.02	Average
7311.00	49.27	10.60	59.87	74.00	-14.13	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

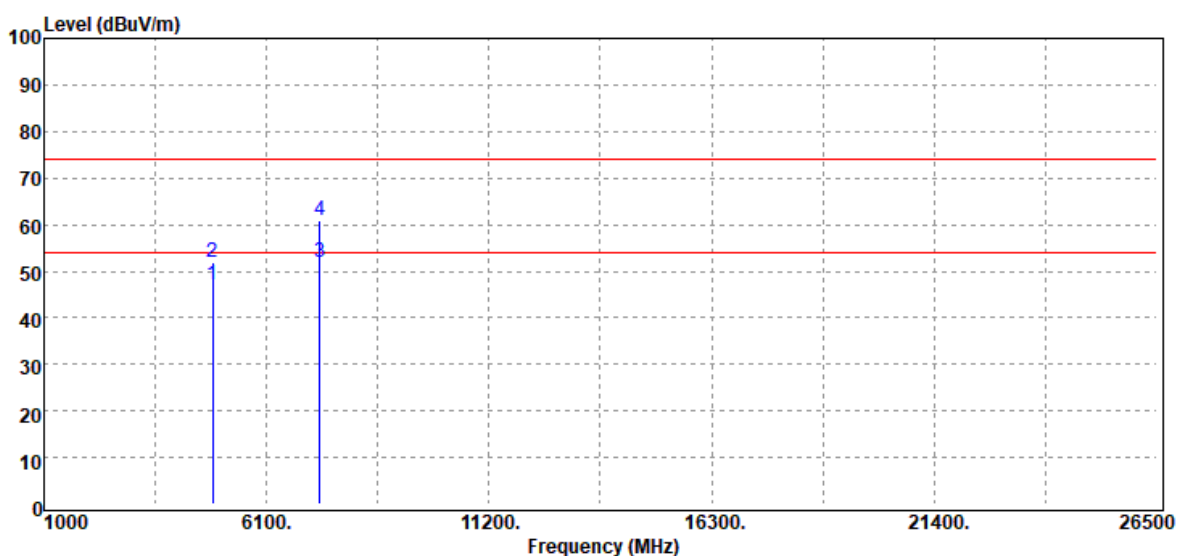


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	44.20	2.98	47.18	54.00	-6.82	Average
4874.00	49.04	2.98	52.02	74.00	-21.98	Peak
7311.00	41.21	10.60	51.81	54.00	-2.19	Average
7311.00	50.23	10.60	60.83	74.00	-13.17	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

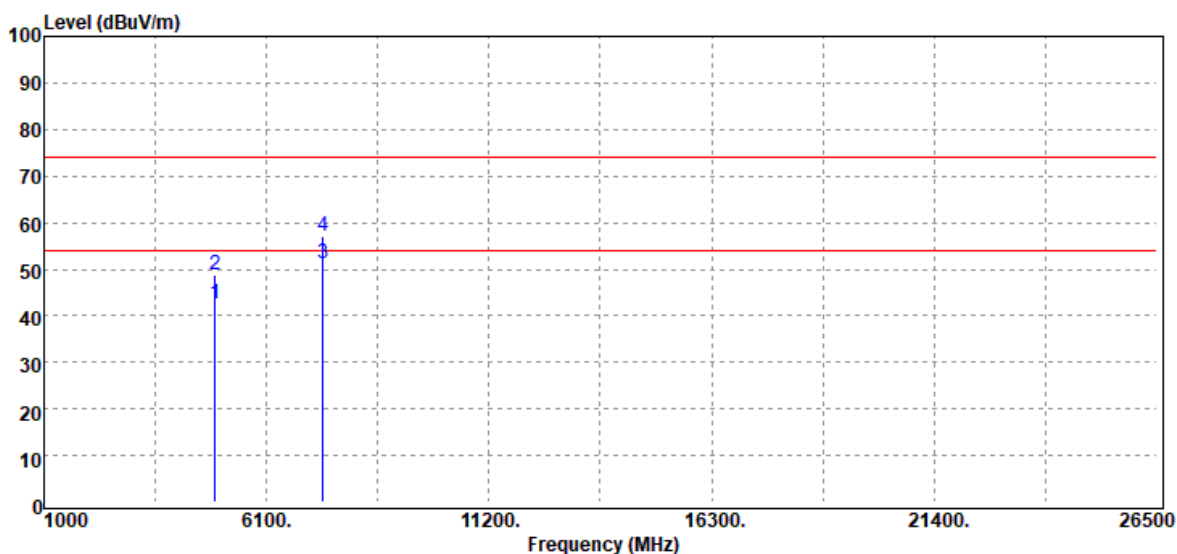


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	39.18	3.46	42.64	54.00	-11.36	Average
4924.00	45.22	3.46	48.68	74.00	-25.32	Peak
7386.00	40.23	10.85	51.08	54.00	-2.92	Average
7386.00	46.12	10.85	56.97	74.00	-17.03	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11g High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

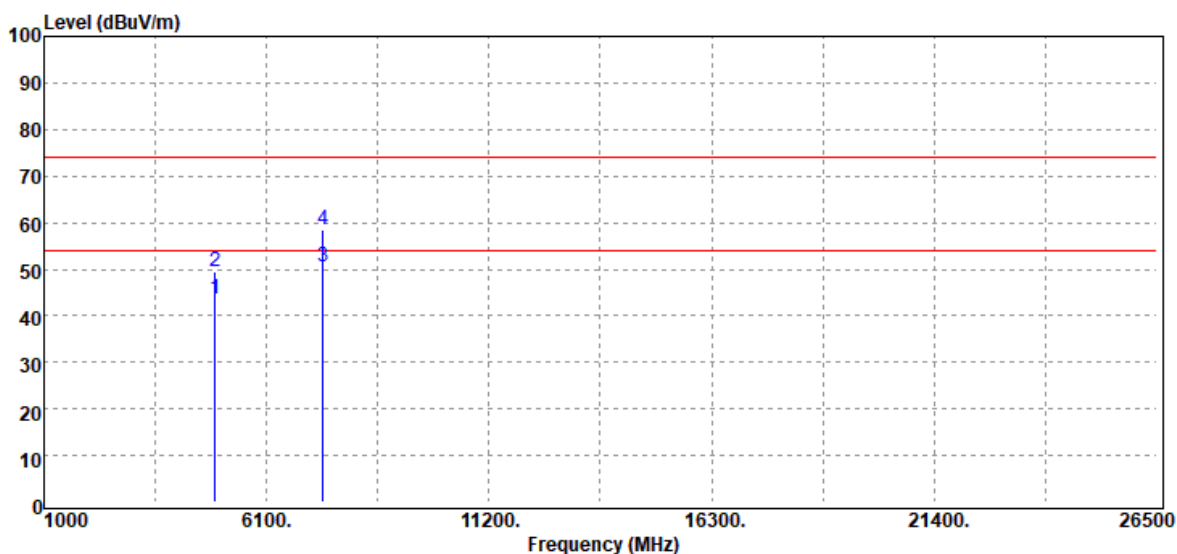


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	40.11	3.46	43.57	54.00	-10.43	Average
4924.00	45.98	3.46	49.44	74.00	-24.56	Peak
7386.00	39.63	10.85	50.48	54.00	-3.52	Average
7386.00	47.55	10.85	58.40	74.00	-15.60	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

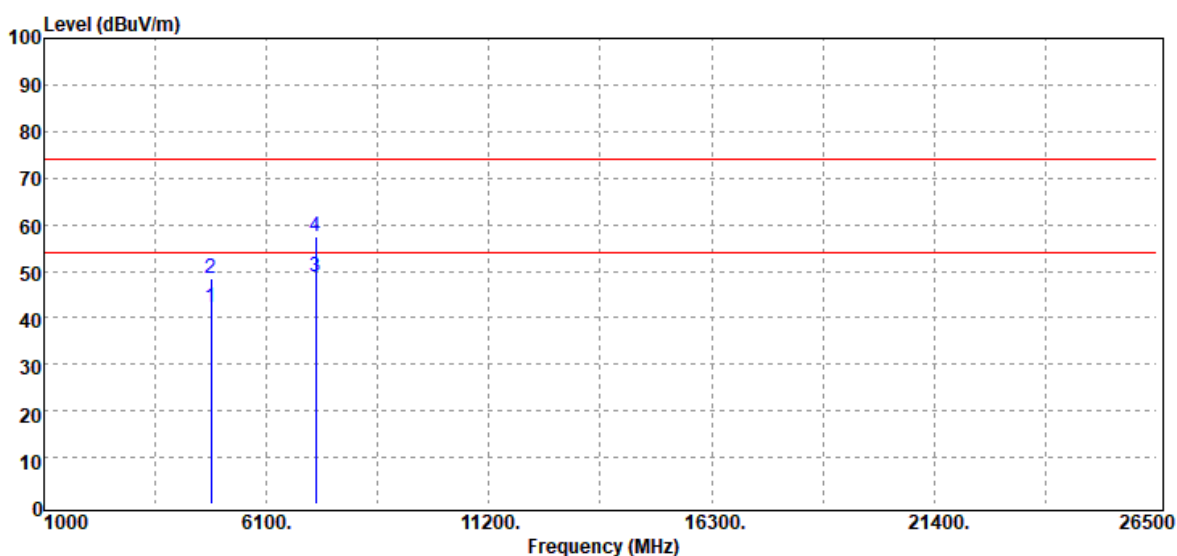


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	39.35	2.84	42.19	54.00	-11.81	Average
4824.00	45.58	2.84	48.42	74.00	-25.58	Peak
7236.00	38.23	10.44	48.67	54.00	-5.33	Average
7236.00	47.12	10.44	57.56	74.00	-16.44	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

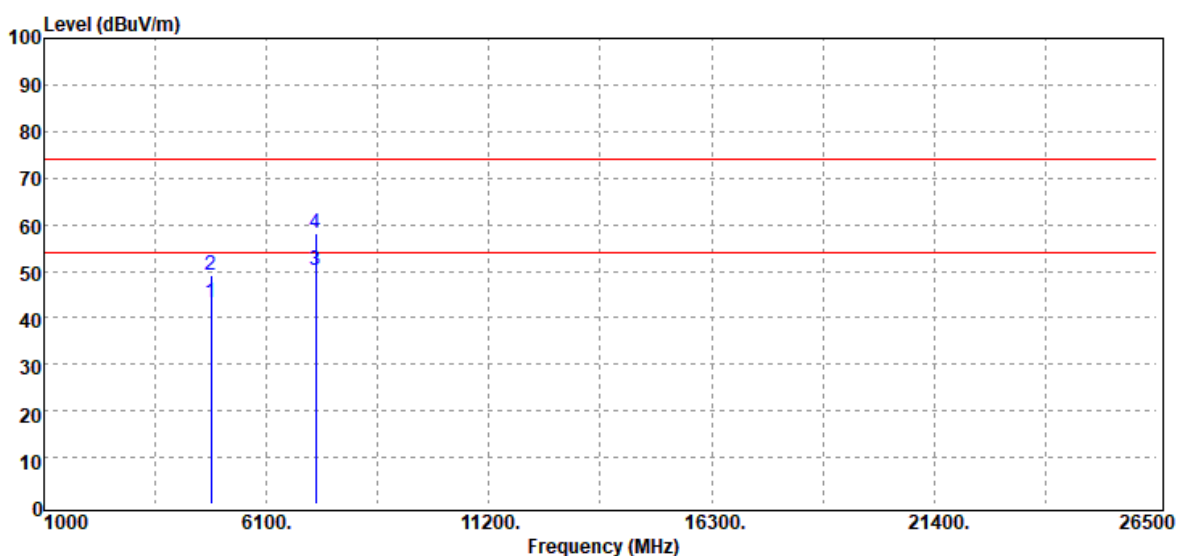


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824.00	40.51	2.84	43.35	54.00	-10.65	Average
4824.00	46.21	2.84	49.05	74.00	-24.95	Peak
7236.00	39.63	10.44	50.07	54.00	-3.93	Average
7236.00	47.69	10.44	58.13	74.00	-15.87	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

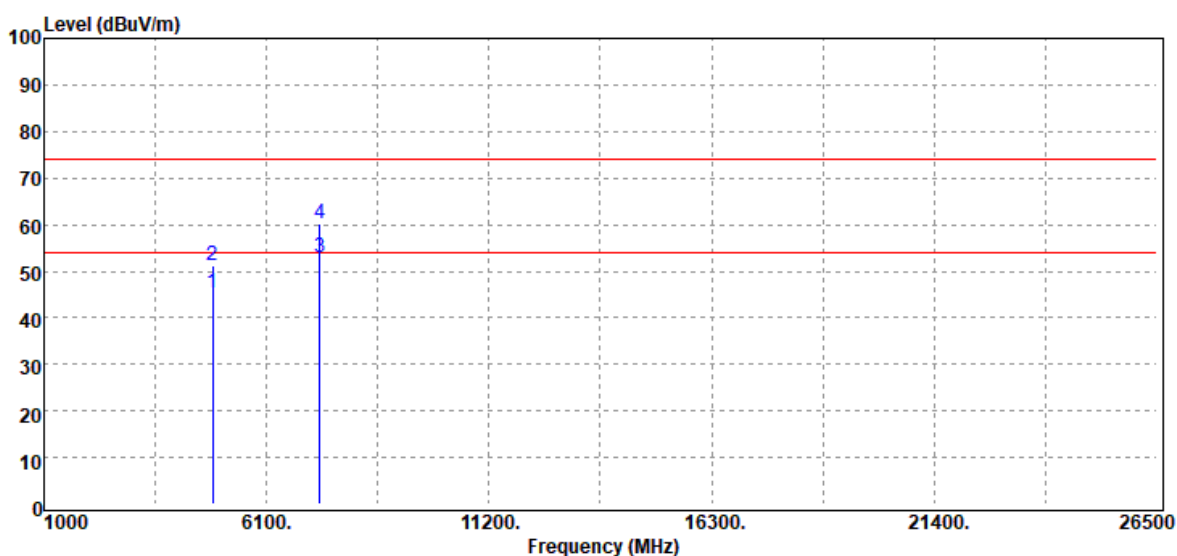


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	42.40	2.98	45.38	54.00	-8.62	Average
4874.00	48.36	2.98	51.34	74.00	-22.66	Peak
7311.00	42.19	10.60	52.79	54.00	-1.21	Average
7311.00	49.65	10.60	60.25	74.00	-13.75	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

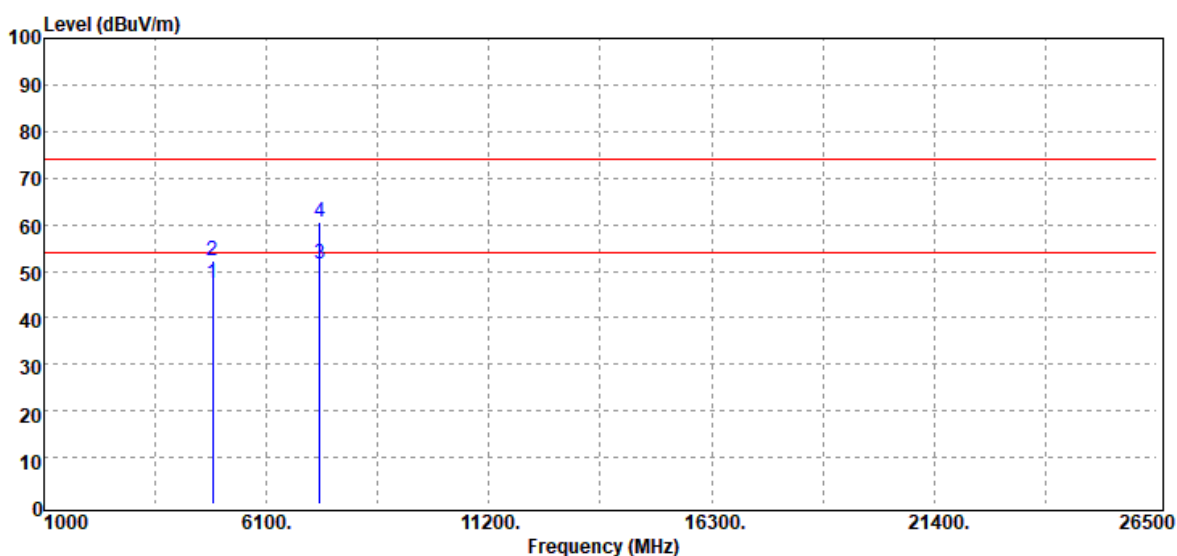

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	44.33	2.98	47.31	54.00	-6.69	Average
4874.00	49.38	2.98	52.36	74.00	-21.64	Peak
7311.00	41.03	10.60	51.63	54.00	-2.37	Average
7311.00	49.96	10.60	60.56	74.00	-13.44	Peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.




Report No.: T190315W01-RP3

Page: 79 / 86

Rev.: 01

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

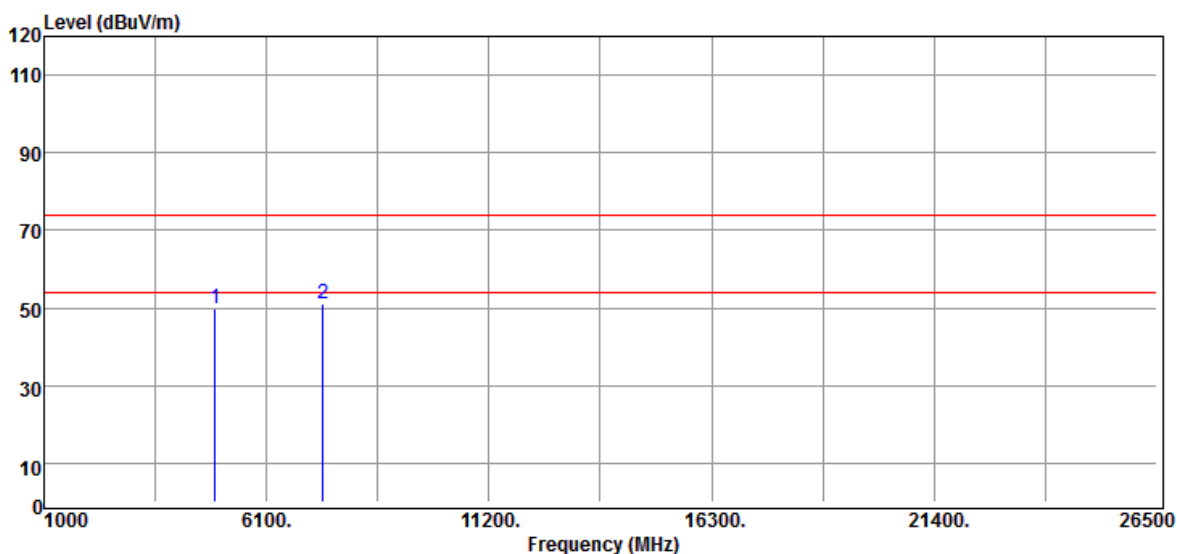


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	39.39	3.46	42.85	54.00	-11.15	Average
4924.00	45.31	3.46	48.77	74.00	-25.23	Peak
7386.00	38.12	10.85	48.97	54.00	-5.03	Average
7386.00	46.78	10.85	57.63	74.00	-16.37	Peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT20 High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

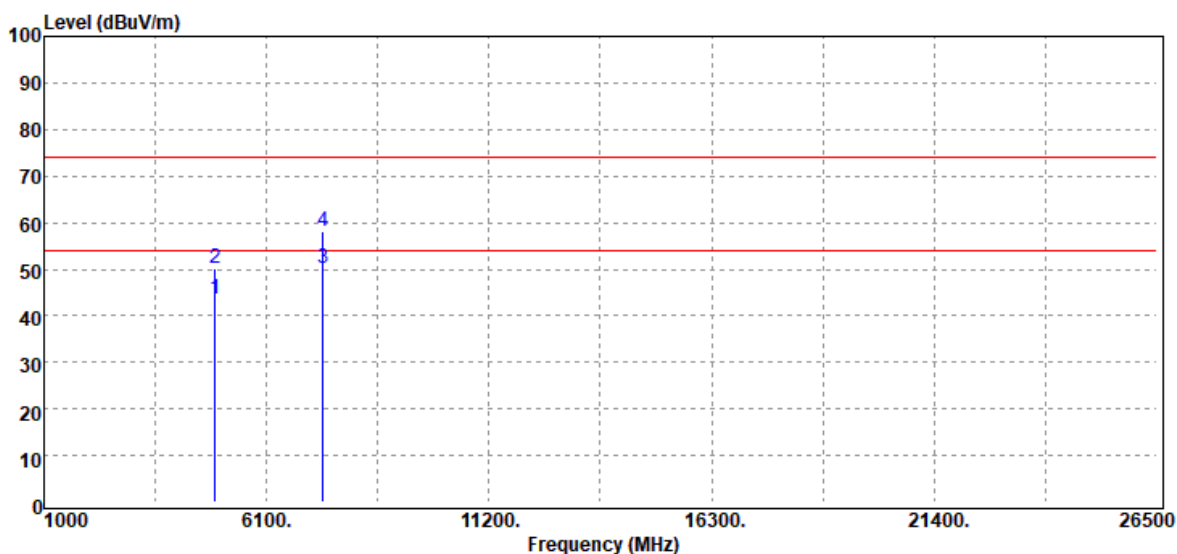


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4924.00	40.23	3.46	43.69	54.00	-10.31	Average
4924.00	46.88	3.46	50.34	74.00	-23.66	Peak
7386.00	39.36	10.85	50.21	54.00	-3.79	Average
7386.00	47.31	10.85	58.16	74.00	-15.84	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Report No.: T190315W01-RP3

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

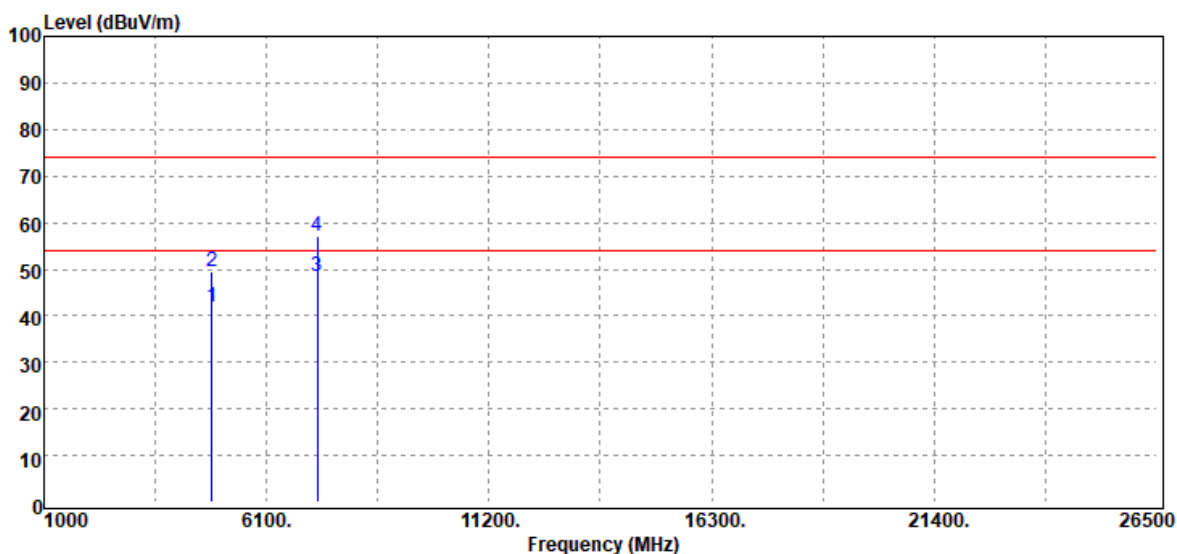


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.00	39.11	2.84	41.95	54.00	-12.05	Average
4844.00	46.62	2.84	49.46	74.00	-24.54	Peak
7266.00	38.25	10.30	48.55	54.00	-5.45	Average
7266.00	46.89	10.30	57.19	74.00	-16.81	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Low CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

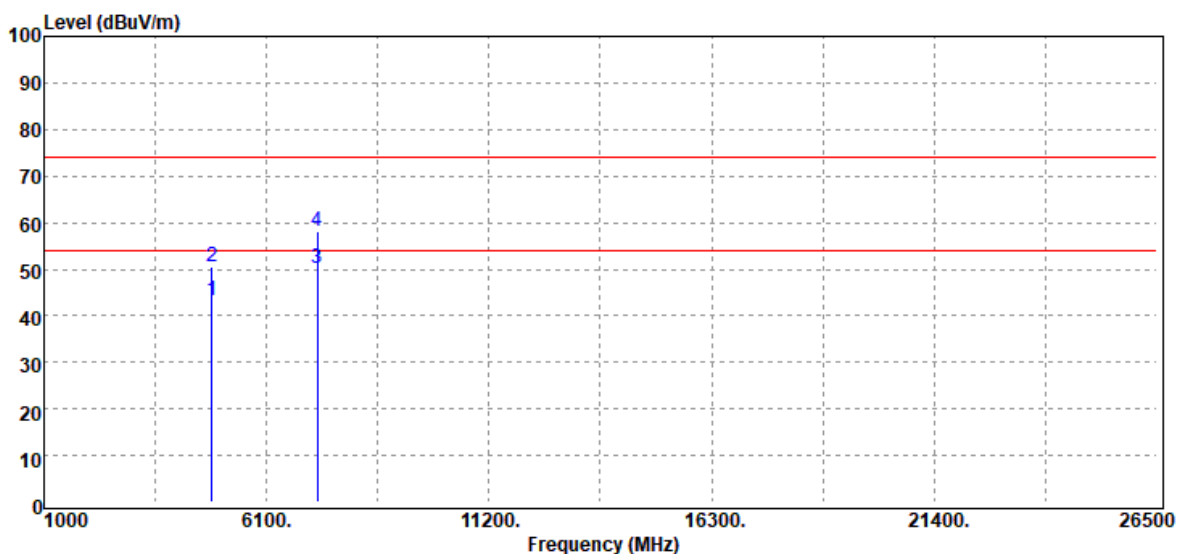


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844.00	40.32	2.84	43.16	54.00	-10.84	Average
4844.00	47.85	2.84	50.69	74.00	-23.31	Peak
7266.00	39.77	10.30	50.07	54.00	-3.93	Average
7266.00	47.86	10.30	58.16	74.00	-15.84	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

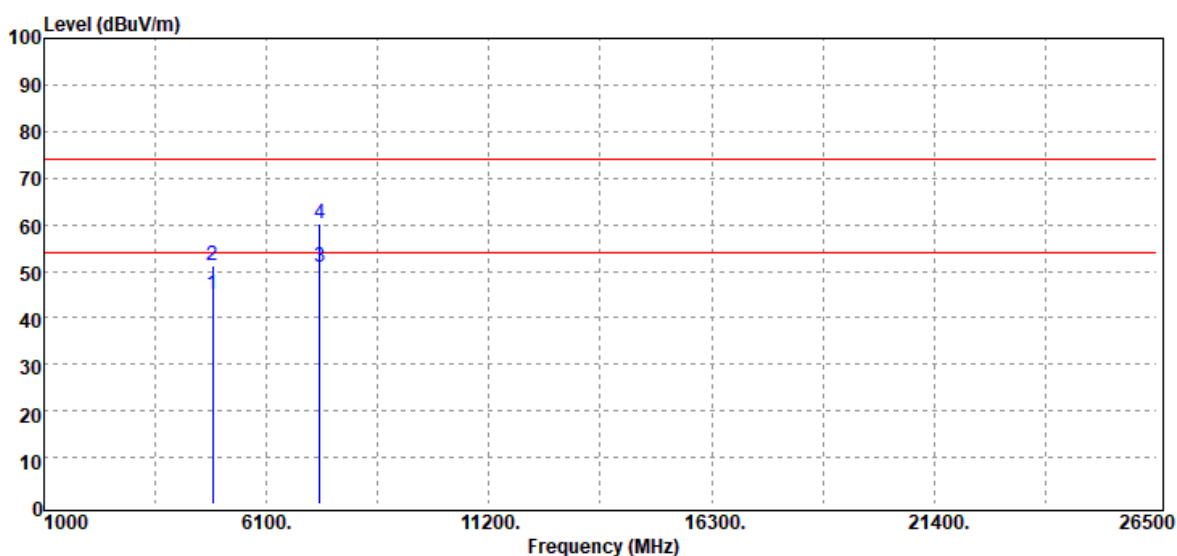


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	42.07	2.98	45.05	54.00	-8.95	Average
4874.00	48.12	2.98	51.10	74.00	-22.90	Peak
7311.00	40.35	10.60	50.95	54.00	-3.05	Average
7311.00	49.51	10.60	60.11	74.00	-13.89	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 Mid CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

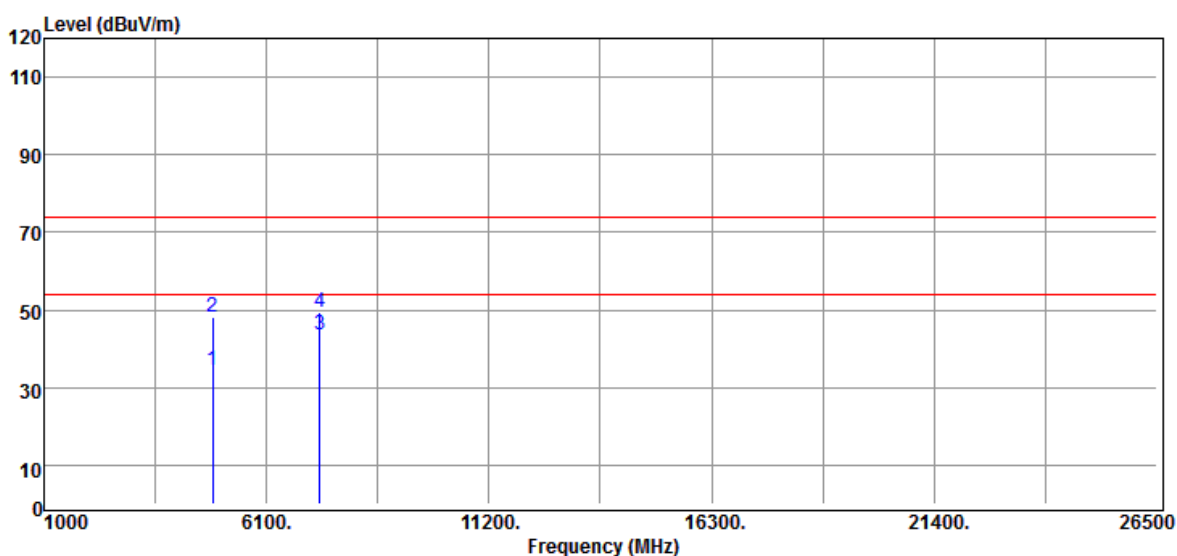


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4874.00	43.22	2.98	46.20	54.00	-7.80	Average
4874.00	49.77	2.98	52.75	74.00	-21.25	Peak
7311.00	41.25	10.60	51.85	54.00	-2.15	Average
7311.00	50.12	10.60	60.72	74.00	-13.28	Peak
N/A						

Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Vertical	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

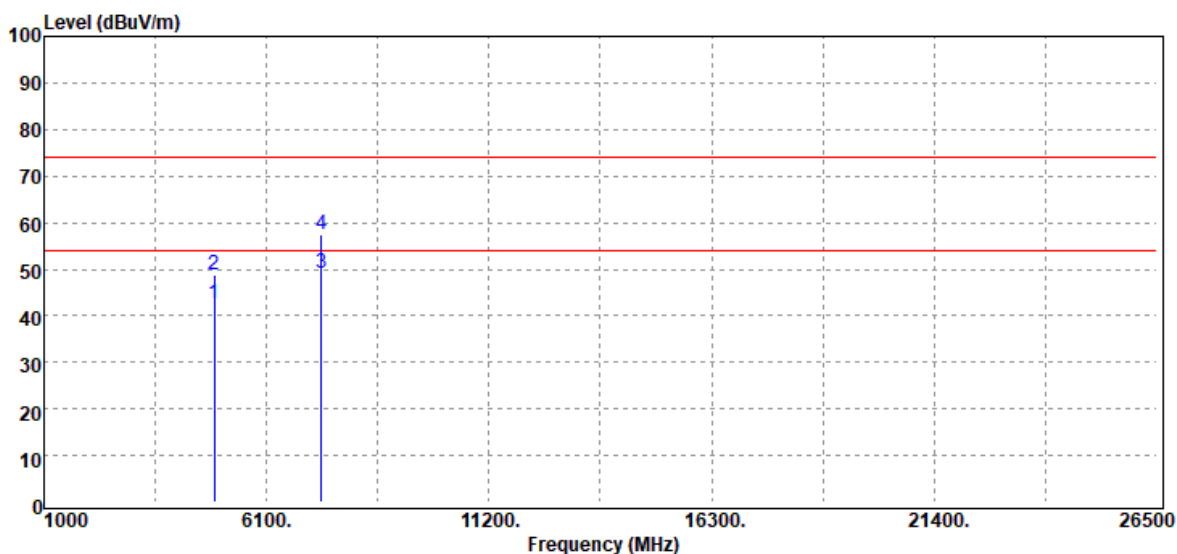

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.00	39.21	3.22	42.43	54.00	-11.57	Average
4904.00	45.67	3.22	48.89	74.00	-25.11	Peak
7365.00	38.13	11.00	49.13	54.00	-4.87	Average
7365.00	46.54	11.00	57.54	74.00	-16.46	Peak
N/A						


Remark:

- Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.



Report No.: T190315W01-RP3

Test Mode	IEEE 802.11n HT40 High CH	Temp/Hum	28.2(°C)/ 50%RH
Test Item	Harmonic	Test Date	July 12, 2019
Polarize	Horizontal	Test Engineer	Dally Hong
Detector	Peak and Average	Test Voltage	

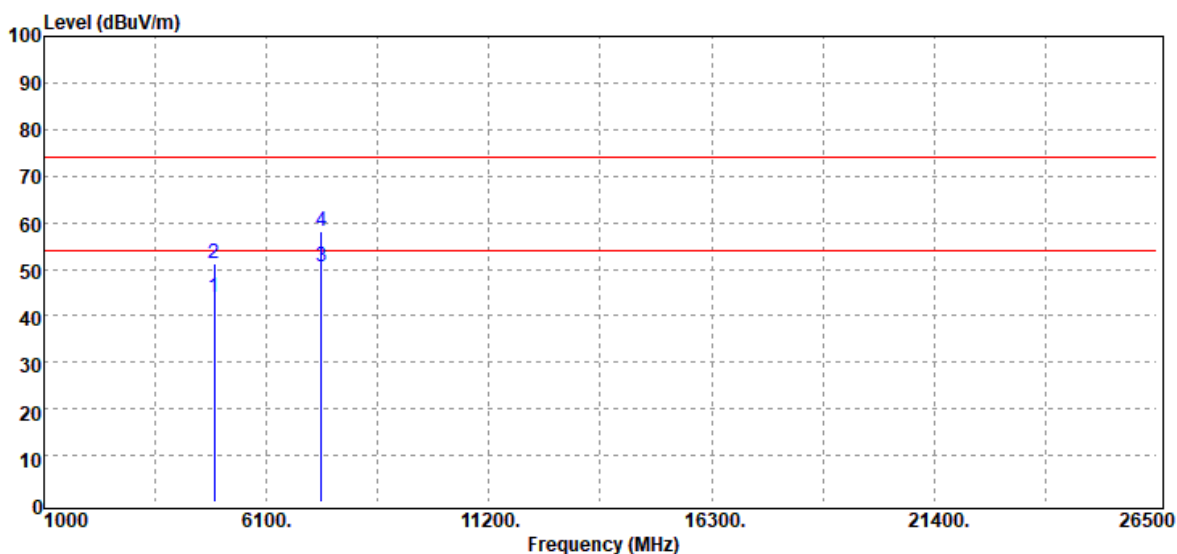

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4904.00	40.66	3.22	43.88	54.00	-10.12	Average
4904.00	47.87	3.22	51.09	74.00	-22.91	Peak
7356.00	39.62	11.01	50.63	54.00	-3.37	Average
7356.00	47.14	11.01	58.15	74.00	-15.85	Peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.

- End of Test Report -