

PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

LG Electronics U.S.A, Inc. 1000 Sylvan Avenue Englewood Cliffs, NJ 07632 United States **Date of Testing:** 07/22/2019 - 07/31/2019 **Test Site/Location:**

PCTEST Lab, Columbia, MD, USA

Test Report Serial No.: 1M1907050113-08.ZNF

Date of Issue: 08/08/2019

FCC ID: ZNFX120WM

APPLICANT: LG ELECTRONICS U.S.A, INC.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Certification
FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type: Portable Handset **Model:** LM-X120WM

Additional Model(s): LMX120WM, X120WM

Test Device Serial No.: Pre-Production Sample [S/N: 04644]

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY)

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.







FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 1 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 1 01 55

TABLE OF CONTENTS

1.	INTRODUCTION	3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	5
4.	METHOD OF MEASUREMENT	7
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	17
6.	FCC 3G MEASUREMENTS	19
7.	T-COIL TEST SUMMARY	20
8.	MEASUREMENT UNCERTAINTY	26
9.	EQUIPMENT LIST	27
10.	TEST DATA	28
11.	CALIBRATION CERTIFICATES	43
12.	CONCLUSION	50
13.	REFERENCES	51
14.	TEST SETUP PHOTOGRAPHS	53

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 2 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 2 of 55

1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 2 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 3 of 55

2. **DUT DESCRIPTION**



FCC ID: ZNFX120WM

Applicant: LG Electronics U.S.A, Inc.

1000 Sylvan Avenue

Englewood Cliffs, NJ 07632

United States

Model: LM-X120WM

Additional Model(s): LMX120WM, X120WM

Serial Number: 04644 HW Version: Rev.1.0 SW Version: X120WM08a

Antenna: Internal Antenna DUT Type: Portable Handset

Table 2-1 ZNFX120WM HAC Air Interfaces

ZIVI X IZOVVIVI I IAO All' III CITACCS							
Air-Interface	Band (MHz)	Туре Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated	
	850	VO	Yes	Yes: WIFI or BT	CMRS Voice ¹	EFR	
GSM	1900	VO	res	res. Wiri Oi Bi	CIVINS VOICE	EFN	
	GPRS/EDGE	DT	No	Yes: WIFI or BT	N/A	N/A	
	850						
UMTS	1700	VD	Yes	Yes: WIFI or BT	CMRS Voice ¹	Yes: WIFI or BT CMRS Voice ¹ NB A	NB AMR
OWITS	1900					Ì	
	HSPA	DT	No	Yes: WIFI or BT	N/A	N/A	
	700 (B12)						
	700 (B17)						
	780 (B13)						
LTE (FDD)	850 (B5)	VD	Yes	Yes: WIFI or BT	es: WIFI or BT VOLTE ¹ VOLTE: NB AM	VoLTE: NB AMR, WB AMR	
	1700 (B4)						
	1700 (B66)						
	1900 (B2)						
WIFI	2450	DT	No	Yes: GSM, UMTS, or LTE	N/A	N/A	
BT	2450	DT	No	Yes: GSM, UMTS, or LTE	N/A	N/A	
			Notes: 1. Reference le	evel in accordance with 7.4.2.1 of ANSI C63.19-20	11 and July 2012 C63 VoLTE Interpreta	ation.	

LTE Band Selection

This device supports the following pairs of LTE bands with similar frequencies: LTE B12 & B17 and B66 & B4. These pairs of LTE bands have the same target powers and share the same transmission paths. Since the supported frequency span for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE bands (LTE B12 and B66) were evaluated for hearing-aid compliance.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 4 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 4 01 55

© 2019 PCTEST Engineering Laboratory, Inc.

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. MAGNETIC COUPLING

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be \geq -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

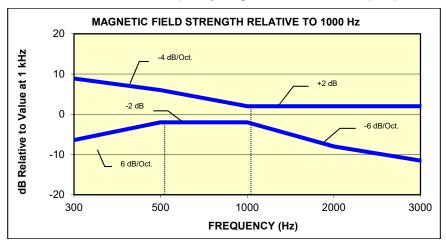


Figure 3-1
Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

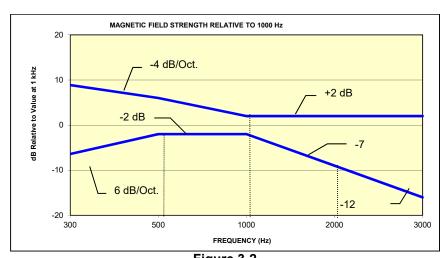


Figure 3-2
Magnetic Field frequency response for wireless devices with an axial field that exceeds
-15 dB(A/m) at 1 kHz

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 5 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 5 01 55

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Category	Telephone RF Parameters		
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]		
T1	0 to 10 dB		
T2	10 to 20 dB		
Т3	20 to 30 dB		
T4	> 30 dB		
Table 3-1 Magnetic Coupling Parameters			

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 6 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 6 01 55

METHOD OF MEASUREMENT

I. **Test Setup**

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

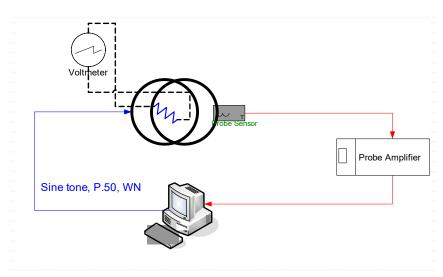


Figure 4-1 Validation Setup with Helmholtz Coil

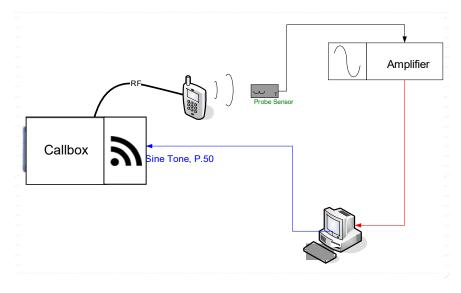


Figure 4-2 **T-Coil Test Setup**

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 7 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 7 of 55

II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec

Line Voltage: 115 VAC

Line Frequency: 60 Hz

Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. ITU-T P.50 Artificial Voice

Manufacturer: ITU-T


Active Frequency Range: 100 Hz – 8 kHz

Stimulus Type: Male and Female, no spaces

Single Sample 20.96 seconds

Duration: 20.96 sec

Activity Level: 100%



Spectral Characteristic of full P.50





Figure 4-5Temporal Characteristic of full P.50

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 8 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 6 01 55



ABM2 Measurement Block Diagram:



Figure 4-6 Magnetic Measurement Processing Steps

IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements.
 - Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - a. The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

Where H_c = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.13m; R=10.193Ω and using V=29mV:

$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 24).

FCC ID: ZNFX120WM	PCTEST INDIVIDUAL LABORATOR, INC.	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 9 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 9 01 55

Frequency Response Validation
 The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the P.50 signal as shown below:



Figure 4-7 Frequency Response Validation

d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1
ABM2 Frequency Response Validation

	HBI, A -	HBI, A -	
f (Hz)	Measured	Theoretical	dB Var.
` .	(dB re 1kHz)	(dB re 1kHz)	
100	-16.180	-16.170	-0.010
125	-13.257	-13.250	-0.007
160	-10.347	-10.340	-0.007
200	-8.017	-8.010	-0.007
250	-5.925	-5.920	-0.005
315	-4.045	-4.040	-0.005
400	-2.405	-2.400	-0.005
500	-1.212	-1.210	-0.002
630	-0.349	-0.350	0.001
800	0.071	0.070	0.001
1000	0.000	0.000	0.000
1250	-0.503	-0.500	-0.003
1600	-1.513	-1.510	-0.003
2000	-2.778	-2.780	0.002
2500	-4.316	-4.320	0.004
3150	-6.166	-6.170	0.004
4000	-8.322	-8.330	0.008
5000	-10.573	-10.590	0.017
6300	-13.178	-13.200	0.022
8000	-16.241	-16.270	0.029
10000	-19.495	-19.520	0.025

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 10 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 10 01 55




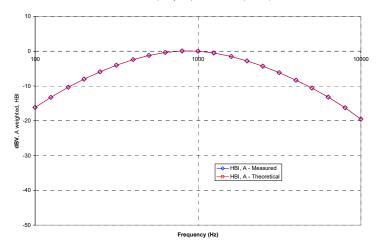


Figure 4-8
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-9). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2
ABM2 Power Sum Validation

7121121 01101 04111 141144101				
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)	
-60	-60.36	-60.2	0.16	
-50	-50.19	-50.13	0.06	
-40	-40.14	-40.03	0.11	
-30	-30.13	-30.01	0.12	
-20	-20.12	-20	0.12	
-10	-10.14	-10	0.14	

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 11 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 11 of 55





Figure 4-10
ABM2 Power Sum Validation

- 3. Measurement Test Setup
 - a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-12, the grid is not to scale but merely a graphical representation of the coordinate system in use):

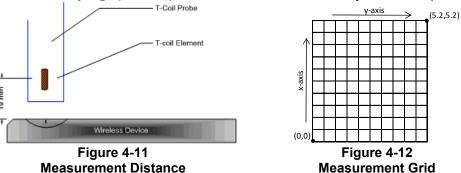

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-14 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN TM	TDMA (22 and 11 Hz)	-18

 See Section 5 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE).

FCC ID: ZNFX120WM	PCTEST VACUUM CANDATON (NC.	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dago 10 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 12 of 55

© 2019 PCTEST Engineering Laboratory, Inc.

- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 6 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5.
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
 - a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
 - b. Frequency Response
 - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
 - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-7. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
 - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
 - c. Signal Quality Index
 - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
 - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
 - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 12 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 13 of 55

V. **Test Setup**

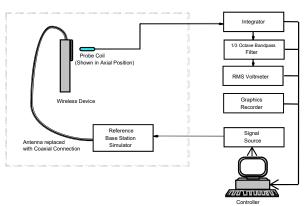


Figure 4-13 **Audio Magnetic Field Test Setup**

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

Deviation from C63.19 Test Procedure VI.

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS were tested for T-coil unless otherwise noted. See Table 2-1 for more details regarding which modes were tested.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 14 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		rage 14 01 55

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Low, middle and high channels were tested in each band for FCC compliance evaluation to ensure the maximum emission is captured across the entire band.

Table 4-3
Center Channels and Frequencies

Test frequencies & associated channels				
Channel	Frequency (MHz)			
Cellular 850				
190 (GSM)	836.60			
4183 (UMTS)	836.60			
AWS 1750				
1412 (UMTS)	1730.40			
PCS 1900				
661 (GSM)	1880			
9400 (UMTS)	1880			

2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. See Tables 7-4 to 7-8 for LTE bandwidths and channels.

FCC ID: ZNFX120WM	PCTEST VENEZIANE LANGERTOFF, INC.	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 15 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 15 of 55

IX. Test Flow

The flow diagram below was followed (From C63.19):

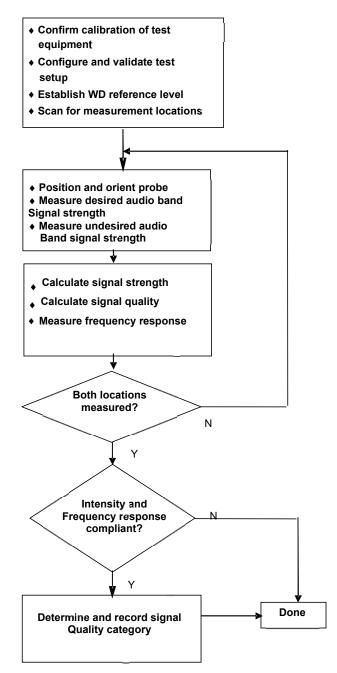


Figure 4-14 C63.19 T-Coil Signal Test Process

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	1 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 16 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 10 01 55

5. **VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION**

I. Test System Setup for VoLTE over IMS T-coil Testing

1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

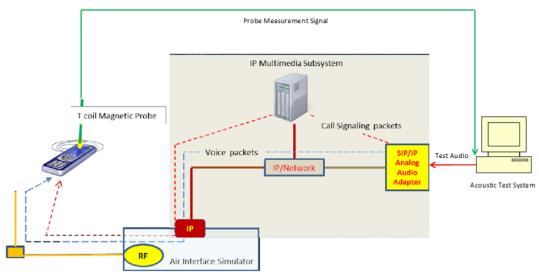


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 17 01 55

^{*} http://c63.org/documents/misc/posting/new_interpretations.htm

II. **DUT Configuration for VoLTE over IMS T-coil Testing**

1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 16QAM, 1RB, 99% RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

> Table 5-1 **VoLTE over IMS SNNR by Radio Configuration**

rozi z oro: imo oittitt by itaaio oomigaiation										
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]	
66	1745.0	132322	20	QPSK	1	0	8.84	-21.61	30.45	
66	1745.0	132322	20	QPSK	1	50	9.01	-21.35	30.36	
66	1745.0	132322	20	QPSK	1	99	8.95	-21.39	30.34	
66	1745.0	132322	20	QPSK	50	0	9.08	-21.59	30.67	
66	1745.0	132322	20	QPSK	50	25	9.10	-21.71	30.81	
66	1745.0	132322	20	QPSK	50	50	8.79	-21.83	30.62	
66	1745.0	132322	20	QPSK	100	0	9.09	-22.07	31.16	
66	1745.0	132322	20	16QAM	1	0	9.20	-21.50	30.70	
66	1745.0	132322	20	16QAM	1	50	8.72	-22.16	30.88	
66	1745.0	132322	20	16QAM	1	99	8.75	-21.58	30.33	
66	1745.0	132322	20	16QAM	50	0	9.08	-21.38	30.46	
66	1745.0	132322	20	16QAM	50	25	8.94	-21.65	30.59	
66	1745.0	132322	20	16QAM	50	50	9.02	-21.46	30.48	
66	1745.0	132322	20	16QAM	100	0	9.21	-21.48	30.69	


2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. The WB AMR 6.60kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

> Table 5-2 AMR Codec Investigation - VolTE over IMS

Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	10.69	9.69	13.52	13.27			
ABM2 (dBA/m)	-22.05	-20.92	-21.58	-21.58 -21.05		Band 66	132322
Frequency Response	Pass	Pass	Pass	Pass	- Axial	20MHz	132322
S+N/N (dB)	32.74	30.61	35.10	34.32			

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC = "Max Power"



Audio Band Magnetic Curve Measurement Block Diagram

	7 101 011 0 2 0111 01 111 019			
FCC ID: ZNFX120WM	PETEST'	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 18 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 16 01 55

FCC 3G MEASUREMENTS 6.

I. **UMTS Test Configurations**

AMR at 12.2kbps, 13.6kbps SRB was used for the testing as the worst-case configuration for the handset. See below plot for ABM noise comparison between vocoder rates:




Figure 6-1 **UMTS Audio Band Magnetic Noise**

Table 6-1 **Codec Investigation - UMTS**

Codec Setting:	AMR 12.2kbps	AMR 7.95kbps	AMR 4.75kbps	Orientation	Channel
ABM1 (dBA/m)	9.00	8.72	8.74		
ABM2 (dBA/m)	-26.74	-27.22	-27.14	Axial	9400
Frequency Response	Pass	Pass	Pass	Axial	9400
S+N/N (dB)	35.74	35.94	35.88		

- Mute on; Backlight off; Max Volume; Max Contrast
- TPC="All 1s"



Audio Band Magnetic Curve Measurement Block Diagram

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 19 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 19 01 55

T-COIL TEST SUMMARY

Table 7-1 **Consolidated Tabled Results**

Consolidated Labled Results												
		-	esponse gin	_	netic / Verdict		SNNR dict	Margin from	C63.19-2011			
CC2 40) Castian	8.3.2		8.3	3.1	8.3	3.4	(dB)	Rating			
C63. 18	9 Section	Axial	Radial	Axial	Radial	Axial	Radial					
CCM	GSM Cellular		NA	PASS	PASS	PASS	PASS	-6.83	Т3			
GSIVI	PCS	PASS	NA	PASS	PASS	PASS	PASS	-0.03	13			
	Cellular	PASS	NA	PASS	PASS	PASS	PASS					
UMTS	AWS	PASS	NA	PASS	PASS	PASS	PASS	-14.59	-14.59	T4		
	PCS	PASS	NA	PASS	PASS	PASS	PASS					
	B12	PASS	NA	PASS	PASS	PASS	PASS					
	B13	PASS	NA	PASS	PASS	PASS	PASS					
LTE FDD	B5	PASS	NA	PASS	PASS	PASS	PASS	-8.10	Т3			
	B66	PASS	NA	PASS	PASS	PASS	PASS					
	B2	PASS	NA	PASS	PASS	PASS	PASS					

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 20 of 55	
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 20 01 55	

I. Raw Handset Data

Table 7-2
Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		128	13.52	-15.89		1.27	29.41	20.00	-9.41	Т3	
	Axial	190	13.50	-15.66	-62.03	1.25	29.16	20.00	-9.16	Т3	1.8, 2.6
GSM850		251	13.87	-15.62		1.25	29.49	20.00	-9.49	Т3	
GSIVIOSU		128	3.82	-23.25	-63.33 N/A		27.07	20.00	-7.07	Т3	
	Radial	190	3.62	-23.81		N/A	27.43	20.00	-7.43	Т3	1.8, 2.0
		251	3.58	-23.38		26.96	20.00	-6.96	Т3		
		512	13.15	-16.05		1.22	29.20	20.00	-9.20	Т3	
	Axial	661	13.71	-16.18	-62.03	1.30	29.89	20.00	-9.89	Т3	1.8, 2.6
GSM1900		810	13.31	-16.21		1.24	29.52	20.00	-9.52	Т3	
G3W11900		512	3.61	-23.22			26.83	20.00	-6.83	Т3	
	Radial	661	3.78	-23.18		N/A	26.96	20.00	-6.96	Т3	1.8, 2.0
	r wardt	810	3.61	-23.38		26.99	20.00	-6.99	Т3		

Table 7-3
Raw Data Results for UMTS

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates		
		4132	8.89	-27.76		0.96	36.65	20.00	-16.65	T4			
	Axial	4183	8.96	-25.63	-62.03	0.45	34.59	20.00	-14.59	T4	1.8, 2.6		
UMTS V		4233	8.77	-27.60		0.41	36.37	20.00	-16.37	T4			
O.W.T.O.V		4132	3.78	-32.93			36.71	20.00	-16.71	T4			
	Radial	4183	3.92	-32.65	-63.33	N/A	36.57	20.00	-16.57	T4	1.8, 2.0		
		4233	4.09	-33.39			37.48	20.00	-17.48	T4			
	Axial	1312	8.98	-26.41		0.91	35.39	20.00	-15.39	T4			
		1412	8.98	-27.40	-62.03	0.53	36.38	20.00	-16.38	T4	1.8, 2.6		
UMTS IV		1513	8.73	-27.04		0.92	35.77	20.00	-15.77	T4			
OM 10 IV		1312	3.77	-33.25	-63.33 N/A		37.02	20.00	-17.02	T4			
	Radial	1412	3.94	-33.35		-63.33 N/A	N/A	37.29	20.00	-17.29	T4	1.8, 2.0	
		1513	3.94	-33.22			37.16	20.00	-17.16	T4			
		9262	8.70	-27.17		0.46	35.87	20.00	-15.87	T4			
	Axial	9400	8.81	-26.75	-62.03	0.60	35.56	20.00	-15.56	T4	1.8, 2.6		
UMTS II		9538	8.72	-27.34		0.53	36.06	20.00	-16.06	T4			
OWISH		9262	4.27	-32.63			36.90	20.00	-16.90	T4			
	Radial	9400	4.19	-33.12		-63.33	-63.33	N/A	37.31	20.00	-17.31	T4	1.8, 2.0
	radidi	9538	3.96	-33.48		37.44	20.00	-17.44	T4				

Table 7-4 Raw Data Results for LTE B12

Me	ode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
			10MHz	23095	9.85	-22.91		1.38	32.76	20.00	-12.76	T4	
Axial	Avial	5MHz	23095	9.85	-22.36	-62.03	0.88	32.21	20.00	-12.21	T4	1.8, 2.6	
		Axiai	3MHz	23095	9.58	-22.49	-02.03	1.24	32.07	20.00	-12.07	T4	1.0, 2.0
LTER	Band 12		1.4MHz	23095	10.08	-22.53		1.24	32.61	20.00	-12.61	T4	
LIEE	oanu 12		10MHz	23095	1.95	-27.89			29.84	20.00	-9.84	Т3	
		Radial	5MHz	23095	1.59	-28.08	62.22	N/A	29.67	20.00	-9.67	Т3	1.8. 2.0
		Nadiai	3MHz	23095	1.38	-28.61	63.33	IN/A	29.99	20.00	-9.99	Т3	1.0, 2.0
			1.4MHz	23095	1.46	-28.79			30.25	20.00	-10.25	T4	

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 21 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 21 01 55

Table 7-5 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
Axial	Avial	10MHz	23230	9.68	-21.96	-62.03	1.40	31.64	20.00	-11.64	T4	1.8, 2.6
LTE Dand 42	Axial	5MHz	23230	9.67	-22.68	-02.03	1.32	32.35	20.00	-12.35	T4	1.0, 2.0
LTE Band 13	10MHz	23230	1.98	-27.86	62.22	NI/A	29.84	20.00	-9.84	T3	1.8, 2.0	
	Radiai	5MHz	23230	1.98	-27.55	-63.33	-63.33 N/A	29.53	20.00	-9.53	Т3	1.0, 2.0

Table 7-6 Raw Data Results for LTE B5

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	20525	9.78	-21.56		1.33	31.34	20.00	-11.34	T4	1.8, 2.6
	Axial	5MHz	20525	9.70	-21.71	-62.03	1.24	31.41	20.00	-11.41	T4	
	Axiai	3MHz	20525	9.84	-22.05	-02.03	1.07	31.89	20.00	-11.89	T4	
LTE Band 5		1.4MHz	20525	9.87	-22.85		1.47	32.72	20.00	-12.72	T4	
LIE Ballu 5		10MHz	20525	1.63	-28.23			29.86	20.00	-9.86	T3	
	Radial	5MHz	20525	1.46	-27.80	-63.33	N/A	29.26	20.00	-9.26	T3	1.8, 2.0
	Naulai	3MHz	20525	1.78	-27.80	-03.33	IVA	29.58	20.00	-9.58	Т3	1.6, 2.0
		1.4MHz	20525	1.71	-28.18			29.89	20.00	-9.89	T3	

Table 7-7 Raw Data Results for LTE B66

	Naw Data Nesalts for ETE Boo											
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	132322	9.53	-21.03		1.17	30.56	20.00	-10.56	T4	1.8, 2.6
		15MHz	132322	9.44	-20.60		1.28	30.04	20.00	-10.04	T4	
A		10MHz	132322	9.71	-20.71		1.20	30.42	20.00	-10.42	T4	
	Axial	5MHz	132322	9.71	-21.31	-62.03	1.28	31.02	20.00	-11.02	T4	
		3MHz	132657	9.64	-21.00		1.37	30.64	20.00	-10.64	T4	
		3MHz	132322	9.51	-19.95		1.16	29.46	20.00	-9.46	Т3	
LTE Band CC		3MHz	131987	9.86	-21.69		1.50	31.55	20.00	-11.55	T4	
LTE Band 66		1.4MHz	132322	9.85	-21.76		1.32	31.61	20.00	-11.61	T4	
		20MHz	132322	1.53	-26.71			28.24	20.00	-8.24	T3	
		15MHz	132322	1.72	-26.74	1		28.46	20.00	-8.46	Т3	
	D- di-l	10MHz	132322	1.55	-27.22	60.00	N/A	28.77	20.00	-8.77	Т3	40.00
	Radial	5MHz	132322	1.58	-27.10	-63.33	IN/A	28.68	20.00	-8.68	T3	1.8, 2.0
		3MHz	132322	1.68	-27.01			28.69	20.00	-8.69	Т3	
		1.4MHz	132322	1.62	-27.86			29.48	20.00	-9.48	T3	

Table 7-8 Raw Data Results for LTE B2

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		20MHz	18900	10.08	-20.82		1.31	30.90	20.00	-10.90	T4	
		15MHz	18900	9.55	-20.28		1.28	29.83	20.00	-9.83	Т3	
	Axial	10MHz	18900	9.58	-20.55	-62.03	1.34	30.13	20.00	0 -10.13	T4	1006
	Axiai	5MHz	18900	9.57	-21.28	-02.03	1.36	30.85	20.00	-10.85	T4	1.0, 2.0
		3MHz	18900	9.79	-20.99		1.27	30.78	20.00	-10.78	T4	
		1.4MHz	18900	9.86	-20.94		1.36	30.80	20.00	-10.80	T4	
LTE Band 2		20MHz	18900	1.89	-26.71			28.60	20.00	-8.60	Т3	i
LIE Banu 2		15MHz	18900	1.81	-26.81			28.62	20.00	-8.62	Т3	
		10MHz	19150	1.93	-26.78			28.71	20.00	-8.71	Т3	
	Radial	10MHz	18900	1.49	-26.61	-63.33	N/A	28.10	20.00	-8.10	Т3	10.00
	Radiai	10MHz	18650	1.51	-26.60	-03.33	IN/A	28.11	20.00	-8.11	Т3	1.0, 2.0
		5MHz	18900	1.46	-27.11			28.57	20.00	-8.57	Т3	
		3MHz	18900	1.51	-26.97			28.48	20.00	-8.48	T3	
		1.4MHz	18900	1.51	-27.18			28.69	20.00	-8.69	Т3	

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager	
Filename:	Test Dates:	DUT Type:		Page 22 of 55	
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 22 01 55	

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (**Phone→Settings→Accessibility→Hearing aids**) was set to ON for Frequency Response compliance
- 4. Speech Signal: ITU-T P.50 Artificial Voice
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G modes.
- 6. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. GSM

- 1. Power Configuration: GSM850: PCL=5, GSM1900: PCL=0;
- 2. Vocoder Configuration: EFR (GSM);

C. UMTS


- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: AMR 12.2 kbps (UMTS);

D. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 16QAM, 1RB, 99% RB offset
- 3. Vocoder Configuration: WB AMR 6.60kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 66 at 3MHz is the worst-case for the Axial probe orientation. LTE Band 2 at 10MHz bandwidth is the worst-case for the Radial probe orientation.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 22 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 23 of 55

III. 1 kHz Vocoder Application Check

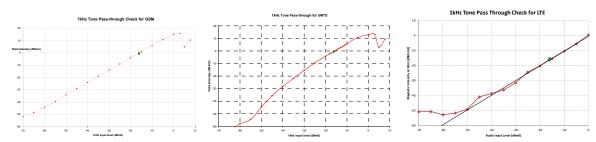

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.

IV. T-Coil Validation Test Results

Table 7-9
Helmholtz Coil Validation Table of Results – 07/29/2019

ltem	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.973	PASS
Environmental Noise	< -58 dBA/m	-62.03	PASS
Frequency Response, from limits	> 0 dB	0.50	PASS

Table 7-10
Helmholtz Coil Validation Table of Results – 07/22/2019

ltem	Target	Result	Verdict
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.040	PASS
Environmental Noise	< -58 dBA/m	-63.33	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 24 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 24 of 55

V. ABM1 Magnetic Field Distribution Scan Overlays

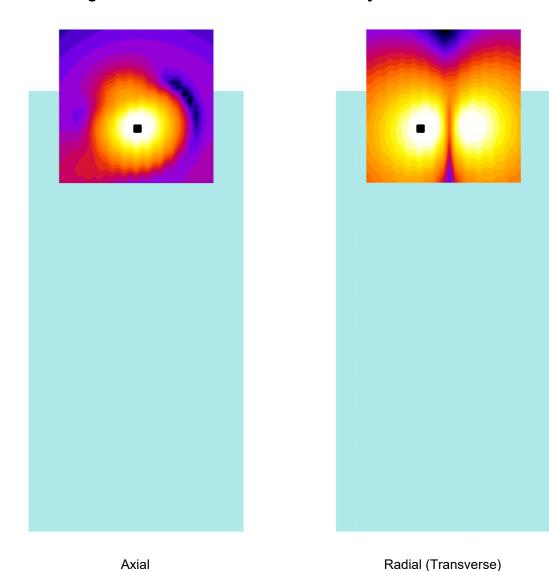


Figure 7-1
T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 25 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 25 of 55

8. MEASUREMENT UNCERTAINTY

Table 8-1 Uncertainty Estimation Table

Contribution	Data +/- %	Data +/- dB	Data Type	Probability distribution	Divisor	Standard uncertainty	Standard Uncertainty (dB)	
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%		
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%		
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%		
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%		
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%		
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%		
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%		
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%		
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%		
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%		
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%		
Combined standard uncertainty	Combined standard uncertainty, uc (k=1)							
Expanded uncertainty (k=2),	95% conf	idence lev	/el			35.3%	1.31	

Notes:

- 1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- 2. All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 26 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 26 of 55

EQUIPMENT LIST 9.

Table 9-1 **Equipment List**

	=40.0										
Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number					
Control Company	4040	Temperature / Humidity Monitor	2/28/2018	Biennial	2/28/2020	150761911					
Dell	Latitude E6540	SoundCheck Acoustic Analyzer Laptop	9/6/2018	Biennial	9/6/2020	2655082910					
Listen	SoundConnect	Microphone Power Supply	9/6/2018	Biennial	9/6/2020	0899-PS150					
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/6/2018	Biennial	9/6/2020	23792992					
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/30/2019	Annual	1/30/2020	162125					
Rohde & Schwarz	CMW500	Radio Communication tester	8/3/2018	Annual	8/3/2019	140144					
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	21053					
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/19/2018	Biennial	9/19/2020	TEM-1123					
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/19/2018	Biennial	9/19/2020	TEM-1129					
TEM	Helmholtz Coil	Helmholtz Coil	10/10/2018	Biennial	10/10/2020	SBI 1052					
TEM		HAC System Controller with Software	N/A		N/A	N/A					
TEM		HAC Positioner	N/A		N/A	N/A					

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 27 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 27 01 33

10. TEST DATA

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 20 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 28 of 55



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Axial T-Coil Probe SN: TEM-1123; Calibrated: 09/19/2018
- Helmholtz Coil SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

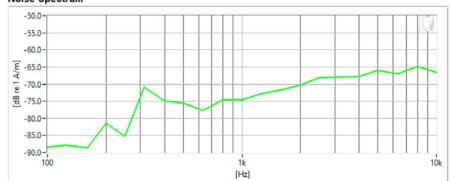

Frequency Response

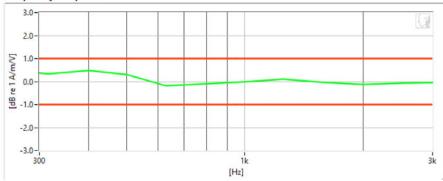

Results

Verification 1kHz Intensity	-9.973 dB	\checkmark	Max/Min	-9.5/-10.5
Verification ABM2	-62.03 dB	•	Maximum	-58.0
Frequency Response Margin	500m dB	•	Tolerance curves	Aligned Data

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 29 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 29 01 55



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 09/19/2018
- Helmholtz Coil SN: SBI 1052; Calibrated: 10/10/2018

Noise Spectrum

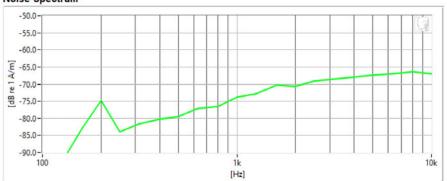

Frequency Response

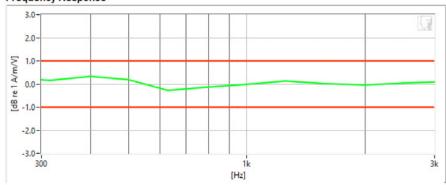

Results

Verification 1kHz Intensity	-10.039 d	3 •	Max/Min	-9.5/-10.5
Verification ABM2	-63.33 d	3	Maximum	-58.0
Frequency Response Margin	700m d	3	Tolerance curves	Aligned Data

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 30 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 30 01 33



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

Mode: GSM 850Channel: 190

· Speech Signal: ITU-T P.50 Artificial Voice

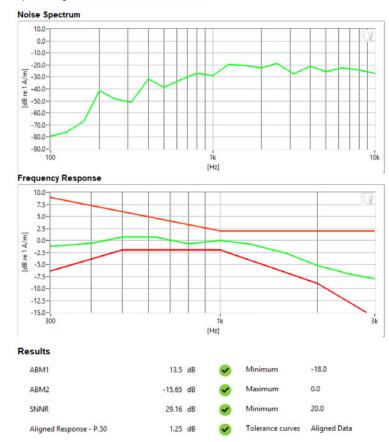

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 31 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 31 01 55



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

Mode: GSM 1900Channel: 512

· Speech Signal: ITU-T P.50 Artificial Voice

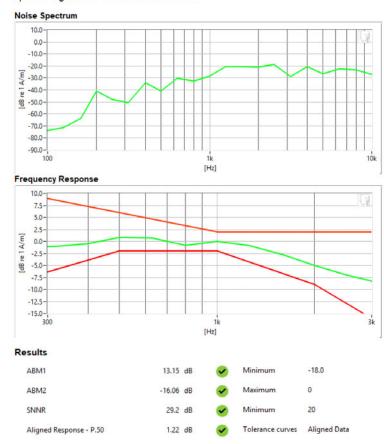

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 32 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 32 01 33



Type: Portable Handset Serial: 04644


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

- Mode: UMTS Band V
- Channel: 4183
- Speech Signal: ITU-T P.50 Artificial Voice

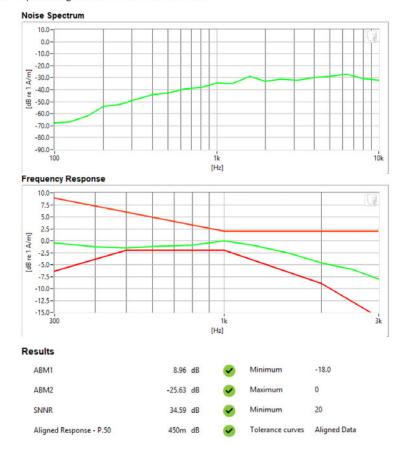

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 33 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		rage 33 01 55



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

. Mode: UMTS Band IV

Channel: 1312

· Speech Signal: ITU-T P.50 Artificial Voice

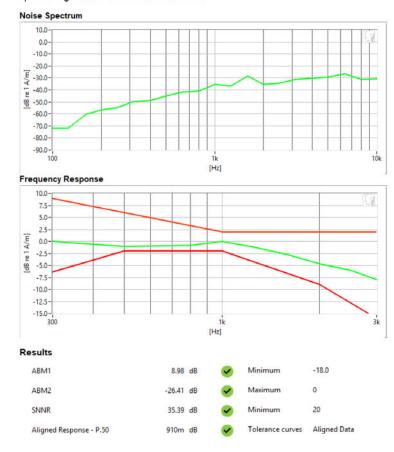

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 34 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 34 01 33



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

Mode: UMTS Band II

Channel: 9400

· Speech Signal: ITU-T P.50 Artificial Voice

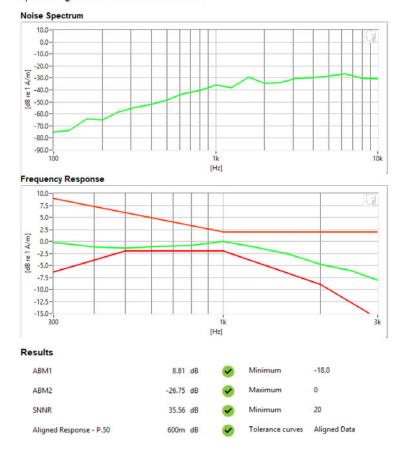

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 35 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 35 01 55



PCTEST Hearing-Aid Compatibility Facility

DUT: ZNFX120WM

Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011


Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 09/19/2018

Test Configuration:

 Mode: LTE Band 66 Bandwidth: 3MHz Channel: 132322

Speech Signal: ITU-T P.50 Artificial Voice

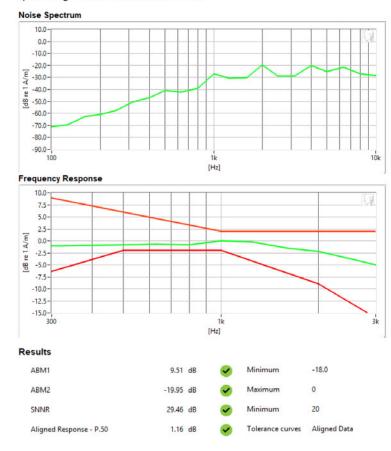

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 36 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 30 01 33



Type: Portable Handset Serial: 04644


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: GSM 850
 Channel: 251

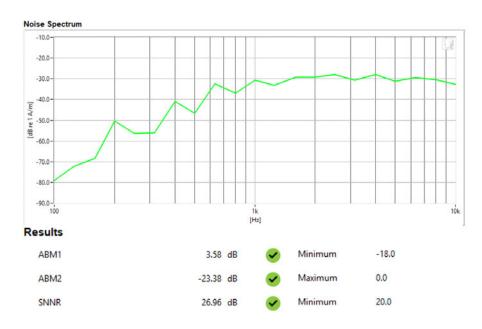

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 27 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 37 of 55



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: GSM 1900Channel: 512



FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogg 20 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 38 of 55



Type: Portable Handset Serial: 04644


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: UMTS Band V
 Channel: 4183

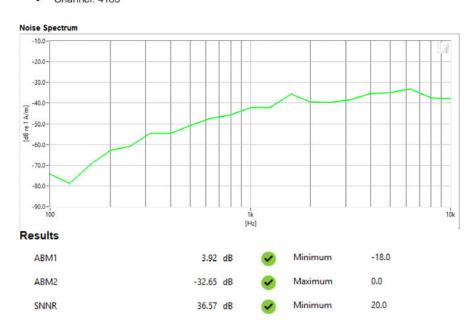

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 39 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 39 01 33



Type: Portable Handset Serial: 04644

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: UMTS Band IV
Channel: 1312



FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 40 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 40 of 55



Type: Portable Handset Serial: 04644


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: UMTS Band II
Channel: 9262

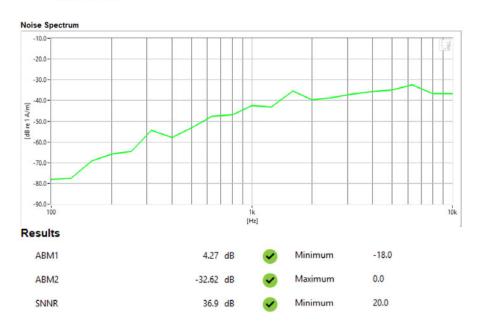

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 44 of FF
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 41 of 55



Type: Portable Handset Serial: 04644


Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 09/19/2018

Test Configuration:

Mode: LTE Band 2Bandwidth: 10MHzChannel: 18900

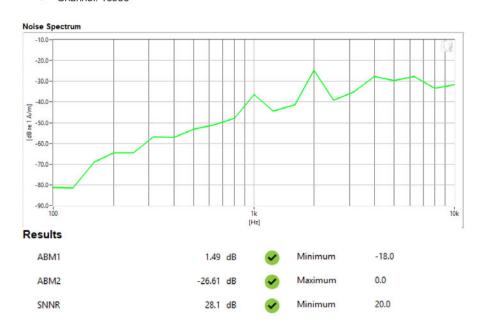

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dogo 42 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 42 of 55

11. CALIBRATION CERTIFICATES

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	(LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 43 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 43 01 33



Certificate of Calibration

for

AXIAL T COIL PROBE

Manufactured by:

TEM CONSULTING LP

Model No:

AXIAL T COIL PROBE

Serial No: Calibration Recall No: TEM-1123 29156

Submitted By:

Customer:

Andrew Harwell

Company: Address:

PCTest Engineering Lab 6660-B Dobbin Road

6660

Columbia MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

Upon receipt for Calibration, the instrument was found to be:

V OA+ 12/4/2019

Within (X)

tolerance of the indicated specification. See attached Report of Calibration.
The information supplied relates to the calibrated item listed above.
West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by: Fo

Calibration Date:

19-Sep-18

Felix Christopher (QA Mgr.)

Certificate No:

29156 -2

ISO/IEC 17025:2005

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

ACCREDITED

West Caldwell
Calibration
uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

FCC ID: ZNFX120WM

HAC (T-COIL) TEST REPORT

Filename:

1M1907050113-08.ZNF

07/22/2019 - 07/31/2019

DUT Type:

Page 44 of 55

Page 44 of 55

© 2019 PCTEST Engineering Laboratory, Inc.

REV 3.3.M

HCATEMC_TEM-1123_Sep-19-2018



Calibration Lab. Cert. # 1533.01

ISO/IEC 17025: 2005

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

TEM Consulting LP Axial T Coil Probe Company: PCTest Enginering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

I. D. No.: XXXX

Calibration results: Probe Sensitivity measured with Helmholtz Coil Before & after data same: ...X.:. Helmholtz Coil; 10 the number of turns on each coil; Nο 0.204 Laboratory Environment: the radius of each coil, in meters: m °C Ambient Temperature: 0.08 22.7 the current in the coils, in amperes.; Α 7.09 A/m/V Ambient Humidity: Helmholtz Coil Constant; 5.95 Ambient Pressure: 99.326 Helmholtz Coil magnetic field; A/m Calibration Date: 19-Sep-2018 Calibration Due: Probe Sensitivity at 1000 Hz. dBV/A/m. Report Number: 29156 -2 -59.89 was 1.013 mV/A/m Control Number: 29156 903 Ohms Probe resistance


The above listed instrument meets or exceeds the tested manufacturer's specifications.

This Calibration is traceable through NIST test numbers:

683/284413-14

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

Graph represents Probes Frequency Response.

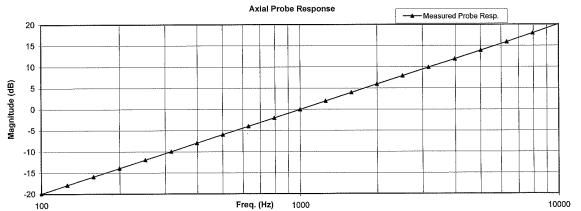

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, IŞØ)17025

Cal. Date: 19-Sep-2018

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs. Inc.

Page 1 of 2

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 45 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 45 01 55

HCATEMC_TEM-1123_Sep-19-2018

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

for

TEM Consulting LP Axial T Coil Probe Company: PCTest Enginering Lab

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Function	Tolera	nce	Me	asured val	ues
			Before	Out	Remarks
Probe Sensitivity at	1000 Hz.	dBV/A/m	-59.89		
		dB			
Probe Level Linearity		6	6.03		
	Ref. (0 dB)	0	0.00		
		-6	-6.03		
		-12	-12.05		
W		Hz			
Probe Frequency Response					
					į
		794	-2.0		
	Ref. (0 dB)	1000	0.0		
		1259	2.0		
		1585	4.0		
		1995	5.9		
		2512	7.9		
		3162	9.9		
		3981	11.9		
		5012	13.9		
		6310	15.9		
		7943	18.0		
		10000	20.1		
	***************************************	Probe Sensitivity at 1000 Hz. Probe Level Linearity Ref. (0 dB)	Probe Sensitivity at 1000 Hz. dBV/A/m Probe Level Linearity Ref. (0 dB) Ref. (0 dB) O -6 -12 Probe Frequency Response Hz Probe Frequency Response 100 126 158 200 251 316 398 501 631 794 Ref. (0 dB) 1000 1259 1585 1995 2512 3162 3981 5012 6310 7943	Probe Sensitivity at 1000 Hz. dBV/A/m -59.89 Probe Level Linearity 6 6 6.03 Ref. (0 dB) 0 0.00 -6 -6.03 -12 -12.05 Probe Frequency Response 100 -19.9 156 -17.9 158 -15.9 200 -13.9 251 -11.9 316 -9.9 398 -7.9 501 -6.0 631 -4.0 794 -2.0 Ref. (0 dB) 1000 0.0 1259 2.0 Ref. (0 dB) 1000 0.0 1259 2.0 1585 4.0 1995 5.9 2512 7.9 3162 9.9 3981 11.9 5012 13.9 6310 15.9 7943 18.0	Before Out

Instruments used for c	alibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018

Calibrated on WCCL system type 9700


This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	1 LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 46 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 40 01 55



Certificate of Calibration

RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING LP

Model No: Serial No:

RADIAL T COIL PROBE TEM-1129

Calibration Recall No:

29156

Submitted By:

Customer:

Andrew Harwell

Company: Address:

PCTest Engineering Lab 6660-B Dobbin Road

Columbia

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

Within (X)

tolerance of the indicated specification. See attached Report of Calibration. The information supplied relates to the calibrated item listed above.

West Caldwell Calibration Laboratories' calibration control system meets the requirements, ISO 10012-1 MIL-STD-45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2008 and ISO 17025.

Note: With this Certificate, Report of Calibration is included.

Approved by: FC

Calibration Date:

19-Sep-18

Felix Christopher (QA Mgr.)

Certificate No:

29156 -1

West Caldwell

QA Doc. #1051 Rev. 2.0 10/1/01

Certificate Page 1 of 1

ISO/IEC 17025:2005

ACCREDITED

Calibration Lab. Cert. # 1533.01

Calibration uncompromised calibration Laboratories. Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Approved by: FCC ID: ZNFX120WM HAC (T-COIL) TEST REPORT 15 LG Quality Manager Filename: Test Dates: **DUT Type:** Page 47 of 55 1M1907050113-08.ZNF 07/22/2019 - 07/31/2019 Portable Handset

HCRTEMC_TEM-1129_Sep-19-2018



1575 State Route 96, Victor NY 14564



REPORT OF CALIBRATION

TEM Consulting LP Radial T Coil Probe ,Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe

Serial No.: TEM-1129

I. D. No.: XXXX


Probe Sensitivity measured wit	h Helmhol	tz Coil			
Helmholtz Coil;			Before & after data same:	X	
the number of turns on each coil;	10	No.			
the radius of each coil, in meters;	0.204	m	Laboratory Environment:		
the current in the coils, in amperes.;	0.08	Α	Ambient Temperature:	22.7	°C
Helmholtz Coil Constant;	7.09	A/m/V	Ambient Humidity:	52.1	% RH
Helmholtz Coil magnetic field;	5.95	A/m	Ambient Pressure:	99.326	kPa
			Calibration Date:	19-Sep-2018	
Probe Sensitivity at	1000	Hz.	Re-calibration Due:		
was	-60.37	dBV/A/m	Report Number:	29150	3 -1
	0.958	mV/A/m	Control Number:	29150	3
Probe resistance	886	Ohms		*	

This Calibration is traceable through NIST test numbers:

683/284413-14

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2

Graph represents Probes Frequency Response.

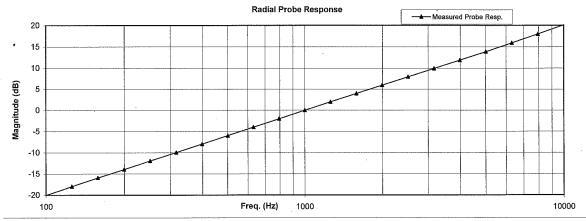

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2008, ISO 17025

Cal. Date: 19-Sep-2018

Measurements performed by:

James Zhu

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 1 of 2

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dags 40 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 48 of 55

HCRTEMC_TEM-1129_Sep-19-2018

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Test	Function	Tolera	nce	Measured values		
	**************************************			Before	Out	Remarks
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.37		
			dB			+
2.0	Probe Level Linearity		6	6.03		
		Ref. (0 dB)	0	0.00		
			-6	-6.03		
			-12	-12.05		
		Sandal American and American an	Hz			
3.0	Probe Frequency Response		100	-20.0		
			126	-17.9		
			158	-15.9		
			200	-14.0		
			251	-12.0		
			316	-10.0		
			398	-8.0		
			501	-6.0		
			631	-4.0		
			794	-2.0		
		Ref. (0 dB)	1000	0.0		
			1259	2.0		
			1585	4.0		
			1995	6.0		
			2512	7.9		
			3162	9.9		
			3981	11.9		
			5012	13.9		
			6310	15.9		
			7943	18.0		
			10000	20.1		
				1		

Instruments used for o	alibration:		Date of Cal.	Traceability No.	Due Date
' HP	34401A	S/N US360641	25-Jul-2018	,287708	25-Jul-2019
HP	34401A	S/N US361024	25-Jul-2018	,287708	25-Jul-2019
HP	33120A	S/N US360437	25-Jul-2018	,287708	25-Jul-2019
B&K	2133	S/N 1583254	25-Jul-2018	683/284413-14	25-Jul-2019

Cal. Date: 19-Sep-2018

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

FCC ID: ZNFX120WM	PCTEST*	HAC (I-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 49 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 49 01 55

12. CONCLUSION

The measurements indicate that the wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

FCC ID: ZNFX120WM	PCTEST*	HAC (T-COIL) TEST REPORT	① LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga EO of EE
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Page 50 of 55

13. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify
 Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, "IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells," U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- 12. Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- 15. EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.

FCC ID: ZNFX120WM	TENTEST*	PCTEST* HAC (T-COIL) TEST REPORT		Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 51 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		Fage 51 01 55

- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: ZNFX120WM	PCTEST	HAC (T-COIL) TEST REPORT	LG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 52 of 55
1M1907050113-08.ZNF	07/22/2019 - 07/31/2019	Portable Handset		F aye 32 01 33